



Test Report - FCC PART 90 Booster Class A (B9A)

Prepared For: Fiplex Communications Inc.

Approved for Release By:

Signature: Bruno Clavier

Name & Title: Bruno Clavier, General Manager

Date of Signature

(YYYY-MM-DD): 2020-10-30

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.



Table of Contents

1.	CUSTOMER INFORMATION.....	5
1.1	TEST RESULT SUMMARY.....	5
2.	LOCATION OF TESTING.....	8
2.1	TEST LABORATORY	8
2.2	TESTING WAS PERFORMED, REVIEWED BY	8
3.	TEST SAMPLE(S) (EUT/DUT).....	9
3.1	DEFINITIONS.....	9
3.2	DESCRIPTION OF THE EUT	10
3.3	CONFIGURATION OF EUT	11
3.4	TEST SETUP OF EUT.....	11
4.	TEST METHODS & APPLICABLE REGULATORY LIMITS.....	12
4.1	TEST METHODS/STANDARDS/GUIDANCE:	12
4.2	APPLIED LIMITS AND REGULATORY LIMITS:.....	12
5.	MEASUREMENT UNCERTAINTY	12
6.	ENVIRONMENTAL CONDITIONS.....	12
6.1	TEMPERATURE & HUMIDITY.....	12
7.	LIST OF TEST EQUIPMENT AND TEST FACILITY	13
7.1	LIST OF TEST EQUIPMENT.....	13
8.	TEST RESULTS.....	14
8.1	POWER AT THE FINAL AMPLIFIER	15
8.2	RF OUTPUT POWER & GAIN.....	16
8.3	OUT-OF-BAND REJECTION.....	19
8.3.1	VHF Band, Uplink.....	20
8.3.2	VHF Band, Downlink.....	21
8.3.3	UHF Upper Band, Uplink.....	22
8.3.4	UHF Lower Band, Uplink.....	23
8.3.5	UHF Upper Band, Downlink.....	24
8.3.6	UHF Upper Band, Downlink.....	25
8.4	BANDWIDTH & EMISSION	26
8.5	INPUT VS OUTPUT SIGNAL COMPARISON.....	27
8.5.1	25 kHz FM, Input Signal	30
8.5.2	12.5 kHz FM, Input Signal.....	31
8.5.3	6.25 kHz FM, Input Signal	32
8.5.4	C4FM, Input Signal	33
8.5.5	H-CPM, Input Signal.....	34
8.5.6	H-DQPSK, Input Signal.....	35
8.5.7	25 kHz FM, Uplink, AGC	36
8.5.8	25 kHz FM, Uplink, AGC +3dB	37
8.5.9	12.5 kHz FM, Uplink, AGC.....	38
8.5.10	12.5 kHz FM, Uplink, AGC +3dB.....	39
8.5.11	6.25 kHz FM, Uplink, AGC	40
8.5.12	6.25 kHz FM, Uplink, AGC +3dB	41
8.5.13	C4FM, Uplink, AGC	42



8.5.14	C4FM, Uplink, AGC +3dB.....	43
8.5.15	H-CPM, Uplink, AGC.....	44
8.5.16	H-CPM, Uplink, AGC +3dB.....	45
8.5.17	H-DQPSK, Uplink, AGC.....	46
8.5.18	H-DQPSK, Uplink, AGC +3dB.....	47
8.5.19	25 kHz FM, Downlink, AGC	48
8.5.20	25 kHz FM, Downlink, AGC +3dB	49
8.5.21	12.5 kHz FM, Downlink, AGC.....	50
8.5.22	12.5 kHz FM, Downlink, AGC +3dB.....	51
8.5.23	6.25 kHz FM, Downlink, AGC	52
8.5.24	6.25 kHz FM, Downlink, AGC +3dB	53
8.5.25	C4FM, Downlink, AGC	54
8.5.26	C4FM, Downlink, AGC +3dB.....	55
8.5.27	H-CPM, Downlink, AGC.....	56
8.5.28	H-CPM, Downlink, AGC +3dB.....	57
8.5.29	H-DQPSK, Downlink, AGC.....	58
8.5.30	H-DQPSK, Downlink, AGC +3dB.....	59
8.5.31	25 kHz FM, Uplink, AGC	60
8.5.32	25 kHz FM, Uplink, AGC +3dB	61
8.5.33	12.5 kHz FM, Uplink, AGC.....	62
8.5.34	12.5 kHz FM, Uplink, AGC +3dB.....	63
8.5.35	6.25 kHz FM, Uplink, AGC	64
8.5.36	6.25 kHz FM, Uplink, AGC +3dB	65
8.5.37	C4FM, Uplink, AGC	66
8.5.38	C4FM, Uplink, AGC +3dB.....	67
8.5.39	H-CPM, Uplink, AGC.....	68
8.5.40	H-CPM, Uplink, AGC +3dB.....	69
8.5.41	H-DQPSK, Uplink, AGC.....	70
8.5.42	H-DQPSK, Uplink, AGC +3dB.....	71
8.5.43	25 kHz FM, Downlink, AGC	72
8.5.44	25 kHz FM, Downlink, AGC +3dB	73
8.5.45	12.5 kHz FM, Downlink, AGC.....	74
8.5.46	12.5 kHz FM, Downlink, AGC +3dB.....	75
8.5.47	6.25 kHz FM, Downlink, AGC	76
8.5.48	6.25 kHz FM, Downlink, AGC +3dB	77
8.5.49	C4FM, Downlink, AGC	78
8.5.50	C4FM, Downlink, AGC +3dB.....	79
8.5.51	H-CPM, Downlink, AGC.....	80
8.5.52	H-CPM, Downlink, AGC +3dB.....	81
8.5.53	H-DQPSK, Downlink, AGC.....	82
8.5.54	H-DQPSK, Downlink, AGC +3dB.....	83
8.6	NOISE FIGURE.....	84
8.7	OUT-OF-BAND/OUT-OF-BLOCK EMISSIONS (INTERMODULATION PRODUCTS)	85
8.7.1	6.25 kHz Signal, Uplink, AGC	86
8.7.2	6.25 kHz Signal, Uplink, AGC +3dB	87
8.7.3	12.5 kHz Signal, Uplink, AGC.....	88
8.7.4	12.5 kHz Signal, Uplink, AGC +3dB	89
8.7.5	25 kHz Signal, Uplink, AGC	90
8.7.6	25 kHz Signal, Uplink, AGC +3dB	91
8.7.7	6.25 kHz Signal, Downlink, AGC	92
8.7.8	6.25 kHz Signal, Downlink, AGC +3dB	93
8.7.9	12.5 kHz Signal, Downlink, AGC.....	94



8.7.10	12.5 kHz Signal, Downlink, AGC +3dB.....	95
8.7.11	25 kHz Signal, Downlink, AGC	96
8.7.12	25 kHz Signal, Downlink, AGC +3dB	97
8.7.13	6.25 kHz Signal, Uplink, AGC.....	98
8.7.14	6.25 kHz Signal, Uplink, AGC +3dB	99
8.7.15	12.5 kHz Signal, Uplink, AGC.....	100
8.7.16	12.5 kHz Signal, Uplink, AGC +3dB	101
8.7.17	25 kHz Signal, Uplink, AGC	102
8.7.18	25 kHz Signal, Uplink, AGC +3dB	103
8.7.19	6.25 kHz Signal, Downlink, AGC	104
8.7.20	6.25 kHz Signal, Downlink, AGC +3dB	105
8.7.21	12.5 kHz Signal, Downlink, AGC.....	106
8.7.22	12.5 kHz Signal, Downlink, AGC +3dB.....	107
8.7.23	25 kHz Signal, Downlink, AGC	108
8.7.24	25 kHz Signal, Downlink, AGC +3dB	109
8.8	EMISSION MASK, OUT-OF-BAND	110
8.8.1	30 MHz to 1 GHz, VHF Uplink & VHF Downlink.....	111
8.8.2	1 GHz to 10 th Harmonic, VHF Uplink & VHF Downlink	112
8.8.3	30 MHz to 1 GHz, VHF Uplink & UHF Uplink	113
8.8.4	1 GHz to 10 th Harmonic, VHF Uplink & UHF Uplink	114
8.8.5	30 MHz to 1 GHz, VHF Uplink & UHF Downlink.....	117
8.8.6	1 GHz to 10 th Harmonic, VHF Uplink & UHF Downlink	118
8.8.7	30 MHz to 1 GHz, VHF Downlink & UHF Downlink.....	119
8.8.8	1 GHz to 10 th Harmonic, VHF Downlink & UHF Downlink	120
8.8.9	30 MHz to 1 GHz, VHF Downlink & UHF Uplink	121
8.8.10	1 GHz to 10 th Harmonic, VHF Downlink & UHF Uplink	122
8.8.11	30 MHz to 1 GHz, UHF Downlink & UHF Uplink	123
8.8.12	1 GHz to 10 th Harmonic, UHF Downlink & UHF Uplink.....	124
8.9	SPURIOUS RADIATED EMISSIONS.....	125
8.9.1	VHF Uplink.....	126
8.9.2	VHF Downlink.....	126
8.9.3	UHF Uplink.....	128
8.9.4	UHF Downlink.....	128
8.10	MODULATION CHARACTERISTICS	130
8.11	FREQUENCY STABILITY	131
8.12	TRANSIENT FREQUENCY BEHAVIOR.....	132
8.13	ADJACENT CHANNEL POWER LIMITS.....	133
9.	ANNEX-A - PHOTOGRAPHS OF THE EUT.....	134
10.	ANNEX-B – TEST SETUP PHOTOGRAPHS.....	134
11.	HISTORY OF TEST REPORT CHANGES.....	134



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

1. Customer Information

Applicant: Fiplex Communications Inc.
Address: 2101 NW 79th Ave.
MIAMI FL 33122

Contact: Mr. Fernando Sommariva
Telephone: 305-884-8991
Email address: fernando.sommariva@fiplex.com

1.1 Test Result Summary

The following test procedure and guidance were used for measuring FCC PART 90 (PRIVATE LAND MOBILE RADIO SERVICES) known as Licensed Land Mobile; ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters. Full test results are available in this report.

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.

The Following is for Test item FCC ID: P3TDH14-2A

Applicable Clauses from Part 2		
FCC Part 2 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
2.202	Bandwidth & Emission	Pass
2.1033 (c)(8)	Power at the Final Amplifier	Pass
2.1046 (a)	RF Output Power	Pass
2.1047	Modulation characteristics	n/a
2.1049	Occupied Bandwidth	Pass
2.1051	Spurious emissions at antenna terminals	Pass
2.1053	Field strength of spurious radiation	Pass
2.1055	Frequency stability	n/a



Applicable Clauses from Part 90 Subpart I		
FCC Part 90 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
90.205	Transmitter Power	Pass
90.207	Types of Emissions	Pass
90.209	Bandwidth limitations	Pass
90.210	Emission masks, In-band	Pass
90.210	Emission masks, Out-of-band	Pass
90.213	Frequency stability	n/a
90.214	Transient Frequency Behavior	n/a
90.219 (d)(6)(i)	ERP of intermodulation products	n/a ¹
90.219 (d)(6)(ii)	ERP of noise within the passband	n/a ¹
90.219 (d)(6)(iii)	ERP of noise on spectrum < 1 MHz outside of the passband	n/a ¹
90.219 (d)(3)(i), (e)(1)	ERP of Radiated Power	n/a ¹
90.219 (e)(2)	Noise figure	Pass
90.219 (e)(3)	Spurious emissions	Pass
90.219 (e)(4)(i)(ii)(iii)	Retransmitted Signals	Pass
90.221	Adjacent channel power limits	Pass

Note 1: Requirements in Part 90.219 (d) apply at deployment of this EUT, therefore are not applicable at certification.

KDB 935210 D05 v01r04		
FCC KDB 935210 D05 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
4.1	Test Signals for PLMRS (Input Signals)	Pass
4.2	AGC Threshold	Reported
4.3	Out-of-Band Rejection	Reported
4.4	Input-versus-Output Signal Comparison	Pass
4.5	Output Power	Pass
4.5	Amplifier/Booster Gain (optional)	Reported
4.6	Noise Figure	Pass
4.7.2	Out-of-band/Out-of-block Conducted Emissions (Intermodulation Products)	Pass
4.7.3	EUT Spurious Conducted Emissions	Pass
4.8	Frequency Stability	n/a
4.9	Spurious Radiated Emissions	Pass



KDB 484596 D01 v01		
FCC KDB 935210 D05 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
3 a	Introduction	Reported
3 b	Explain the Differences	Reported
3 c	Spot-check Verification Data	Pass
3 d	Reference Section	Reported

Introduction

Equipment classes B9A and B9B are not allowed to be filed under the same FCC ID. However, FCC ID P3TDH14-2A is electrically identical to FCC ID P3TDH14-2B. The EUT uses software to limit the passband, converting the EUT from a Class B Industrial Signal Booster into a Class A Industrial Signal Booster. The test data is valid to be re-used due to the Class B operation of the EUT being worst-case in all aspects. The Class A operation represented in this filing was equal or more compliant with FCC Part 90 in all respects. Therefore all testing is to be considered identical, and has been re-used following the guidelines of KDB 484596.

Explain the Differences

FCC ID P3TDH14-2A is electrically identical to FCC ID P3TDH14-2B and has no difference in hardware. The EUT uses software to limit the passband from widths equal to or greater than 75 kHz to widths less than 75 kHz.

Spot-Check Verification Data

Please see sections Out-of-Band Rejection and Spurious Radiated Emissions in this report for Spot-Check data.

Reference Section

All original test data is from FCC ID P3TDH14-2B, test report "TR_3714-20_FCC_PT90_Booster Class B_1.docx".



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

2. Location of Testing

2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA").

Testing was performed at Timco's permanent laboratory located at 849 NW State Road 45, Newberry, Florida 32669

FCC test firm # 578780

FCC Designation # US1070

FCC site registration is under A2LA certificate # 0955.01

ISED Canada test site registration # 2056A

EU Notified Body # 1177

For all designations see A2LA scope # 0955.01

2.2 Testing was performed, reviewed by

Dates of Testing: October 6, 2020 – October 21, 2020

Signature:

Name & Title: Franklin Rose, EMC Specialist

Date of Signature

(YYYY-MM-DD): 2020-10-30

Signature:

Sr. EMC Engineer
EMC-003838-NE



Name & Title: Tim Royer, EMC Engineer

Date of Signature

(YYYY-MM-DD): 2020-10-30



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

3. Test Sample(s) (EUT/DUT)

The test sample was received: October 2, 2020

3.1 Definitions

Signal booster: A device or system that automatically receives, amplifies, and retransmits signals from wireless stations into and out of building interiors, tunnels, shielded outdoor areas and other locations where these signals would otherwise be too weak for reliable communications. Signal booster systems may contain both Class A and Class B signal boosters as components.

Class A signal booster: A signal booster designed to retransmit signals on one or more specific channels. A signal booster is deemed to be a Class A signal booster if none of its passbands exceed 75 kHz.

Class B signal booster: A signal booster designed to retransmit any signals within a wide frequency band. A signal booster is deemed to be a Class B signal booster if it has a passband that exceeds 75 kHz.



3.2 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	P3TDH14-2A
Brief Description	VHF/UHF Master Unit
Type of Modular	n/a
Model(s) #	DH142
Trade name	n/a
Firmware version	3.01-00
Software version	1.02
Serial Number	20096064FU

Technical Characteristics	
Technology	Bi-Directional Industrial Signal Booster
Frequency Range	150.8 – 173.4 MHz; and 450 – 512 MHz
RF O/P Power (Max.)	30 dBm (1 W)
Modulation	n/a
Bandwidth & Emission Class	16K0F3E, 11K3F3E, 4K00F1E, 8K10F1D, 8K10F1E, 8K10F1W, 9K80F1D, 9K80F1E, 9K80D7W
Number of Channels	Variable.
Duty Cycle	100%
Antenna Connector	N
Voltage Rating (AC or Batt.)	120 V AC or 28 V DC (internally)

Antenna Characteristics				
Antenna Name	Frequency Range	Antenna Type	Dimensions	Antenna Gain
n/a	n/a	n/a	n/a	n/a

Note: This EUT does not include antenna(s).



3.3 Configuration of EUT

Test Modes		
Band	Link Direction	Test Frequencies
150 – 173 MHz	Uplink	150.81250 MHz
		162.10000 MHz
		173.39375 MHz
150 – 173 MHz	Downlink	150.81250 MHz
		162.10000 MHz
		173.39375 MHz
450 – 512 MHz	Uplink	450.01250 MHz
		474.00000 MHz
		511.99375 MHz
450 – 512 MHz	Downlink	450.01250 MHz
		474.00000 MHz
		511.99375 MHz

Operating conditions during Testing:

No other modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT) were made.

Peripherals used during Testing:

A laptop was used to control the EUT.

3.4 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.



4. Test methods & Applicable Regulatory Limits

4.1 Test methods/Standards/Guidance:

Test procedures and guidance for measuring Licensed Part 90 Licensed device:

- 1) ANSI C63.26-2015
- 2) FCC KDB 935210 D05 v01r04 Industrial Signal Boosters

4.2 Applied Limits and Regulatory Limits:

- 1) FCC CFR 47 Part 90 Subpart I, 90.219

5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
Note: The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

6. Environmental Conditions

6.1 Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Note: Specific environmental conditions that are applicable to a specific test are available in the test result section.	



7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer's model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

7.1 List of Test Equipment

Device	Manufacturer	Model	SN #	Current Cal	Cal Due
Signal Generator R&S SMU-200A	Rohde & Schwarz	SMU200A	103195	4/23/18	4/22/2021
Sweep/Signal Generator	Anritsu	68369B	985112	11/8/17	11/7/2020
Digital Multimeter	Fluke	77	35053830	11/6/17	11/5/2020
R&S 18 GHz USB Peak Power Sensor	Rohde & Schwarz	NRP-Z85	1411.7501.02-102085-W	2/4/19	2/3/2022
Active Loop	ETS-Lindgren	6502	00062529	12/11/17	12/10/2020
Biconical 1057	Eaton	94455-1	1057	12/13/17	12/12/2020
Log-Periodic 1243	Eaton	96005	1243	4/20/18	4/19/2021
Double-Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	2/25/20	2/24/2023
CHAMBER	Panashield	3M	N/A	3/12/19	3/11/2021
EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	8/28/18	8/27/2021
Frequency Counter Small	HP	5385A	3242A07460	9/9/20	9/9/2023
Type K J Thermometer	Martel	303	080504494	11/6/17	11/5/2020

Device	Manufacturer	Model	SN #	Verified On
Splitter/Combiner 1-1000MHz	Mini-Circuits	ZFSC-4-1-BNC+	U115700825	10/21/20
Splitter/Combiner 1-1000MHz	Mini-Circuits	ZFSC-4-1-BNC+	U115700826	10/21/20

Software	Author	Version
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3
RSCommander	Rohde & Schwarz	1.6.4
Field Strength	Timco	v4.10.7.0



8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Unless noted otherwise in the referenced standard, the measurements of **ac power-line conducted emissions and conducted power output** will be reported in units of dB μ V. Unless noted otherwise in the referenced standard, the measurements of **radiated emissions** will be reported in units of decibels, referenced to one microvolt per meter (dB μ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB μ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.



8.1 Power at the Final Amplifier

Limits from FCC Part 2.1033 (c)(8).

Referenced from test report "TR_3714-20_FCC_PT90_Booster Class B_1.docx".

No method of measurement is specified. The result has been calculated based on all available information.


Test Results		
EUT Operating Voltage (V)	EUT Current (A)	Power at the Final Amplifier
24 V DC	0.24	100 W



8.2 RF Output Power & Gain

Referenced from test report "TR_3714-20_FCC_PT90_Booster Class B_1.docx".

Limits from FCC Parts 2.1046(a), and 90.205 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

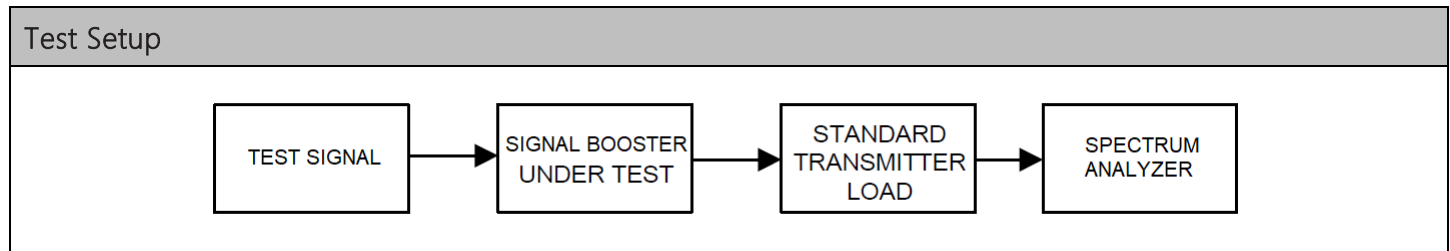

Test Results, Power Output		
Link Direction	Max Power Output (dBm)	Max Power Output (W)
Uplink	24.0	0.25
Downlink	30.0	1.0



VHF Band Gain

Test Results, Gain					
Link Direction	Tuned Frequency (MHz)	Input Level	Power Input (dBm)	Power Output (dBm)	Gain (dB)
Uplink	150.8125	AGC	-60	24.0	84.00
		AGC+3	-57	23.98	80.98
		Maximum	-47	23.95	70.95
	162.1	AGC	-60	24.0	84.00
		AGC+3	-57	23.98	80.98
		Maximum	-47	23.95	70.95
	173.39375	AGC	-60	24.0	84.00
		AGC+3	-57	23.98	80.98
		Maximum	-47	23.95	70.95
Downlink	150.8125	AGC	-60	23.7	83.70
		AGC+3	-57	23.7	80.70
		Maximum	-47	23.7	70.70
	162.1	AGC	-60	23.7	83.70
		AGC+3	-57	23.7	80.70
		Maximum	-47	23.7	70.70
	173.39375	AGC	-60	23.7	83.70
		AGC+3	-57	23.7	80.70
		Maximum	-47	23.7	70.70




UHF Band Gain

Test Results, Gain					
Link Direction	Tuned Frequency (MHz)	Input Level	Power Input (dBm)	Power Output (dBm)	Gain (dB)
Uplink	450.0125	AGC	-60.1	24.00	84.10
		AGC+3	-57.1	23.94	81.04
		Maximum	-47.1	23.88	70.98
	474.0	AGC	-60.1	24.00	84.10
		AGC+3	-57.1	23.94	81.04
		Maximum	-47.1	23.88	70.98
	511.99375	AGC	-60.1	24.00	84.10
		AGC+3	-57.1	23.94	81.04
		Maximum	-47.1	23.88	70.98
Downlink	450.0125	AGC	-55.1	30.75	85.85
		AGC+3	-52.1	30.7	82.80
		Maximum	-47.1	30.62	77.72
	474.0	AGC	-55.1	30.75	85.85
		AGC+3	-52.1	30.7	82.80
		Maximum	-47.1	30.62	77.72
	511.99375	AGC	-55.1	30.75	85.85
		AGC+3	-52.1	30.7	82.80
		Maximum	-47.1	30.62	77.72

8.3 Out-of-band Rejection

Limits and test method from FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

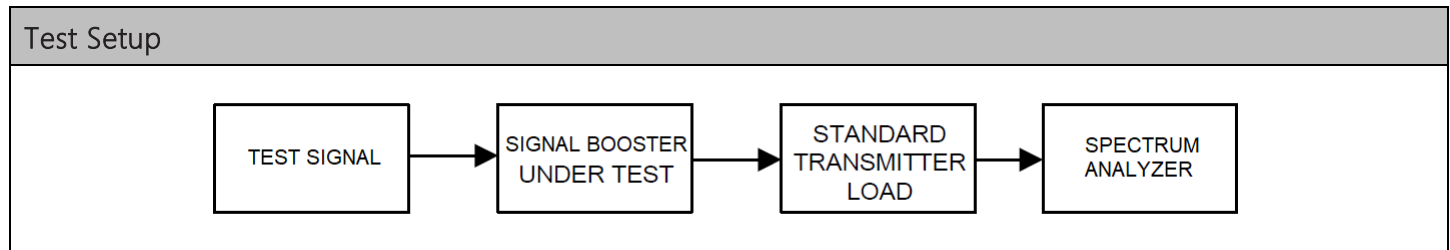


Test Results, Out-of-band Rejection and Class of Operation			
Operating Band	Link Direction	Passband (kHz)	Class of Operation
150 – 174 MHz	Uplink	< 75 kHz	Class A
150 – 174 MHz	Downlink	< 75 kHz	Class A
450 – 512 MHz	Uplink	< 75 kHz	Class A
450 – 512 MHz	Downlink	< 75 kHz	Class A




Out-of-band Rejection, Spectrum Plots

8.3.1 VHF Band, Uplink

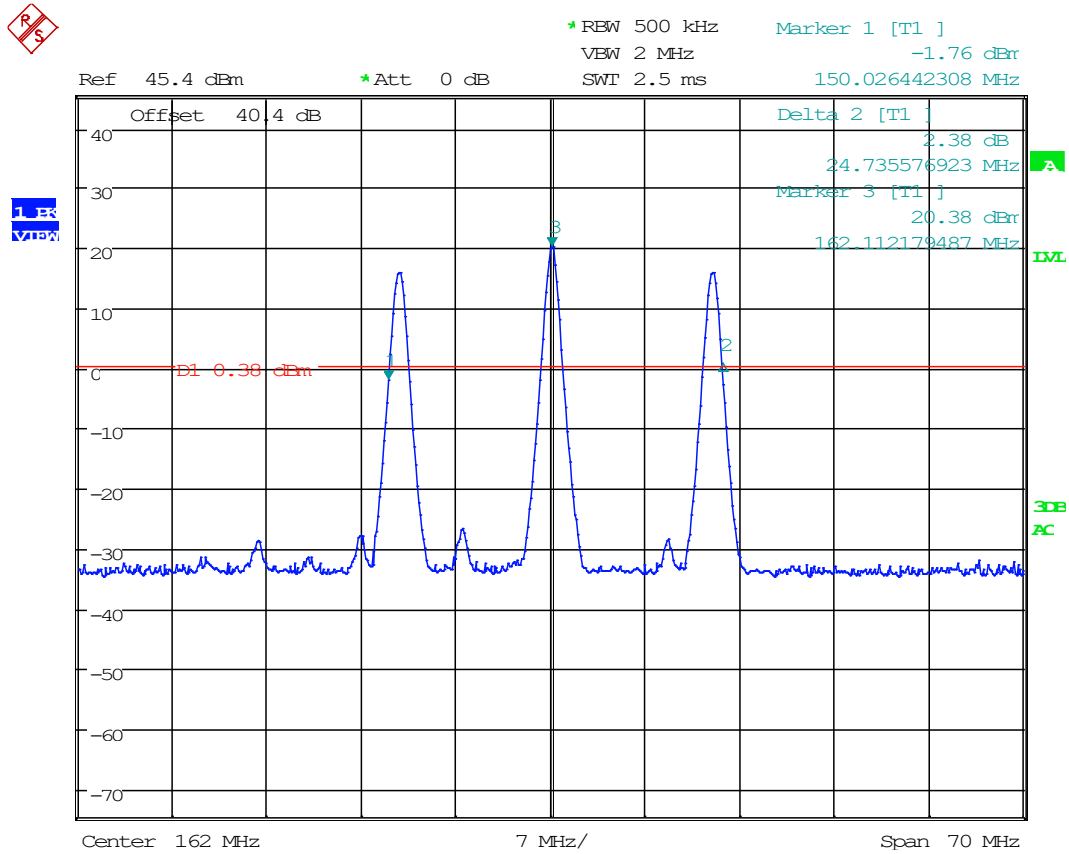


Date: 7.OCT.2020 16:58:35

8.3.2 VHF Band, Downlink

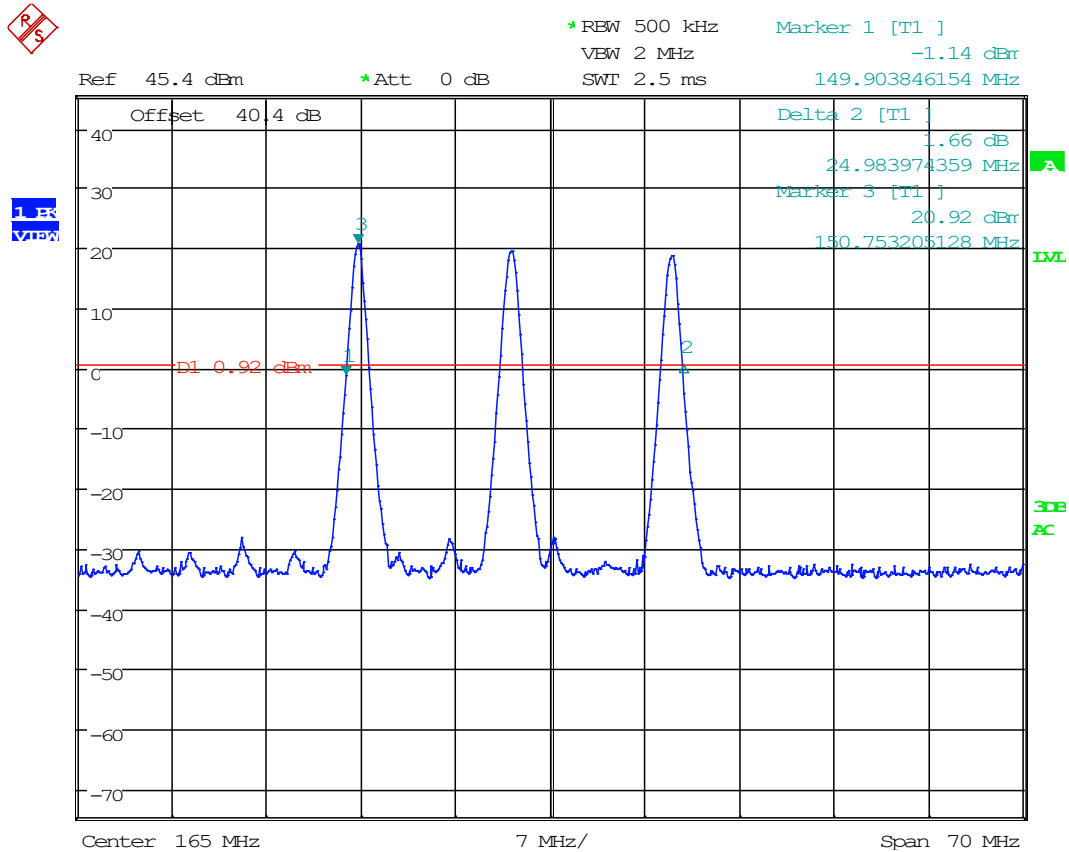


Date: 6.OCT.2020 13:10:27

8.3.3 UHF Upper Band, Uplink

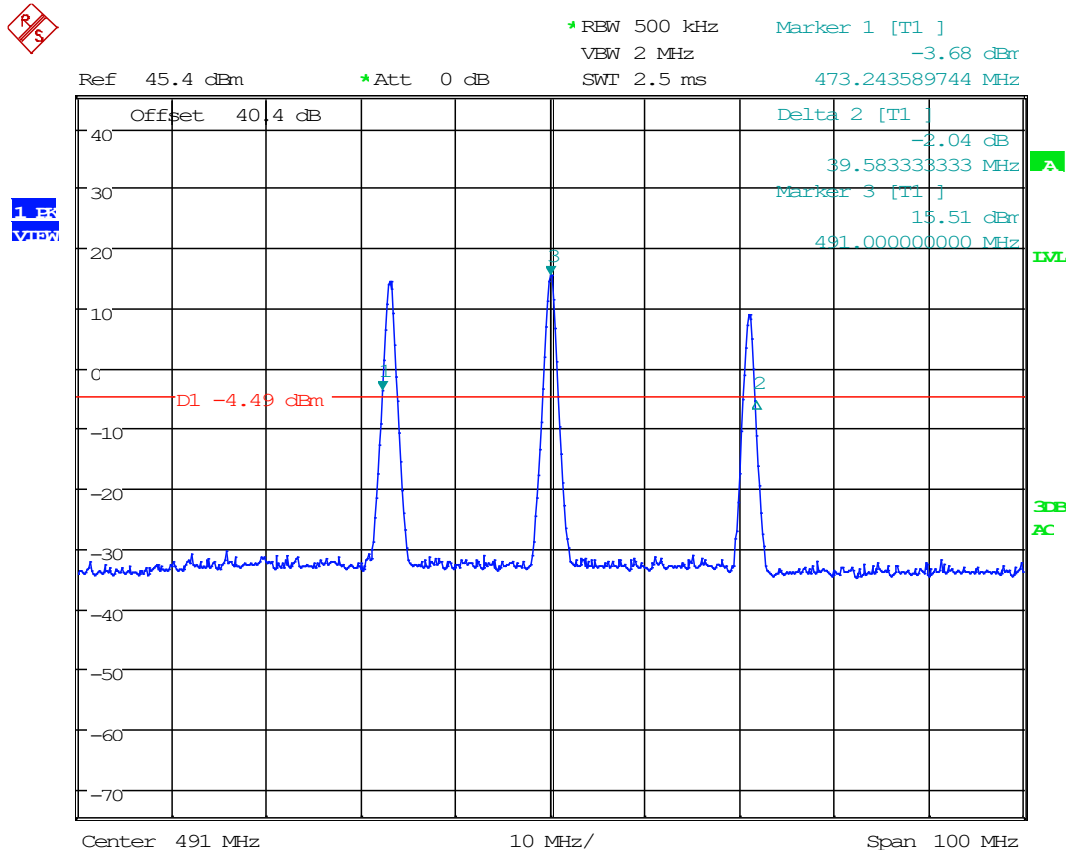


Date: 7.OCT.2020 16:37:36

8.3.4 UHF Lower Band, Uplink

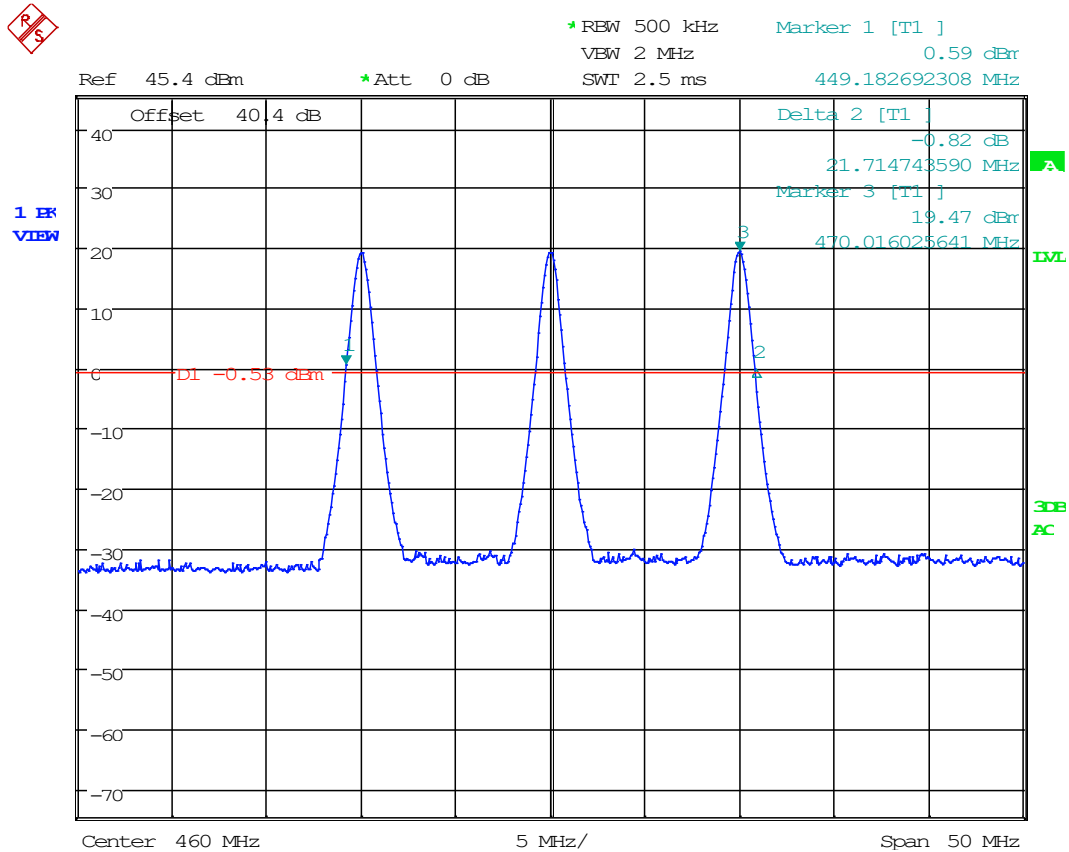


Date: 20.OCT.2020 16:56:36

8.3.5 UHF Upper Band, Downlink

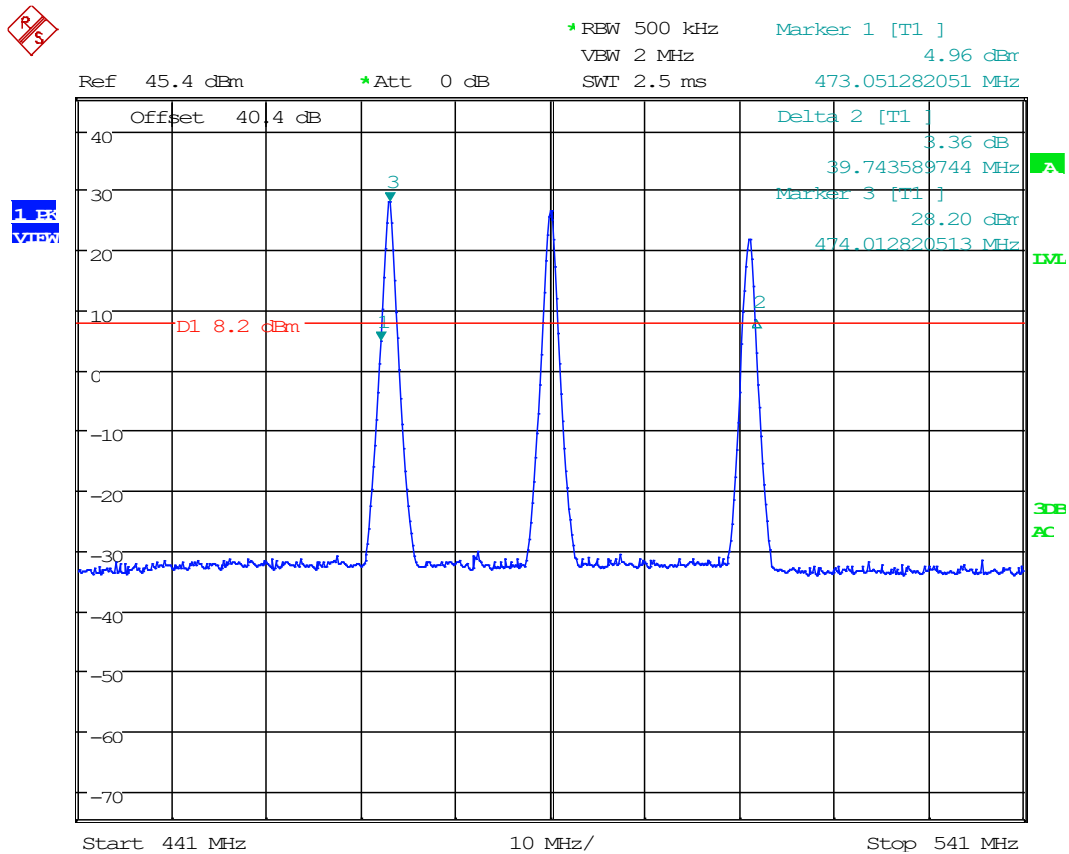

Date: 6.OCT.2020 13:34:15

8.3.6 UHF Lower Band, Downlink

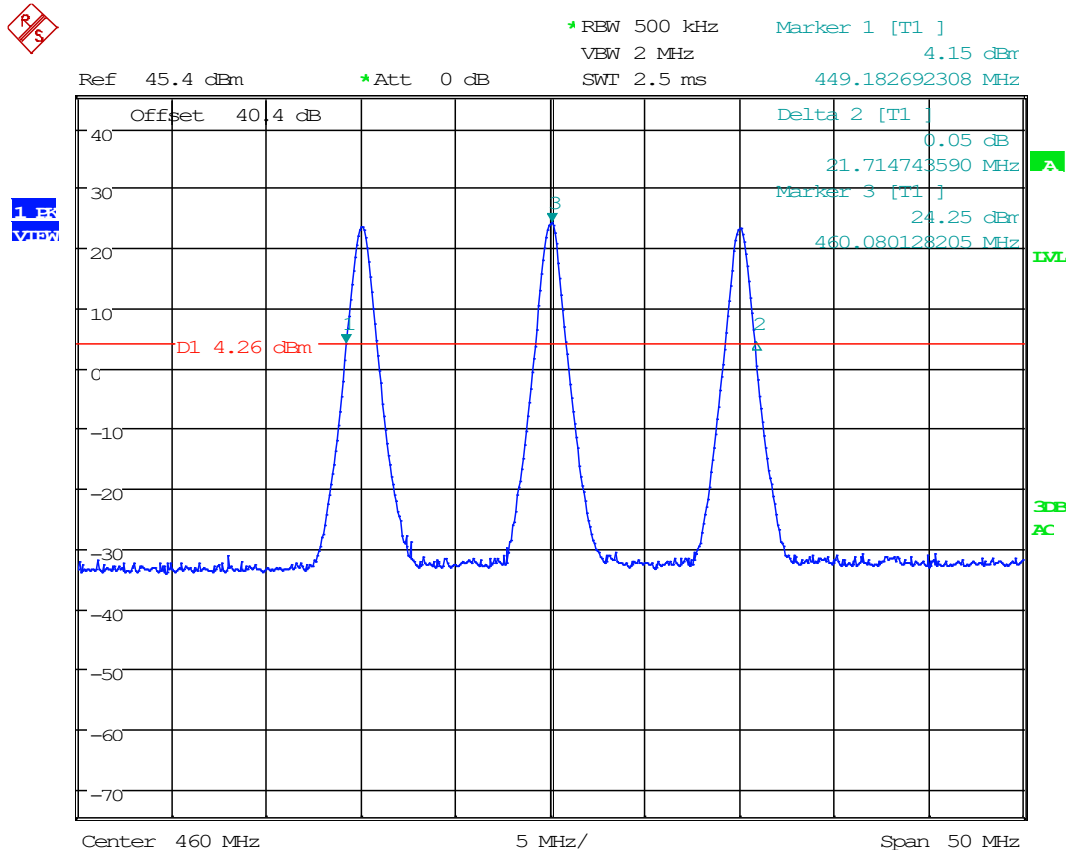

Date: 20.OCT.2020 17:59:14



8.4 Bandwidth & Emission

Referenced from test report "TR_3714-20_FCC_PT90_Booster Class B_1.docx".

Limits from FCC Parts 90.209 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

Authorized Bandwidth		
Rule Part	Operating Range	Authorized Bandwidth
Part 90	150 – 174 MHz	20 kHz, 11.25 kHz, 6 kHz
Part 90	450 – 512 MHz	20 kHz, 11.25 kHz, 6 kHz


Applicable Input Signals		
Signal	Occupied Bandwidth (MHz)	Representative Emission Designator(s)
CW	n/a	n/a
25 kHz FM	16.0	16K0F3E
12.5 kHz FM	11.3	11K3F3E
6.25 kHz FM	4.0	4K00F1E
C4FM (P25 Phase I)	8.1	8K10F1D, 8K10F1E
HCPM (P25 Phase II SU)	8.1	8K10F1W
HDQPSK (P25 Phase II BS)	9.8	9K80F1D, 9K80F1E, 9K80D7W



8.5 Input VS Output Signal Comparison

Referenced from test report "TR_3714-20_FCC_PT90_Booster Class B_1.docx".

Limits from FCC Parts 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

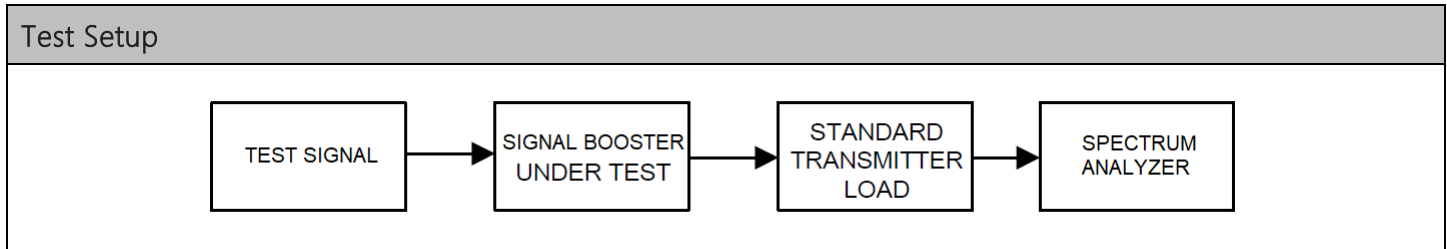



VHF Band Input VS Output Comparison

Test Results, Input VS Output Comparison						
Link Direction	Tuned Frequency (MHz)	Input Signal	AGC Level	99% OBW of Input (MHz)	99% OBW of Output (MHz)	Change (%)
Uplink	162.1	25 kHz FM	@ AGC	12.50	12.5	0.00%
			@ AGC+3 dB	12.50	12.5	0.00%
		12.5 kHz FM	@ AGC	4.04	7.89	0.00%
			@ AGC+3 dB	8.13	7.89	0.00%
		6.25 kHz FM	@ AGC	8.01	4.06	0.50%
			@ AGC+3 dB	9.78	4.06	0.50%
		C4FM	@ AGC	12.50	8.05	-0.98%
			@ AGC+3 dB	7.89	8.05	-0.98%
		HCPM	@ AGC	4.04	8.05	0.50%
			@ AGC+3 dB	8.13	8.17	2.00%
		HDQPSK	@ AGC	8.01	9.70	-0.82%
			@ AGC+3 dB	9.78	9.74	-0.41%
Downlink	162.1	25 kHz FM	@ AGC	12.50	12.34	-1.28%
			@ AGC+3 dB	12.50	12.34	-1.28%
		12.5 kHz FM	@ AGC	4.04	7.93	0.51%
			@ AGC+3 dB	8.13	7.93	0.51%
		6.25 kHz FM	@ AGC	8.01	4.04	0.00%
			@ AGC+3 dB	9.78	4.04	0.00%
		C4FM	@ AGC	12.50	7.97	-1.97%
			@ AGC+3 dB	7.89	7.93	-2.46%
		HCPM	@ AGC	4.04	8.25	3.00%
			@ AGC+3 dB	8.13	8.21	2.50%
		HDQPSK	@ AGC	8.01	9.74	-0.41%
			@ AGC+3 dB	9.78	9.62	-1.64%




UHF Band Input VS Output Comparison

Test Results, Input VS Output Comparison						
Link Direction	Tuned Frequency (MHz)	Input Signal	AGC Level	99% OBW of Input (MHz)	99% OBW of Output (MHz)	Change (%)
Uplink	474	25 kHz FM	@ AGC	12.50	12.34	-1.28%
			@ AGC+3 dB	12.50	12.34	-1.28%
		12.5 kHz FM	@ AGC	4.04	7.89	0.00%
			@ AGC+3 dB	8.13	7.89	0.00%
		6.25 kHz FM	@ AGC	8.01	4.06	0.50%
			@ AGC+3 dB	9.78	4.06	0.50%
		C4FM	@ AGC	12.50	8.21	0.98%
			@ AGC+3 dB	7.89	8.13	0.00%
		HCPM	@ AGC	4.04	8.17	2.00%
			@ AGC+3 dB	8.13	7.97	-0.50%
		HDQPSK	@ AGC	8.01	9.74	-0.41%
			@ AGC+3 dB	9.78	9.90	1.23%
Downlink	474	25 kHz FM	@ AGC	12.50	12.5	0.00%
			@ AGC+3 dB	12.50	12.5	0.00%
		12.5 kHz FM	@ AGC	4.04	7.89	0.00%
			@ AGC+3 dB	8.13	7.89	0.00%
		6.25 kHz FM	@ AGC	8.01	4.06	0.50%
			@ AGC+3 dB	9.78	4.06	0.50%
		C4FM	@ AGC	12.50	8.13	0.00%
			@ AGC+3 dB	7.89	7.97	-1.97%
		HCPM	@ AGC	4.04	8.21	2.50%
			@ AGC+3 dB	8.13	8.17	2.00%
		HDQPSK	@ AGC	8.01	9.90	1.23%
			@ AGC+3 dB	9.78	9.74	-0.41%




Input VS Output, Input Spectrum Plots

8.5.1 25 kHz FM, Input Signal

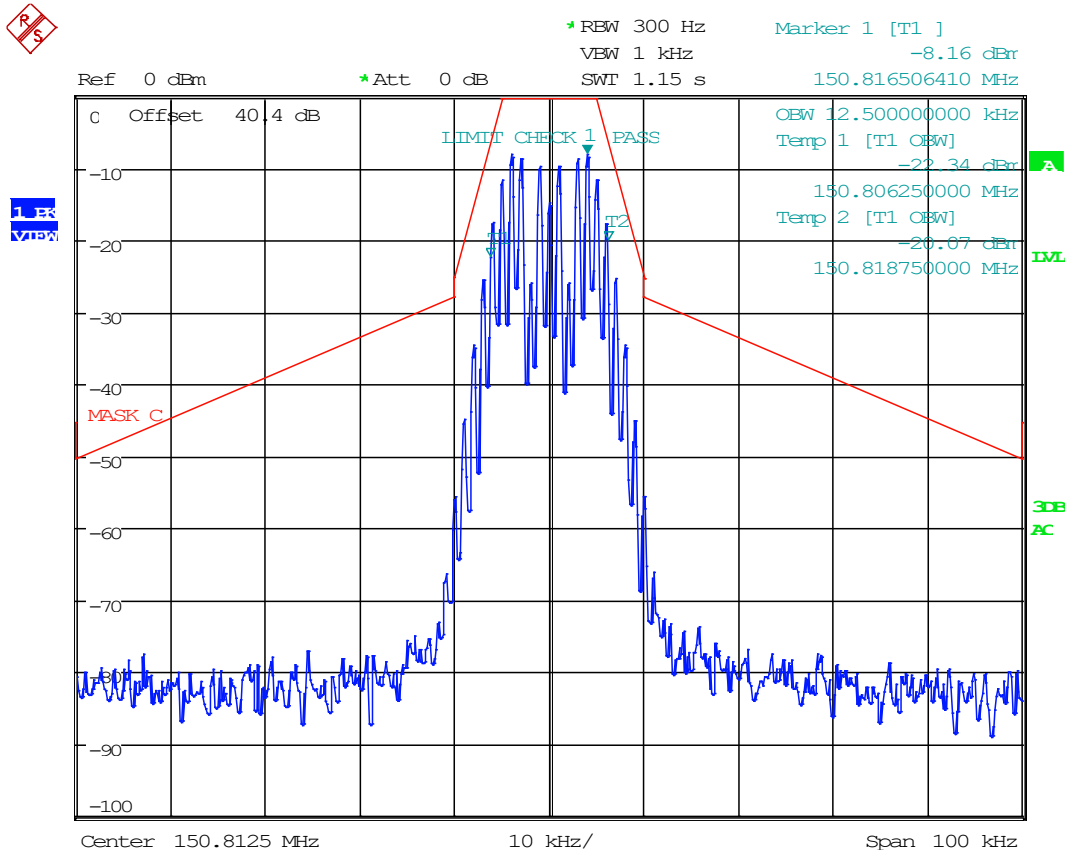


Date: 6.OCT.2020 20:01:25

8.5.2 12.5 kHz FM, Input Signal

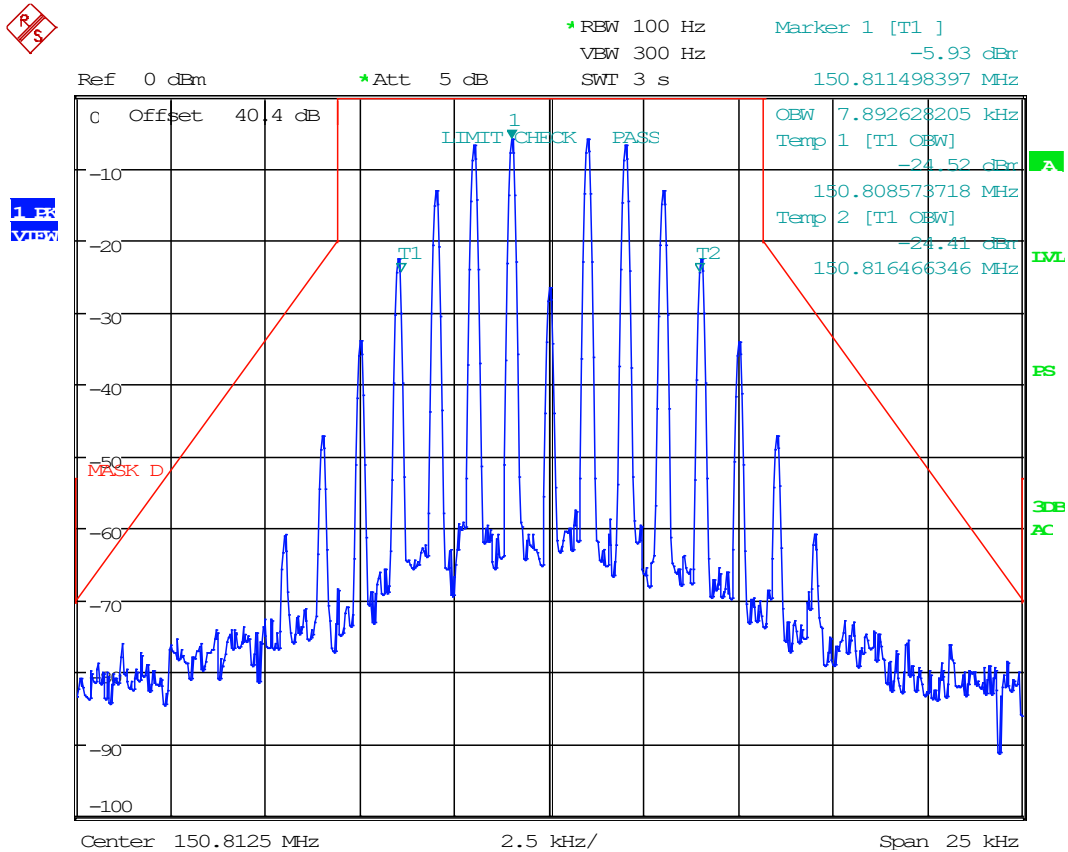


Date: 6.OCT.2020 20:08:30

8.5.3 6.25 kHz FM, Input Signal

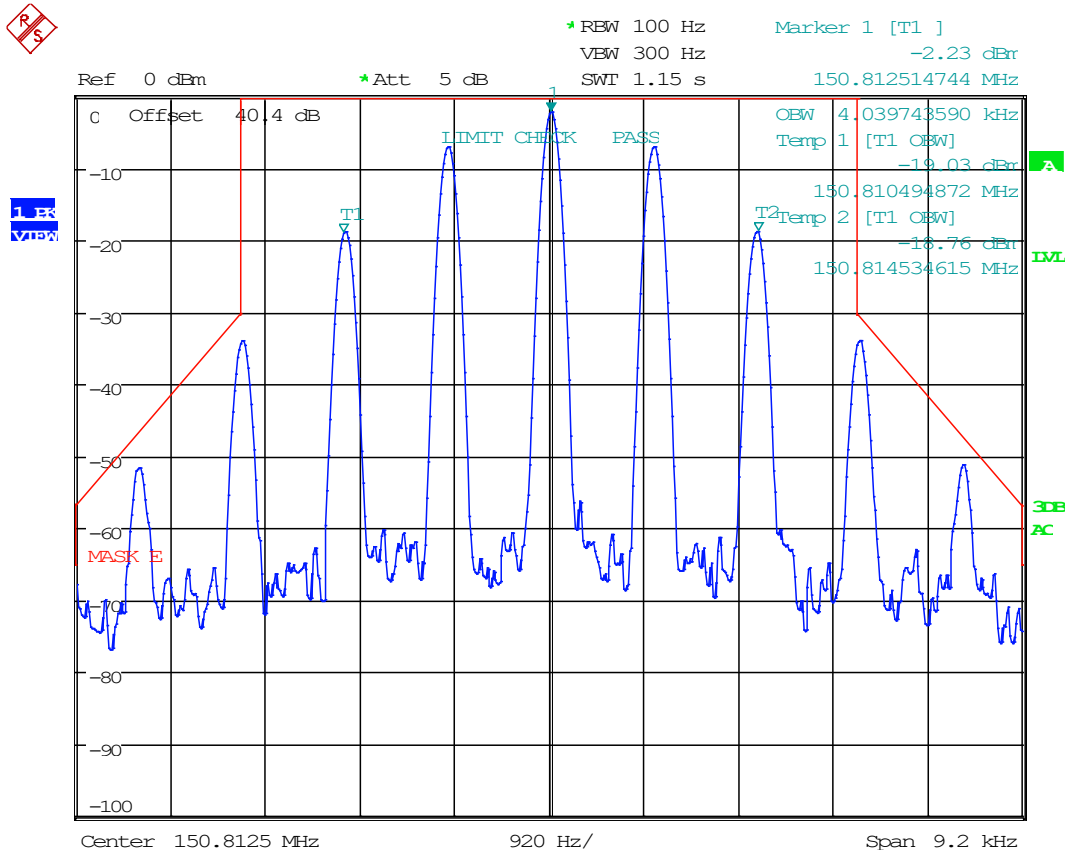


Date: 6.OCT.2020 20:19:00

8.5.4 C4FM, Input Signal

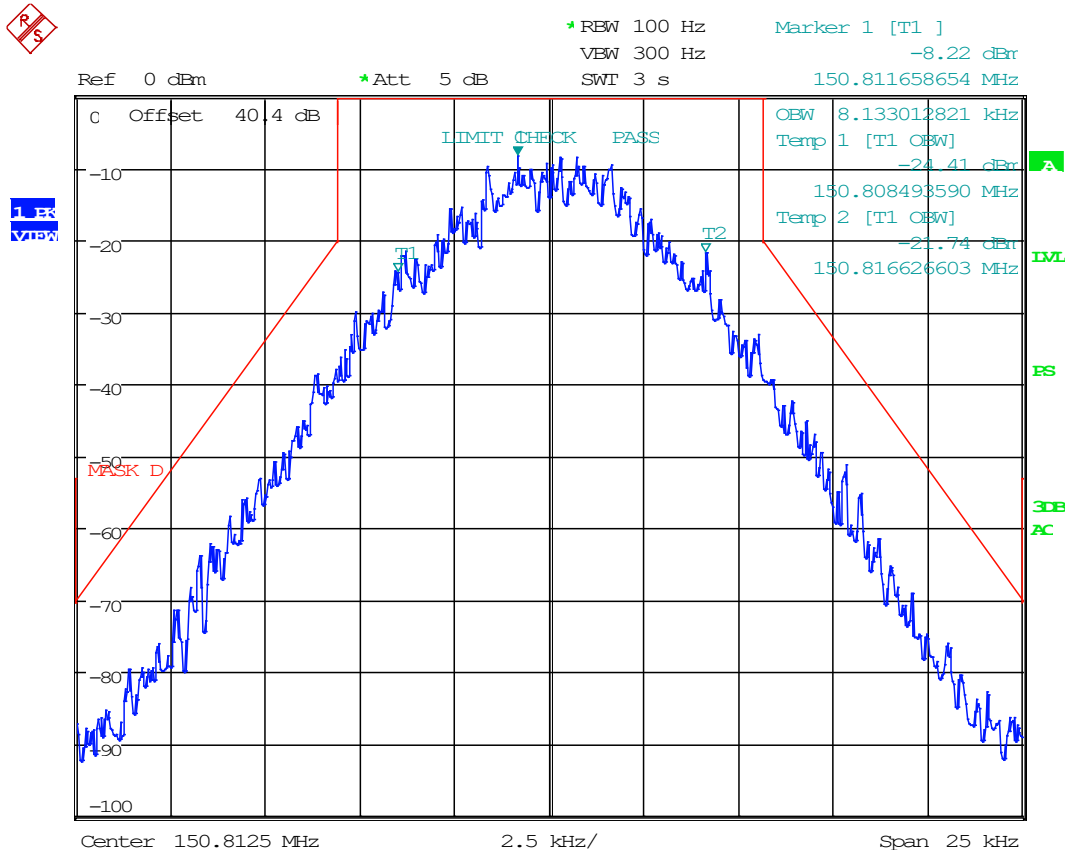


Date: 6.OCT.2020 20:10:17

8.5.5 H-CPM, Input Signal

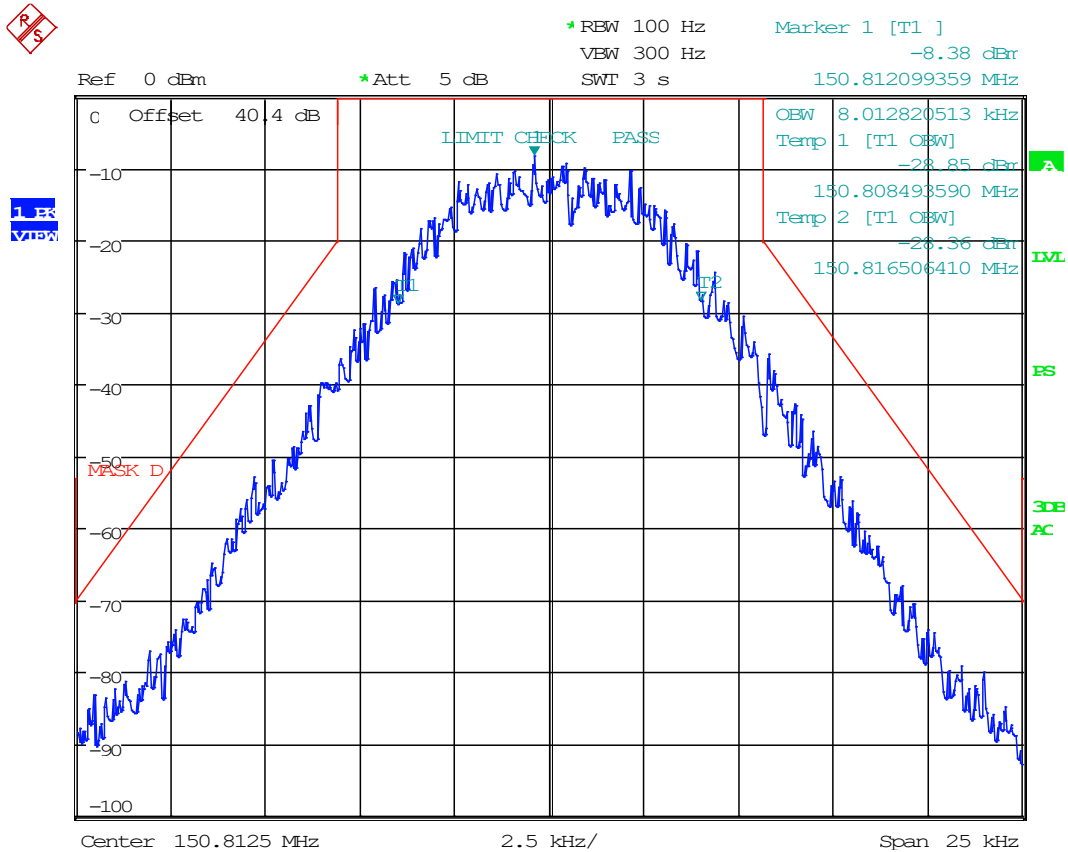

Date: 6.OCT.2020 20:11:03

8.5.6 H-DQPSK, Input Signal

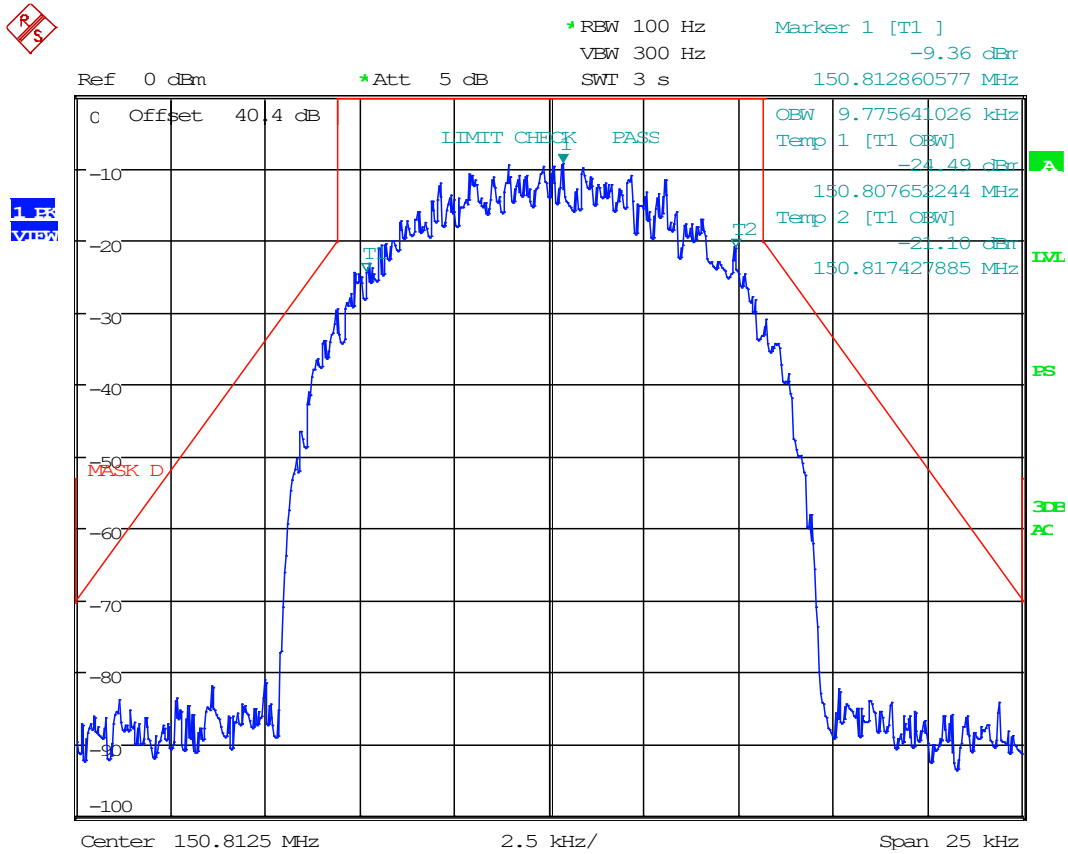


Date: 6.OCT.2020 20:12:07




Input VS Output, Output Spectrum Plots, VHF Band

8.5.7 25 kHz FM, Uplink, AGC

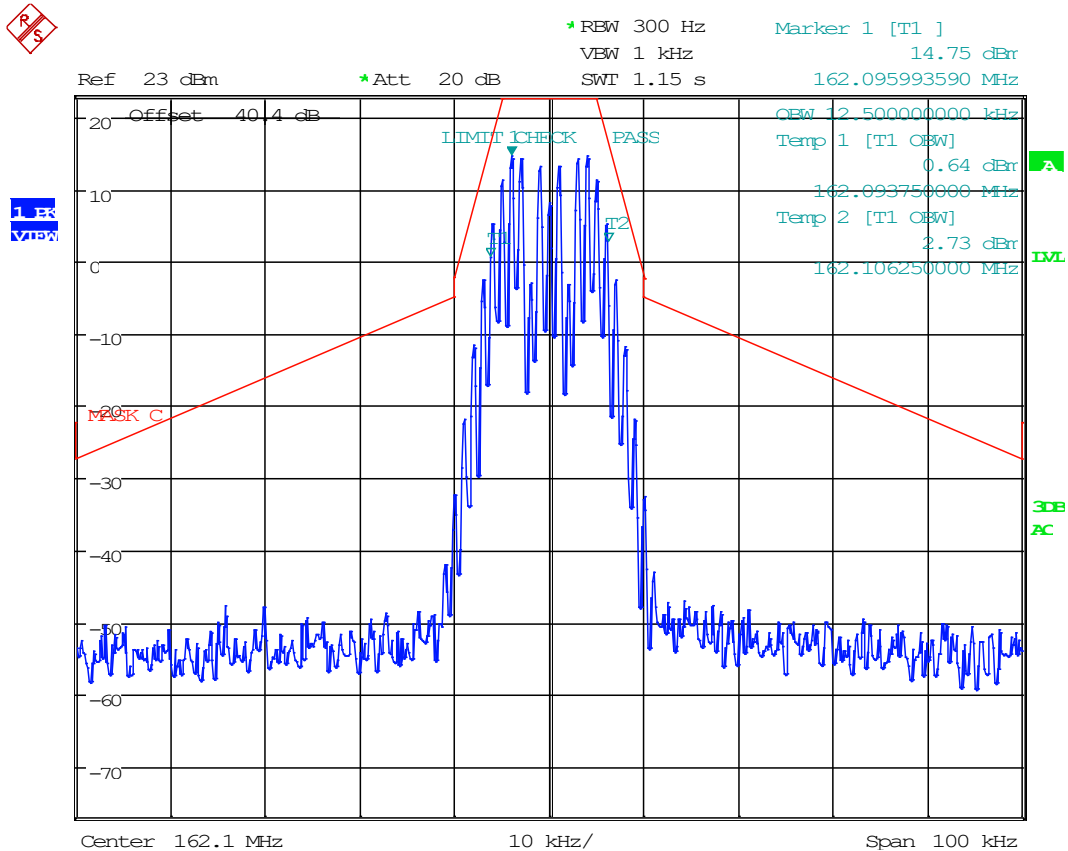


Date: 7.OCT.2020 17:58:08

8.5.8 25 kHz FM, Uplink, AGC +3dB

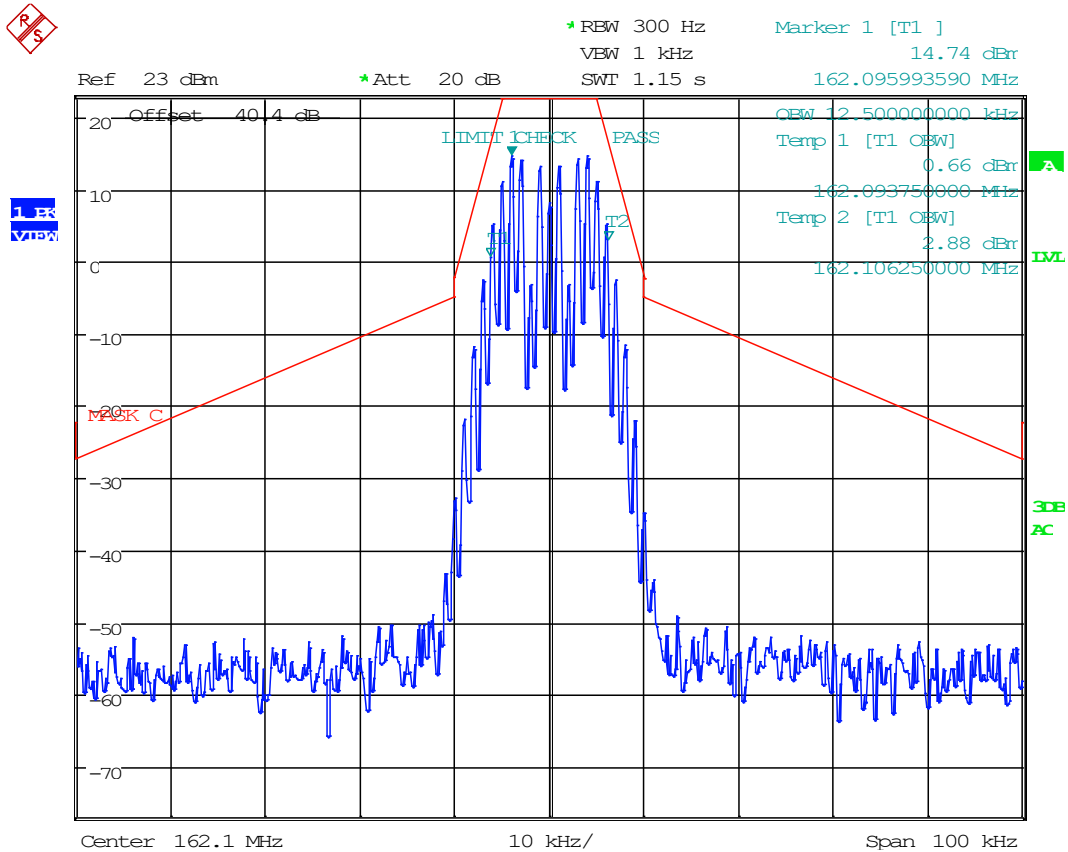


Date: 7.OCT.2020 17:58:27

8.5.9 12.5 kHz FM, Uplink, AGC

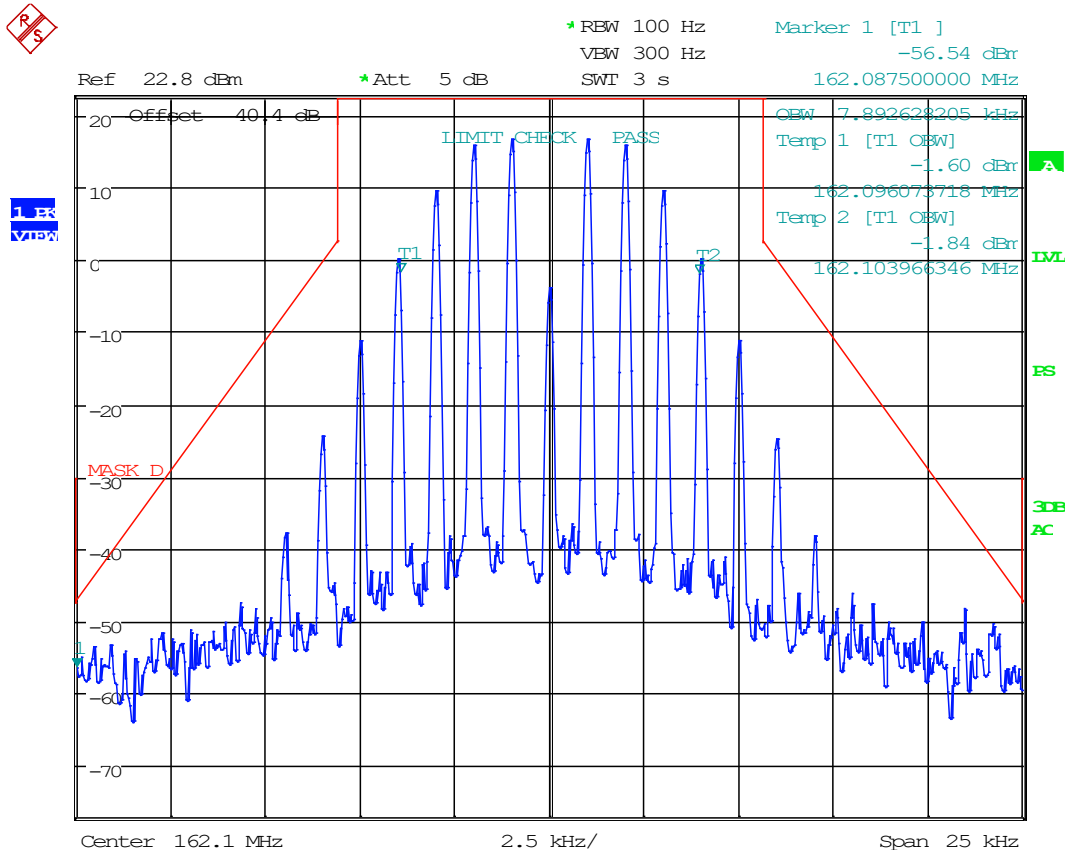


Date: 7.OCT.2020 18:04:08

8.5.10 12.5 kHz FM, Uplink, AGC +3dB

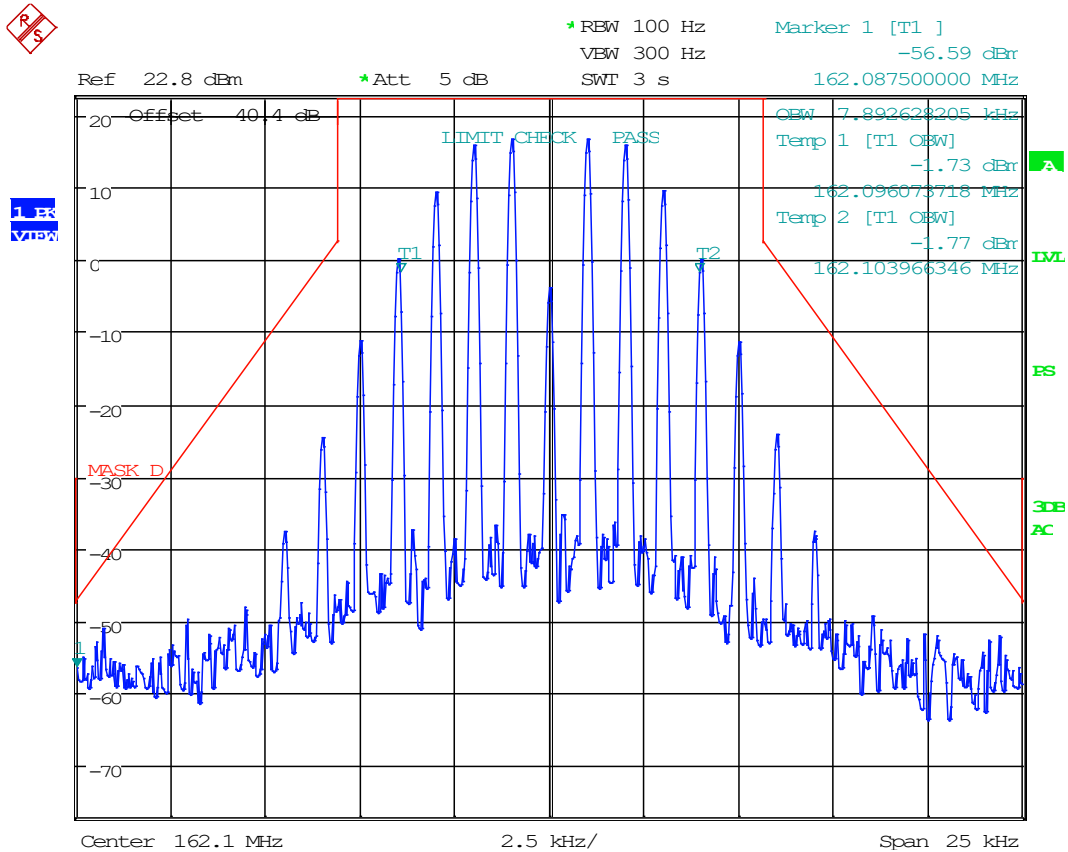


Date: 7.OCT.2020 18:05:09

8.5.11 6.25 kHz FM, Uplink, AGC

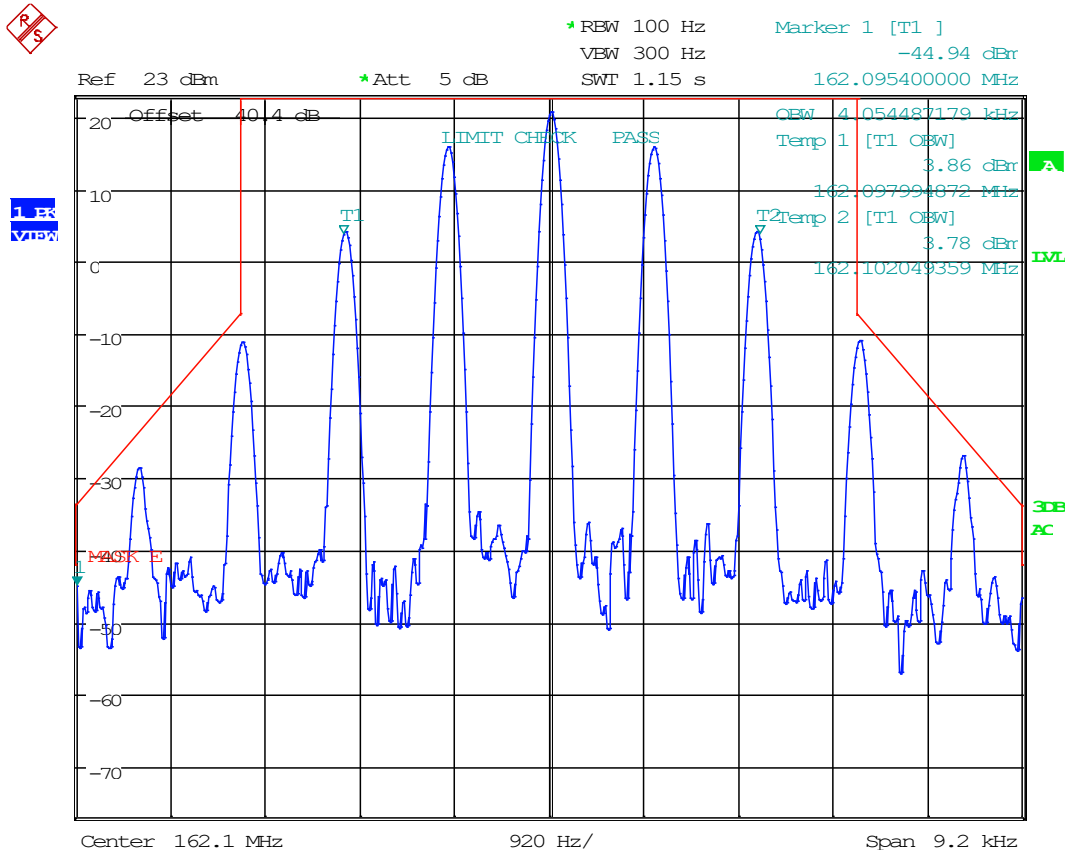


Date: 7.OCT.2020 17:40:23

8.5.12 6.25 kHz FM, Uplink, AGC +3dB

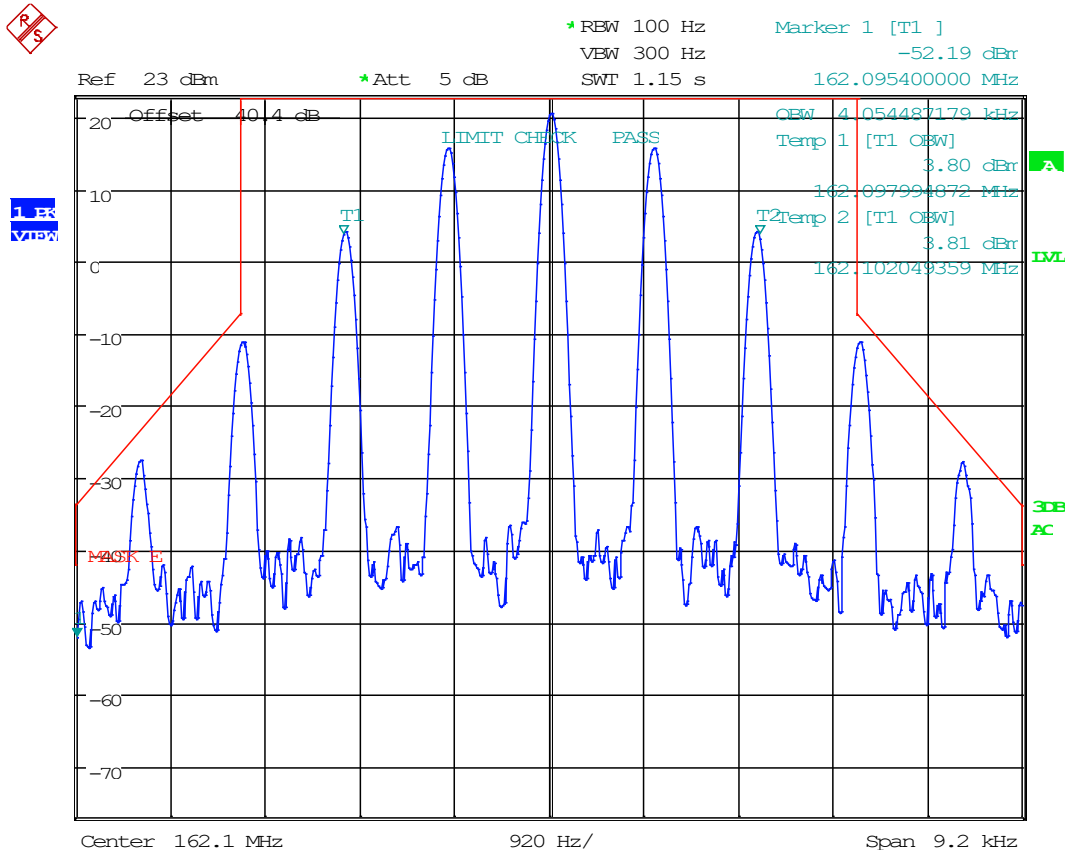


Date: 7.OCT.2020 17:40:46

8.5.13 C4FM, Uplink, AGC

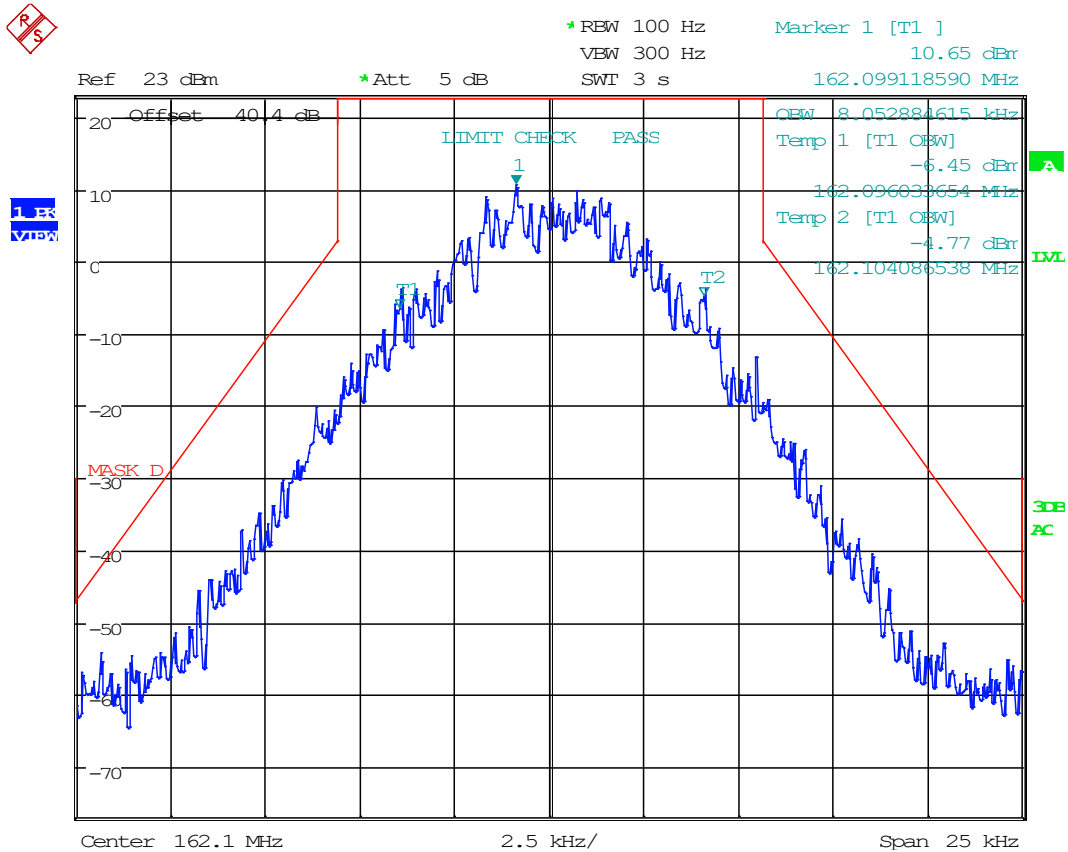


Date: 7.OCT.2020 18:58:00

8.5.14 C4FM, Uplink, AGC +3dB

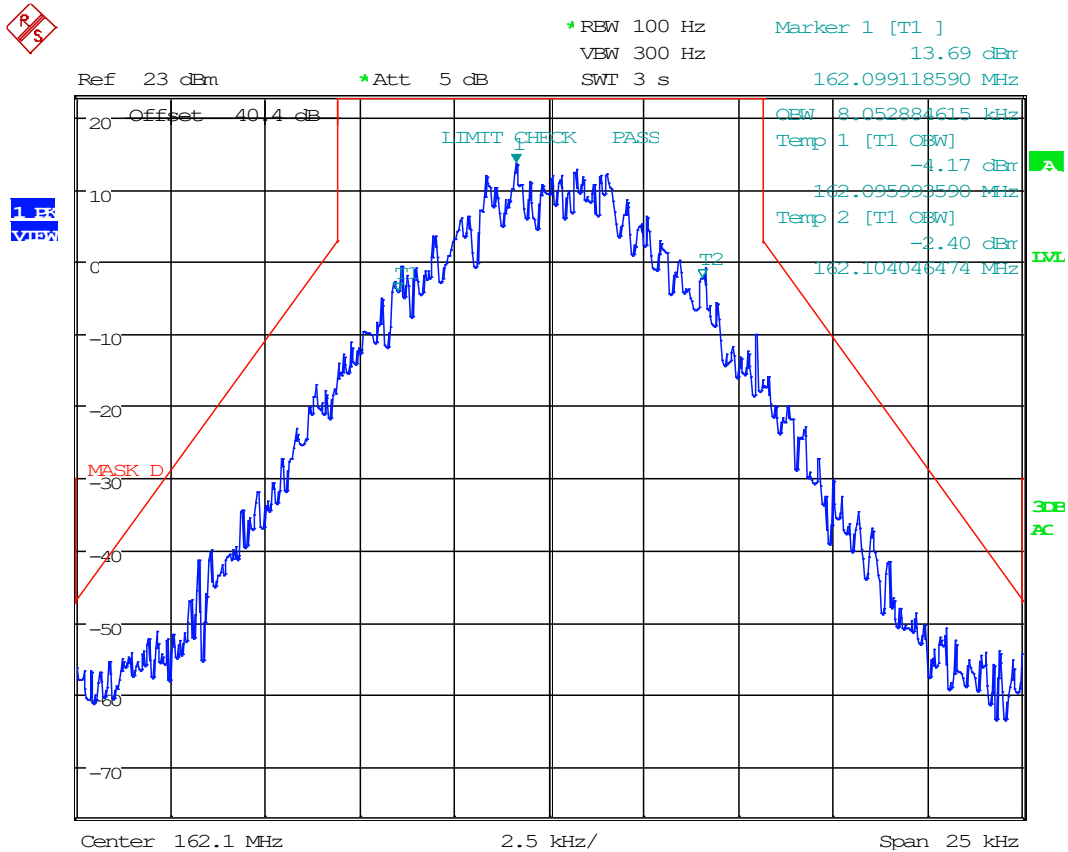


Date: 7.OCT.2020 18:58:40

8.5.15 H-CPM, Uplink, AGC

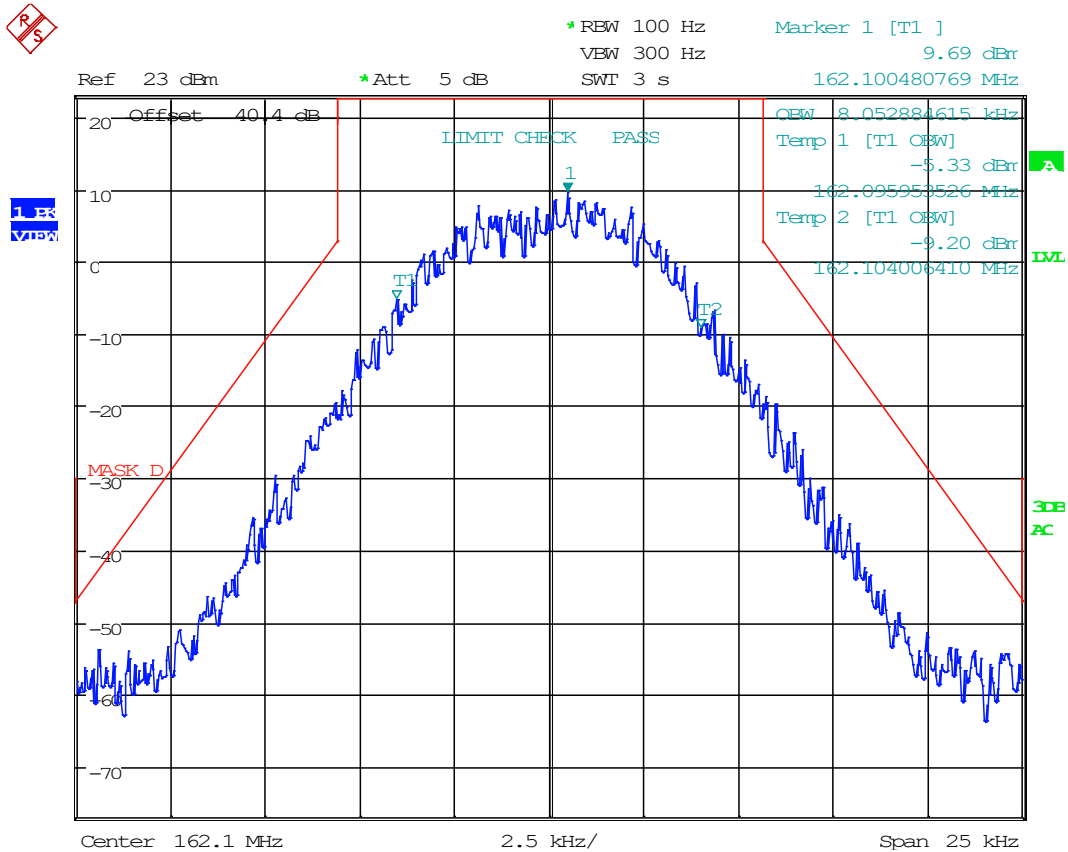


Date: 7.OCT.2020 18:59:33

8.5.16 H-CPM, Uplink, AGC +3dB

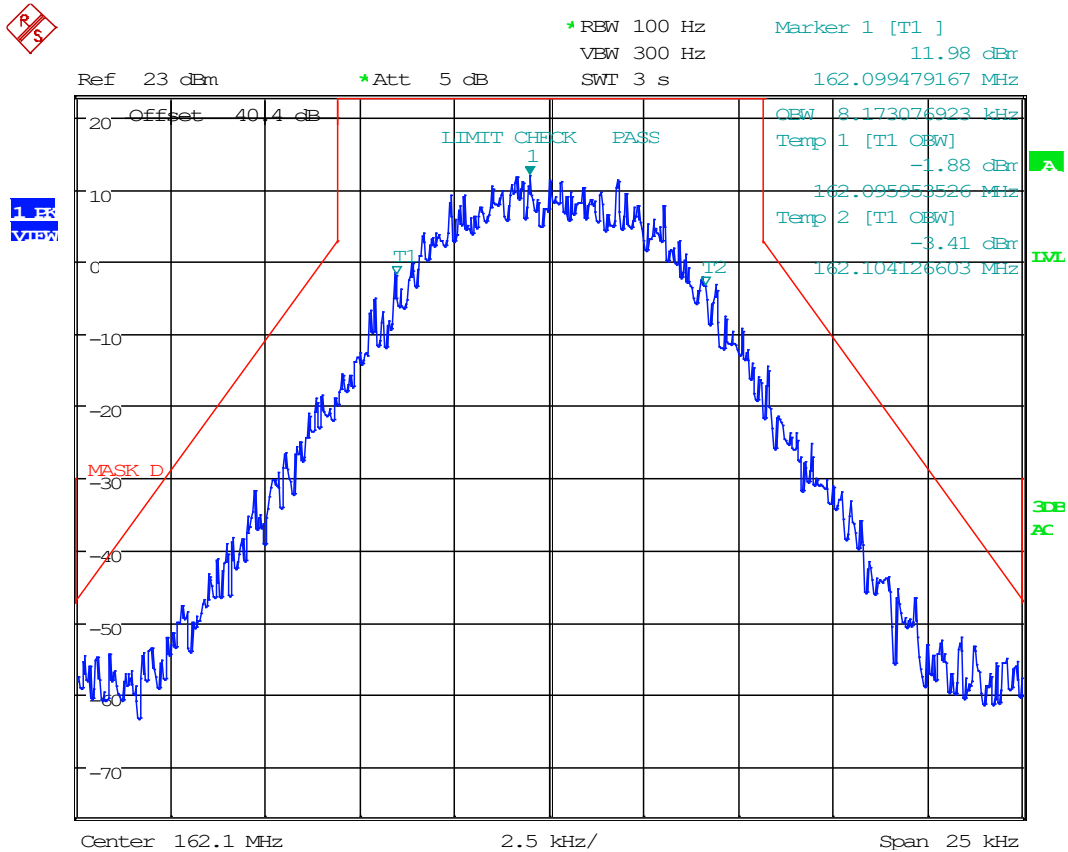


Date: 7.OCT.2020 19:00:14

8.5.17 H-DQPSK, Uplink, AGC

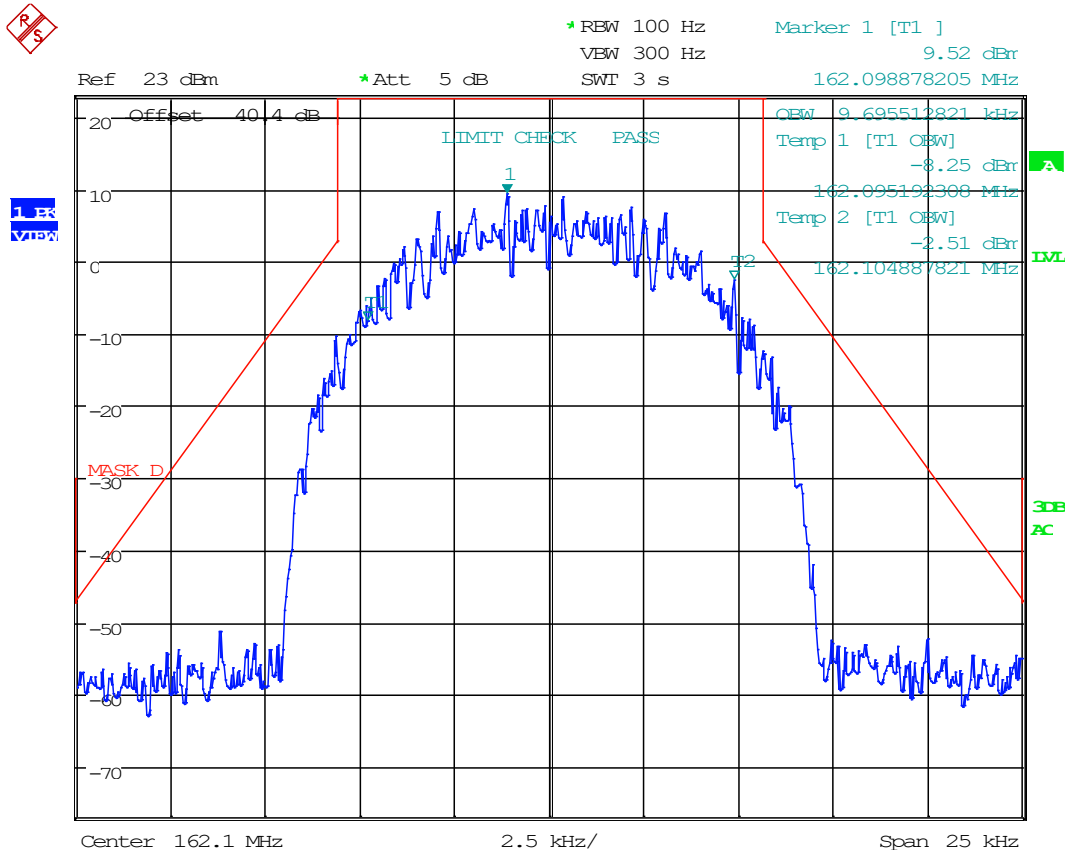


Date: 7.OCT.2020 19:01:13

8.5.18 H-DQPSK, Uplink, AGC +3dB

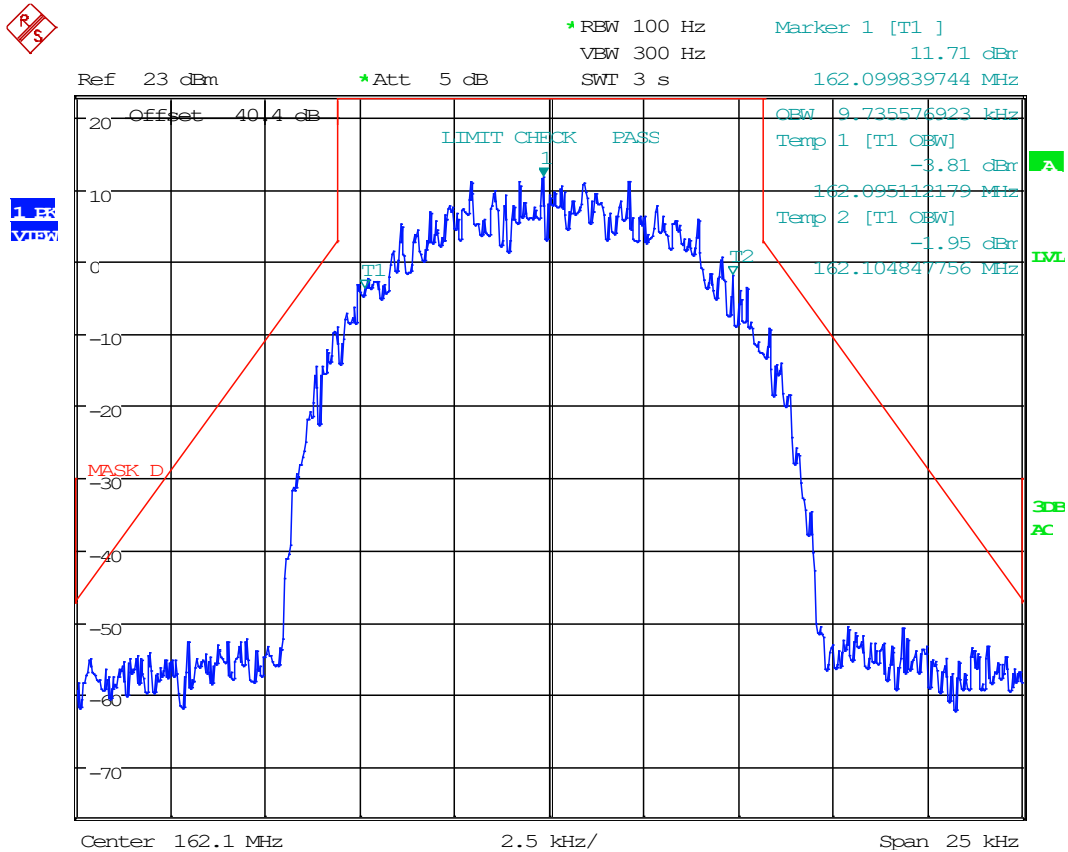


Date: 7.OCT.2020 19:01:59

8.5.19 25 kHz FM, Downlink, AGC

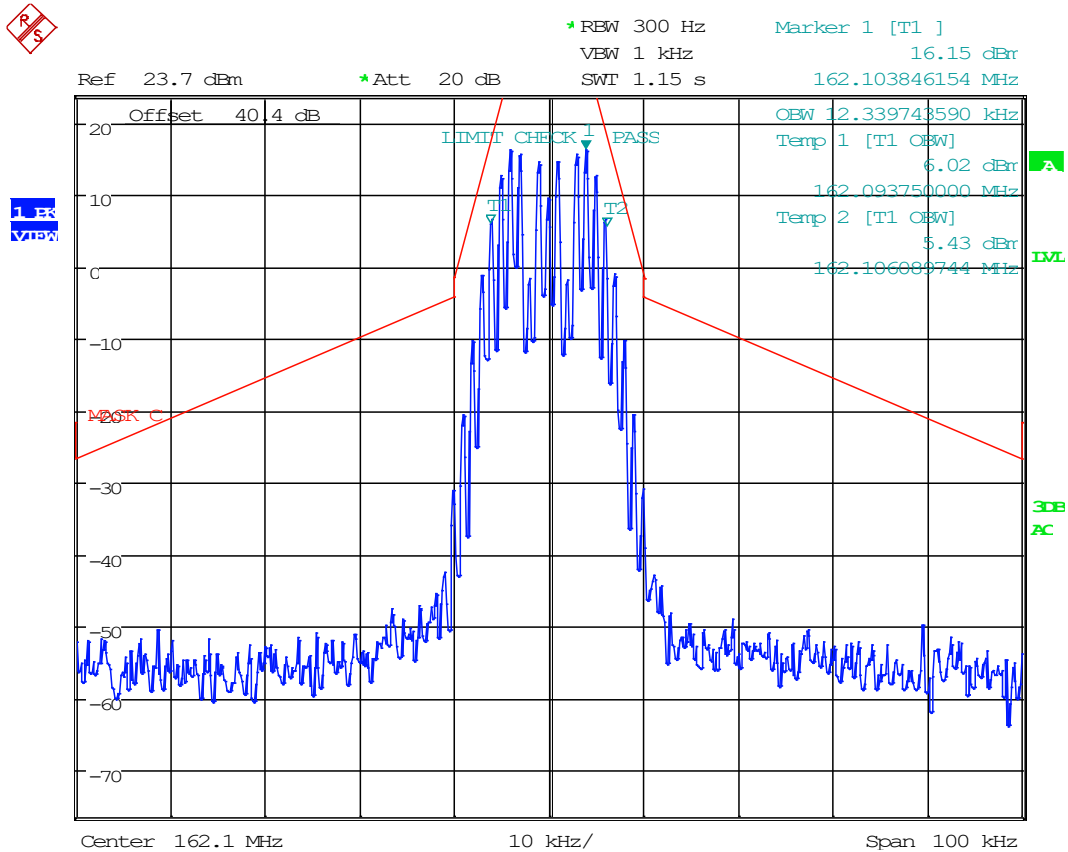


Date: 6.OCT.2020 17:18:17

8.5.20 25 kHz FM, Downlink, AGC +3dB

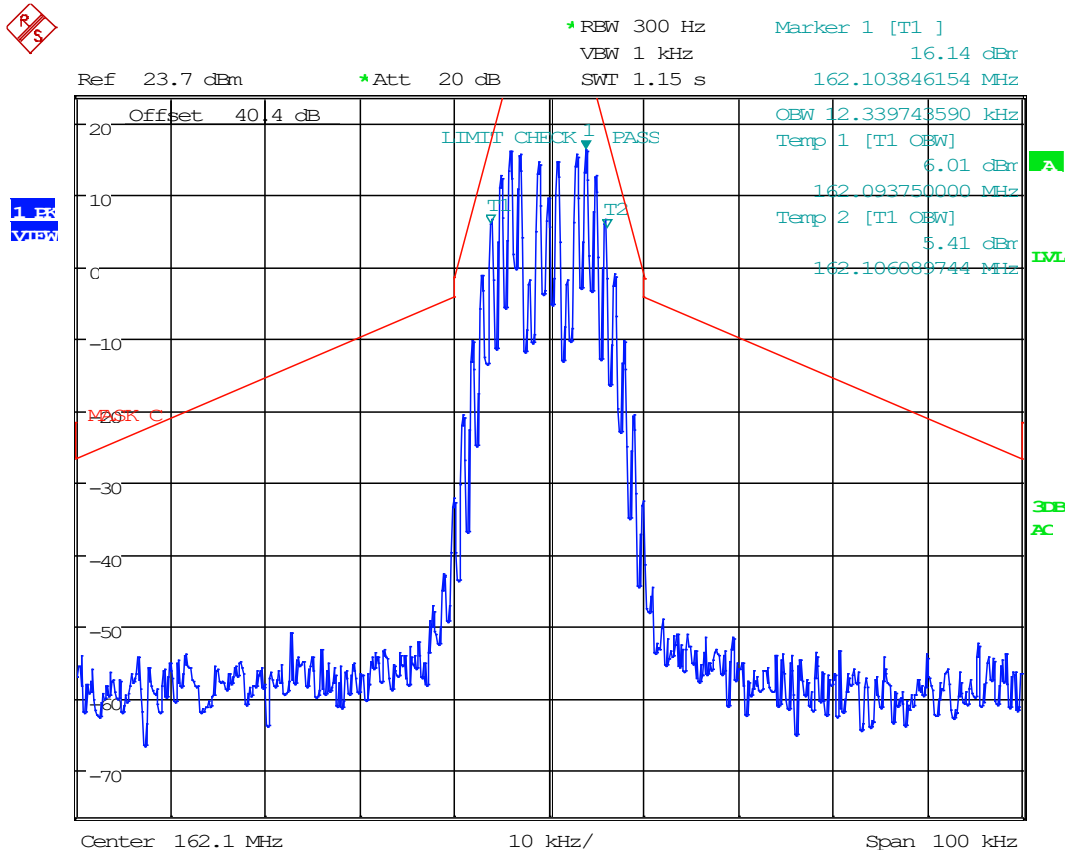


Date: 6.OCT.2020 17:17:53

8.5.21 12.5 kHz FM, Downlink, AGC

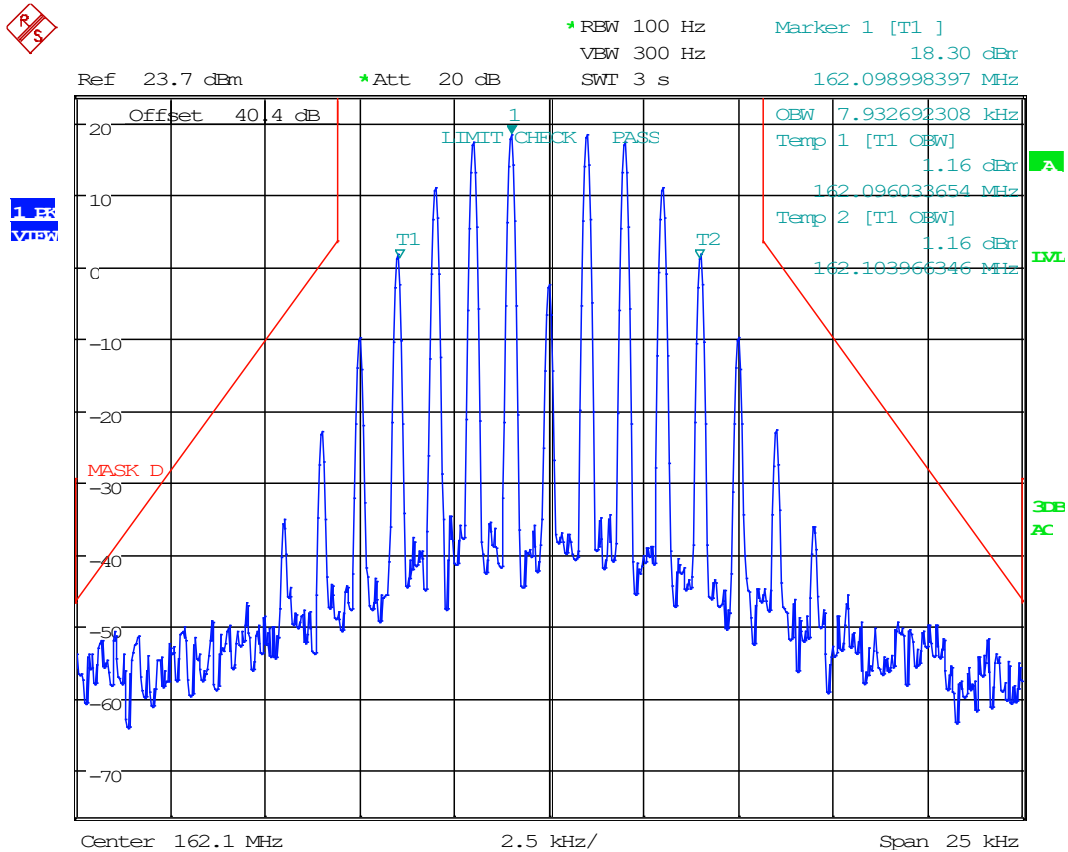


Date: 6.OCT.2020 16:58:21

8.5.22 12.5 kHz FM, Downlink, AGC +3dB

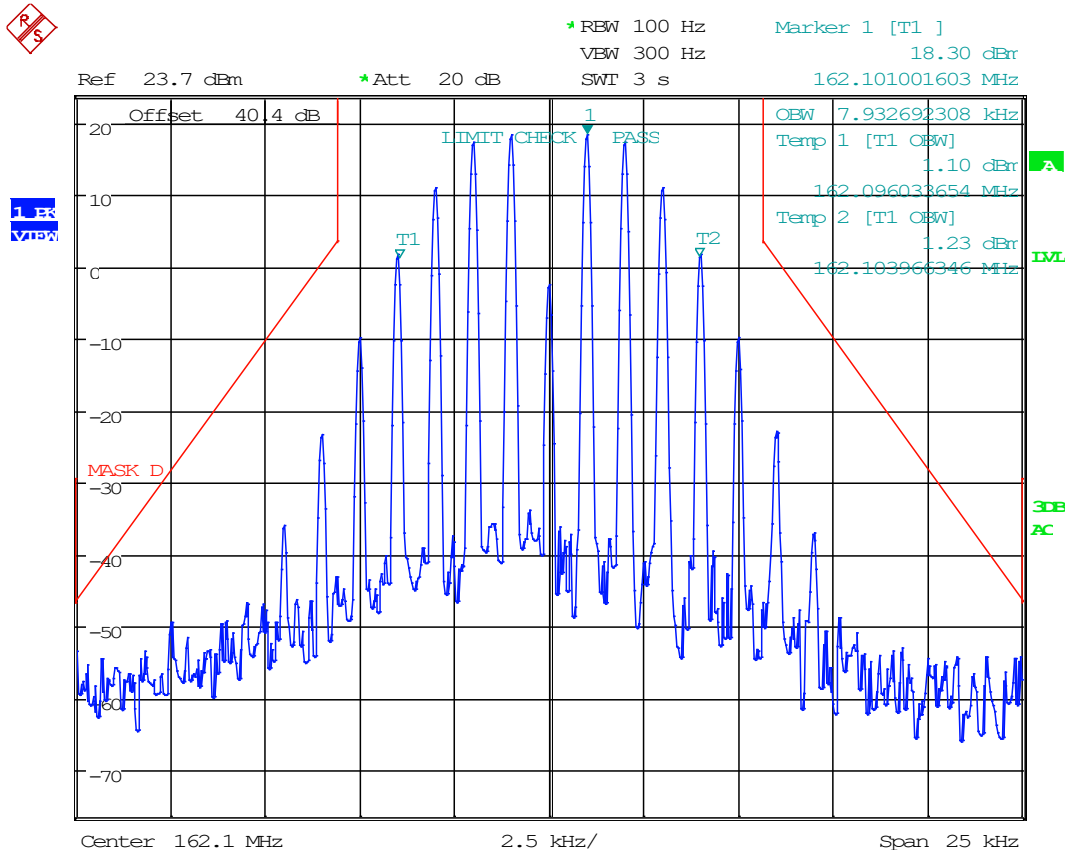


Date: 6.OCT.2020 16:58:48

8.5.23 6.25 kHz FM, Downlink, AGC

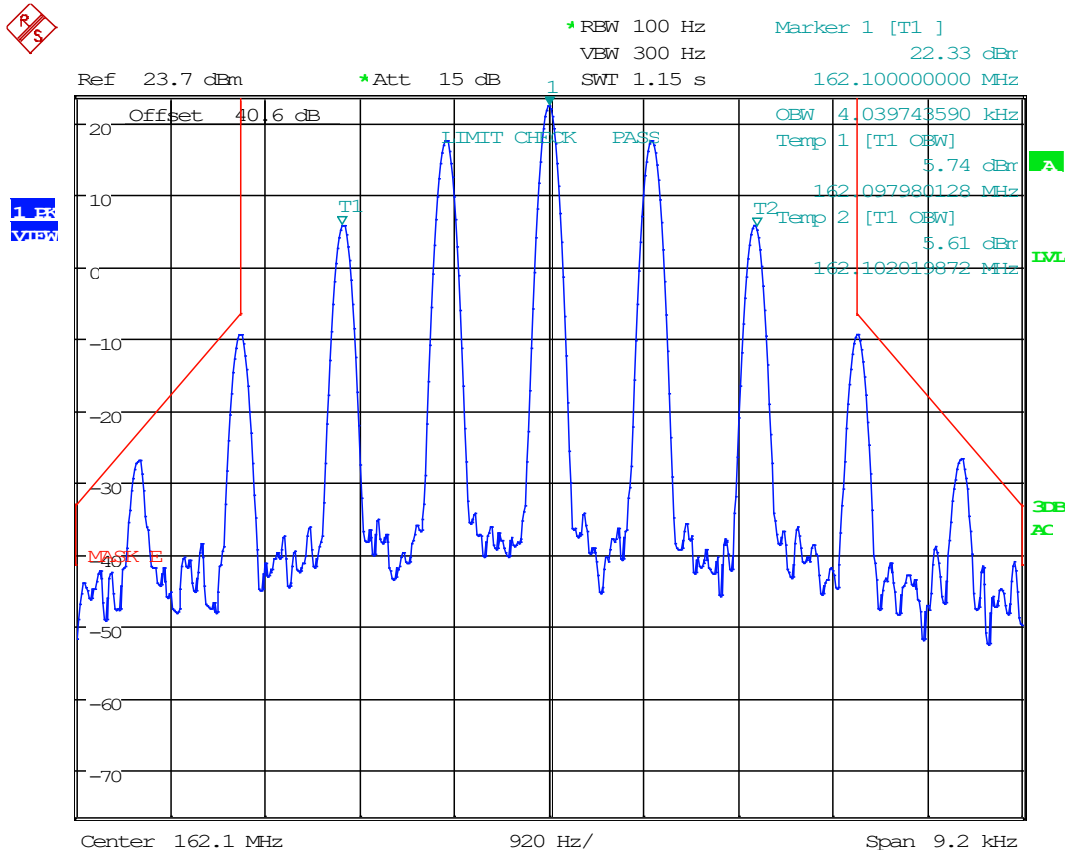


Date: 6.OCT.2020 16:36:02

8.5.24 6.25 kHz FM, Downlink, AGC +3dB

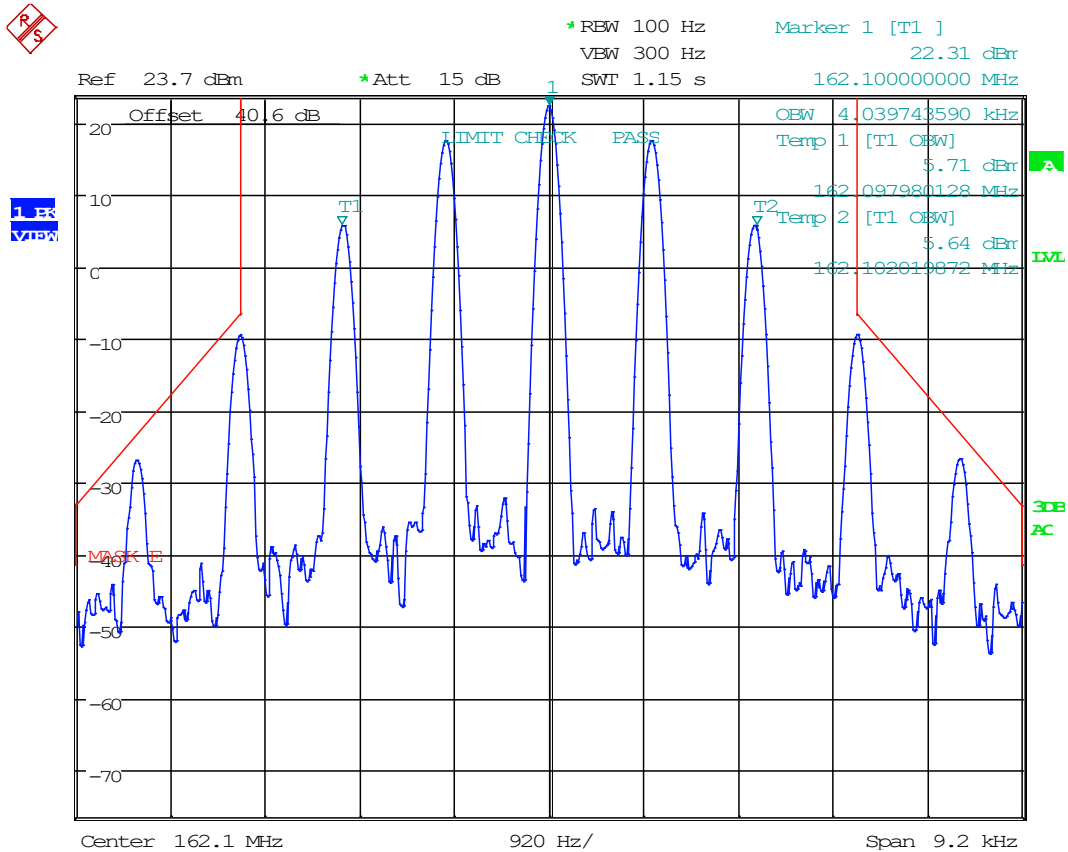


Date: 6.OCT.2020 16:36:28

8.5.25 C4FM, Downlink, AGC

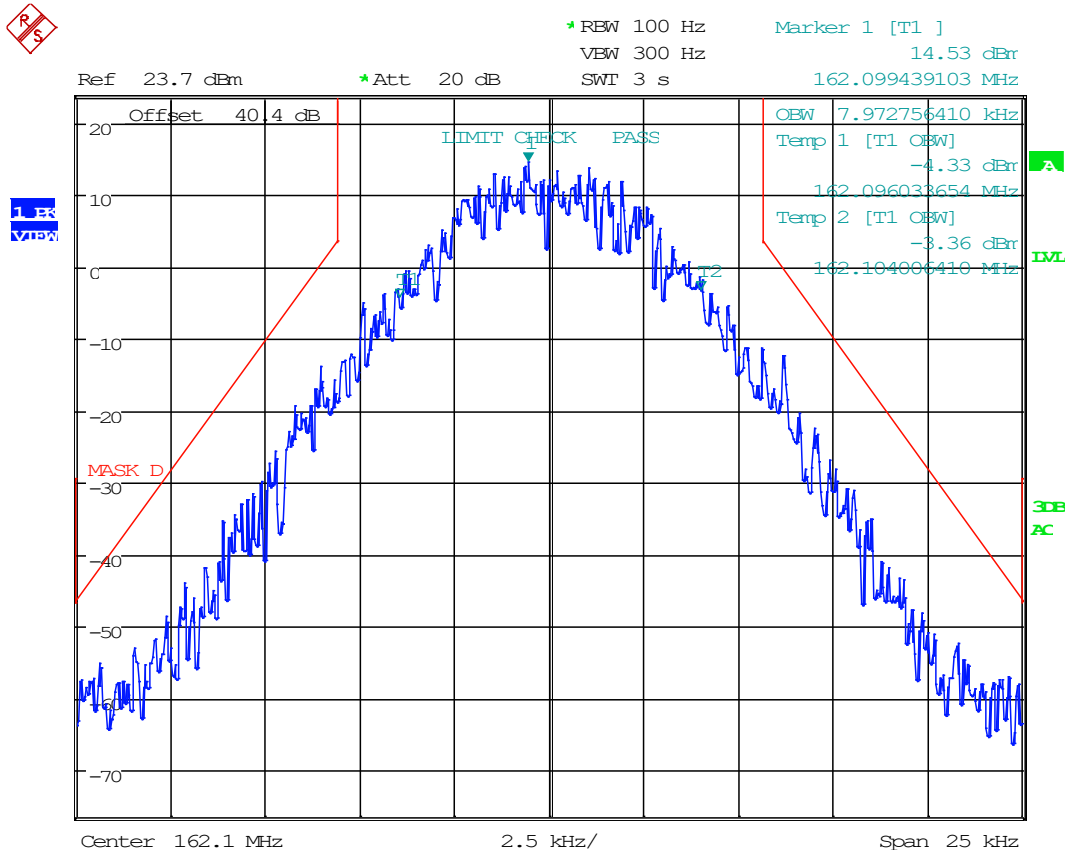


Date: 6.OCT.2020 16:57:09

8.5.26 C4FM, Downlink, AGC +3dB


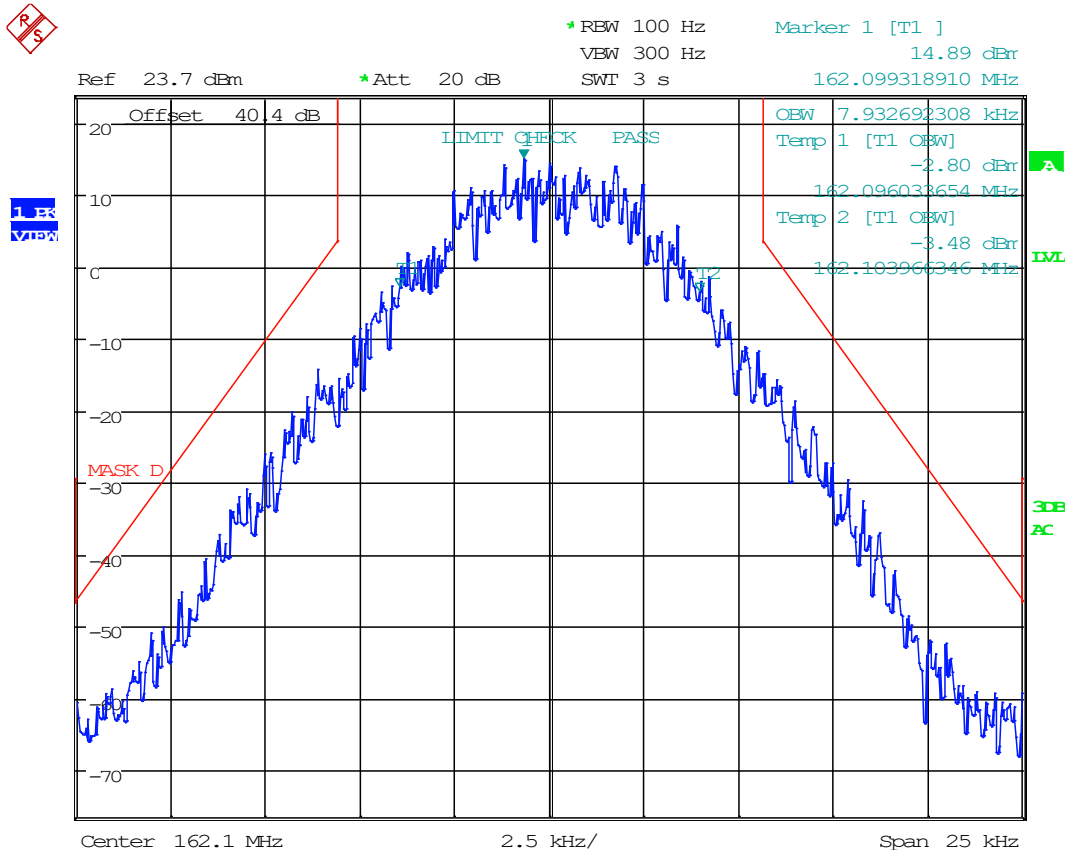


Date: 6.OCT.2020 16:57:41

8.5.27 H-CPM, Downlink, AGC

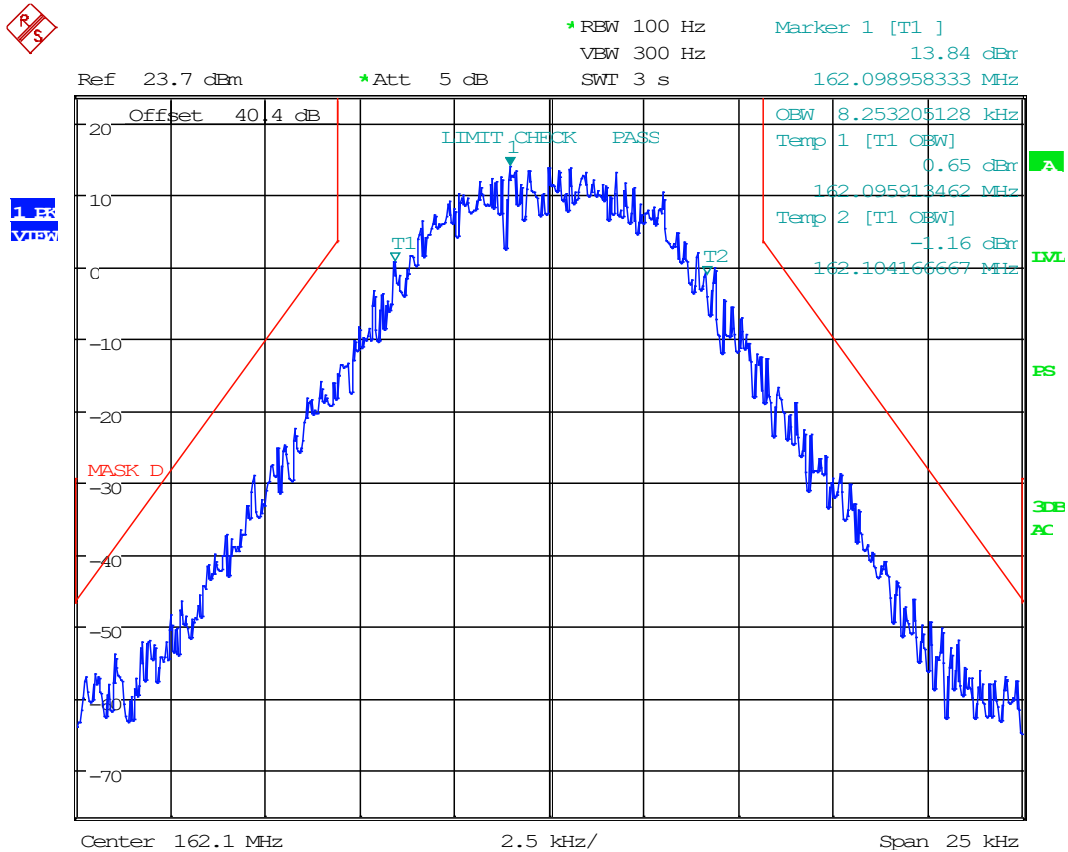


Date: 8.OCT.2020 16:30:06

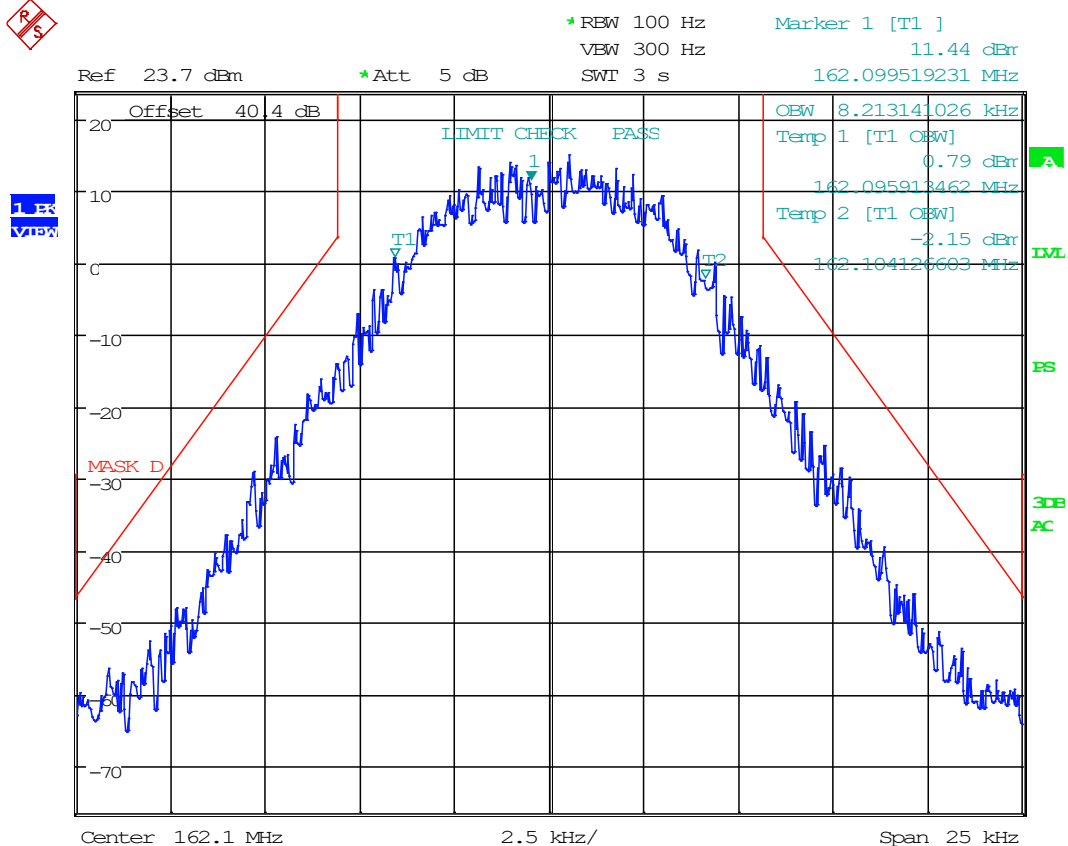


Date: 8.OCT.2020 16:30:49

8.5.29 H-DQPSK, Downlink, AGC

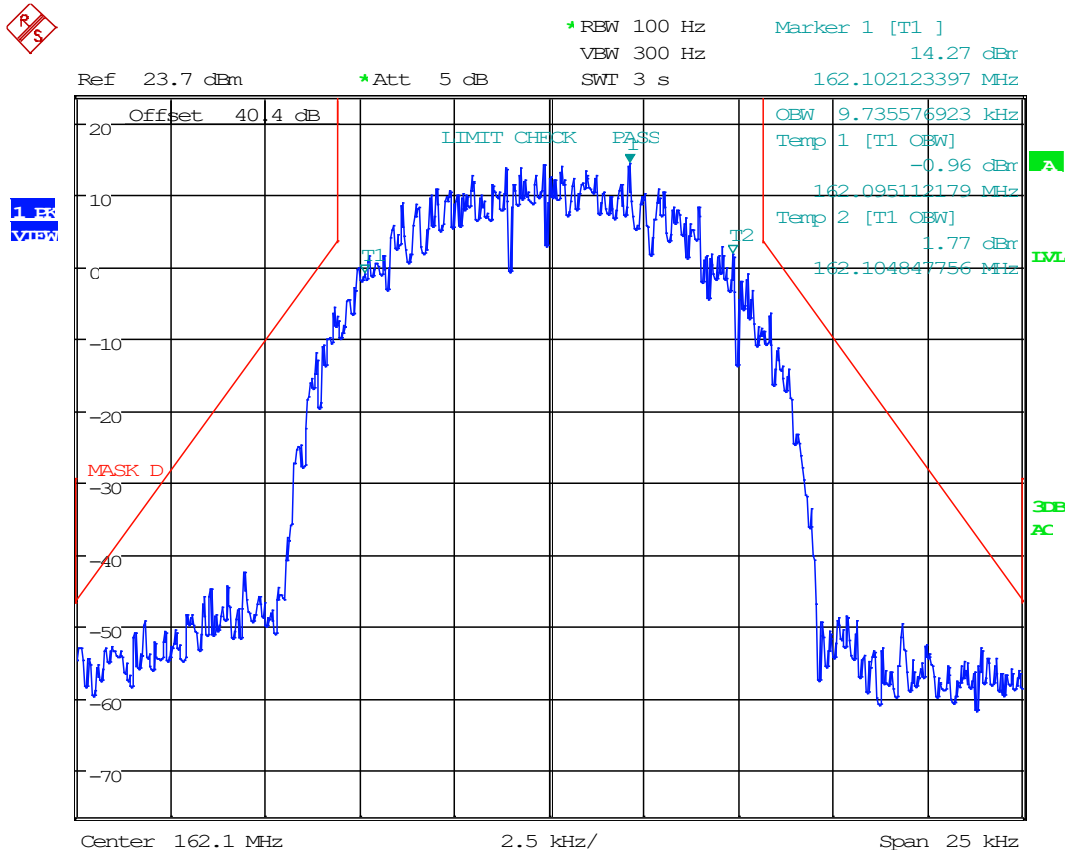

Date: 8.OCT.2020 16:32:23


8.5.30 H-DQPSK, Downlink, AGC +3dB

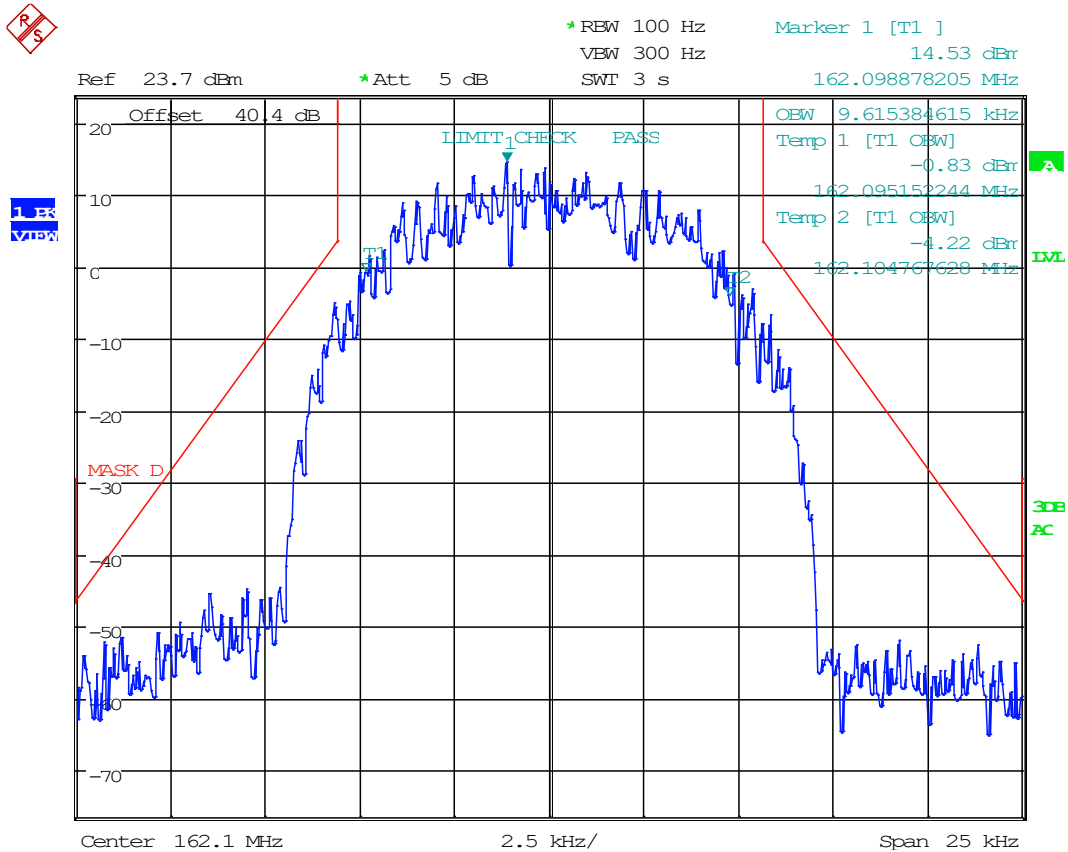

Date: 8.OCT.2020 16:31:52


Input VS Output, Output Spectrum Plots, UHF Band

8.5.31 25 kHz FM, Uplink, AGC

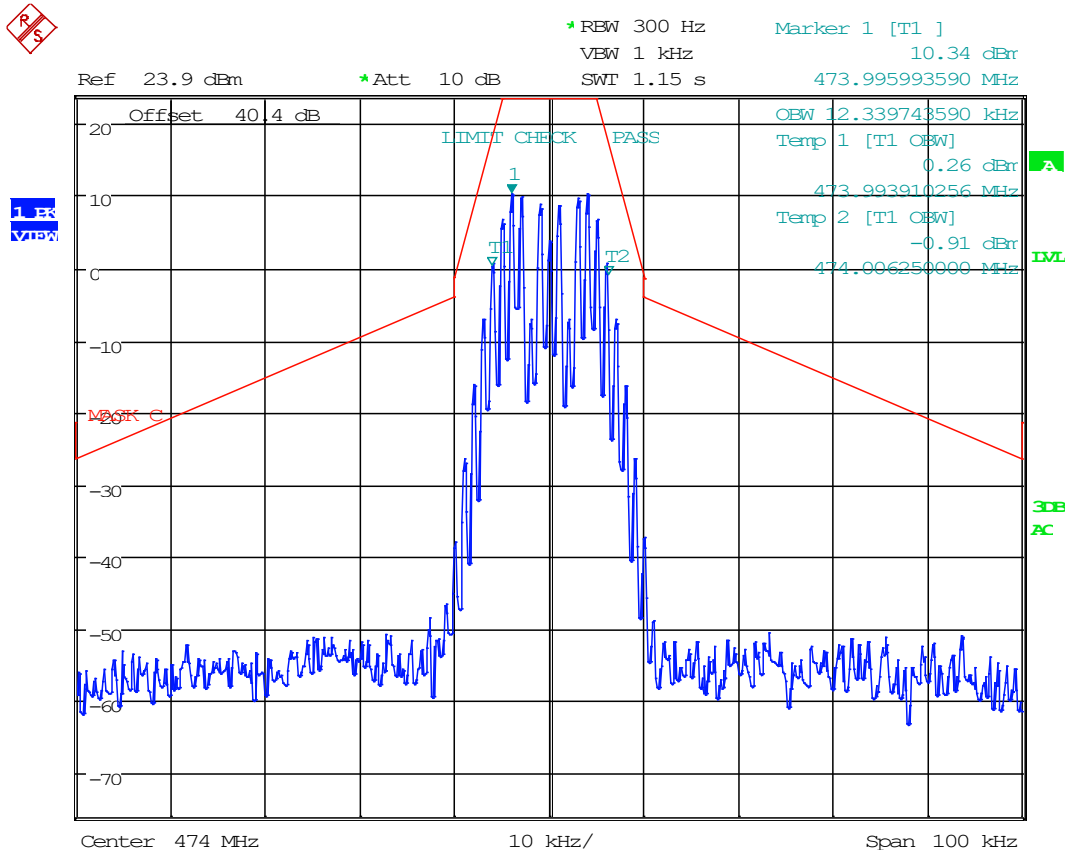


Date: 8.OCT.2020 12:35:01

8.5.32 25 kHz FM, Uplink, AGC +3dB

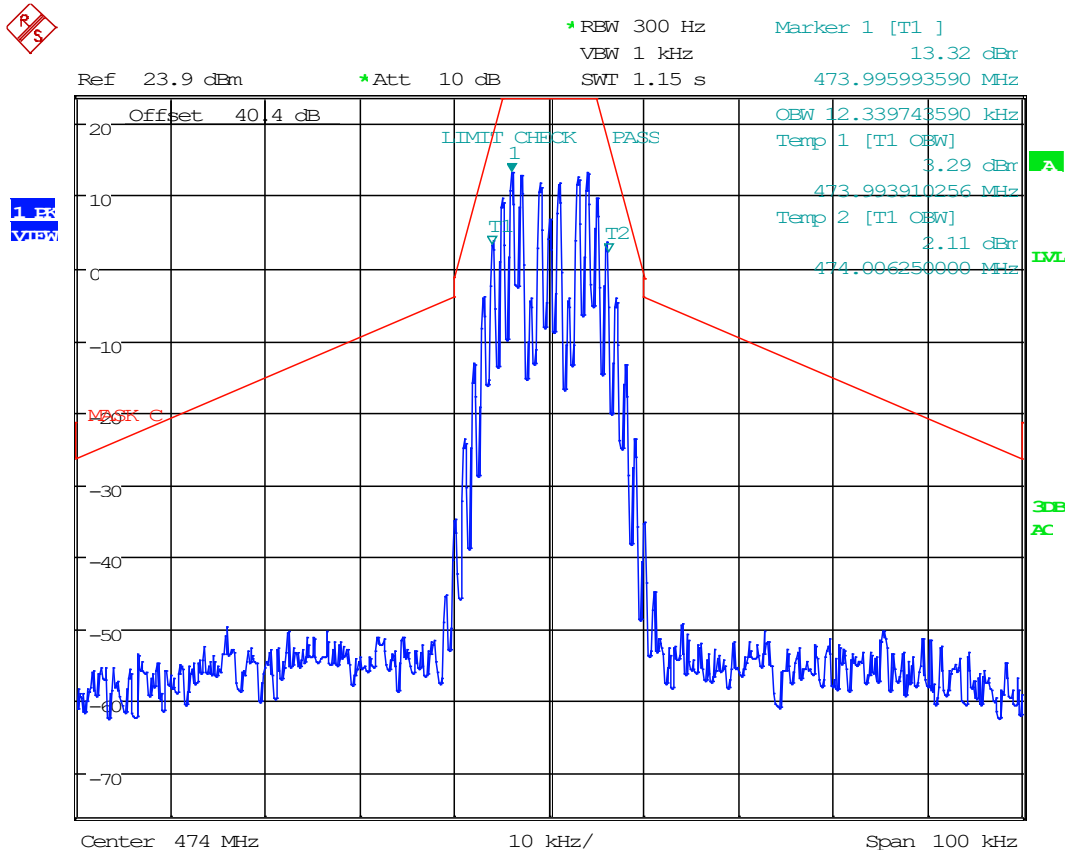


Date: 8.OCT.2020 12:35:47

8.5.33 12.5 kHz FM, Uplink, AGC

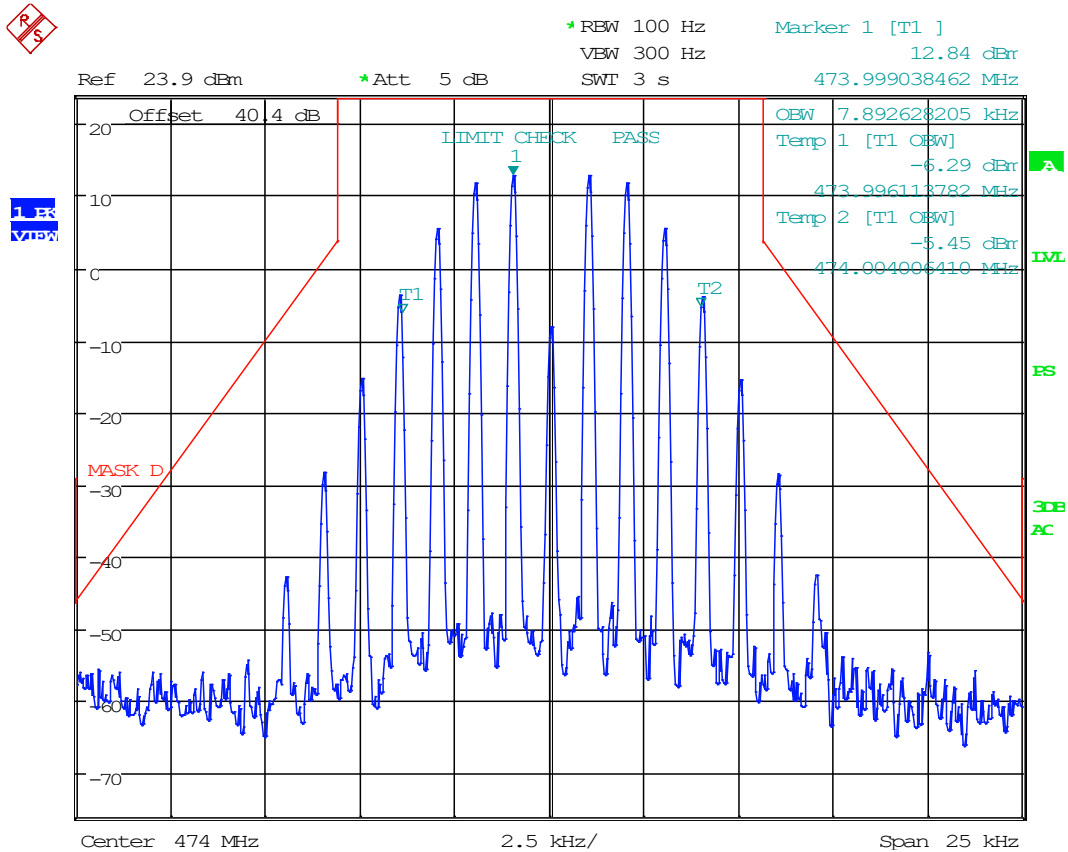


Date: 8.OCT.2020 12:55:31

8.5.34 12.5 kHz FM, Uplink, AGC +3dB

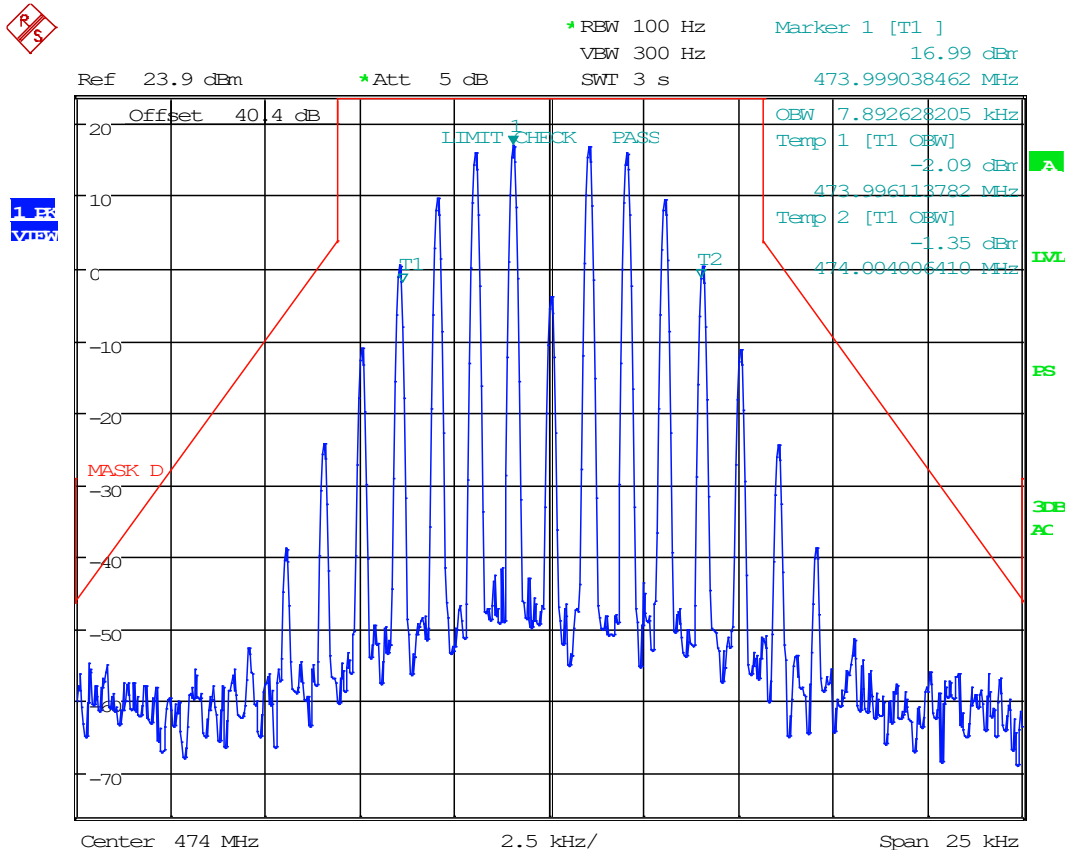


Date: 8.OCT.2020 12:54:58

8.5.35 6.25 kHz FM, Uplink, AGC

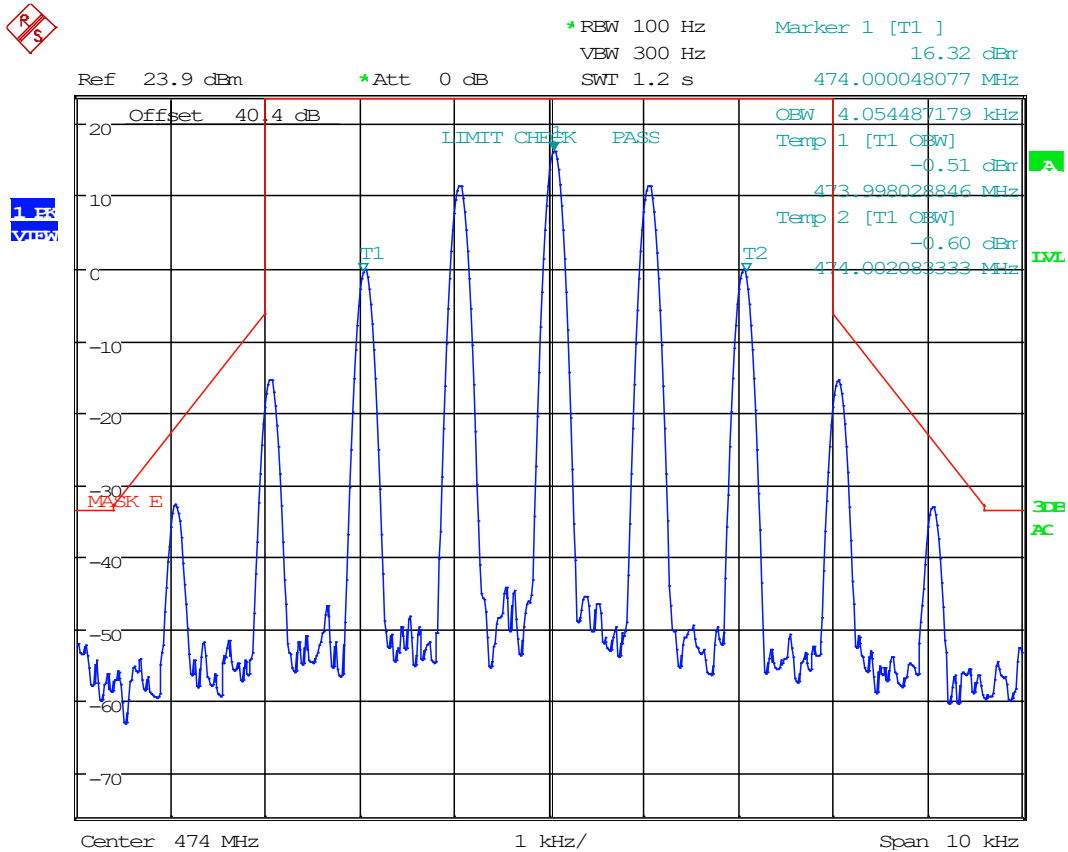


Date: 8.OCT.2020 12:32:14

8.5.36 6.25 kHz FM, Uplink, AGC +3dB

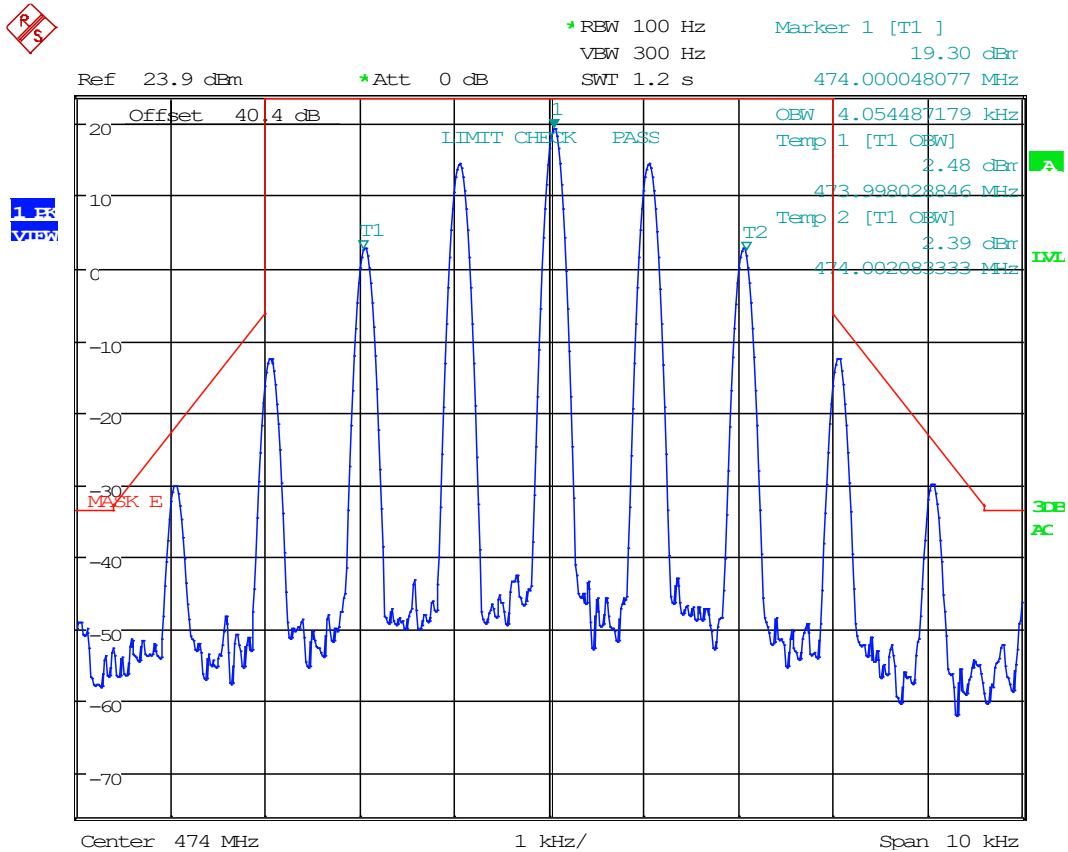


Date: 8.OCT.2020 12:32:45

8.5.37 C4FM, Uplink, AGC

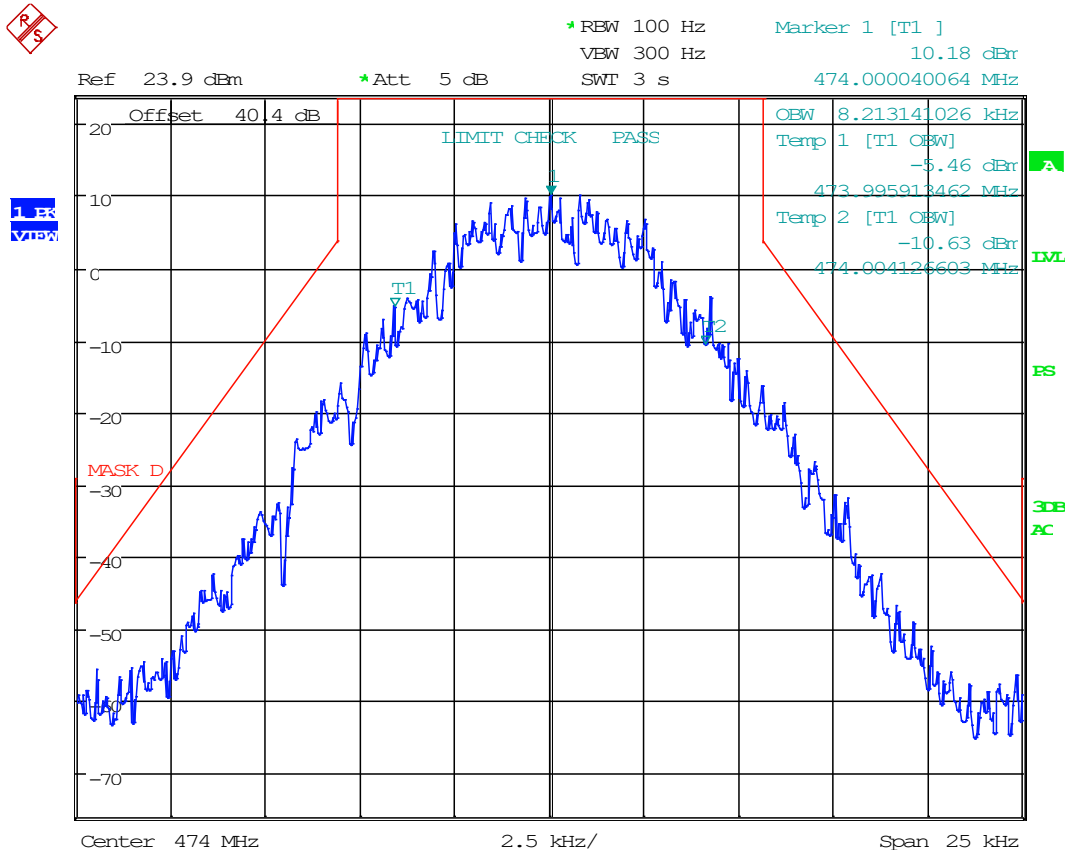


Date: 8.OCT.2020 12:56:14

8.5.38 C4FM, Uplink, AGC +3dB

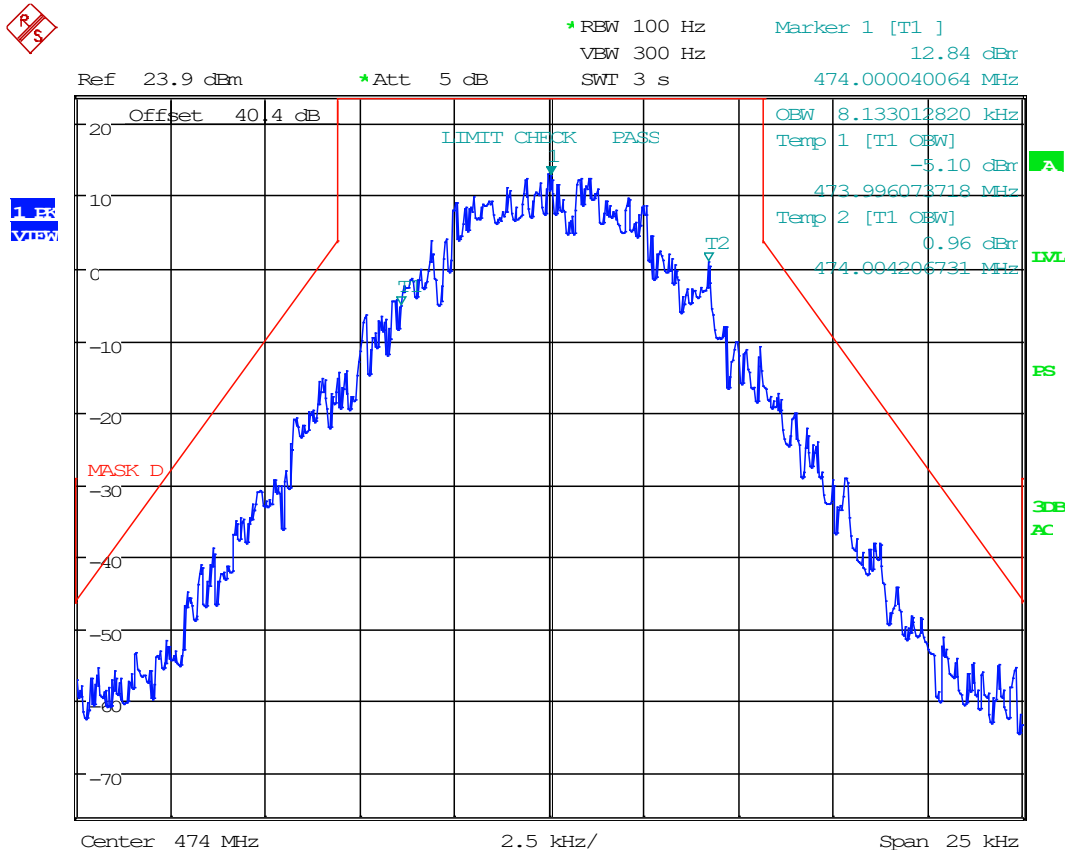


Date: 8.OCT.2020 12:56:50

8.5.39 H-CPM, Uplink, AGC

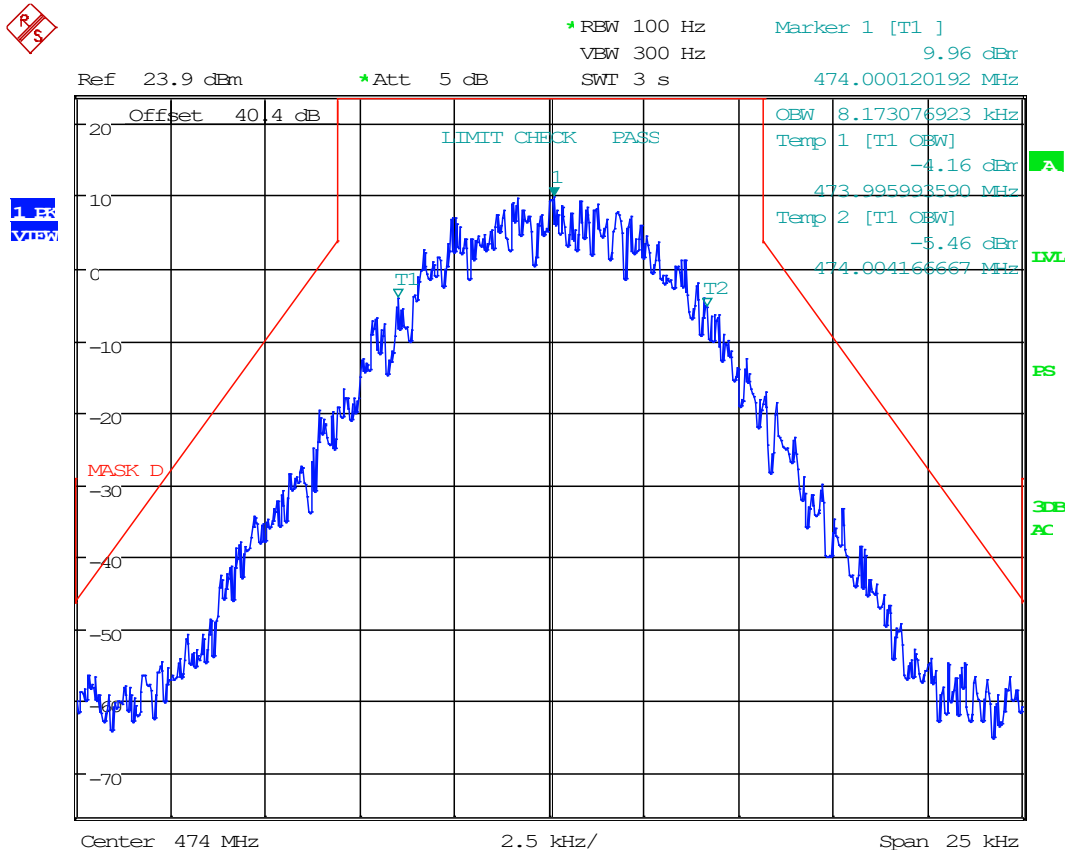


Date: 8.OCT.2020 12:58:04

8.5.40 H-CPM, Uplink, AGC +3dB

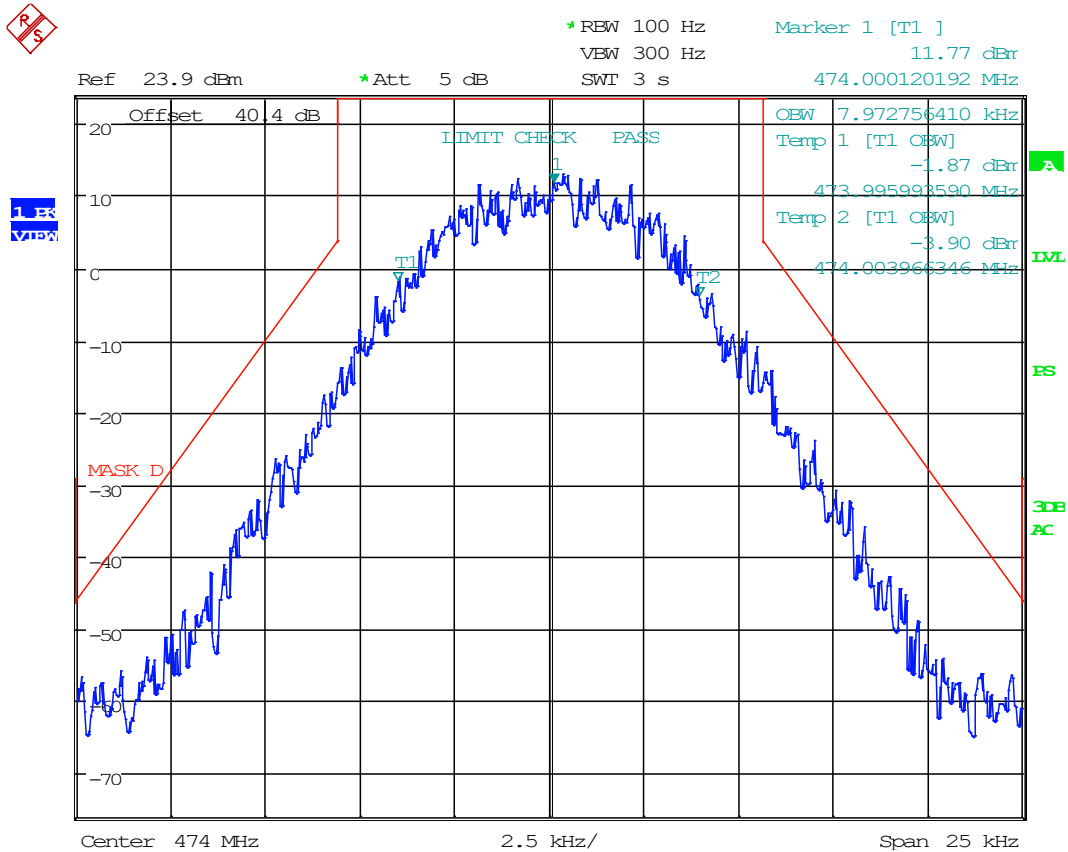


Date: 8.OCT.2020 12:58:35

8.5.41 H-DQPSK, Uplink, AGC

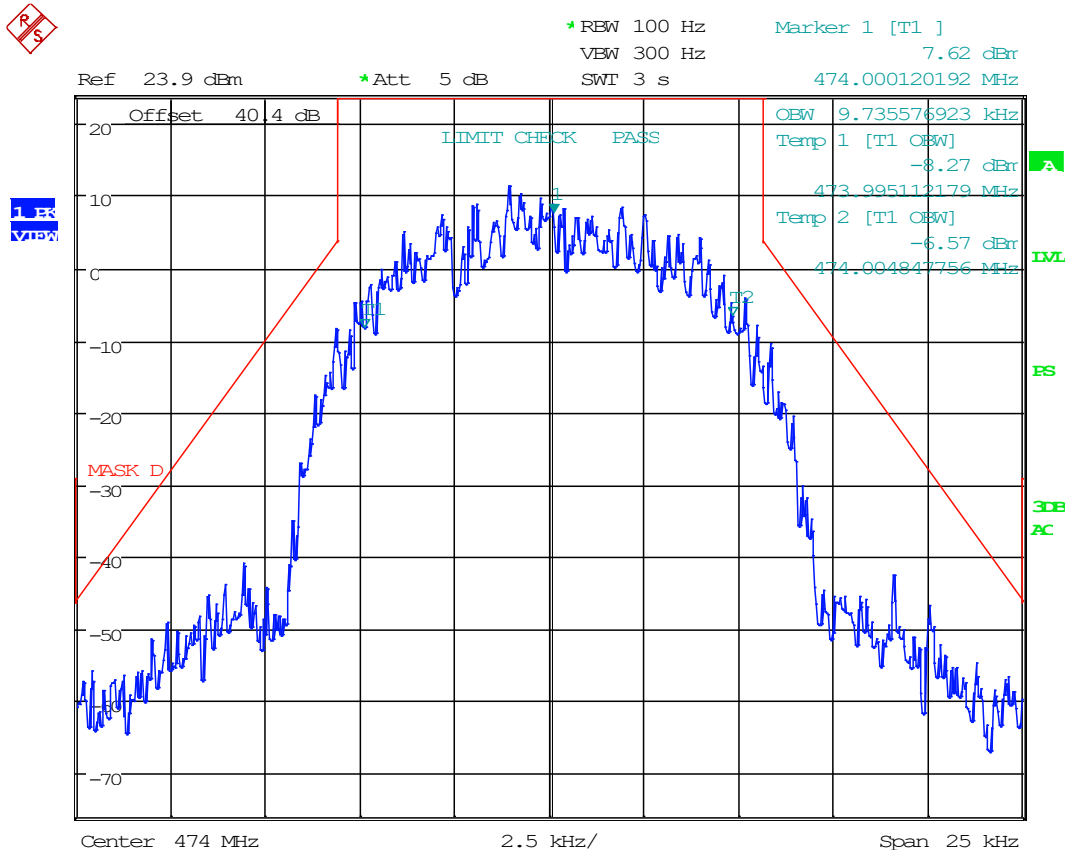


Date: 8.OCT.2020 12:59:15

8.5.42 H-DQPSK, Uplink, AGC +3dB

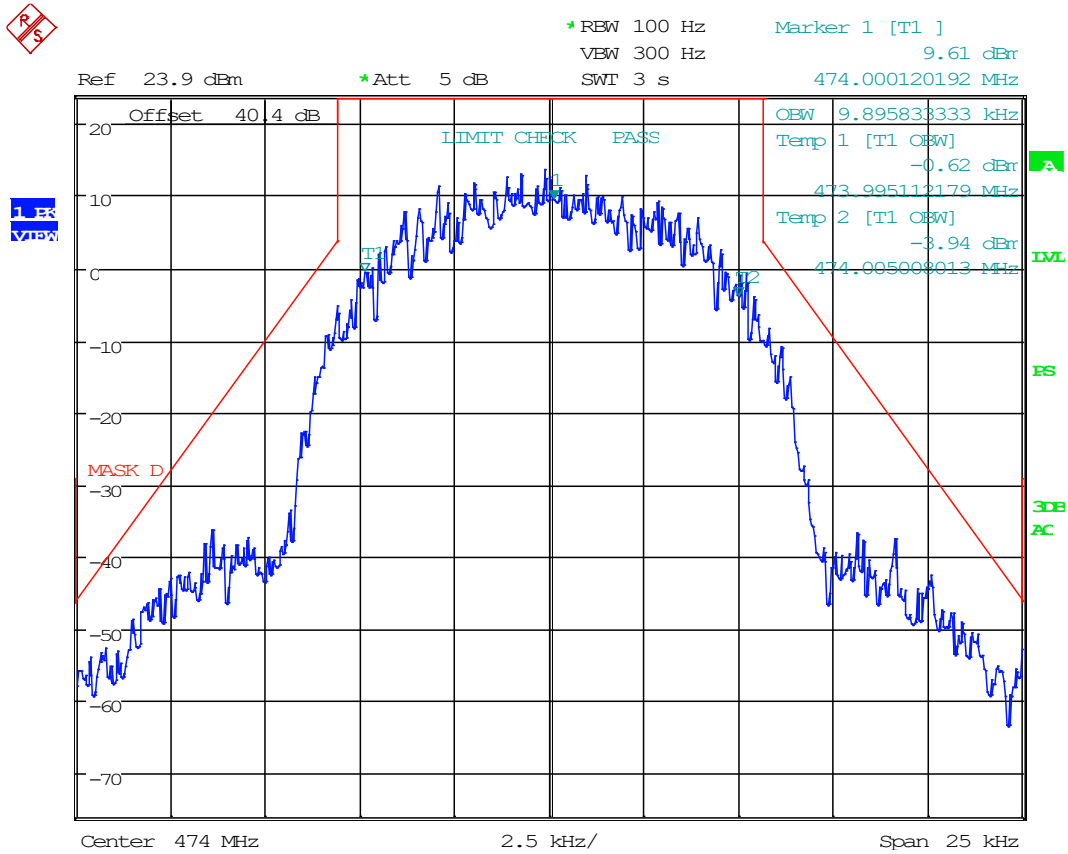


Date: 8.OCT.2020 12:59:45

8.5.43 25 kHz FM, Downlink, AGC


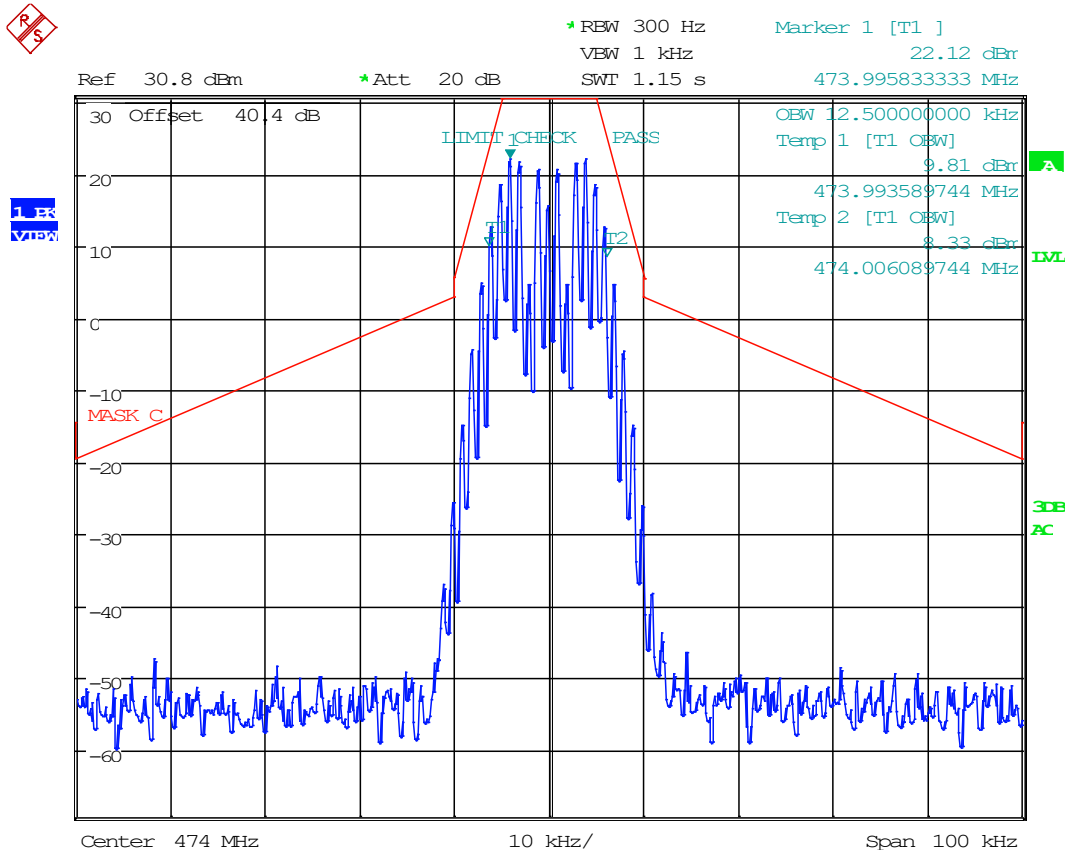


Date: 6.OCT.2020 18:22:07

8.5.44 25 kHz FM, Downlink, AGC +3dB

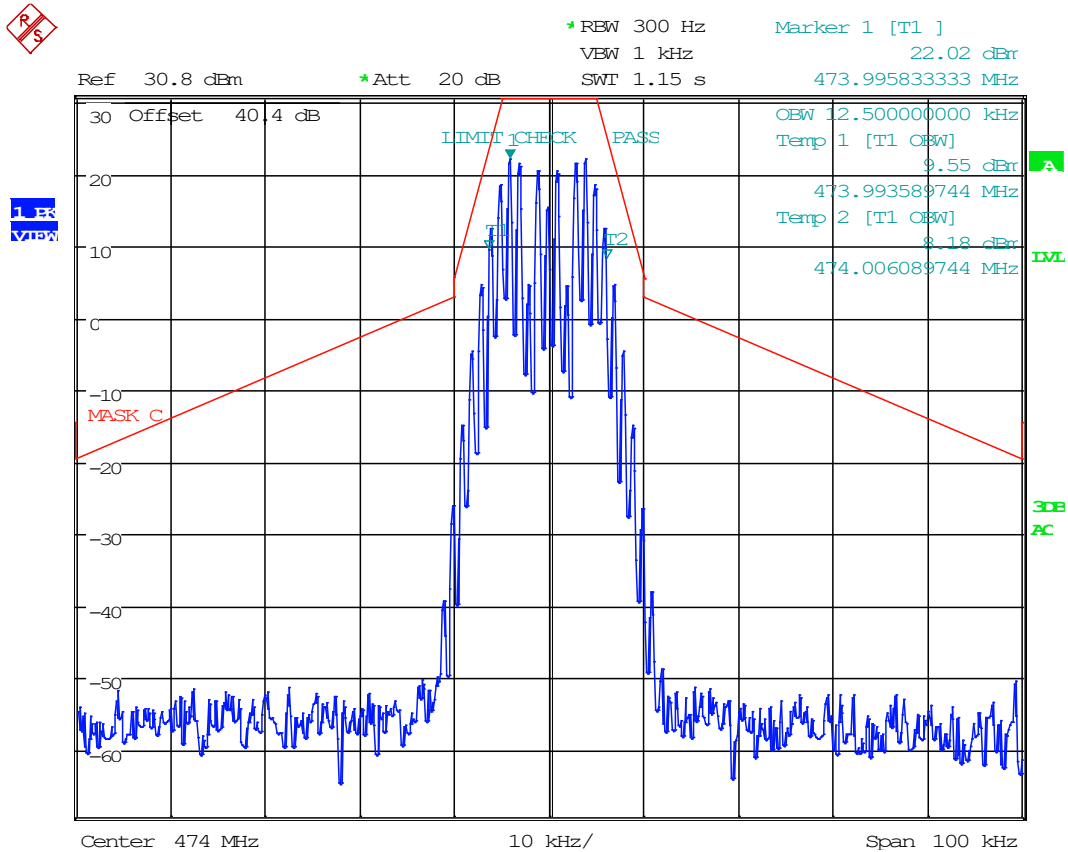


Date: 6.OCT.2020 18:24:02

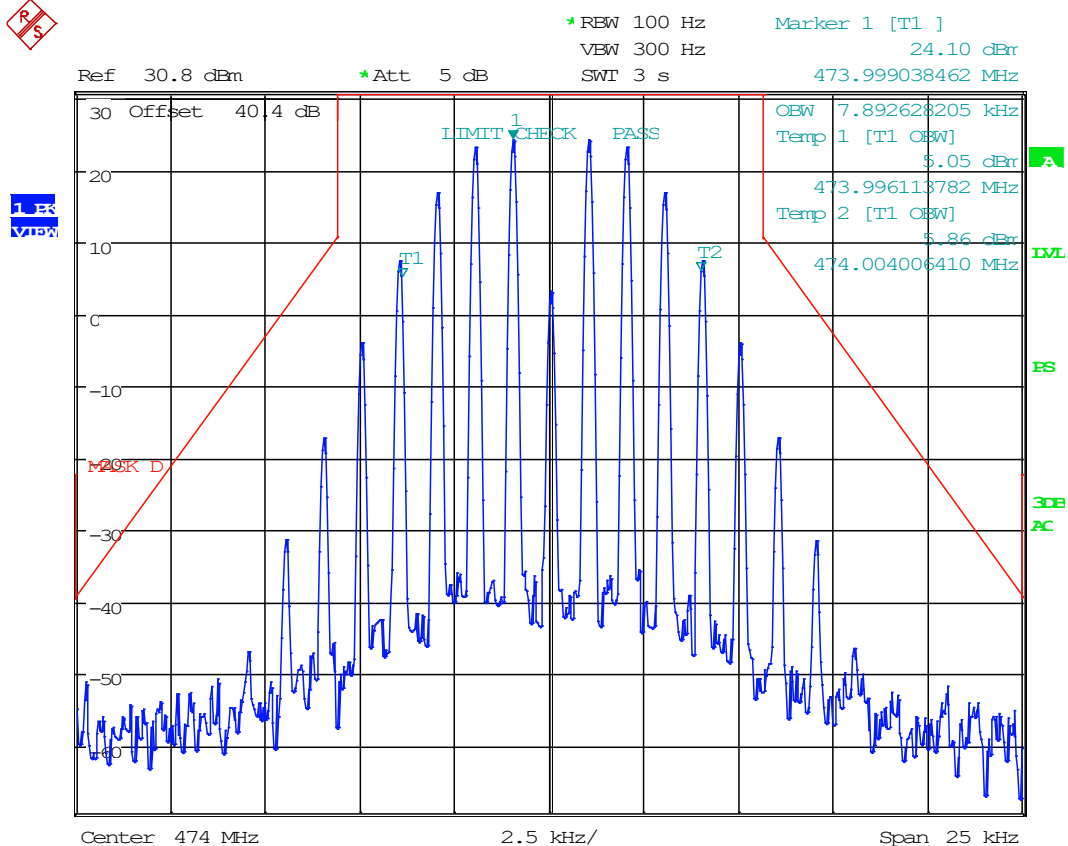


Date: 6.OCT.2020 18:44:56

8.5.46 12.5 kHz FM, Downlink, AGC +3dB

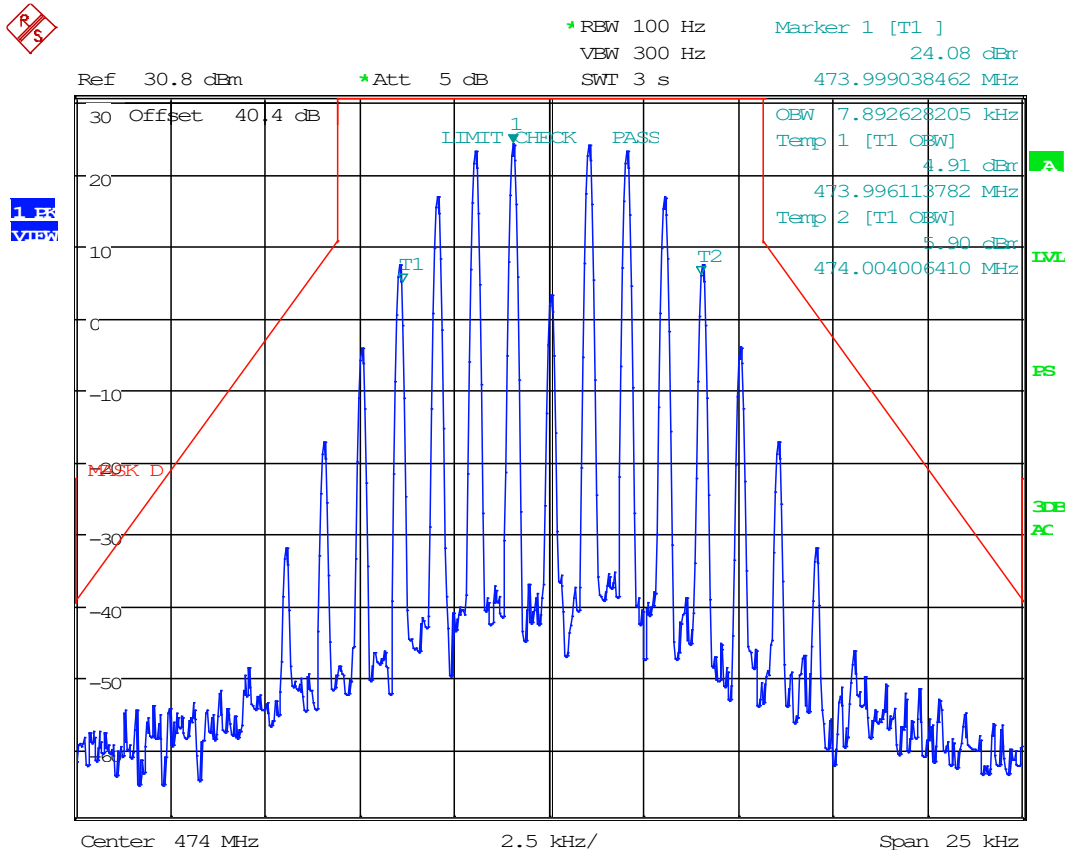


Date: 6.OCT.2020 18:45:23






8.5.49 C4FM, Downlink, AGC

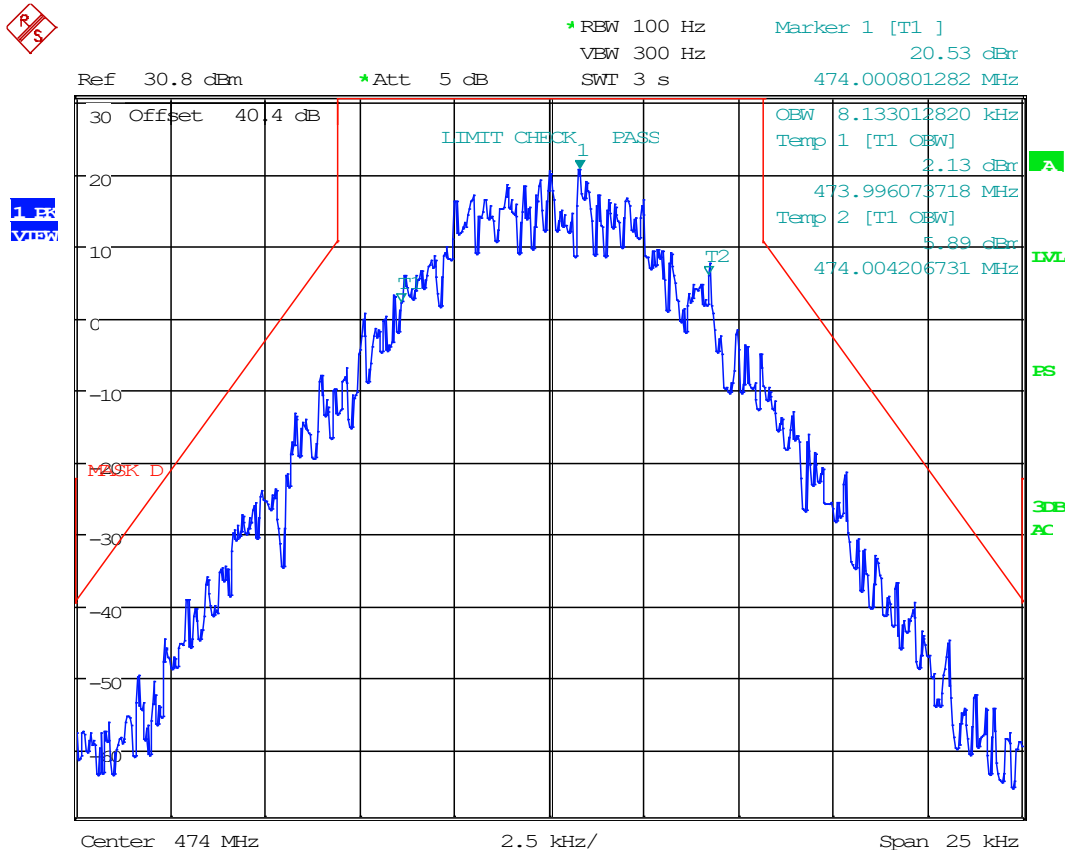


Date: 6.OCT.2020 18:46:02

8.5.50 C4FM, Downlink, AGC +3dB

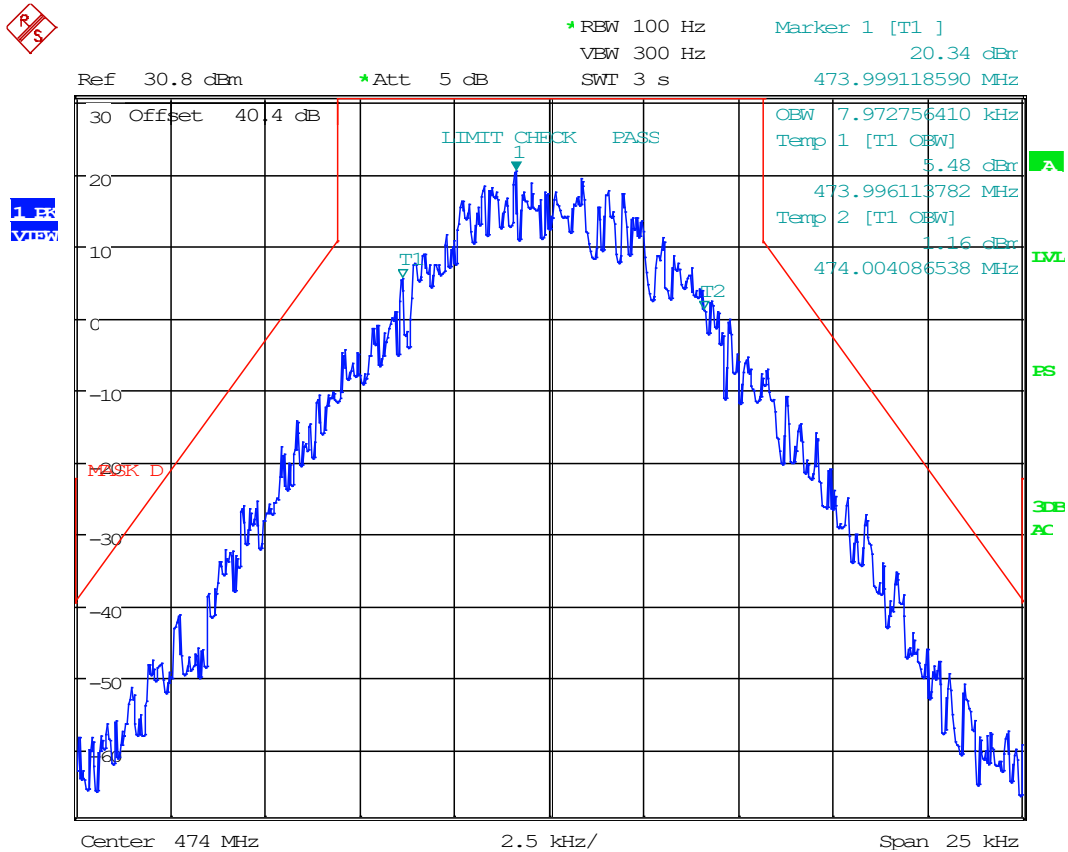


Date: 6.OCT.2020 18:46:28

8.5.51 H-CPM, Downlink, AGC

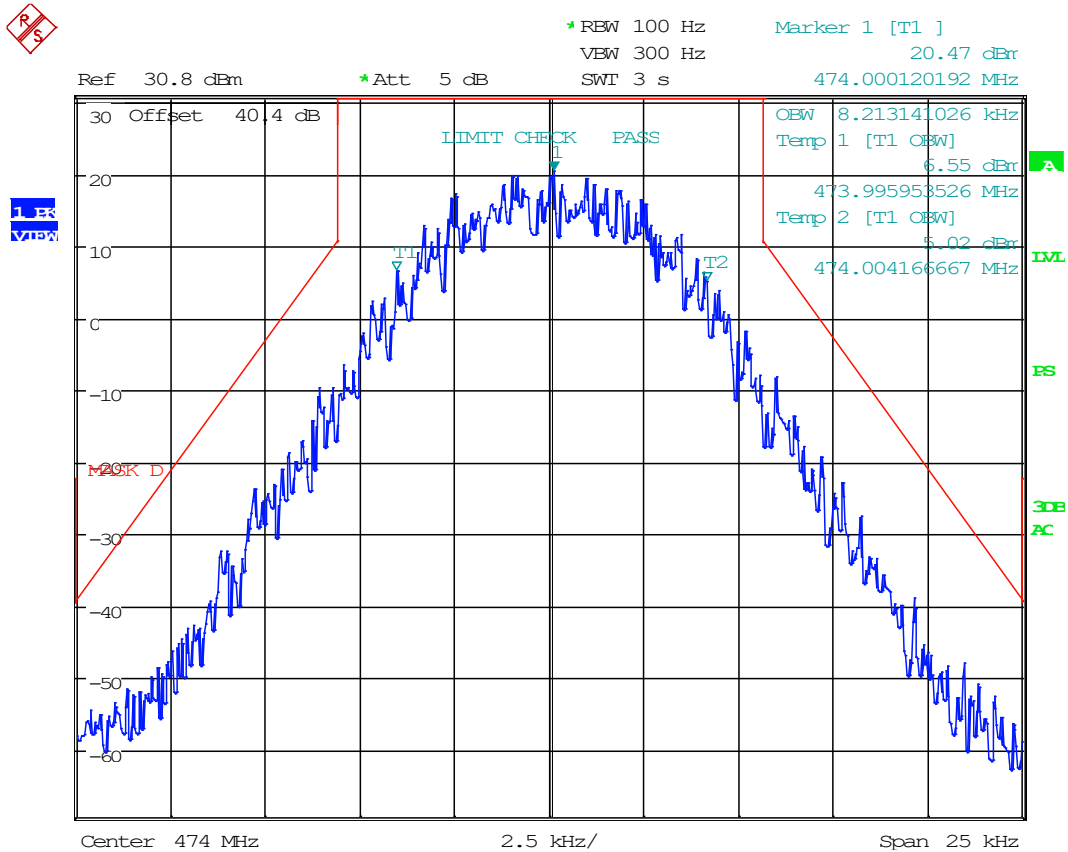


Date: 6.OCT.2020 18:47:08

8.5.52 H-CPM, Downlink, AGC +3dB

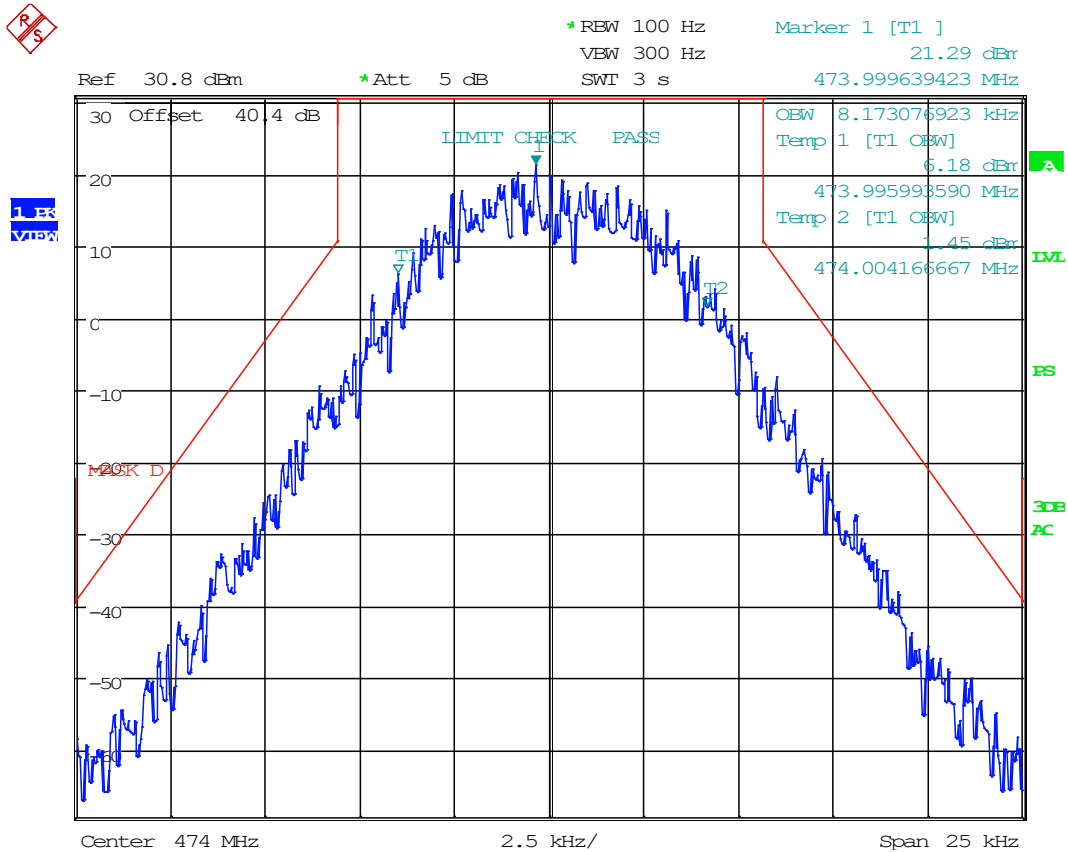


Date: 6.OCT.2020 18:47:35

8.5.53 H-DQPSK, Downlink, AGC

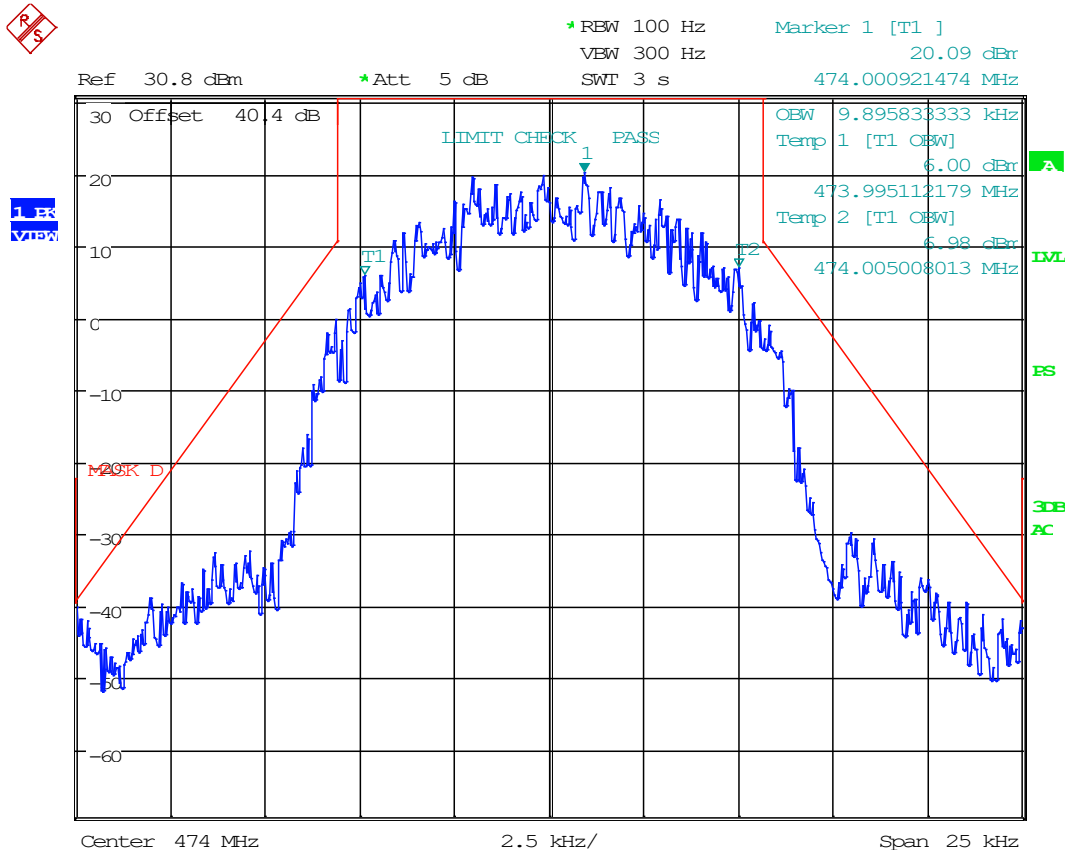

Date: 6.OCT.2020 18:48:17

8.5.54 H-DQPSK, Downlink, AGC +3dB

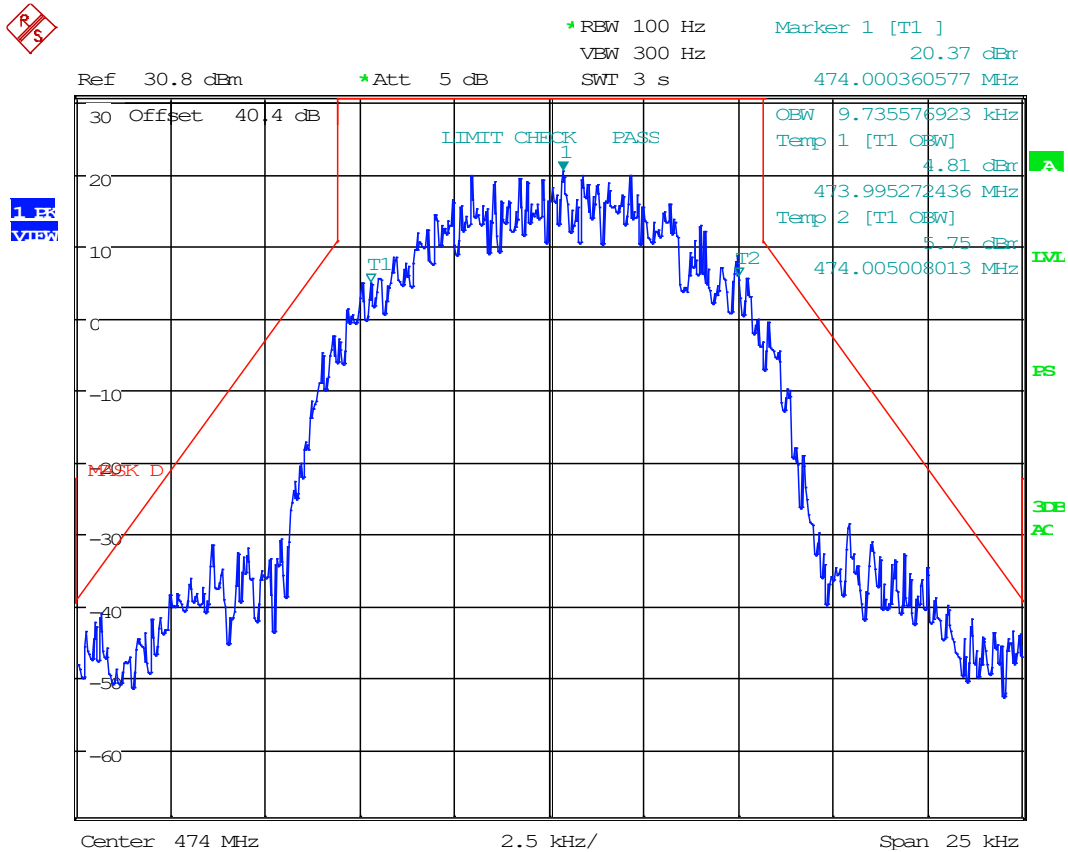


Date: 6.OCT.2020 18:48:48



8.6 Noise Figure

Referenced from test report "TR_3714-20_FCC_PT90_Booster Class B_1.docx".

Limits from FCC KDB 935210 D05 v01r04 Industrial Signal Boosters. Test method from "Noise Figure Measurement Accuracy: The Y-Factor Method" by Keysight Technologies.

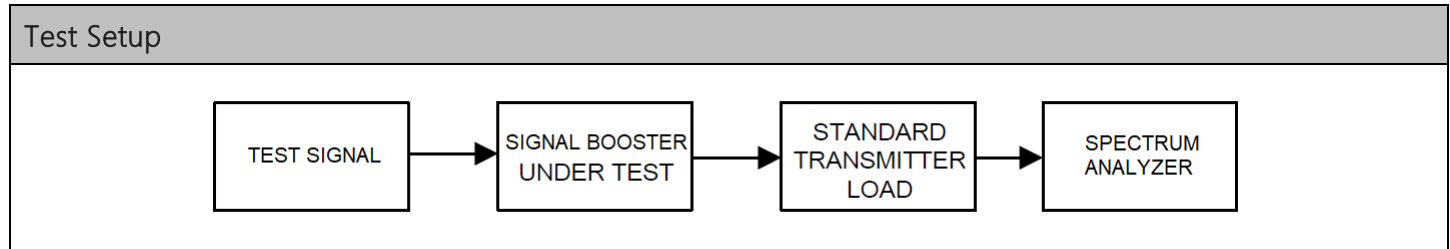

Test Results, Out-of-band Rejection and Class of Operation			
Operating Band	Link Direction	Noise Figure	Limit
150 – 174 MHz	Uplink	4.82	< 9 dB
150 – 174 MHz	Downlink	5.12	< 9 dB
450 – 512 MHz	Uplink	4.96	< 9 dB
450 – 512 MHz	Downlink	4.62	< 9 dB




Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.7 Out-of-Band/Out-of-Block Emissions (Intermodulation Products)

Referenced from test report "TR_3714-20_FCC_PT90_Booster Class B_1.docx".


Limits from FCC Parts 2.1051, 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

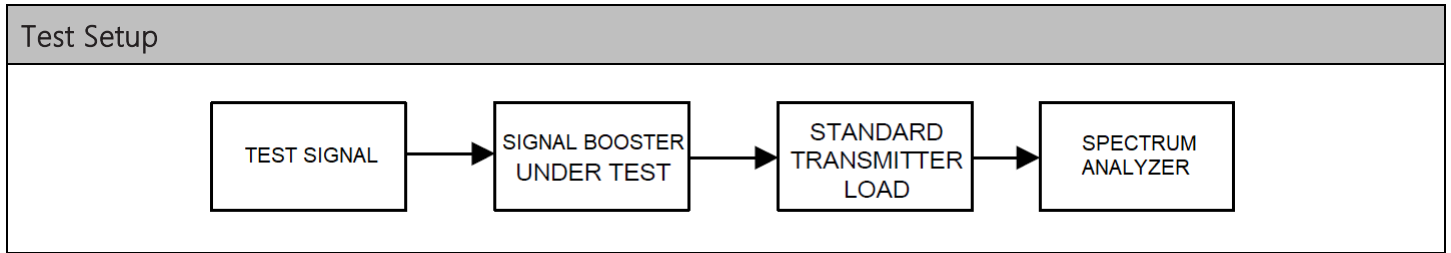



Intermodulation Products Spectrum Plots, VHF Band


8.7.1 6.25 kHz Signal, Uplink, AGC

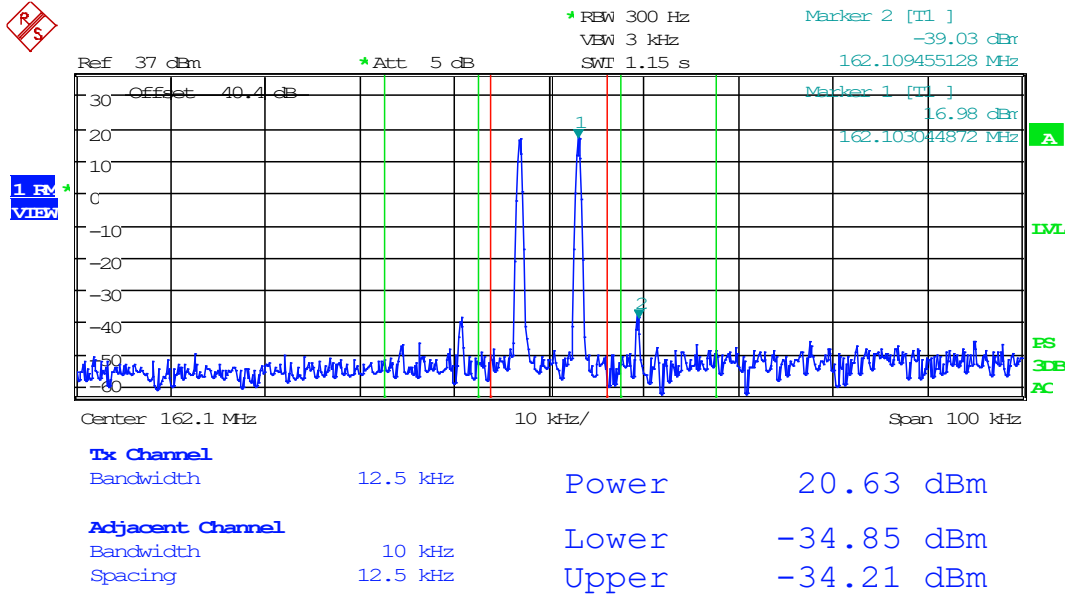

Date: 8.OCT.2020 13:19:16




8.7.2 6.25 kHz Signal, Uplink, AGC +3dB

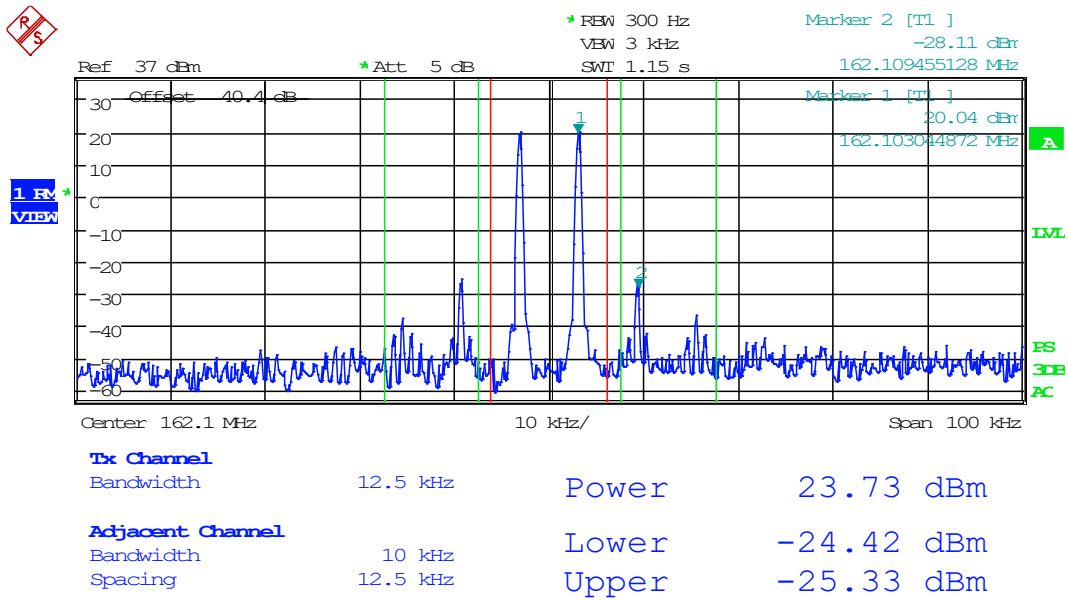


Date: 8.OCT.2020 13:19:39

8.7.3 12.5 kHz Signal, Uplink, AGC

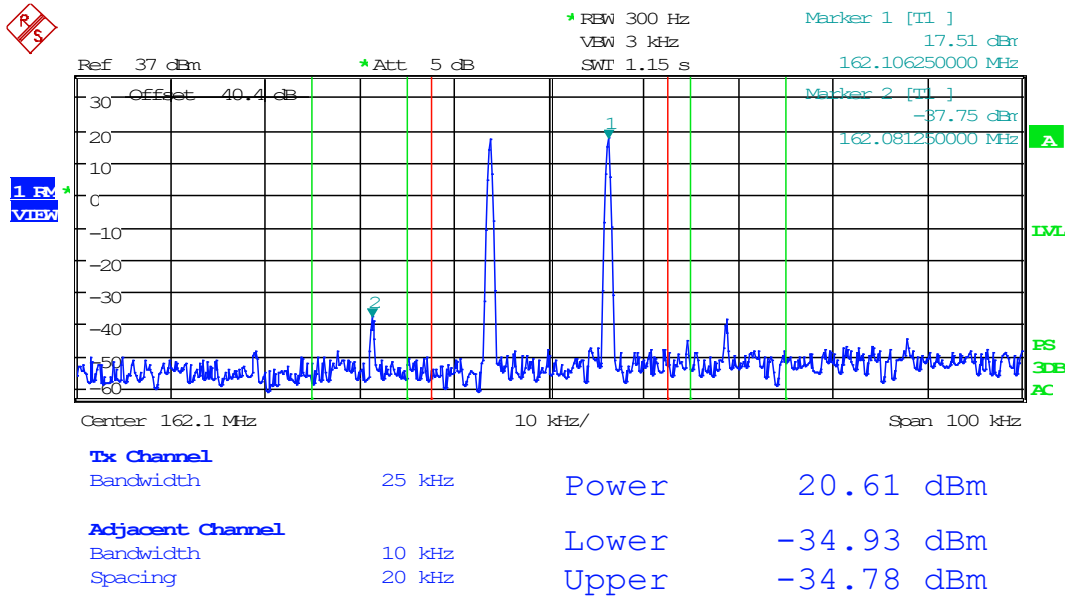


Date: 8.OCT.2020 13:17:40

8.7.4 12.5 kHz Signal, Uplink, AGC +3dB

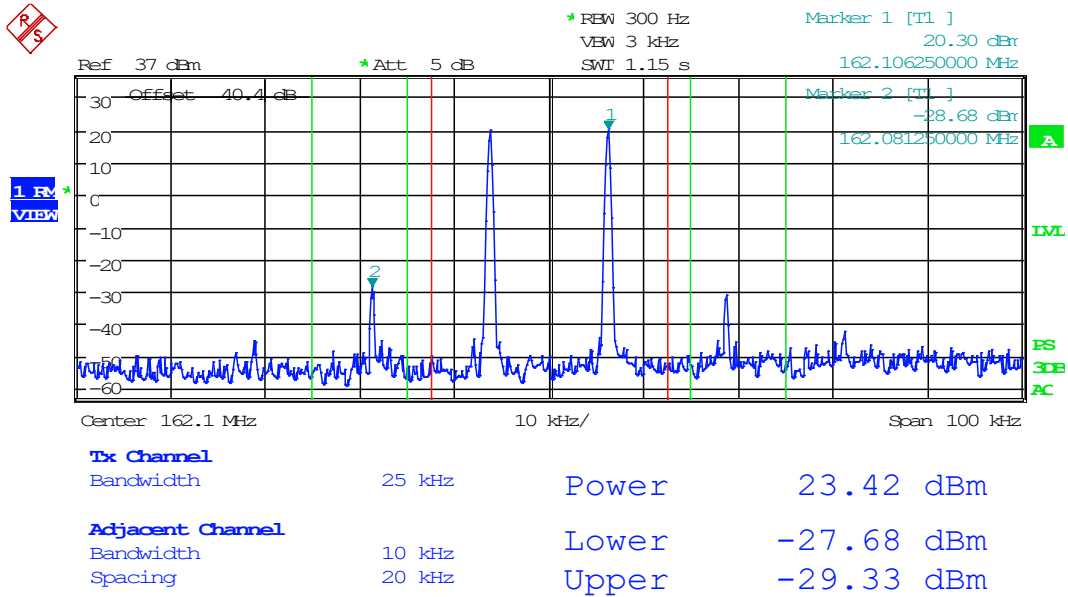


Date: 8.OCT.2020 13:18:07

8.7.5 25 kHz Signal, Uplink, AGC

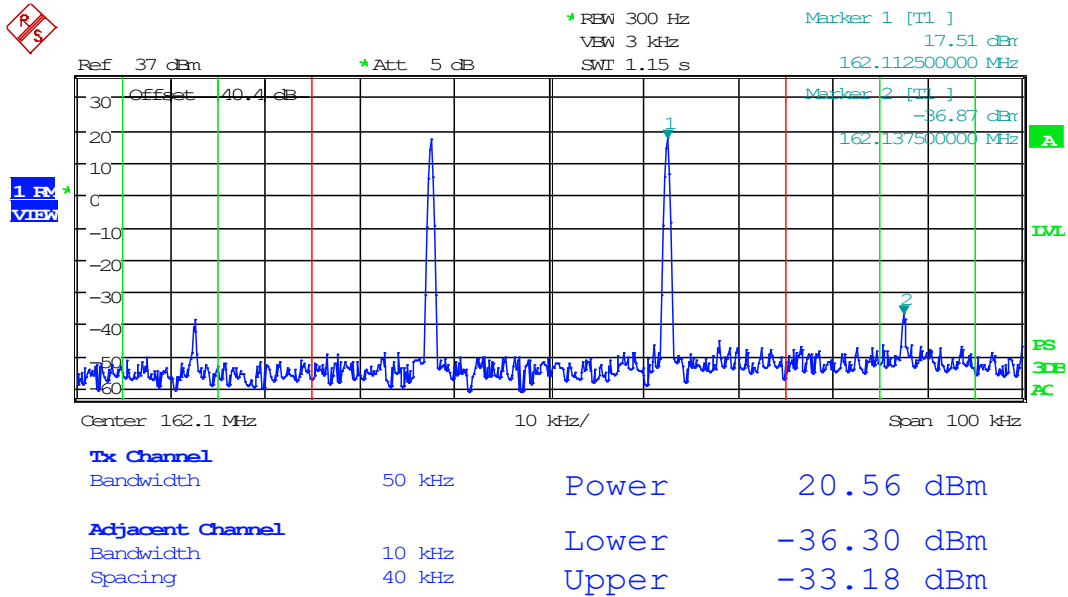

Date: 8.OCT.2020 13:15:43


8.7.6 25 kHz Signal, Uplink, AGC +3dB

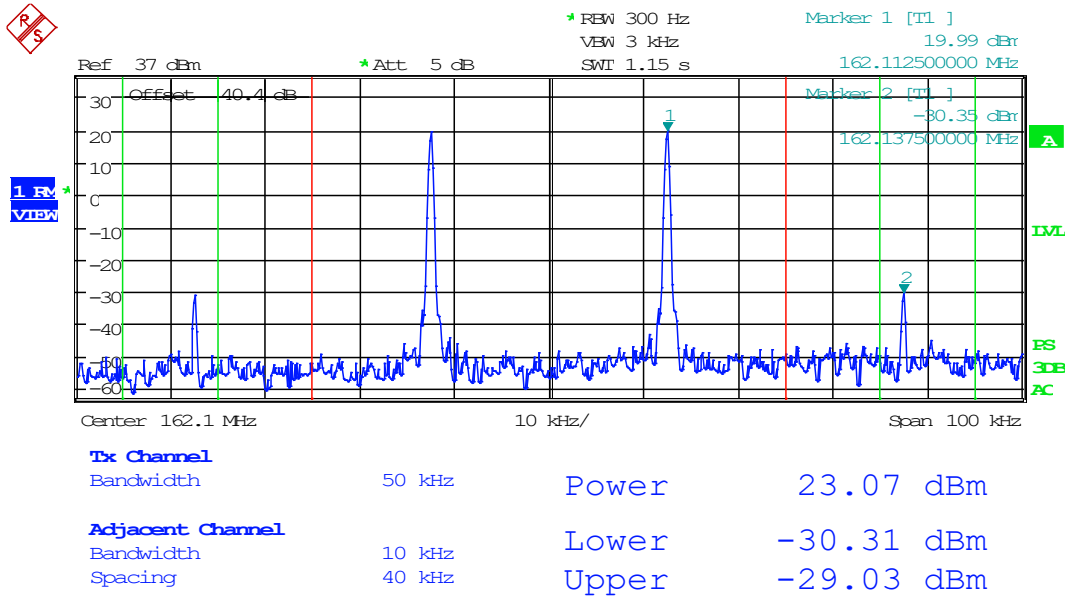

Date: 8.OCT.2020 13:16:13




8.7.7 6.25 kHz Signal, Downlink, AGC

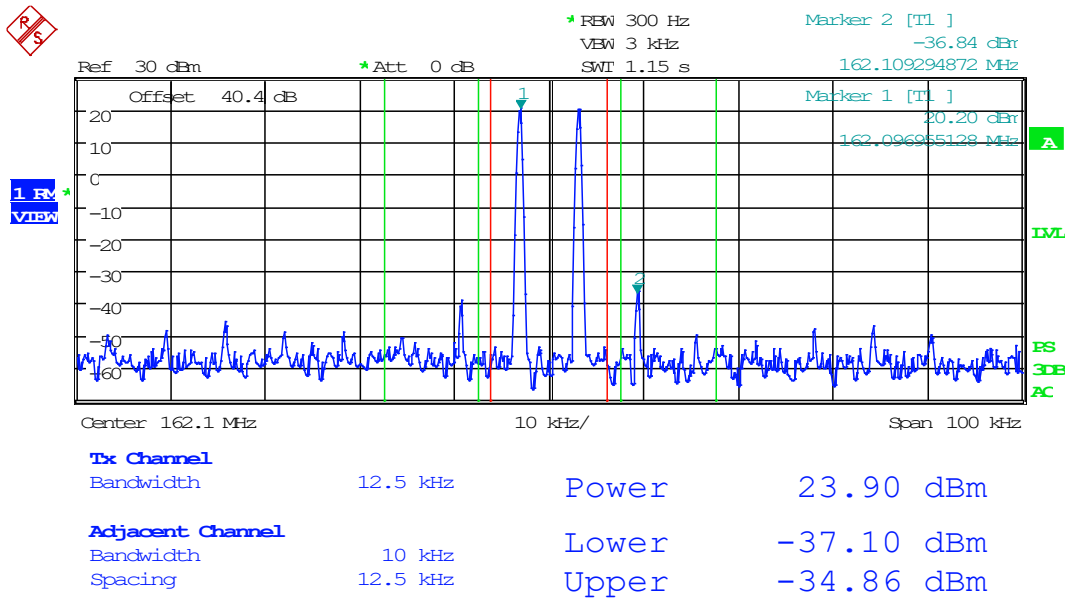

Date: 7.OCT.2020 12:52:07


8.7.8 6.25 kHz Signal, Downlink, AGC +3dB

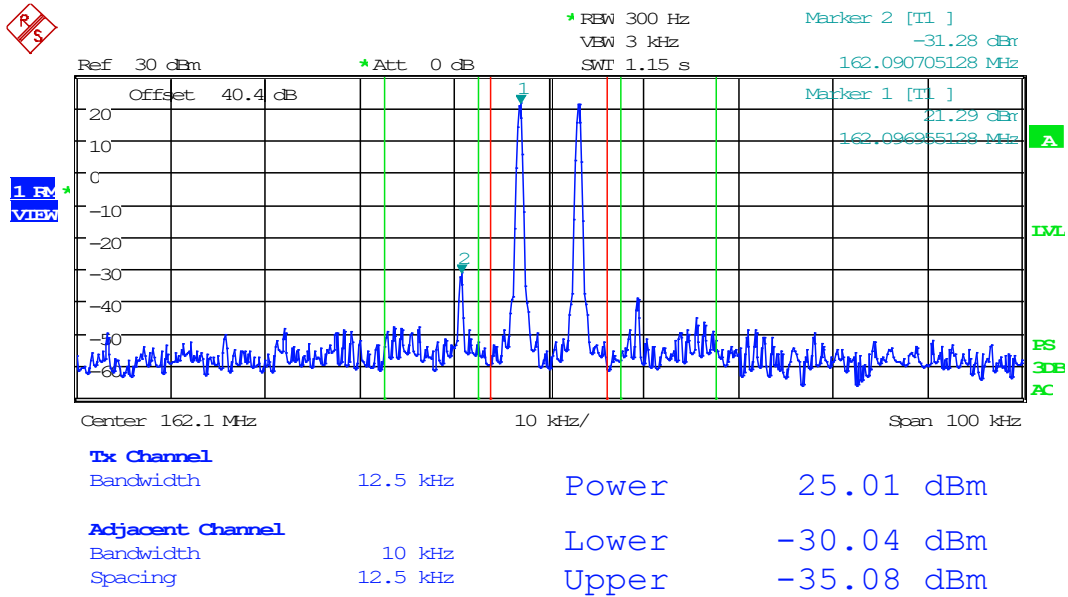

Date: 7.OCT.2020 12:53:51




8.7.9 12.5 kHz Signal, Downlink, AGC

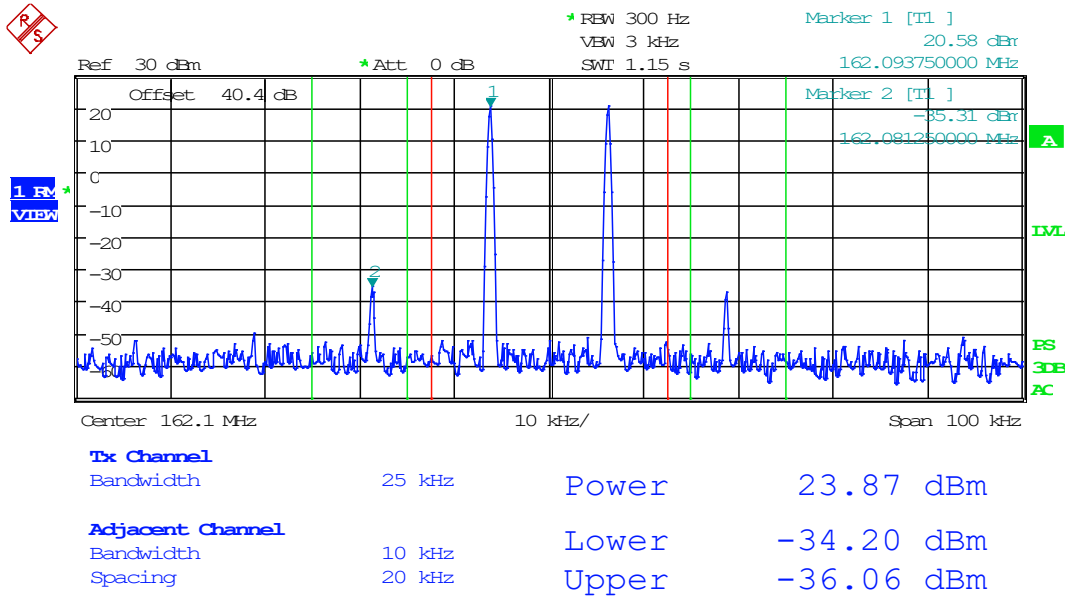

Date: 7.OCT.2020 12:55:49




8.7.10 12.5 kHz Signal, Downlink, AGC +3dB

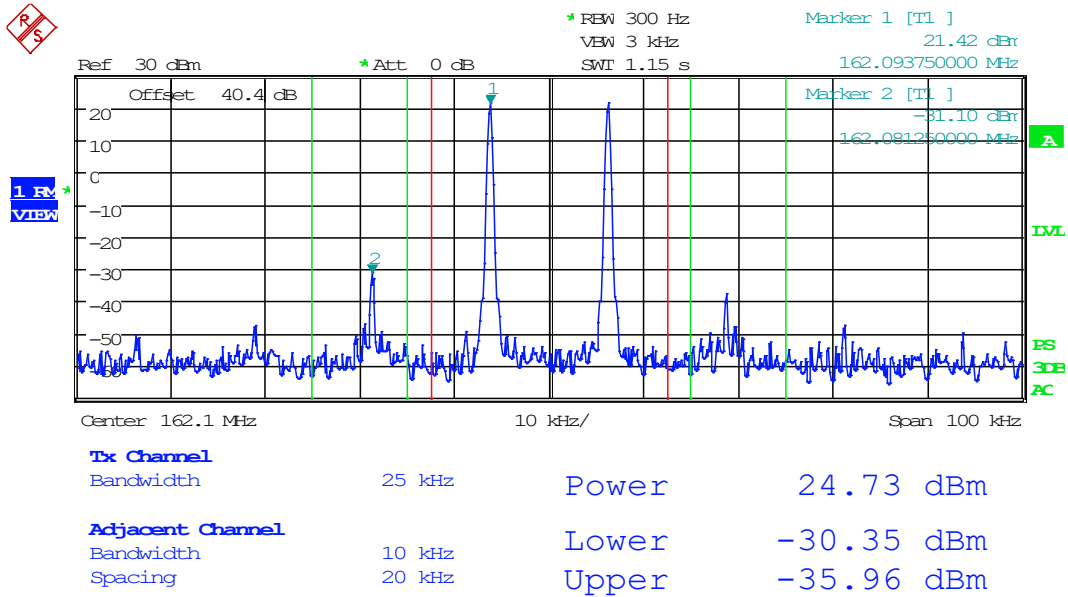


Date: 7.OCT.2020 12:56:33

8.7.11 25 kHz Signal, Downlink, AGC

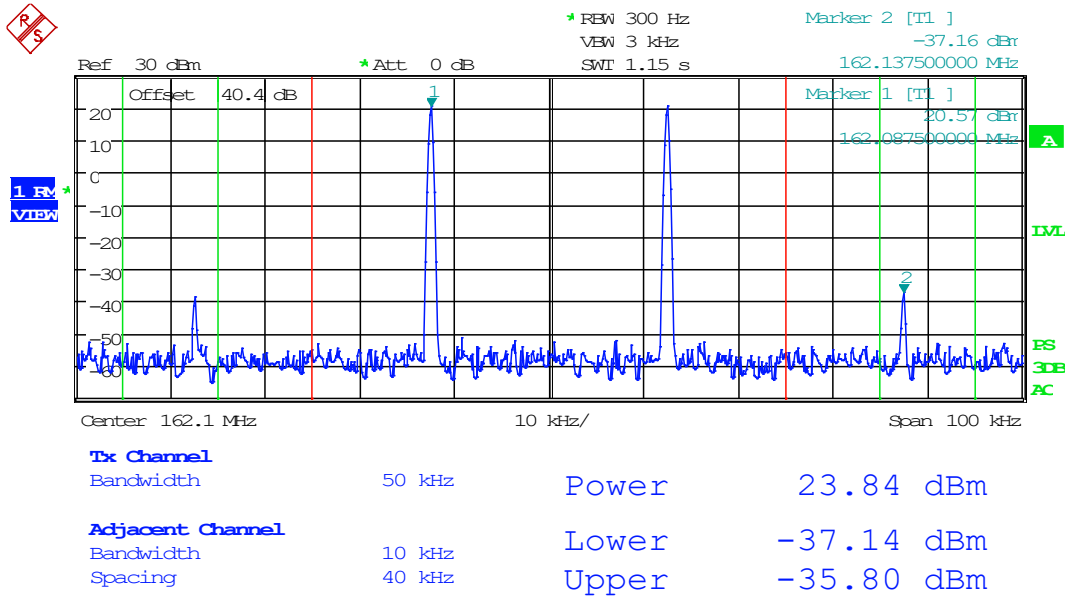

Date: 7.OCT.2020 12:58:44

8.7.12 25 kHz Signal, Downlink, AGC +3dB

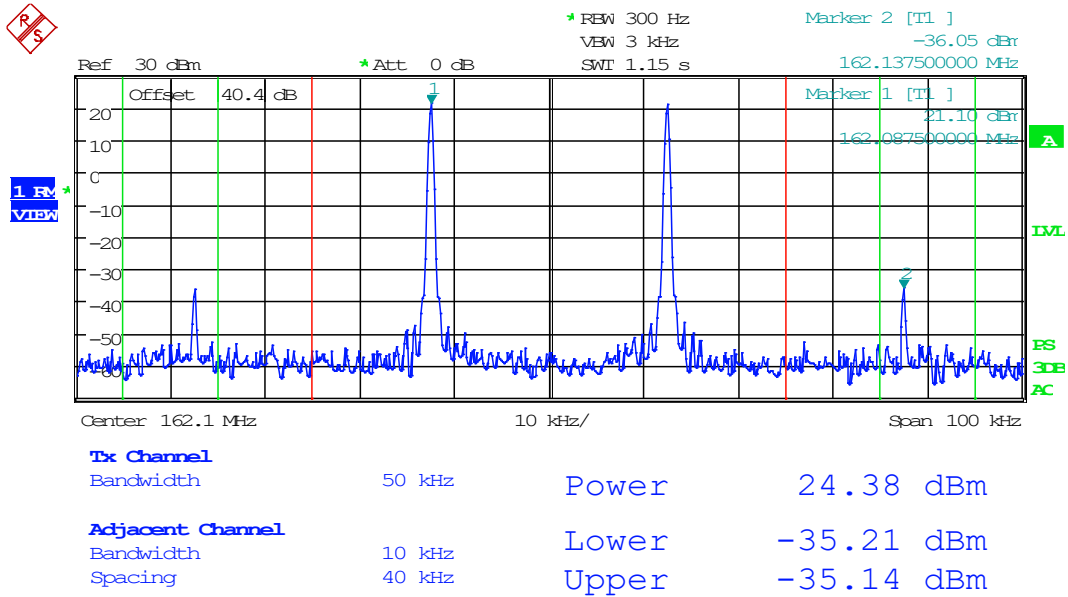


Date: 7.OCT.2020 12:59:20



Intermodulation Products Spectrum Plots, UHF Band


8.7.13 6.25 kHz Signal, Uplink, AGC

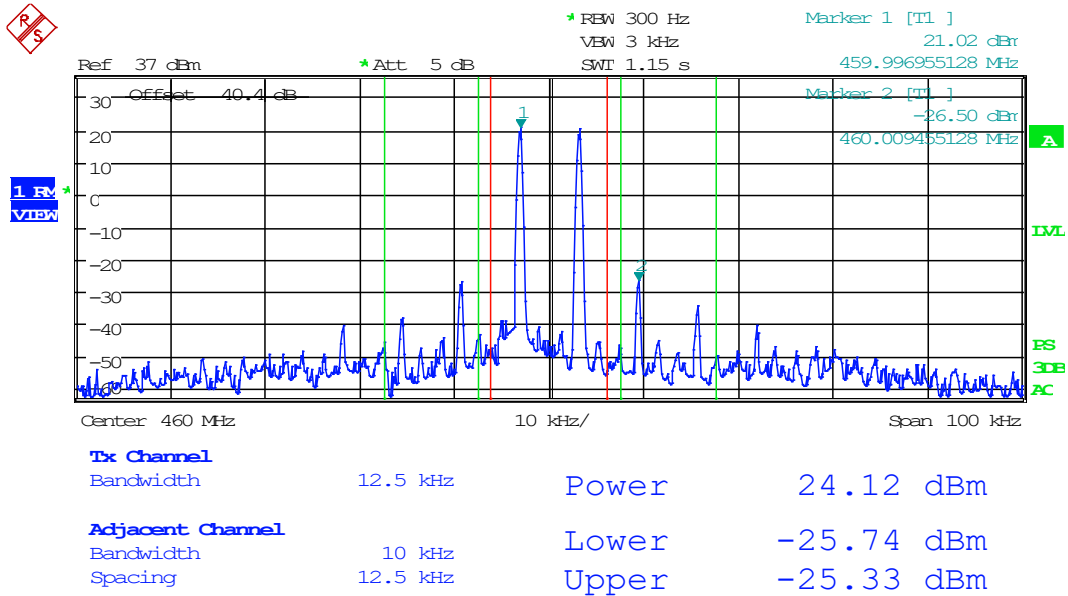

Date: 20.OCT.2020 17:21:26




8.7.14 6.25 kHz Signal, Uplink, AGC +3dB

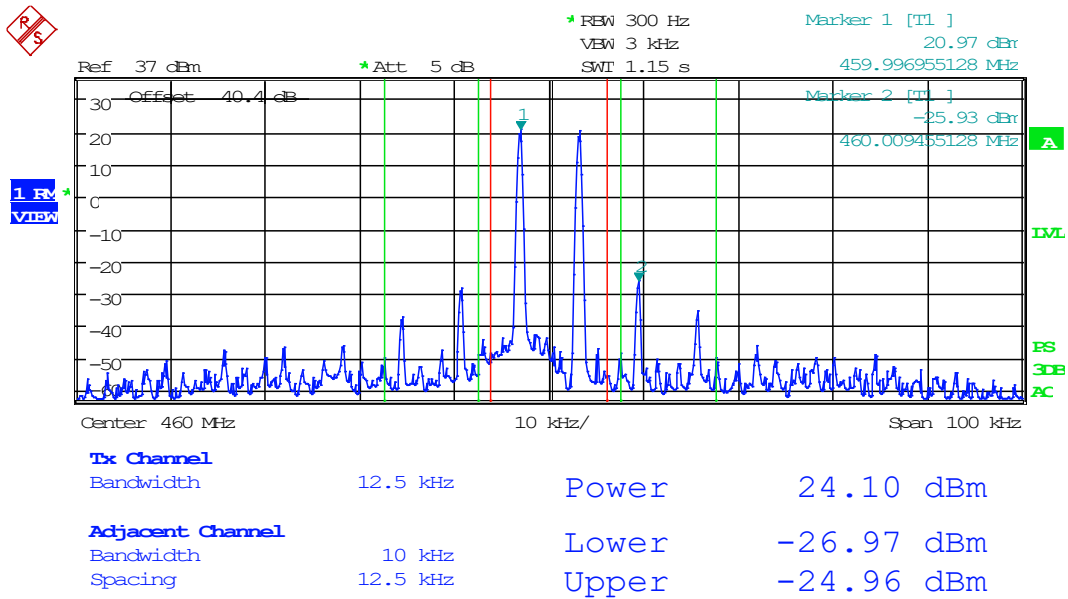

Date: 20.OCT.2020 17:21:50


8.7.15 12.5 kHz Signal, Uplink, AGC

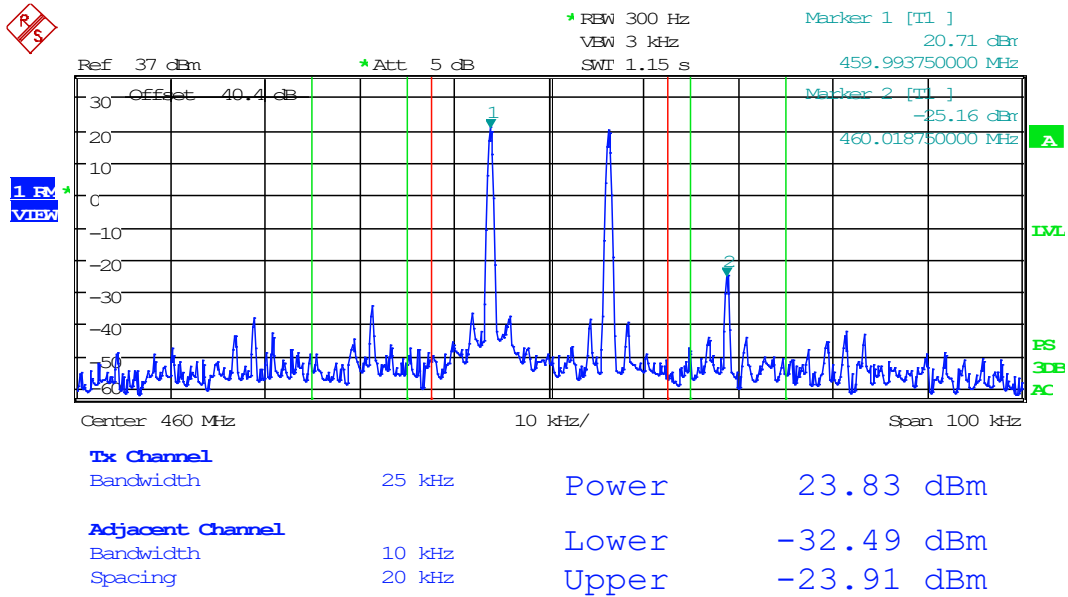

Date: 20.OCT.2020 17:23:06




8.7.16 12.5 kHz Signal, Uplink, AGC +3dB

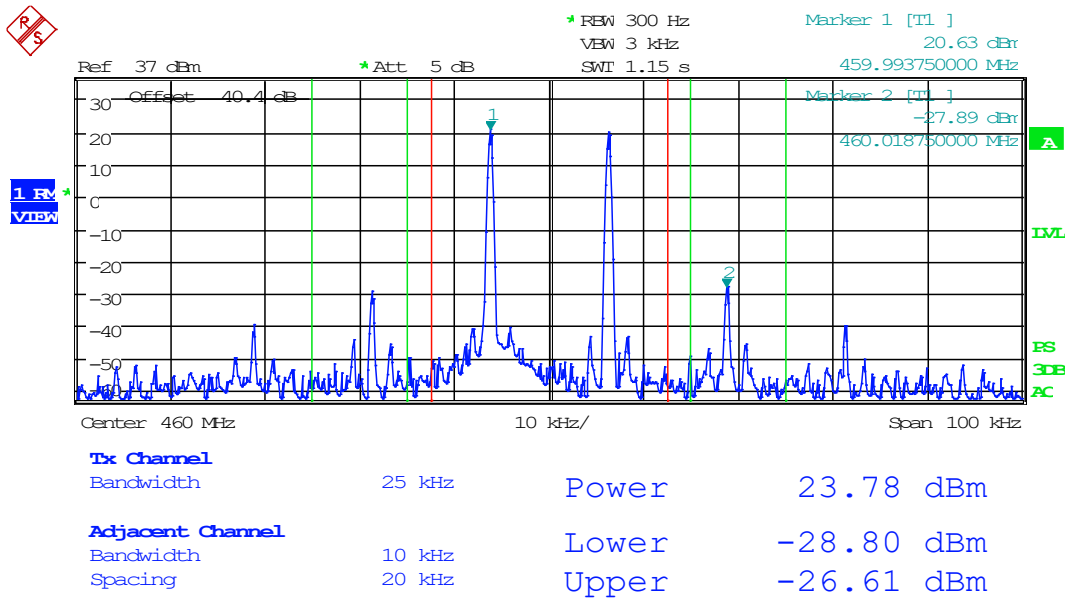


Date: 20.OCT.2020 17:23:52

8.7.17 25 kHz Signal, Uplink, AGC

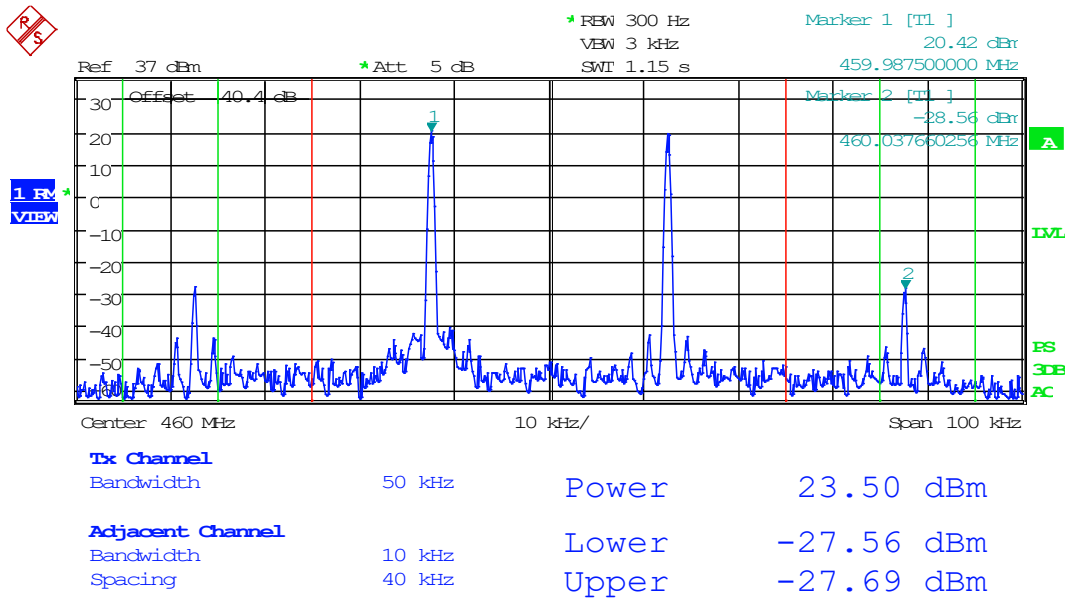

Date: 20.OCT.2020 17:26:56


8.7.18 25 kHz Signal, Uplink, AGC +3dB

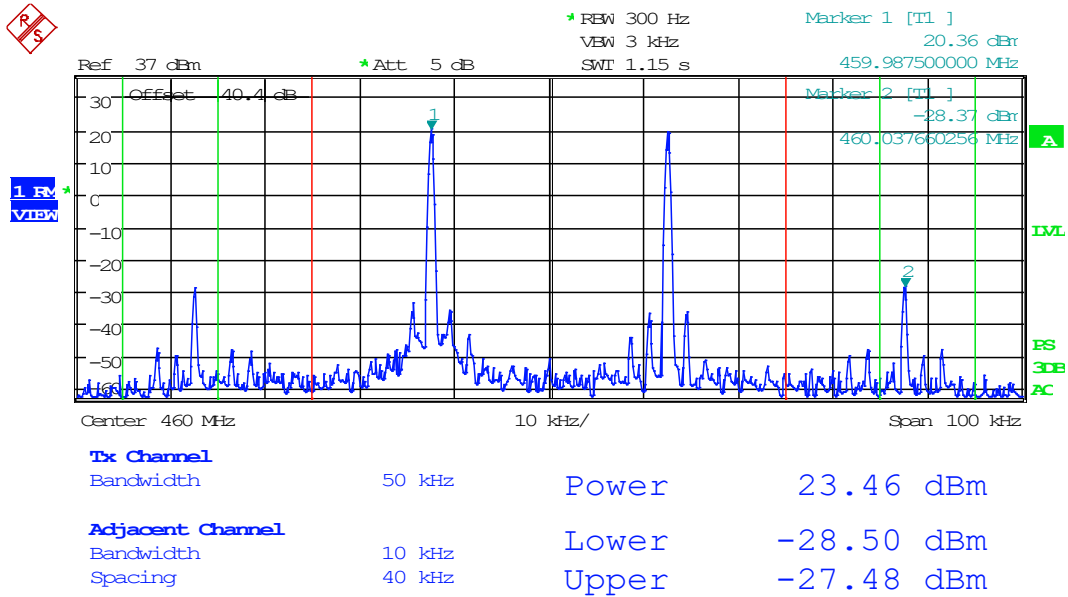

Date: 20.OCT.2020 17:27:51




8.7.19 6.25 kHz Signal, Downlink, AGC

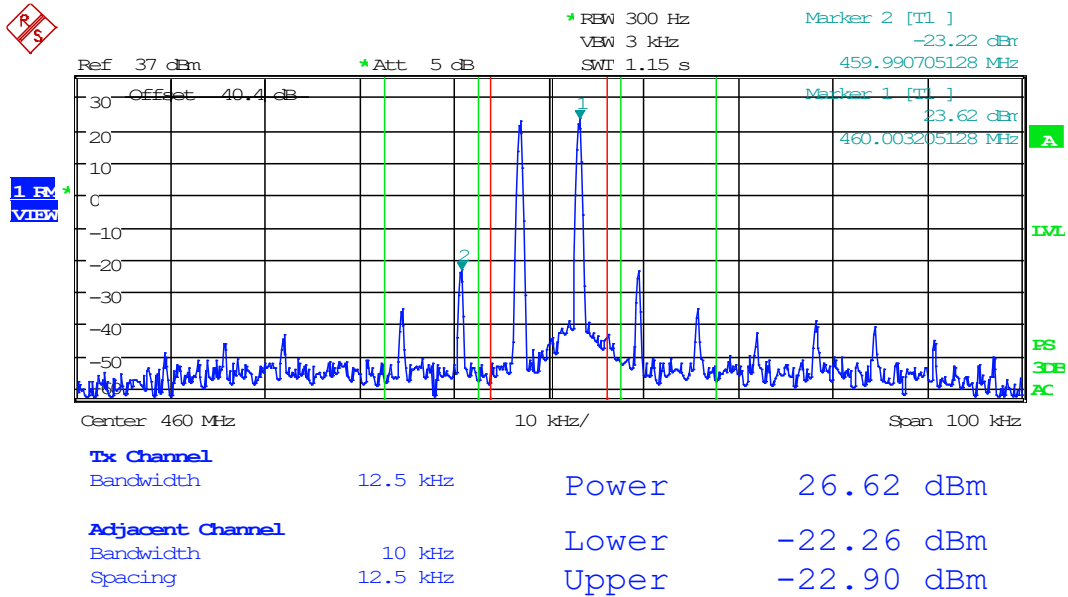

Date: 20.OCT.2020 17:49:46




8.7.20 6.25 kHz Signal, Downlink, AGC +3dB

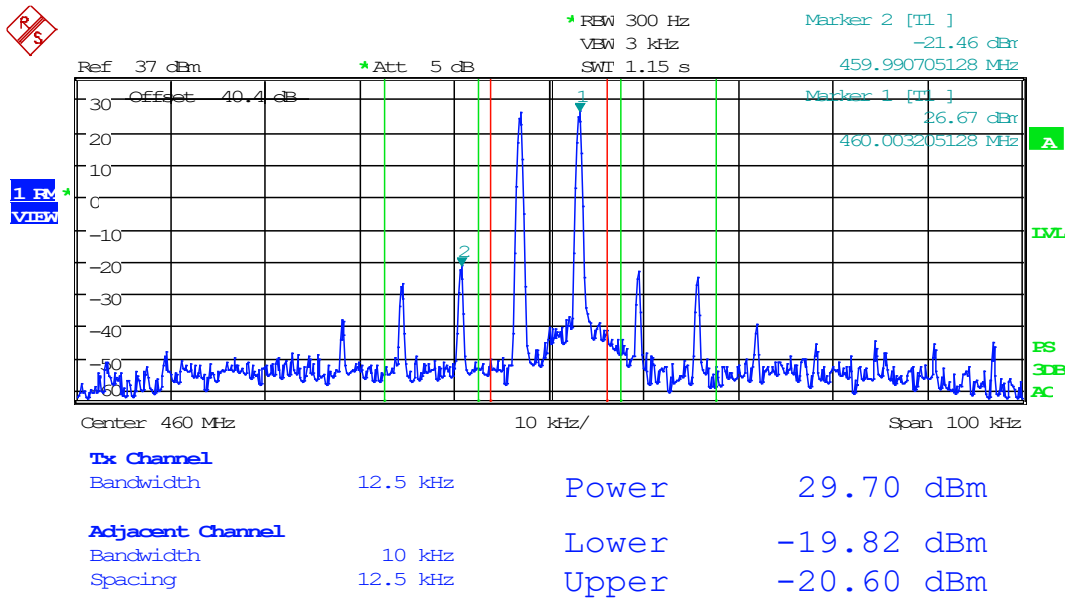

Date: 20.OCT.2020 17:50:11




8.7.21 12.5 kHz Signal, Downlink, AGC

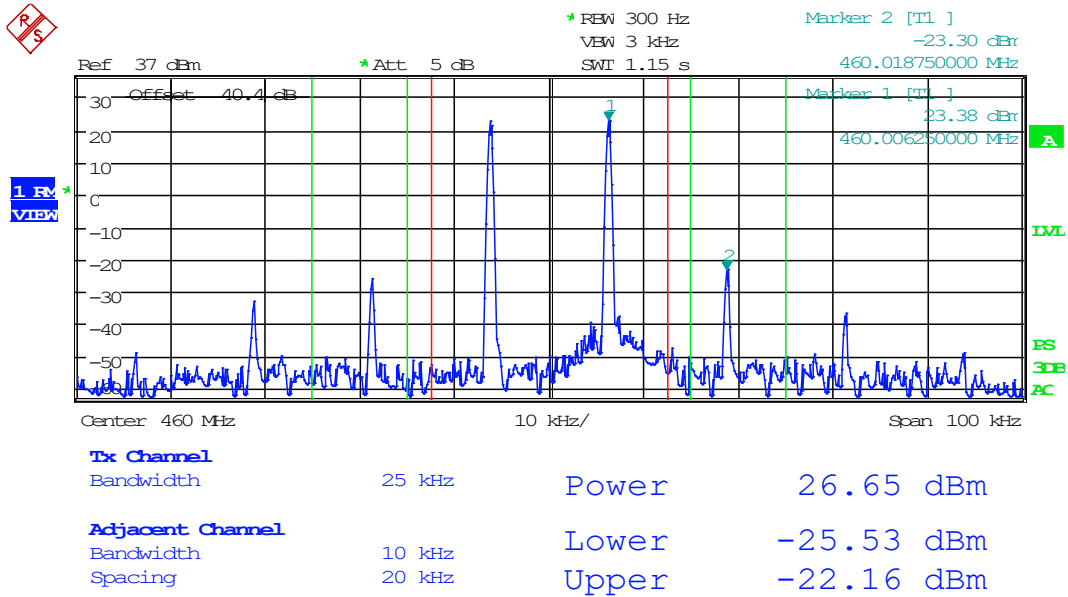

Date: 20.OCT.2020 17:48:20


8.7.22 12.5 kHz Signal, Downlink, AGC +3dB

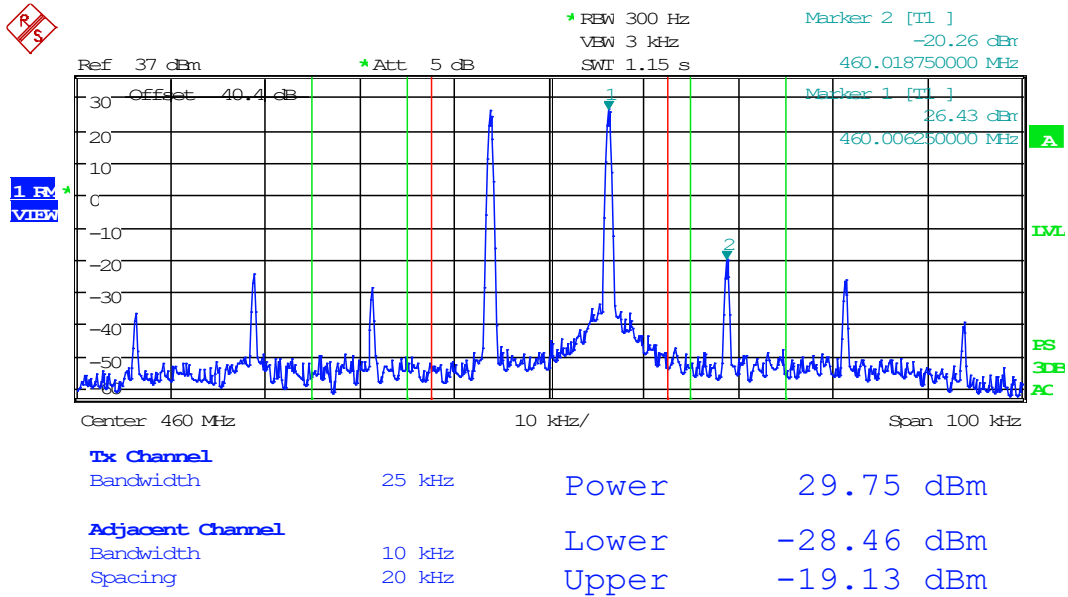

Date: 20.OCT.2020 17:48:42




8.7.23 25 kHz Signal, Downlink, AGC

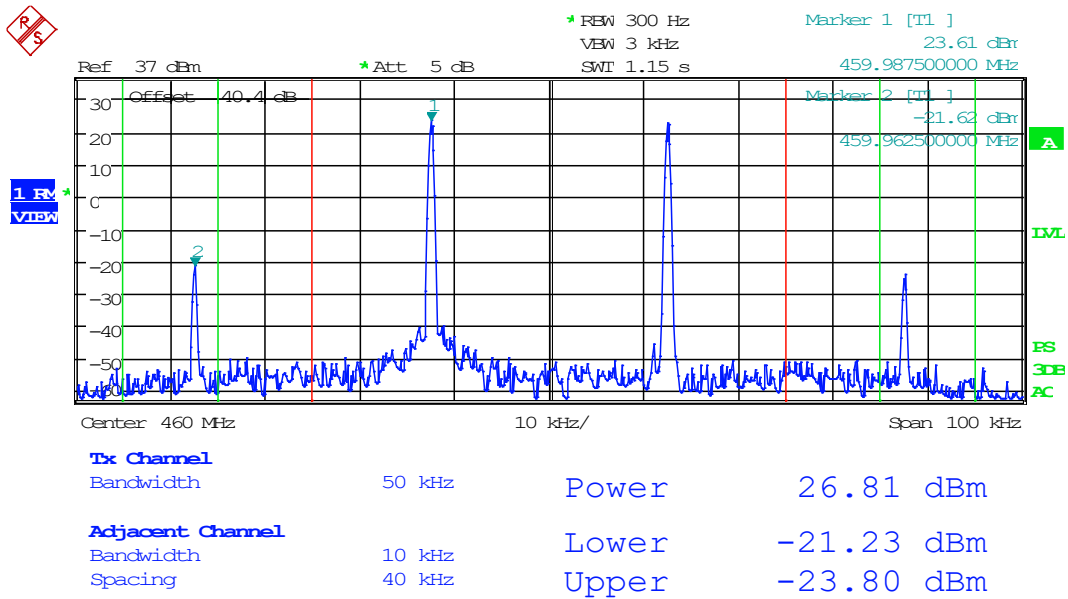

Date: 20.OCT.2020 17:47:11

8.7.24 25 kHz Signal, Downlink, AGC +3dB

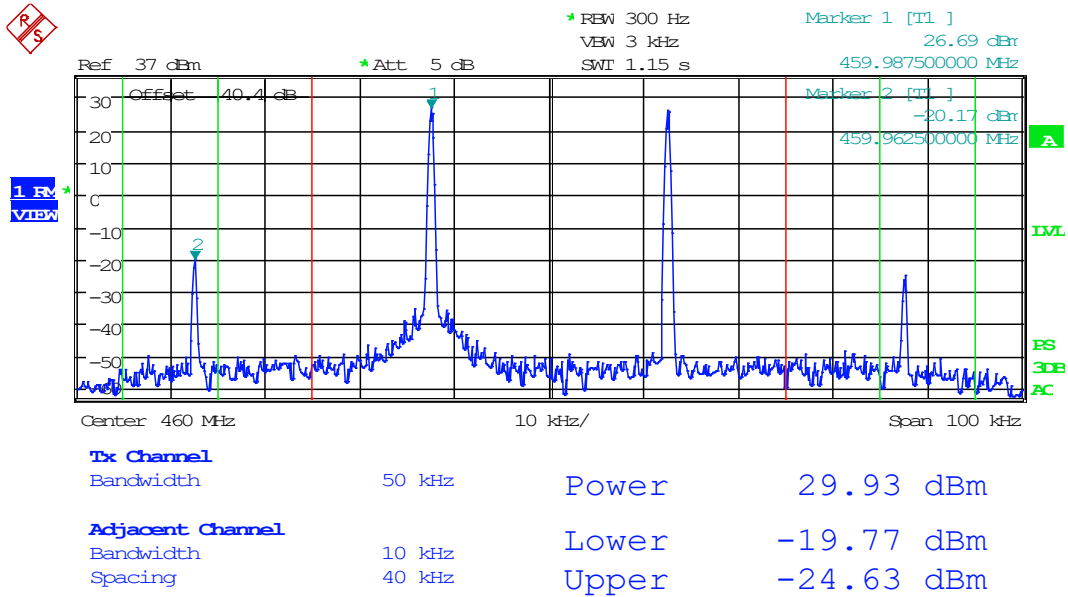

Date: 20.OCT.2020 17:46:20




Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.8 Emission Mask, Out-of-Band

Referenced from test report "TR_3714-20_FCC_PT90_Booster Class B_1.docx".

Limits from FCC Parts 2.1051, 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

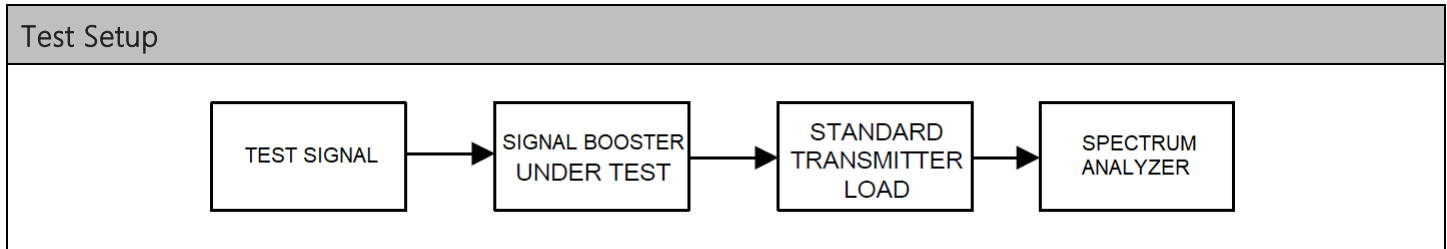


Note: Testing was done simultaneously on all combinations of Uplinks and Downlinks to address co-location of signals.

Note: Testing includes co-location of RF input paths from the addition of a Remote unit.




Conducted Emissions Spectrum Plots

8.8.1 30 MHz to 1 GHz, VHF Uplink & VHF Downlink

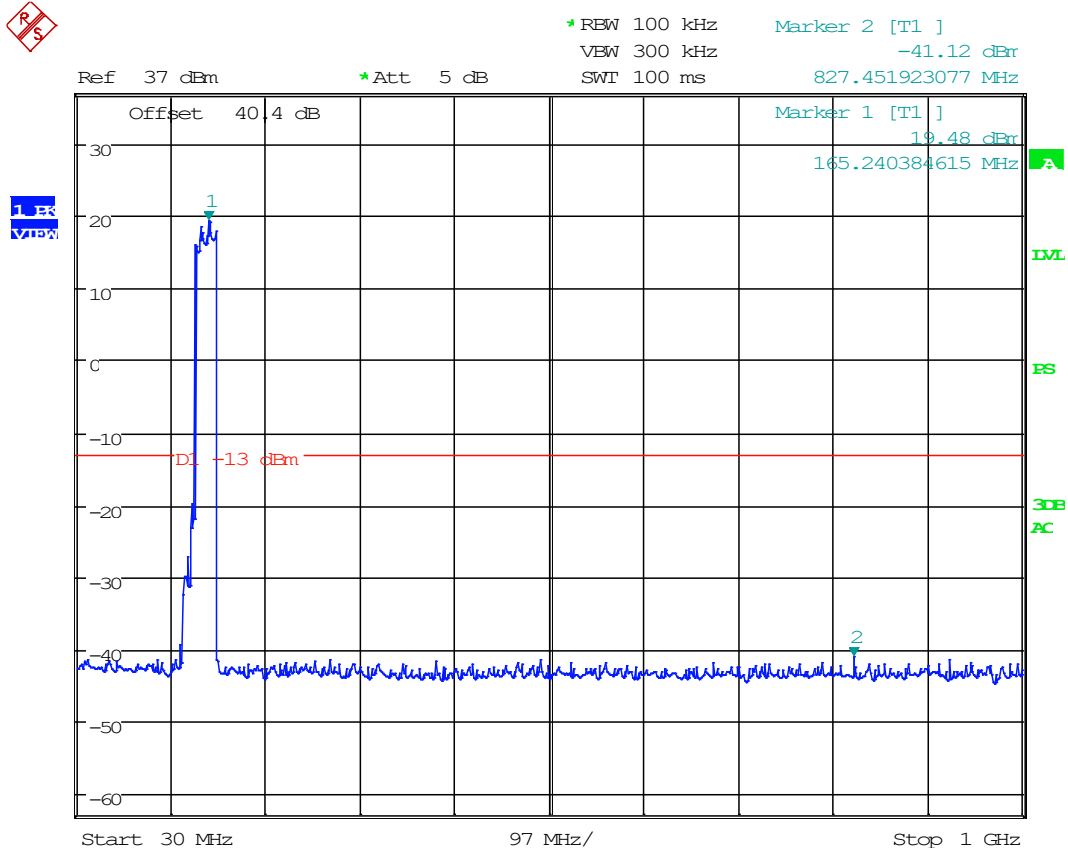


8.8.2 1 GHz to 10th Harmonic, VHF Uplink & VHF Downlink

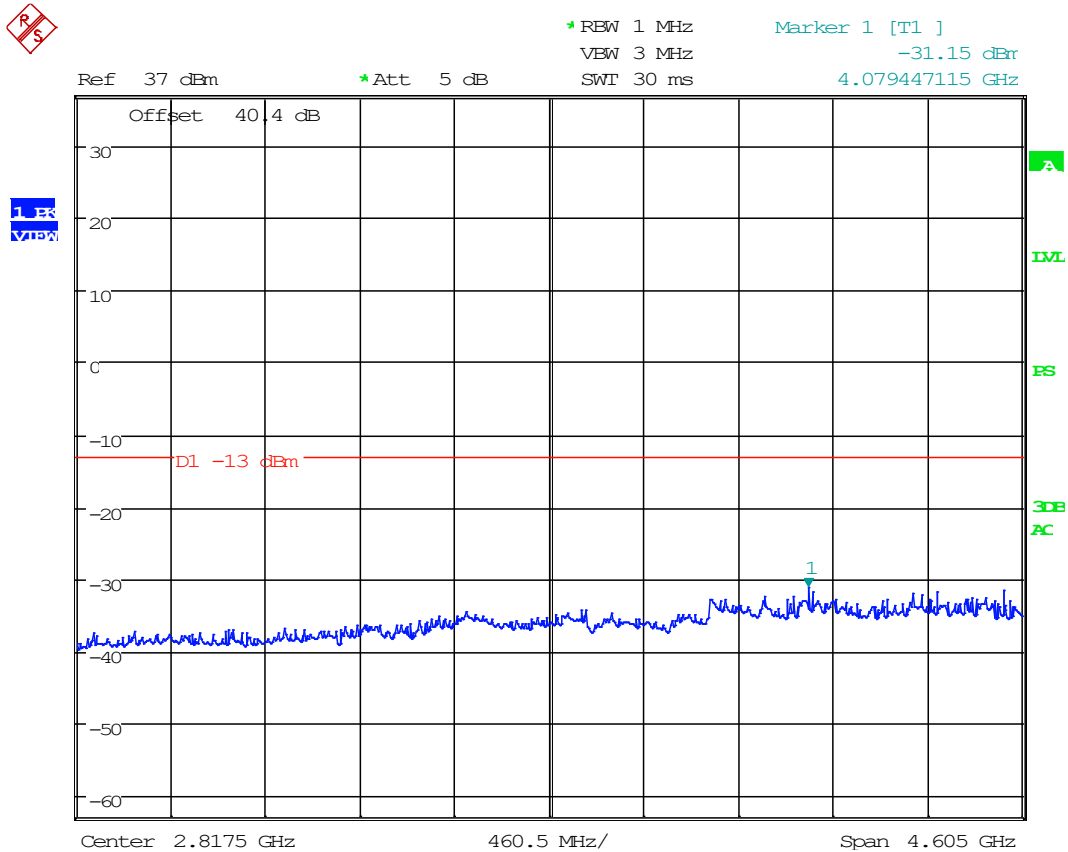

Date: 14.OCT.2020 12:55:45


8.8.3 30 MHz to 1 GHz, VHF Uplink & UHF Uplink

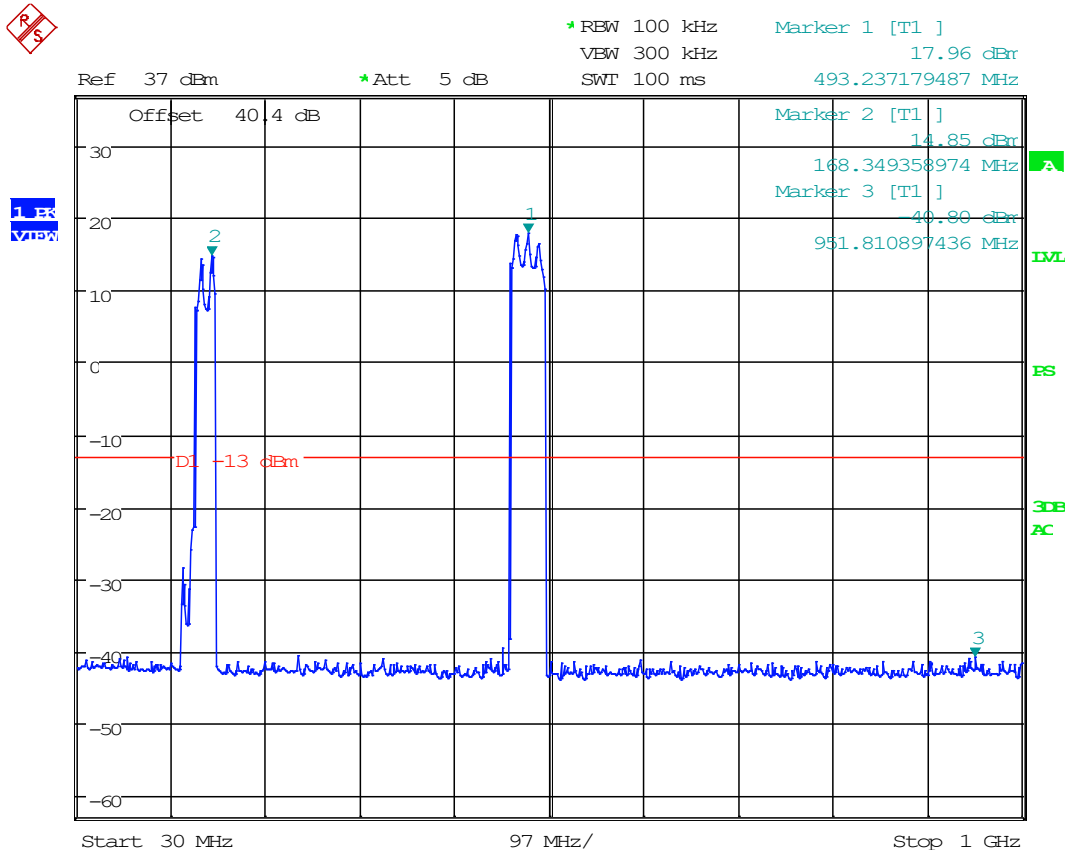

Date: 14.OCT.2020 12:39:33




8.8.4 1 GHz to 10th Harmonic, VHF Uplink & UHF Uplink

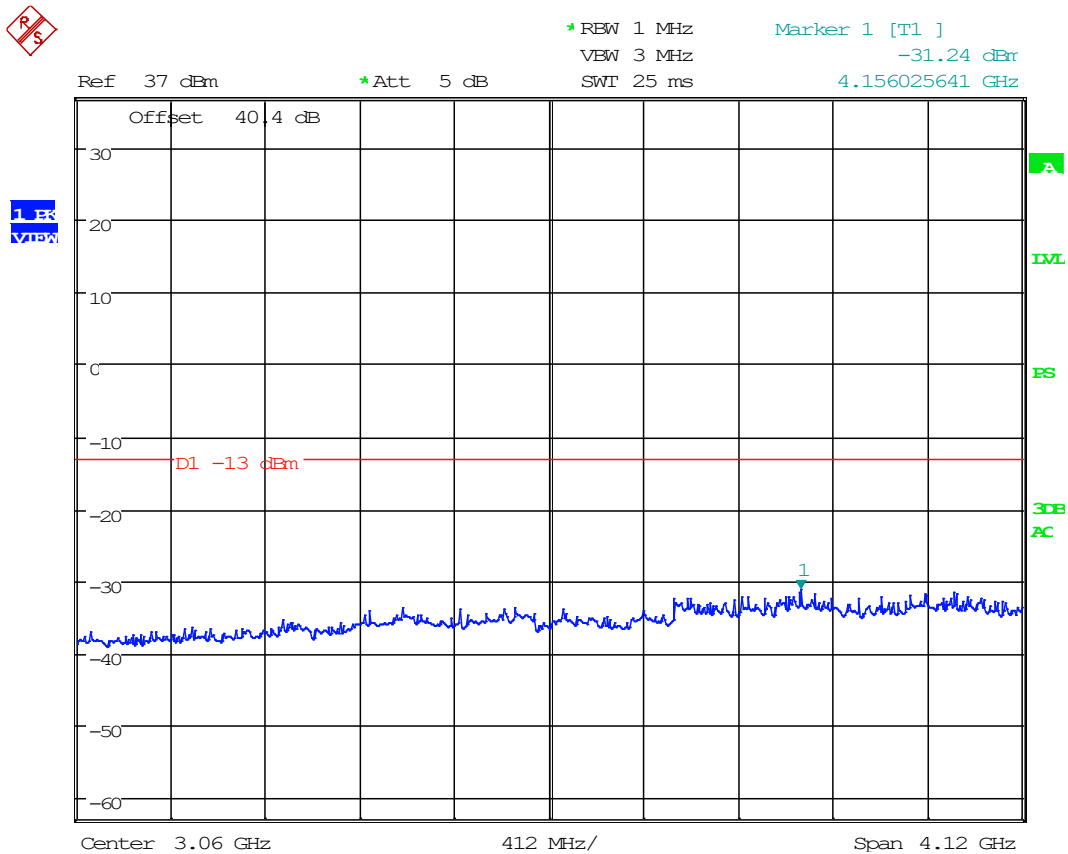


Date: 14.OCT.2020 12:37:58

8.8.1 30 MHz to 1 GHz, Remote VHF Uplink & UHF Uplink

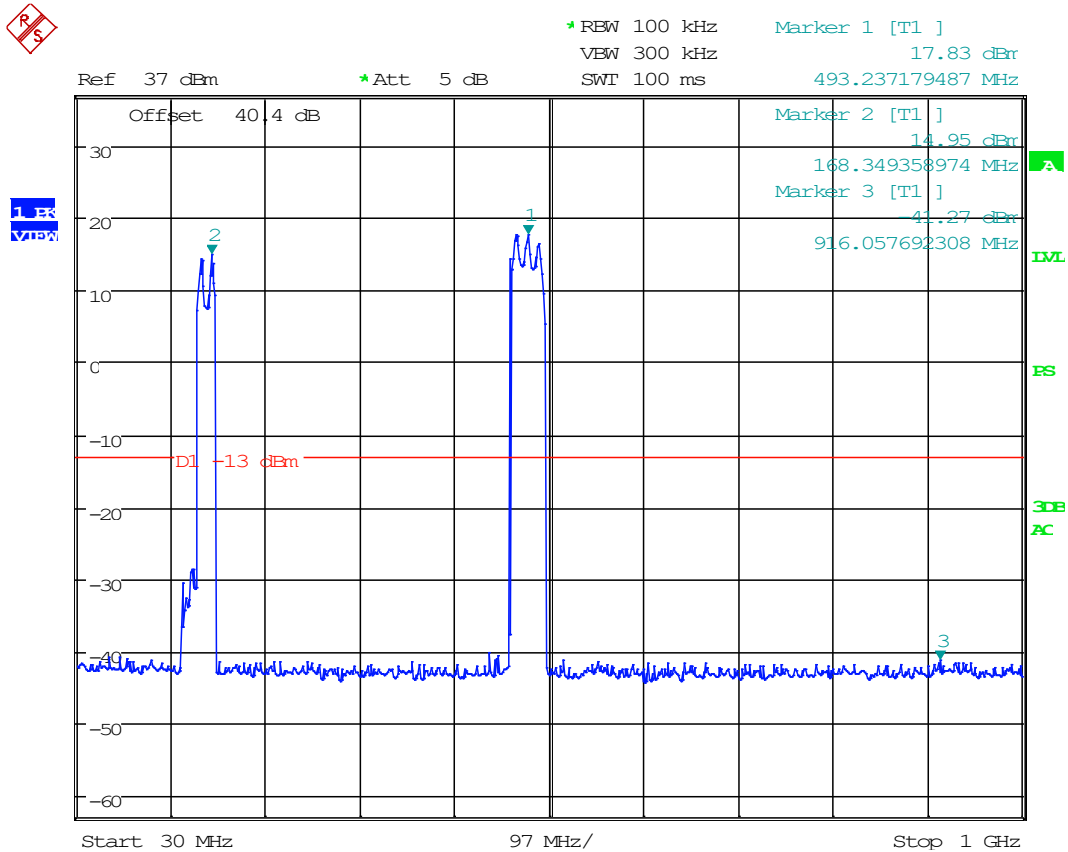


Date: 14.OCT.2020 12:35:10

8.8.2 1 GHz to 10th Harmonic, Remote VHF Uplink & UHF Uplink

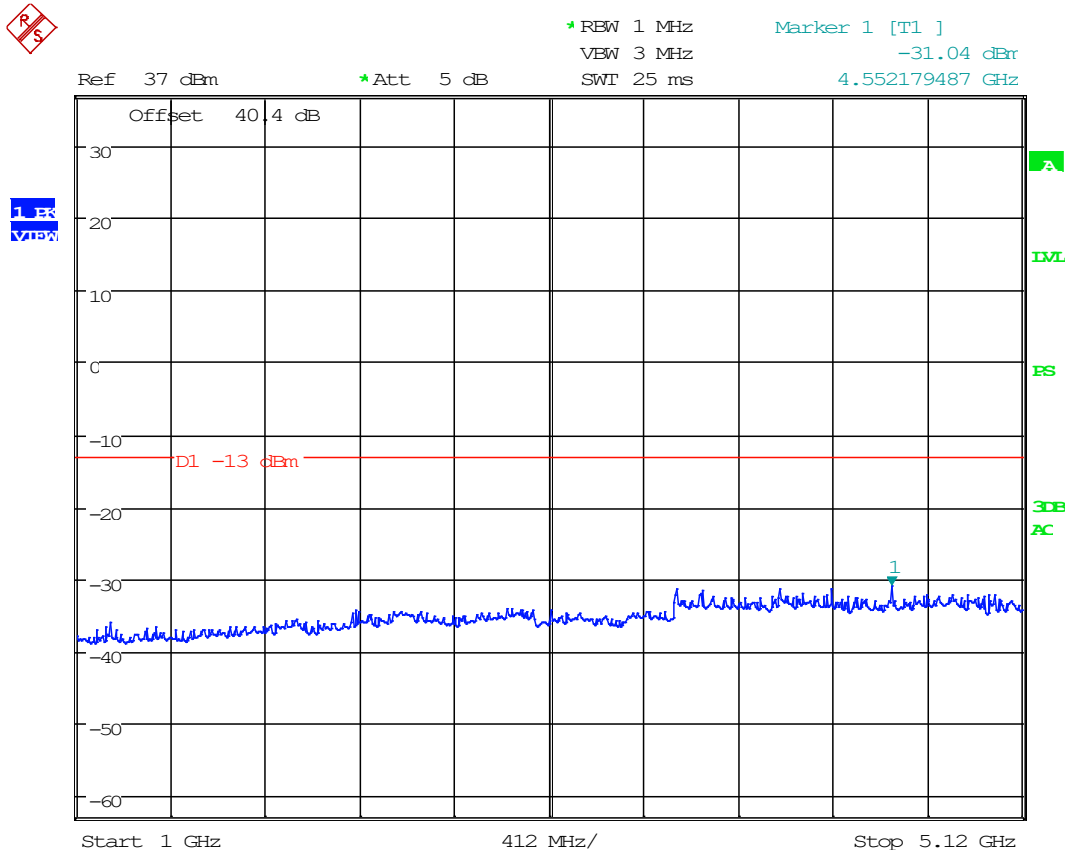


Date: 14.OCT.2020 12:36:24

8.8.3 30 MHz to 1 GHz, VHF Uplink & UHF Downlink

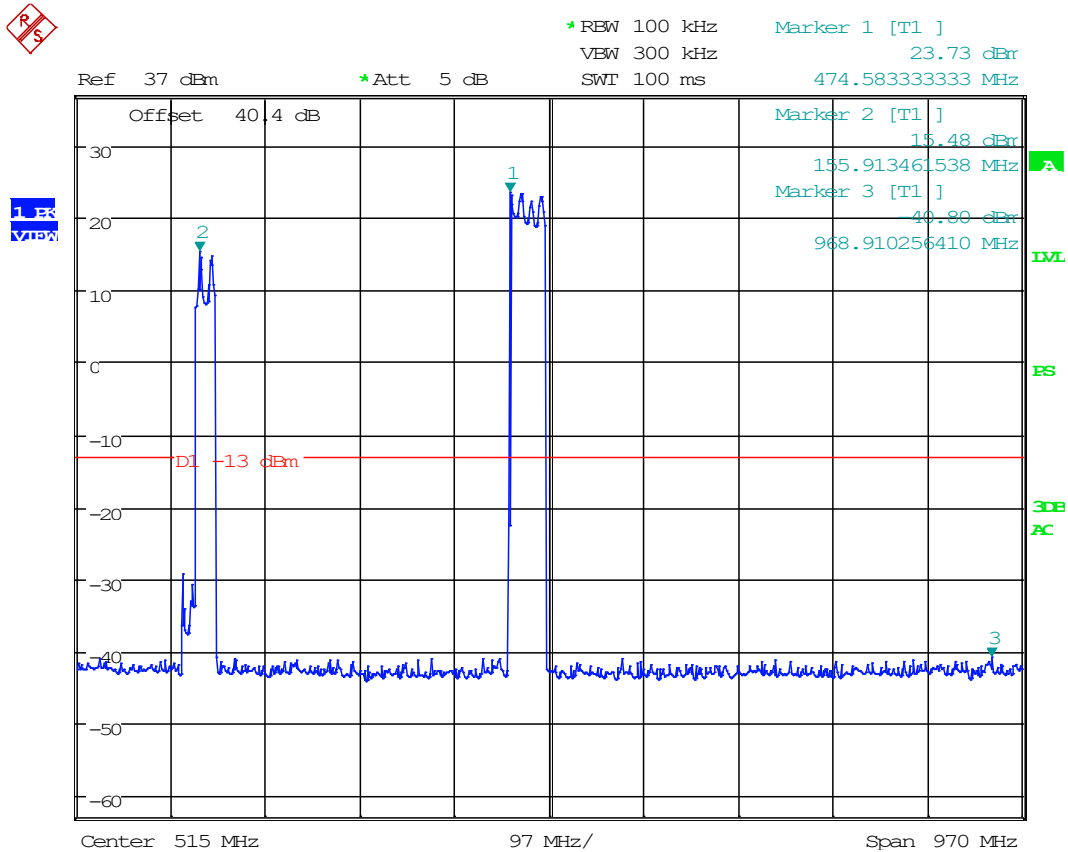


Date: 14.OCT.2020 13:02:19

8.8.4 1 GHz to 10th Harmonic, VHF Uplink & UHF Downlink


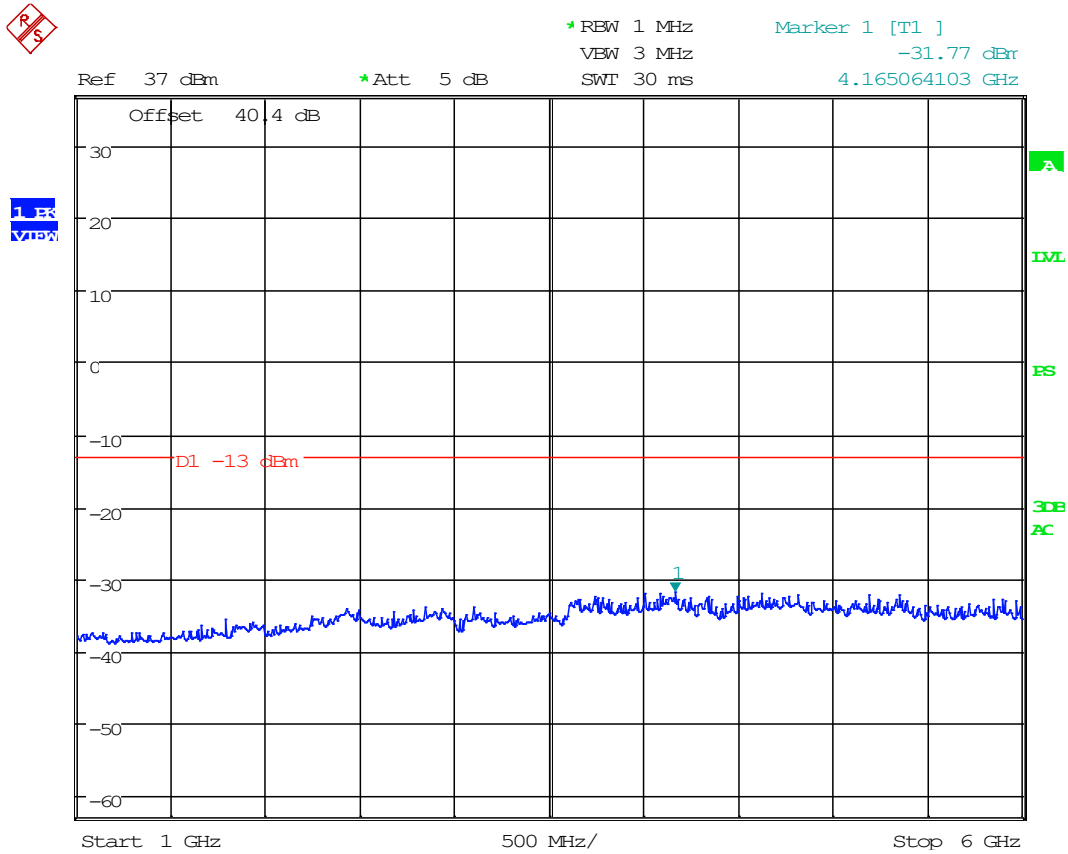


Date: 14.OCT.2020 13:03:20

8.8.5 30 MHz to 1 GHz, VHF Downlink & UHF Downlink

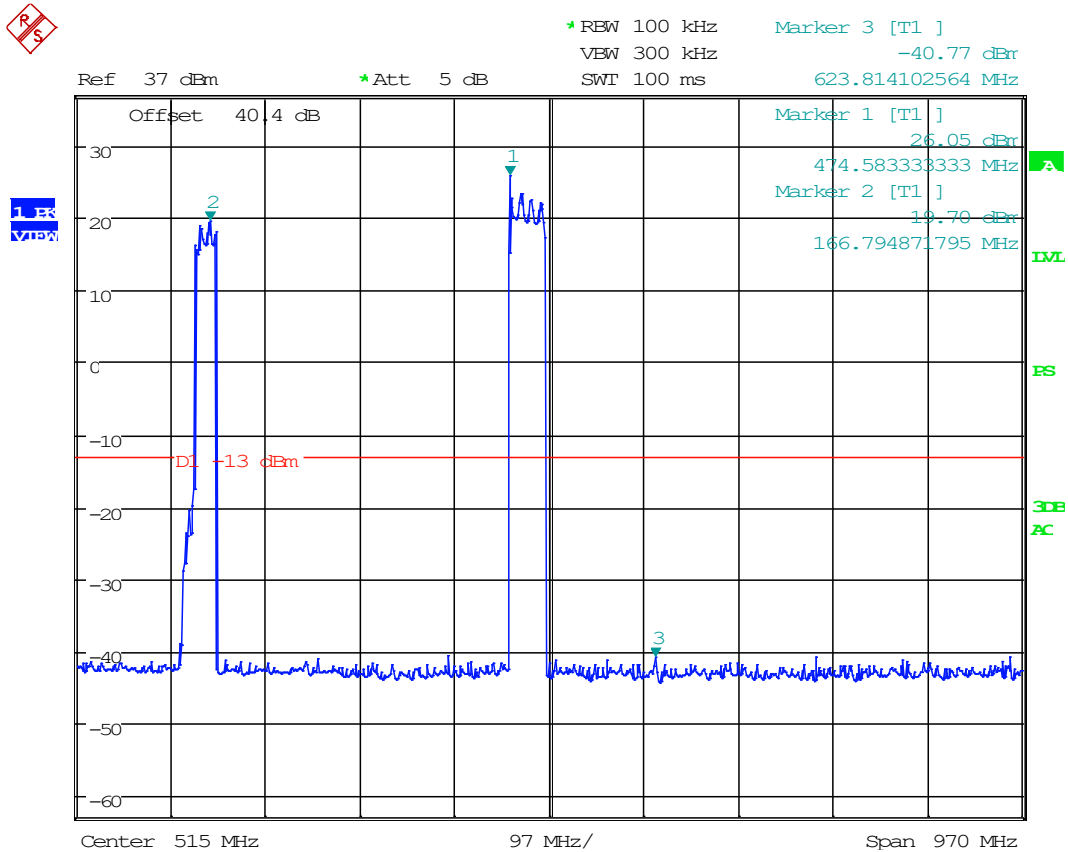


Date: 14.OCT.2020 12:47:42

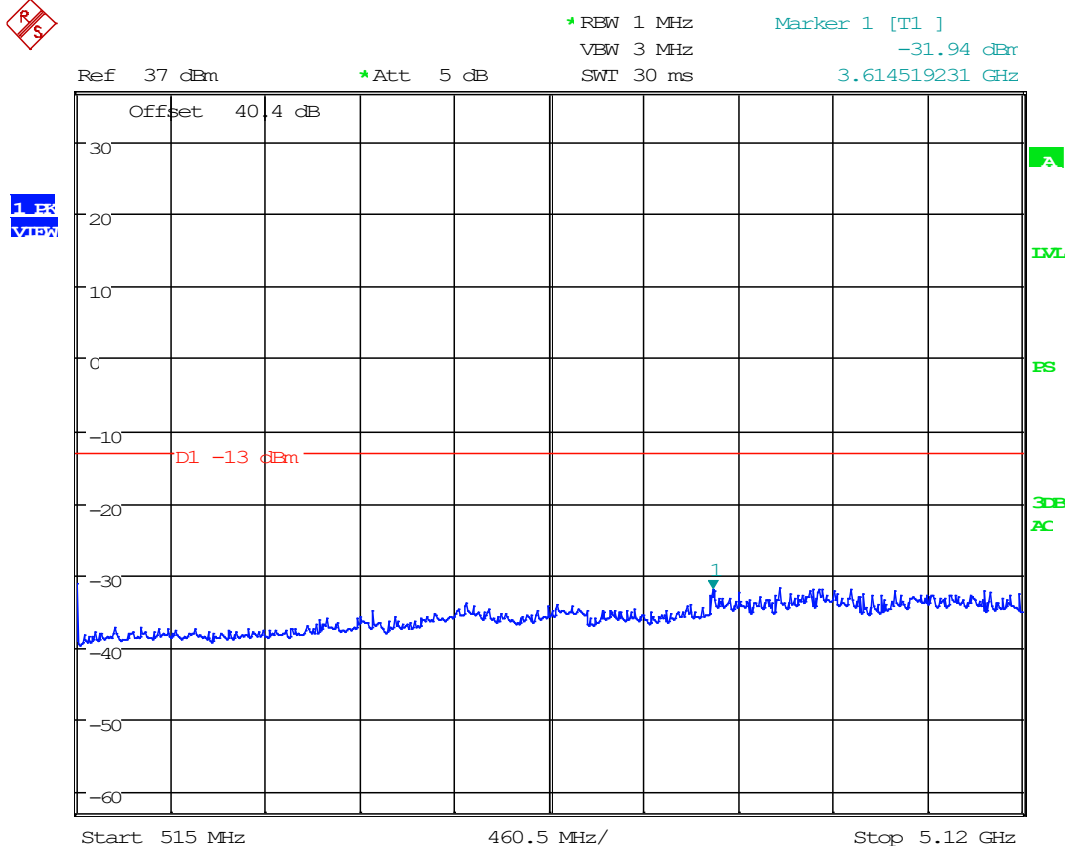

Date: 14.OCT.2020 12:49:07


8.8.7 30 MHz to 1 GHz, VHF Downlink & UHF Uplink

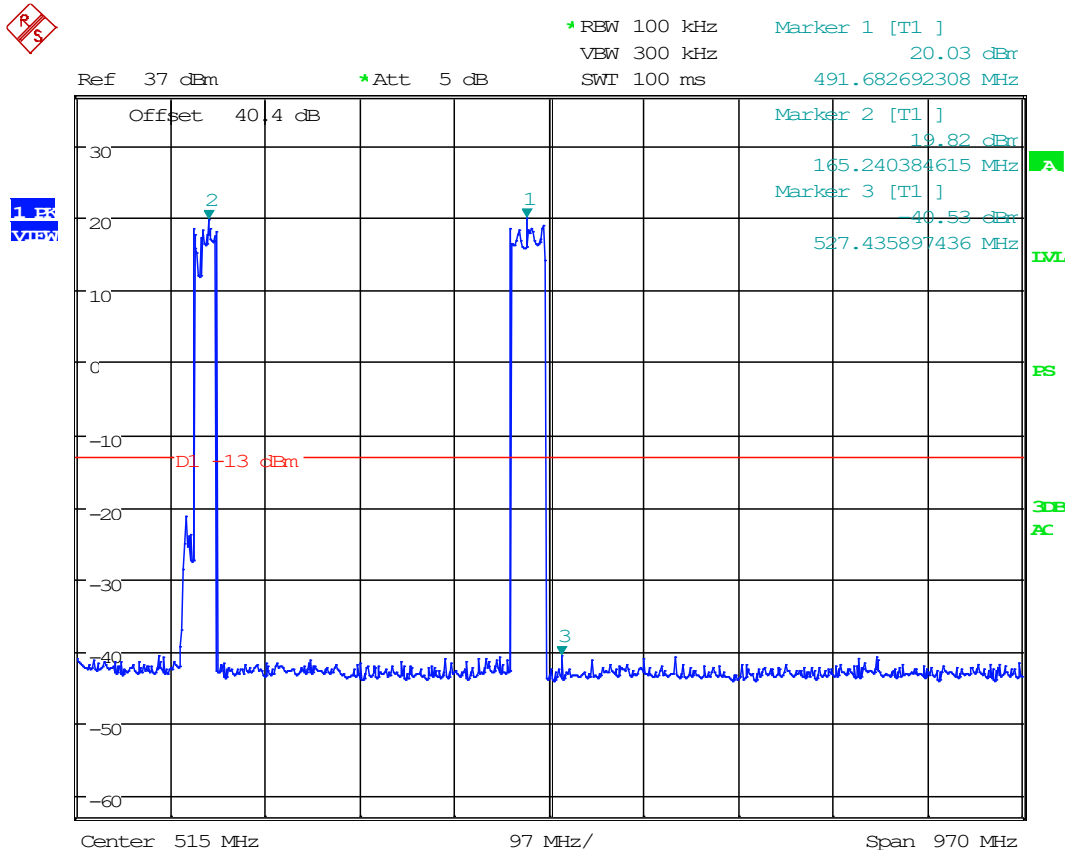

Date: 14.OCT.2020 13:08:12




8.8.8 1 GHz to 10th Harmonic, VHF Downlink & UHF Uplink

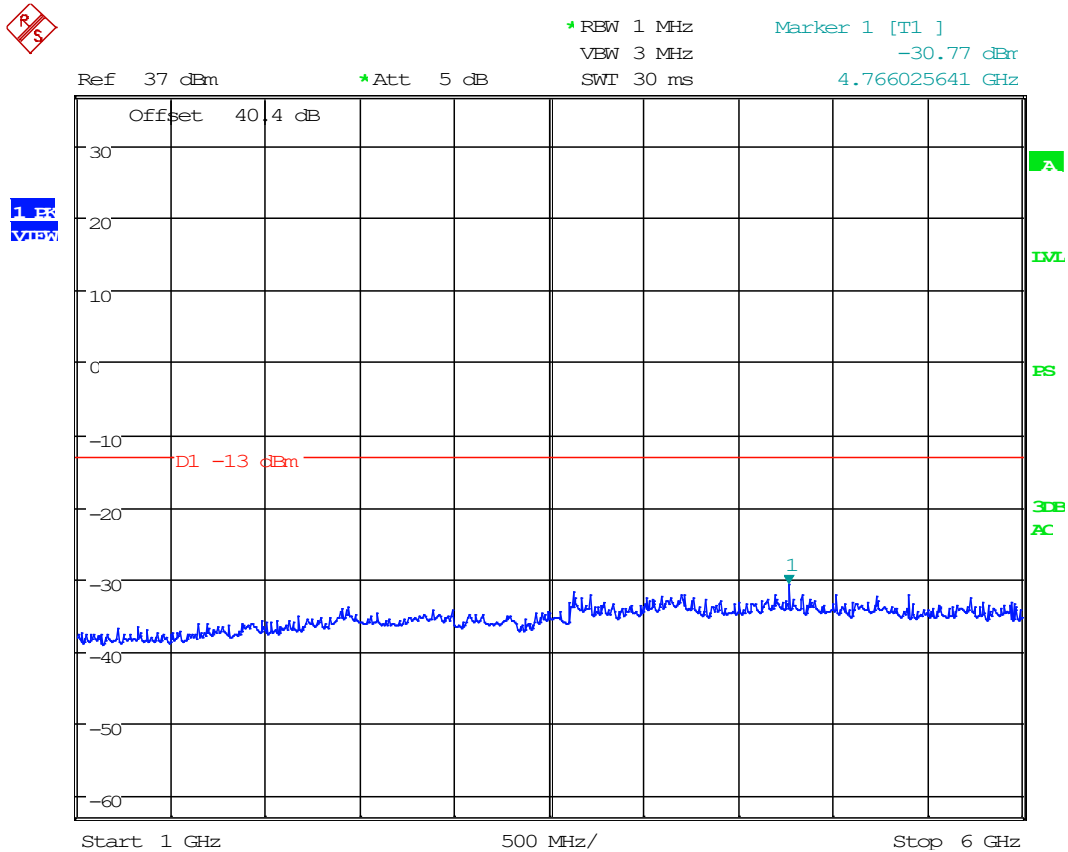

Date: 14.OCT.2020 13:08:46


8.8.9 30 MHz to 1 GHz, UHF Downlink & UHF Uplink

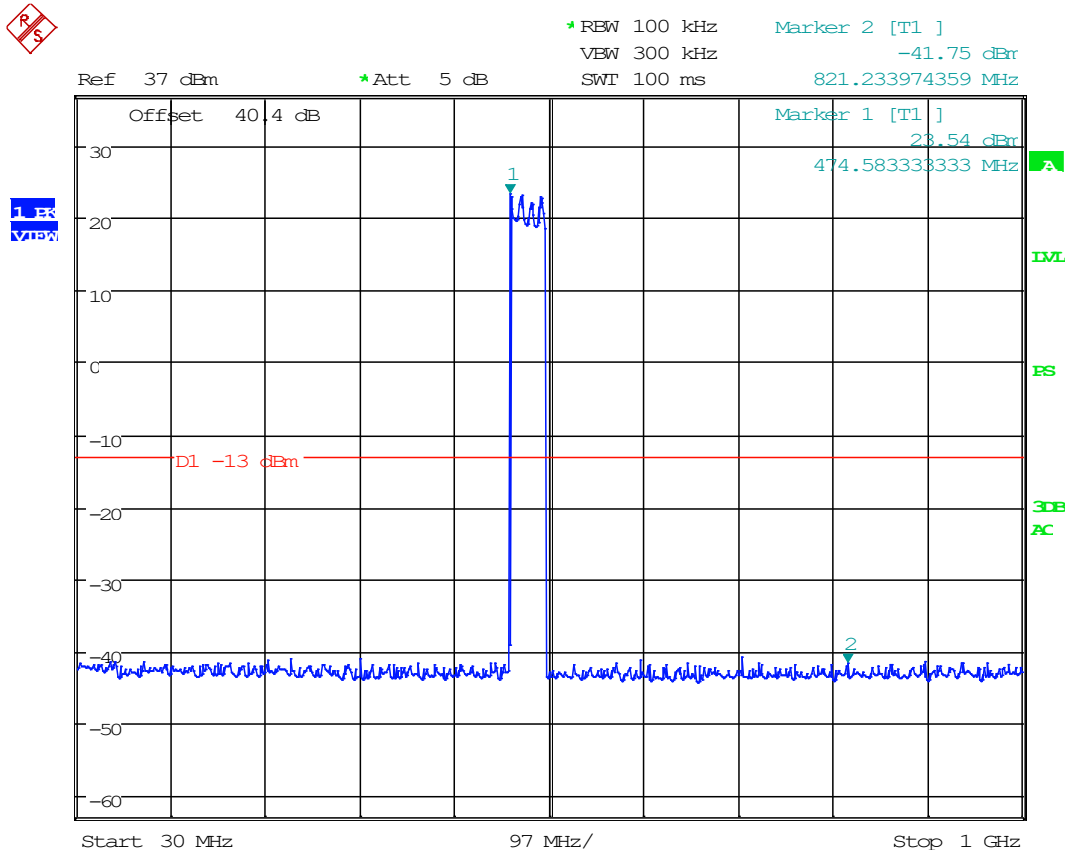

Date: 14.OCT.2020 13:05:15



8.8.10 1 GHz to 10th Harmonic, UHF Downlink & UHF Uplink

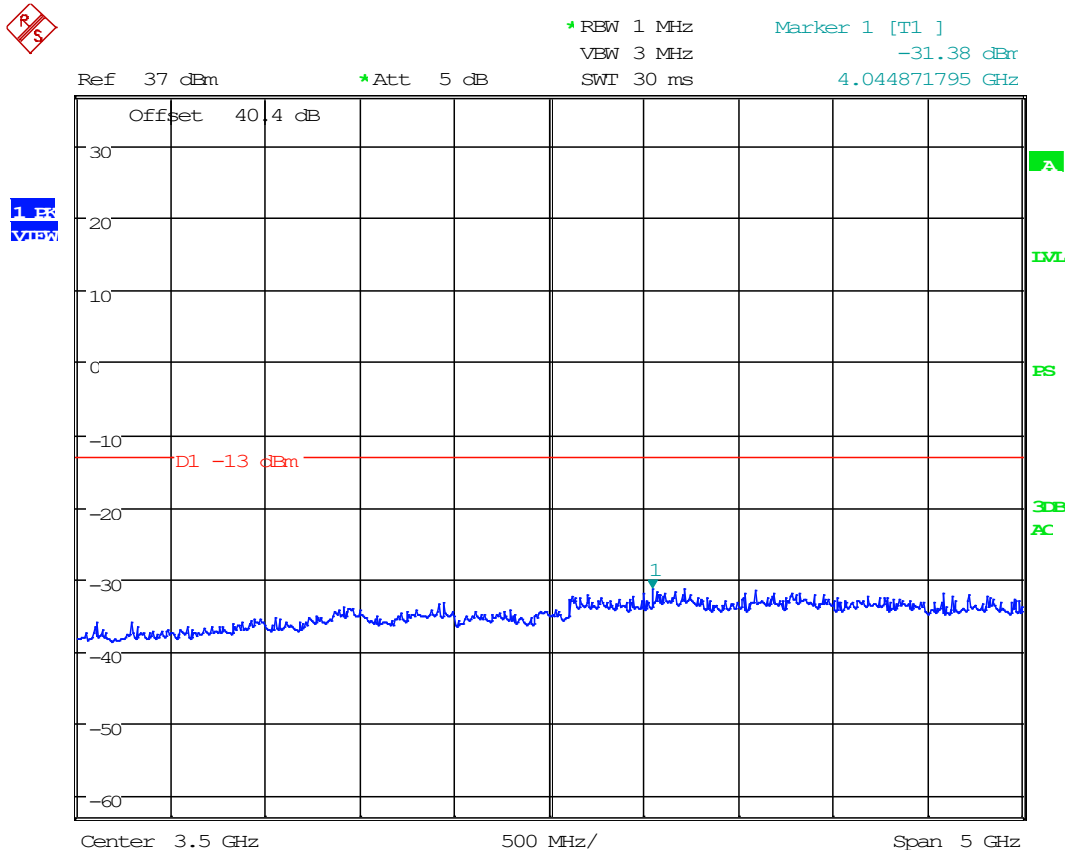


Date: 14.OCT.2020 13:04:32


8.9 Spurious Radiated Emissions

Limits from FCC Parts 2.1053, 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

Radiated Test Setup, 30 – 1000 MHz

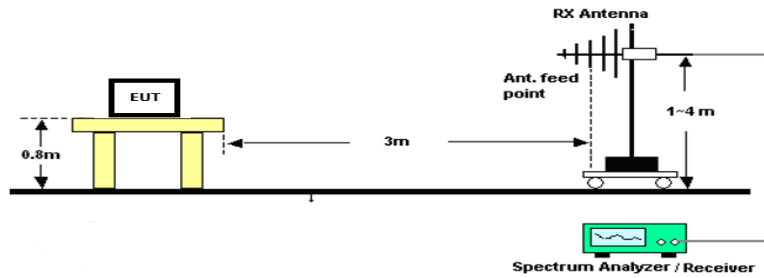

Radiated Test Setup, Above 1000 MHz

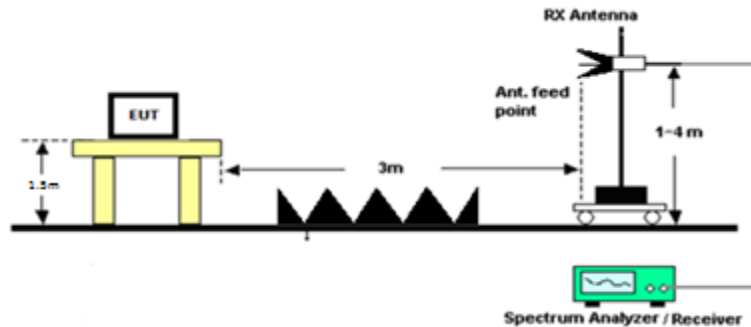



Radiated Emissions, Tabular Data, VHF Band

8.9.1 VHF Uplink (master to master)

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBm)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
162.10	120.98	PK	18.52	V	1.25	10.90	3.00	30.67	-66.71	-13.00	53.71
162.10	178.47	PK	20.48	V	1.55	14.05	3.00	36.09	-61.29	-13.00	48.29
162.10	64.60	PK	15.36	H	0.95	6.28	3.00	22.59	-74.79	-13.00	61.79
162.10	168.12	PK	15.83	H	1.51	15.49	3.00	32.82	-64.55	-13.00	51.55
162.10	324.20	PK	9.06	H	2.09	13.73	3.00	24.88	-72.50	-13.00	59.50
162.10	324.20	PK	11.24	V	2.09	13.73	3.00	27.06	-70.32	-13.00	57.32
162.10	486.30	PK	3.15	H	2.61	16.80	3.00	22.56	-74.82	-13.00	61.82
162.10	486.30	PK	5.63	V	2.61	16.80	3.00	25.04	-72.34	-13.00	59.34
162.10	648.40	PK	3.33	H	2.96	19.70	3.00	25.99	-71.39	-13.00	58.39
162.10	648.40	PK	9.60	V	2.96	19.70	3.00	32.26	-65.12	-13.00	52.12
162.10	810.50	PK	3.20	H	3.38	20.41	3.00	26.99	-70.39	-13.00	57.39
162.10	810.50	PK	2.48	V	3.38	20.41	3.00	26.27	-71.11	-13.00	58.11
162.10	972.60	PK	0.04	H	3.66	22.70	3.00	26.40	-70.98	-13.00	57.98
162.10	972.60	PK	0.07	V	3.66	22.70	3.00	26.43	-70.95	-13.00	57.95
162.10	1134.70	PK	11.11	H	3.90	27.29	3.00	42.29	-55.09	-13.00	42.09
162.10	1134.70	PK	11.52	V	3.90	27.29	3.00	42.70	-54.67	-13.00	41.67
162.10	1296.80	PK	10.03	H	4.17	28.66	3.00	42.86	-54.52	-13.00	41.52
162.10	1296.80	PK	12.43	V	4.17	28.66	3.00	45.26	-52.12	-13.00	39.12
162.10	1458.90	PK	10.93	H	4.38	28.02	3.00	43.33	-54.04	-13.00	41.04
162.10	1458.90	PK	10.12	V	4.38	28.02	3.00	42.53	-54.85	-13.00	41.85
162.10	1621.00	PK	12.26	H	4.69	28.30	3.00	45.25	-52.12	-13.00	39.12
162.10	1621.00	PK	11.19	V	4.69	28.30	3.00	44.18	-53.19	-13.00	40.19

8.9.2 VHF Downlink (master to master & remote)

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBm)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
162.10	178.48	PK	20.52	V	1.55	14.05	3.00	36.13	-61.25	-13.00	48.25
162.10	35.18	PK	28.46	V	0.67	13.32	3.00	42.44	-54.93	-13.00	41.93
162.10	179.29	PK	17.57	H	1.56	13.97	3.00	33.10	-64.28	-13.00	51.28
162.10	120.99	PK	18.75	H	1.25	10.90	3.00	30.90	-66.48	-13.00	53.48
162.10	324.20	PK	21.91	H	2.09	13.73	3.00	37.73	-59.65	-13.00	46.65
162.10	324.20	PK	20.19	V	2.09	13.73	3.00	36.01	-61.37	-13.00	48.37
162.10	486.30	PK	7.19	H	2.61	16.80	3.00	26.60	-70.78	-13.00	57.78
162.10	486.30	PK	11.62	V	2.61	16.80	3.00	31.03	-66.35	-13.00	53.35
162.10	648.40	PK	3.33	H	2.96	19.70	3.00	25.99	-71.39	-13.00	58.39
162.10	648.40	PK	6.89	V	2.96	19.70	3.00	29.55	-67.83	-13.00	54.83
162.10	810.50	PK	5.34	H	3.38	20.41	3.00	29.13	-68.25	-13.00	55.25
162.10	810.50	PK	4.05	V	3.38	20.41	3.00	27.84	-69.54	-13.00	56.54
162.10	972.60	PK	0.28	H	3.66	22.70	3.00	26.64	-70.74	-13.00	57.74
162.10	972.60	PK	0.33	V	3.66	22.70	3.00	26.69	-70.69	-13.00	57.69
162.10	1134.70	PK	11.34	H	3.90	27.29	3.00	42.52	-54.86	-13.00	41.86
162.10	1134.70	PK	11.52	V	3.90	27.29	3.00	42.70	-54.68	-13.00	41.68
162.10	1296.80	PK	10.70	H	4.17	28.66	3.00	43.53	-53.84	-13.00	40.84
162.10	1296.80	PK	12.17	V	4.17	28.66	3.00	45.00	-52.38	-13.00	39.38
162.10	1458.90	PK	9.85	H	4.38	28.02	3.00	42.25	-55.12	-13.00	42.12
162.10	1458.90	PK	10.64	V	4.38	28.02	3.00	43.04	-54.33	-13.00	41.33
162.10	1621.00	PK	12.86	H	4.69	28.30	3.00	45.85	-51.52	-13.00	38.52
162.10	1621.00	PK	10.82	V	4.69	28.30	3.00	43.81	-53.57	-13.00	40.57



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.9.1 VHF Downlink (remote to master)

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBm)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
162.10	179.84	PK	16.38	H	1.56	13.92	3.00	31.86	-65.52	-13.00	52.52
162.10	56.97	PK	14.97	H	0.88	8.71	3.00	24.56	-72.82	-13.00	59.82
162.10	38.17	PK	22.03	V	0.69	13.38	3.00	36.10	-61.28	-13.00	48.28
162.10	178.48	PK	20.75	H	1.55	14.05	3.00	36.36	-61.02	-13.00	48.02
162.10	324.20	PK	11.03	H	2.09	13.73	3.00	26.85	-70.53	-13.00	57.53
162.10	324.20	PK	14.85	V	2.09	13.73	3.00	30.67	-66.71	-13.00	53.71
162.10	486.30	PK	5.06	H	2.61	16.80	3.00	24.47	-72.91	-13.00	59.91
162.10	486.30	PK	9.97	V	2.61	16.80	3.00	29.38	-68.00	-13.00	55.00
162.10	648.40	PK	7.22	H	2.96	19.70	3.00	29.88	-67.50	-13.00	54.50
162.10	648.40	PK	8.39	V	2.96	19.70	3.00	31.05	-66.33	-13.00	53.33
162.10	810.50	PK	3.22	H	3.38	20.41	3.00	27.01	-70.37	-13.00	57.37
162.10	810.50	PK	4.52	V	3.38	20.41	3.00	28.31	-69.07	-13.00	56.07
162.10	972.60	PK	0.59	H	3.66	22.70	3.00	26.95	-70.43	-13.00	57.43
162.10	972.60	PK	0.11	V	3.66	22.70	3.00	26.47	-70.91	-13.00	57.91
162.10	1134.70	PK	10.73	H	3.90	27.29	3.00	41.91	-55.47	-13.00	42.47
162.10	1134.70	PK	12.02	V	3.90	27.29	3.00	43.20	-54.17	-13.00	41.17
162.10	1296.80	PK	10.78	H	4.17	28.66	3.00	43.61	-53.76	-13.00	40.76
162.10	1296.80	PK	12.72	V	4.17	28.66	3.00	45.55	-51.83	-13.00	38.83
162.10	1458.90	PK	10.10	H	4.38	28.02	3.00	42.51	-54.87	-13.00	41.87
162.10	1458.90	PK	9.90	V	4.38	28.02	3.00	42.31	-55.07	-13.00	42.07
162.10	1621.00	PK	12.60	H	4.69	28.30	3.00	45.59	-51.78	-13.00	38.78
162.10	1621.00	PK	11.24	V	4.69	28.30	3.00	44.23	-53.15	-13.00	40.15



Radiated Emissions, Tabular Data, UHF Band

8.9.2 UHF Uplink (master to master)

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBm)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
474.00	179.02	PK	21.11	V	1.56	14.00	3.00	36.66	-60.71	-13.00	47.71
474.00	50.16	PK	23.82	V	0.82	11.15	3.00	35.79	-61.58	-13.00	48.58
474.00	179.02	PK	15.33	H	1.56	14.00	3.00	30.88	-66.49	-13.00	53.49
474.00	57.24	PK	13.96	H	0.89	8.60	3.00	23.45	-73.93	-13.00	60.93
474.00	948.00	PK	11.80	H	3.61	22.72	3.00	38.13	-59.25	-13.00	46.25
474.00	948.00	PK	10.71	V	3.61	22.72	3.00	37.04	-60.34	-13.00	47.34
474.00	1422.00	PK	10.60	H	4.32	28.30	3.00	43.21	-54.16	-13.00	41.16
474.00	1422.00	PK	11.21	V	4.32	28.30	3.00	43.82	-53.55	-13.00	40.55
474.00	1896.00	PK	11.80	H	5.05	30.98	3.00	47.83	-49.55	-13.00	36.55
474.00	1896.00	PK	12.32	V	5.05	30.98	3.00	48.35	-49.03	-13.00	36.03
474.00	2370.00	PK	12.26	H	5.61	31.91	3.00	49.78	-47.60	-13.00	34.60
474.00	2370.00	PK	12.99	V	5.61	31.91	3.00	50.51	-46.87	-13.00	33.87
474.00	2844.00	PK	11.92	H	6.20	32.34	3.00	50.46	-46.91	-13.00	33.91
474.00	2844.00	PK	12.34	V	6.20	32.34	3.00	50.88	-46.49	-13.00	33.49
474.00	3318.00	PK	12.30	H	6.72	32.63	3.00	51.65	-45.73	-13.00	32.73
474.00	3318.00	PK	12.04	V	6.72	32.63	3.00	51.39	-45.99	-13.00	32.99
474.00	3792.00	PK	10.64	H	6.40	33.14	3.00	50.18	-47.20	-13.00	34.20
474.00	3792.00	PK	10.20	V	6.40	33.14	3.00	49.74	-47.64	-13.00	34.64
474.00	4266.00	PK	10.46	H	7.28	33.38	3.00	51.12	-46.26	-13.00	33.26
474.00	4266.00	PK	10.36	V	7.28	33.38	3.00	51.02	-46.36	-13.00	33.36
474.00	4740.00	PK	10.66	H	6.99	33.90	3.00	51.55	-45.83	-13.00	32.83
474.00	4740.00	PK	13.81	V	6.99	33.90	3.00	54.70	-42.68	-13.00	29.68

8.9.3 UHF Downlink (master to master & remote)

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBm)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
474.00	50.16	PK	22.37	V	0.82	11.15	3.00	34.34	-63.03	-13.00	50.03
474.00	64.05	PK	21.87	V	0.94	6.39	3.00	29.20	-68.17	-13.00	55.17
474.00	179.02	PK	18.58	H	1.56	14.00	3.00	34.13	-63.24	-13.00	50.24
474.00	171.39	PK	15.69	H	1.53	15.06	3.00	32.28	-65.10	-13.00	52.10
474.00	948.00	PK	12.77	H	3.61	22.72	3.00	39.10	-58.28	-13.00	45.28
474.00	948.00	PK	10.70	V	3.61	22.72	3.00	37.03	-60.35	-13.00	47.35
474.00	1422.00	PK	11.96	H	4.32	28.30	3.00	44.57	-52.80	-13.00	39.80
474.00	1422.00	PK	12.63	V	4.32	28.30	3.00	45.24	-52.13	-13.00	39.13
474.00	1896.00	PK	11.20	H	5.05	30.98	3.00	47.23	-50.15	-13.00	37.15
474.00	1896.00	PK	12.32	V	5.05	30.98	3.00	48.35	-49.03	-13.00	36.03
474.00	2370.00	PK	13.34	H	5.61	31.91	3.00	50.86	-46.52	-13.00	33.52
474.00	2370.00	PK	11.48	V	5.61	31.91	3.00	49.00	-48.38	-13.00	35.38
474.00	2844.00	PK	11.75	H	6.20	32.34	3.00	50.29	-47.08	-13.00	34.08
474.00	2844.00	PK	12.08	V	6.20	32.34	3.00	50.62	-46.75	-13.00	33.75
474.00	3318.00	PK	11.42	H	6.72	32.63	3.00	50.77	-46.61	-13.00	33.61
474.00	3318.00	PK	12.37	V	6.72	32.63	3.00	51.72	-45.66	-13.00	32.66
474.00	3792.00	PK	10.45	H	6.40	33.14	3.00	49.99	-47.39	-13.00	34.39
474.00	3792.00	PK	10.16	V	6.40	33.14	3.00	49.70	-47.68	-13.00	34.68
474.00	4266.00	PK	10.25	H	7.28	33.38	3.00	50.91	-46.47	-13.00	33.47
474.00	4266.00	PK	10.47	V	7.28	33.38	3.00	51.13	-46.25	-13.00	33.25
474.00	4740.00	PK	11.47	H	6.99	33.90	3.00	52.36	-45.02	-13.00	32.02
474.00	4740.00	PK	11.65	V	6.99	33.90	3.00	52.54	-44.84	-13.00	31.84



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.9.1 UHF Downlink (remote to master)


Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBm)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
474.00	179.52	PK	18.90	V	1.56	13.95	3.00	34.41	-62.97	-13.00	49.97
474.00	178.82	PK	17.54	H	1.56	14.02	3.00	33.11	-64.26	-13.00	51.26
474.00	65.54	PK	14.11	V	0.95	6.15	3.00	21.21	-76.17	-13.00	63.17
474.00	49.81	PK	23.49	H	0.82	11.26	3.00	35.56	-61.81	-13.00	48.81
474.00	948.00	PK	11.08	H	3.61	22.72	3.00	37.41	-59.97	-13.00	46.97
474.00	948.00	PK	11.30	V	3.61	22.72	3.00	37.63	-59.75	-13.00	46.75
474.00	1422.00	PK	13.30	H	4.32	28.30	3.00	45.91	-51.46	-13.00	38.46
474.00	1422.00	PK	12.38	V	4.32	28.30	3.00	44.99	-52.38	-13.00	39.38
474.00	1896.00	PK	11.24	H	5.05	30.98	3.00	47.27	-50.11	-13.00	37.11
474.00	1896.00	PK	11.14	V	5.05	30.98	3.00	47.17	-50.21	-13.00	37.21
474.00	2370.00	PK	12.29	H	5.61	31.91	3.00	49.81	-47.57	-13.00	34.57
474.00	2370.00	PK	12.24	V	5.61	31.91	3.00	49.76	-47.62	-13.00	34.62
474.00	2844.00	PK	13.59	H	6.20	32.34	3.00	52.13	-45.24	-13.00	32.24
474.00	2844.00	PK	11.15	V	6.20	32.34	3.00	49.69	-47.68	-13.00	34.68
474.00	3318.00	PK	12.83	H	6.72	32.63	3.00	52.18	-45.20	-13.00	32.20
474.00	3318.00	PK	12.92	V	6.72	32.63	3.00	52.27	-45.11	-13.00	32.11
474.00	3792.00	PK	10.52	H	6.40	33.14	3.00	50.06	-47.32	-13.00	34.32
474.00	3792.00	PK	10.19	V	6.40	33.14	3.00	49.73	-47.65	-13.00	34.65
474.00	4266.00	PK	10.78	H	7.28	33.38	3.00	51.44	-45.94	-13.00	32.94
474.00	4266.00	PK	10.16	V	7.28	33.38	3.00	50.82	-46.56	-13.00	33.56
474.00	4740.00	PK	10.50	H	6.99	33.90	3.00	51.39	-45.99	-13.00	32.99
474.00	4740.00	PK	11.09	V	6.99	33.90	3.00	51.98	-45.40	-13.00	32.40



8.10 Modulation Characteristics

Referenced from test report "TR_3714-20_FCC_PT90_Booster Class B_1.docx".

Limits from FCC Parts 2.1047, and test procedure from ANSI C63.26-2015.

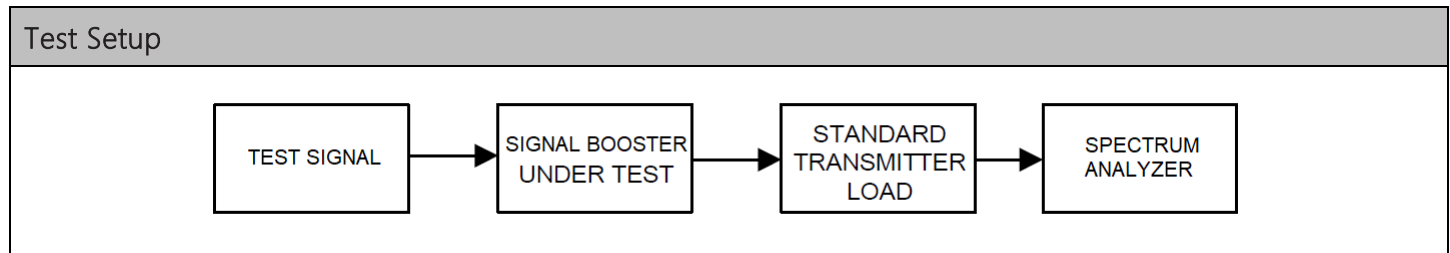


N/A. The EUT does not have any means to modulate the incoming signal.

8.11 Frequency Stability

Referenced from test report "TR_3714-20_FCC_PT90_Booster Class B_1.docx".

Limits from FCC Parts 2.1055, 90.213 (a); and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

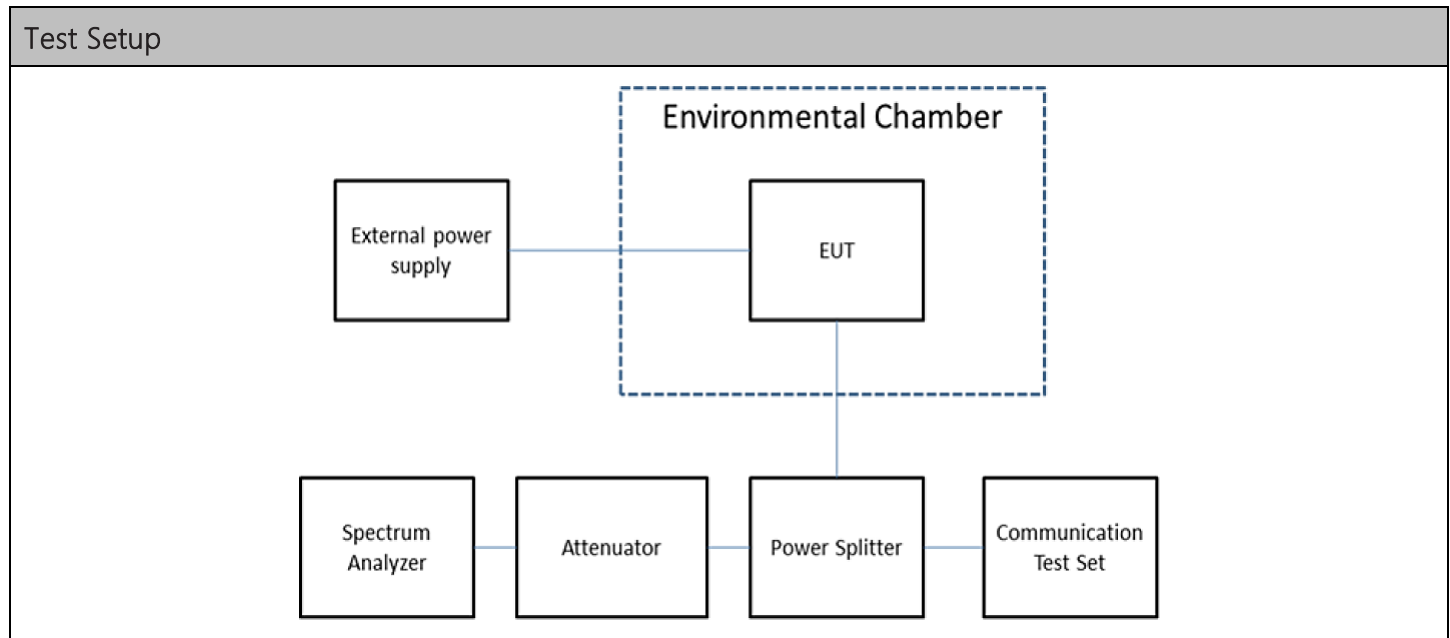

Test Results, Mode 1		
Tuned Frequency (MHz)	Max Deviation (ppm)	Limit (ppm)
n/a	n/a	n/a

N/A. The EUT does not alter the input signal in any way.



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.12 Transient Frequency Behavior

Referenced from test report "TR_3714-20_FCC_PT90_Booster Class B_1.docx".

Limits from FCC Part 90.214; and test procedure from ANSI C63.26-2015.

N/A. The EUT does not "key-on" or "key off", and instead transmits indefinitely.



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.13 Adjacent channel power limits

Referenced from test report "TR_3714-20_FCC_PT90_Booster Class B_1.docx".

Limits from FCC Part 90.221, and test procedure from ANSI C63.26-2015.

N/A. Device does not operate in a band requiring ACP measurement.



9. ANNEX-A - Photographs of the EUT

Photographs of the EUT and any manufacturer supplied accessories to be used with the EUT are in separate supplementary documents labelled EXTERNAL PHOTOS and INTERNAL PHOTOS.

10. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate supplementary ANNEX-B document.

11. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_3718-20_FCC_PT90_Booster Class A_1	1	Initial release	October 30, 2020
TR_3718-20_FCC_PT90_Booster Class A_2	2	Added passive equipment to equipment list	November 12, 2020



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

END OF TEST REPORT
