



Test Report - FCC PART 90 Booster Class B (B9B)

Applicant: Fiplex Communications Inc.

Approved for Release By:

Signature: Bruno Clavier

Name & Title: Bruno Clavier, General Manager

Date of Signature 3/7/2023

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.



Table of Contents

1. CUSTOMER INFORMATION.....	6
1.1 TEST RESULT SUMMARY	6
2. LOCATION OF TESTING	8
2.1 TEST LABORATORY.....	8
2.2 TESTING WAS PERFORMED, REVIEWED BY	8
3. TEST SAMPLE(S) (EUT/DUT).....	9
3.1 DEFINITIONS	9
3.2 DESCRIPTION OF THE EUT	10
3.3 CONFIGURATION OF EUT	11
3.4 TEST SETUP OF EUT	11
4. TEST METHODS & APPLICABLE REGULATORY LIMITS.....	12
4.1 TEST METHODS/STANDARDS/GUIDANCE:.....	12
4.2 APPLIED LIMITS AND REGULATORY LIMITS:.....	12
5. MEASUREMENT UNCERTAINTY.....	12
6. ENVIRONMENTAL CONDITIONS	12
6.1 TEMPERATURE & HUMIDITY	12
7. LIST OF TEST EQUIPMENT AND TEST FACILITY.....	13
7.1 LIST OF TEST EQUIPMENT	13
8. TEST RESULTS	14
8.1 POWER AT THE FINAL AMPLIFIER.....	15
8.2 RF OUTPUT POWER & GAIN.....	16
8.3 OUT-OF-BAND REJECTION.....	18
8.3.1 700 Band, Uplink.....	19
8.3.2 800 Band, Downlink	20
8.4 BANDWIDTH & EMISSION	21
8.5 INPUT VS OUTPUT SIGNAL COMPARISON	22
8.5.1 6.25 kHz FM, Input Signal	25
8.5.2 12.5 kHz FM, Input Signal.....	26
8.5.3 25 kHz FM, Input Signal.....	27
8.5.4 C4FM, Input Signal.....	28
8.5.5 H-CPM, Input Signal.....	29
8.5.6 H-DQPSK, Input Signal.....	30
8.5.7 6.25 kHz, FM, DL Mask C, AGC, 758.0125 MHz.....	31
8.5.8 6.25 kHz, FM, DL Mask C, AGC +3, 758.0125 MHz	32
8.5.9 12.5 kHz, FM, DL Mask C, AGC, 758.0125 MHz.....	33
8.5.10 12.5 kHz, FM, DL Mask C, AGC+3, 758.0125 MHz.....	34
8.5.11 25 kHz FM, DL Mask C, AGC, 758.0125 MHz.....	35
8.5.12 25 kHz FM, DL Mask C, AGC+3, 758.0125 MHz.....	36



8.5.13	C4FM, DL Mask C, AGC, 758.0125 MHz	37
8.5.14	C4FM, DL Mask C, AGC+3, 758.0125 MHz	38
8.5.15	H-CPM, DL Mask C, AGC, 758.0125 MHz	39
8.5.16	H-CPM, DL Mask C, AGC+3, 758.0125 MHz	40
8.5.17	H-DQPSK, DL Mask C, AGC, 758.0125 MHz	41
8.5.18	H-DQPSK, DL Mask C, AGC+3, 758.0125 MHz	42
8.5.19	6.25 kHz, FM, DL Mask C, AGC, 766 MHz	43
8.5.20	6.25 kHz, FM, DL Mask C, AGC+3, 766 MHz	44
8.5.21	12.5 kHz, FM, DL Mask C, AGC, 766 MHz	45
8.5.22	12.5 kHz, FM, DL Mask C, AGC+3, 766 MHz	46
8.5.23	25 kHz FM, DL Mask C, AGC, 766 MHz	47
8.5.24	25 kHz FM, DL Mask C, AGC+3, 766 MHz	48
8.5.25	C4FM, DL Mask C, AGC, 766 MHz	49
8.5.26	C4FM, DL Mask C, AGC+3, 766 MHz	50
8.5.27	H-CPM, DL Mask C, AGC, 766 MHz	51
8.5.28	H-CPM, DL Mask C, AGC+3, 766 MHz	52
8.5.29	H-DQPSK, DL Mask C, AGC, 766 MHz	53
8.5.30	H-DQPSK, DL Mask C, AGC+3, 766 MHz	54
8.5.31	6.25 kHz, FM, DL Mask C, AGC, 774.9875 MHz	55
8.5.32	6.25 kHz, FM, DL Mask C, AGC+3, 774.9875 MHz	56
8.5.33	12.5 kHz, FM, DL Mask C, AGC, 774.9875 MHz	57
8.5.34	12.5 kHz, FM, DL Mask C, AGC+3, 774.9875 MHz	58
8.5.35	25 kHz FM, DL Mask C, AGC, 774.9875 MHz	59
8.5.36	25 kHz FM, DL Mask C, AGC+3, 774.9875 MHz	60
8.5.37	C4FM, DL Mask C, AGC, 774.9875 MHz	61
8.5.38	C4FM, DL Mask C, AGC+3, 774.9875 MHz	62
8.5.39	H-CPM, DL Mask C, AGC, 774.9875 MHz	63
8.5.40	H-CPM, DL Mask C, AGC+3, 774.9875 MHz	64
8.5.41	H-DQPSK, DL Mask C, AGC, 774.9875 MHz	65
8.5.42	H-DQPSK, DL Mask C, AGC+3, 774.9875 MHz	66
8.5.43	6.25 kHz, FM, DL Mask H, AGC, 851.0125 MHz	67
8.5.44	6.25 kHz, FM, DL Mask H, AGC+3, 851.0125 MHz	68
8.5.45	12.5 kHz, FM, DL Mask H, AGC, 851.0125 MHz	69
8.5.46	12.5 kHz, FM, DL Mask H, AGC+3, 851.0125 MHz	70
8.5.47	25 kHz FM, DL Mask H, AGC, 851.0125 MHz	71
8.5.48	25 kHz FM, DL Mask H, AGC+3, 851.0125 MHz	72
8.5.49	C4FM, DL Mask H, AGC, 851.0125 MHz	73
8.5.50	C4FM, DL Mask H, AGC+3, 851.0125 MHz	74
8.5.51	H-CPM, DL Mask H, AGC, 851.0125 MHz	75
8.5.52	H-CPM, DL Mask H, AGC+3, 851.0125 MHz	76
8.5.53	H-DQPSK, DL Mask H, AGC, 851.0125 MHz	77
8.5.54	H-DQPSK, DL Mask H, AGC+3, 851.0125 MHz	78
8.5.55	6.25 kHz, FM, DL Mask E, AGC, 857 MHz	79
8.5.56	6.25 kHz, FM, DL Mask E, AGC+3, 857 MHz	80
8.5.57	12.5 kHz, FM, DL Mask D, AGC, 857 MHz	81
8.5.58	12.5 kHz, FM, DL Mask D, AGC+3, 857 MHz	82



8.5.59	25 kHz FM, DL Mask G, AGC, 857 MHz	83
8.5.60	25 kHz FM, DL Mask G, AGC+3, 857 MHz	84
8.5.61	C4FM, DL Mask D, AGC, 857 MHz	85
8.5.62	C4FM, DL Mask D, AGC+3, 857 MHz	86
8.5.63	H-CPM, DL Mask D, AGC, 857 MHz	87
8.5.64	H-CPM, DL Mask D, AGC+3, 857 MHz	88
8.5.65	H-DQPSK, DL Mask D, AGC, 857 MHz	89
8.5.66	H-DQPSK, DL Mask D, AGC+3, 857 MHz	90
8.5.67	6.25 kHz, FM, DL Mask E, AGC, 868.9875 MHz	91
8.5.68	6.25 kHz, FM, DL Mask E, AGC+3, 868.9875 MHz	92
8.5.69	12.5 kHz, FM, DL Mask D, AGC, 868.9875 MHz	93
8.5.70	12.5 kHz, FM, DL Mask D, AGC+3, 868.9875 MHz	94
8.5.71	25 kHz FM, DL Mask G, AGC, 868.9875 MHz	95
8.5.72	25 kHz FM, DL Mask G, AGC+3, 868.9875 MHz	96
8.5.73	C4FM, DL Mask D, AGC, 868.9875 MHz	97
8.5.74	C4FM, DL Mask D, AGC+3, 868.9875 MHz	98
8.5.75	H-CPM, DL Mask D, AGC, 868.9875 MHz	99
8.5.76	H-CPM, DL Mask D, AGC+3, 868.9875 MHz	100
8.5.77	H-DQPSK, DL Mask D, AGC, 868.9875 MHz	101
8.5.78	H-DQPSK, DL Mask D, AGC+3, 868.9875 MHz	102
8.6	NOISE FIGURE	103
8.7	OUT-OF-BAND/OUT-OF-BLOCK EMISSIONS (INTERMODULATION PRODUCTS)	104
8.7.1	6.25 kHz Signal, Downlink, AGC, 758.0125 MHz	105
8.7.2	6.25 kHz Signal, Downlink, AGC+3dB, 758.0125 MHz	106
8.7.3	12.5 kHz Signal, Downlink, AGC, 758.0125 MHz	107
8.7.4	12.5 kHz Signal, Downlink, AGC+3dB, 758.0125 MHz	108
8.7.5	25 kHz Signal, Downlink, AGC, 758.0125 MHz	109
8.7.6	25 kHz Signal, Downlink, AGC+3dB, 758.0125 MHz	110
8.7.7	6.25 kHz Signal, Downlink, AGC, 766 MHz	111
8.7.8	6.25 kHz Signal, Downlink, AGC+3dB, 766 MHz	112
8.7.9	12.5 kHz Signal, Downlink, AGC, 766 MHz	113
8.7.10	12.5 kHz Signal, Downlink, AGC+3dB, 766 MHz	114
8.7.11	25 kHz Signal, Downlink, AGC, 766 MHz	115
8.7.12	25 kHz Signal, Downlink, AGC+3dB, 766 MHz	116
8.7.13	6.25 kHz Signal, Downlink, AGC, 774.9875 MHz	117
8.7.14	6.25 kHz Signal, Downlink, AGC+3dB, 774.9875 MHz	118
8.7.15	12.5 kHz Signal, Downlink, AGC, 774.9875 MHz	119
8.7.16	12.5 kHz Signal, Downlink, AGC+3dB, 774.9875 MHz	120
8.7.17	25 kHz Signal, Downlink, AGC, 774.9875 MHz	121
8.7.18	25 kHz Signal, Downlink, AGC+3dB, 774.9875 MHz	122
8.7.19	6.25 kHz Signal, Downlink, AGC, 851.0125 MHz	123
8.7.20	6.25 kHz Signal, Downlink, AGC+3dB, 851.0125 MHz	124
8.7.21	12.5 kHz Signal, Downlink, AGC, 851.0125 MHz	125
8.7.22	12.5 kHz Signal, Downlink, AGC+3dB, 851.0125 MHz	126
8.7.23	25 kHz Signal, Downlink, AGC, 851.0125 MHz	127
8.7.24	25 kHz Signal, Downlink, AGC+3dB, 851.0125 MHz	128



8.7.25	6.25 kHz Signal, Downlink, AGC, 857 MHz.....	129
8.7.26	6.25 kHz Signal, Downlink, AGC+3dB, 857 MHz.....	130
8.7.27	12.5 kHz Signal, Downlink, AGC, 857 MHz	131
8.7.28	12.5 kHz Signal, Downlink, AGC+3dB, 857 MHz.....	132
8.7.29	25 kHz Signal, Downlink, AGC, 857 MHz	133
8.7.30	25 kHz Signal, Downlink, AGC+3dB, 857 MHz.....	134
8.7.31	6.25 kHz Signal, Downlink, AGC, 868.9875 MHz	135
8.7.32	6.25 kHz Signal, Downlink, AGC+3dB, 868.9875 MHz.....	136
8.7.33	12.5 kHz Signal, Downlink, AGC, 868.9875 MHz.....	137
8.7.34	12.5 kHz Signal, Downlink, AGC+3dB, 868.9875 MHz	138
8.7.35	25 kHz Signal, Downlink, AGC, 868.9875 MHz	139
8.7.36	25 kHz Signal, Downlink, AGC+3dB, 868.9875 MHz	140
8.8	EMISSION MASK, OUT-OF-BAND.....	141
8.8.1	30 MHz to 1 GHz, 758.0125 MHz	142
8.8.2	1 GHz to 10 th Harmonic, 758.0125 MHz	143
8.8.3	30 MHz to 1 GHz, 766 MHz.....	144
8.8.4	1 GHz to 10 th Harmonic, 766 MHz.....	145
8.8.5	30 MHz to 1 GHz, 774.9875 MHz.....	146
8.8.6	1 GHz to 10 th Harmonic, 774.9875 MHz.....	147
8.8.7	30 MHz to 1 GHz, 851.0125 MHz	148
8.8.8	1 GHz to 10 th Harmonic, 851.0125 MHz.....	149
8.8.9	30 MHz to 1 GHz, 857 MHz	150
8.8.10	1 GHz to 10 th Harmonic, 857 MHz.....	151
8.8.11	30 MHz to 1 GHz, 868.9875 MHz.....	152
8.8.12	1 GHz to 10 th Harmonic, 868.9875 MHz.....	153
8.9	SPURIOUS RADIATED EMISSIONS.....	154
8.9.1	Downlink, 758.0125 MHz.....	155
8.9.2	Downlink, 766 MHz	156
8.9.3	Downlink, 774.9875 MHz	157
8.9.4	Downlink, 851.0125 MHz.....	158
8.9.5	Downlink, 857 MHz	159
8.9.6	Downlink, 868.9875 MHz.....	160
8.10	MODULATION CHARACTERISTICS.....	161
8.11	FREQUENCY STABILITY	162
8.12	TRANSIENT FREQUENCY BEHAVIOR.....	163
8.13	ADJACENT CHANNEL POWER LIMITS.....	164
9.	ANNEX-A - PHOTOGRAPHS OF THE EUT.....	165
10.	ANNEX-B – TEST SETUP PHOTOGRAPHS.....	165
11.	HISTORY OF TEST REPORT CHANGES.....	165



1. Customer Information

Applicant: Fiplex Communications Inc.
Address: 2101 NW 79th Avenue,
Miami, Florida, 33122, United States

1.1 Test Result Summary

The following test procedure and guidance were used for measuring FCC PART 90 (PRIVATE LAND MOBILE RADIO SERVICES) known as Licensed Land Mobile; ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters. Full test results are available in this report.

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.

Applicable Clauses from Part 2		
FCC Part 2 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
2.202	Bandwidth & Emission	Pass
2.1033 (c)(8)	Power at the Final Amplifier	Pass
2.1046 (a)	RF Output Power	Pass
2.1047	Modulation characteristics	n/a
2.1049	Occupied Bandwidth	Pass
2.1051	Spurious emissions at antenna terminals	Pass
2.1053	Field strength of spurious radiation	Pass
2.1055	Frequency stability	n/a



Applicable Clauses from Part 90 Subpart I		
FCC Part 90 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
90.205	Transmitter Power	Pass
90.207	Types of Emissions	Pass
90.209	Bandwidth limitations	Pass
90.210	Emission masks, In-band	Pass
90.210	Emission masks, Out-of-band	Pass
90.213	Frequency stability	n/a
90.214	Transient Frequency Behavior	n/a
90.219 (d)(6)(i)	ERP of intermodulation products	n/a ¹
90.219 (d)(6)(ii)	ERP of noise within the passband	n/a ¹
90.219 (d)(6)(iii)	ERP of noise on spectrum < 1 MHz outside of the passband	n/a ¹
90.219 (d)(3)(i), (e)(1)	ERP of Radiated Power	n/a ¹
90.219 (e)(2)	Noise figure	Pass
90.219 (e)(3)	Spurious emissions	Pass
90.219 (e)(4)(i)(ii)(iii)	Retransmitted Signals	n/a
90.221	Adjacent channel power limits	n/a

Note 1: Requirements in Part 90.219 (d) apply at deployment of this EUT, therefore are not applicable at certification.

KDB 935210 D05 v01r04		
FCC KDB 935210 D05 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
4.1	Test Signals for PLMRS (Input Signals)	Pass
4.2	AGC Threshold	Reported
4.3	Out-of-Band Rejection	Reported
4.4	Input-versus-Output Signal Comparison	Pass
4.5	Output Power	Pass
4.5	Amplifier/Booster Gain (optional)	Reported
4.6	Noise Figure	Pass
4.7.2	Out-of-band/Out-of-block Conducted Emissions (Intermodulation Products)	Pass
4.7.3	EUT Spurious Conducted Emissions	Pass
4.8	Frequency Stability	n/a
4.9	Spurious Radiated Emissions	Pass



Timco Engineering, Inc., an IIA Company
 849 NW State Road 45, Newberry, Florida 32669
 (352) 472-5500 / testing@timcoengr.com

2. Location of Testing

2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA").
 Testing was performed at Timco's permanent laboratory located at 849 NW State Road 45, Newberry, Florida 32669

FCC test firm # 578780
 FCC Designation # US1070
 FCC site registration is under A2LA certificate # 0955.01
 ISED Canada test site registration # 2056A
 EU Notified Body # 1177
 For all designations see A2LA scope # 0955.01

2.2 Testing was performed, reviewed by

Dates of Testing: 1/25/23 – 2/3/23

Signature:

Sr. EMC Engineer
 EMC-003838-NE



Name & Title:

Tim Royer, EMC Engineer

Date of Signature

3/7/2023

Signature:

Name & Title:

Kristoffer Costa, EMC Technician

Date of Signature

3/7/2023



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

3. Test Sample(s) (EUT/DUT)

The test sample was received: 1/9/2023

3.1 Definitions

Signal booster: A device or system that automatically receives, amplifies, and retransmits signals from wireless stations into and out of building interiors, tunnels, shielded outdoor areas and other locations where these signals would otherwise be too weak for reliable communications. Signal booster systems may contain both Class A and Class B signal boosters as components.

Class A signal booster: A signal booster designed to retransmit signals on one or more specific channels. A signal booster is deemed to be a Class A signal booster if none of its passbands exceed 75 kHz.

Class B signal booster: A signal booster designed to retransmit any signals within a wide frequency band. A signal booster is deemed to be a Class B signal booster if it has a passband that exceeds 75 kHz.



3.2 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	P3TDH7S-8B
Brief Description	BDA All In One Digital Signal Booster
Model(s) #	HONBDA-A
Firmware version	N/A
Software version	N/A
Serial Number	N/A

Technical Characteristics	
Frequency Range	Downlink: 758 MHz- 775 MHz & 851 MHz- 869MHz
RF O/P Power (Max.)	33 dBm/ 2 W
Modulation	FM
Bandwidth & Emission Class	12K3F3E, 7K84F3E, 4K04F3E, 8K17F1D, 8K17F1E, 8K20F1W, 9K63F1D, 9K63F1E, 9K63D7W
Duty Cycle	100%
Antenna Connector	N Type
Voltage Rating (AC or Batt.)	110VAC, 24VDC Battery (Internal)

Antenna Characteristics			
Antenna	Frequency Range	Mode / BW	Antenna Gain
1	n/a	n/a	0 dBi

- Note: Information such as antenna gain, firmware/software numbers are provided by manufacturer and cannot be validated by the test lab.



3.3 Configuration of EUT

Test Modes		
Band (MHz)	Link Direction	Test Frequencies (MHz)
700 MHz	Downlink	758.0125 MHz
		766 MHz
		774.9875 MHz
800 MHz	Downlink	851.0125 MHz
		857 MHz
		868.9875 MHz

Operating conditions during Testing:

No other modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT) were made.

Peripherals used during Testing:

A laptop was used to program the EUT.

3.4 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.



4. Test methods & Applicable Regulatory Limits

4.1 Test methods/Standards/Guidance:

Test procedures and guidance for measuring Licensed Part 90 Licensed device:

- 1) ANSI C63.26-2015
- 2) FCC KDB 935210 D05 v01r04 Industrial Signal Boosters

4.2 Applied Limits and Regulatory Limits:

- 1) FCC CFR 47 Part 90 Subpart I, 90.219

5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
Note: The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

6. Environmental Conditions

6.1 Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Parameter	Measurement
Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barometric Pressure	30.05 in Hg
Note: Specific environmental conditions that are applicable to a specific test are available in the test result section.	



7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer’s model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

7.1 List of Test Equipment

Test Equipment						
Type	Device	Manufacturer	Model	SN#	Current Cal	Cal Due
Antenna	Double-Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	2/25/20	2/24/2023
CHAMBER	CHAMBER	Panashield	3M	N/A	3/12/19	12/21/2023
Pre-amp	Pre-amp	RF-LAMBDA	RLNA00M45GA	NA	2/27/19	7/26/2025
Receiver	EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	5/27/21	5/26/2024
Receiver	EMI Test Receiver R&S ESW44	Rohde & Schwarz	ESW44	103049	10/13/21	10/12/2024
Function Generator	Function Generator	Standford	DS340	25200	1/13/21	1/13/2024
Signal Generator	Signal Generator HP 8648C	HP	8648C	35537A01679	3/29/19	8/03/2025

Software			
Software	Author	Version	Validation on
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3	2018
RSCCommander	Rohde & Schwarz	1.6.4	2014
ScopeExplorer	LeCroy	v2.25.0.0	2009
Field Strength	Timco	v4.10.7.0	2016



8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Unless noted otherwise in the referenced standard, the measurements of **ac power-line conducted emissions and conducted power output** will be reported in units of dBμV. Unless noted otherwise in the referenced standard, the measurements of **radiated emissions** will be reported in units of decibels, referenced to one microvolt per meter (dBμV/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dBμV if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.

Example:

Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dBμV	+ 10.36 dB/m	+0.40 dB	=30.36 dBμV/m @ 3m

$$EIRP = P_{cond} \text{ (dBm)} + dBi$$



8.1 Power at the Final Amplifier

Limits from FCC Part 2.1033 (c)(8).


No method of measurement is specified. The result has been calculated based on all available information.

Test Results		
EUT Operating Voltage (V)	EUT Current (A)	Power at the Final Amplifier (W)
24	3.33	79.92



8.2 RF Output Power & Gain

Limits from FCC Parts 2.1046(a), and 90.205 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

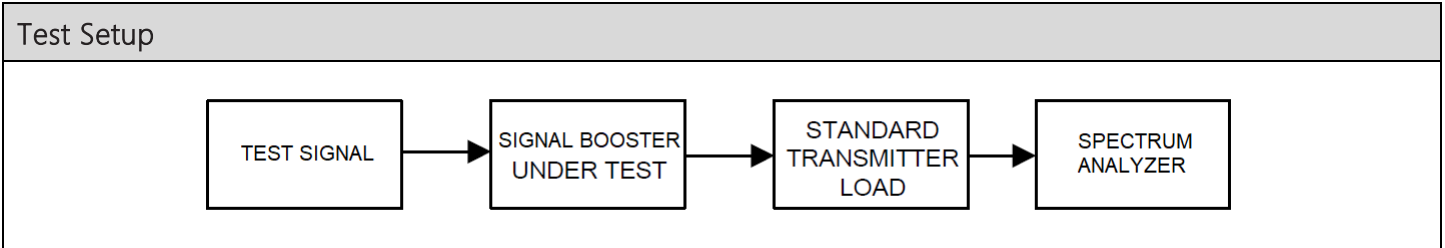

Test Results, Power Output		
Link Direction	Max Power Output (dBm)	Max Power Output (W)
Downlink	33	2




Test Results, Gain					
Link Direction	Tuned Frequency (MHz)	Input Level	Power Input (dBm)	Power Output (dBm)	Gain (dB)
Downlink 700 MHz	758.0125	AGC	-40	32.14	72.14
		AGC+3	-37	34.23	71.23
	766	AGC	-39	31.93	70.93
		AGC+3	-36	35.22	71.22
	774.9875	AGC	-40	32.35	72.35
		AGC+3	-37	34.67	71.67
Downlink 800 MHz	851.0125	AGC	-42.5	32.27	74.77
		AGC+3	-39.5	35.25	74.75
	857	AGC	-41.5	32.82	74.32
		AGC+3	-38.5	35.53	74.03
	868.9875	AGC	-42.5	33.00	75.5
		AGC+3	-39.5	36.82	76.32



8.3 Out-of-band Rejection

Limits and test method from FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

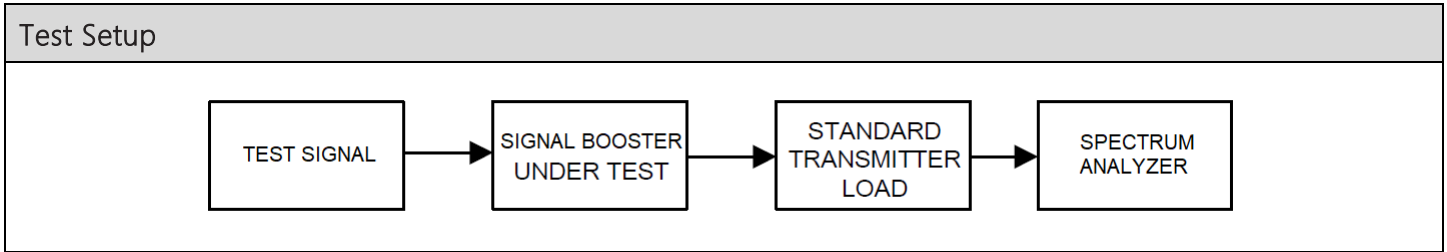


Test Results, Out-of-band Rejection and Class of Operation			
Operating Band (MHz)	Link Direction	Passband (kHz)	Class of Operation
700- 805 MHz	Downlink	< 75 kHz	Class B
806- 824 MHz	Downlink	< 75 kHz	Class B



Out-of-band Rejection, Spectrum Plots


8.3.1 700 Band, Uplink

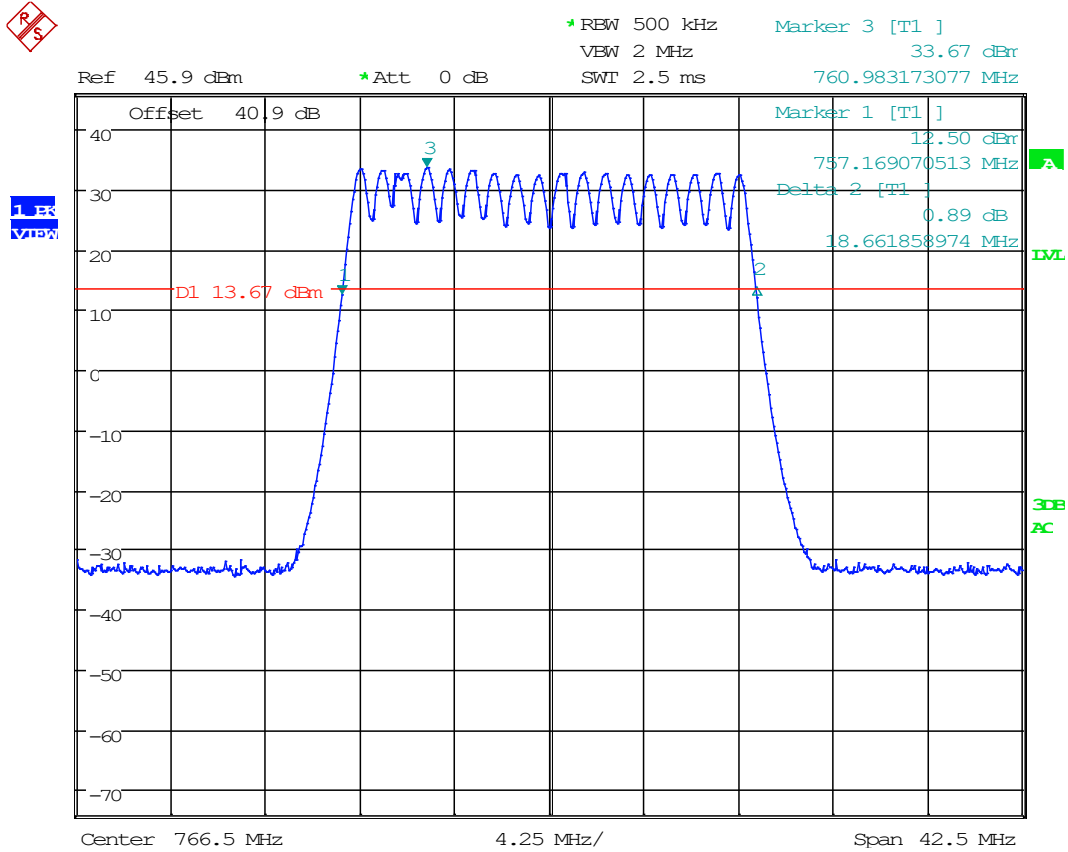

Date: 1.FEB.2023 16:22:20



8.3.2 800 Band, Downlink

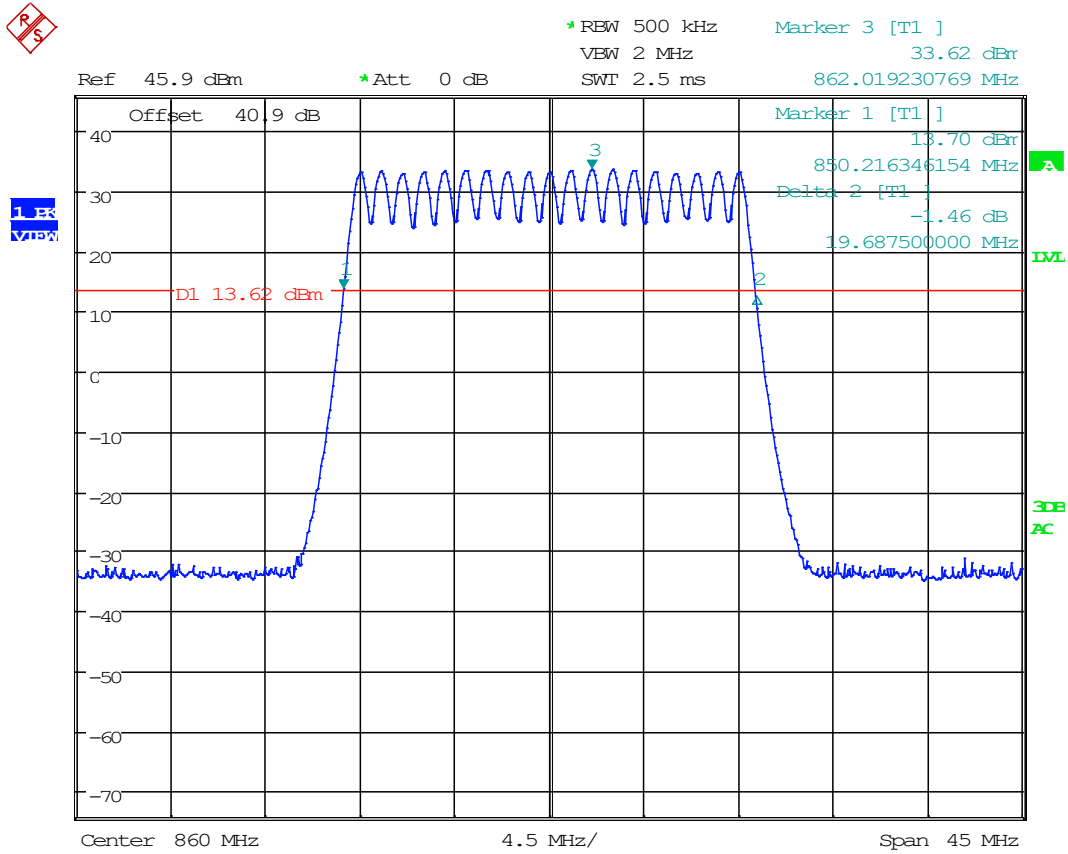

Date: 1.FEB.2023 16:27:37



8.4 Bandwidth & Emission

Limits from FCC Parts 90.209 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.


Authorized Bandwidth		
Rule Part	Operating Range	Authorized Bandwidth (kHz)
Part 90	788- 805 MHz	Unspecified
Part 90	806- 824 MHz	11.25/20

Applicable Input Signals		
Signal	Occupied Bandwidth (MHz)	Representative Emission Designator(s)
CW	N/A	N/A
25 kHz FM	12.34	12K3F3E
12.5 kHz FM	7.84	7K84F3E
6.25 kHz FM	4.04	4K04F3E
C4FM (P25 Phase I)	8.17	8K17F1D, 8K17F1E
HCPM (P25 Phase II SU)	8.2	8K20F1W
HDQPSK (P25 Phase II BS)	9.63	9K63F1D, 9K63F1E, 9K63D7W



8.5 Input VS Output Signal Comparison

Limits from FCC Parts 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

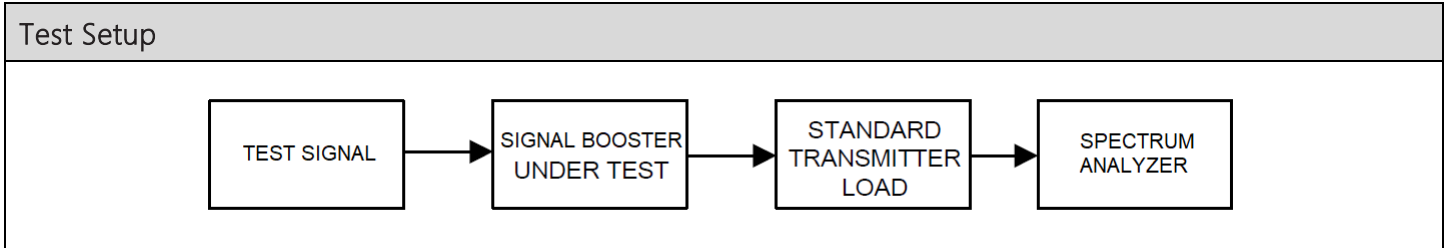



700 Band Input VS Output Comparison

Test Results, Input VS Output Comparison						
Link Direction	Tuned Frequency (MHz)	Input Signal	AGC Level	99% OBW of Input (MHz)	99% OBW of Output (MHz)	Change (%)
Downlink	766	6.25 kHz FM	@ AGC	4.038	4.16	0.122
			@ AGC+3 dB	4.038	4.16	0.122
		12.5 kHz FM	@ AGC	6.21	7.69	1.48
			@ AGC+3 dB	6.21	7.69	1.48
		25 kHz FM	@ AGC	10.21	12.5	2.29
			@ AGC+3 dB	10.21	12.5	2.29
		C4FM	@ AGC	7.71	8.33	0.62
			@ AGC+3 dB	7.71	8.33	0.62
		HCPM	@ AGC	7.71	8.33	0.62
			@ AGC+3 dB	7.71	8.17	0.46
		HDQPSK	@ AGC	9.91	9.77	0.14
			@ AGC+3 dB	9.91	9.93	0.02




800 Band Input VS Output Comparison

Test Results, Input VS Output Comparison						
Link Direction	Tuned Frequency (MHz)	Input Signal	AGC Level	99% OBW of Input (MHz)	99% OBW of Output (MHz)	Change (%)
Downlink	857	6.25 kHz FM	@ AGC	4.038	4.05	0.012
			@ AGC+3 dB	4.038	4.03	0.008
		12.5 kHz FM	@ AGC	6.21	7.93	1.72
			@ AGC+3 dB	6.21	7.93	1.72
		25 kHz FM	@ AGC	10.21	12.5	2.29
			@ AGC+3 dB	10.21	12.98	2.77
		C4FM	@ AGC	7.71	8.05	0.34
			@ AGC+3 dB	7.71	8.09	0.38
		HCPM	@ AGC	7.71	8.17	0.46
			@ AGC+3 dB	7.71	8.09	0.38
		HDQPSK	@ AGC	9.91	9.77	0.14
			@ AGC+3 dB	9.91	9.85	0.06




Input VS Output, Input Spectrum Plots

8.5.1 6.25 kHz FM, Input Signal

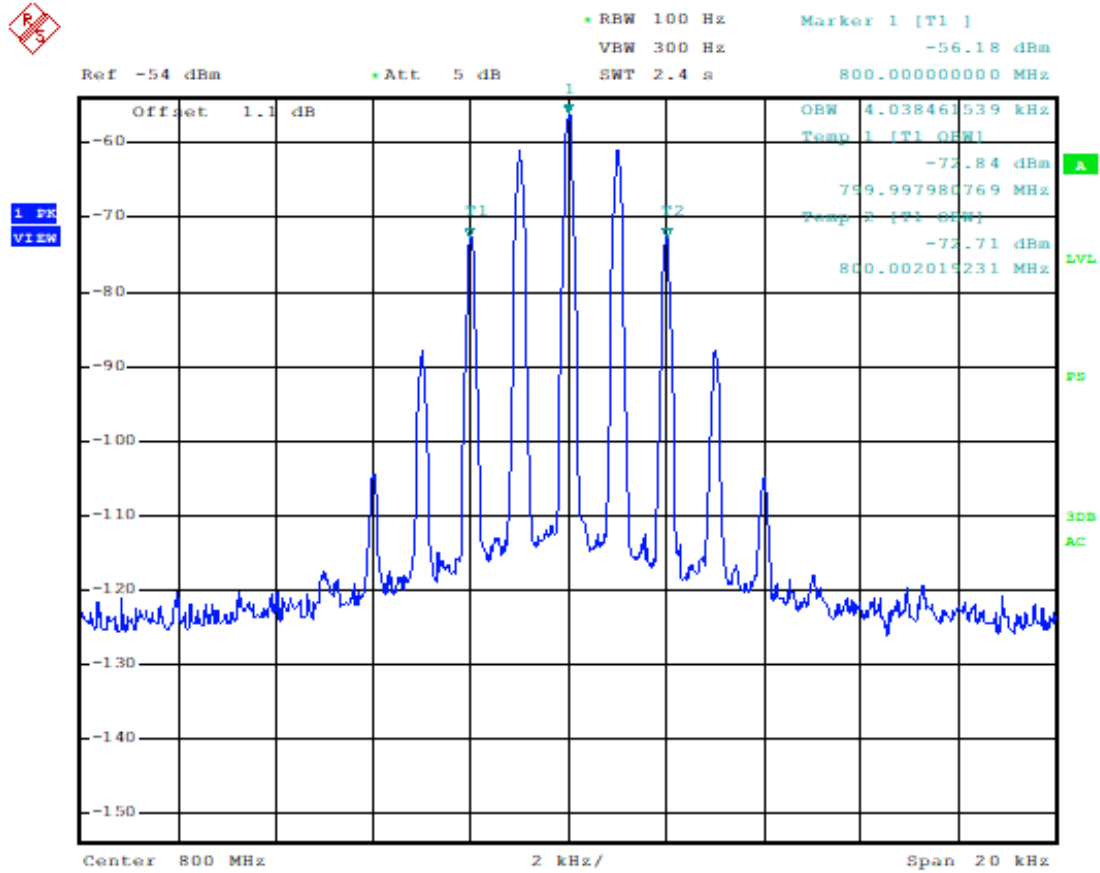


Date: 30.JAN.2019 13:10:11

8.5.2 12.5 kHz FM, Input Signal

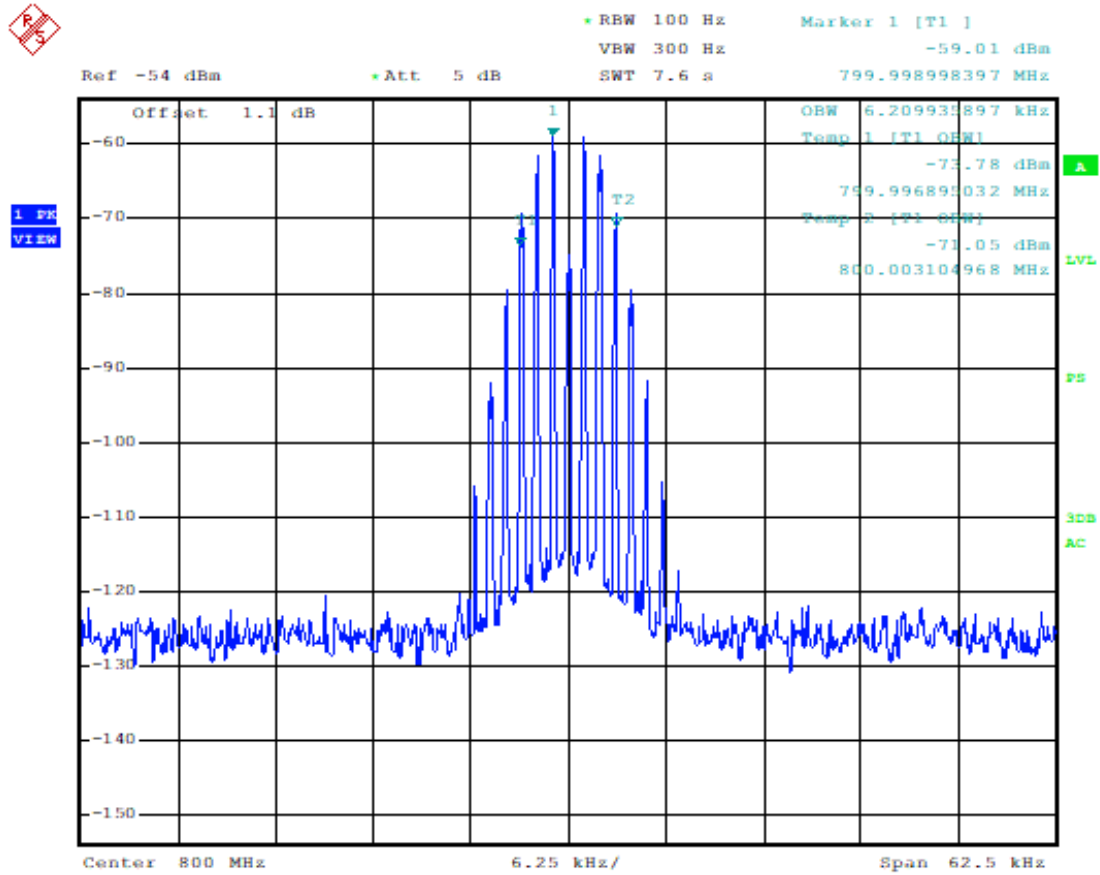


Date: 30.JAN.2019 14:19:45

8.5.3 25 kHz FM, Input Signal

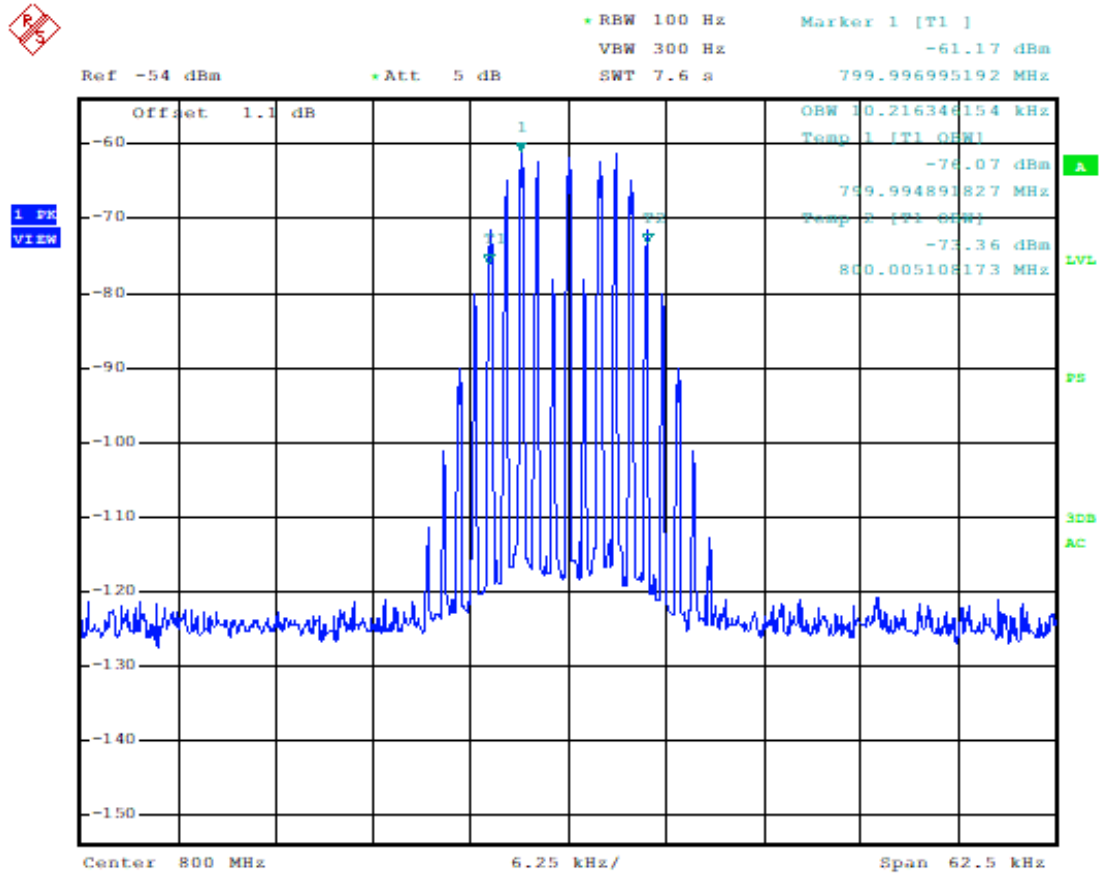


Date: 30.JAN.2019 14:23:14

8.5.4 C4FM, Input Signal

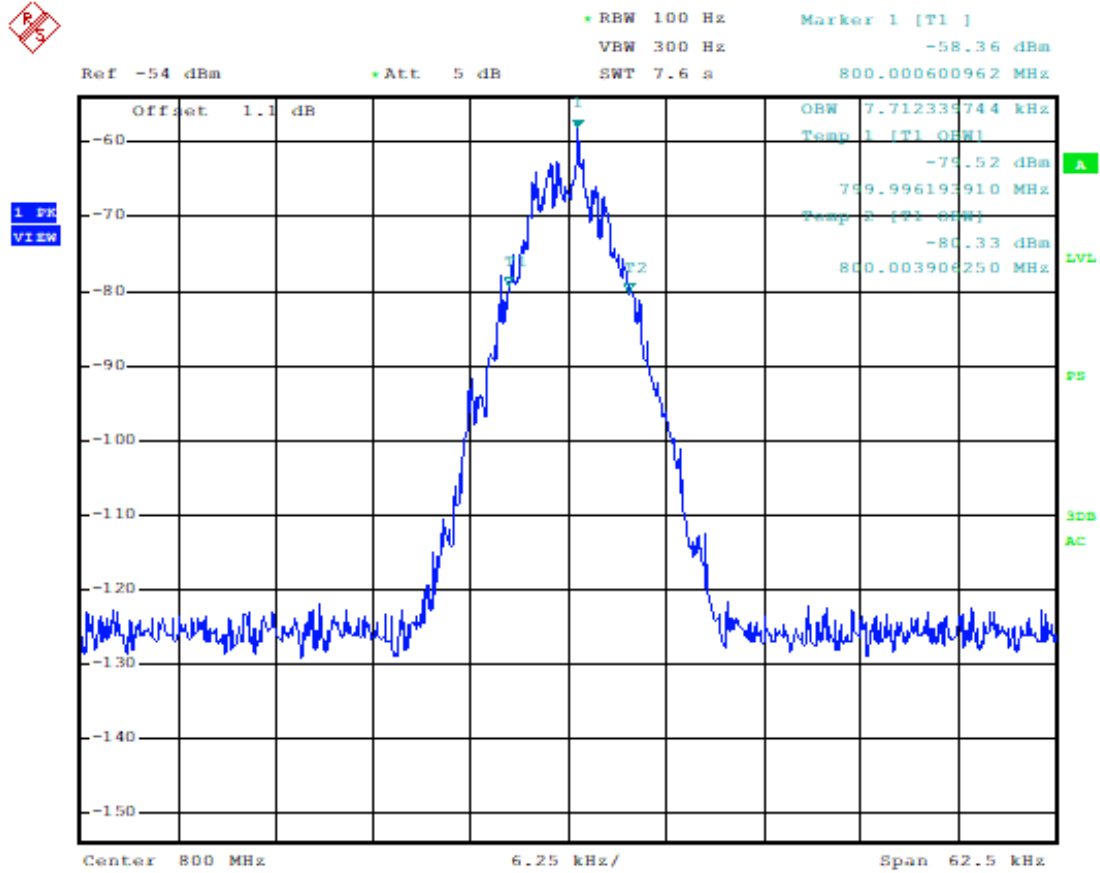


Date: 30.JAN.2019 14:28:58

8.5.5 H-CPM, Input Signal

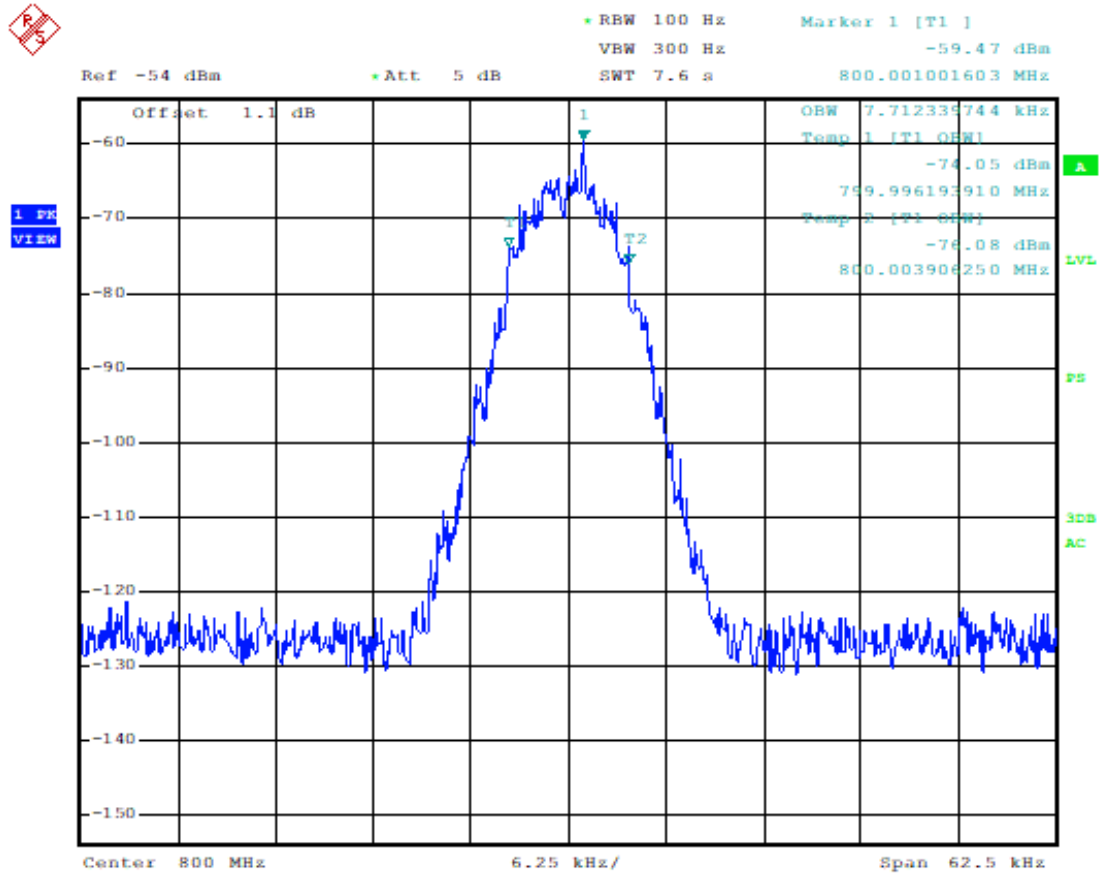

Date: 30.JAN.2019 14:30:47


8.5.6 H-DQPSK, Input Signal

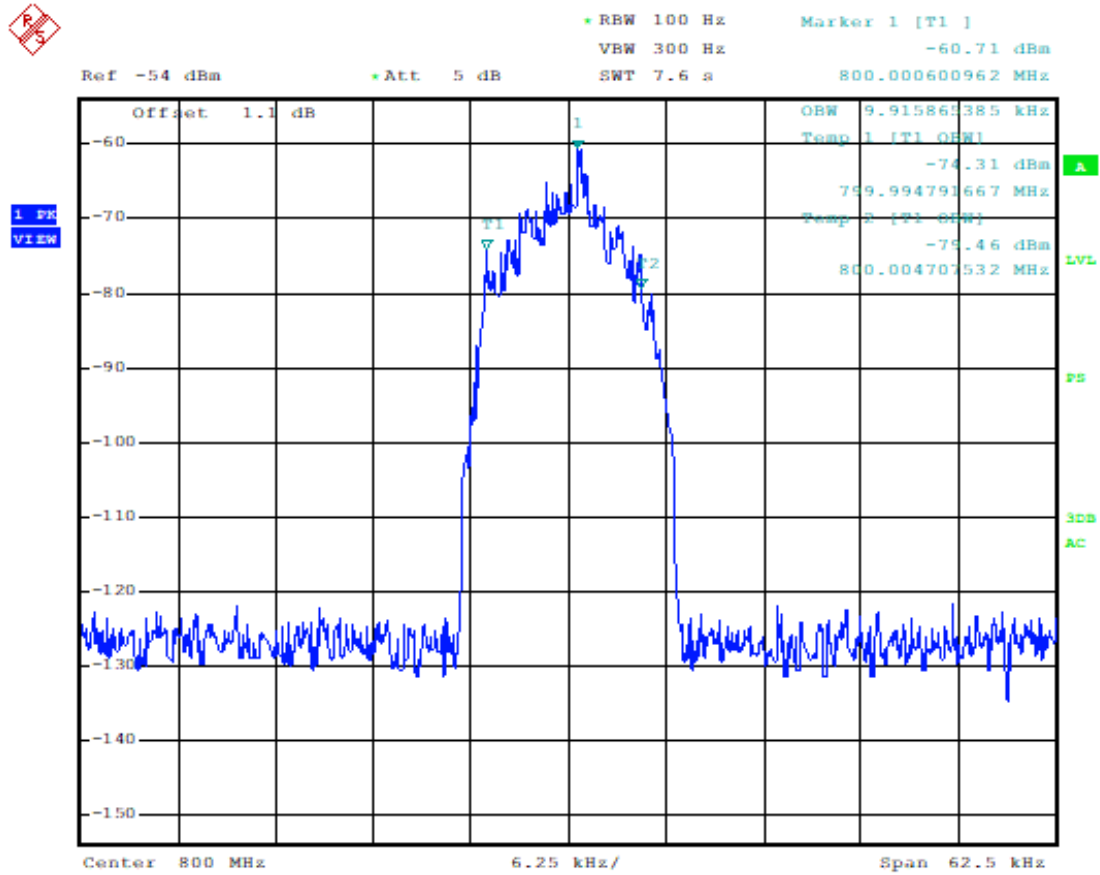

Date: 30.JAN.2019 14:32:35




8.5.7 6.25 kHz, FM, DL Mask C, AGC, 758.0125 MHz

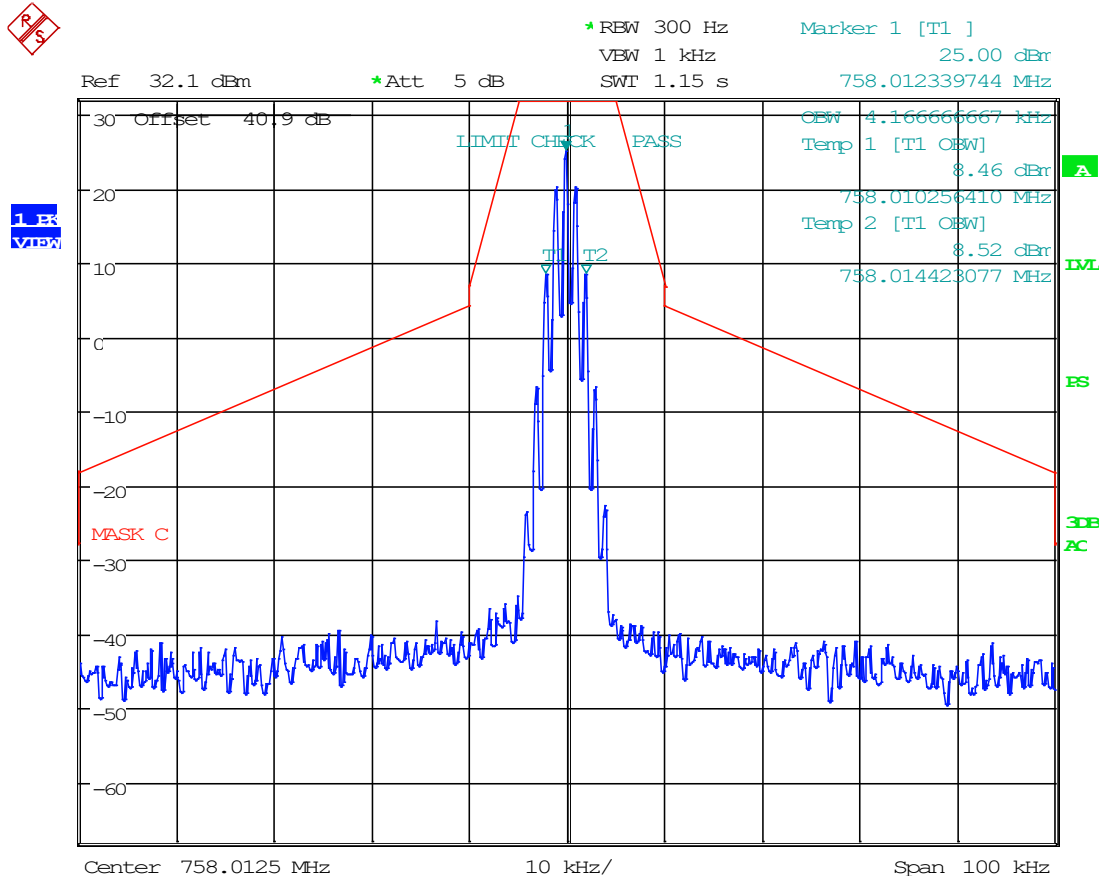

Date: 2.FEB.2023 10:37:29




8.5.8 6.25 kHz, FM, DL Mask C, AGC +3, 758.0125 MHz

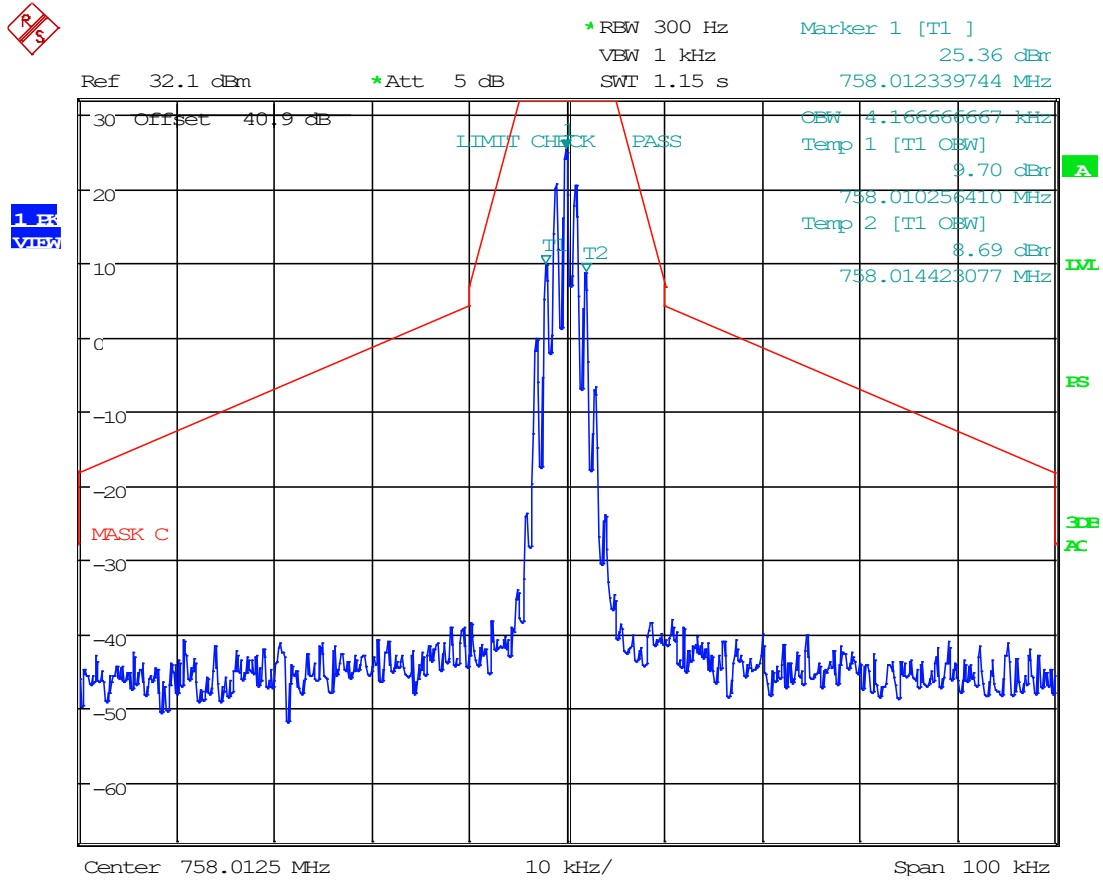

Date: 2.FEB.2023 11:59:21




8.5.9 12.5 kHz, FM, DL Mask C, AGC, 758.0125 MHz

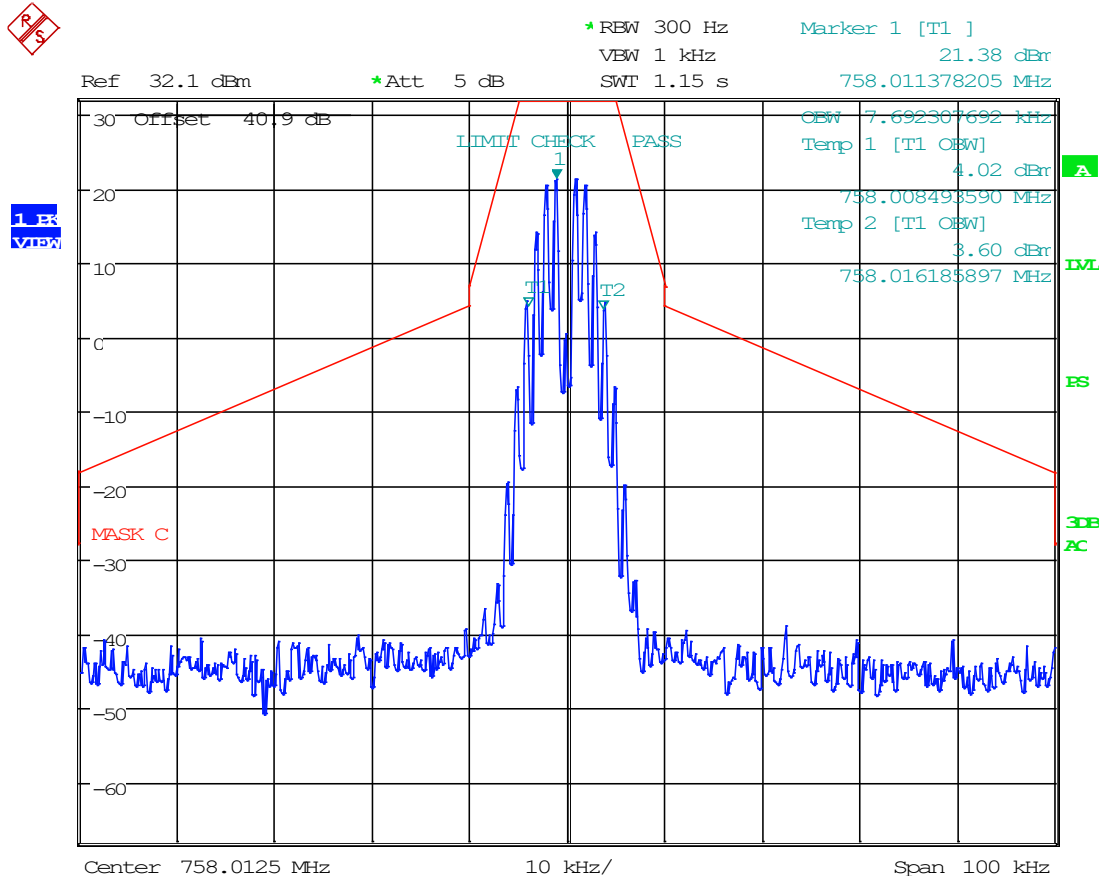

Date: 2.FEB.2023 10:38:41




8.5.10 12.5 kHz, FM, DL Mask C, AGC+3, 758.0125 MHz

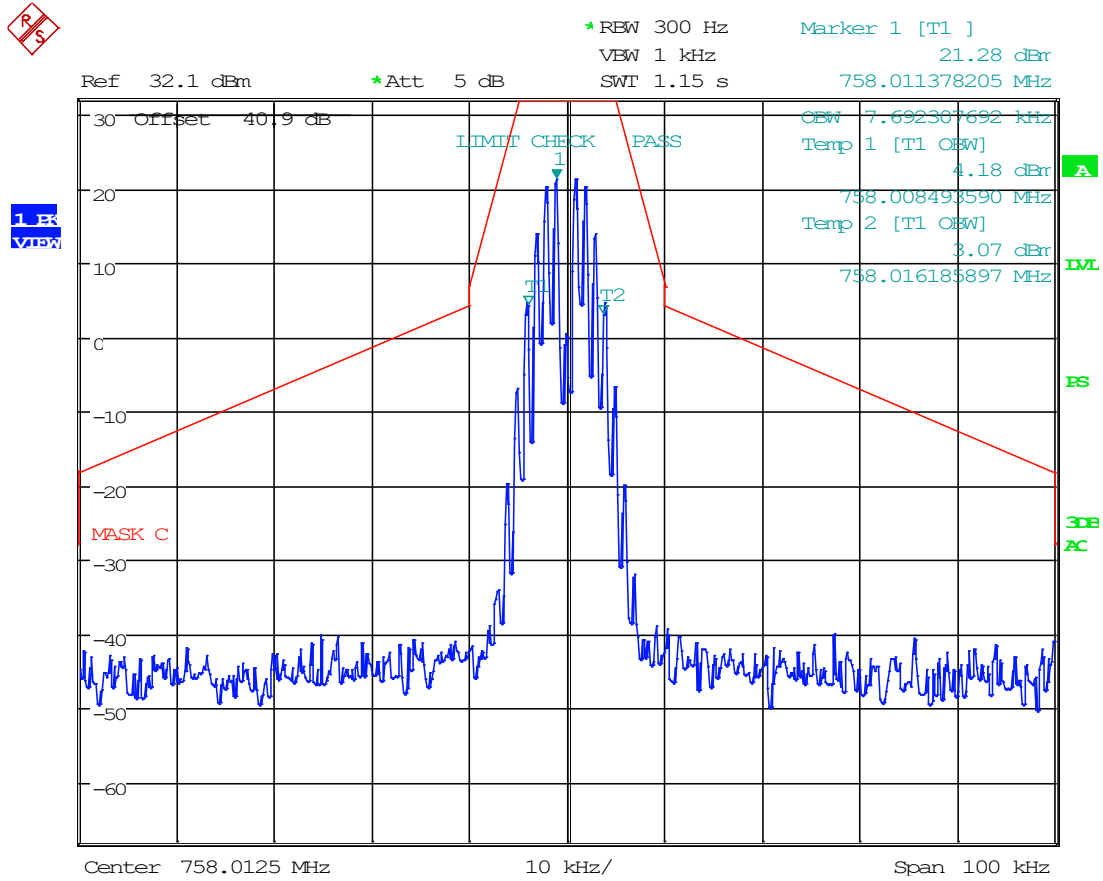

Date: 2.FEB.2023 12:01:03




8.5.11 25 kHz FM, DL Mask C, AGC, 758.0125 MHz

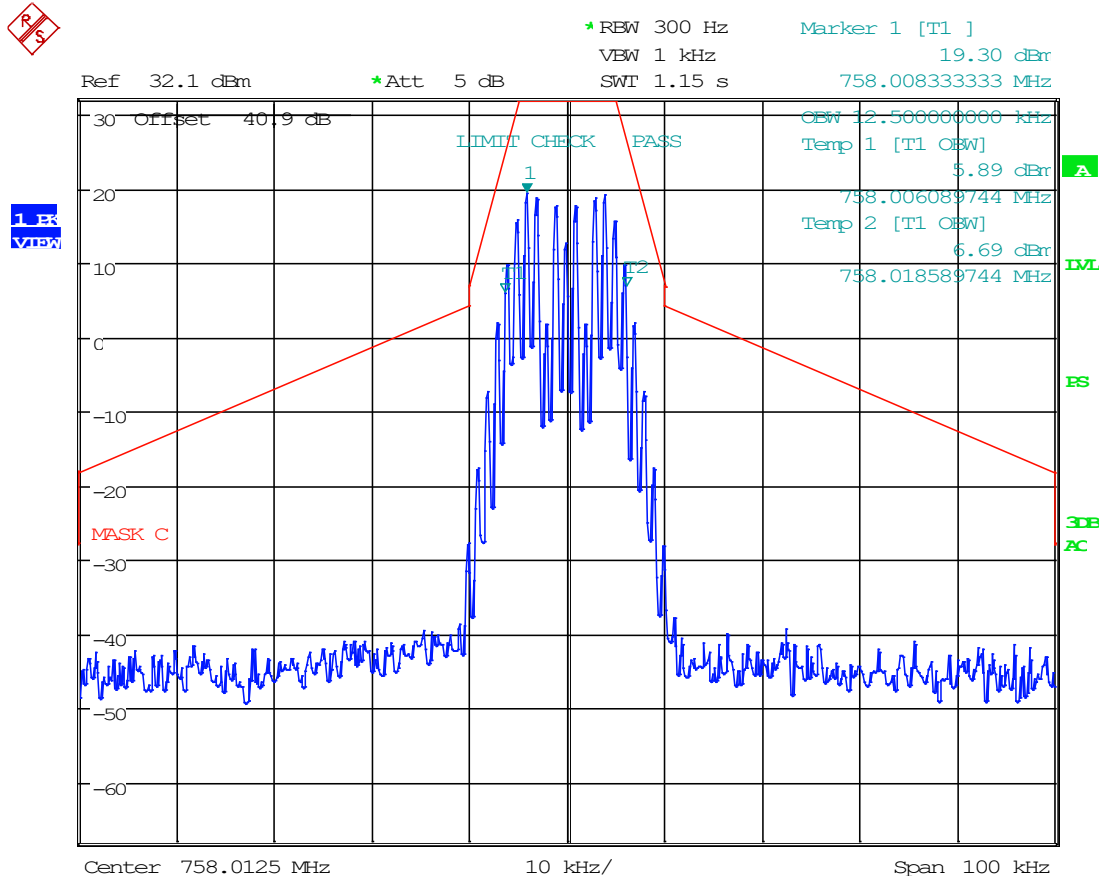

Date: 2.FEB.2023 10:39:28




8.5.12 25 kHz FM, DL Mask C, AGC+3, 758.0125 MHz

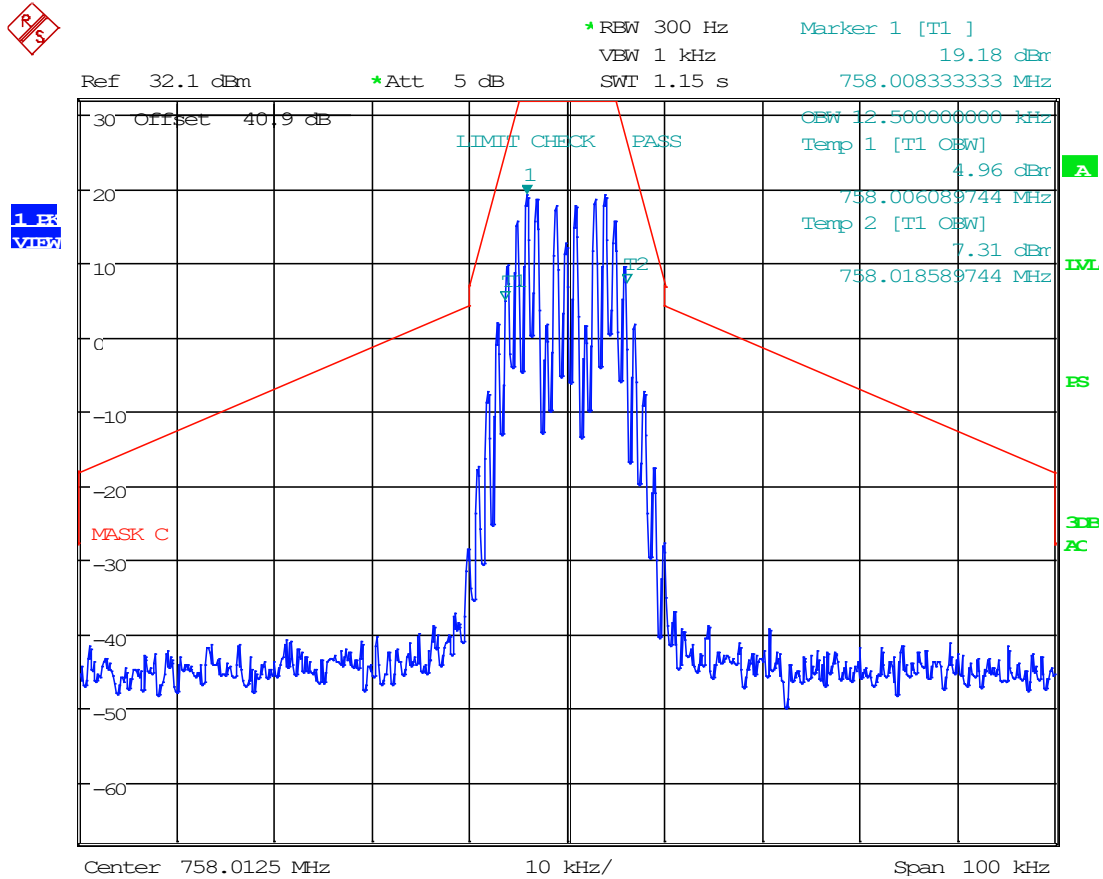

Date: 2.FEB.2023 12:01:42




8.5.13 C4FM, DL Mask C, AGC, 758.0125 MHz

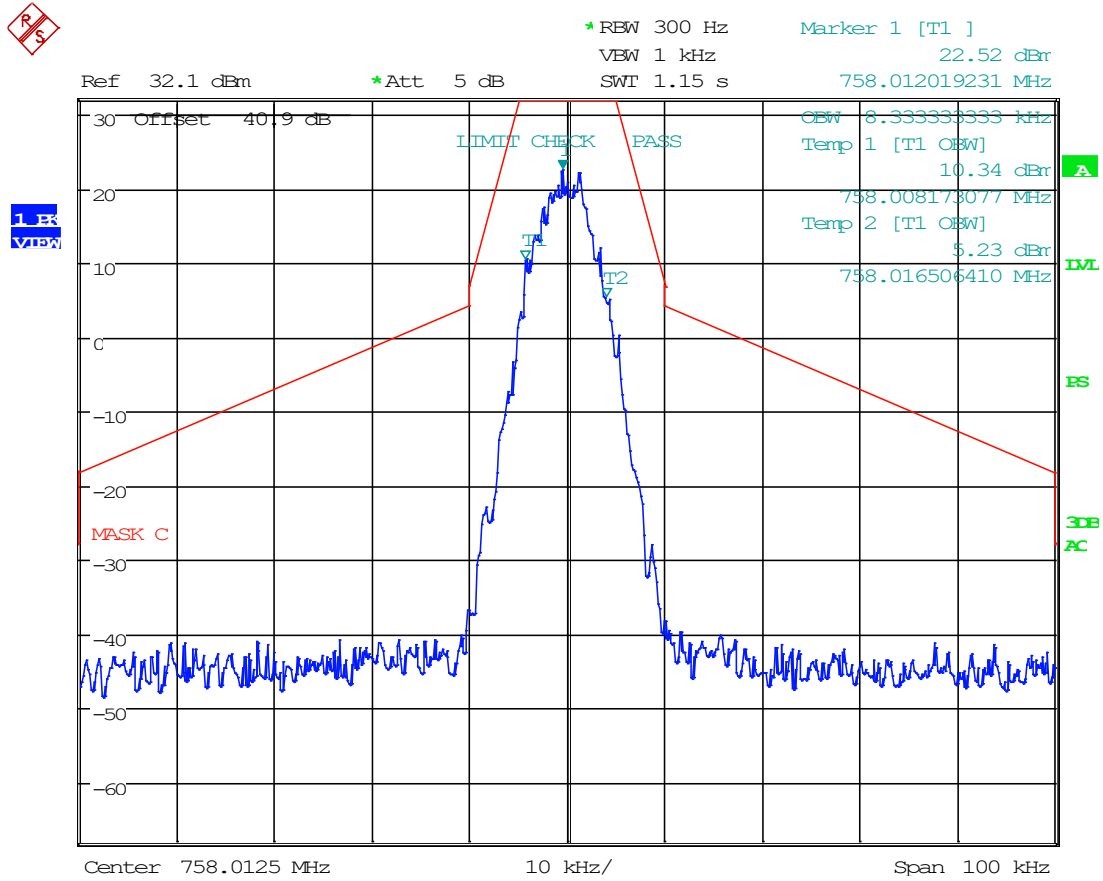

Date: 2.FEB.2023 10:40:37




8.5.14 C4FM, DL Mask C, AGC+3, 758.0125 MHz

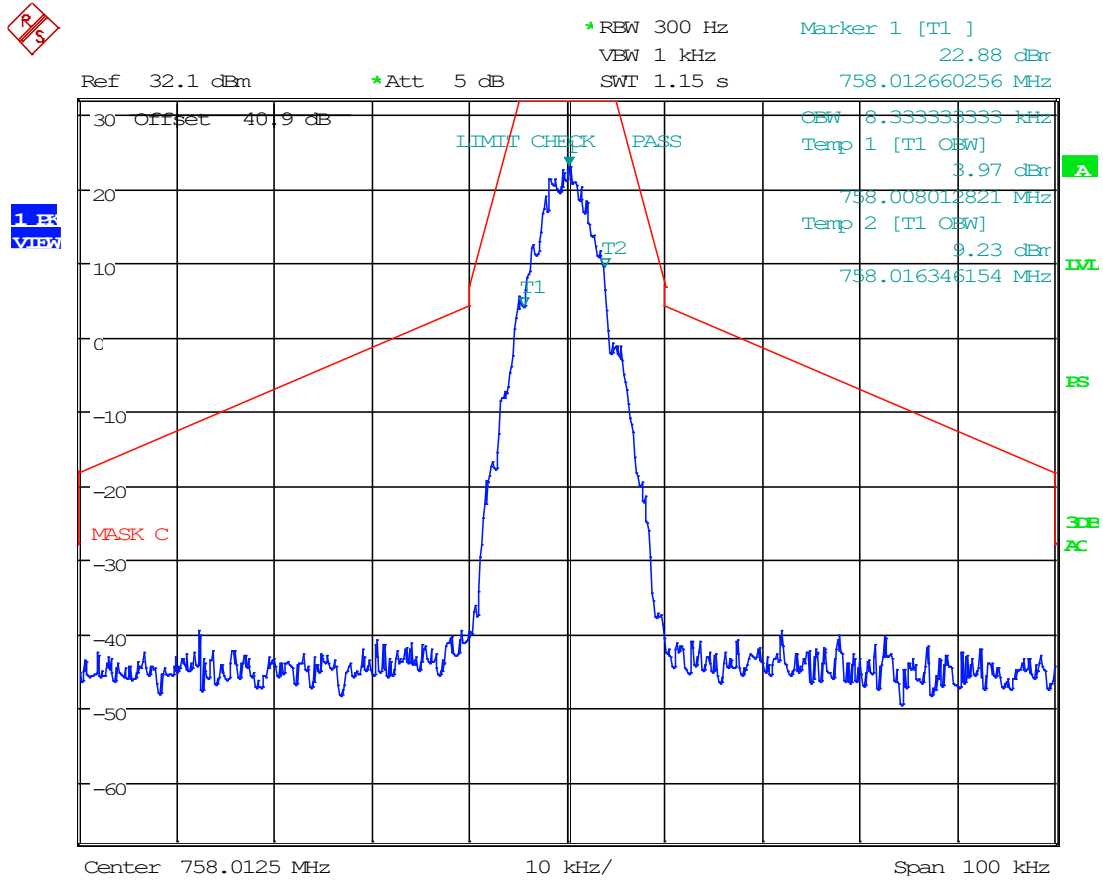

Date: 2.FEB.2023 12:02:38




8.5.15 H-CPM, DL Mask C, AGC, 758.0125 MHz

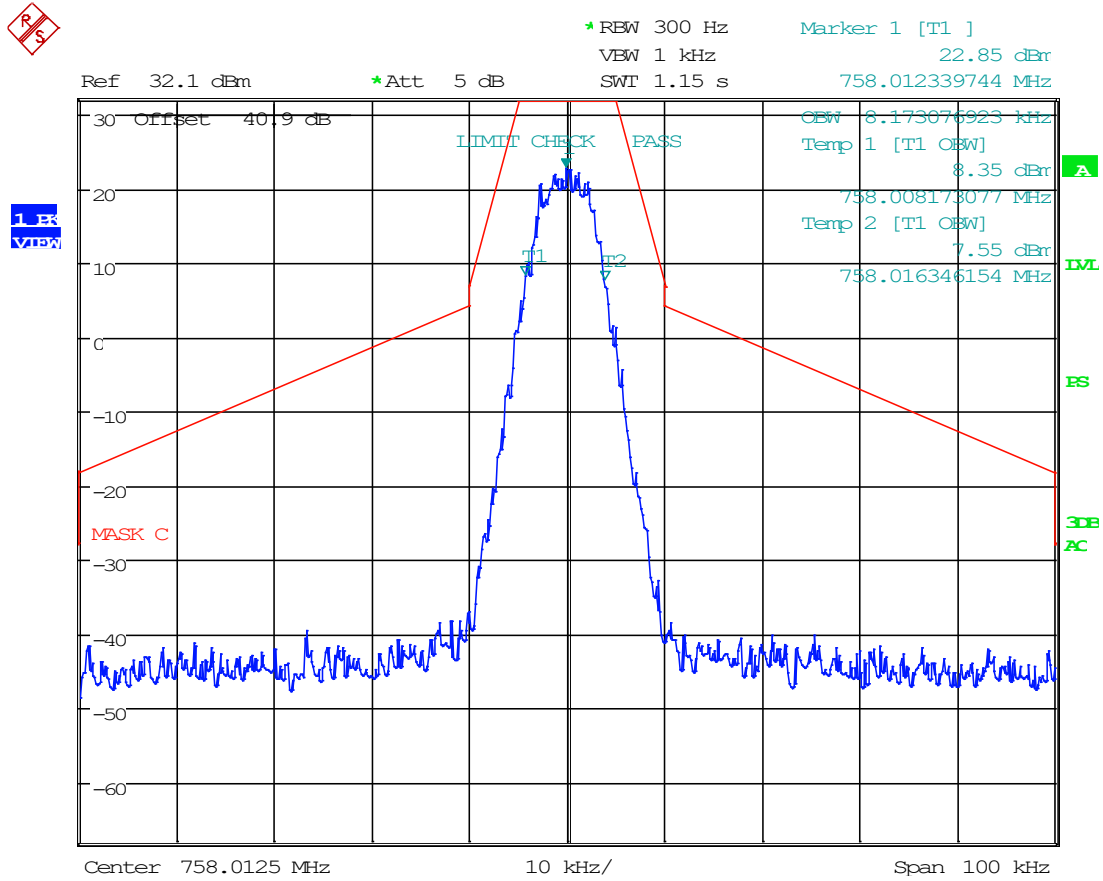

Date: 2.FEB.2023 10:41:35




8.5.16 H-CPM, DL Mask C, AGC+3, 758.0125 MHz

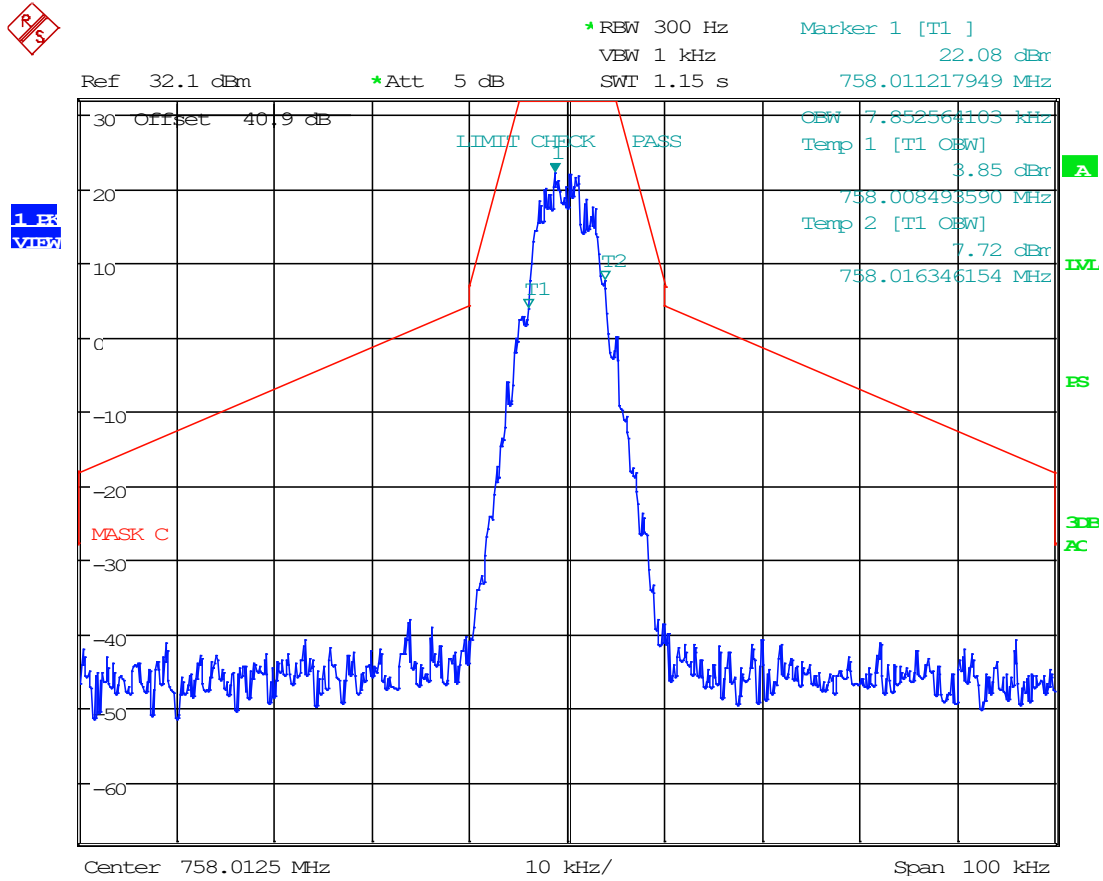

Date: 2.FEB.2023 12:04:01


8.5.17 H-DQPSK, DL Mask C, AGC, 758.0125 MHz

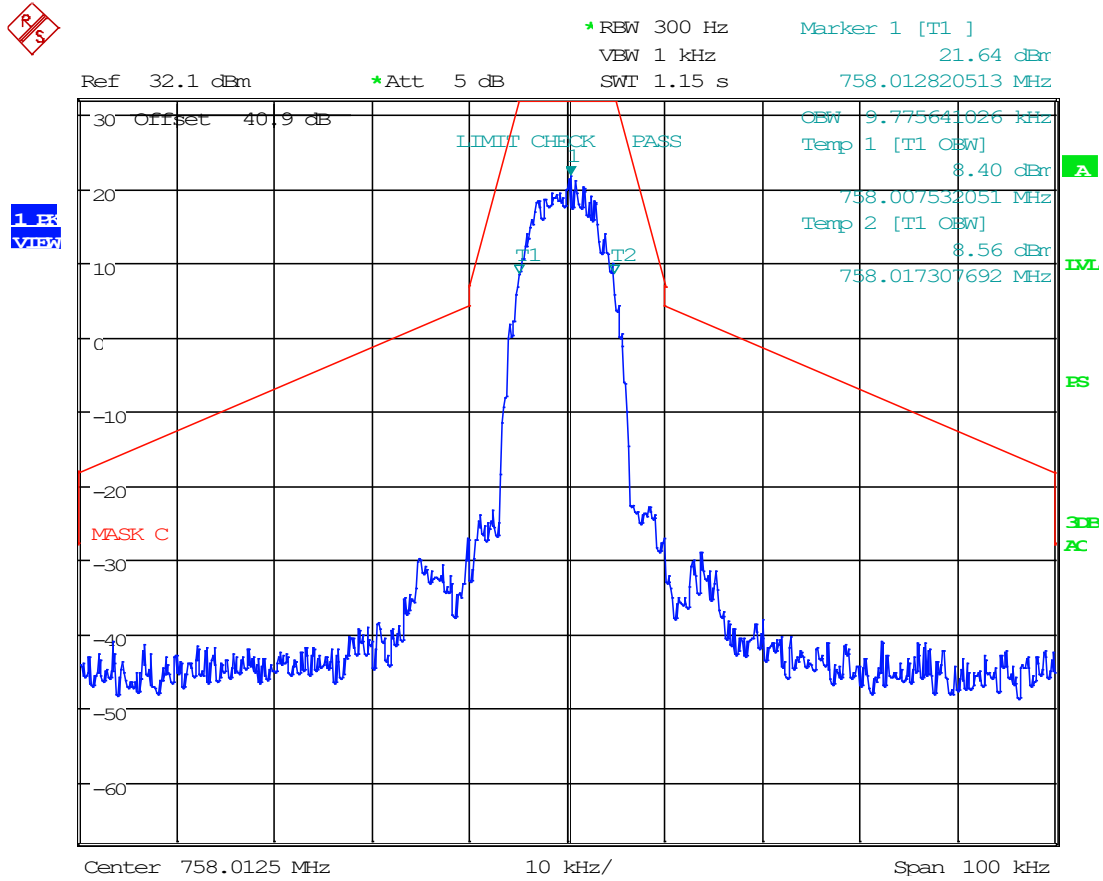

Date: 2.FEB.2023 10:42:26




8.5.18 H-DQPSK, DL Mask C, AGC+3, 758.0125 MHz

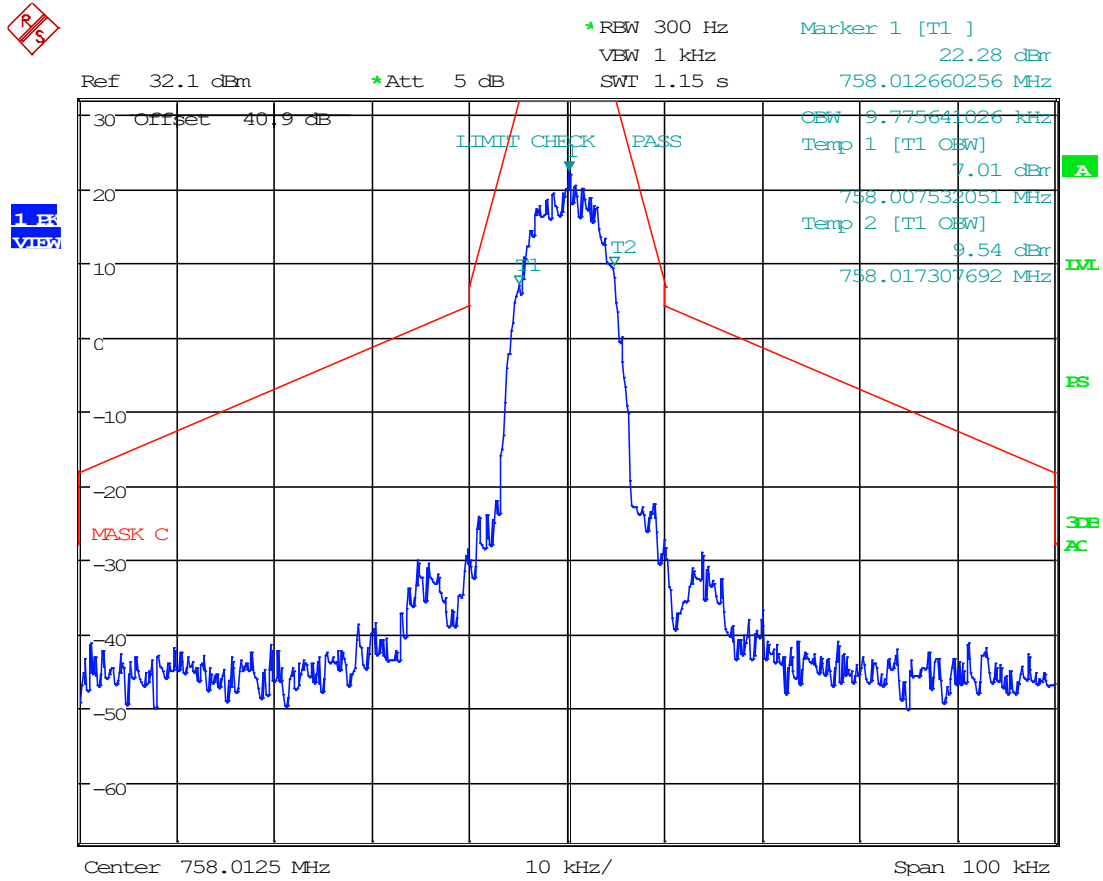

Date: 2.FEB.2023 12:04:45




8.5.19 6.25 kHz, FM, DL Mask C, AGC, 766 MHz

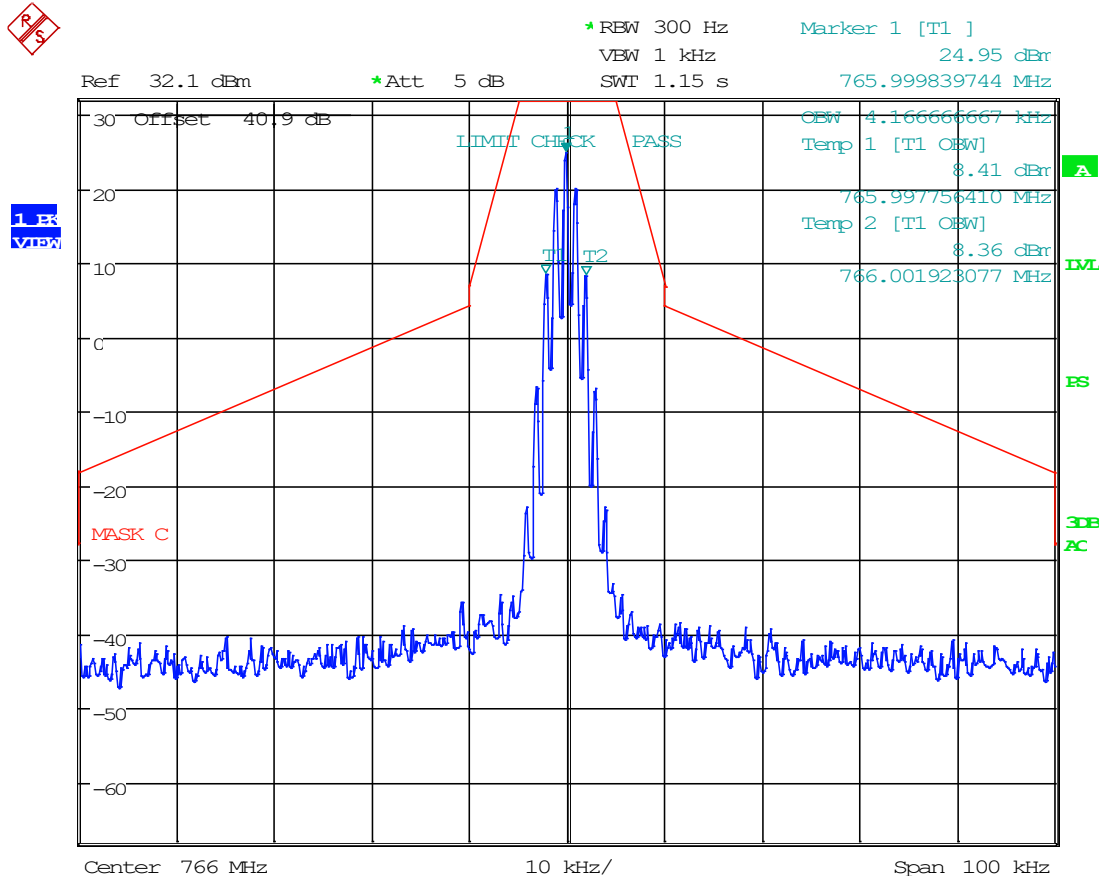

Date: 2.FEB.2023 10:43:42




8.5.20 6.25 kHz, FM, DL Mask C, AGC+3, 766 MHz

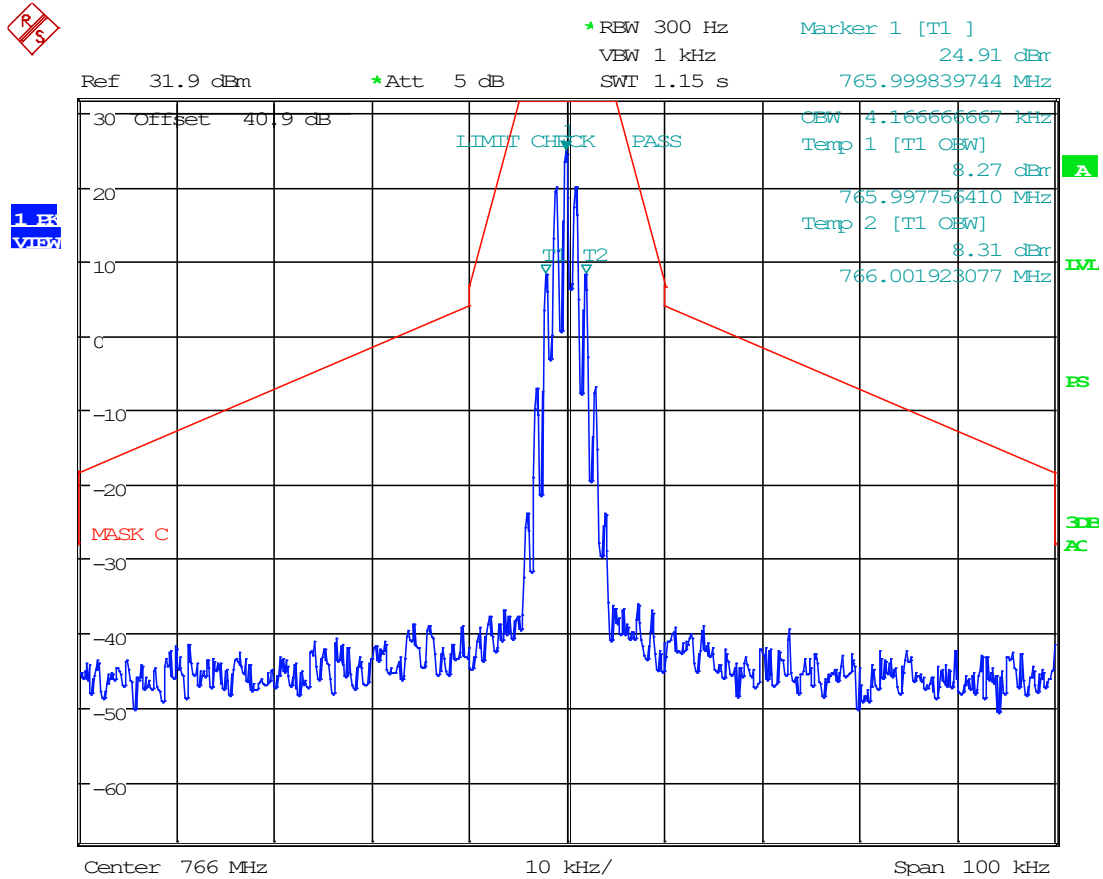

Date: 2.FEB.2023 12:05:48




8.5.21 12.5 kHz, FM, DL Mask C, AGC, 766 MHz

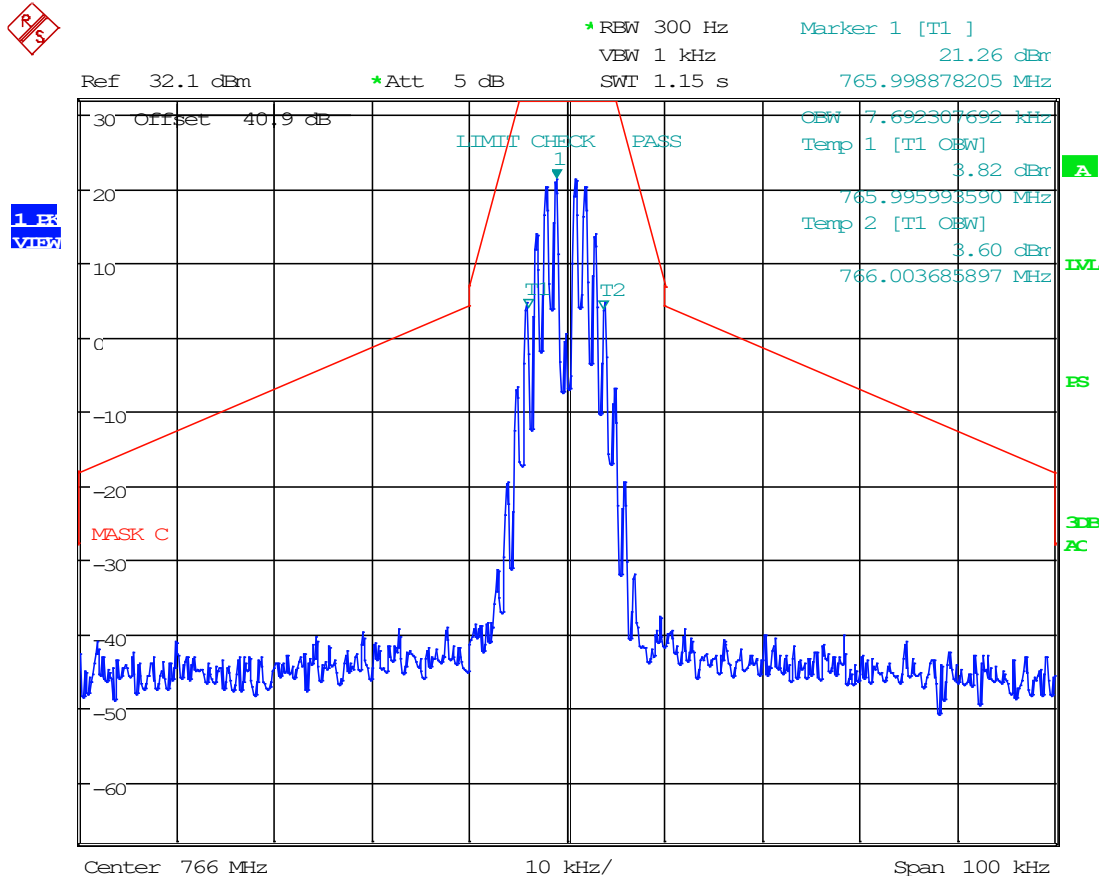

Date: 2.FEB.2023 10:44:34




8.5.22 12.5 kHz, FM, DL Mask C, AGC+3, 766 MHz

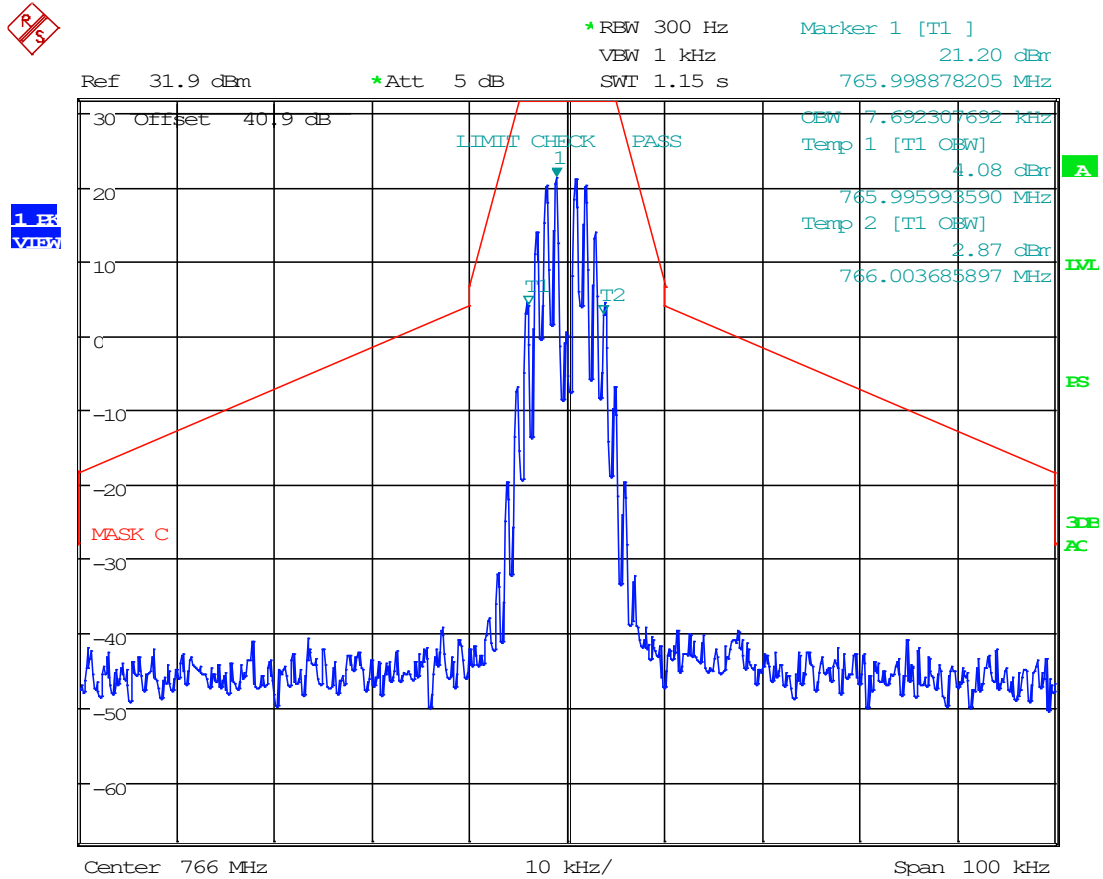

Date: 2.FEB.2023 12:06:34




8.5.23 25 kHz FM, DL Mask C, AGC, 766 MHz

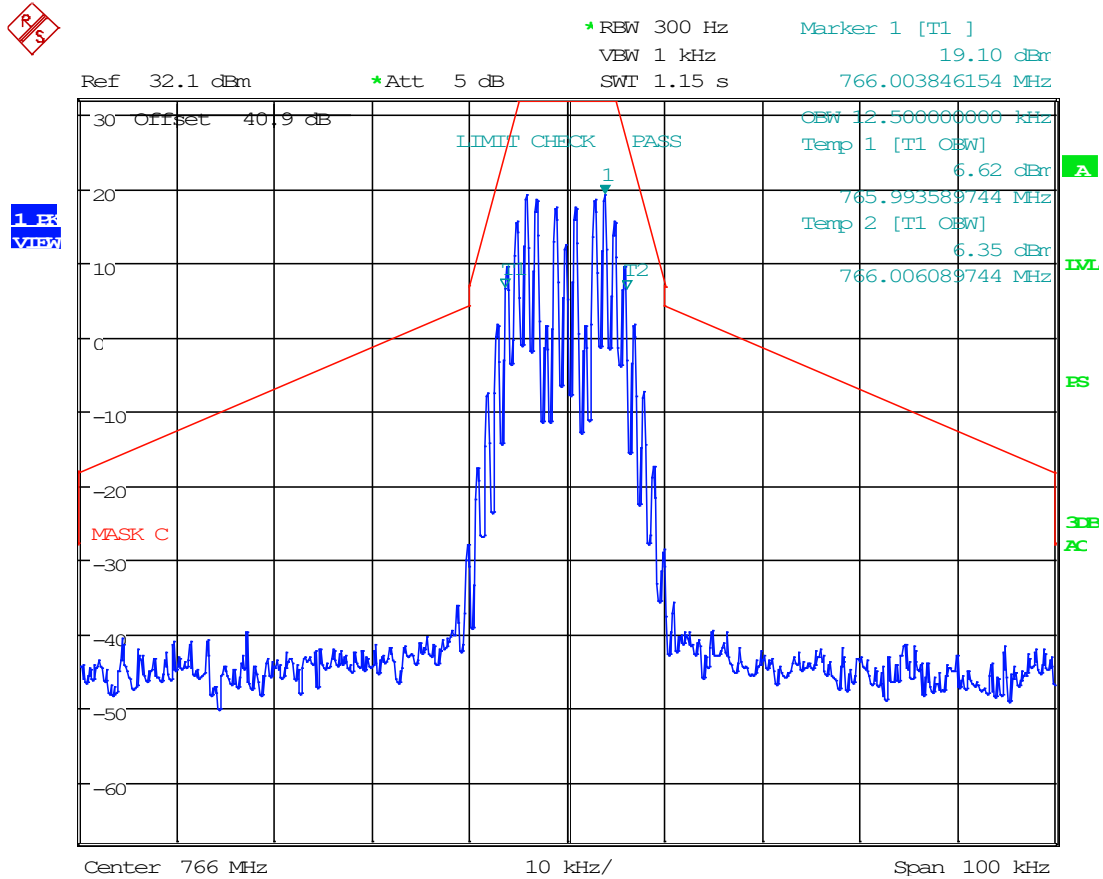

Date: 2.FEB.2023 10:45:21




8.5.24 25 kHz FM, DL Mask C, AGC+3, 766 MHz

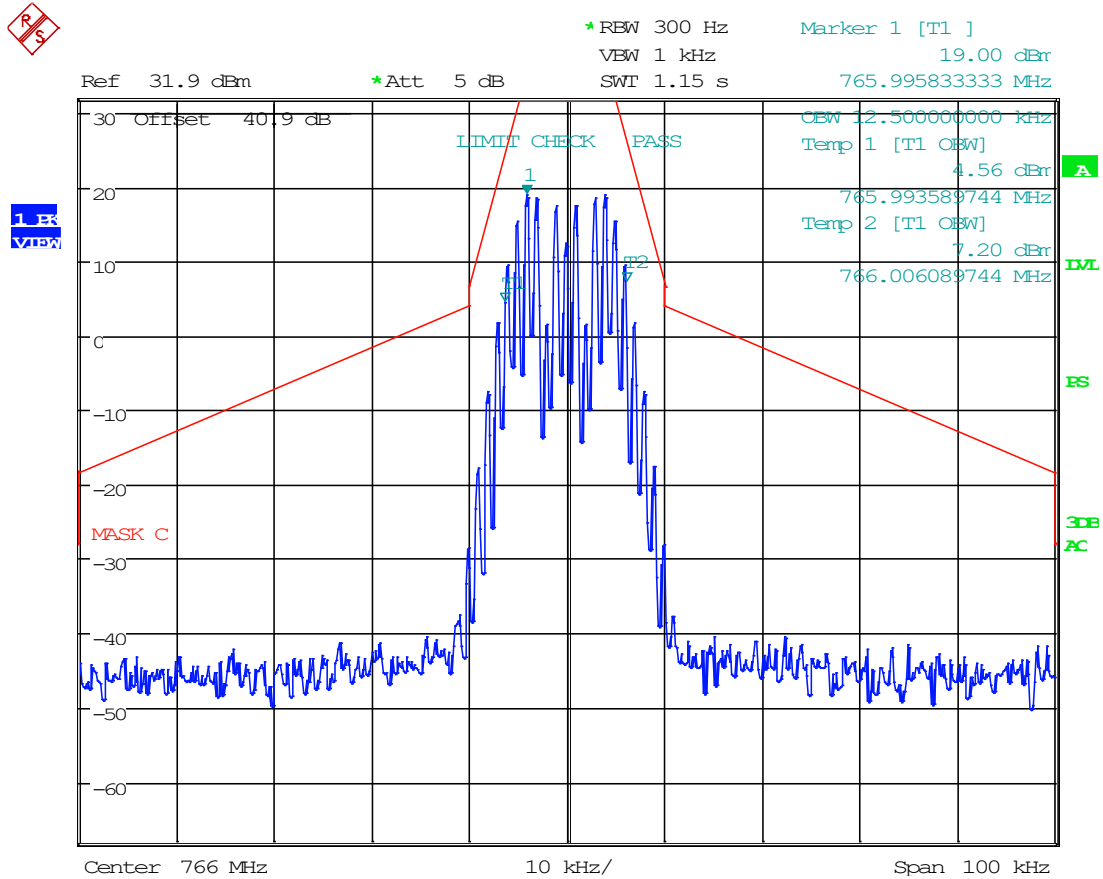

Date: 2.FEB.2023 12:07:09




8.5.25 C4FM, DL Mask C, AGC, 766 MHz

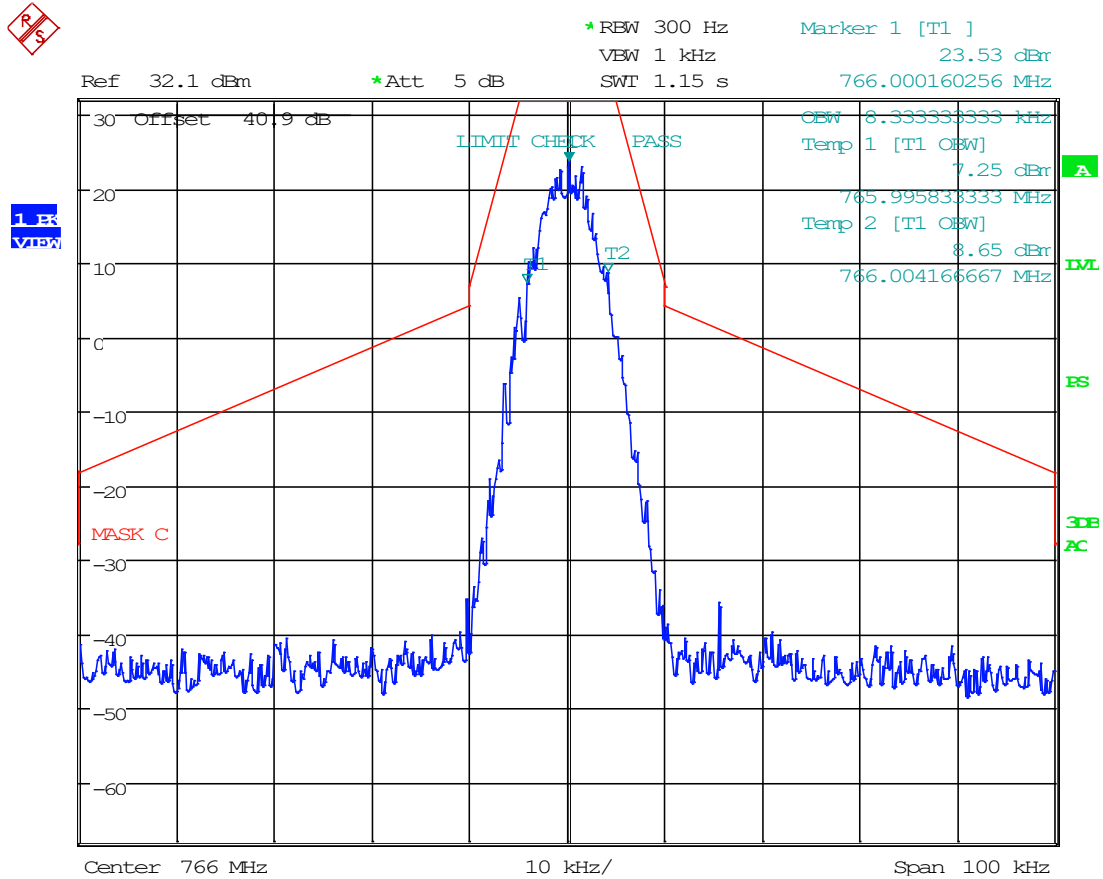

Date: 2.FEB.2023 10:46:23


8.5.26 C4FM, DL Mask C, AGC+3, 766 MHz

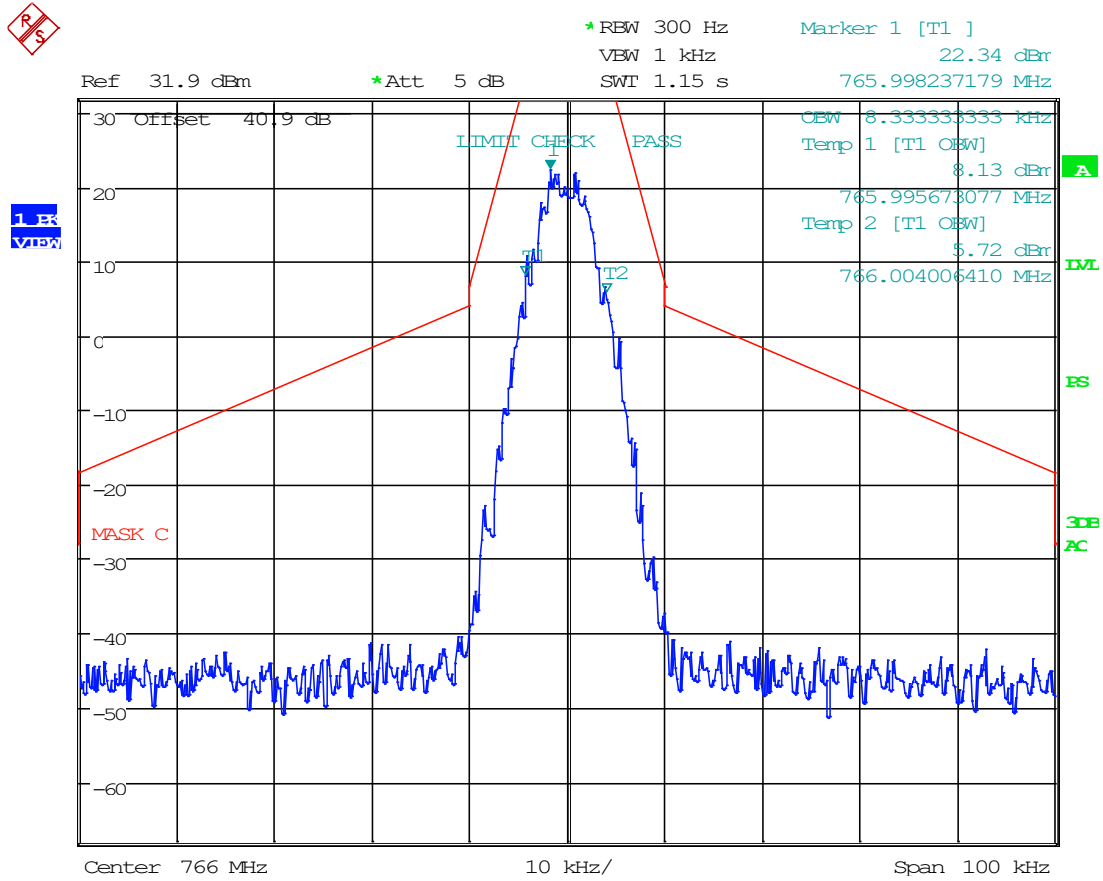

Date: 2.FEB.2023 12:07:55




8.5.27 H-CPM, DL Mask C, AGC, 766 MHz

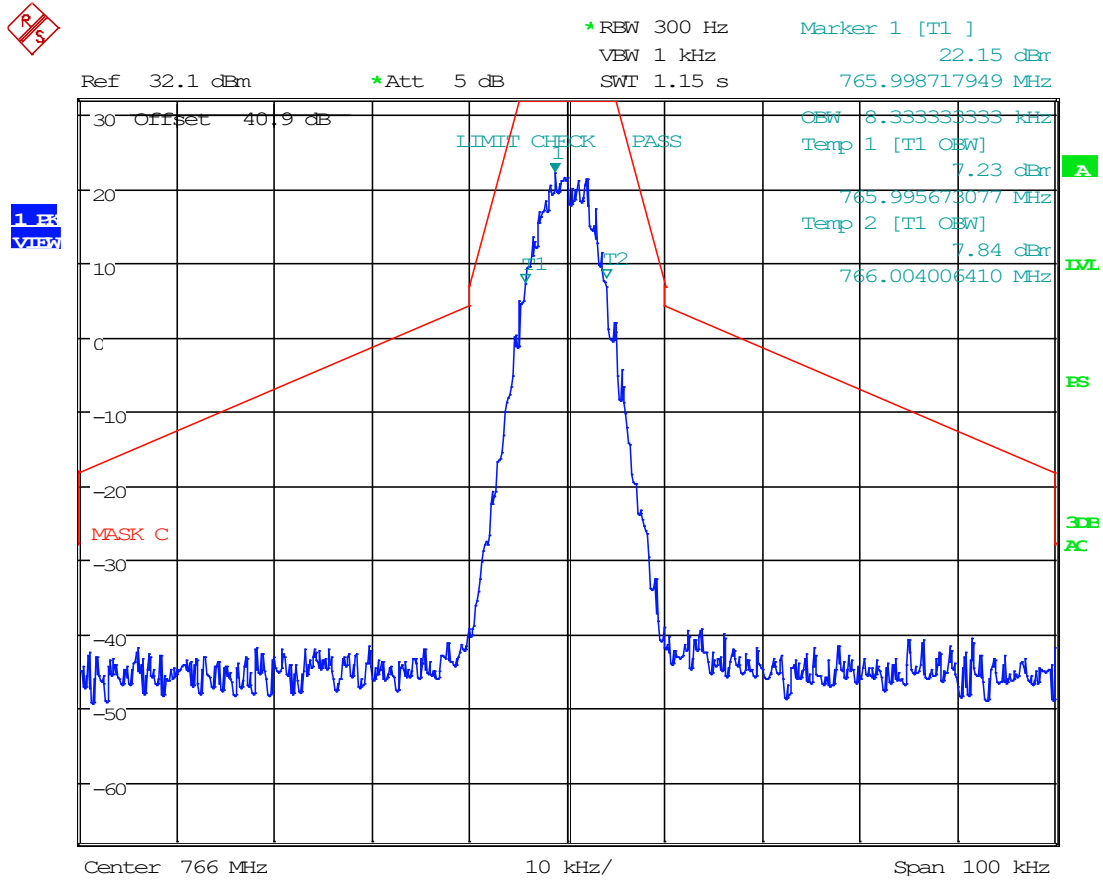

Date: 2.FEB.2023 10:47:41




8.5.28 H-CPM, DL Mask C, AGC+3, 766 MHz

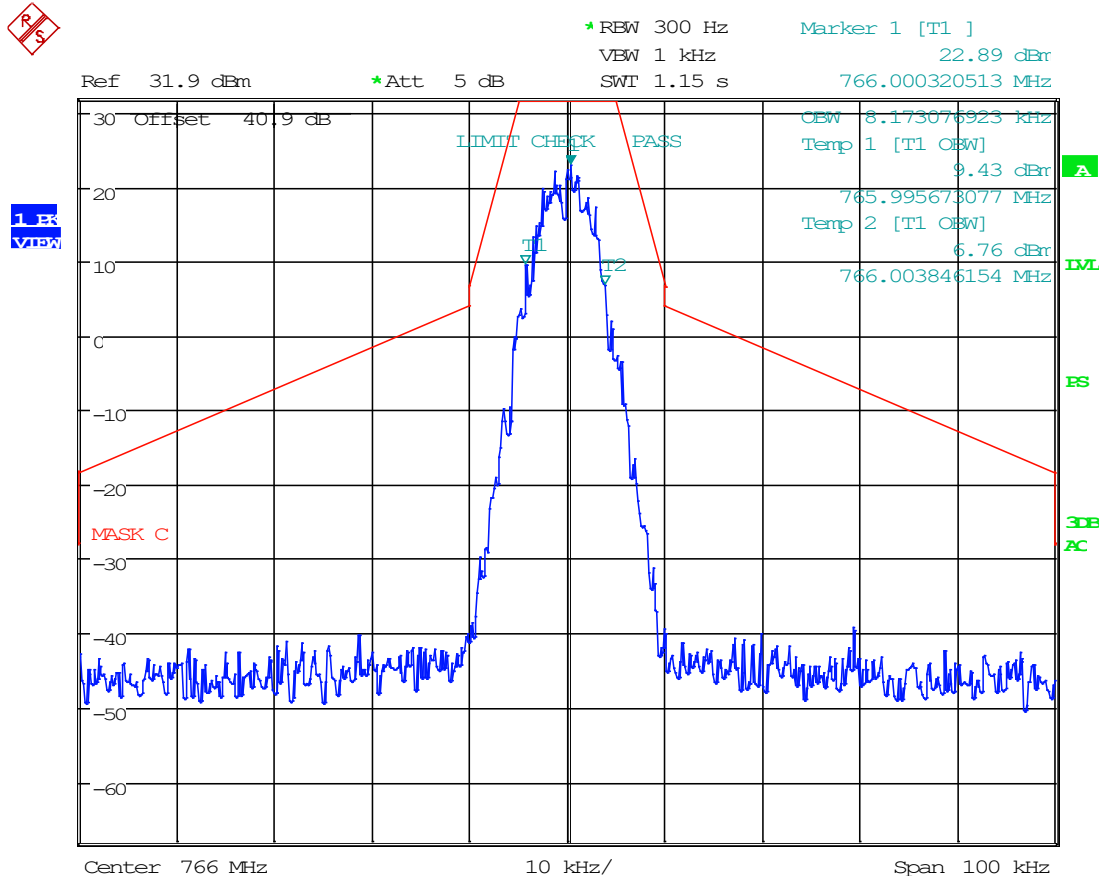

Date: 2.FEB.2023 12:08:46


8.5.29 H-DQPSK, DL Mask C, AGC, 766 MHz

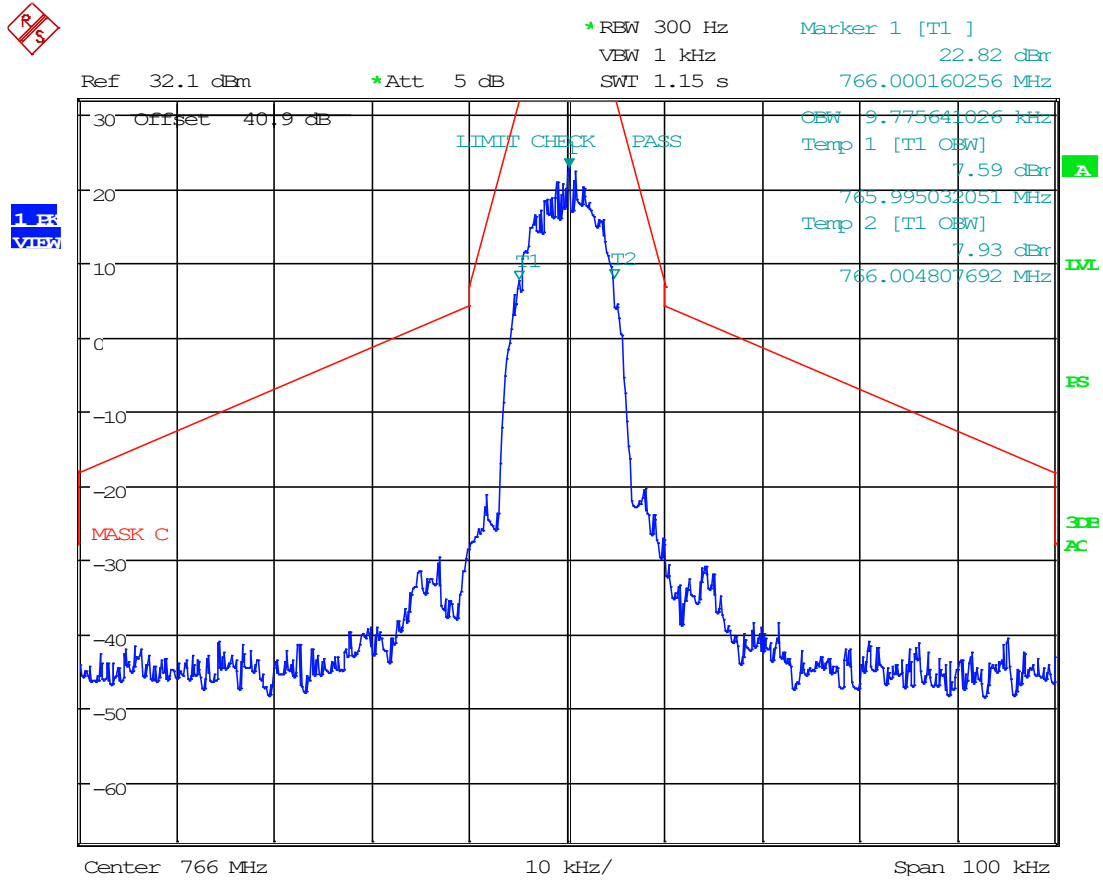

Date: 2.FEB.2023 10:49:10




8.5.30 H-DQPSK, DL Mask C, AGC+3, 766 MHz

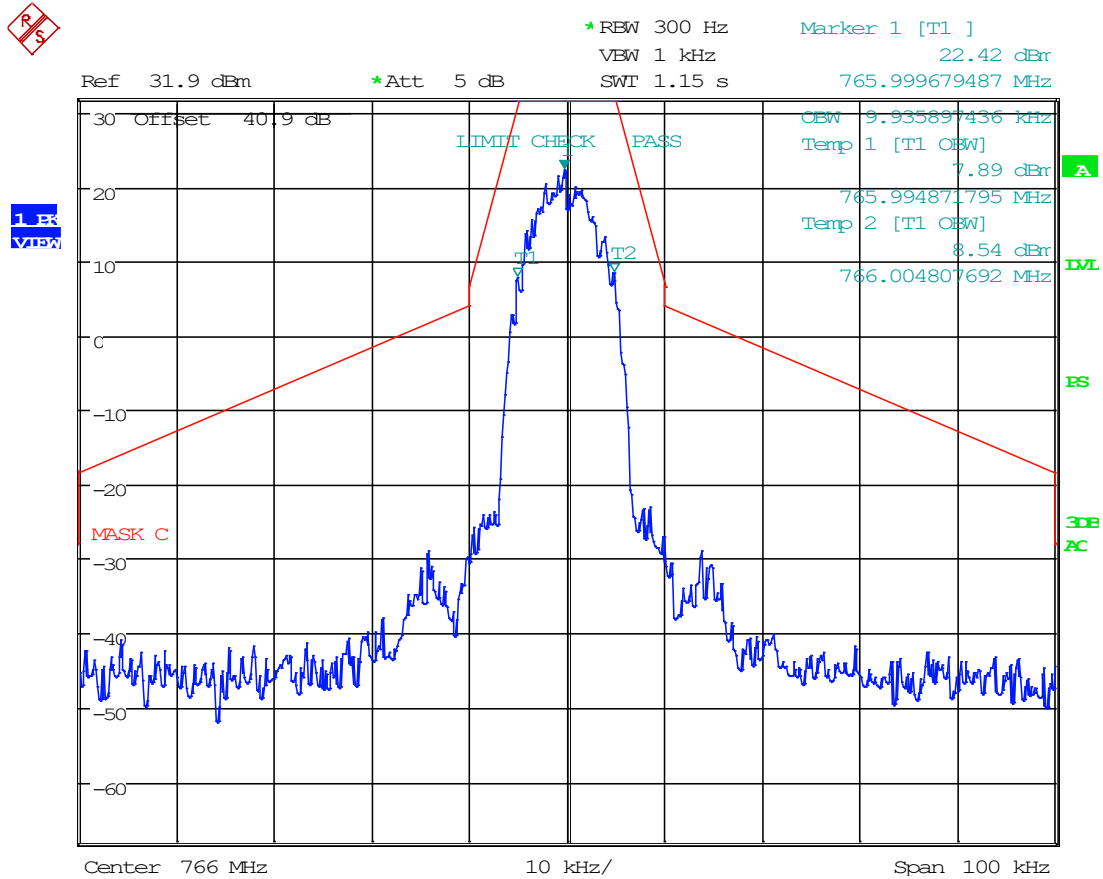

Date: 2.FEB.2023 12:09:25




8.5.31 6.25 kHz, FM, DL Mask C, AGC, 774.9875 MHz

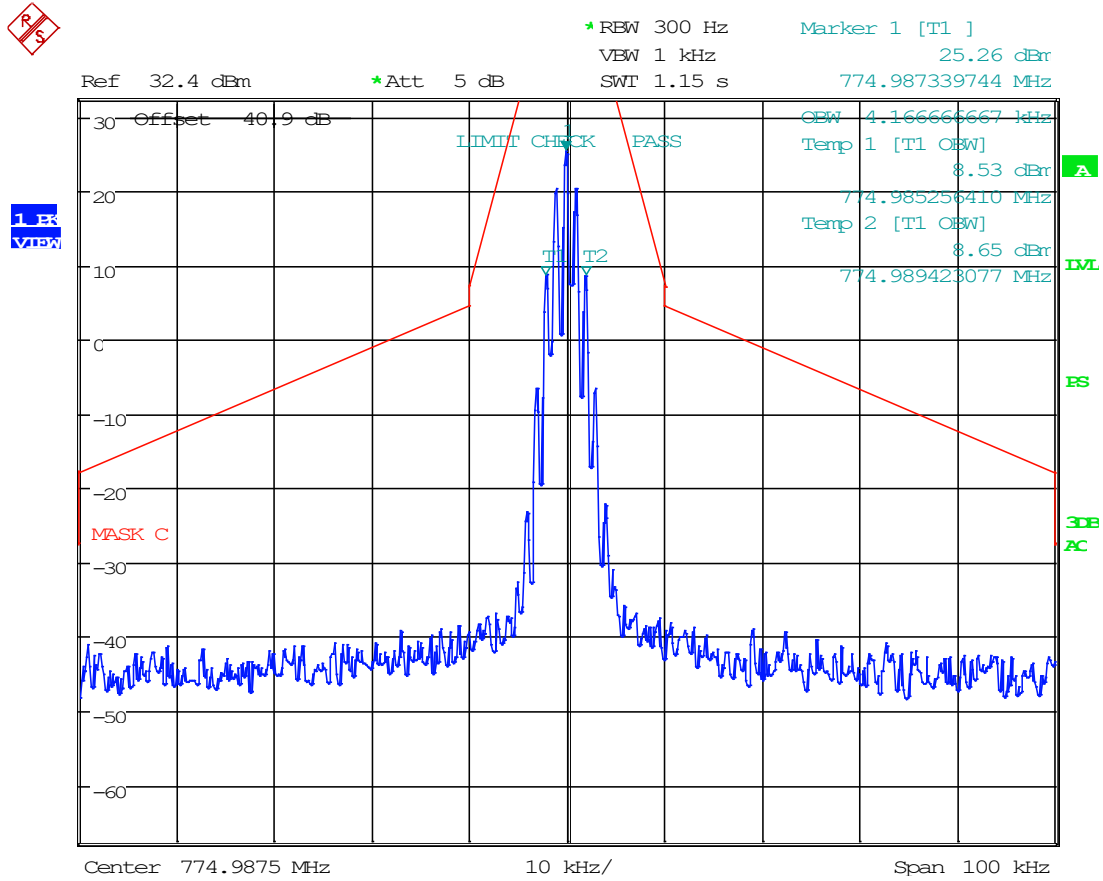

Date: 2.FEB.2023 14:17:33




8.5.32 6.25 kHz, FM, DL Mask C, AGC+3, 774.9875 MHz

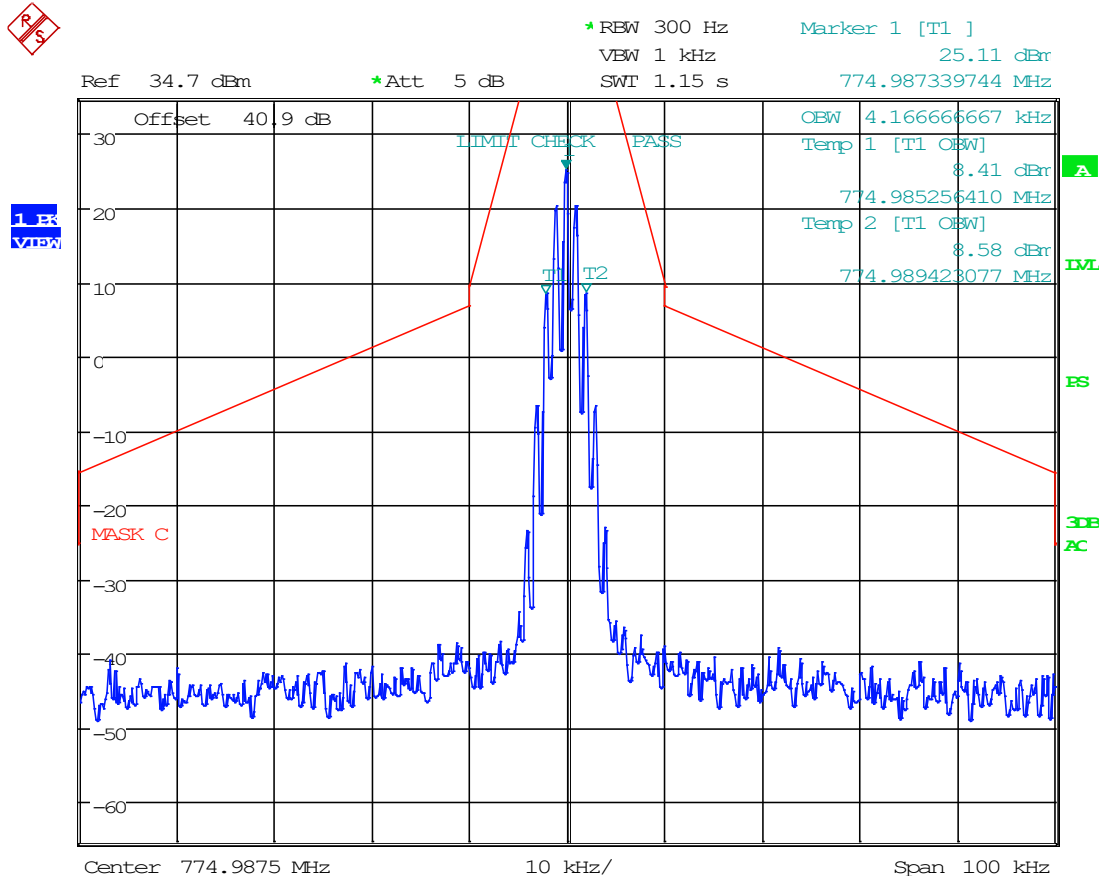

Date: 2.FEB.2023 12:11:01




8.5.33 12.5 kHz, FM, DL Mask C, AGC, 774.9875 MHz

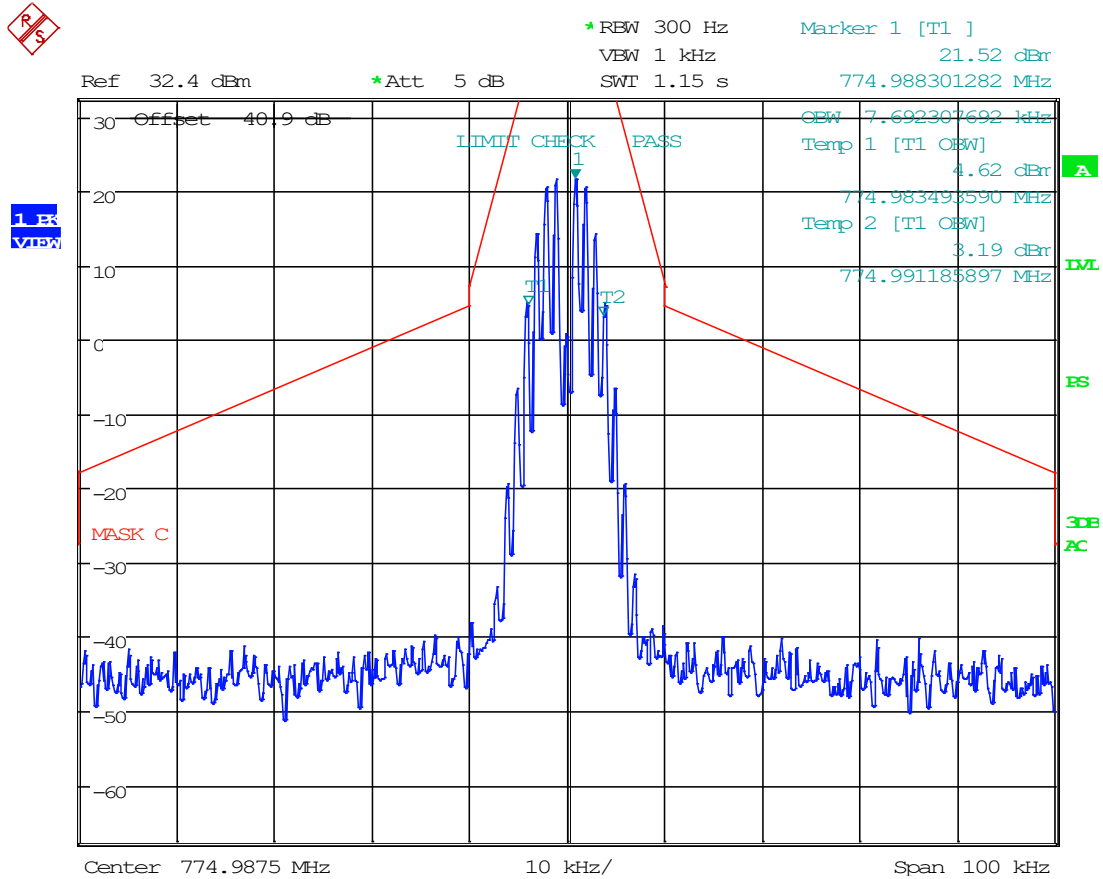

Date: 2.FEB.2023 14:18:42




8.5.34 12.5 kHz, FM, DL Mask C, AGC+3, 774.9875 MHz

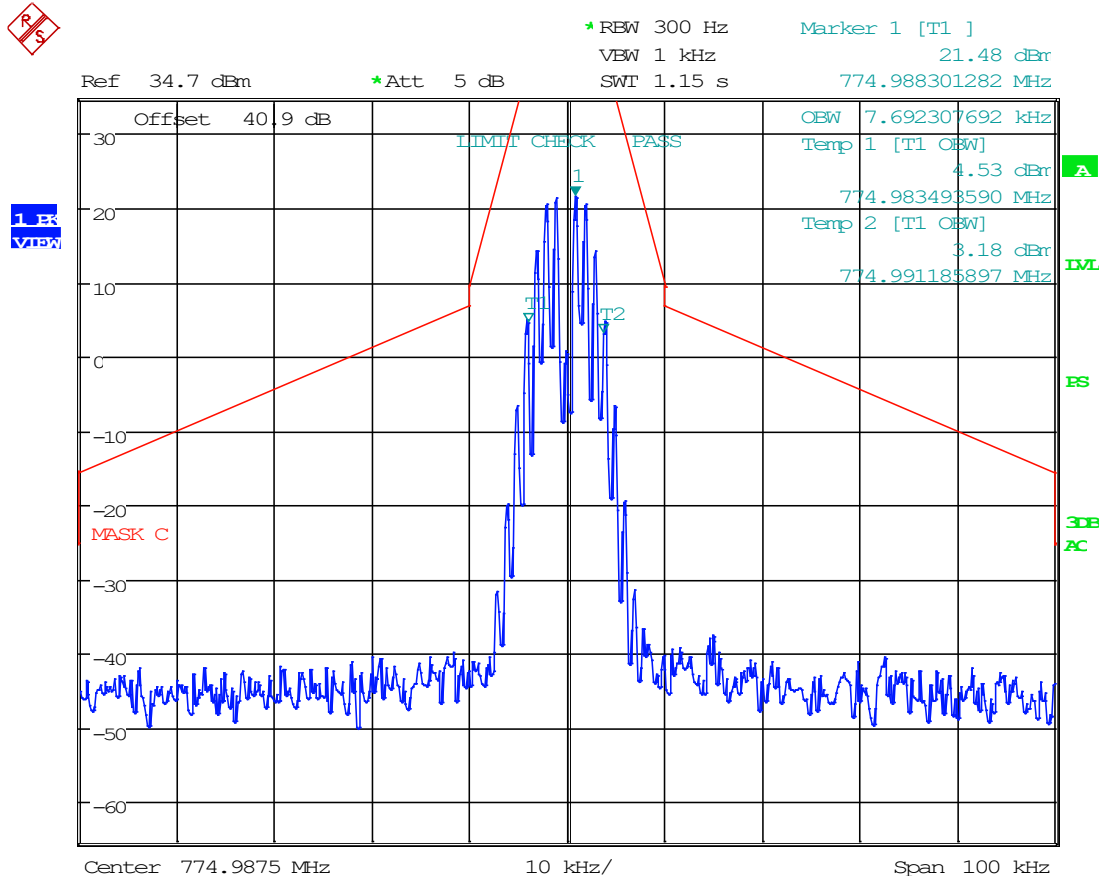

Date: 2.FEB.2023 12:11:44




8.5.35 25 kHz FM, DL Mask C, AGC, 774.9875 MHz

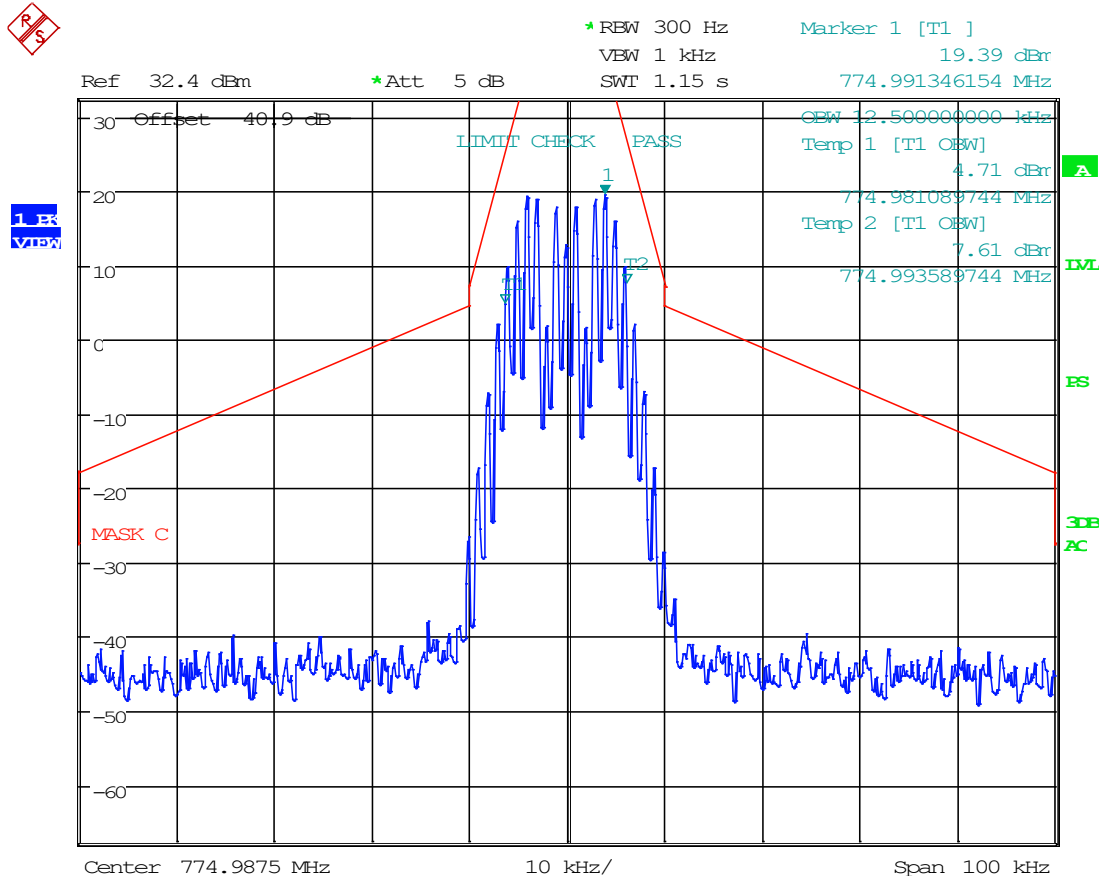

Date: 2.FEB.2023 14:19:23




8.5.36 25 kHz FM, DL Mask C, AGC+3, 774.9875 MHz

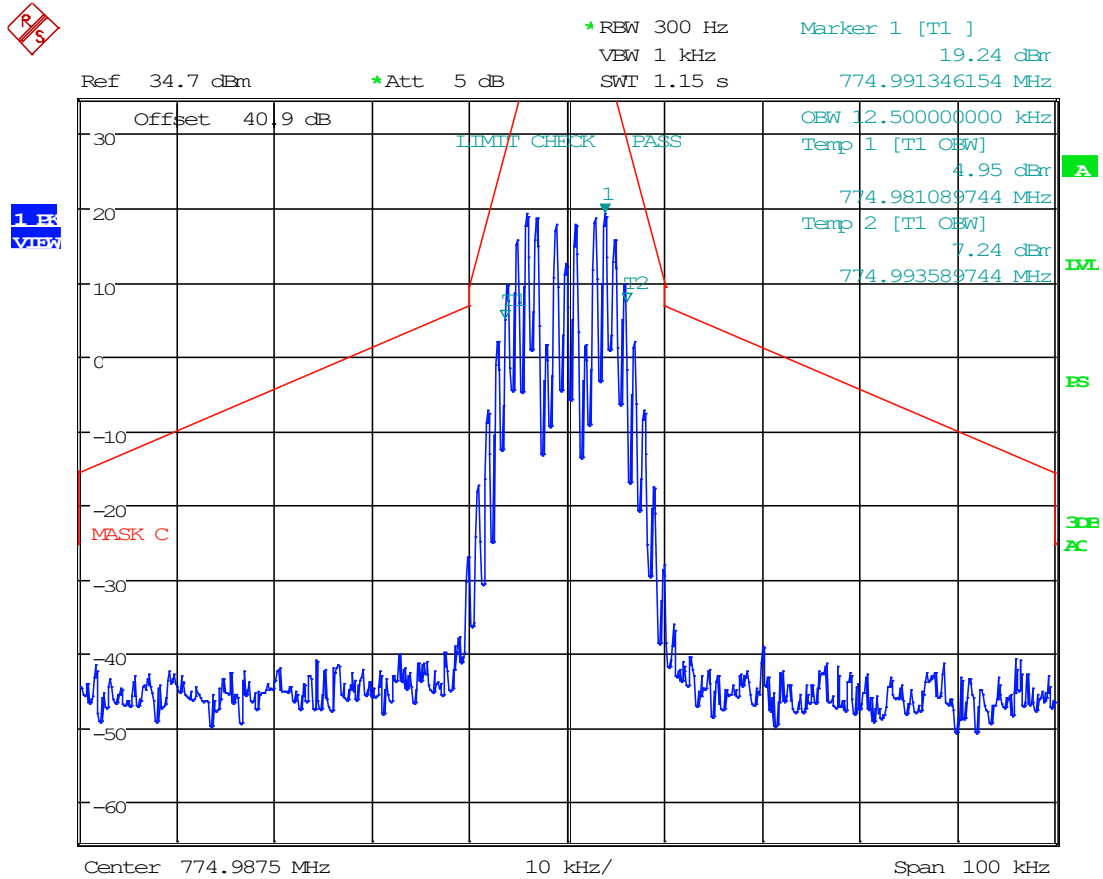

Date: 2.FEB.2023 12:12:24




8.5.37 C4FM, DL Mask C, AGC, 774.9875 MHz

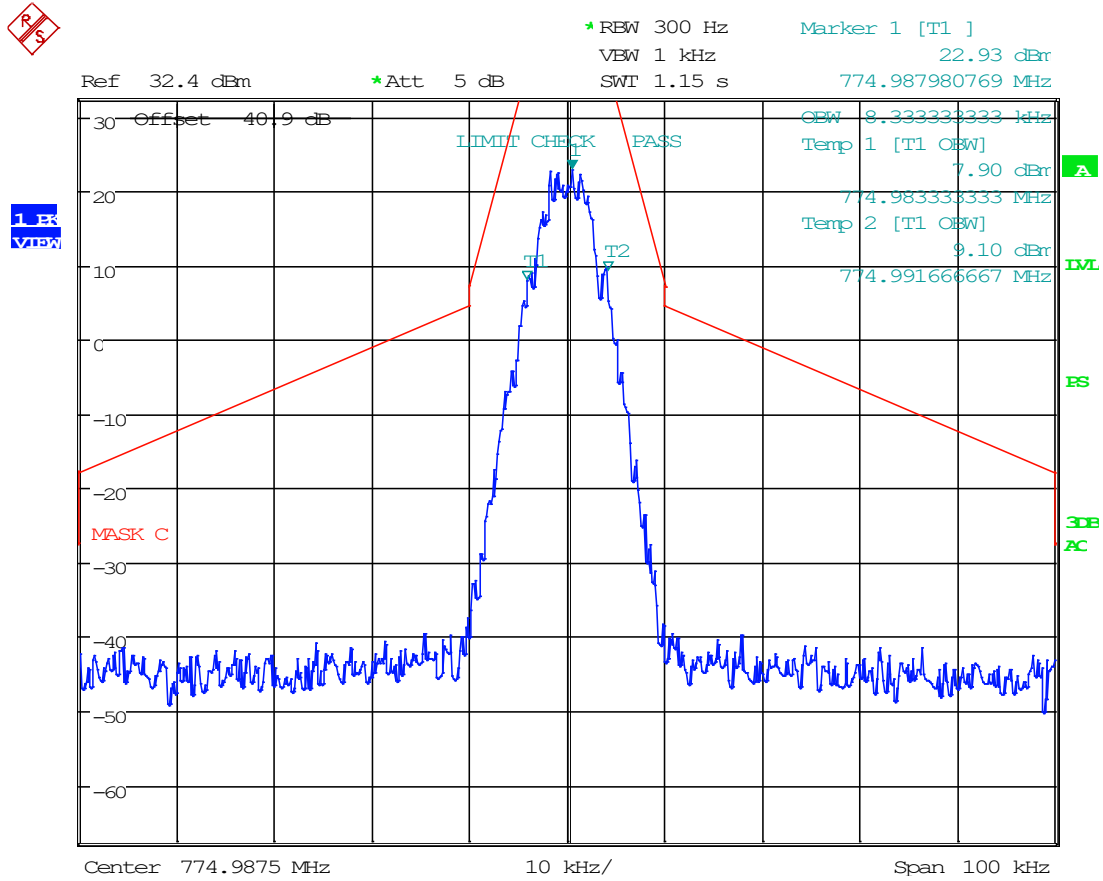

Date: 2.FEB.2023 14:20:18




8.5.38 C4FM, DL Mask C, AGC+3, 774.9875 MHz

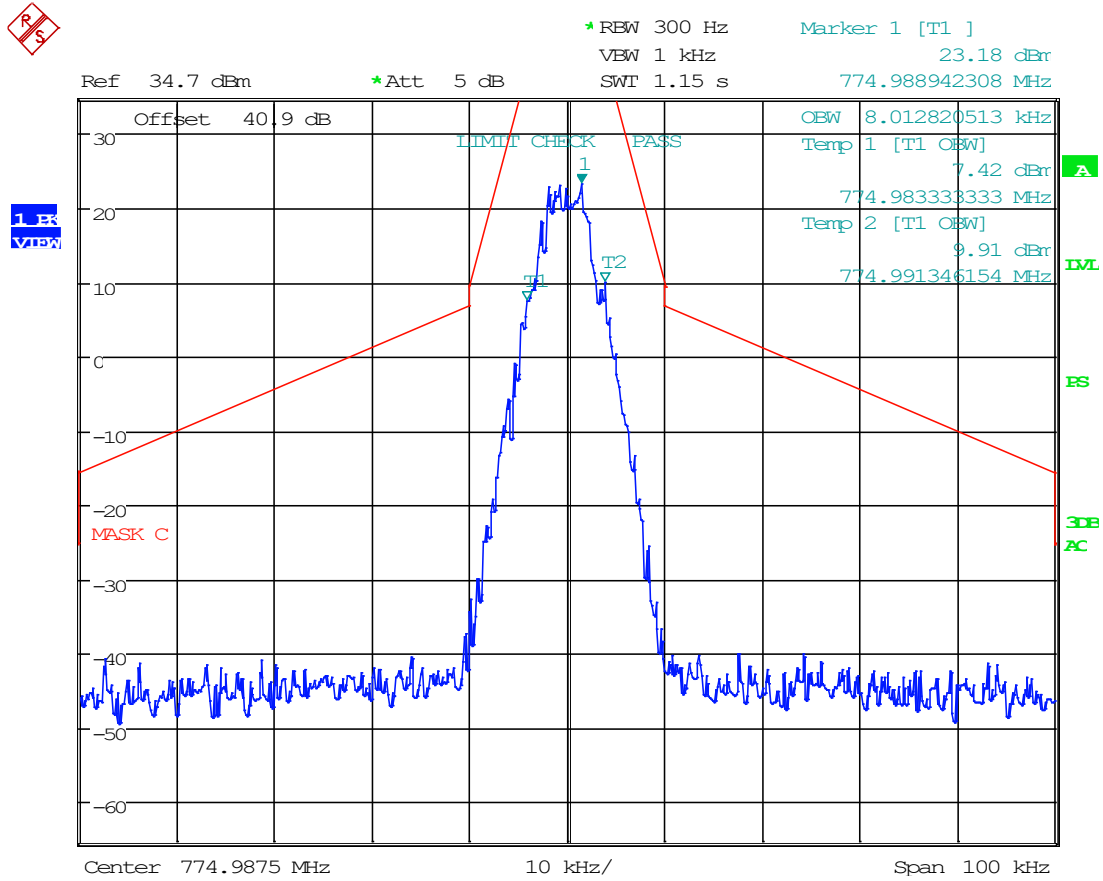

Date: 2.FEB.2023 12:13:11




8.5.39 H-CPM, DL Mask C, AGC, 774.9875 MHz

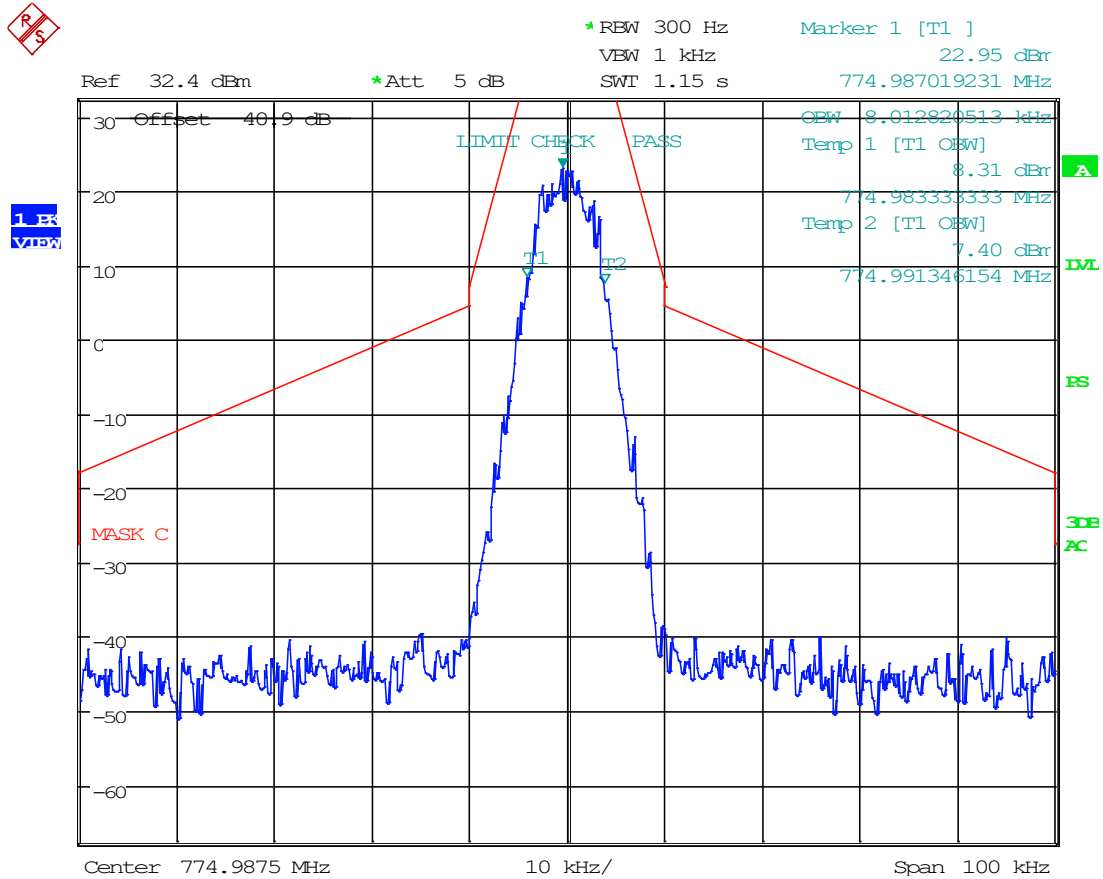

Date: 2.FEB.2023 14:21:14




8.5.40 H-CPM, DL Mask C, AGC+3, 774.9875 MHz

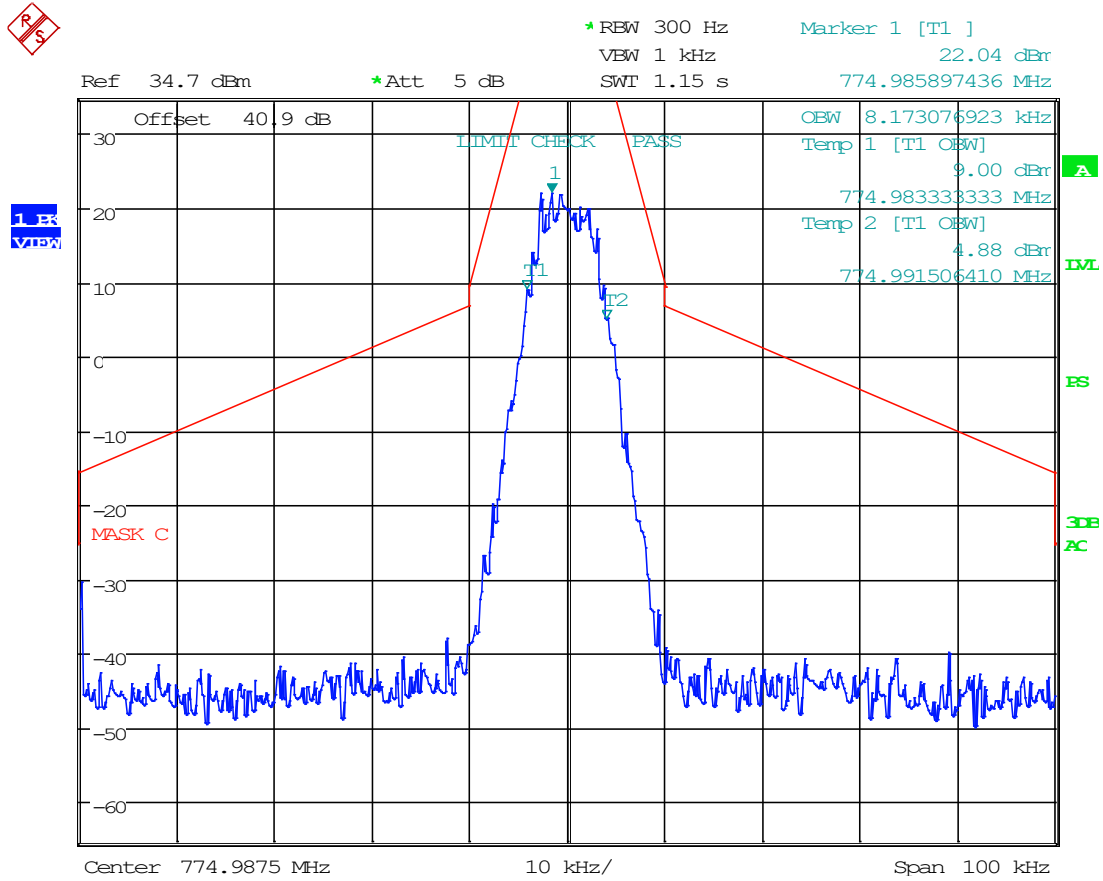

Date: 2.FEB.2023 12:13:54




8.5.41 H-DQPSK, DL Mask C, AGC, 774.9875 MHz

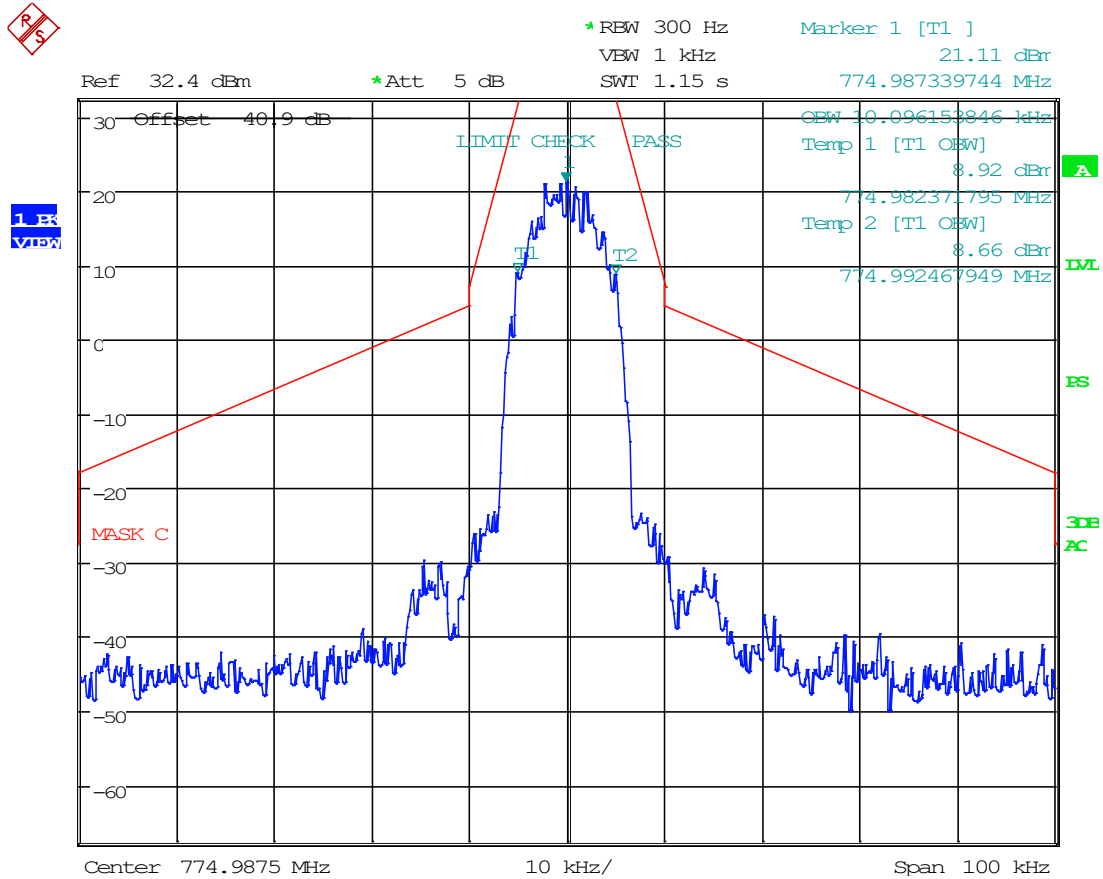

Date: 2.FEB.2023 14:21:59



8.5.42 H-DQPSK, DL Mask C, AGC+3, 774.9875 MHz

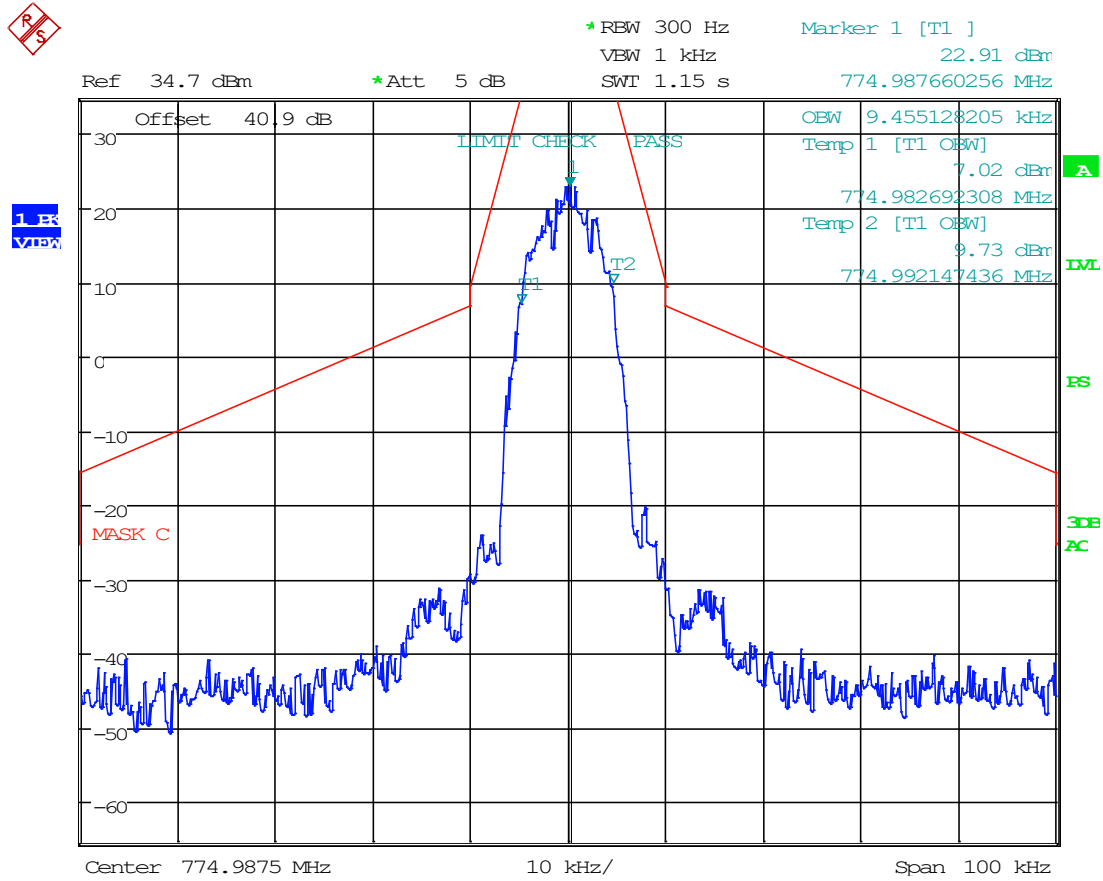


Date: 2.FEB.2023 12:14:31

V




8.5.43 6.25 kHz, FM, DL Mask H, AGC, 851.0125 MHz

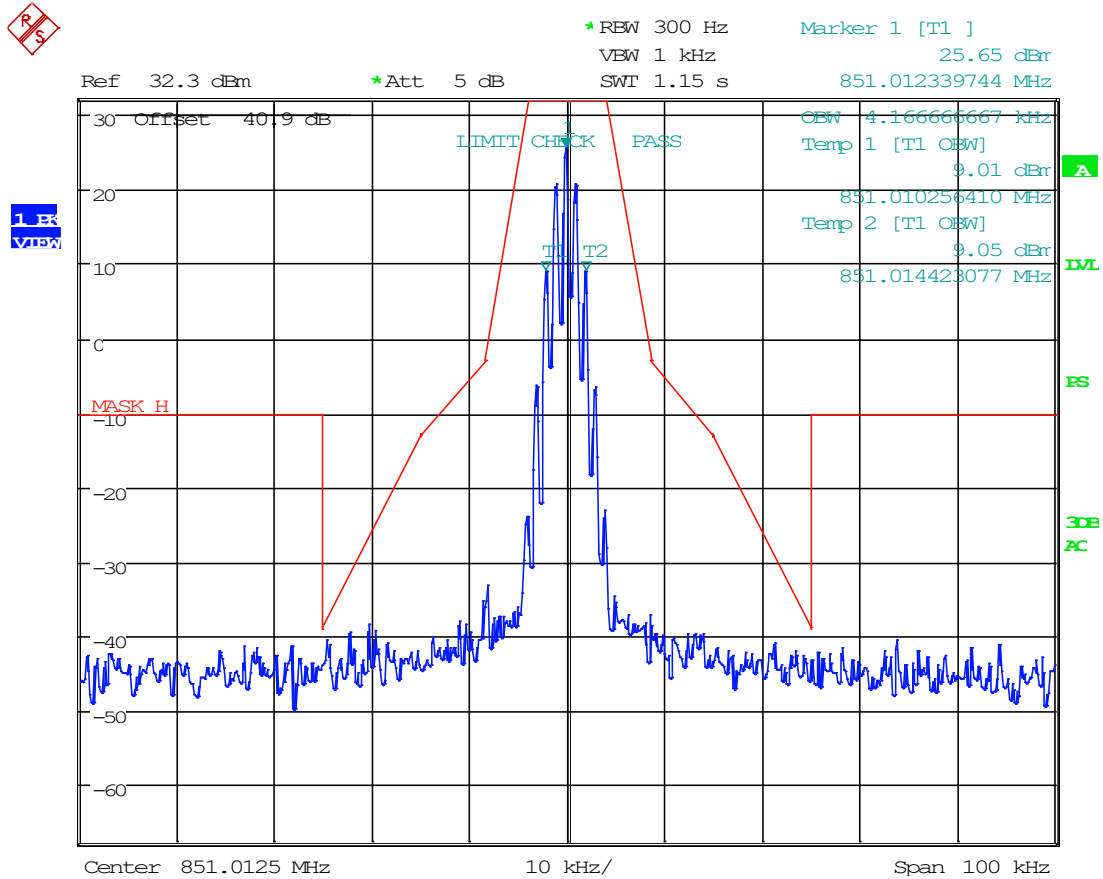

Date: 2.FEB.2023 14:50:41




8.5.44 6.25 kHz, FM, DL Mask H, AGC+3, 851.0125 MHz

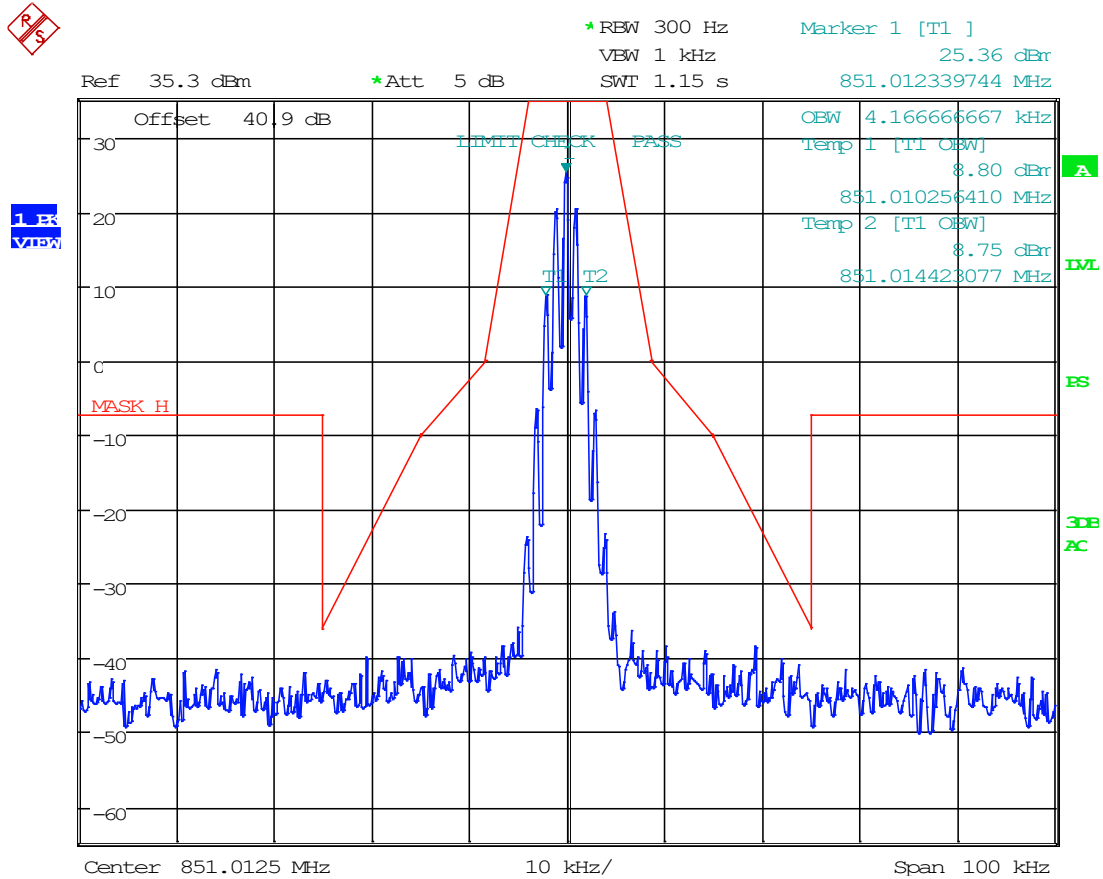

Date: 2.FEB.2023 14:56:31




8.5.45 12.5 kHz, FM, DL Mask H, AGC, 851.0125 MHz

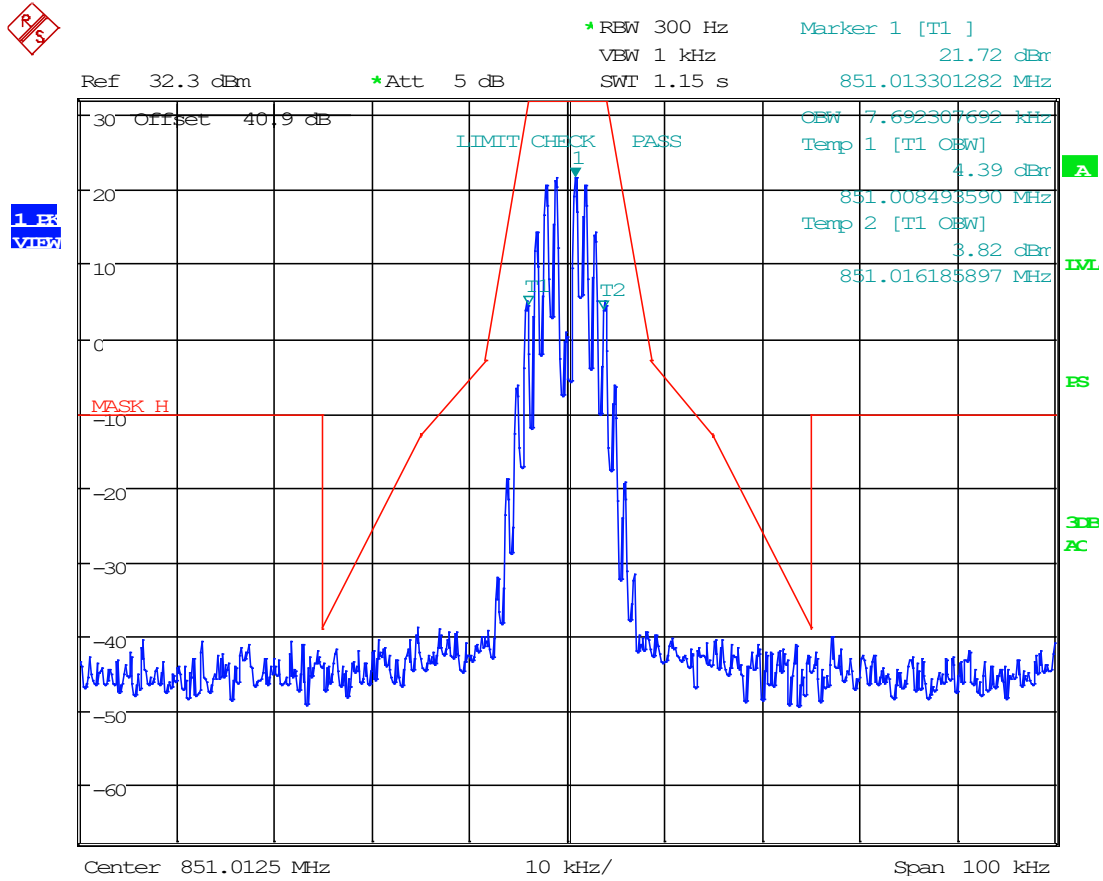

Date: 2.FEB.2023 14:51:38




8.5.46 12.5 kHz, FM, DL Mask H, AGC+3, 851.0125 MHz

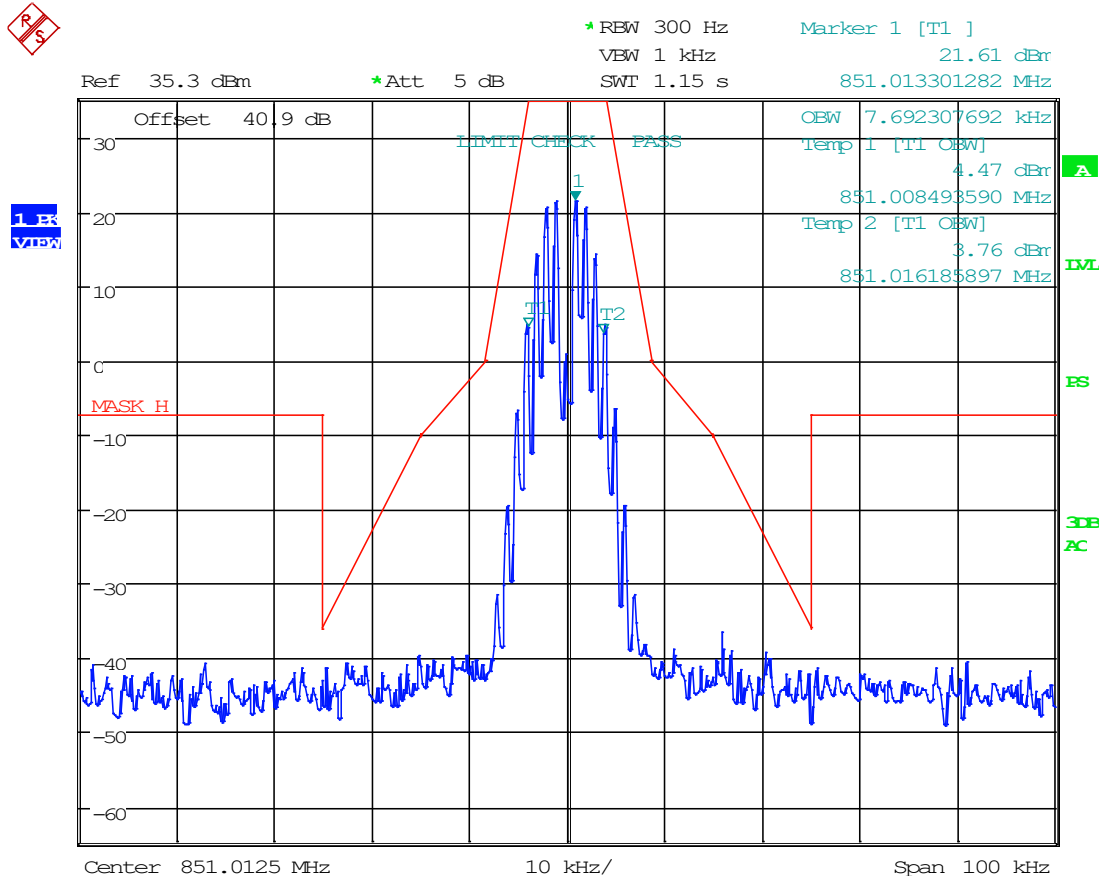

Date: 2.FEB.2023 14:57:20




8.5.47 25 kHz FM, DL Mask H, AGC, 851.0125 MHz

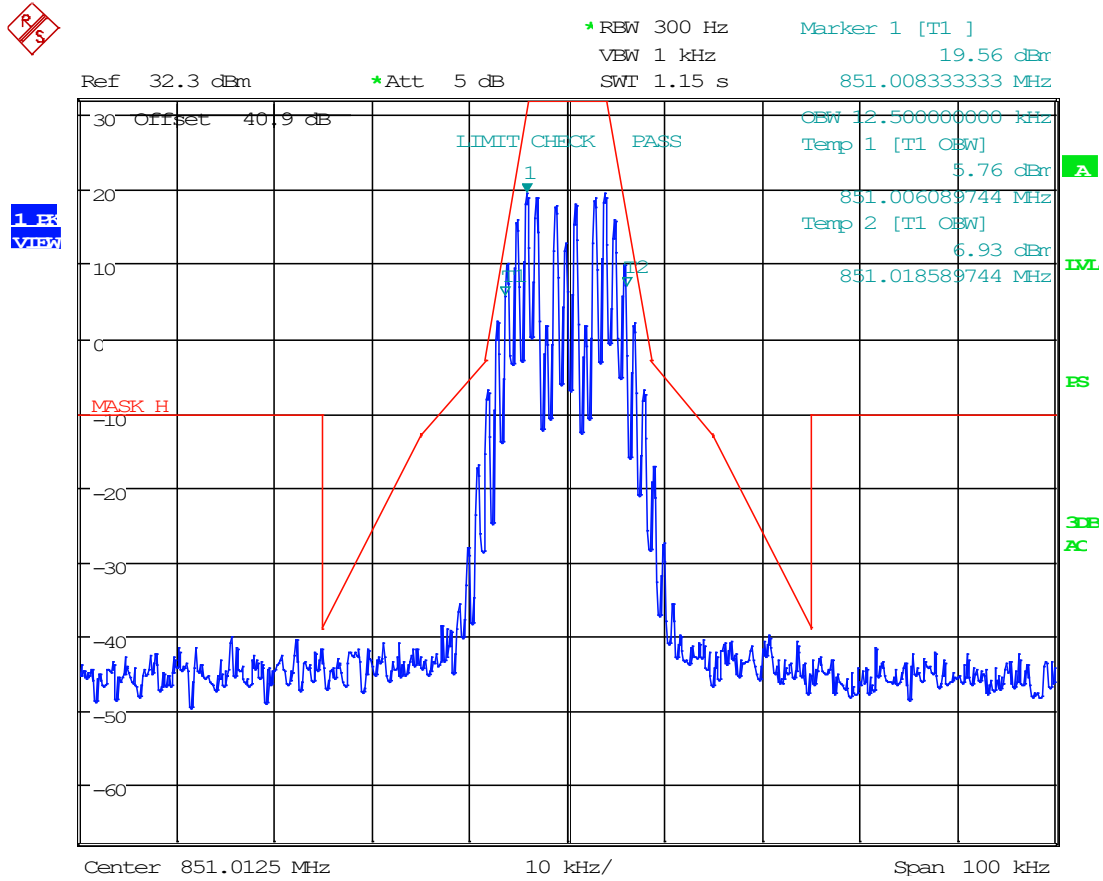

Date: 2.FEB.2023 14:52:36




8.5.48 25 kHz FM, DL Mask H, AGC+3, 851.0125 MHz

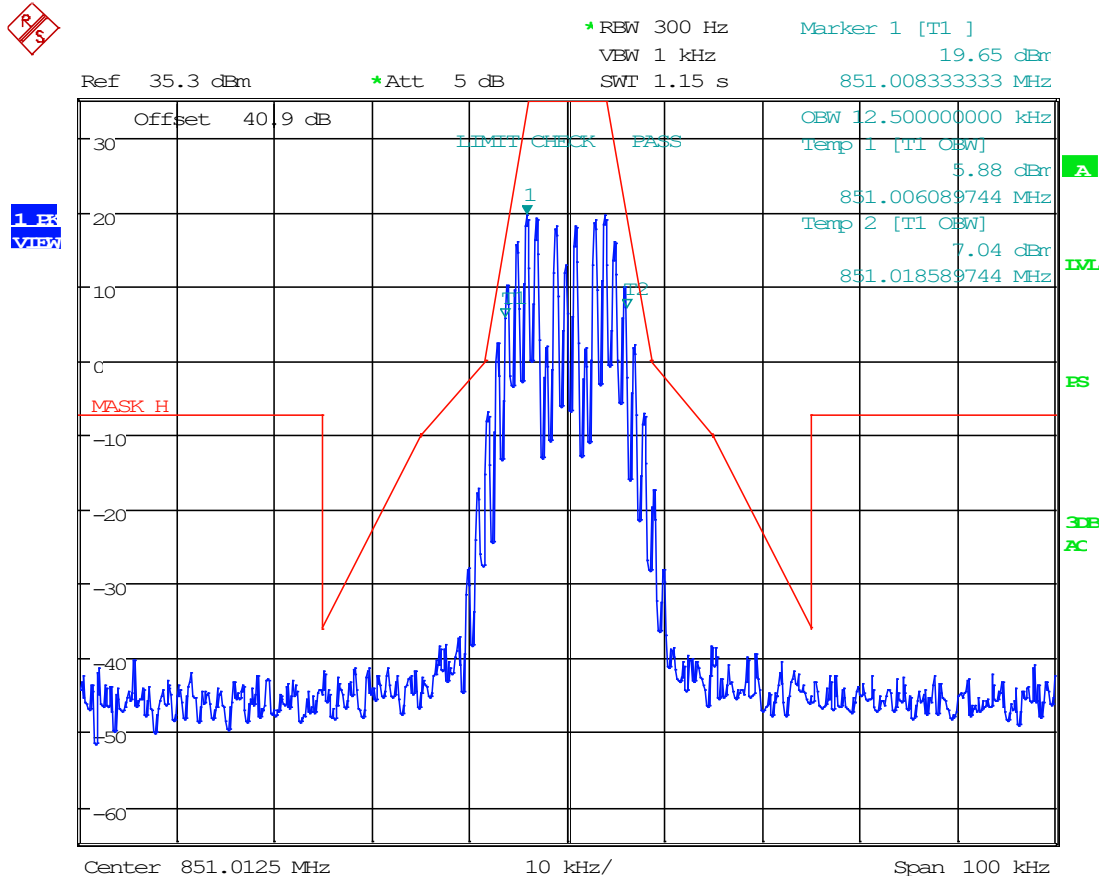

Date: 2.FEB.2023 14:58:02




8.5.49 C4FM, DL Mask H, AGC, 851.0125 MHz

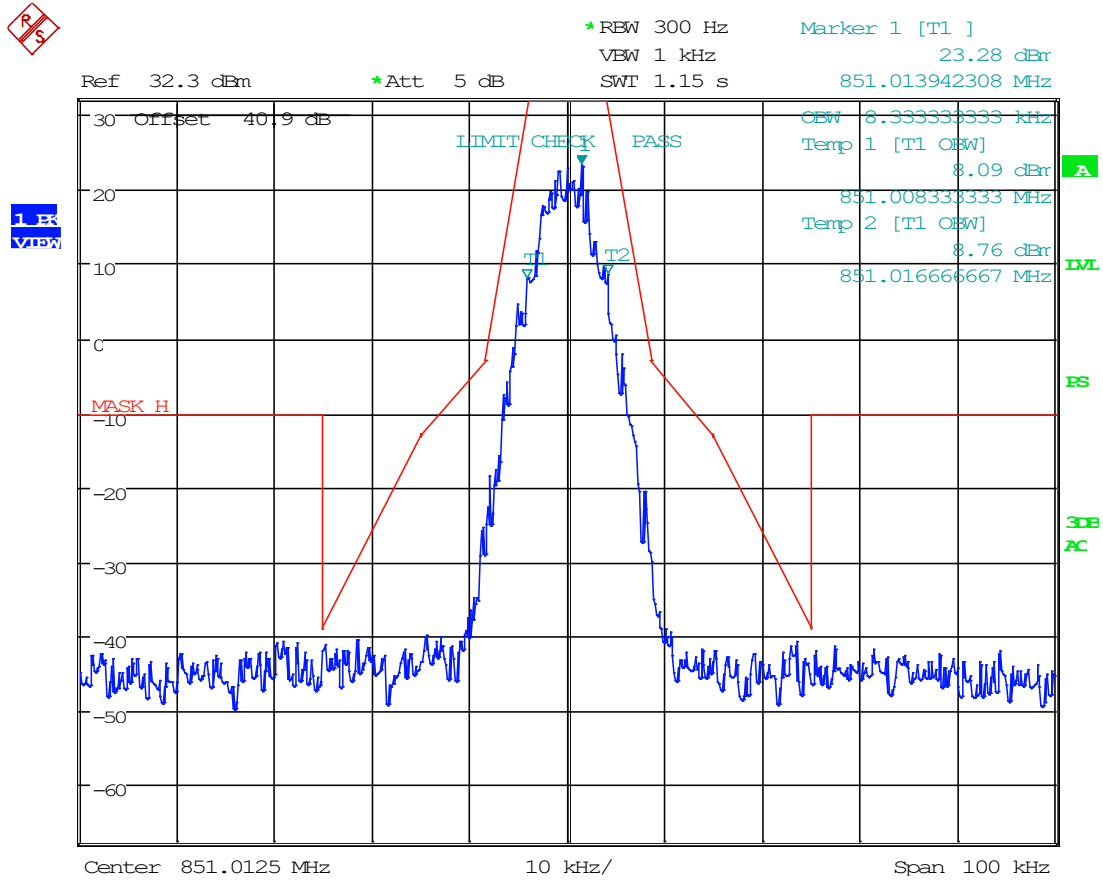

Date: 2.FEB.2023 14:53:29




8.5.50 C4FM, DL Mask H, AGC+3, 851.0125 MHz

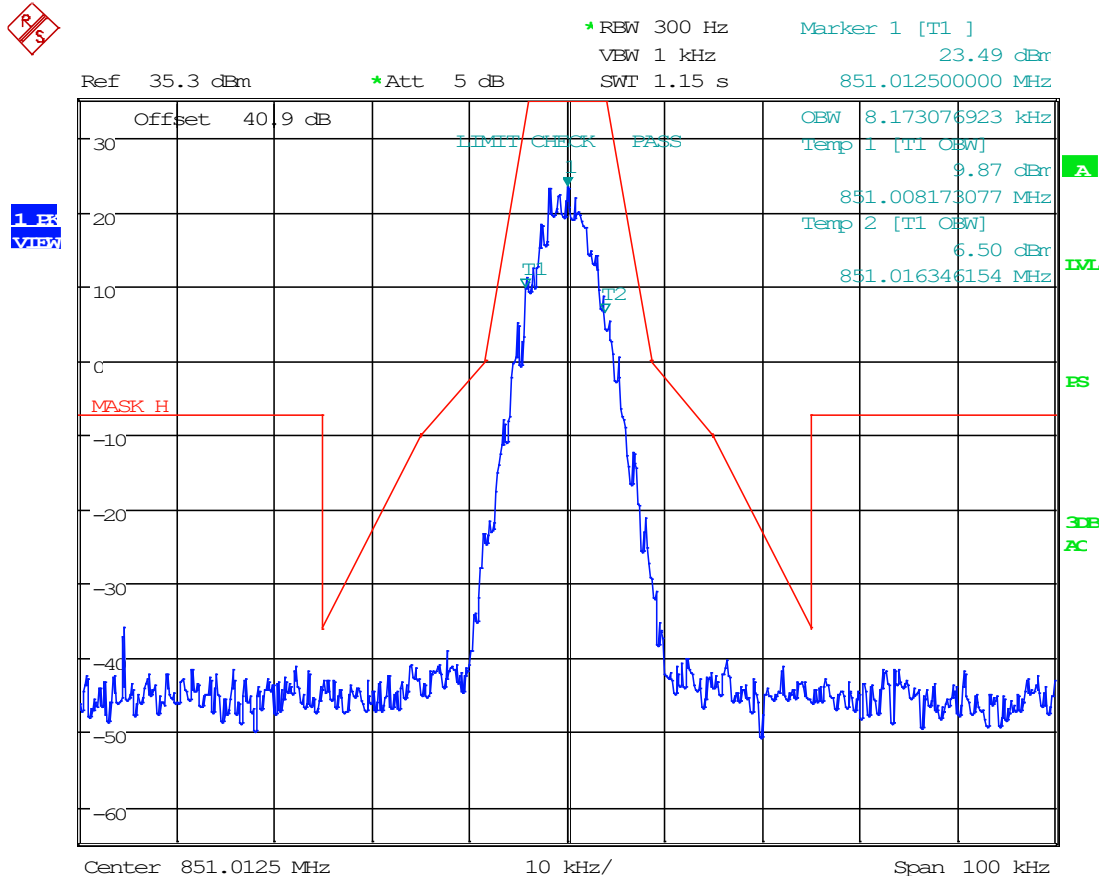

Date: 2.FEB.2023 14:58:51




8.5.51 H-CPM, DL Mask H, AGC, 851.0125 MHz

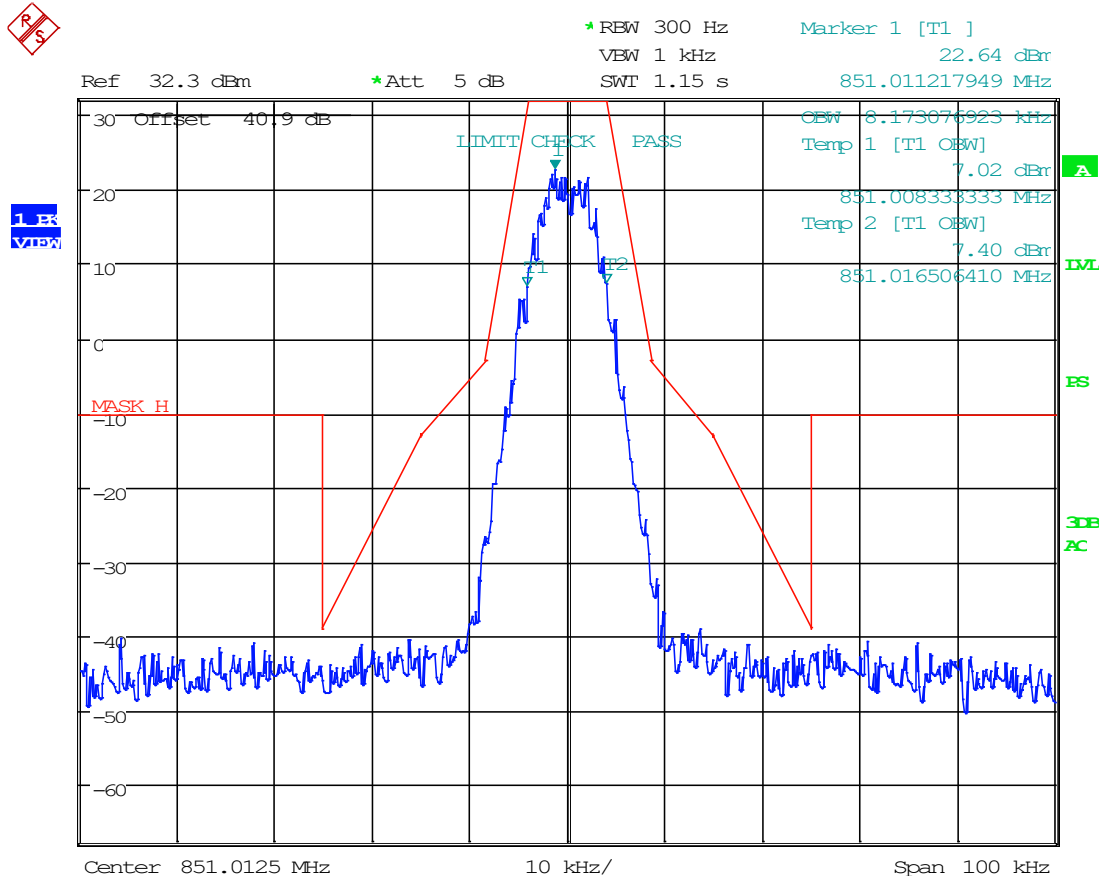

Date: 2.FEB.2023 14:54:11




8.5.52 H-CPM, DL Mask H, AGC+3, 851.0125 MHz

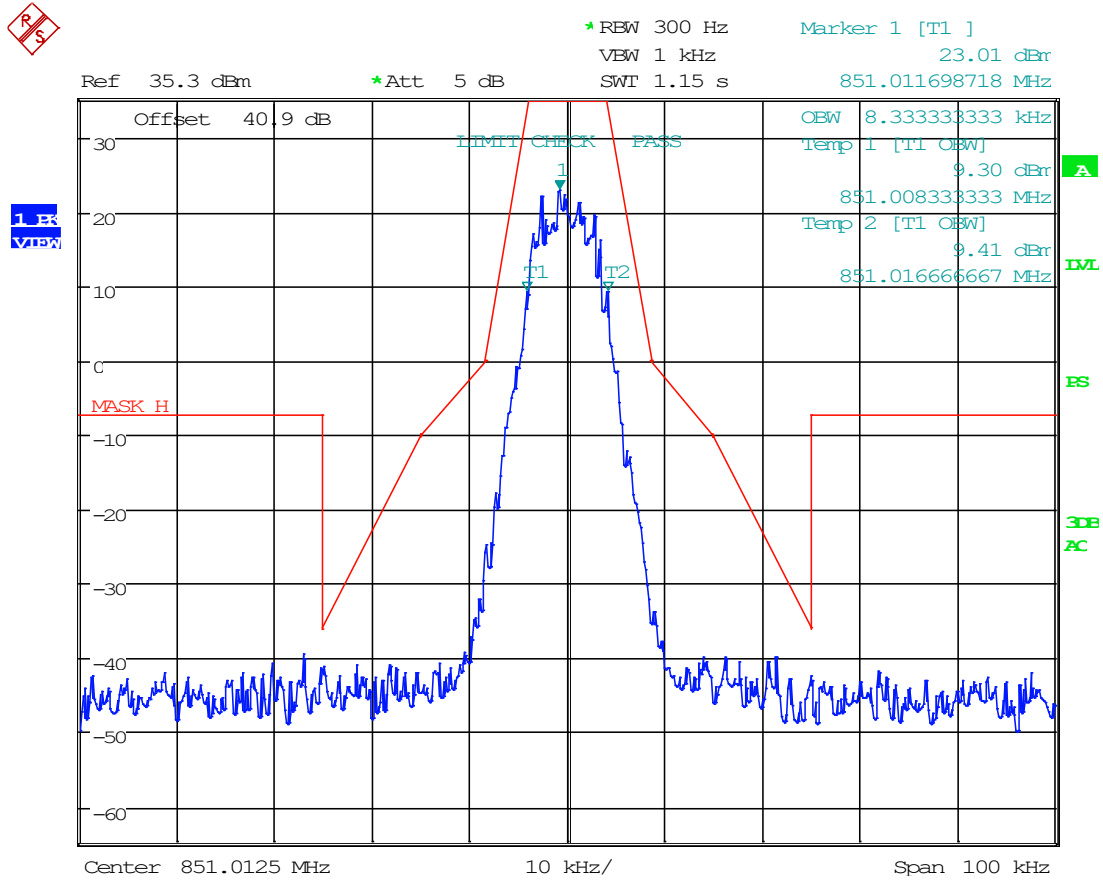

Date: 2.FEB.2023 14:59:40




8.5.53 H-DQPSK, DL Mask H, AGC, 851.0125 MHz

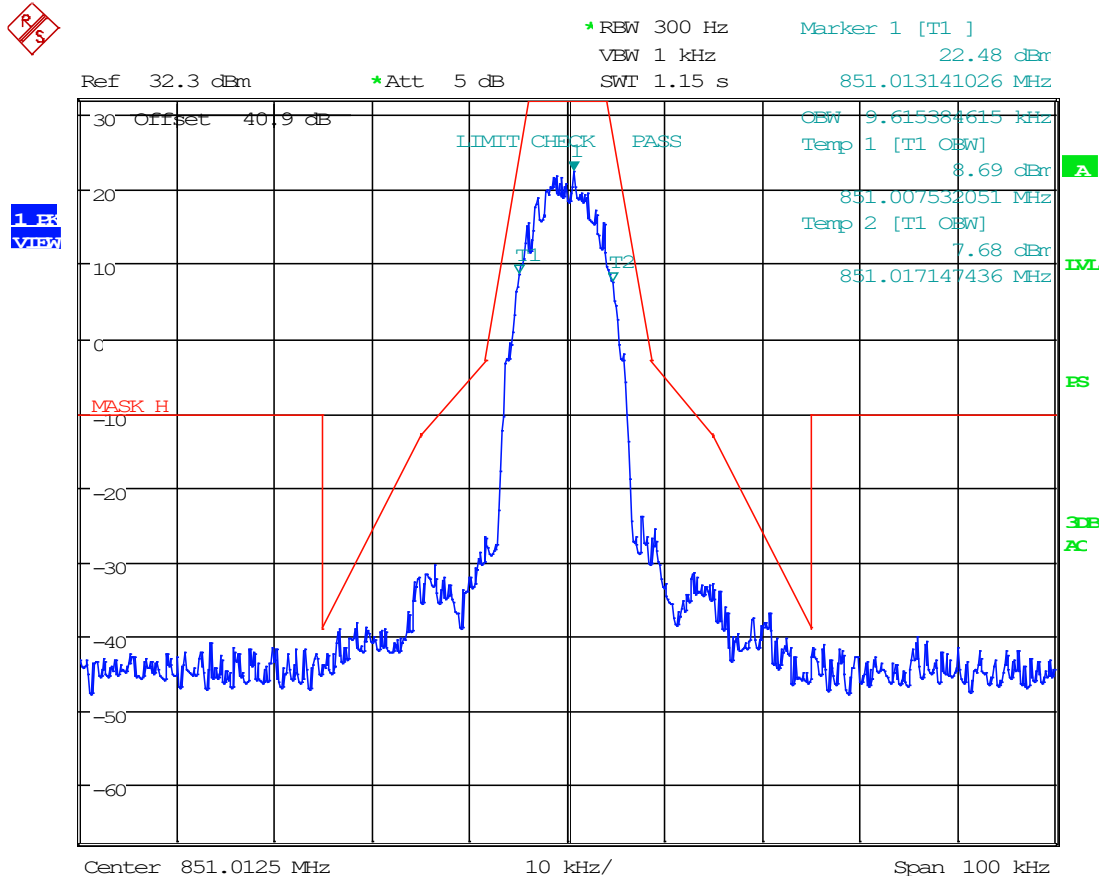

Date: 2.FEB.2023 14:55:24




8.5.54 H-DQPSK, DL Mask H, AGC+3, 851.0125 MHz

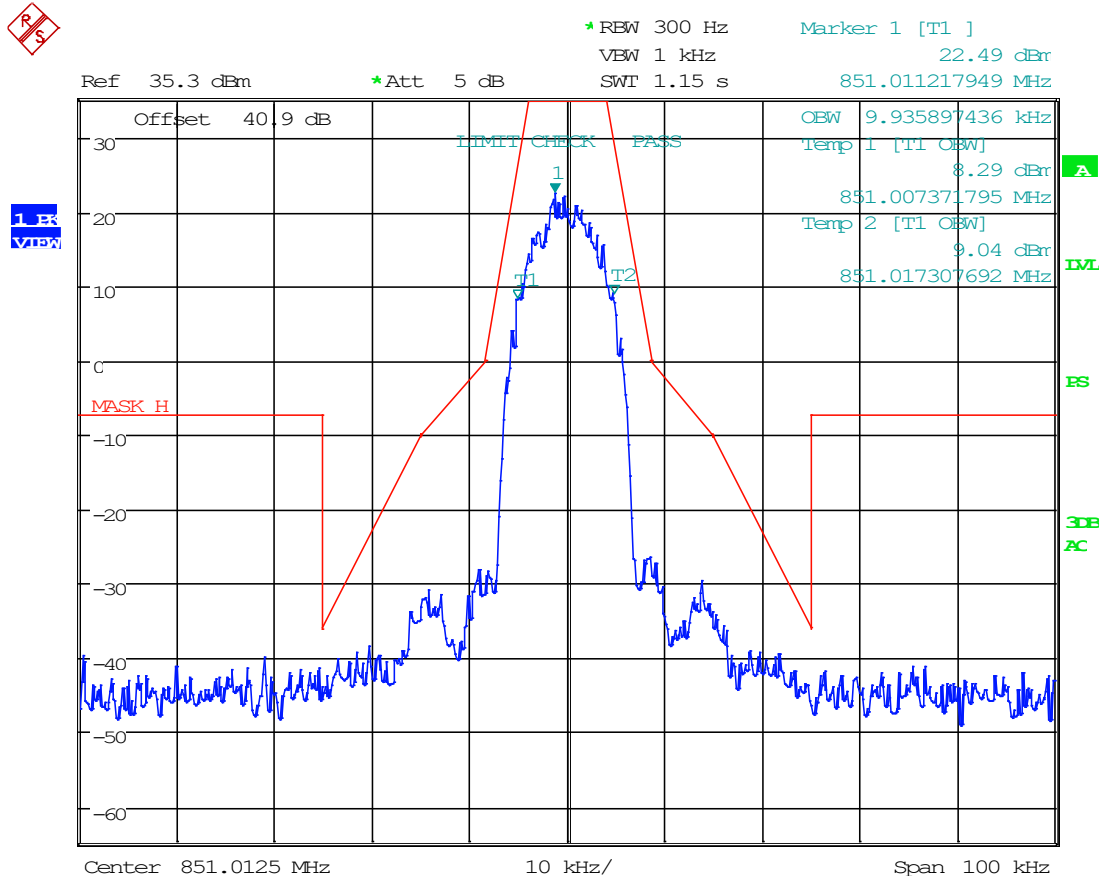

Date: 2.FEB.2023 15:00:26




8.5.55 6.25 kHz, FM, DL Mask E, AGC, 857 MHz

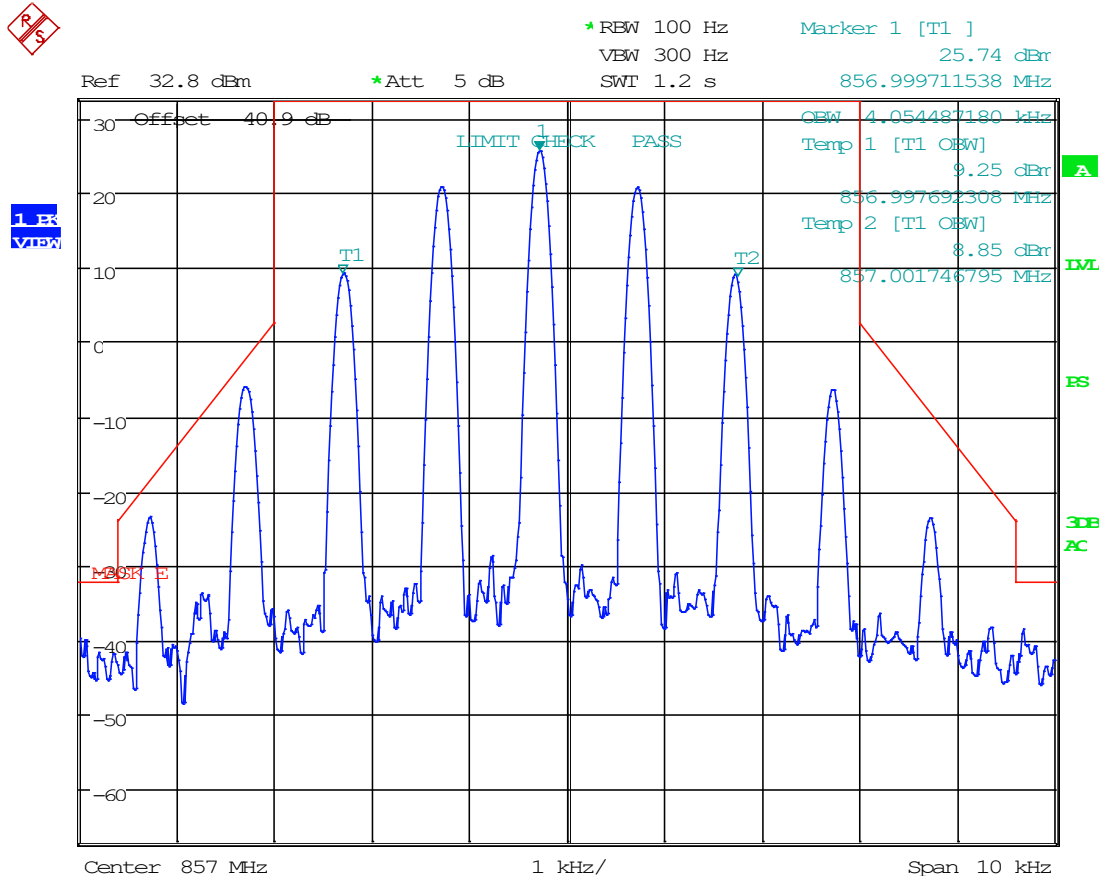

Date: 3.FEB.2023 09:03:59




8.5.56 6.25 kHz, FM, DL Mask E, AGC+3, 857 MHz

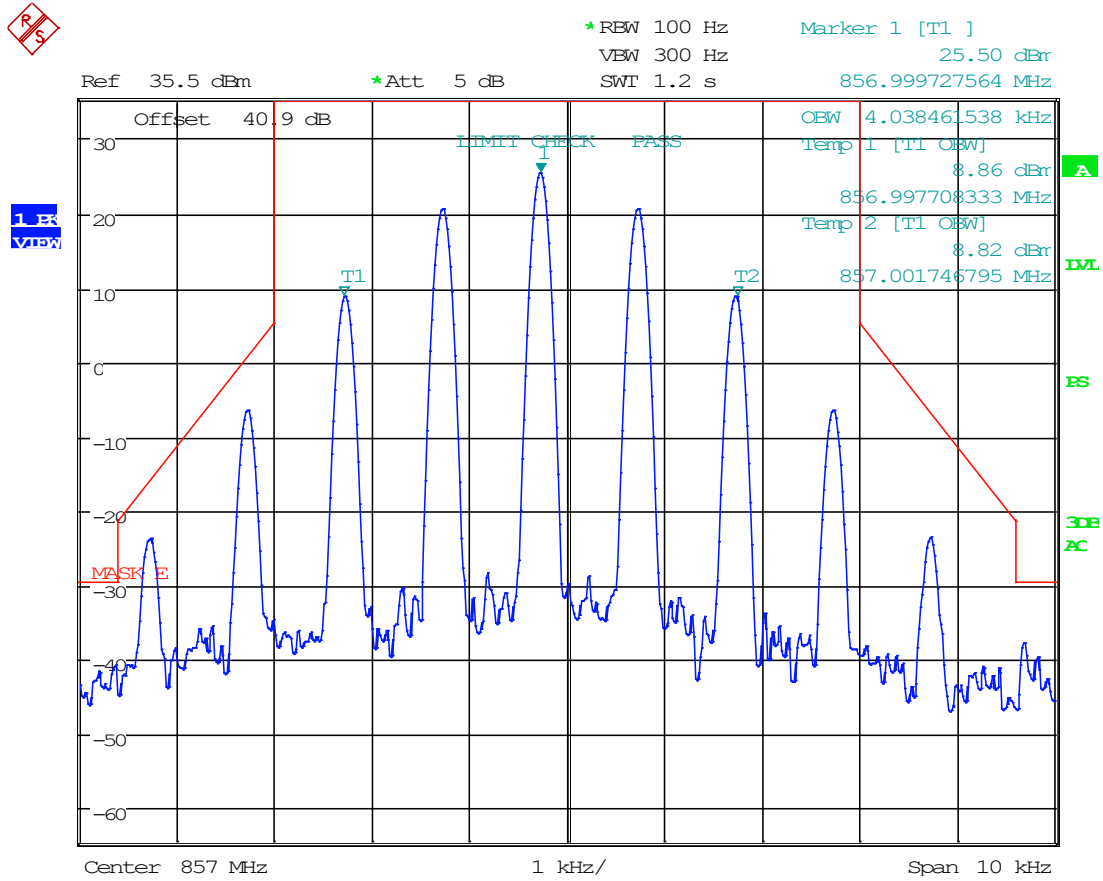

Date: 3.FEB.2023 09:06:05




8.5.57 12.5 kHz, FM, DL Mask D, AGC, 857 MHz

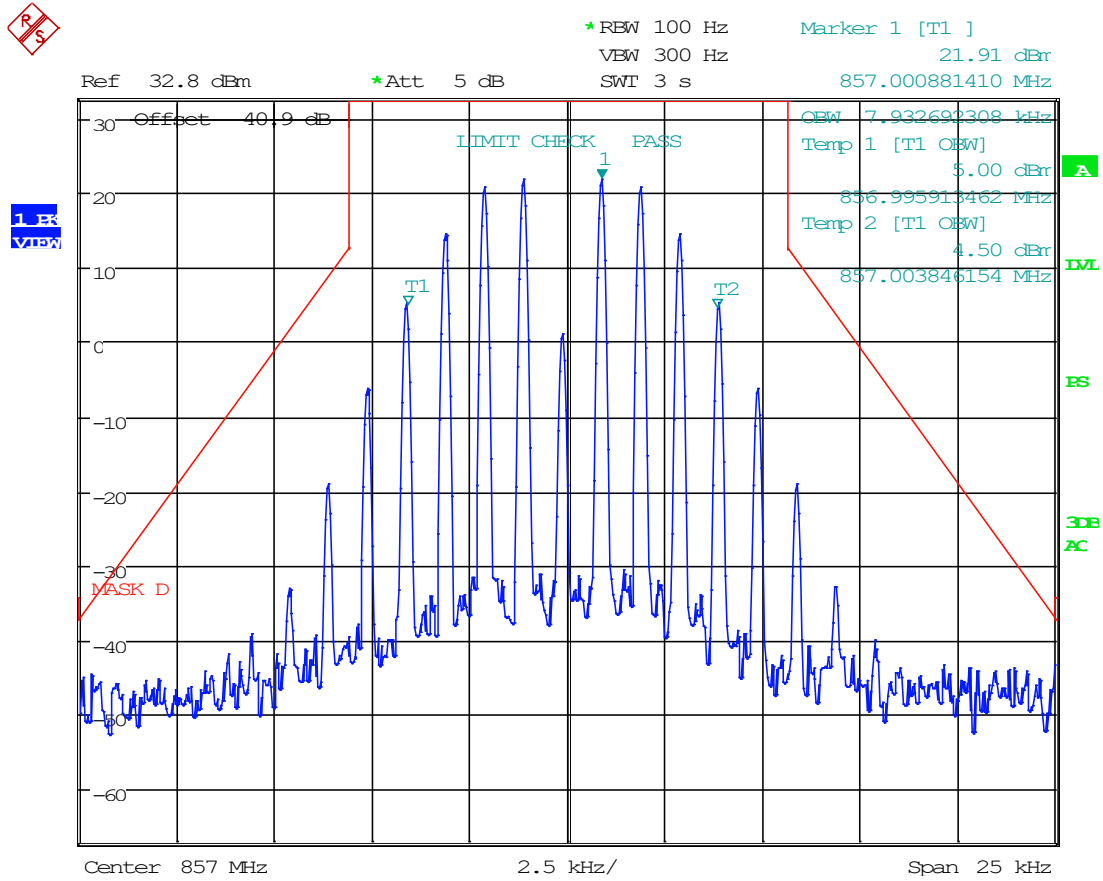

Date: 2.FEB.2023 16:19:10




8.5.58 12.5 kHz, FM, DL Mask D, AGC+3, 857 MHz

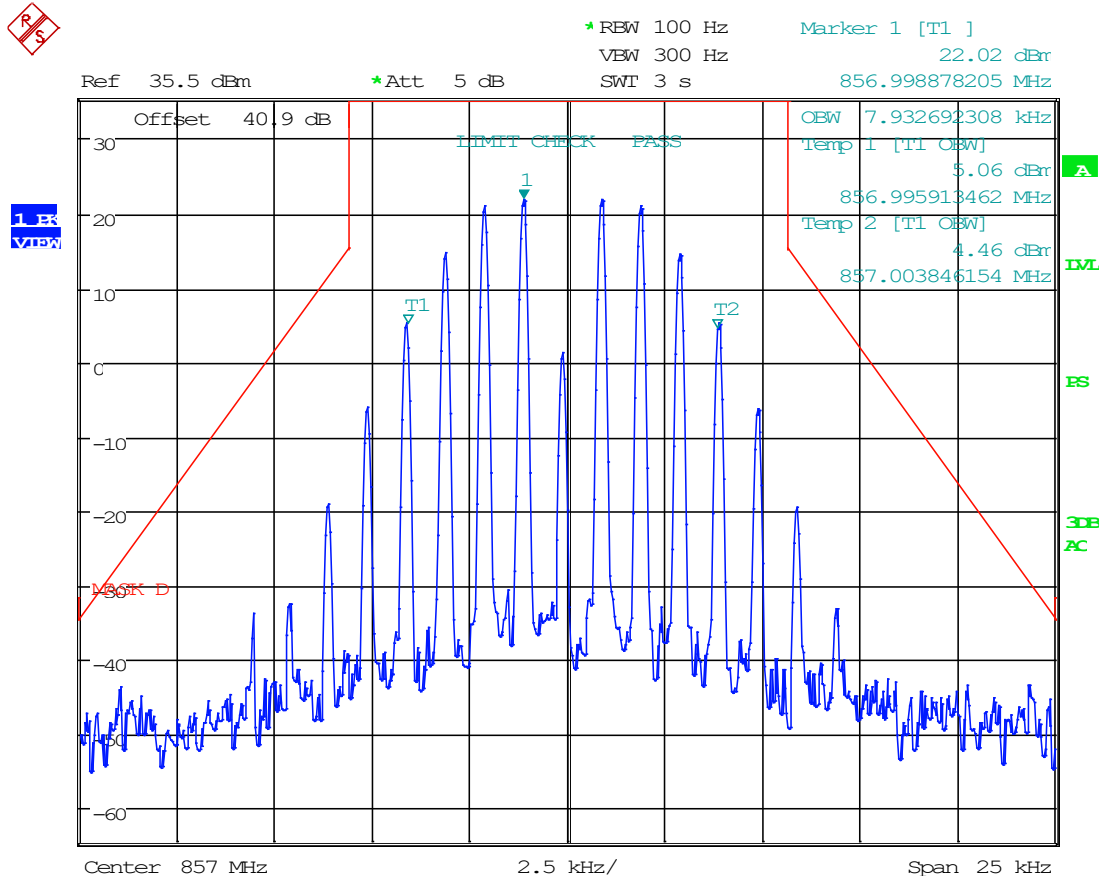

Date: 2.FEB.2023 16:27:07




8.5.59 25 kHz FM, DL Mask G, AGC, 857 MHz

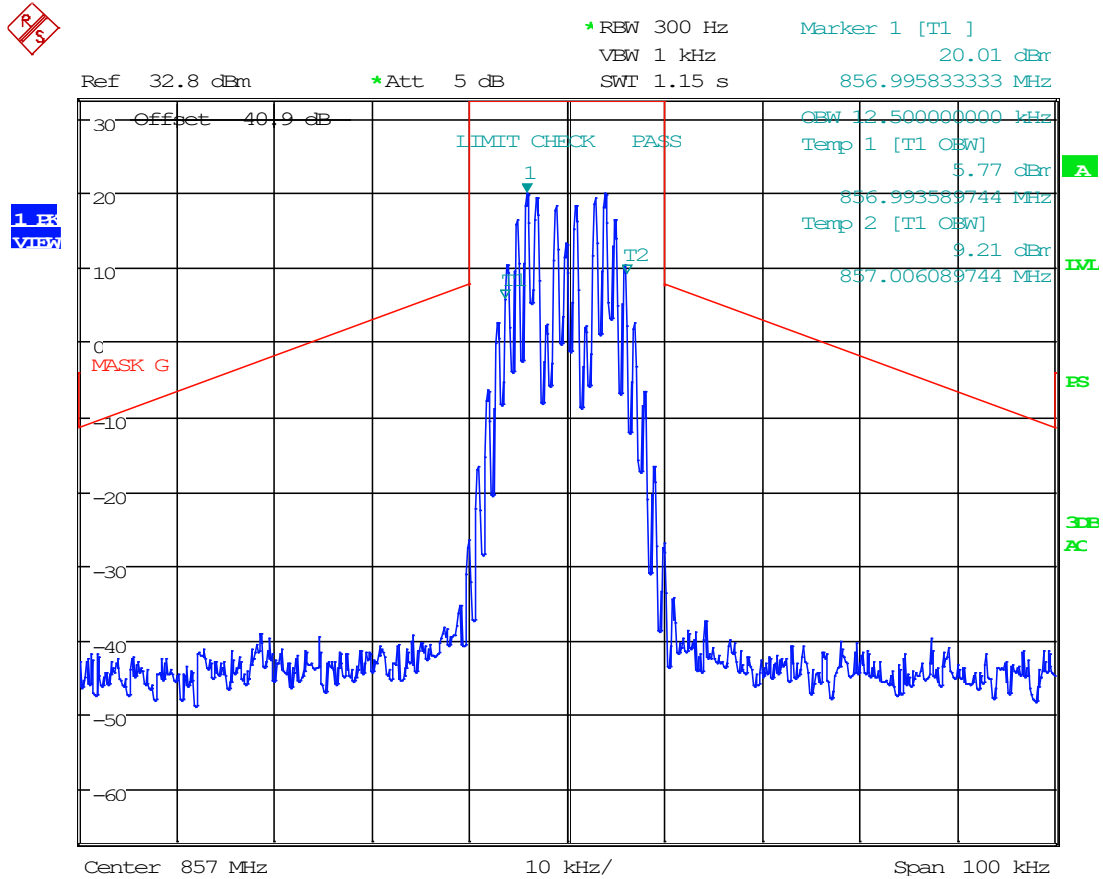

Date: 2.FEB.2023 16:51:20




8.5.60 25 kHz FM, DL Mask G, AGC+3, 857 MHz

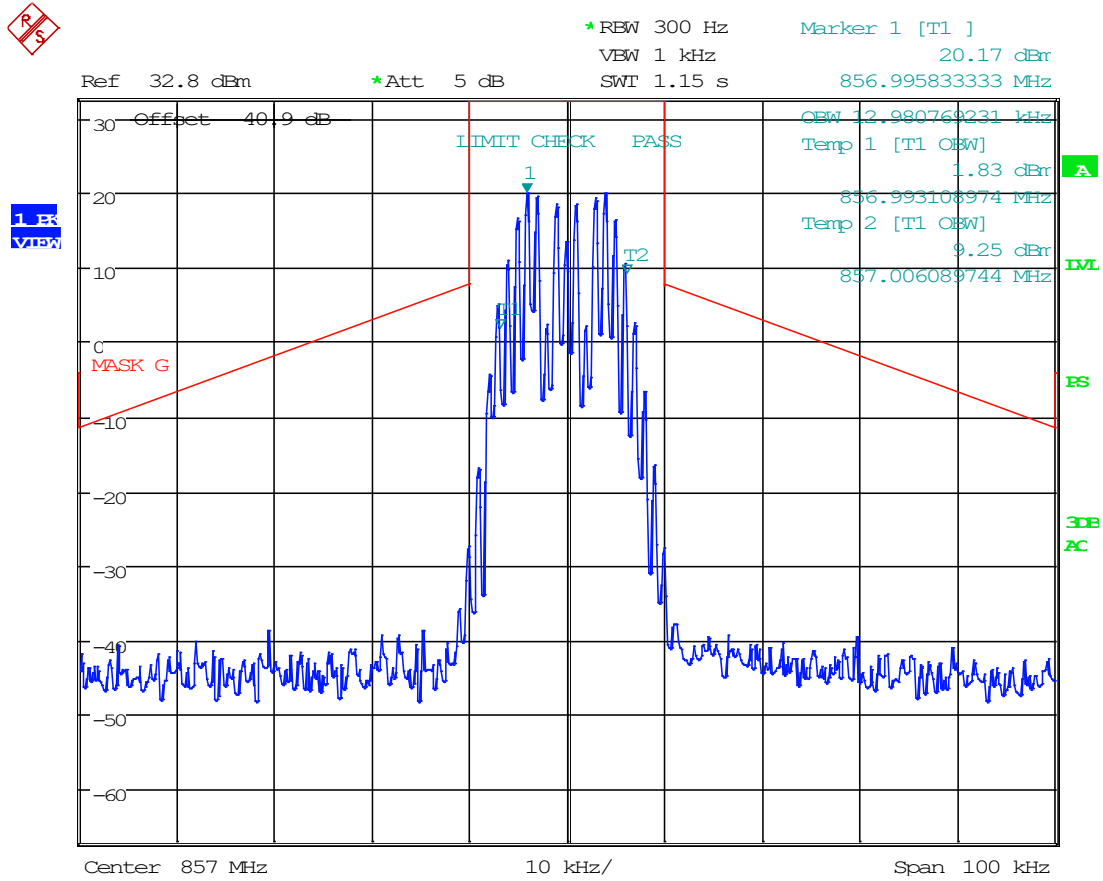

Date: 2.FEB.2023 16:54:39




8.5.61 C4FM, DL Mask D, AGC, 857 MHz

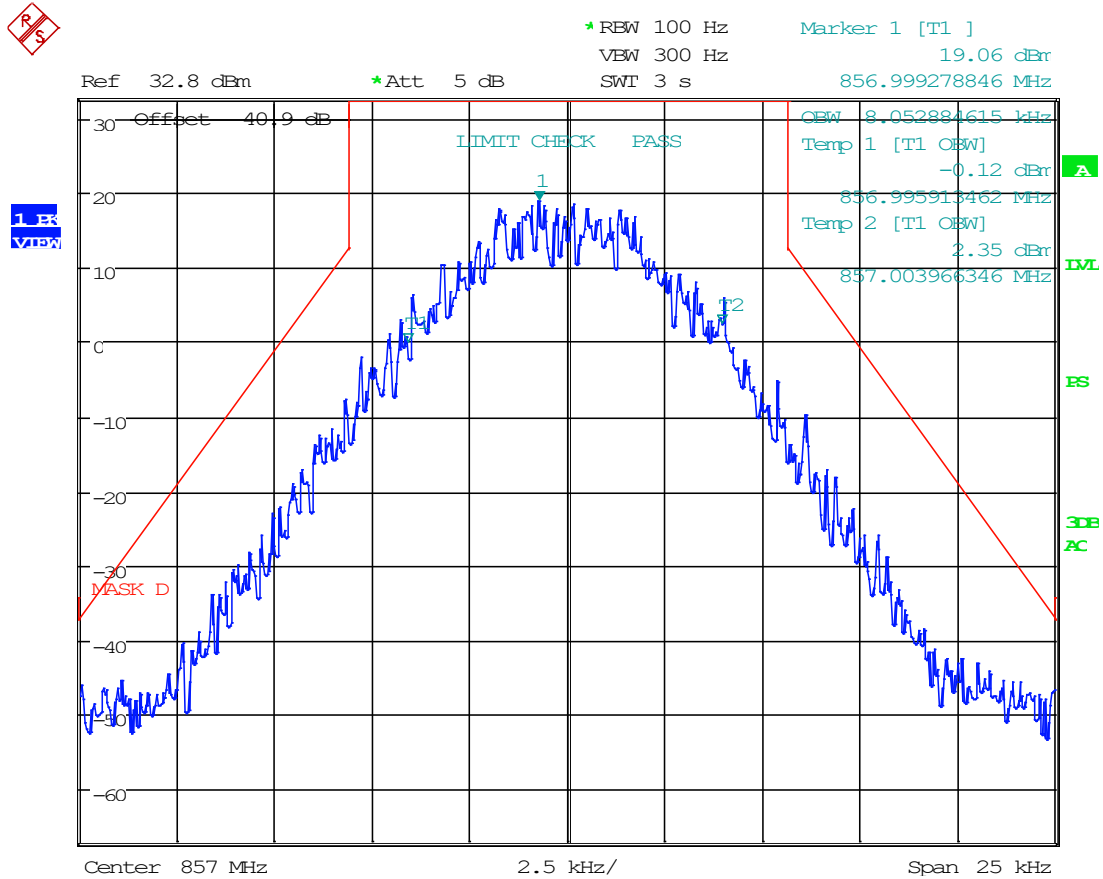

Date: 2.FEB.2023 16:21:38




8.5.62 C4FM, DL Mask D, AGC+3, 857 MHz

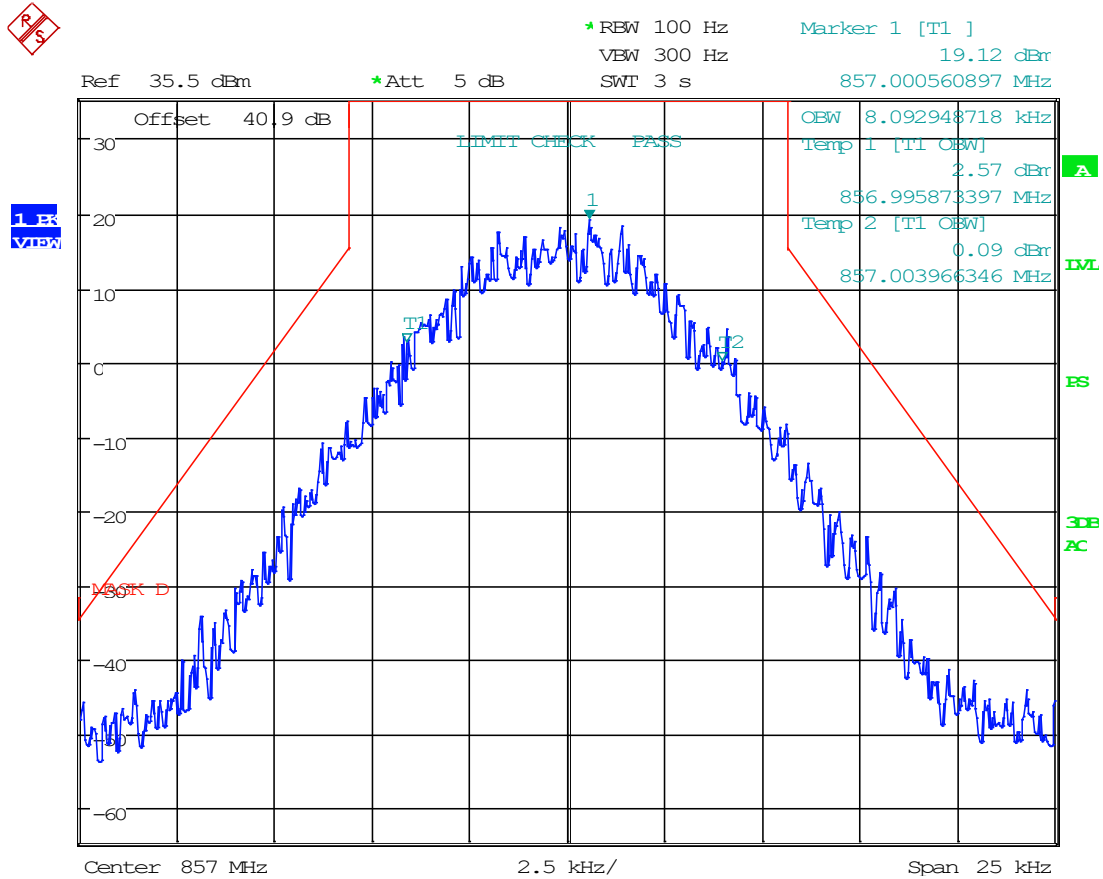

Date: 2.FEB.2023 16:26:24




8.5.63 H-CPM, DL Mask D, AGC, 857 MHz

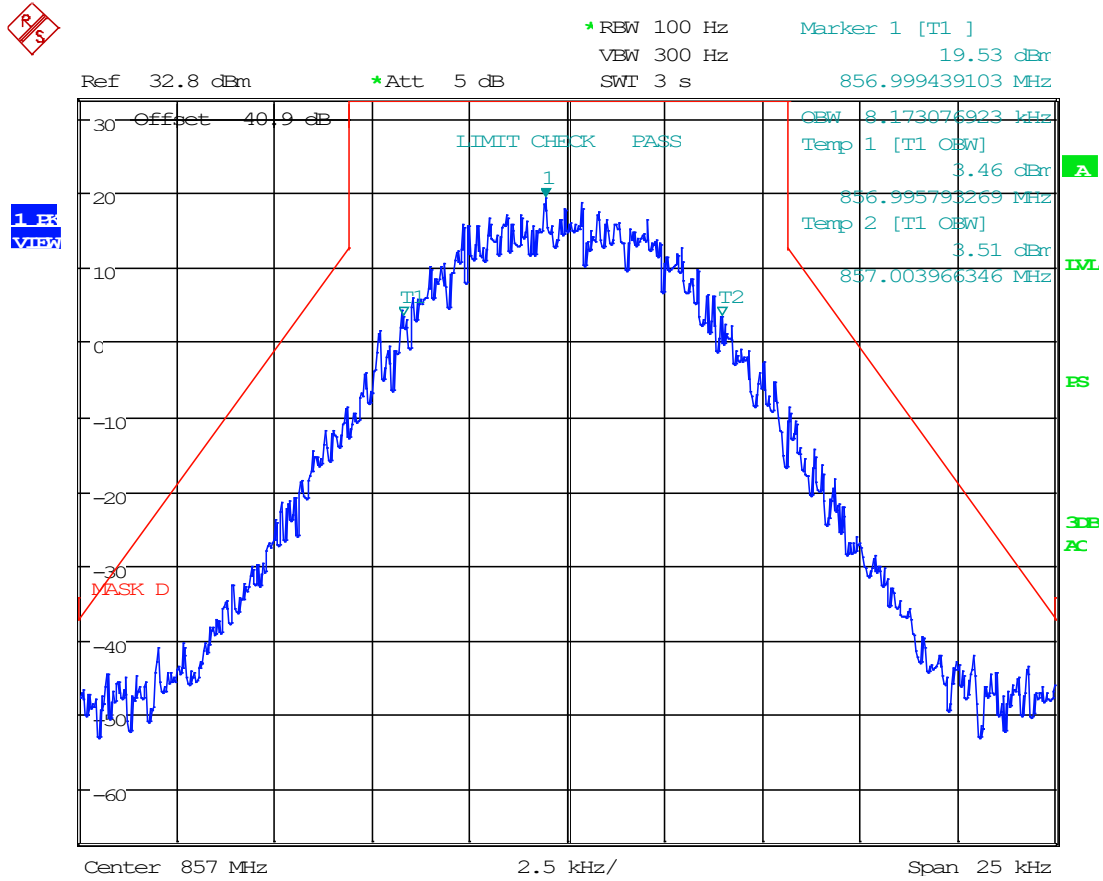

Date: 2.FEB.2023 16:23:01




8.5.64 H-CPM, DL Mask D, AGC+3, 857 MHz

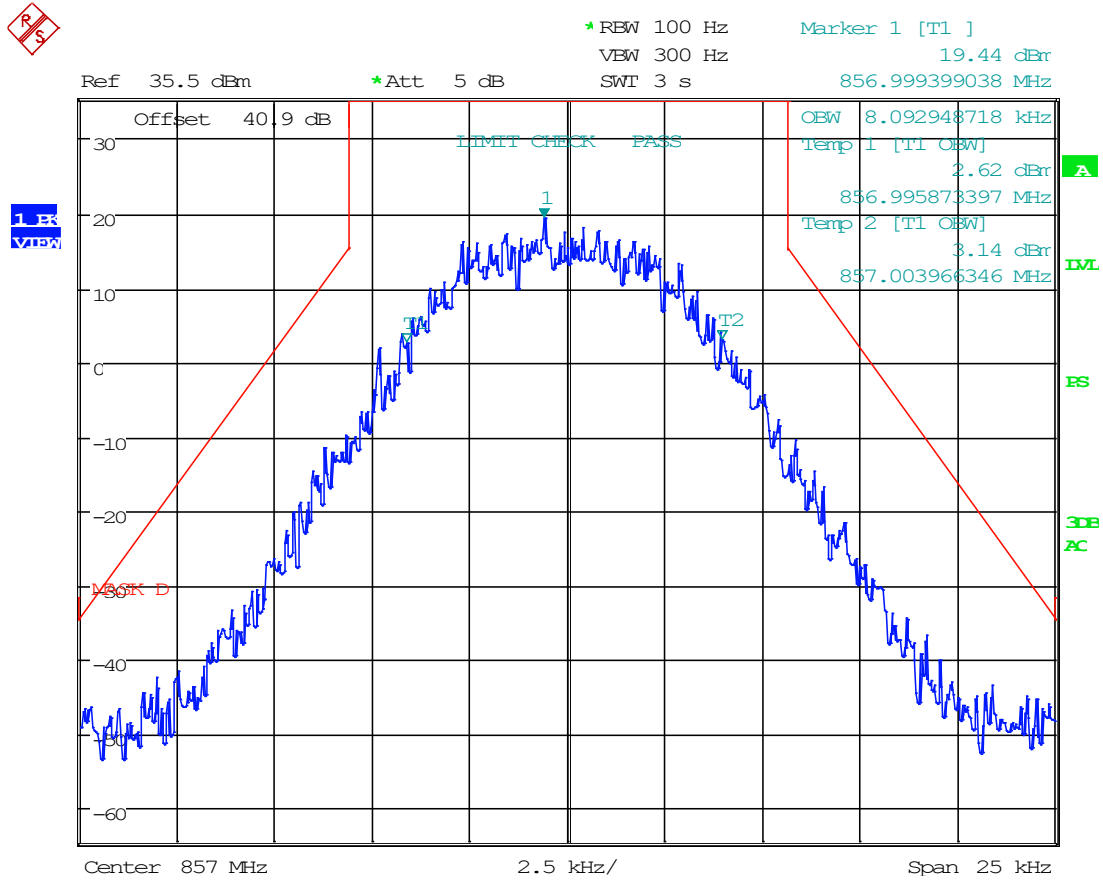

Date: 2.FEB.2023 16:25:44




8.5.65 H-DQPSK, DL Mask D, AGC, 857 MHz

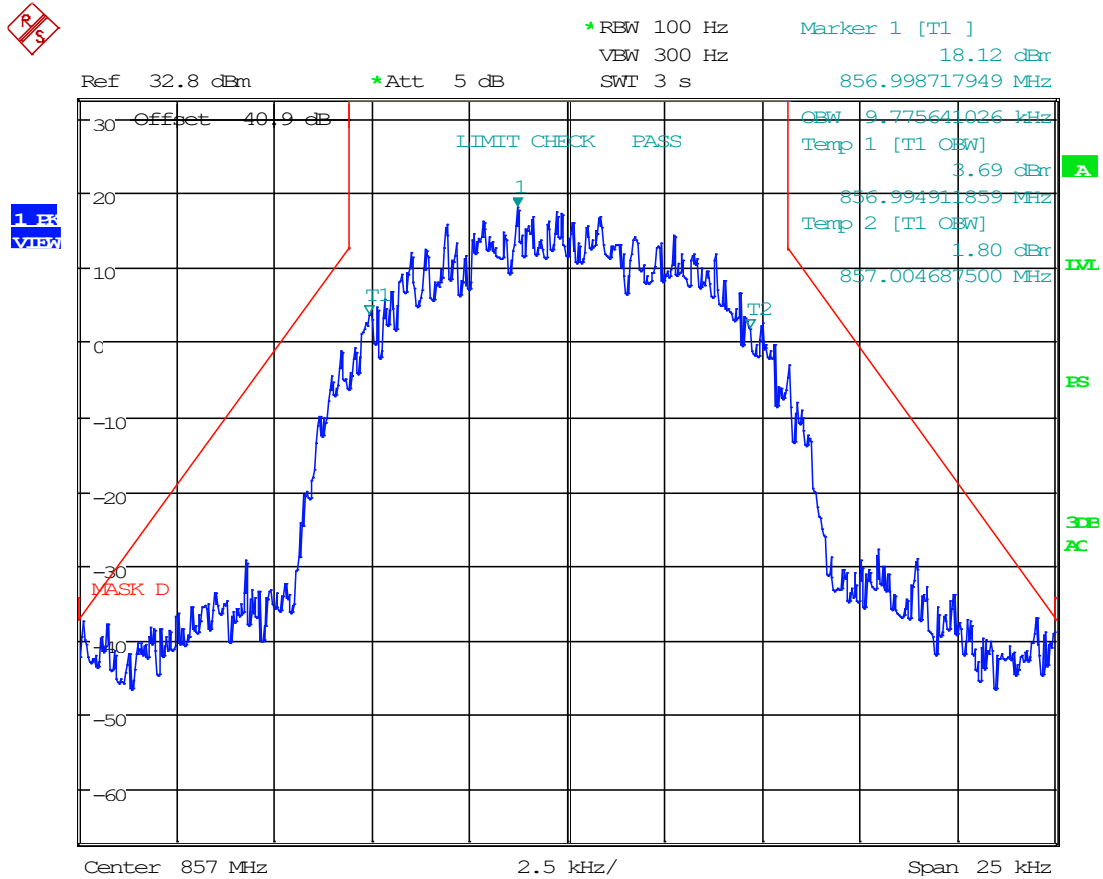

Date: 2.FEB.2023 16:23:53




8.5.66 H-DQPSK, DL Mask D, AGC+3, 857 MHz

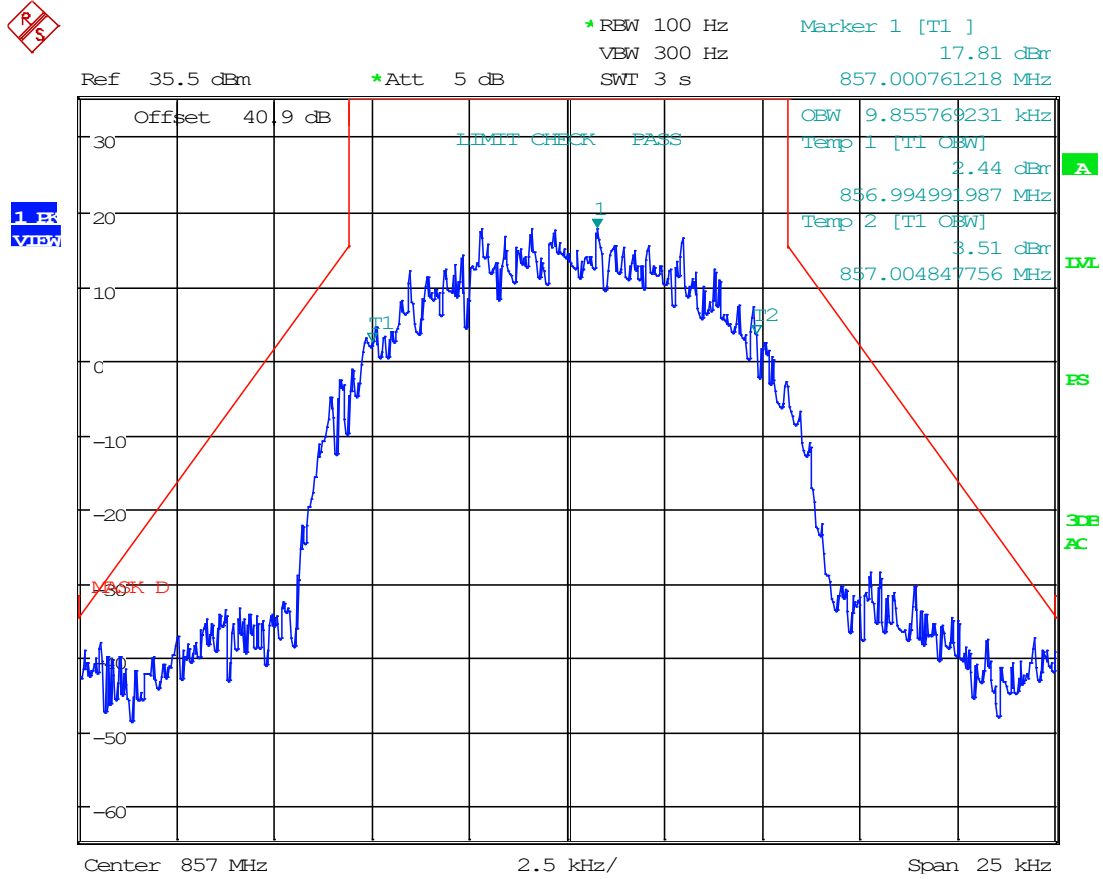

Date: 2.FEB.2023 16:25:00




8.5.67 6.25 kHz, FM, DL Mask E, AGC, 868.9875 MHz

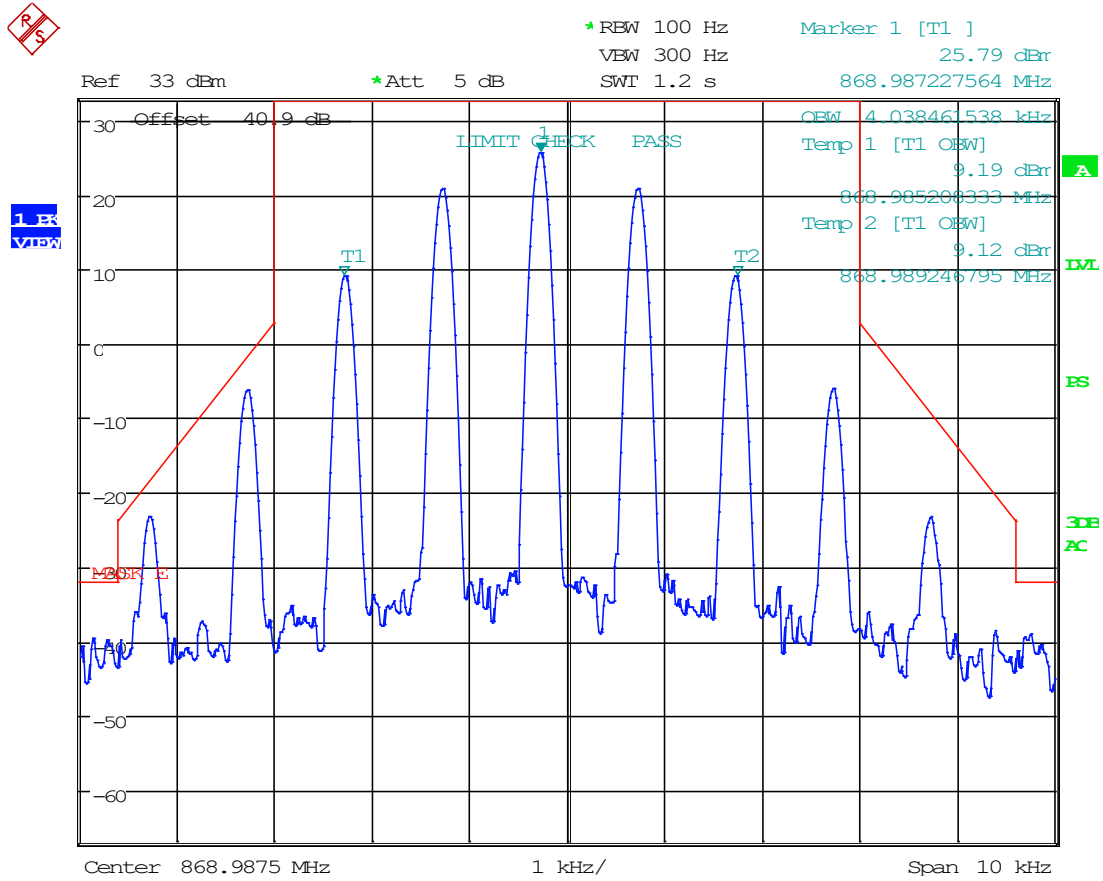

Date: 3.FEB.2023 09:07:56




8.5.68 6.25 kHz, FM, DL Mask E, AGC+3, 868.9875 MHz

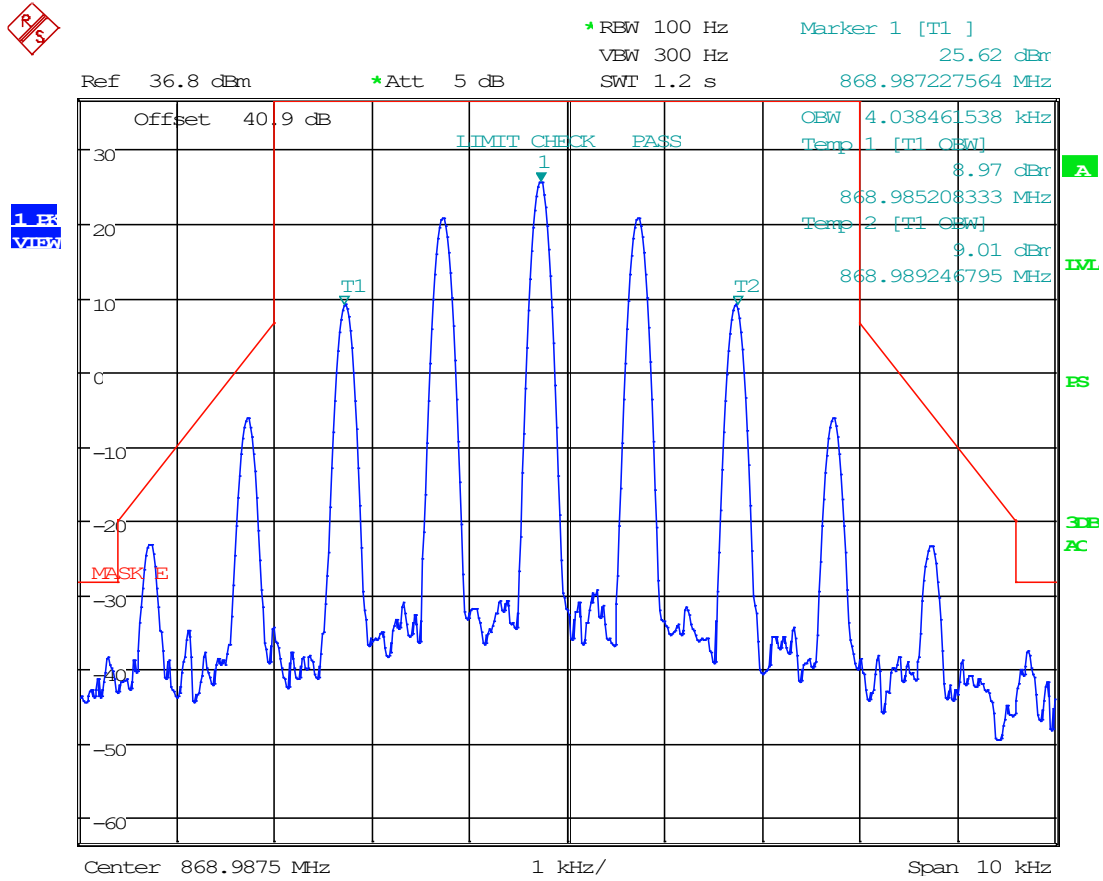

Date: 3.FEB.2023 09:09:56


8.5.69 12.5 kHz, FM, DL Mask D, AGC, 868.9875 MHz

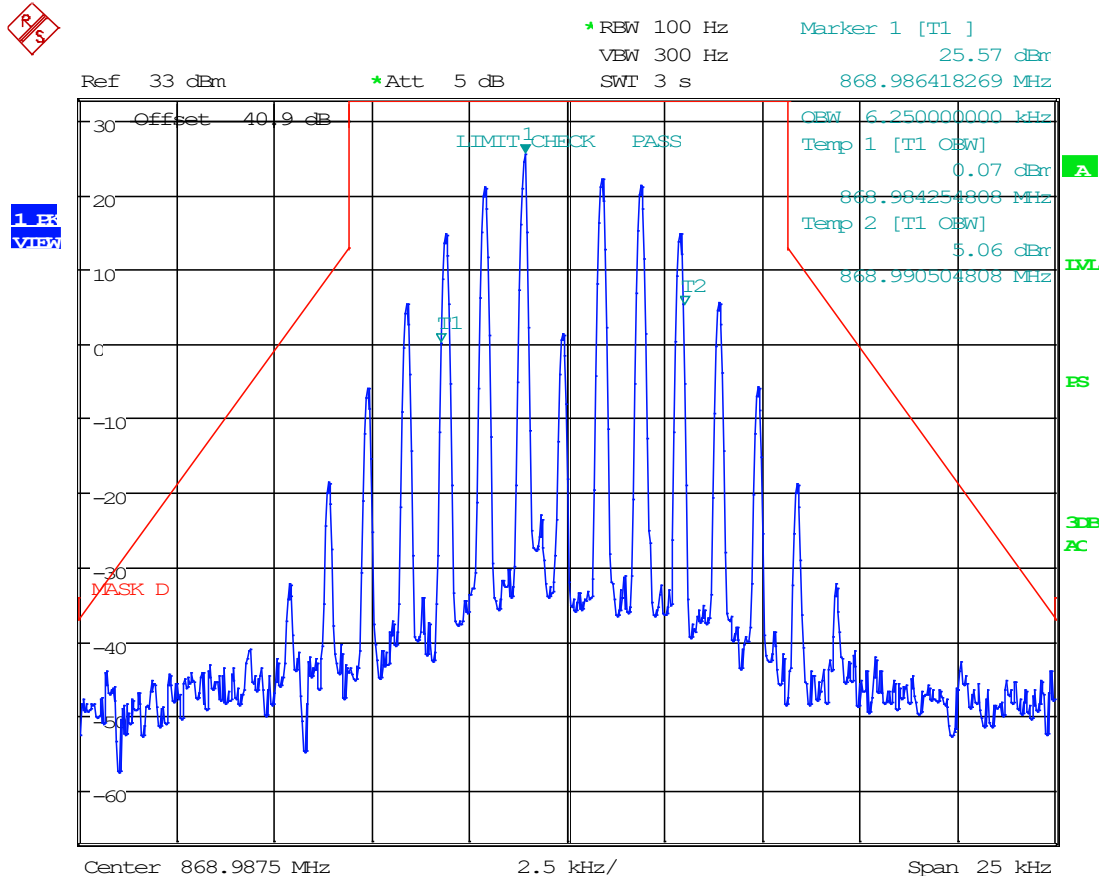

Date: 2.FEB.2023 16:33:22




8.5.70 12.5 kHz, FM, DL Mask D, AGC+3, 868.9875 MHz

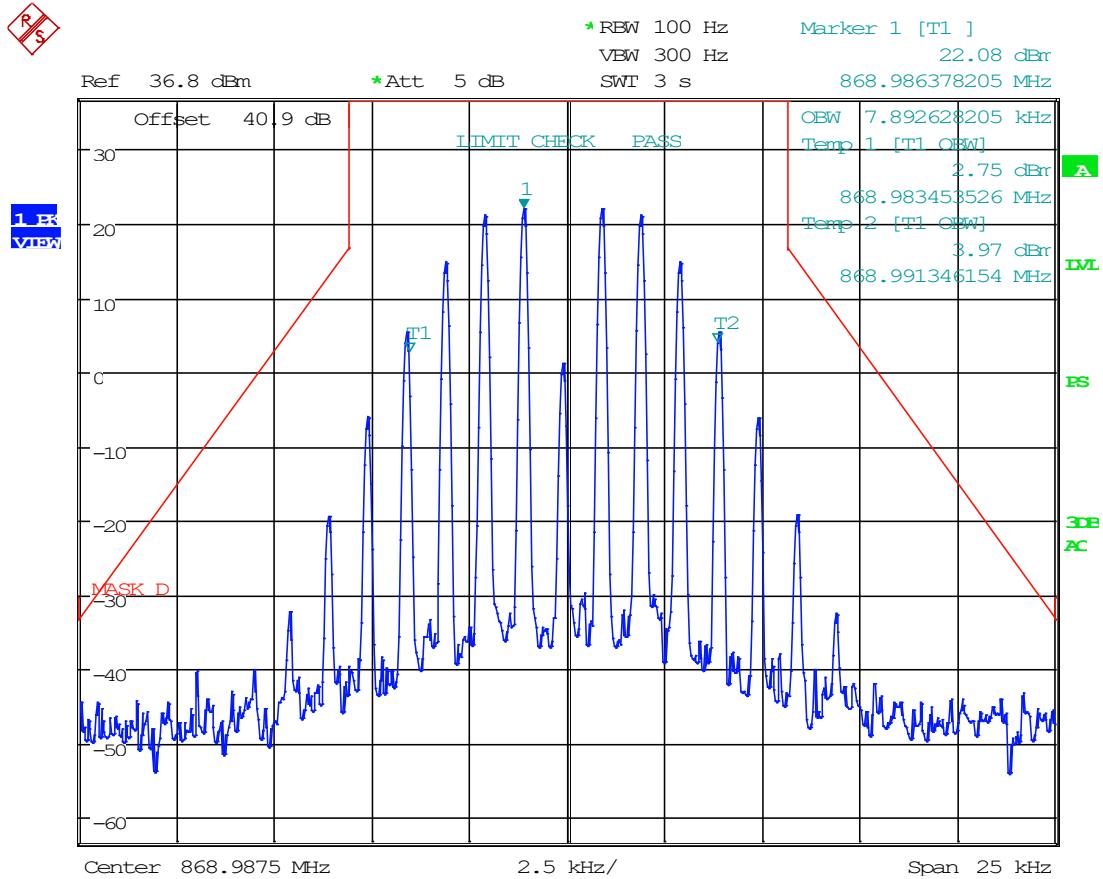

Date: 2.FEB.2023 16:37:14


8.5.71 25 kHz FM, DL Mask G, AGC, 868.9875 MHz

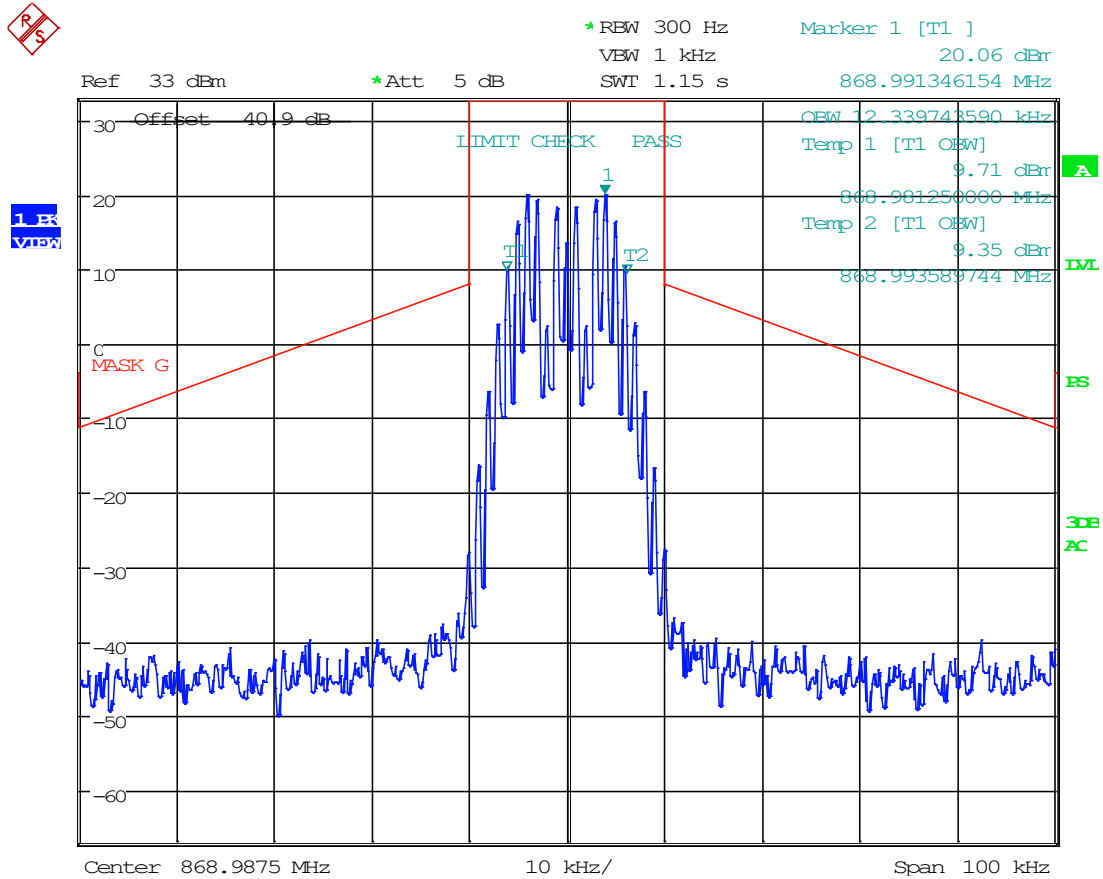

Date: 2.FEB.2023 16:59:42




8.5.72 25 kHz FM, DL Mask G, AGC+3, 868.9875 MHz

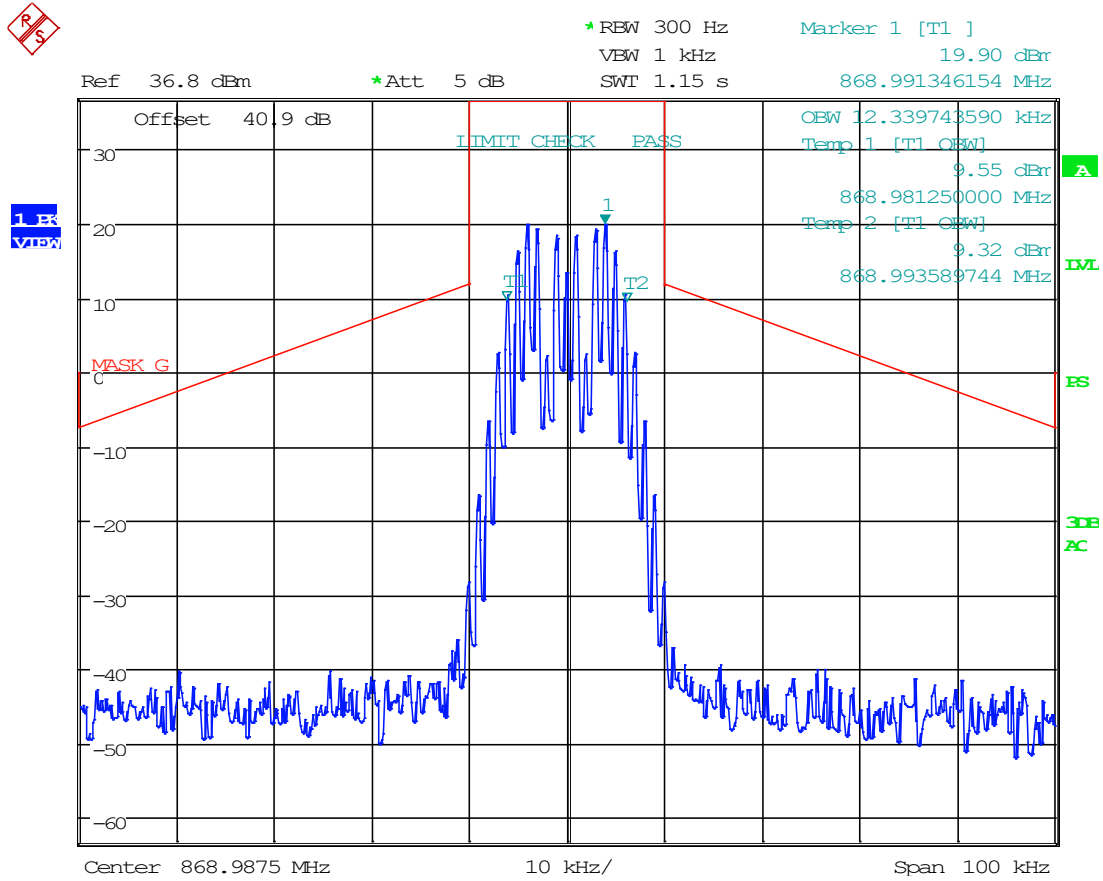

Date: 2.FEB.2023 17:01:16




8.5.73 C4FM, DL Mask D, AGC, 868.9875 MHz

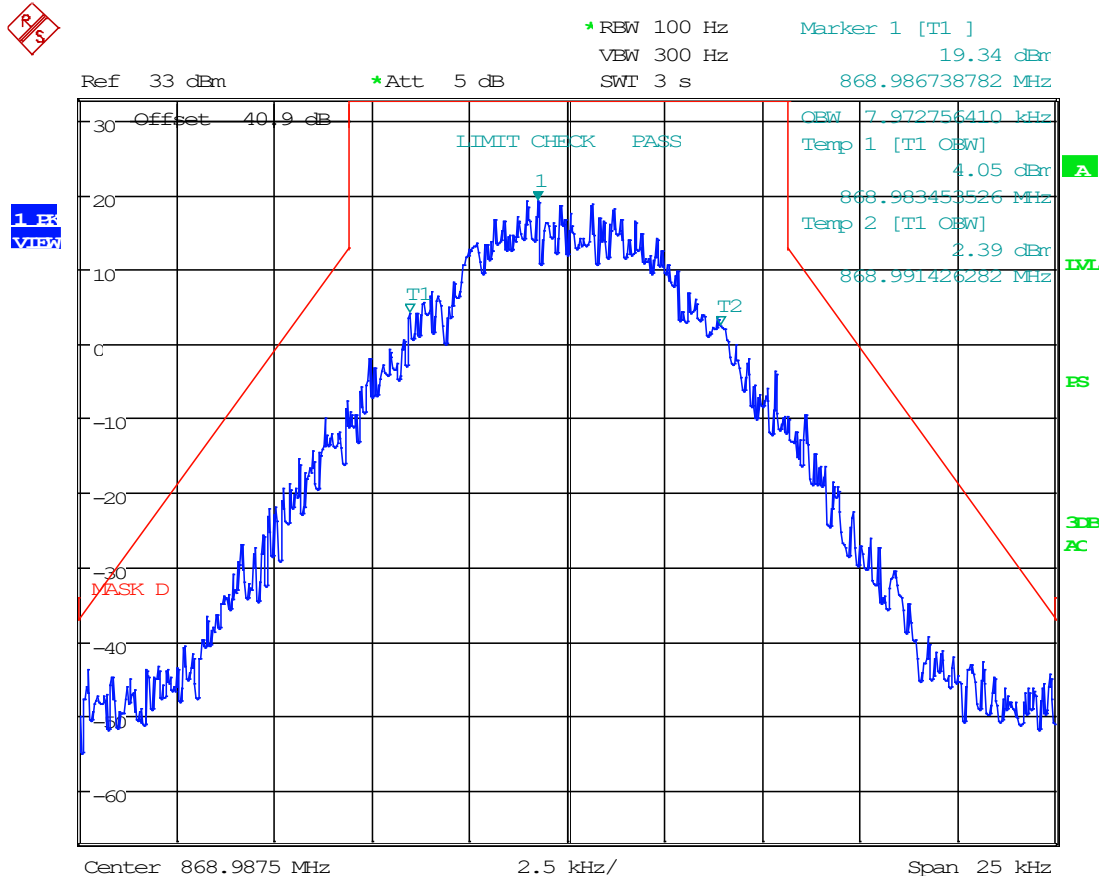

Date: 2.FEB.2023 16:34:35




8.5.74 C4FM, DL Mask D, AGC+3, 868.9875 MHz

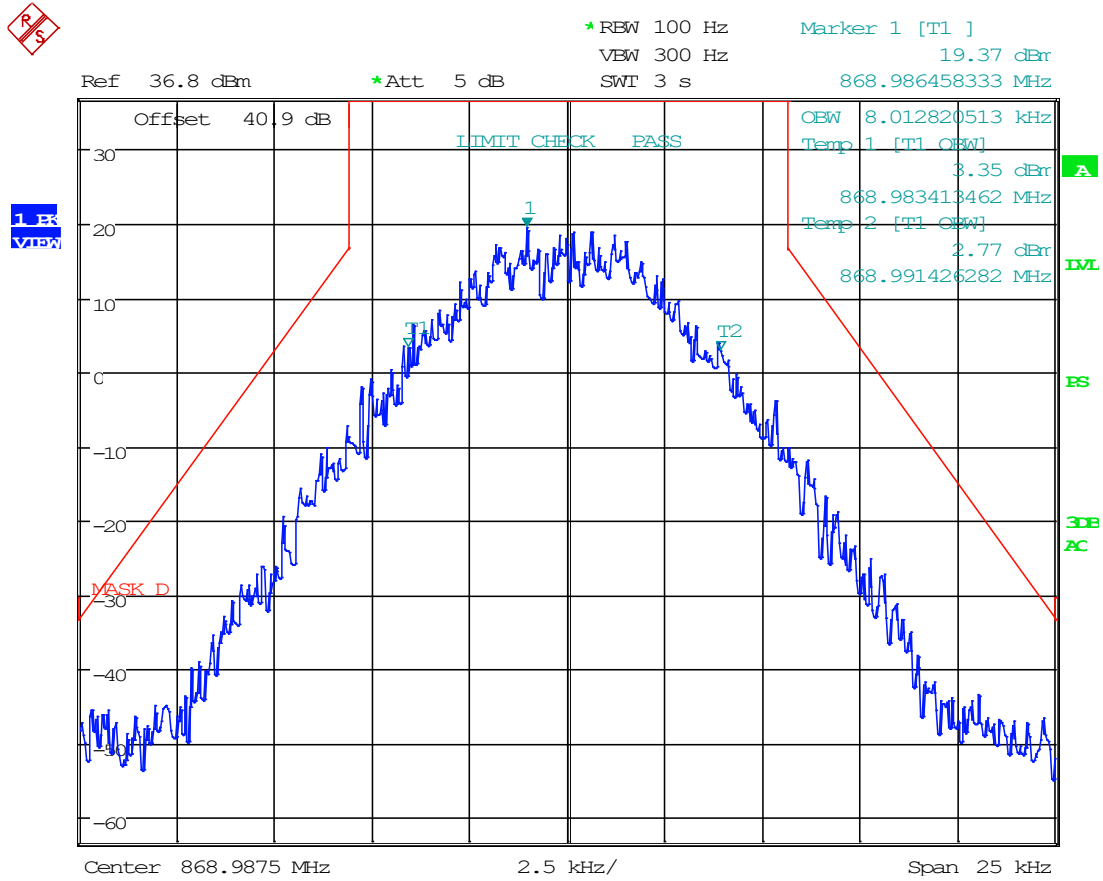

Date: 2.FEB.2023 16:38:20


8.5.75 H-CPM, DL Mask D, AGC, 868.9875 MHz

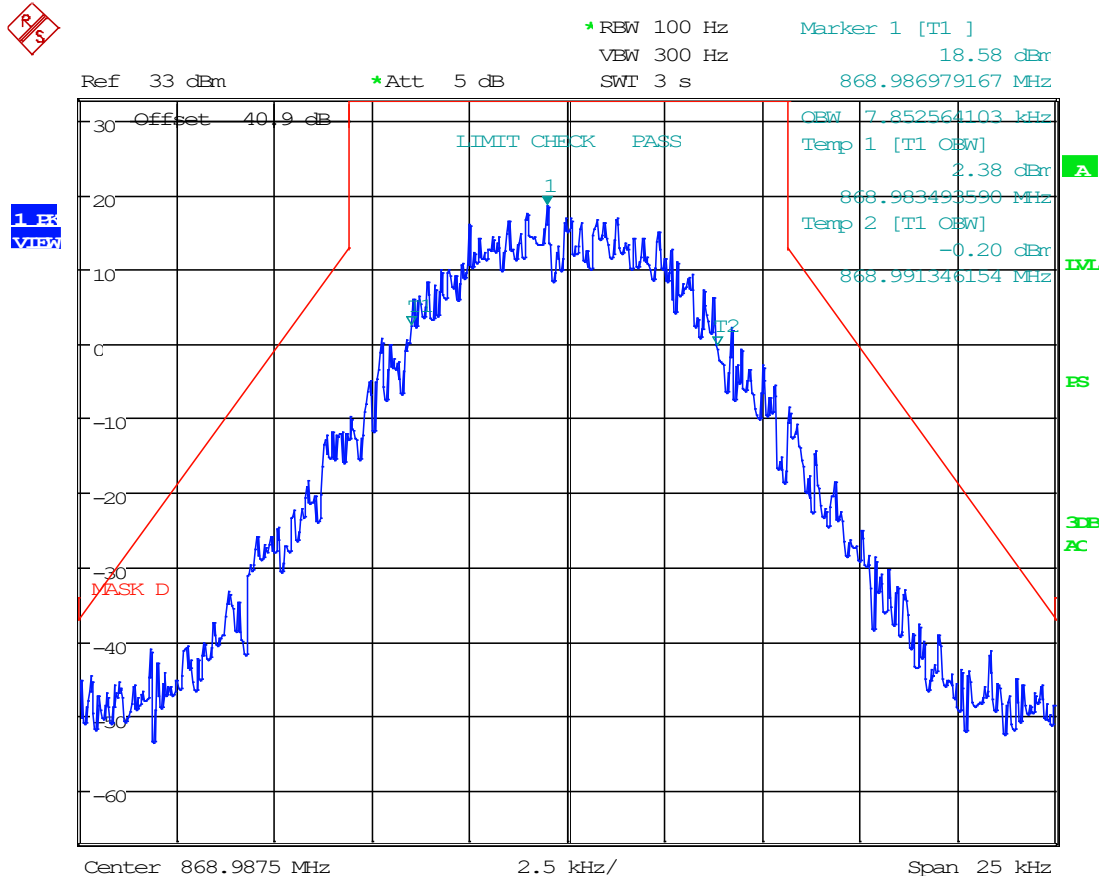

Date: 2.FEB.2023 16:35:20




8.5.76 H-CPM, DL Mask D, AGC+3, 868.9875 MHz

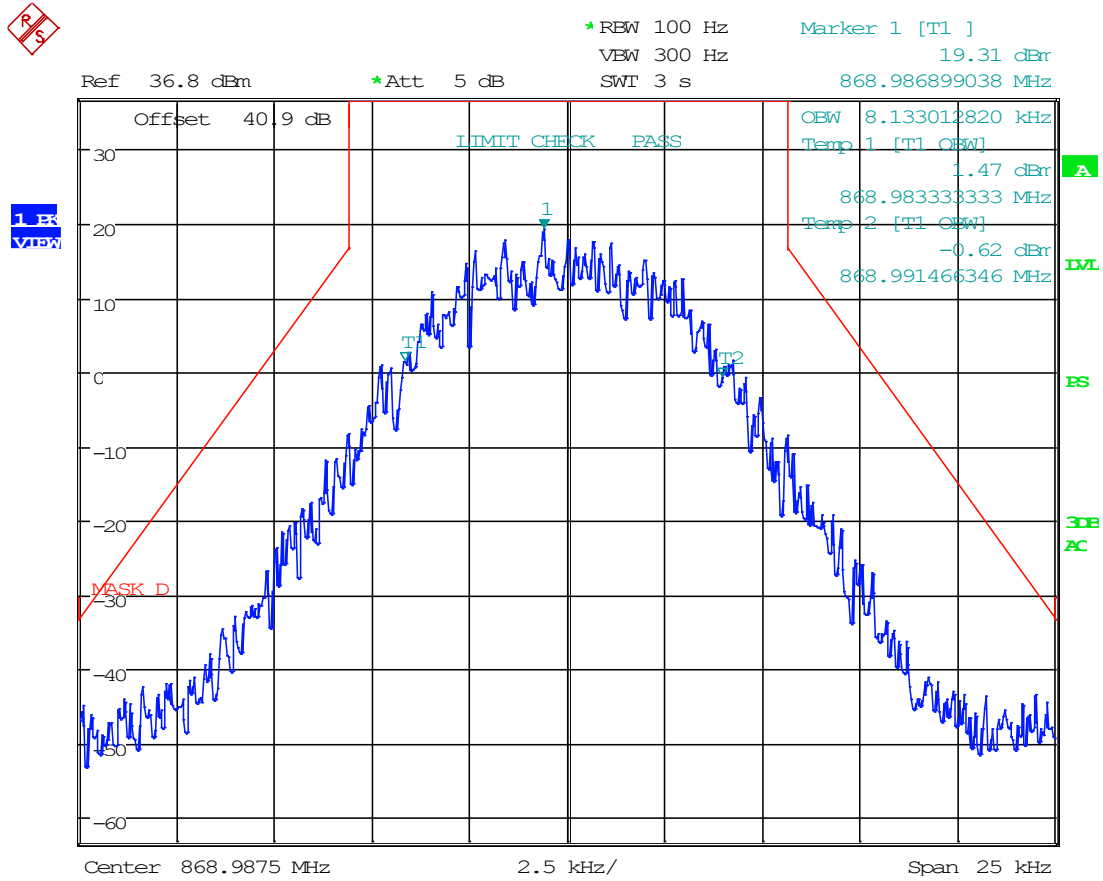

Date: 2.FEB.2023 16:39:04




8.5.77 H-DQPSK, DL Mask D, AGC, 868.9875 MHz

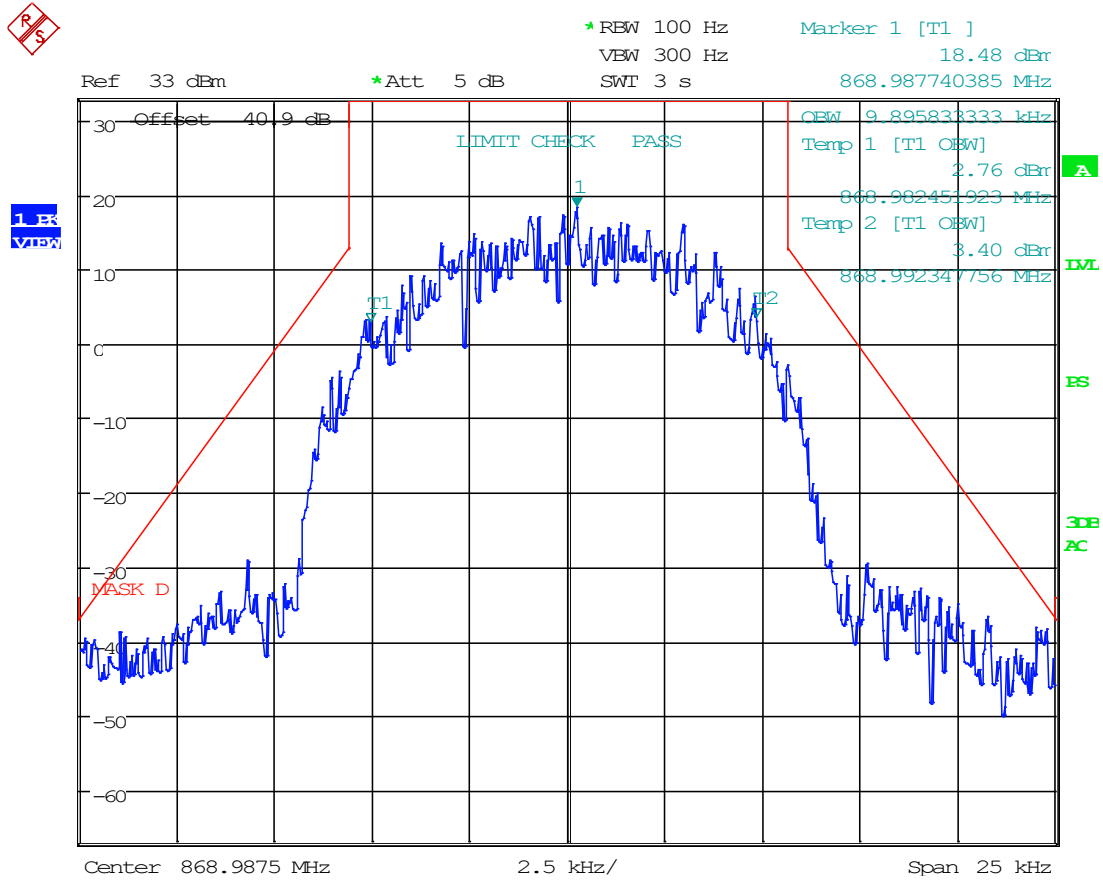

Date: 2.FEB.2023 16:35:59




8.5.78 H-DQPSK, DL Mask D, AGC+3, 868.9875 MHz

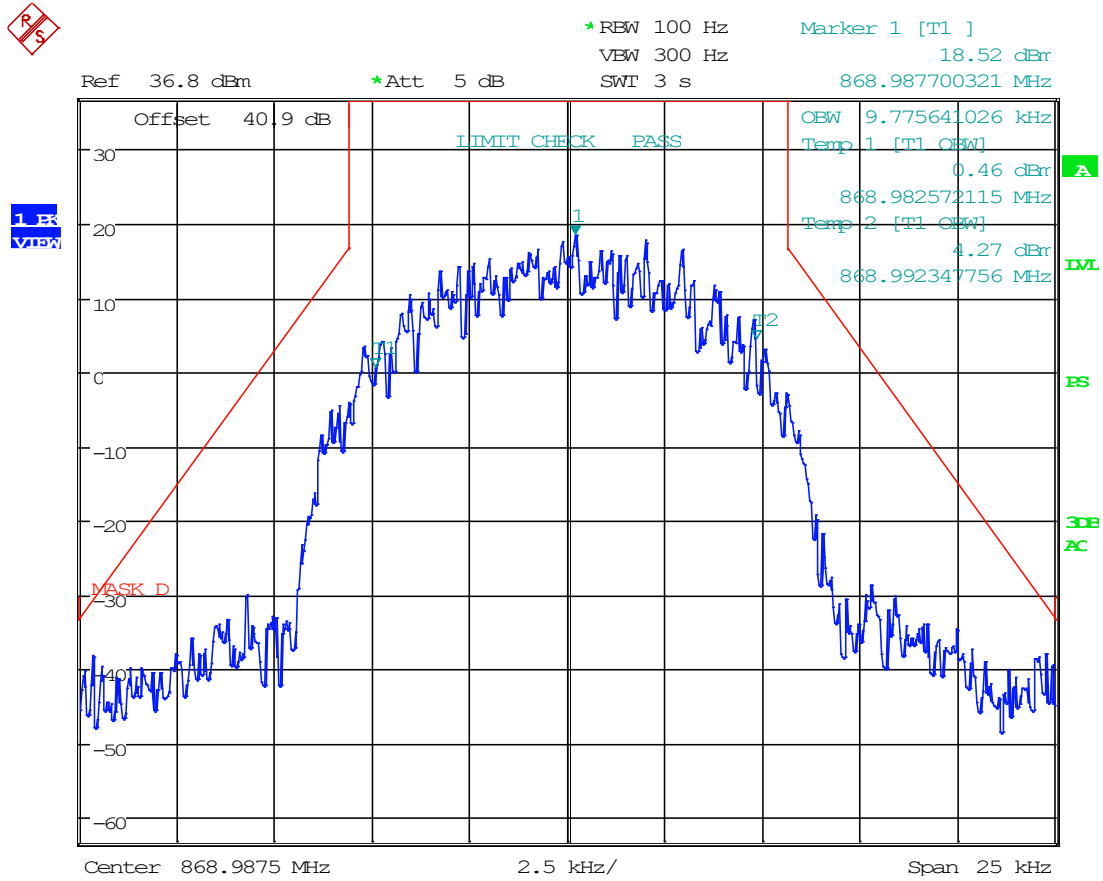

Date: 2.FEB.2023 16:39:49

8.6 Noise Figure


Limits from FCC KDB 935210 D05 v01r04 Industrial Signal Boosters. Test method from "Noise Figure Measurement Accuracy: The Y-Factor Method" by Keysight Technologies.

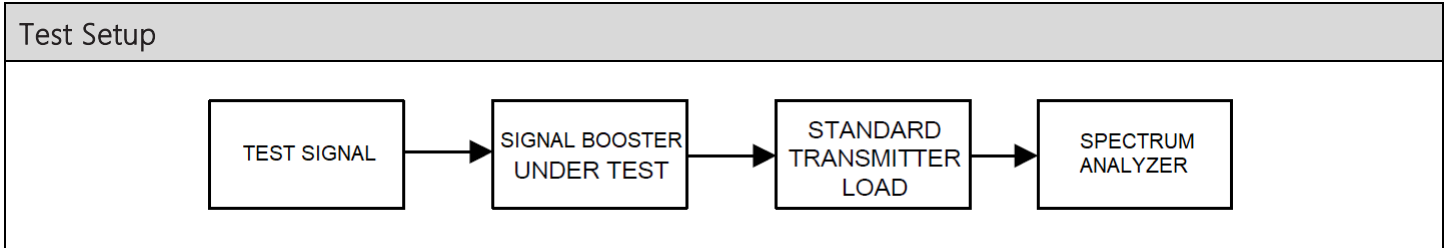

Test Results, Out-of-band Rejection and Class of Operation			
Operating Band (MHz)	Link Direction	Noise Figure (dB)	Limit (dB)
788- 805 MHz	Downlink	4.78	< 9 dB
806- 824 MHz	Downlink	4.97	< 9 dB

8.7 Out-of-Band/Out-of-Block Emissions (Intermodulation Products)


Limits from FCC Parts 2.1051, FCC Pt. 90.219(d)(6)(i), FCC Pt. 90.219(e)(3) and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

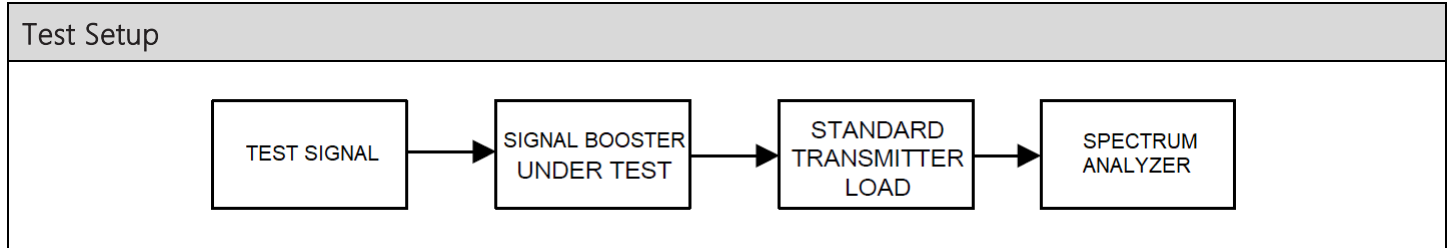



Intermodulation Products Spectrum Plots


8.7.1 6.25 kHz Signal, Downlink, AGC, 758.0125 MHz

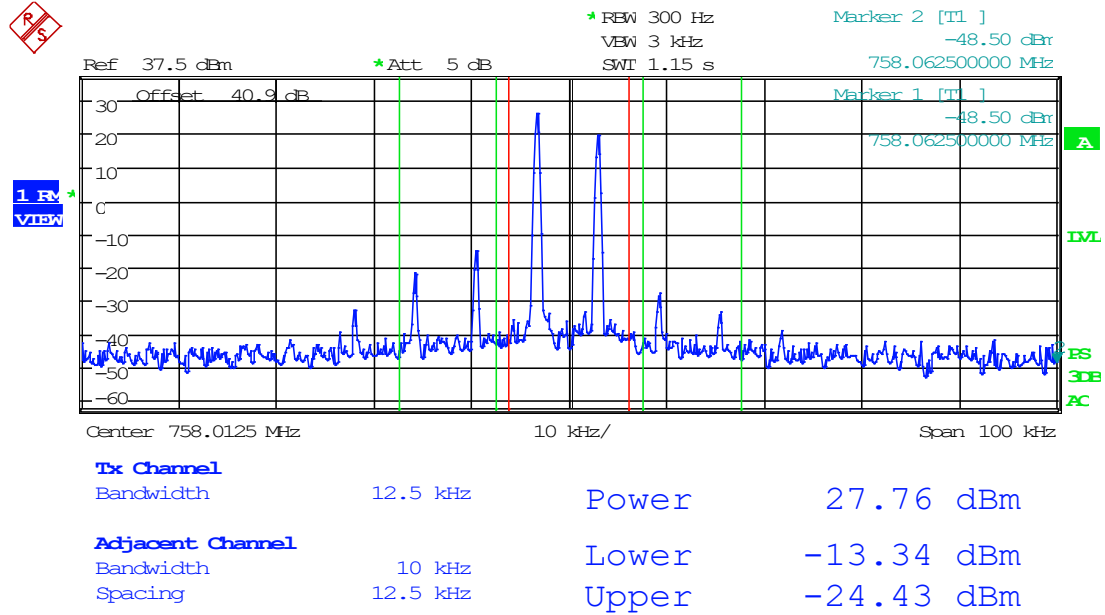

Date: 31.JAN.2023 16:03:02




8.7.2 6.25 kHz Signal, Downlink, AGC+3dB, 758.0125 MHz

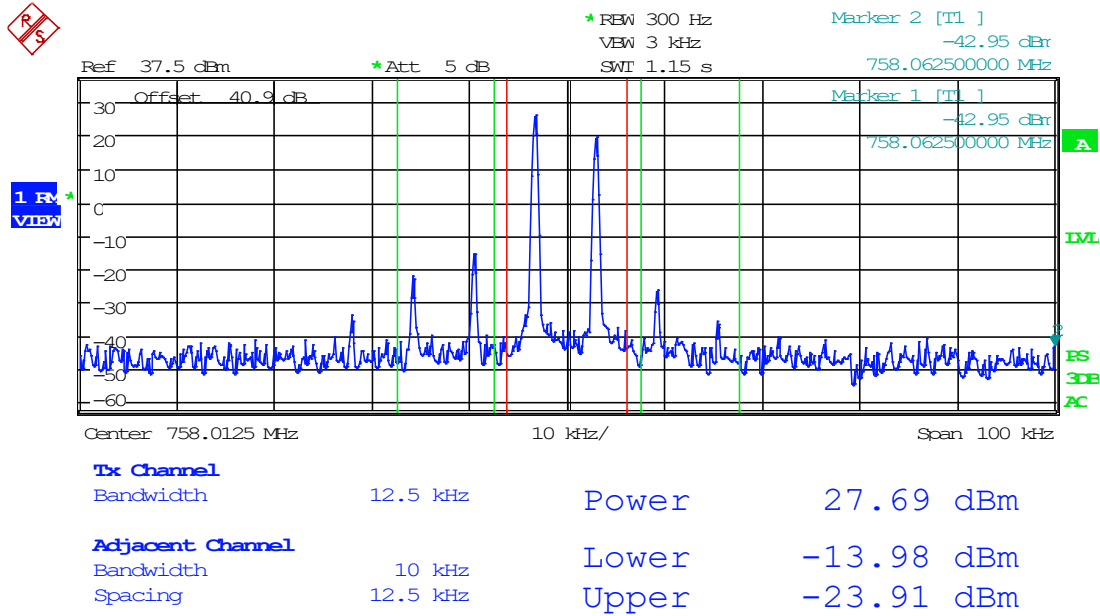

Date: 31.JAN.2023 16:05:07




8.7.3 12.5 kHz Signal, Downlink, AGC, 758.0125 MHz

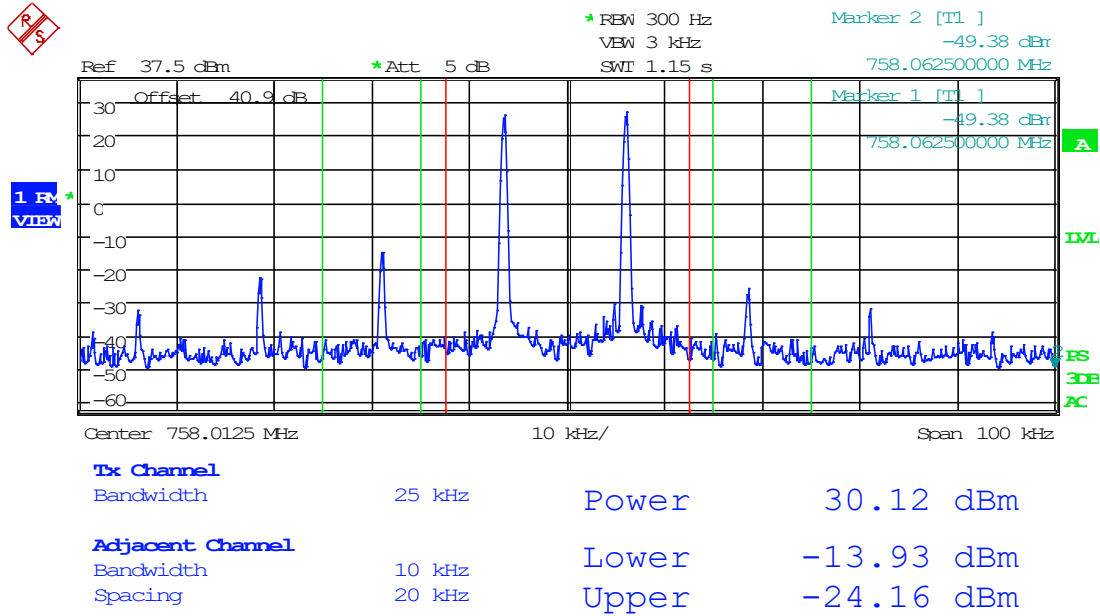

Date: 1.FEB.2023 08:13:01




8.7.4 12.5 kHz Signal, Downlink, AGC+3dB, 758.0125 MHz

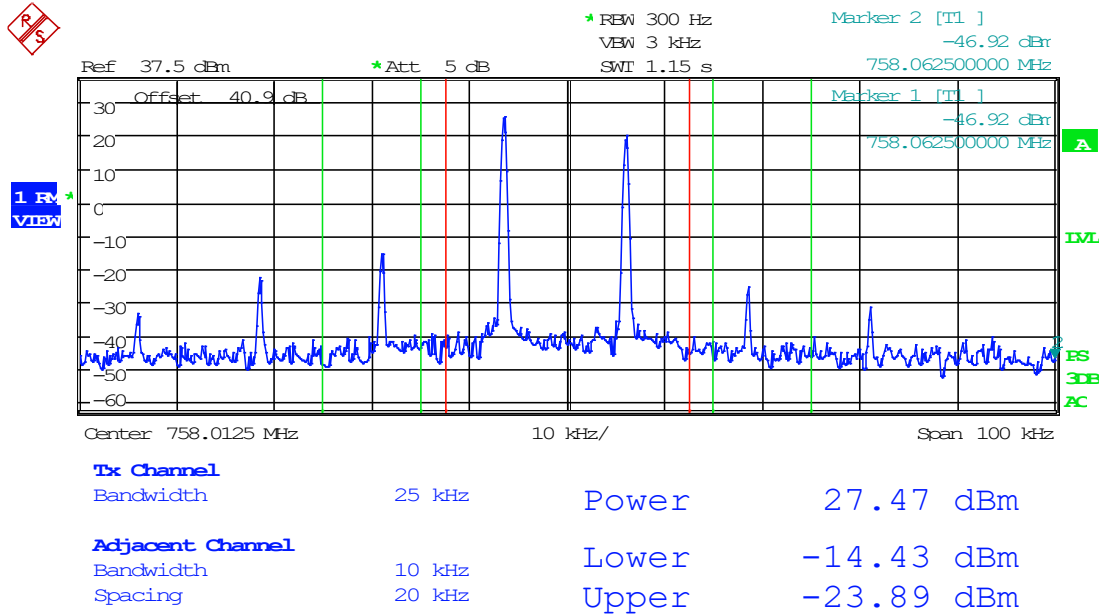

Date: 1.FEB.2023 08:14:35




8.7.5 25 kHz Signal, Downlink, AGC, 758.0125 MHz

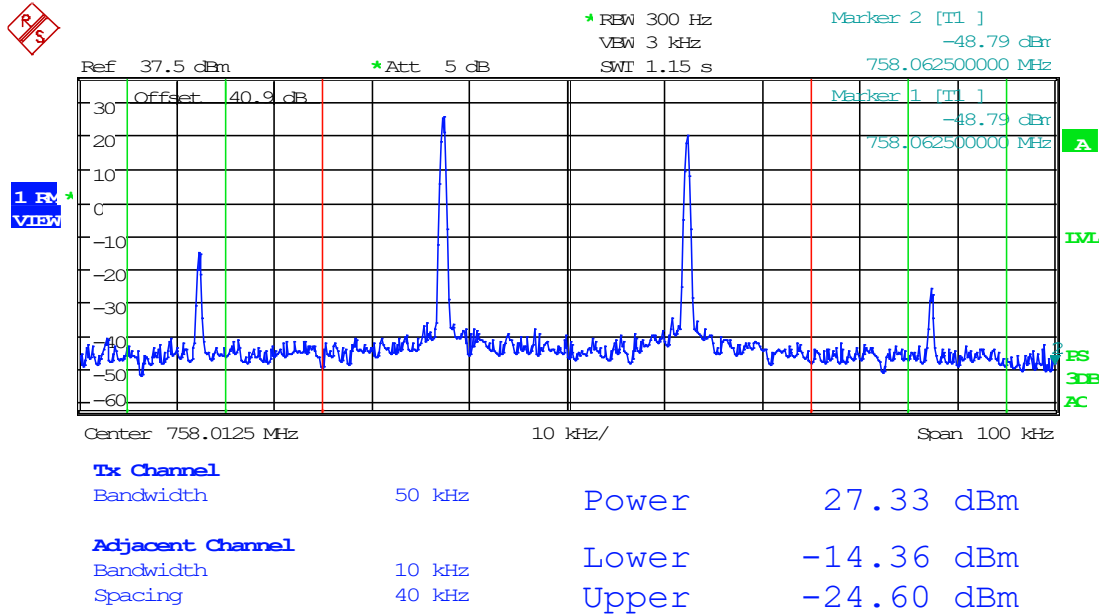

Date: 1.FEB.2023 08:47:48




8.7.6 25 kHz Signal, Downlink, AGC+3dB, 758.0125 MHz

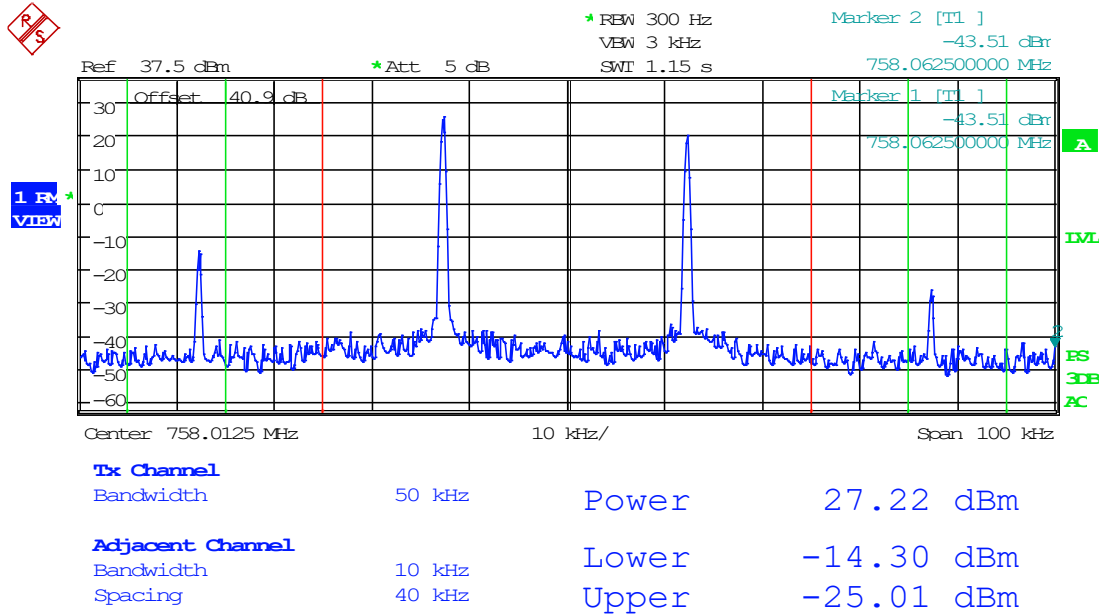

Date: 1.FEB.2023 08:48:27




8.7.7 6.25 kHz Signal, Downlink, AGC, 766 MHz

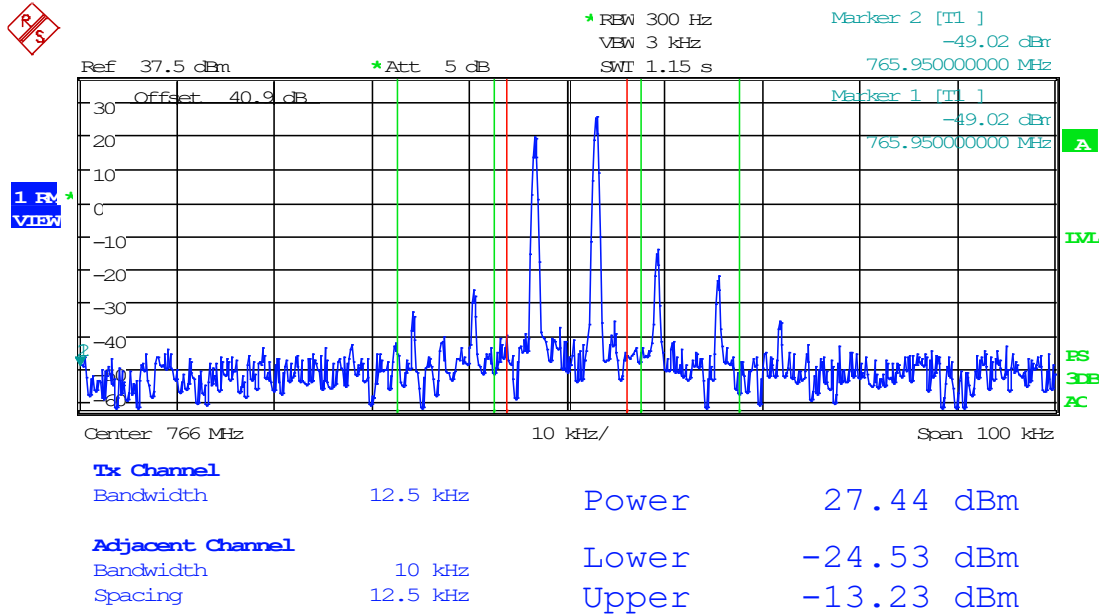

Date: 31.JAN.2023 16:09:43




8.7.8 6.25 kHz Signal, Downlink, AGC+3dB, 766 MHz

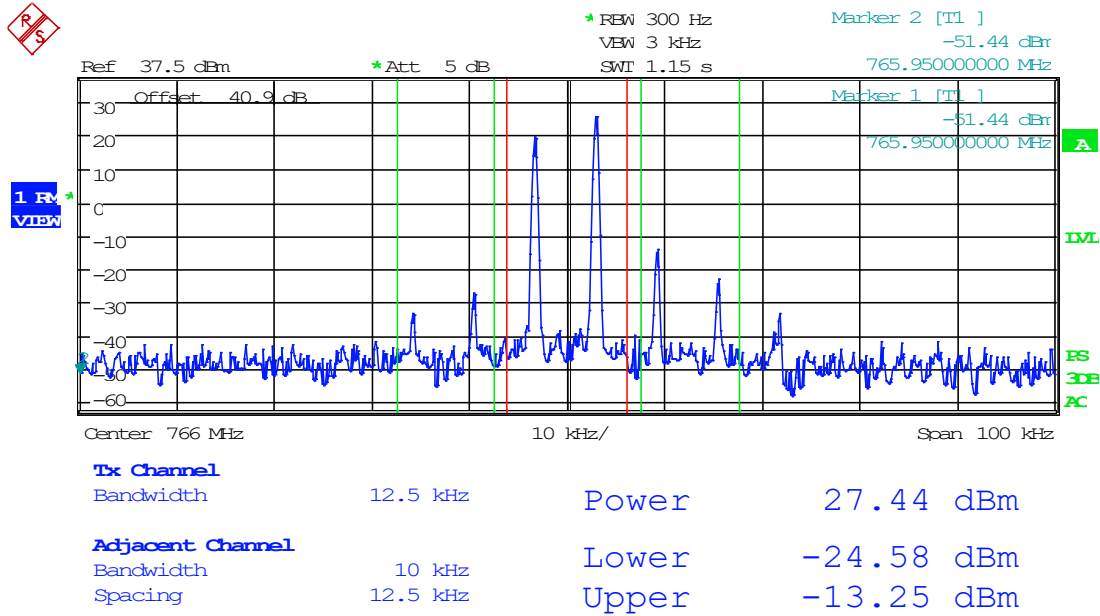

Date: 31.JAN.2023 16:10:36




8.7.9 12.5 kHz Signal, Downlink, AGC, 766 MHz

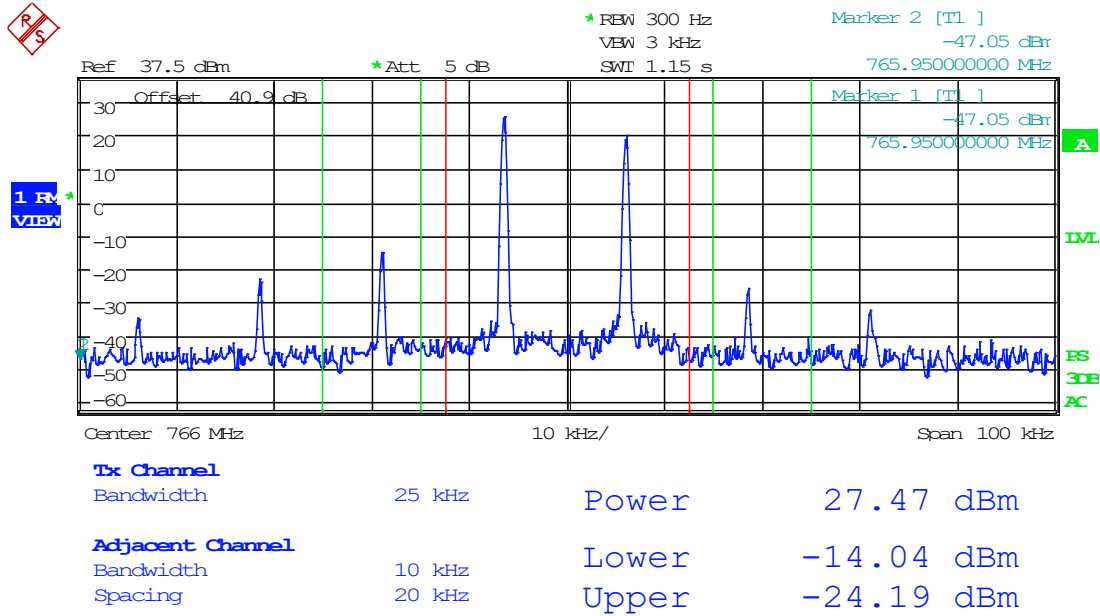

Date: 1.FEB.2023 08:18:55




8.7.10 12.5 kHz Signal, Downlink, AGC+3dB, 766 MHz

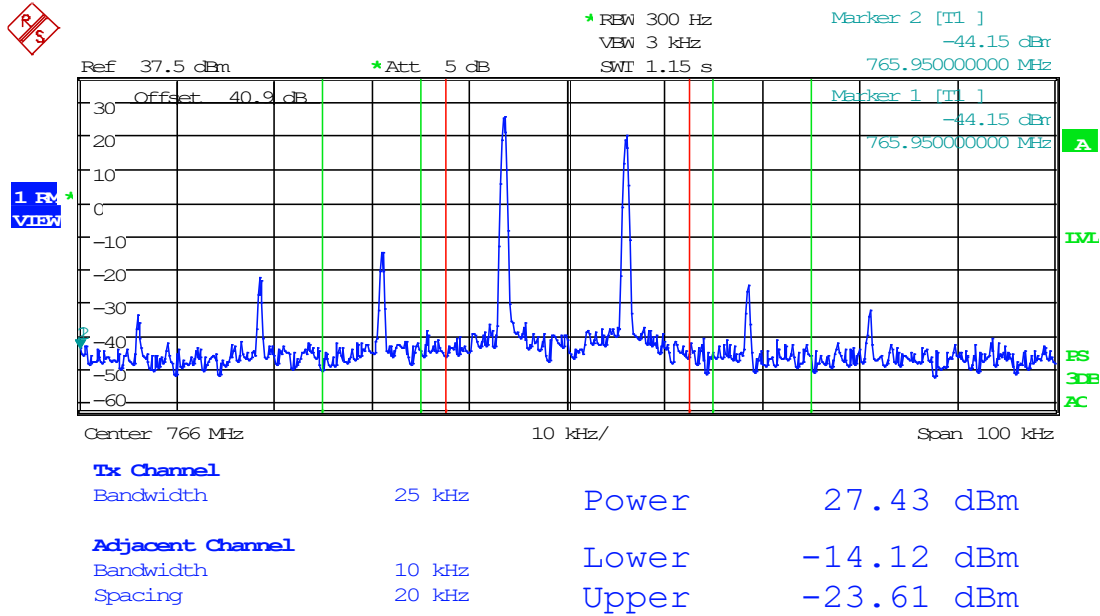

Date: 1.FEB.2023 08:19:31




8.7.11 25 kHz Signal, Downlink, AGC, 766 MHz

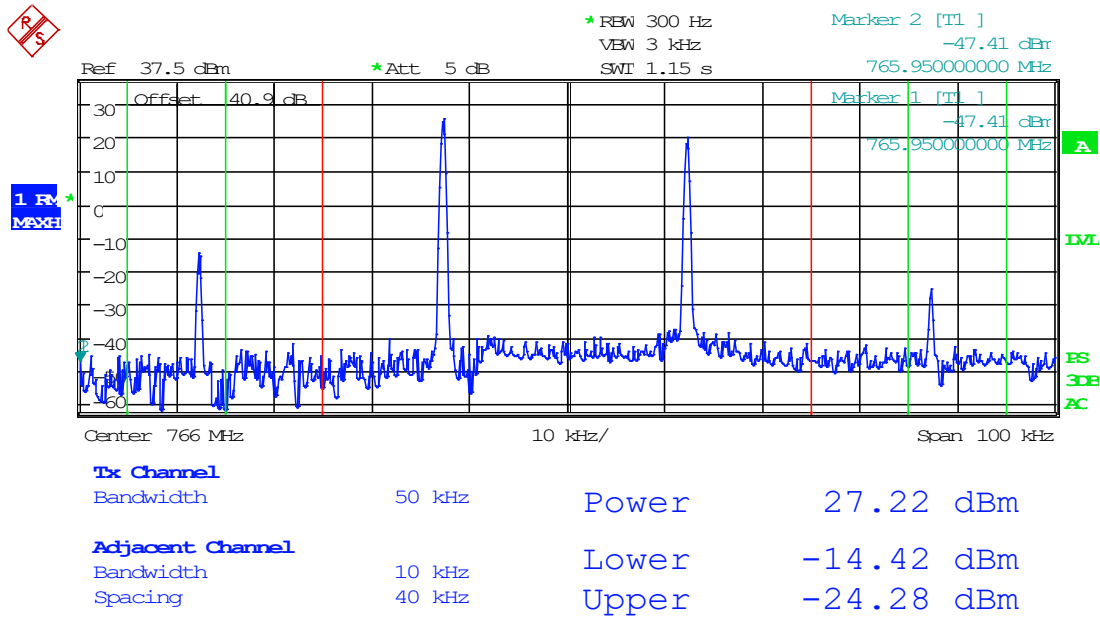

Date: 1.FEB.2023 08:49:57




8.7.12 25 kHz Signal, Downlink, AGC+3dB, 766 MHz

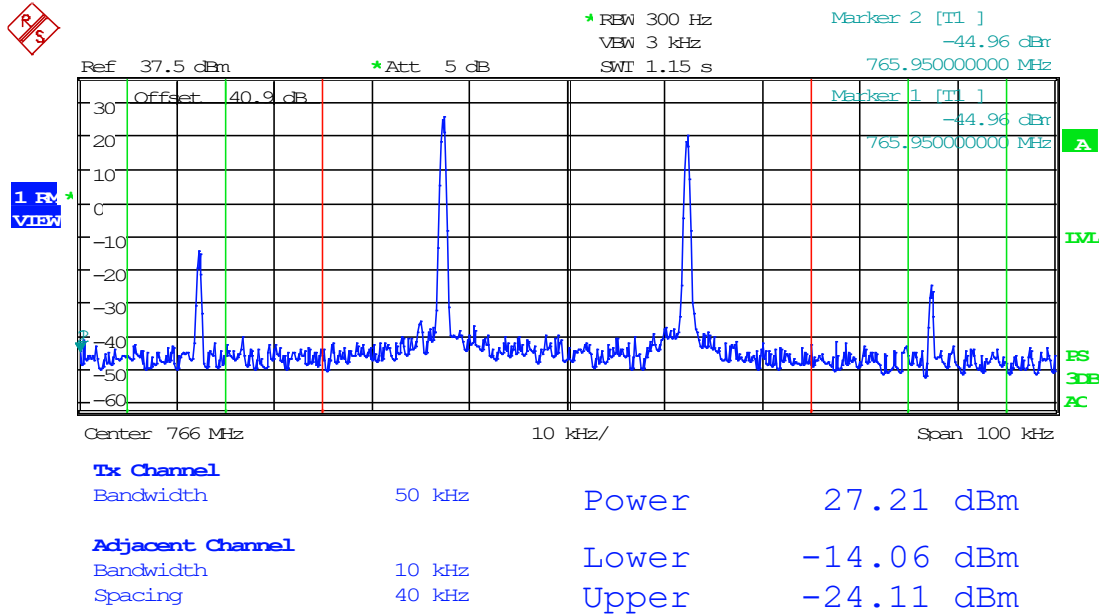

Date: 1.FEB.2023 08:50:32




8.7.13 6.25 kHz Signal, Downlink, AGC, 774.9875 MHz

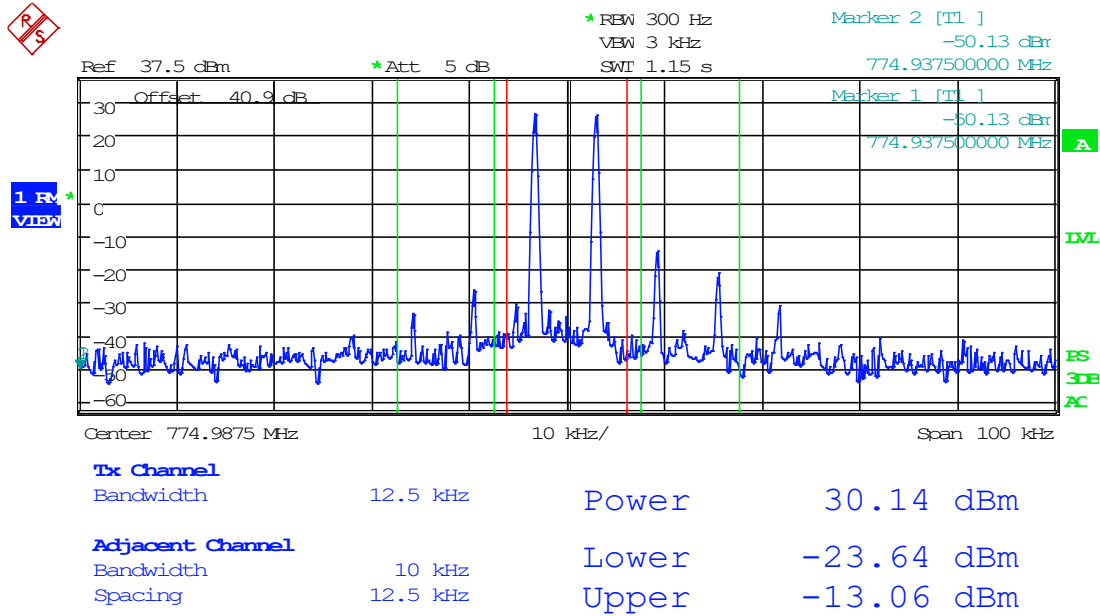

Date: 31.JAN.2023 16:12:04




8.7.14 6.25 kHz Signal, Downlink, AGC+3dB, 774.9875 MHz

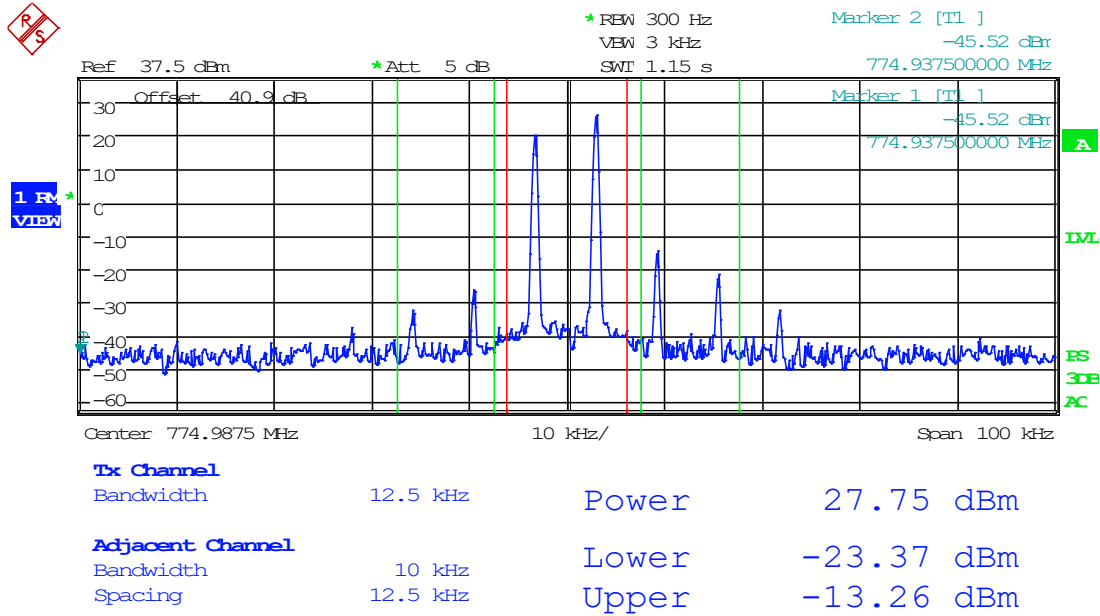

Date: 31.JAN.2023 16:12:48




8.7.15 12.5 kHz Signal, Downlink, AGC, 774.9875 MHz

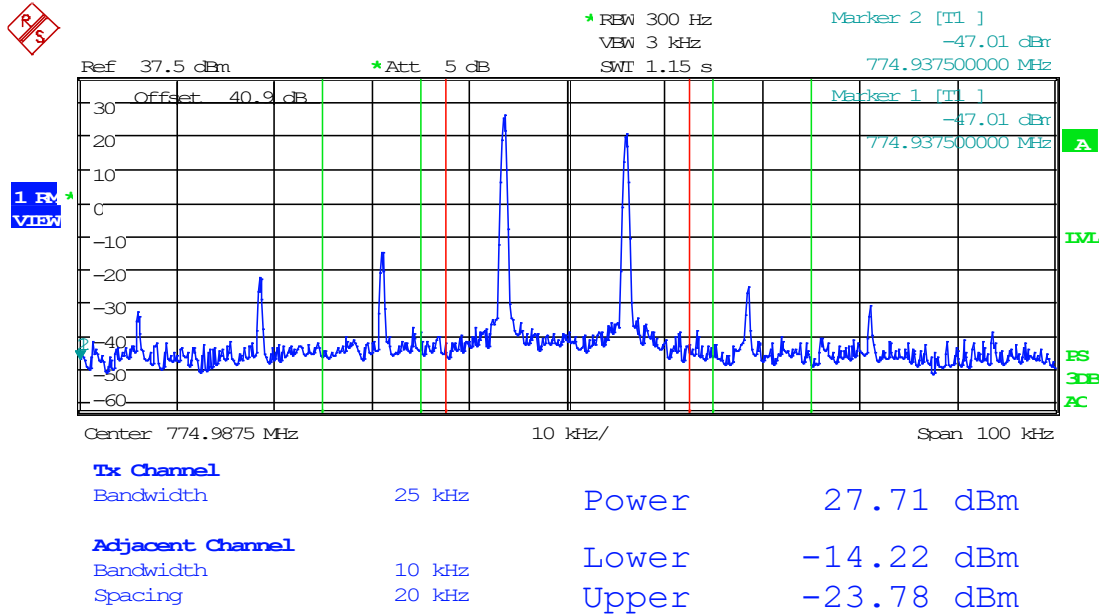

Date: 1.FEB.2023 08:21:24




8.7.16 12.5 kHz Signal, Downlink, AGC+3dB, 774.9875 MHz

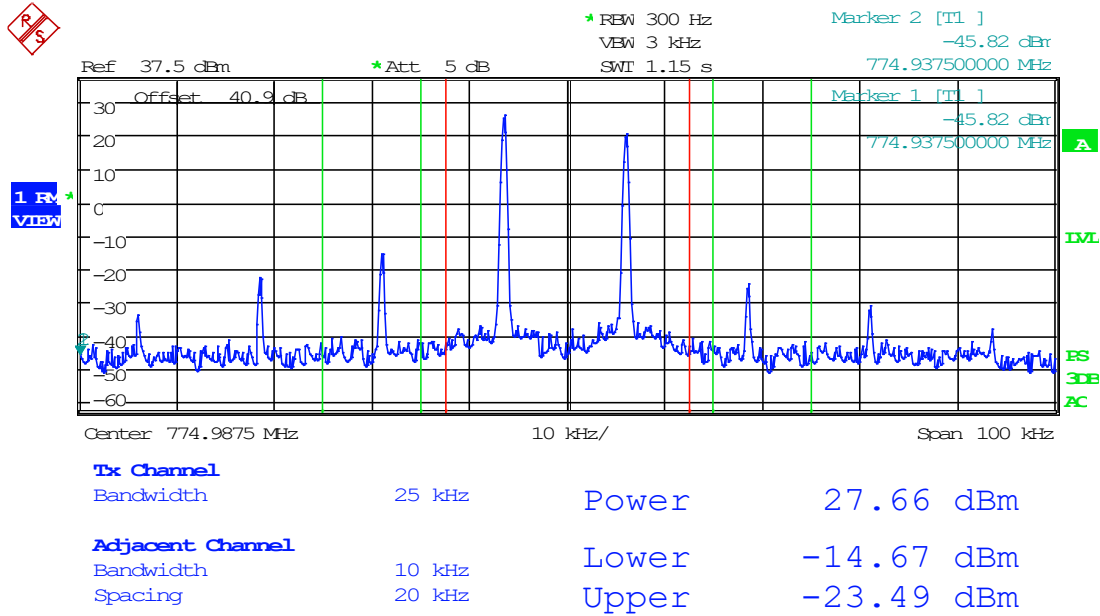

Date: 1.FEB.2023 08:22:00




8.7.17 25 kHz Signal, Downlink, AGC, 774.9875 MHz

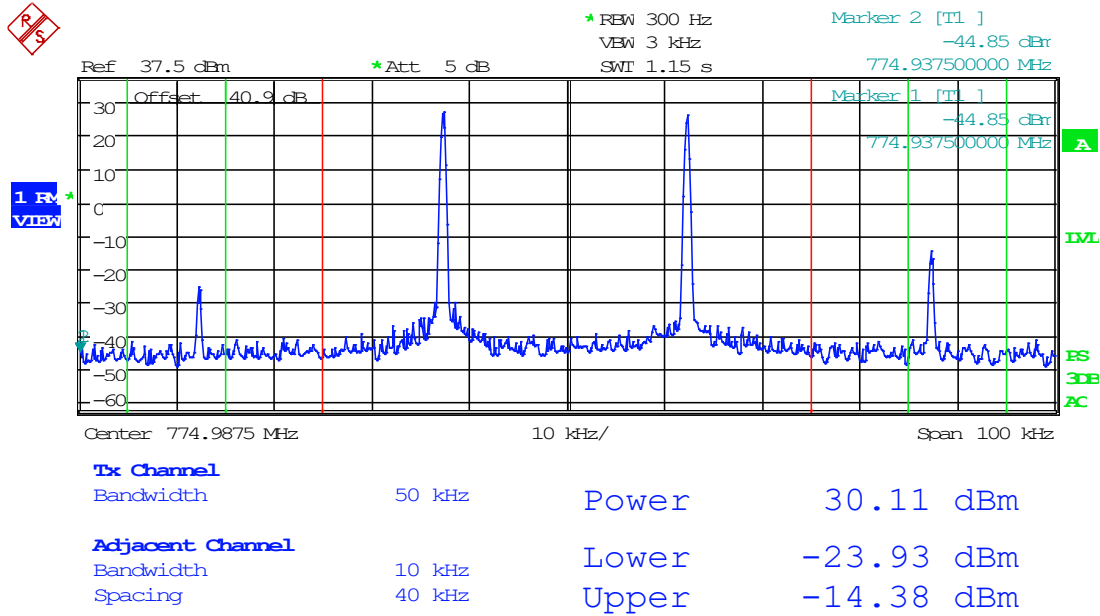

Date: 1.FEB.2023 08:52:05




8.7.18 25 kHz Signal, Downlink, AGC+3dB, 774.9875 MHz

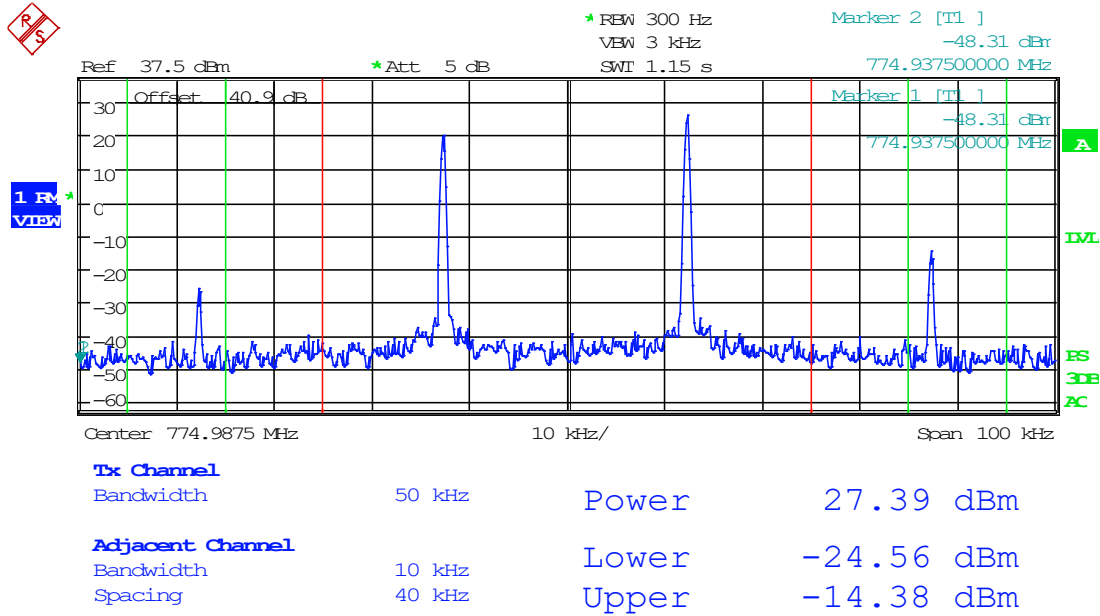

Date: 1.FEB.2023 08:52:44




8.7.19 6.25 kHz Signal, Downlink, AGC, 851.0125 MHz

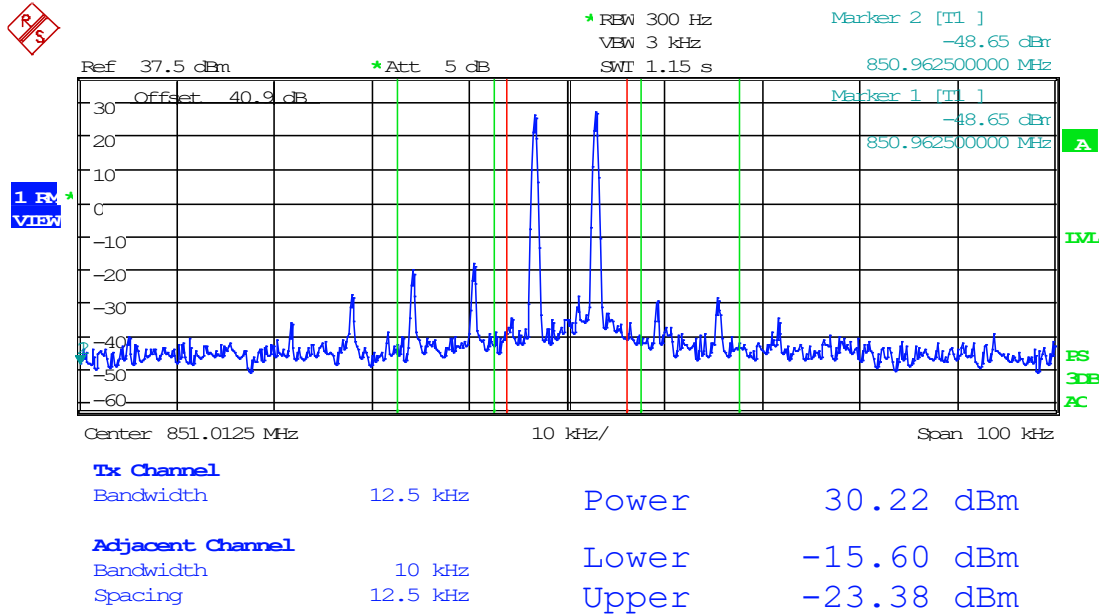

Date: 31.JAN.2023 16:14:21




8.7.20 6.25 kHz Signal, Downlink, AGC+3dB, 851.0125 MHz

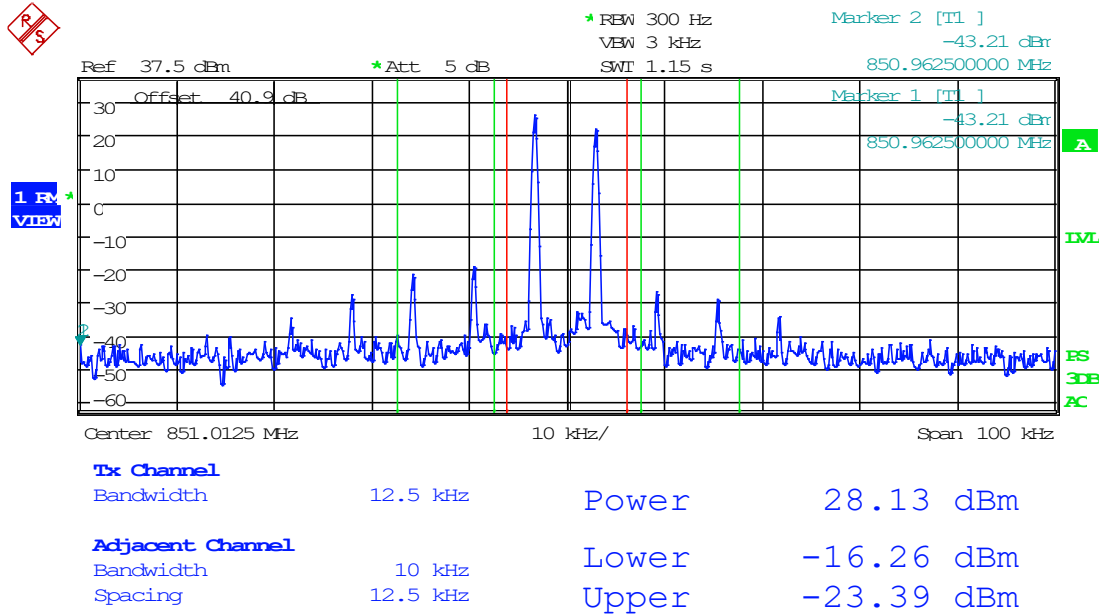

Date: 31.JAN.2023 16:14:56




8.7.21 12.5 kHz Signal, Downlink, AGC, 851.0125 MHz

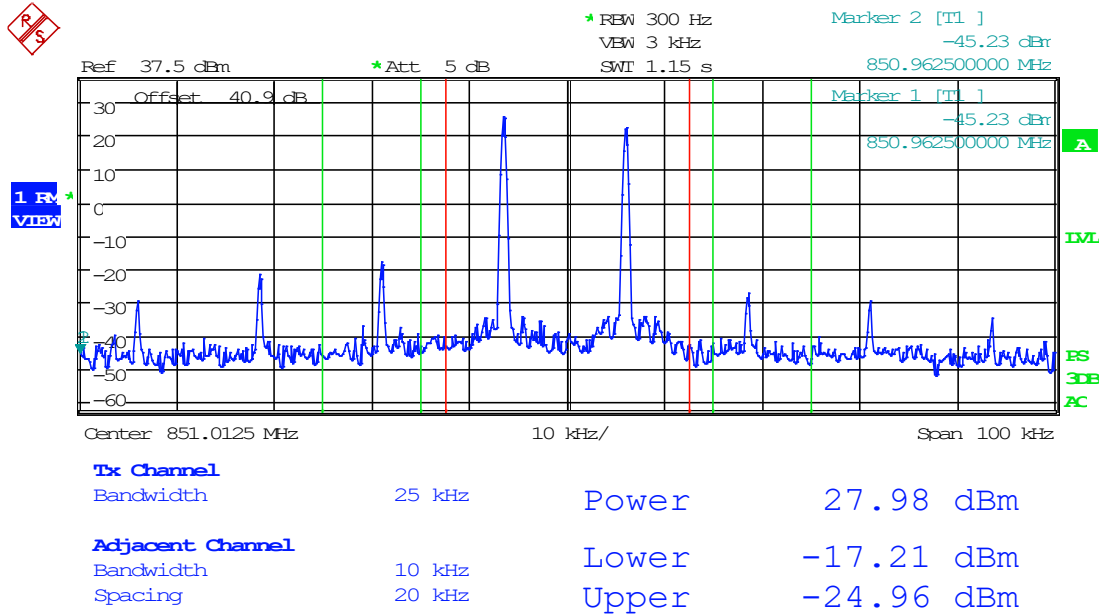

Date: 1.FEB.2023 08:23:28




8.7.22 12.5 kHz Signal, Downlink, AGC+3dB, 851.0125 MHz

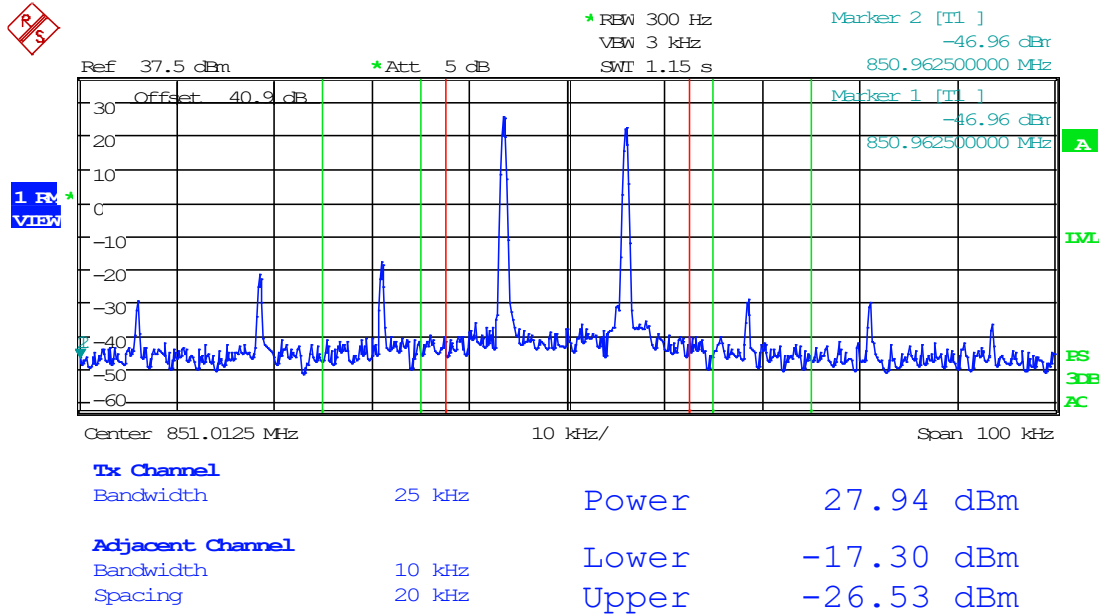

Date: 1.FEB.2023 08:24:06




8.7.23 25 kHz Signal, Downlink, AGC, 851.0125 MHz

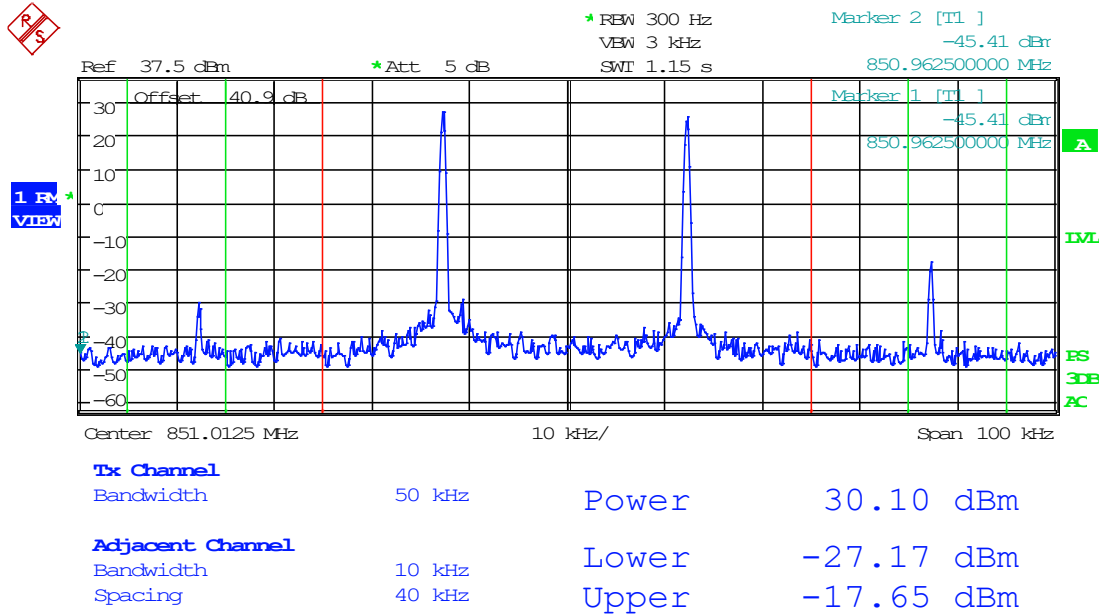

Date: 1.FEB.2023 08:54:07




8.7.24 25 kHz Signal, Downlink, AGC+3dB, 851.0125 MHz

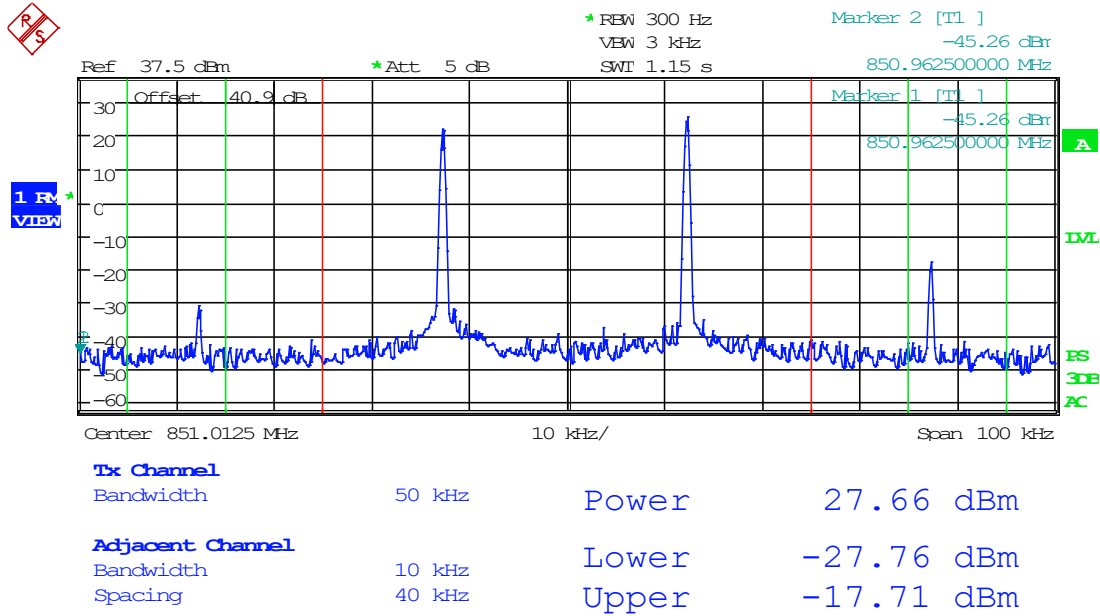

Date: 1.FEB.2023 08:54:47




8.7.25 6.25 kHz Signal, Downlink, AGC, 857 MHz

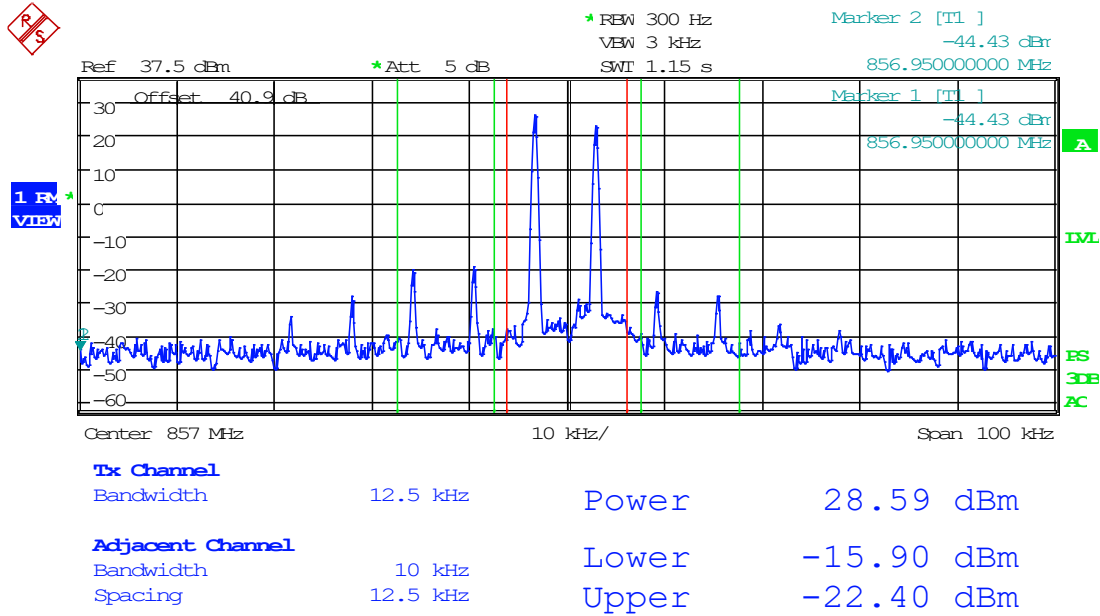

Date: 31.JAN.2023 16:16:11




8.7.26 6.25 kHz Signal, Downlink, AGC+3dB, 857 MHz

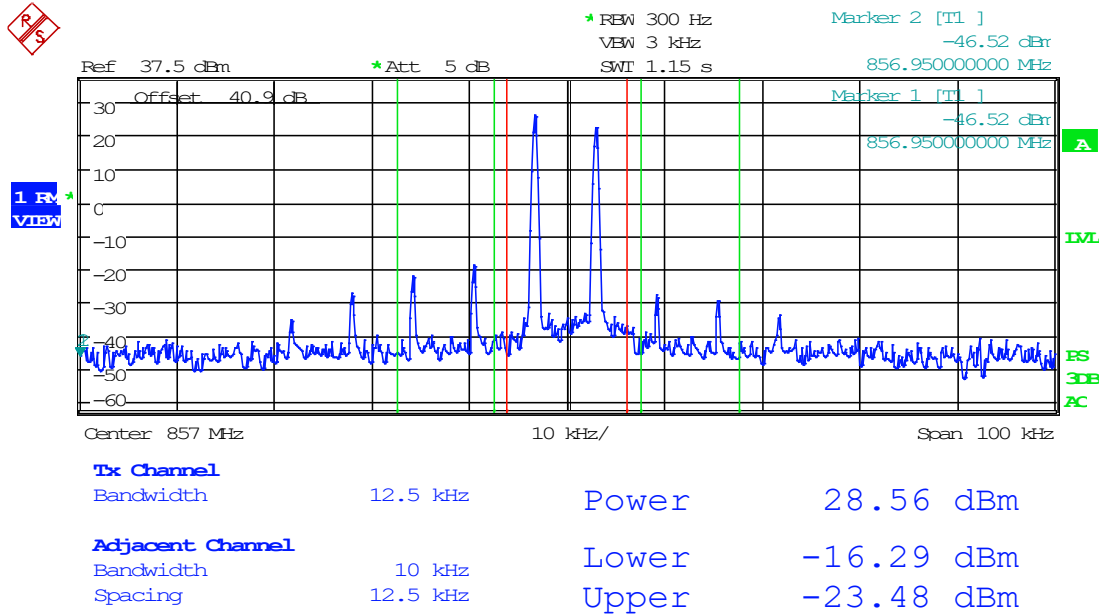

Date: 31.JAN.2023 16:17:00




8.7.27 12.5 kHz Signal, Downlink, AGC, 857 MHz

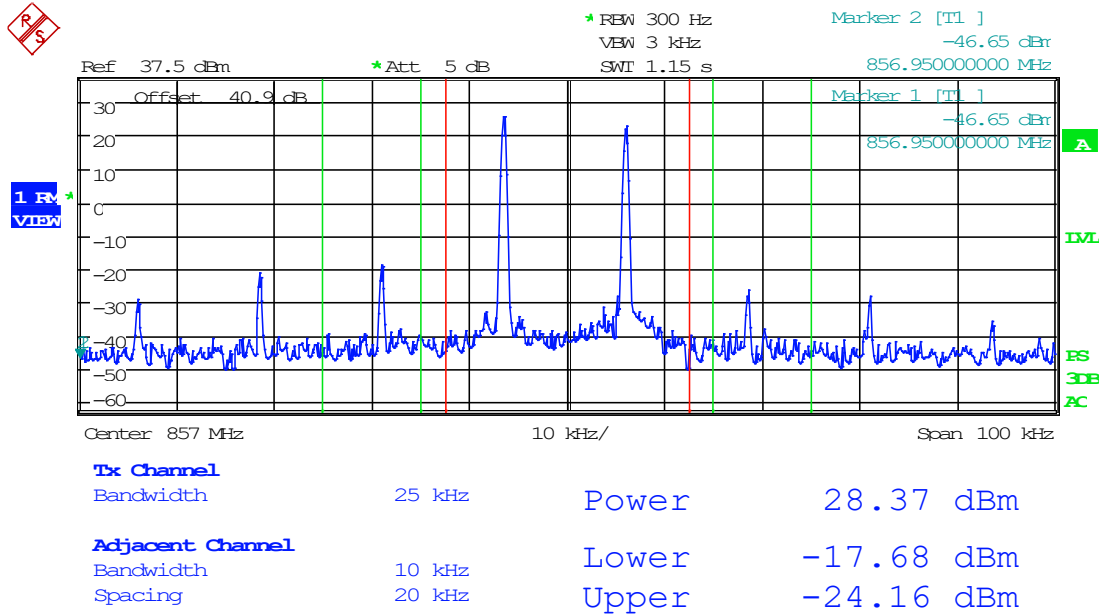

Date: 1.FEB.2023 08:25:22




8.7.28 12.5 kHz Signal, Downlink, AGC+3dB, 857 MHz

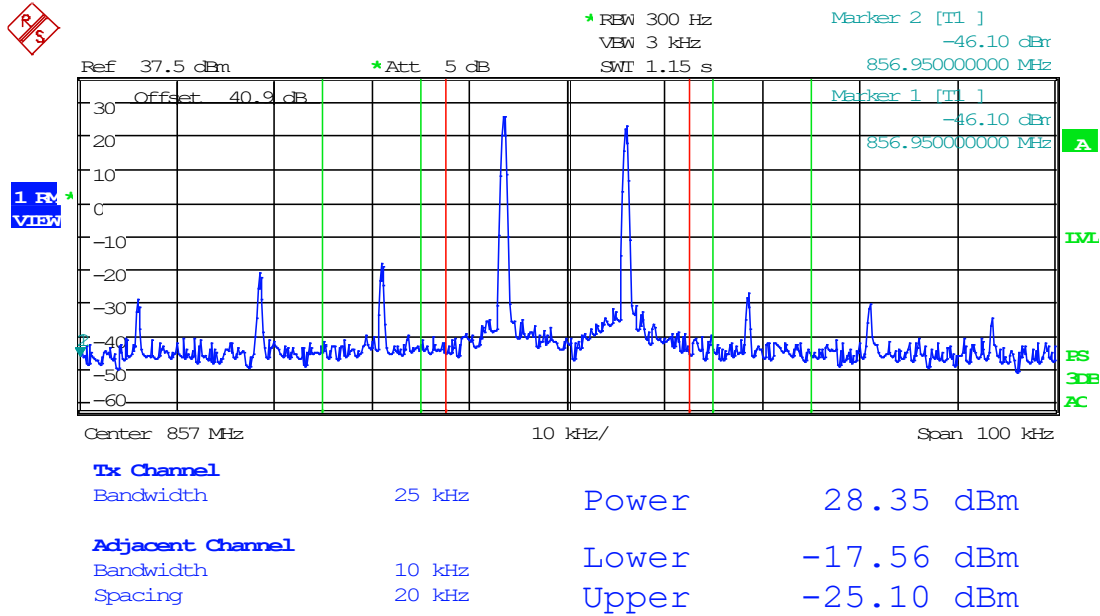

Date: 1.FEB.2023 08:26:00




8.7.29 25 kHz Signal, Downlink, AGC, 857 MHz

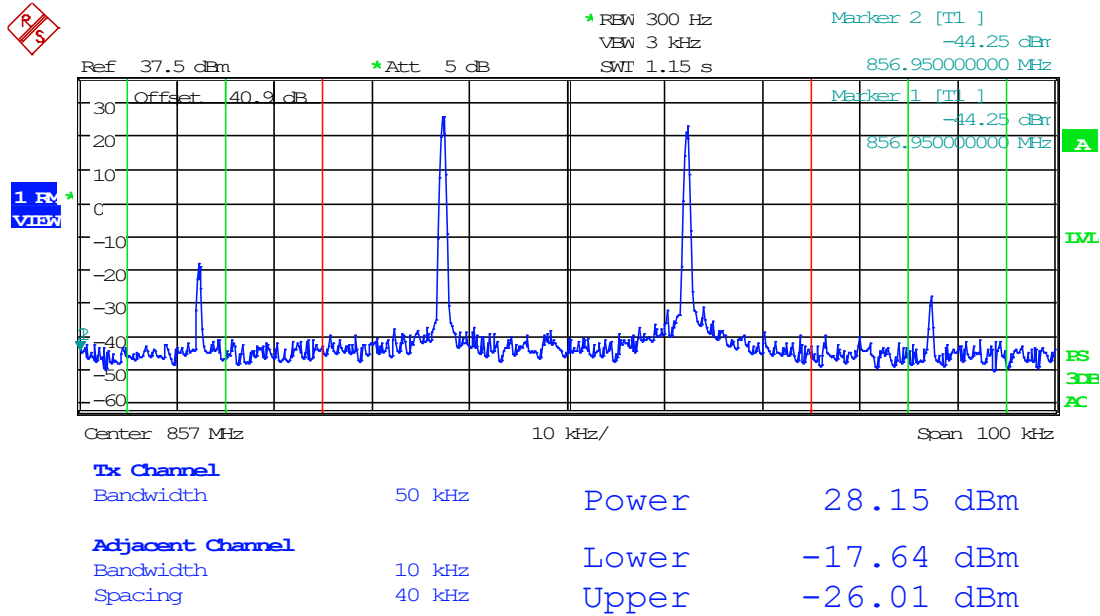

Date: 1.FEB.2023 08:55:57




8.7.30 25 kHz Signal, Downlink, AGC+3dB, 857 MHz

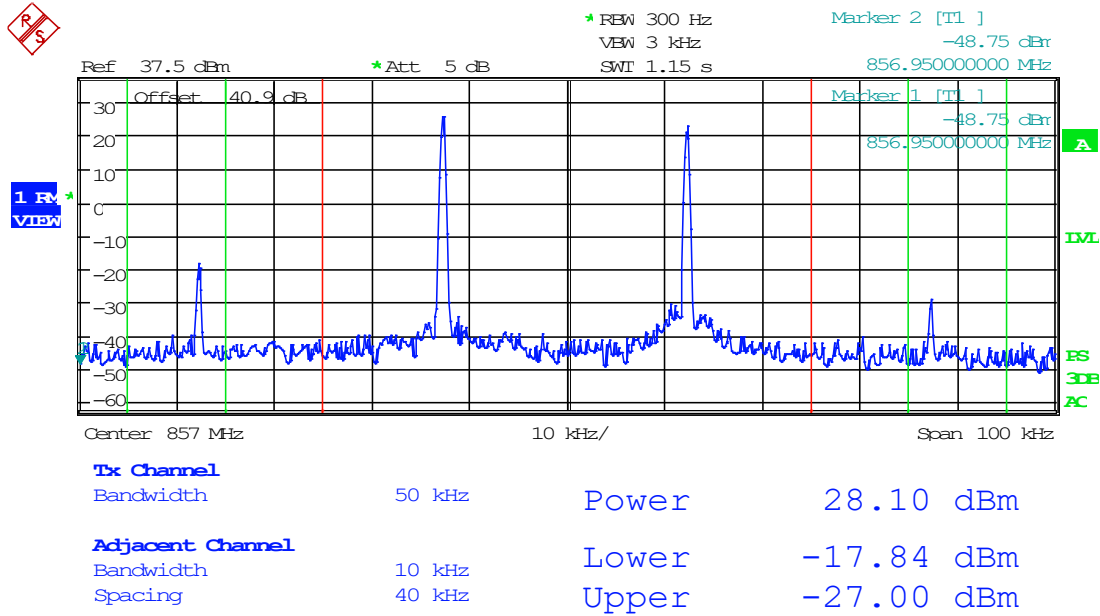

Date: 1.FEB.2023 08:56:32




8.7.31 6.25 kHz Signal, Downlink, AGC, 868.9875 MHz

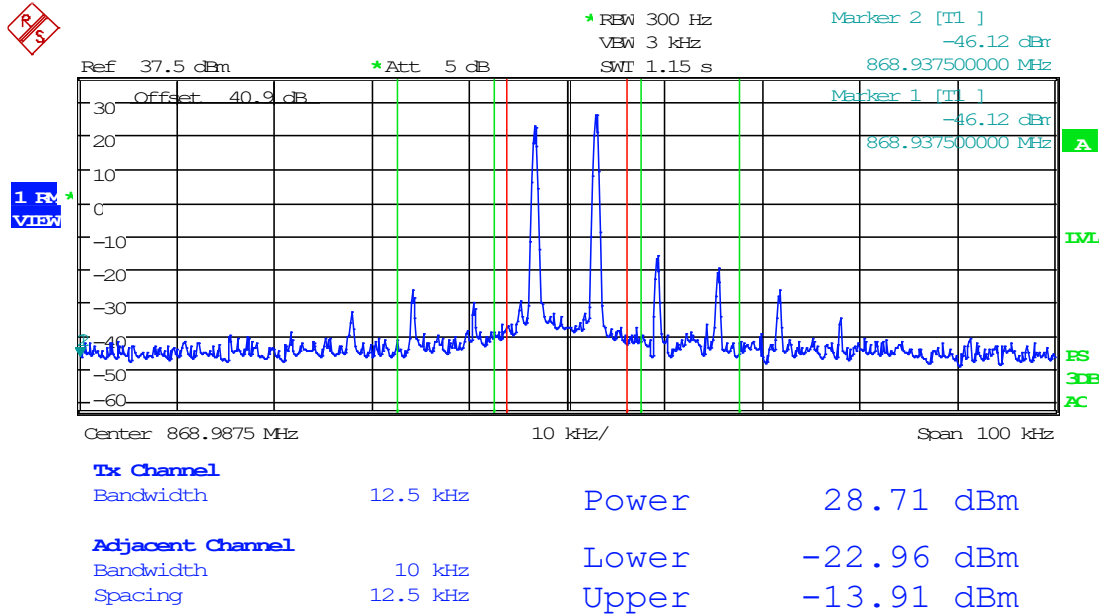

Date: 31.JAN.2023 16:18:26




8.7.32 6.25 kHz Signal, Downlink, AGC+3dB, 868.9875 MHz

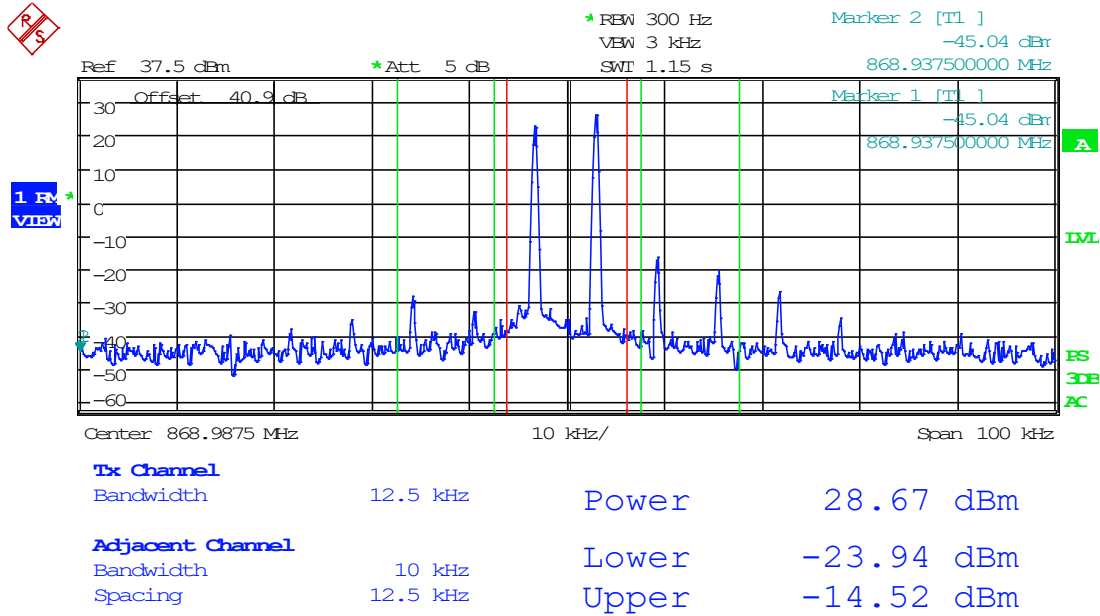

Date: 31.JAN.2023 16:19:09




8.7.33 12.5 kHz Signal, Downlink, AGC, 868.9875 MHz

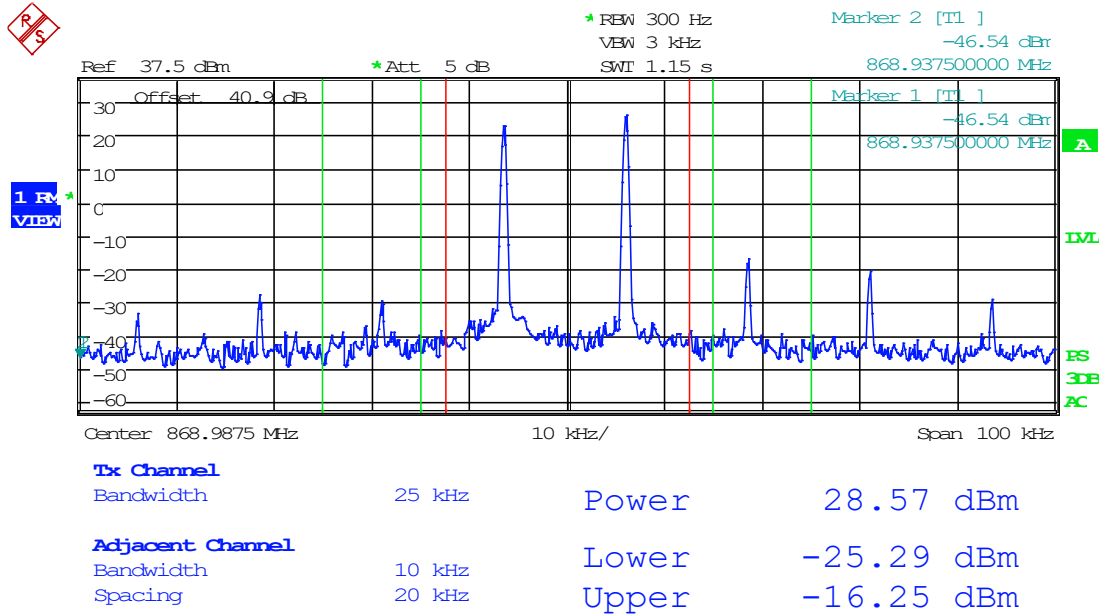

Date: 1.FEB.2023 08:27:52




8.7.34 12.5 kHz Signal, Downlink, AGC+3dB, 868.9875 MHz

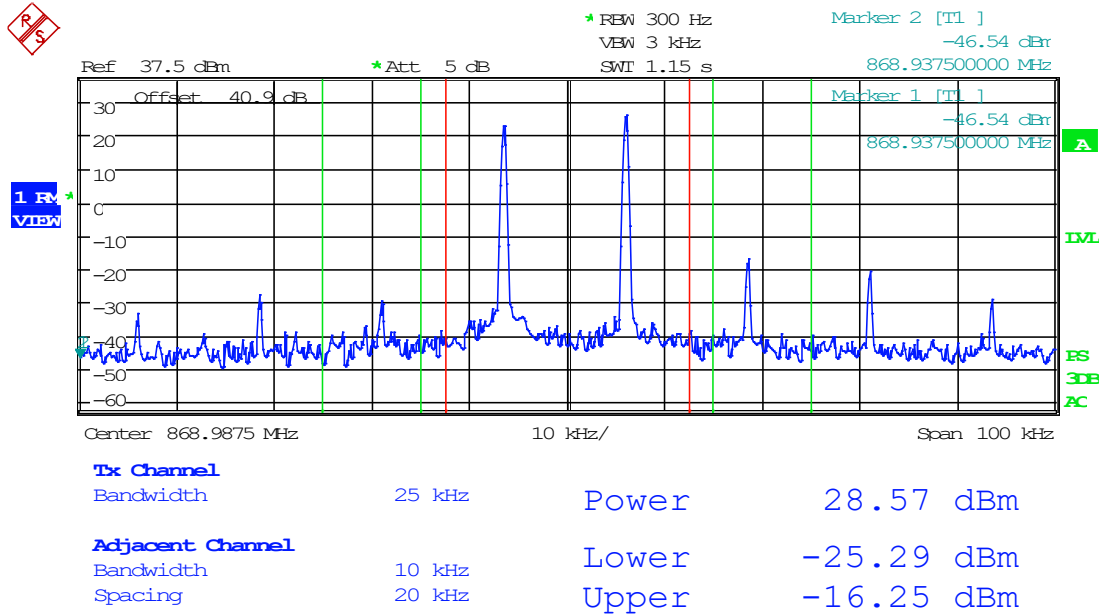

Date: 1.FEB.2023 08:27:52




8.7.35 25 kHz Signal, Downlink, AGC, 868.9875 MHz

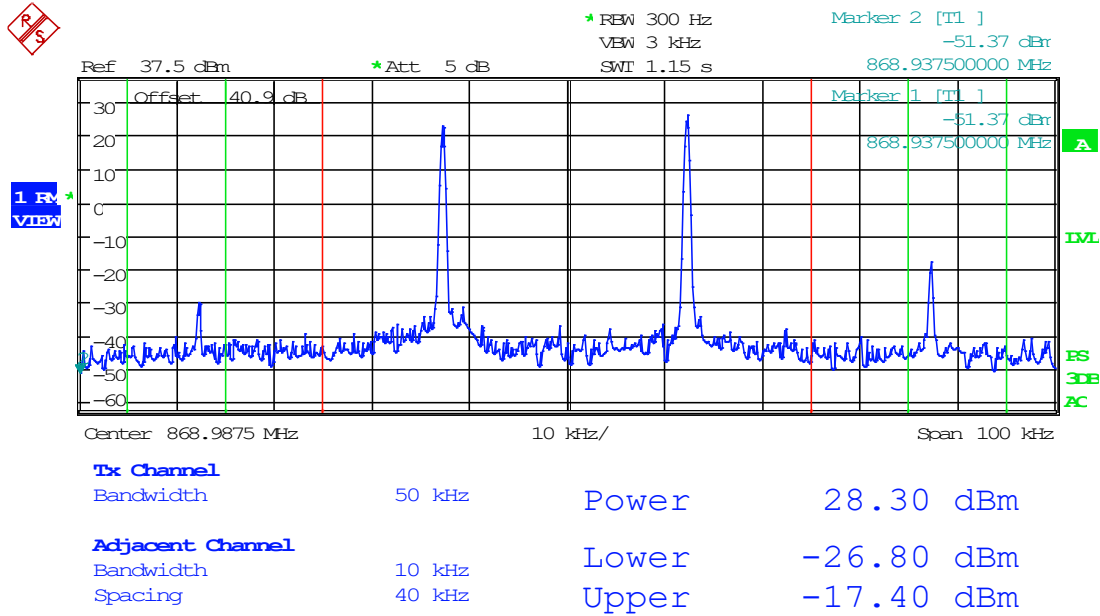

Date: 1.FEB.2023 08:57:46




8.7.36 25 kHz Signal, Downlink, AGC+3dB, 868.9875 MHz

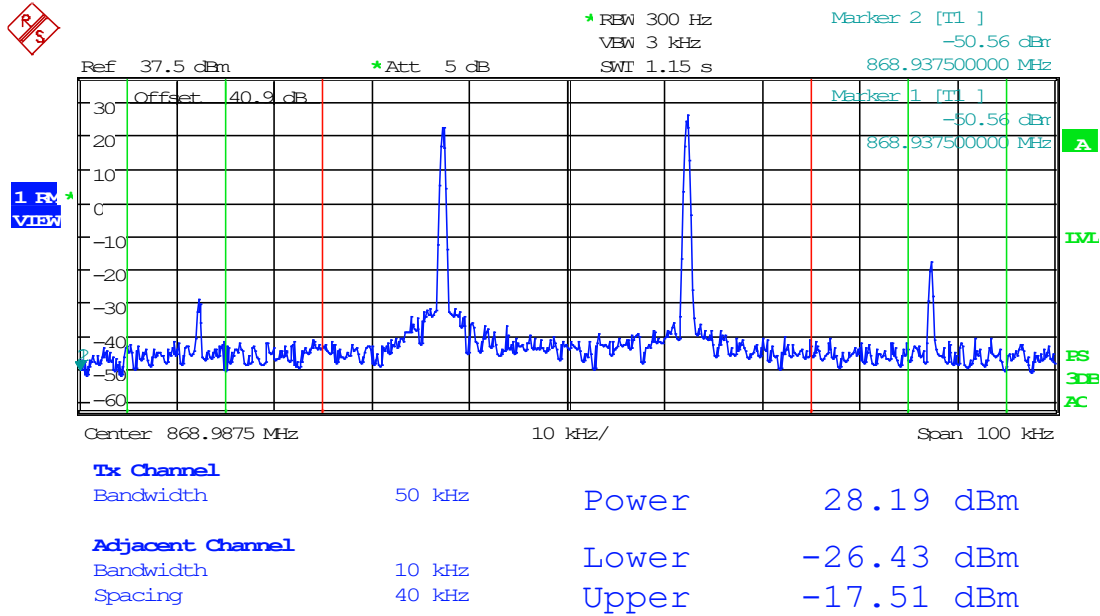

Date: 1.FEB.2023 08:58:26

8.8 Emission Mask, Out-of-Band

Limits from FCC Parts 2.1051, 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

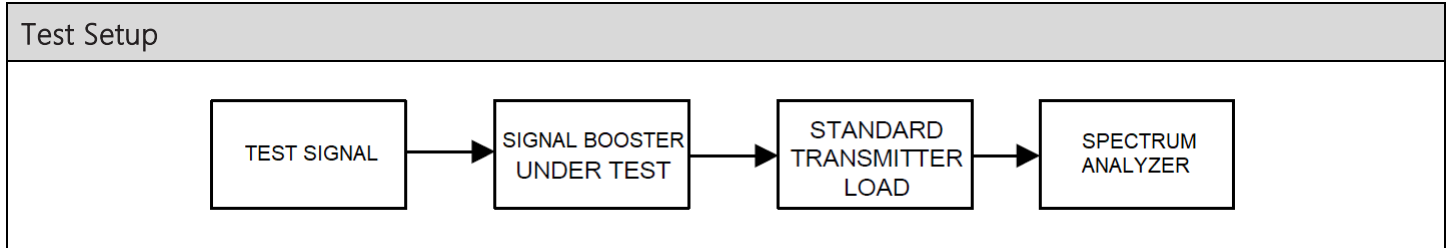


Note: Testing was done simultaneously on all combinations of Uplinks and Downlinks to address co-location of signals.



Conducted Emissions Spectrum Plots


8.8.1 30 MHz to 1 GHz, 758.0125 MHz

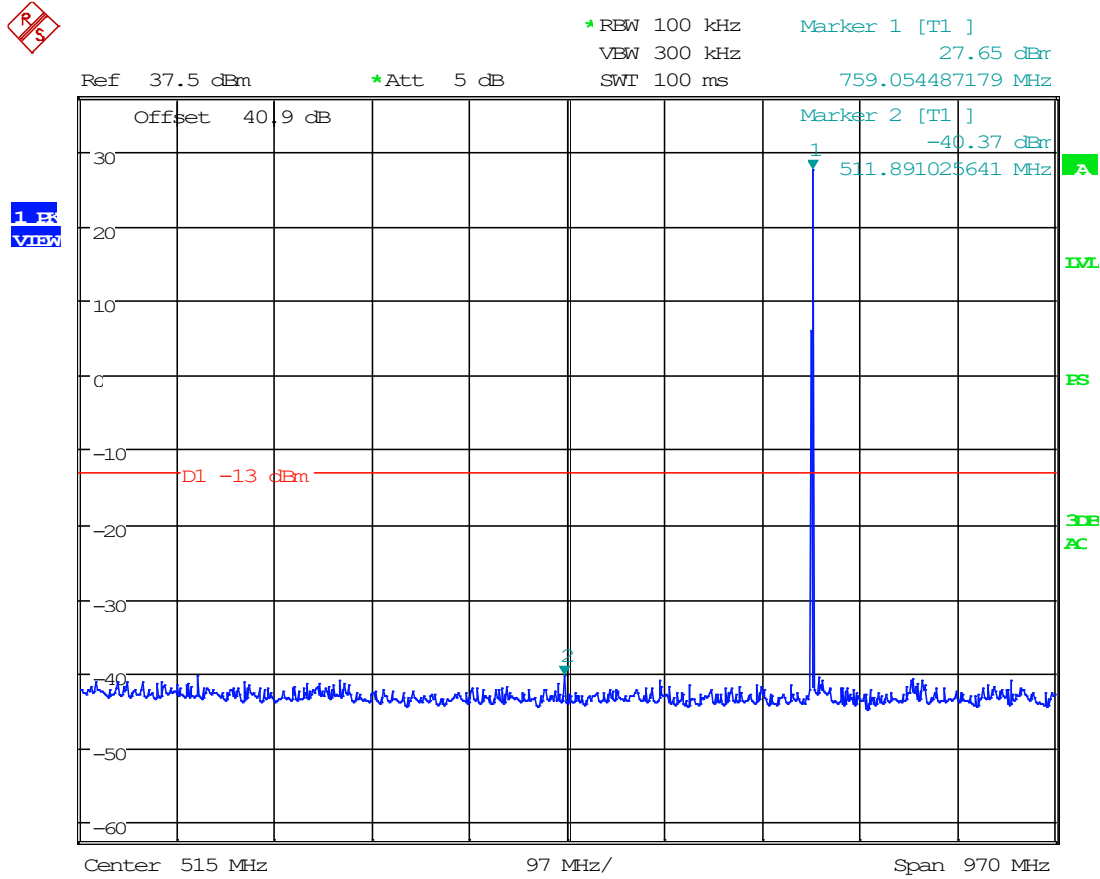

Date: 30.JAN.2023 16:51:34




8.8.2 1 GHz to 10th Harmonic, 758.0125 MHz

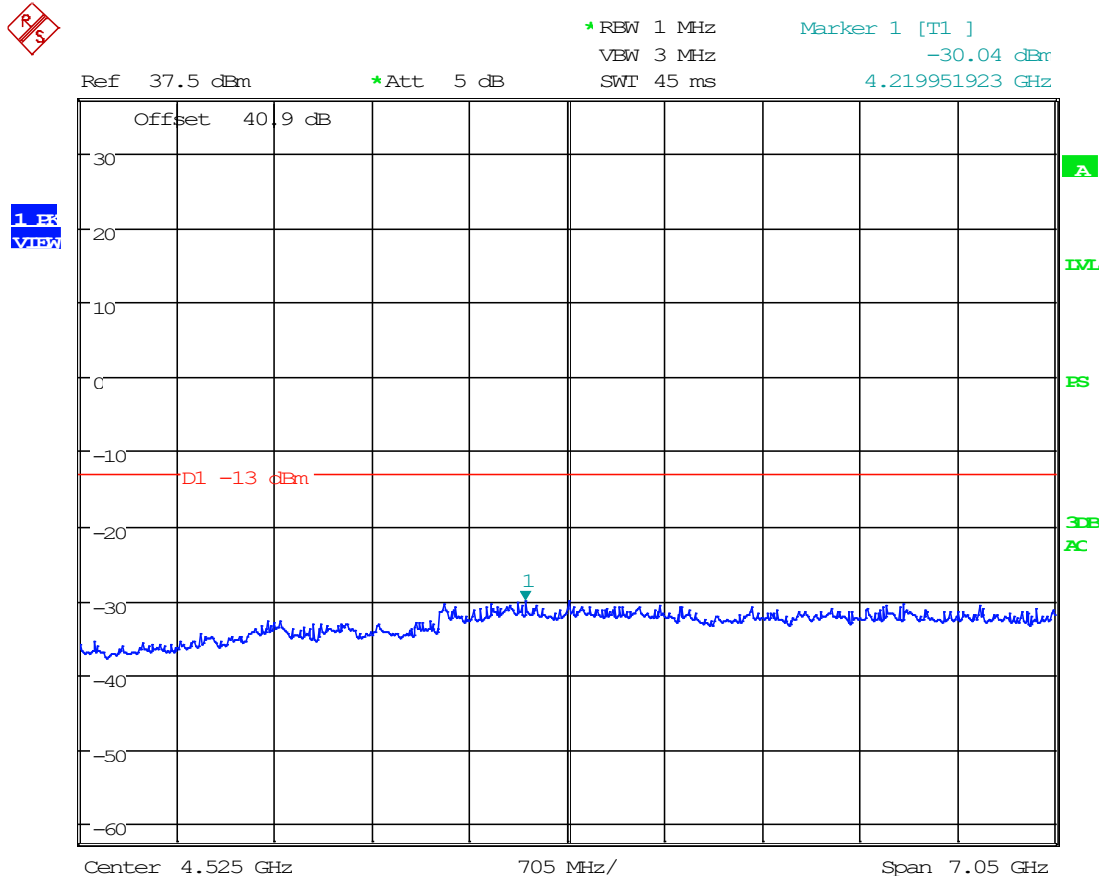

Date: 30.JAN.2023 16:59:07




8.8.3 30 MHz to 1 GHz, 766 MHz

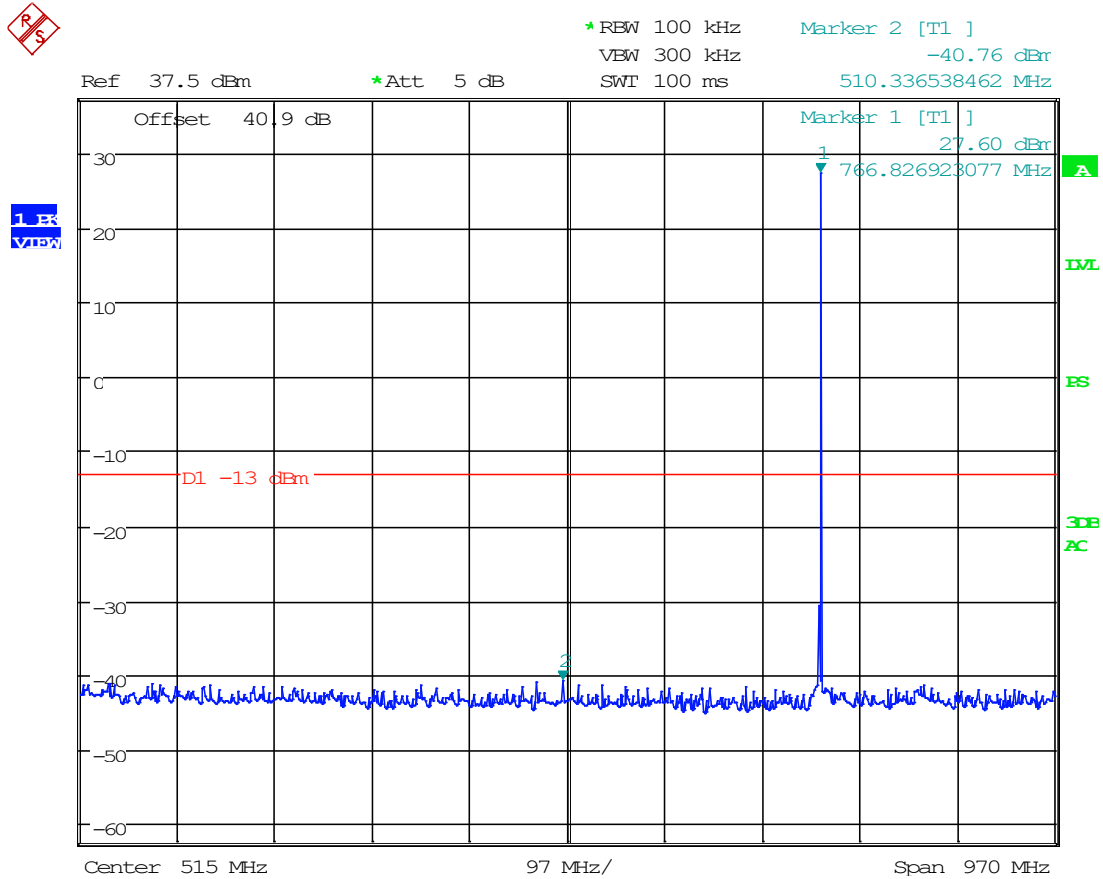

Date: 30.JAN.2023 16:53:24




8.8.4 1 GHz to 10th Harmonic, 766 MHz

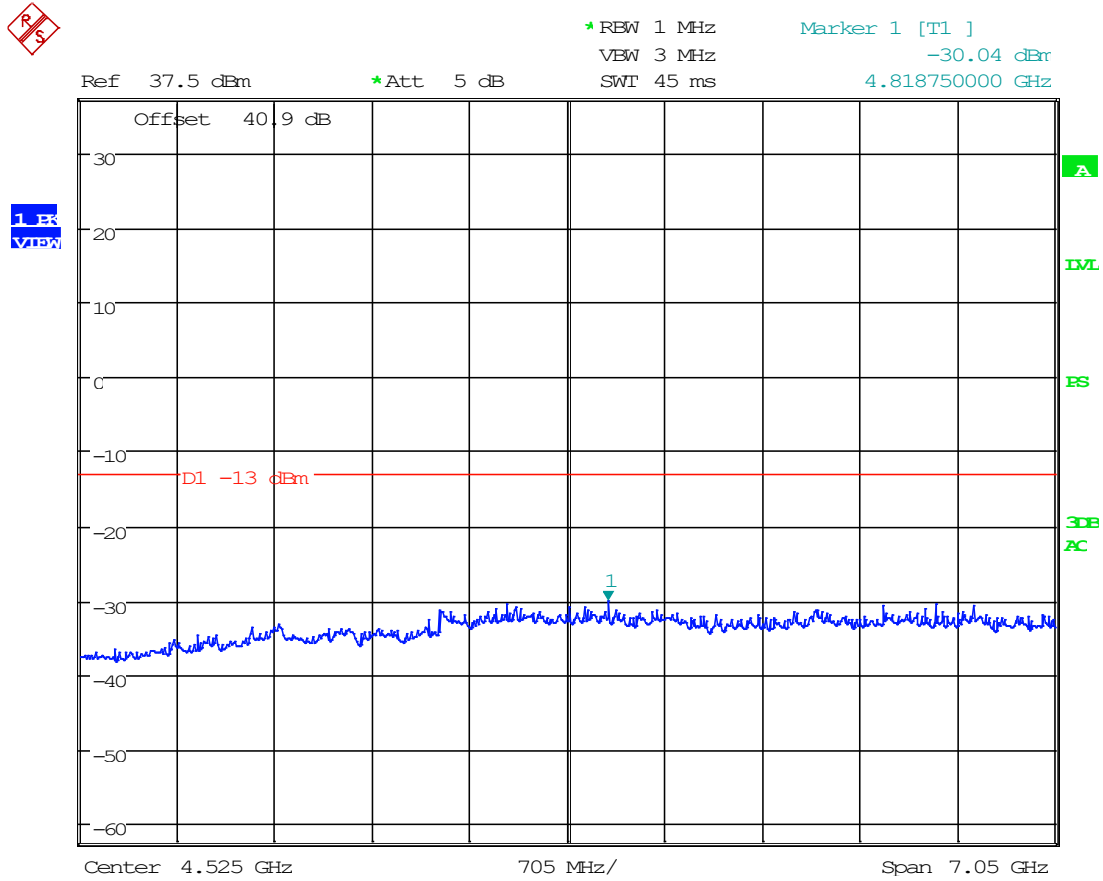

Date: 30.JAN.2023 17:00:03




8.8.5 30 MHz to 1 GHz, 774.9875 MHz

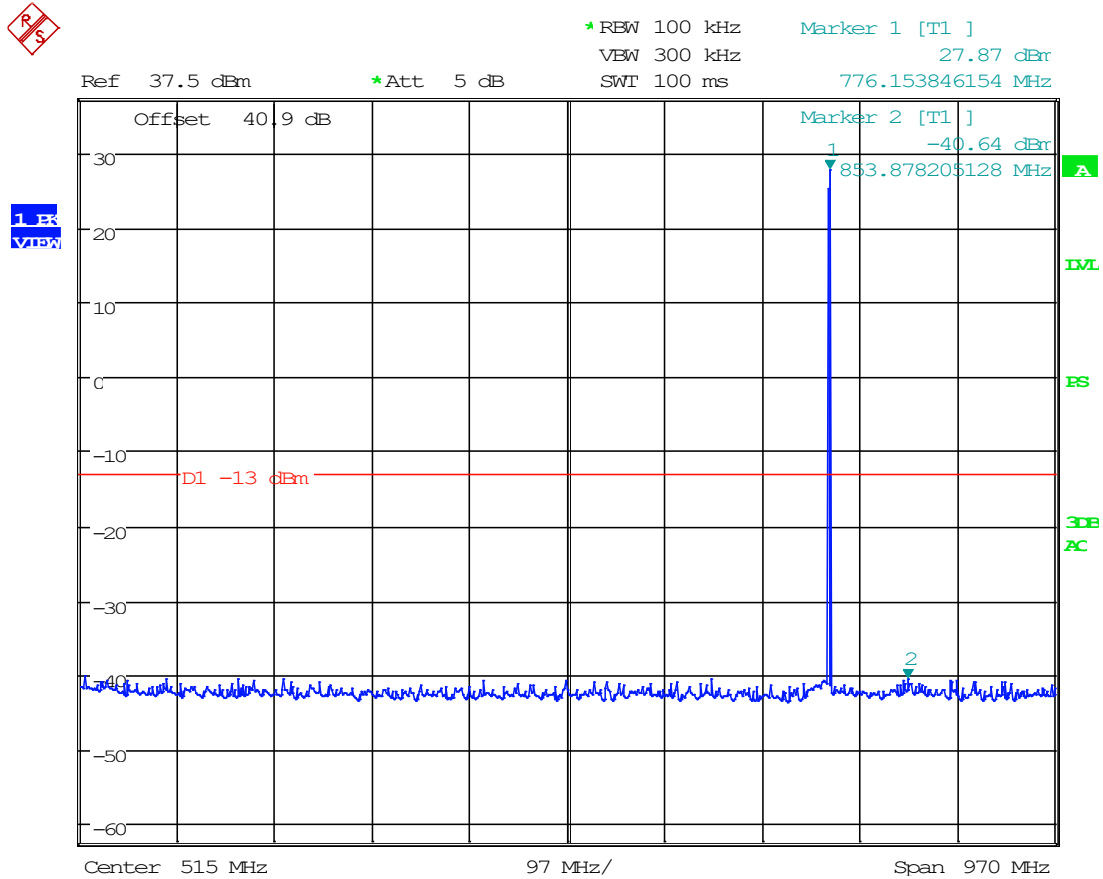

Date: 30.JAN.2023 16:54:26




8.8.6 1 GHz to 10th Harmonic, 774.9875 MHz

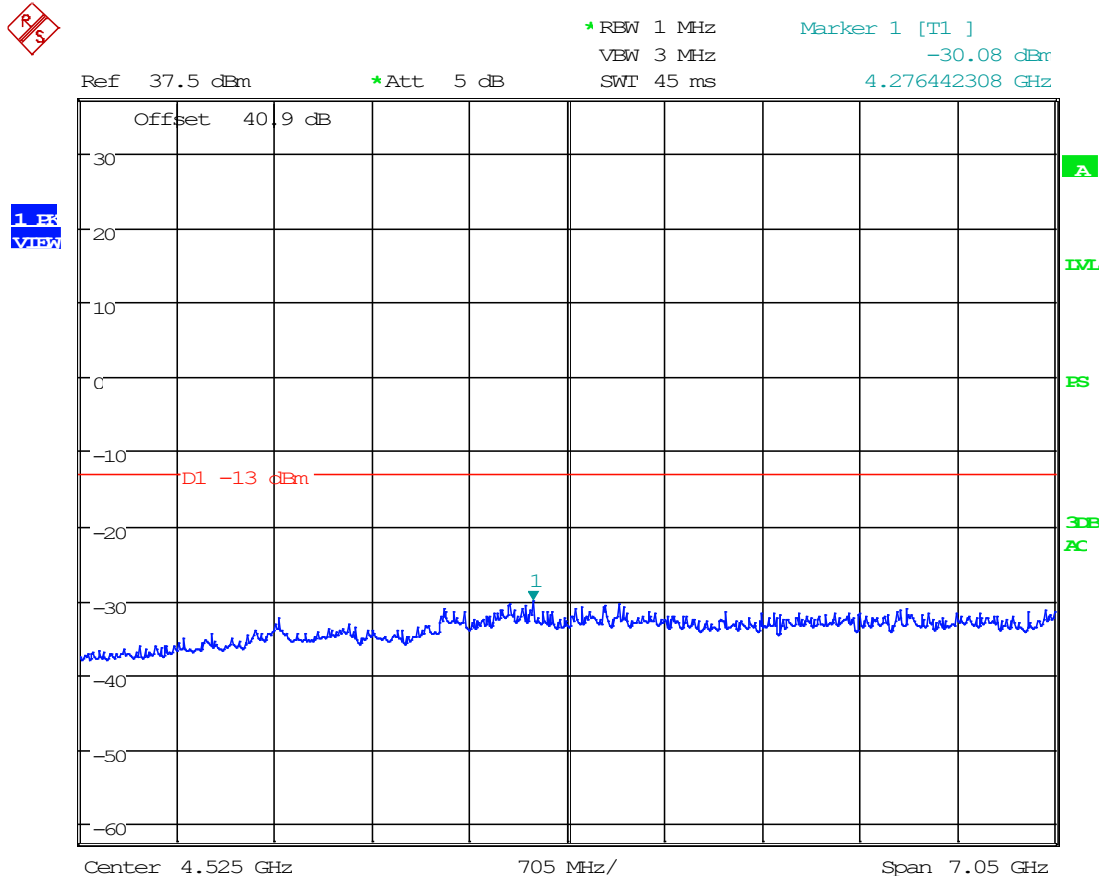

Date: 30.JAN.2023 17:01:18




8.8.7 30 MHz to 1 GHz, 851.0125 MHz

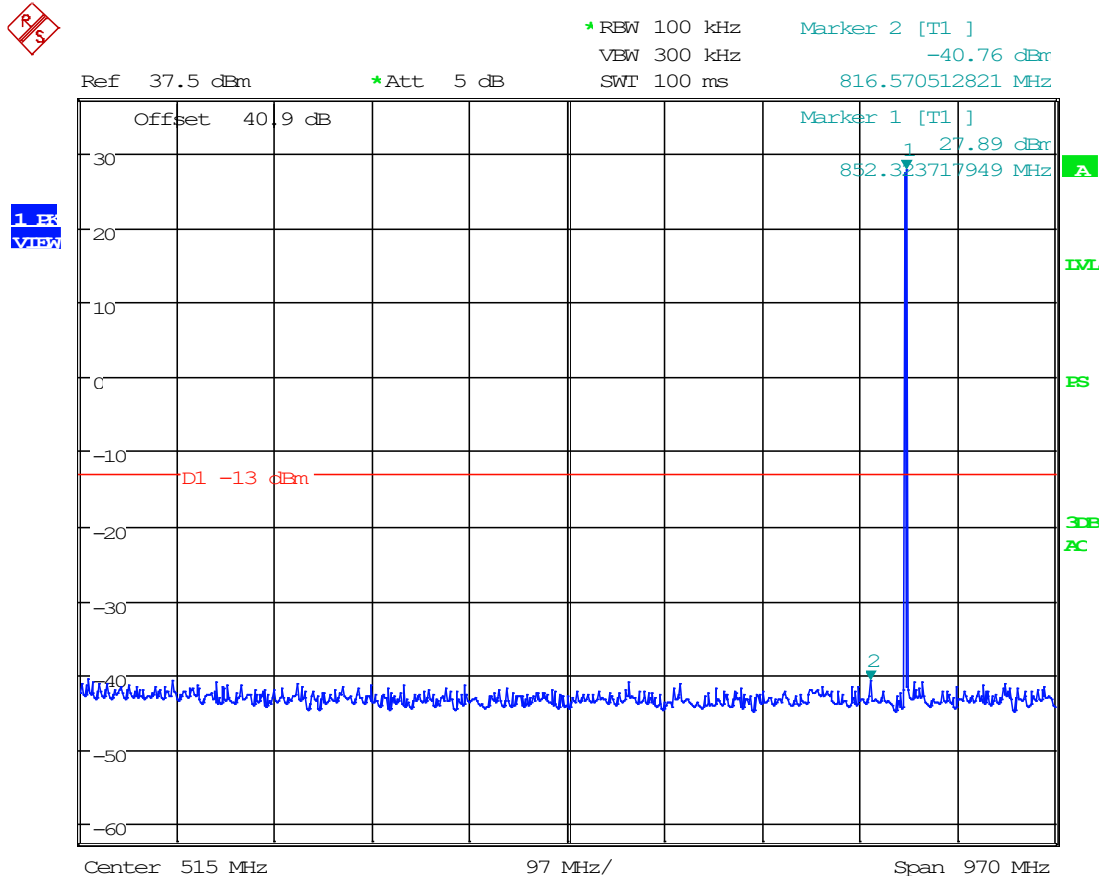

Date: 30.JAN.2023 16:55:44




8.8.8 1 GHz to 10th Harmonic, 851.0125 MHz

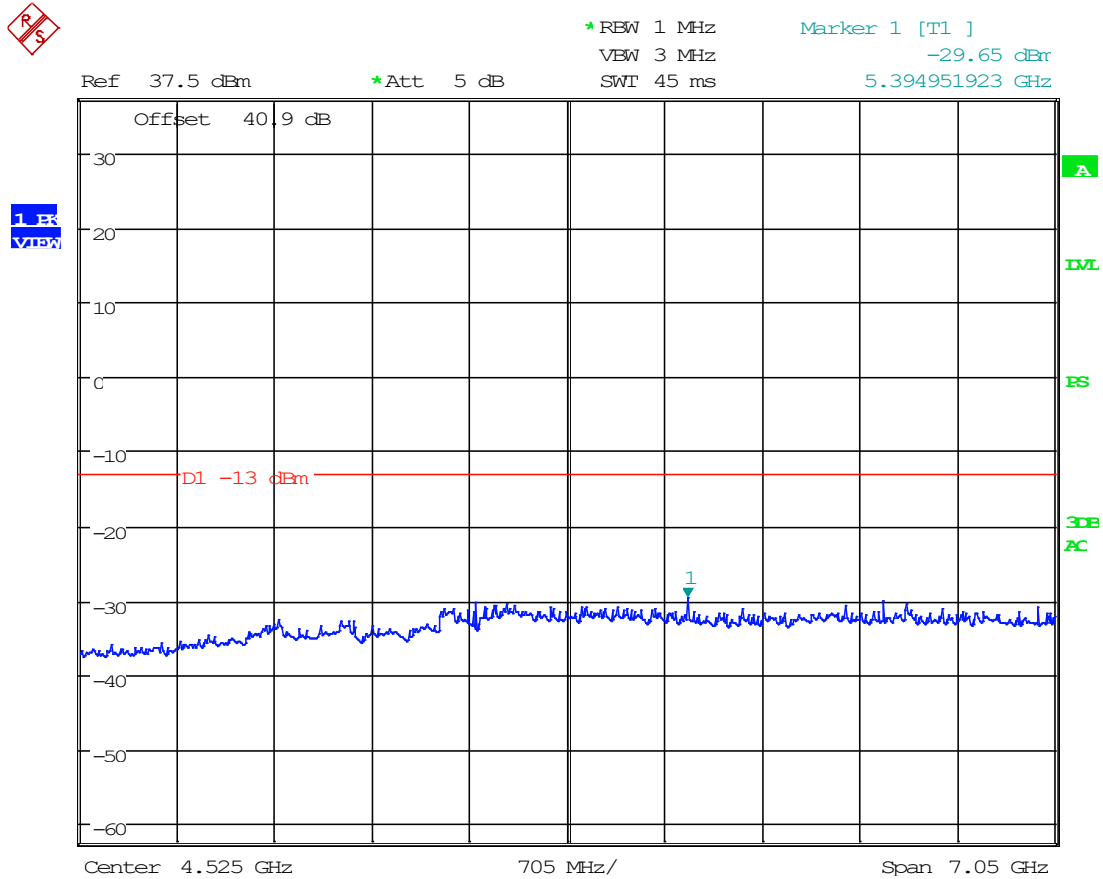

Date: 30.JAN.2023 17:02:08




8.8.9 30 MHz to 1 GHz, 857 MHz

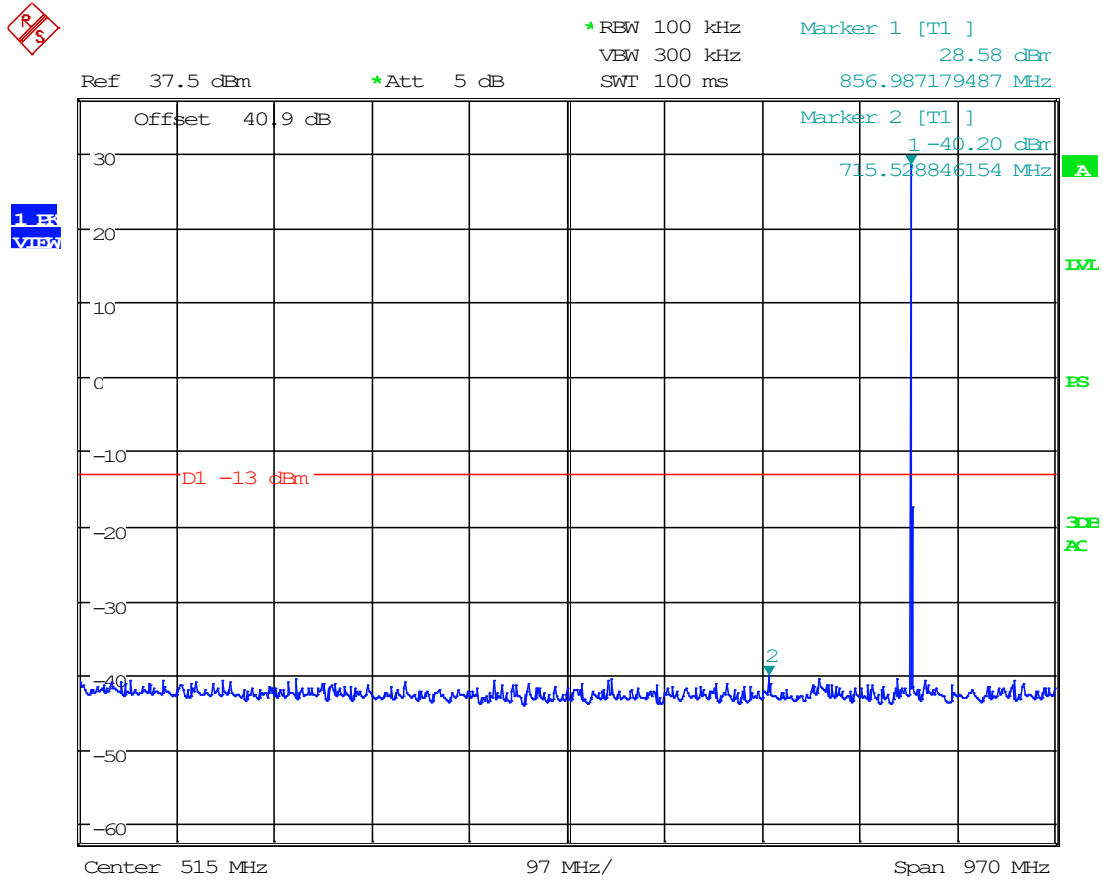

Date: 30.JAN.2023 16:56:40




8.8.10 1 GHz to 10th Harmonic, 857 MHz

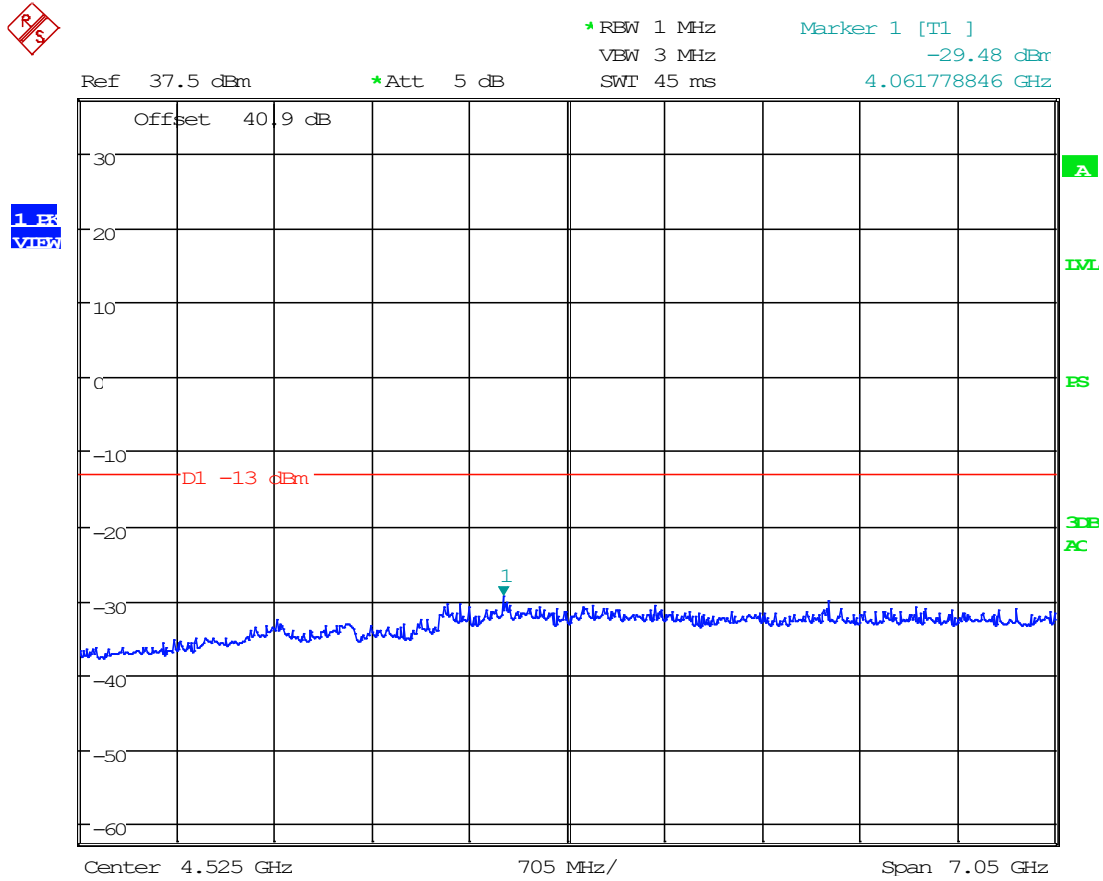

Date: 30.JAN.2023 17:02:52




8.8.11 30 MHz to 1 GHz, 868.9875 MHz

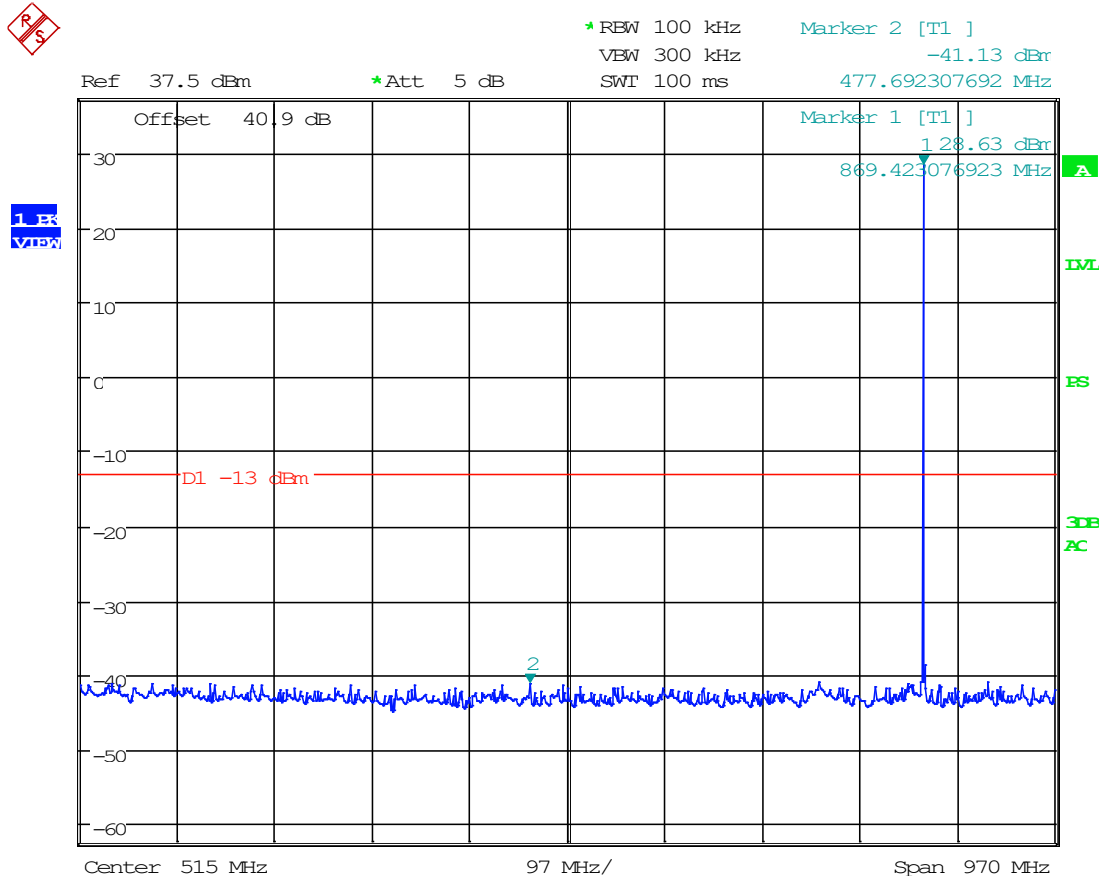

Date: 30.JAN.2023 16:57:41



8.8.12 1 GHz to 10th Harmonic, 868.9875 MHz

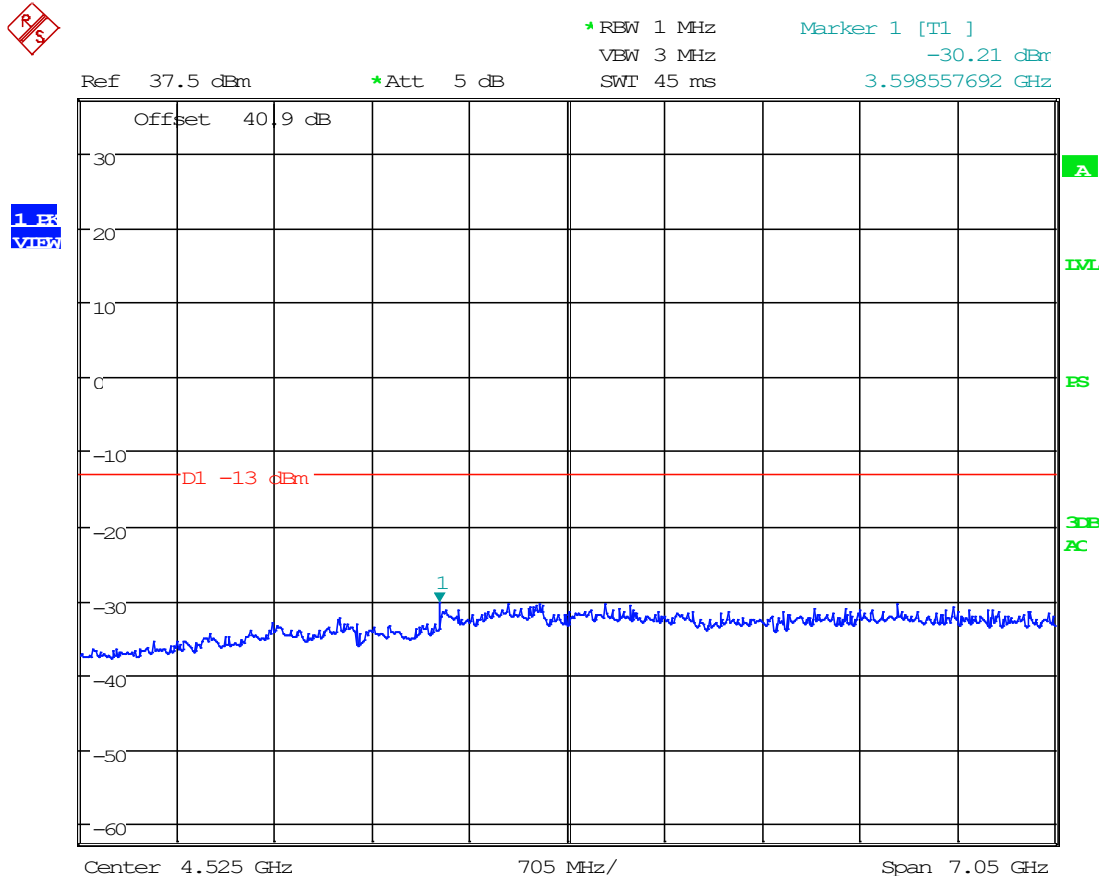


Date: 30.JAN.2023 17:03:29


8.9 Spurious Radiated Emissions

Limits from FCC Parts 2.1053, 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

Radiated Test Setup, 30 – 1000 MHz

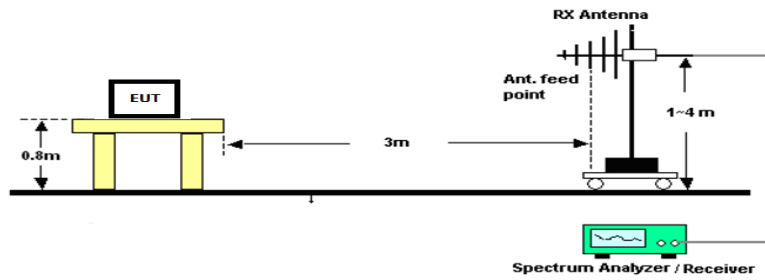

Radiated Test Setup, Above 1000 MHz

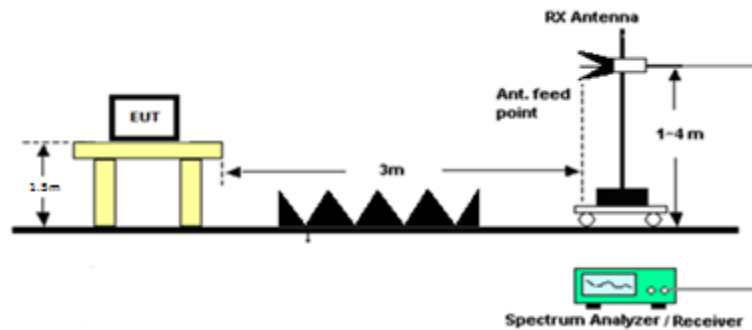



Radiated Emissions, Tabular Data

8.9.1 Downlink, 758.0125 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
758.0125	1516.0250	PK	10.40	H	4.52	27.76	3.00	42.68	-54.70	-13.00	41.70
758.0125	1516.0250	PK	10.40	V	4.52	27.76	3.00	42.68	-54.70	-13.00	41.70
758.0125	2274.0375	PK	11.40	H	5.46	31.37	3.00	48.23	-49.15	-13.00	36.15
758.0125	2274.0375	PK	11.90	V	5.46	31.37	3.00	48.73	-48.65	-13.00	35.65
758.0125	3032.0500	PK	13.20	H	6.37	32.59	3.00	52.17	-45.21	-13.00	32.21
758.0125	3032.0500	PK	12.60	V	6.37	32.59	3.00	51.57	-45.81	-13.00	32.81
758.0125	3790.0625	PK	14.60	H	6.40	33.14	3.00	54.14	-43.24	-13.00	30.24
758.0125	3790.0625	PK	14.60	V	6.40	33.14	3.00	54.14	-43.24	-13.00	30.24
758.0125	4548.0750	PK	14.40	H	7.47	33.99	3.00	55.87	-41.51	-13.00	28.51
758.0125	4548.0750	PK	14.10	V	7.47	33.99	3.00	55.57	-41.81	-13.00	28.81
758.0125	5306.0875	PK	14.90	H	7.92	34.28	3.00	57.10	-40.28	-13.00	27.28
758.0125	5306.0875	PK	14.80	V	7.92	34.28	3.00	57.00	-40.38	-13.00	27.38
758.0125	6064.1000	PK	14.20	H	8.65	35.19	3.00	58.04	-39.34	-13.00	26.34
758.0125	6064.1000	PK	14.60	V	8.65	35.19	3.00	58.44	-38.94	-13.00	25.94
758.0125	6822.1125	PK	14.00	H	9.23	35.85	3.00	59.08	-38.29	-13.00	25.29
758.0125	6822.1125	PK	14.00	V	9.23	35.85	3.00	59.08	-38.29	-13.00	25.29
758.0125	7580.1250	PK	14.10	H	9.81	35.85	3.00	59.76	-37.61	-13.00	24.61
758.0125	7580.1250	PK	14.20	V	9.81	35.85	3.00	59.86	-37.51	-13.00	24.51



8.9.2 Downlink, 766 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
766.00	1532.00	PK	10.20	H	4.54	27.76	3.00	42.50	-54.88	-13.00	41.88
766.00	1532.00	PK	10.50	V	4.54	27.76	3.00	42.80	-54.58	-13.00	41.58
766.00	2298.00	PK	11.60	H	5.49	31.51	3.00	48.60	-48.78	-13.00	35.78
766.00	2298.00	PK	11.50	V	5.49	31.51	3.00	48.50	-48.88	-13.00	35.88
766.00	3064.00	PK	13.00	H	6.43	32.67	3.00	52.09	-45.28	-13.00	32.28
766.00	3064.00	PK	13.00	V	6.43	32.67	3.00	52.09	-45.28	-13.00	32.28
766.00	3830.00	PK	15.20	H	6.47	33.18	3.00	54.85	-42.53	-13.00	29.53
766.00	3830.00	PK	15.30	V	6.47	33.18	3.00	54.95	-42.43	-13.00	29.43
766.00	4596.00	PK	14.20	H	7.54	34.05	3.00	55.80	-41.58	-13.00	28.58
766.00	4596.00	PK	14.40	V	7.54	34.05	3.00	56.00	-41.38	-13.00	28.38
766.00	5362.00	PK	15.30	H	8.12	34.30	3.00	57.72	-39.66	-13.00	26.66
766.00	5362.00	PK	14.40	V	8.12	34.30	3.00	56.82	-40.56	-13.00	27.56
766.00	6128.00	PK	14.40	H	8.60	35.29	3.00	58.30	-39.08	-13.00	26.08
766.00	6128.00	PK	14.70	V	8.60	35.29	3.00	58.60	-38.78	-13.00	25.78
766.00	6894.00	PK	14.10	H	9.22	35.93	3.00	59.25	-38.13	-13.00	25.13
766.00	6894.00	PK	14.10	V	9.22	35.93	3.00	59.25	-38.13	-13.00	25.13
766.00	7660.00	PK	13.70	H	10.06	35.93	3.00	59.69	-37.69	-13.00	24.69
766.00	7660.00	PK	14.50	V	10.06	35.93	3.00	60.49	-36.89	-13.00	23.89



8.9.3 Downlink, 774.9875 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
774.9875	1549.9750	PK	10.00	H	4.57	27.76	3.00	42.32	-55.05	-13.00	42.05
774.9875	1549.9750	PK	10.60	V	4.57	27.76	3.00	42.92	-54.45	-13.00	41.45
774.9875	2324.9625	PK	11.40	H	5.53	31.72	3.00	48.65	-48.72	-13.00	35.72
774.9875	2324.9625	PK	11.90	V	5.53	31.72	3.00	49.15	-48.22	-13.00	35.22
774.9875	3099.9500	PK	13.50	H	6.45	32.76	3.00	52.71	-44.66	-13.00	31.66
774.9875	3099.9500	PK	13.30	V	6.45	32.76	3.00	52.51	-44.86	-13.00	31.86
774.9875	3874.9375	PK	15.30	H	6.73	33.22	3.00	55.25	-42.13	-13.00	29.13
774.9875	3874.9375	PK	15.50	V	6.73	33.22	3.00	55.45	-41.93	-13.00	28.93
774.9875	4649.9250	PK	14.40	H	7.45	33.90	3.00	55.75	-41.63	-13.00	28.63
774.9875	4649.9250	PK	14.80	V	7.45	33.90	3.00	56.15	-41.23	-13.00	28.23
774.9875	5424.9125	PK	14.50	H	8.15	34.41	3.00	57.06	-40.32	-13.00	27.32
774.9875	5424.9125	PK	13.90	V	8.15	34.41	3.00	56.46	-40.92	-13.00	27.92
774.9875	6199.9000	PK	14.20	H	8.64	35.31	3.00	58.16	-39.22	-13.00	26.22
774.9875	6199.9000	PK	14.80	V	8.64	35.31	3.00	58.76	-38.62	-13.00	25.62
774.9875	6974.8875	PK	14.90	H	9.24	36.16	3.00	60.29	-37.08	-13.00	24.08
774.9875	6974.8875	PK	13.90	V	9.24	36.16	3.00	59.29	-38.08	-13.00	25.08
774.9875	7749.8750	PK	14.70	H	10.12	35.87	3.00	60.69	-36.68	-13.00	23.68
774.9875	7749.8750	PK	14.30	V	10.12	35.87	3.00	60.29	-37.08	-13.00	24.08



8.9.4 Downlink, 851.0125 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
851.0125	1702.0250	PK	11.00	H	4.78	29.10	3.00	44.88	-52.50	-13.00	39.50
851.0125	1702.0250	PK	10.80	V	4.78	29.10	3.00	44.68	-52.70	-13.00	39.70
851.0125	2553.0375	PK	12.00	H	5.70	32.60	3.00	50.29	-47.08	-13.00	34.08
851.0125	2553.0375	PK	12.00	V	5.70	32.60	3.00	50.29	-47.08	-13.00	34.08
851.0125	3404.0500	PK	13.20	H	6.80	32.65	3.00	52.64	-44.73	-13.00	31.73
851.0125	3404.0500	PK	13.10	V	6.80	32.65	3.00	52.54	-44.83	-13.00	31.83
851.0125	4255.0625	PK	13.70	H	7.22	33.35	3.00	54.27	-43.11	-13.00	30.11
851.0125	4255.0625	PK	13.40	V	7.22	33.35	3.00	53.97	-43.41	-13.00	30.41
851.0125	5106.0750	PK	13.50	H	7.90	34.09	3.00	55.50	-41.88	-13.00	28.88
851.0125	5106.0750	PK	13.40	V	7.90	34.09	3.00	55.40	-41.98	-13.00	28.98
851.0125	5957.0875	PK	14.40	H	8.54	35.05	3.00	58.00	-39.38	-13.00	26.38
851.0125	5957.0875	PK	14.50	V	8.54	35.05	3.00	58.10	-39.28	-13.00	26.28
851.0125	6808.1000	PK	14.20	H	9.23	35.86	3.00	59.29	-38.09	-13.00	25.09
851.0125	6808.1000	PK	13.90	V	9.23	35.86	3.00	58.99	-38.39	-13.00	25.39
851.0125	7659.1125	PK	13.60	H	10.06	35.93	3.00	59.59	-37.79	-13.00	24.79
851.0125	7659.1125	PK	14.40	V	10.06	35.93	3.00	60.39	-36.99	-13.00	23.99
851.0125	8510.1250	PK	15.30	H	10.28	35.94	3.00	61.52	-35.86	-13.00	22.86
851.0125	8510.1250	PK	15.00	V	10.28	35.94	3.00	61.22	-36.16	-13.00	23.16



Timco Engineering, Inc., an IIA Company
 849 NW State Road 45, Newberry, Florida 32669
 (352) 472-5500 / testing@timcoengr.com

8.9.5 Downlink, 857 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
857.00	1714.00	PK	10.30	H	4.80	29.25	3.00	44.35	-53.02	-13.00	40.02
857.00	1714.00	PK	10.20	V	4.80	29.25	3.00	44.25	-53.12	-13.00	40.12
857.00	2571.00	PK	12.60	H	5.73	32.52	3.00	50.85	-46.52	-13.00	33.52
857.00	2571.00	PK	12.30	V	5.73	32.52	3.00	50.55	-46.82	-13.00	33.82
857.00	3428.00	PK	13.30	H	6.85	32.62	3.00	52.77	-44.60	-13.00	31.60
857.00	3428.00	PK	13.10	V	6.85	32.62	3.00	52.57	-44.80	-13.00	31.80
857.00	4285.00	PK	13.80	H	7.39	33.42	3.00	54.62	-42.76	-13.00	29.76
857.00	4285.00	PK	14.70	V	7.39	33.42	3.00	55.52	-41.86	-13.00	28.86
857.00	5142.00	PK	14.00	H	7.86	34.09	3.00	55.95	-41.43	-13.00	28.43
857.00	5142.00	PK	13.60	V	7.86	34.09	3.00	55.55	-41.83	-13.00	28.83
857.00	5999.00	PK	13.80	H	8.66	35.14	3.00	57.60	-39.78	-13.00	26.78
857.00	5999.00	PK	14.50	V	8.66	35.14	3.00	58.30	-39.08	-13.00	26.08
857.00	6856.00	PK	14.30	H	9.22	35.85	3.00	59.37	-38.01	-13.00	25.01
857.00	6856.00	PK	13.90	V	9.22	35.85	3.00	58.97	-38.41	-13.00	25.41
857.00	7713.00	PK	14.60	H	10.11	35.87	3.00	60.58	-36.79	-13.00	23.79
857.00	7713.00	PK	14.00	V	10.11	35.87	3.00	59.98	-37.39	-13.00	24.39
857.00	8570.00	PK	15.00	H	10.06	36.00	3.00	61.07	-36.31	-13.00	23.31
857.00	8570.00	PK	14.50	V	10.06	36.00	3.00	60.57	-36.81	-13.00	23.81




8.9.6 Downlink, 868.9875 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
868.9875	1737.9750	PK	10.30	H	4.83	29.57	3.00	44.70	-52.68	-13.00	39.68
868.9875	1737.9750	PK	10.70	V	4.83	29.57	3.00	45.10	-52.28	-13.00	39.28
868.9875	2606.9625	PK	11.70	H	5.81	32.41	3.00	49.91	-47.46	-13.00	34.46
868.9875	2606.9625	PK	11.30	V	5.81	32.41	3.00	49.51	-47.86	-13.00	34.86
868.9875	3475.9500	PK	13.00	H	6.90	32.65	3.00	52.55	-44.83	-13.00	31.83
868.9875	3475.9500	PK	12.80	V	6.90	32.65	3.00	52.35	-45.03	-13.00	32.03
868.9875	4344.9375	PK	14.10	H	7.43	33.56	3.00	55.09	-42.29	-13.00	29.29
868.9875	4344.9375	PK	14.30	V	7.43	33.56	3.00	55.29	-42.09	-13.00	29.09
868.9875	5213.9250	PK	14.70	H	7.83	34.21	3.00	56.74	-40.63	-13.00	27.63
868.9875	5213.9250	PK	14.50	V	7.83	34.21	3.00	56.54	-40.83	-13.00	27.83
868.9875	6082.9125	PK	14.20	H	8.63	35.21	3.00	58.05	-39.33	-13.00	26.33
868.9875	6082.9125	PK	13.70	V	8.63	35.21	3.00	57.55	-39.83	-13.00	26.83
868.9875	6951.9000	PK	14.00	H	9.22	36.12	3.00	59.34	-38.04	-13.00	25.04
868.9875	6951.9000	PK	13.60	V	9.22	36.12	3.00	58.94	-38.44	-13.00	25.44
868.9875	7820.8875	PK	13.80	H	10.13	35.86	3.00	59.79	-37.59	-13.00	24.59
868.9875	7820.8875	PK	14.10	V	10.13	35.86	3.00	60.09	-37.29	-13.00	24.29
868.9875	8689.8750	PK	14.70	H	10.56	35.98	3.00	61.23	-36.14	-13.00	23.14
868.9875	8689.8750	PK	15.20	V	10.56	35.98	3.00	61.73	-35.64	-13.00	22.64

8.10 Modulation Characteristics


Limits from FCC Parts 2.1047, and test procedure from ANSI C63.26-2015.

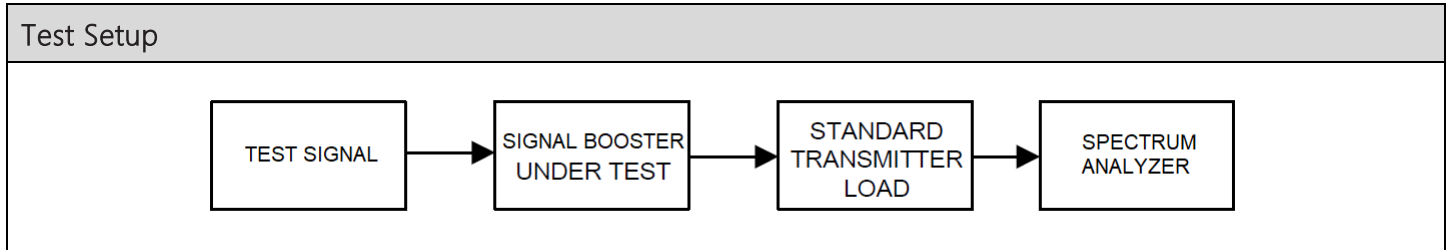

N/A. The EUT does not have any means to modulate the incoming signal.

8.11 Frequency Stability

Limits from FCC Parts 2.1055, 90.213 (a); and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

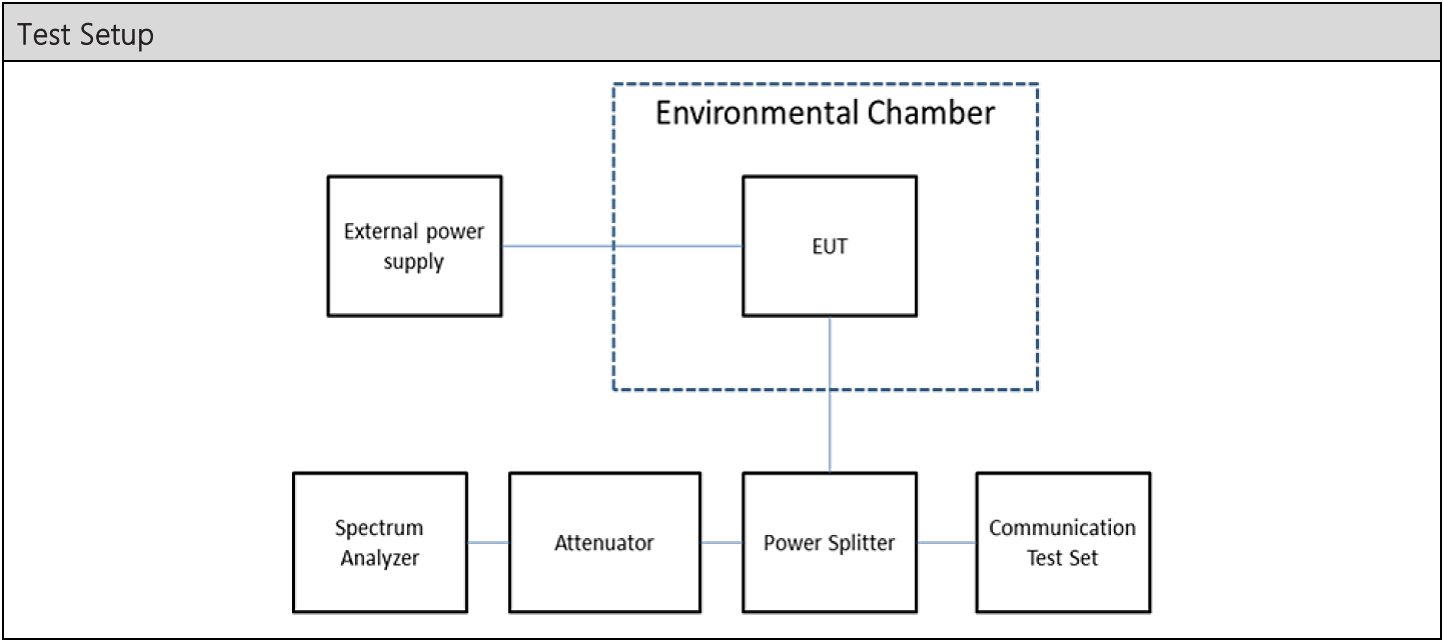

Test Results, Mode 1		
Tuned Frequency (MHz)	Max Deviation (kHz)	Limit (ppm)
n/a	n/a	n/a

N/A. The EUT does not alter the input signal in any way.



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.12 Transient Frequency Behavior

Limits from FCC Part 90.214; and test procedure from ANSI C63.26-2015.

N/A. The EUT does not "key-on" or "key off", and instead transmits indefinitely.



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.13 Adjacent channel power limits

Limits from FCC Part 90.221, and test procedure from ANSI C63.26-2015.

N/A. Device does not operate in a band requiring ACP measurement.



9. ANNEX-A - Photographs of the EUT

Photographs of the EUT and any manufacturer supplied accessories to be used with the EUT are in separate supplementary documents labelled EXTERNAL PHOTOS and INTERNAL PHOTOS.

10. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate supplementary ANNEX-B document.

11. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_6057-23_DL_FCC 90_Booster Class B_	1	Initial release	2/8/2023



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

END OF TEST REPORT
