



**Test Report:** 2W06371.2

**Applicant:** Spotwave Wireless Inc.  
1 Hines Rd.  
Ottawa, Ontario  
K2K 3C7

**Equipment Under Test:** SpotCell 111/112 DU  
**(EUT)** PCS Low Power Repeater  
Class II Permissive Change

**In Accordance With:** FCC Part 24, Subpart E

**FCC ID. :** P3YSPOTCELL0005

**Tested By:** Nemko Canada Inc.  
303 River Road, R.R. 5  
Ottawa, Ontario K1V 1H2

**Authorized By:**

Kevin Carr, EMC Specialist

**Date:** 20 December 2002

**Total Number of Pages:** 32

**Table of Contents**

<b>Section 1. Summary of Test Results.....</b>	<b>3</b>
<b>Section 2. General Equipment Specification .....</b>	<b>5</b>
<b>Section 3. RF Power Output.....</b>	<b>6</b>
<b>Section 4. Occupied Bandwidth .....</b>	<b>11</b>
<b>Section 5. Spurious Emissions at Antenna Terminals .....</b>	<b>16</b>
<b>Section 7. Frequency Stability.....</b>	<b>29</b>
<b>Section 8. Block Diagrams.....</b>	<b>30</b>
<b>Section 9. Test Equipment List .....</b>	<b>32</b>

**Section 1. Summary of Test Results****General****All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 24, Subpart E.

<input checked="" type="checkbox"/>	New Submission	<input checked="" type="checkbox"/>	Production Unit			
<input type="checkbox"/>	Class II Permissive Change	<input type="checkbox"/>	Pre-Production Unit			
<table><tbody><tr><td>A</td><td>M</td><td>P</td></tr></tbody></table>	A	M	P	Equipment Code		
A	M	P				

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".



TESTED BY: \_\_\_\_\_  
Glen Westwell, Wireless Technologist

DATE: 20 December 2002

Nemko Canada Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

## Summary Of Test Data

Name Of Test	Para. No.	Result
RF Power Output	2.1046	Complies
Occupied Bandwidth	2.1049	Complies
Spurious Emissions at Antenna Terminals	2.1051	Complies
Field Strength of Spurious Emissions	2.1053	Complies
Frequency Stability	2.1055	Complies

## Notes:

- (1) This RF device, the Sptocell 111/112 DU is part of a PCS Band amplifier. It is used to enhance signals in the Uplink direction.
- (2) The original application covered frequency block C up to 1905MHz. This Class II permissive change covers the full frequency block C from 1895-1910MHz. This EUT has not been changed in any way from the original application and is the same EUT used in the original application. The original test set up manipulation was limiting the performance for the last 5MHz of frequency block C.
- (3) This report has been amended with plots on pages 10,21& 25 to support this class II permissive change.

**Indoor**      Temperature: 22 °C  
                    Humidity: 45 %

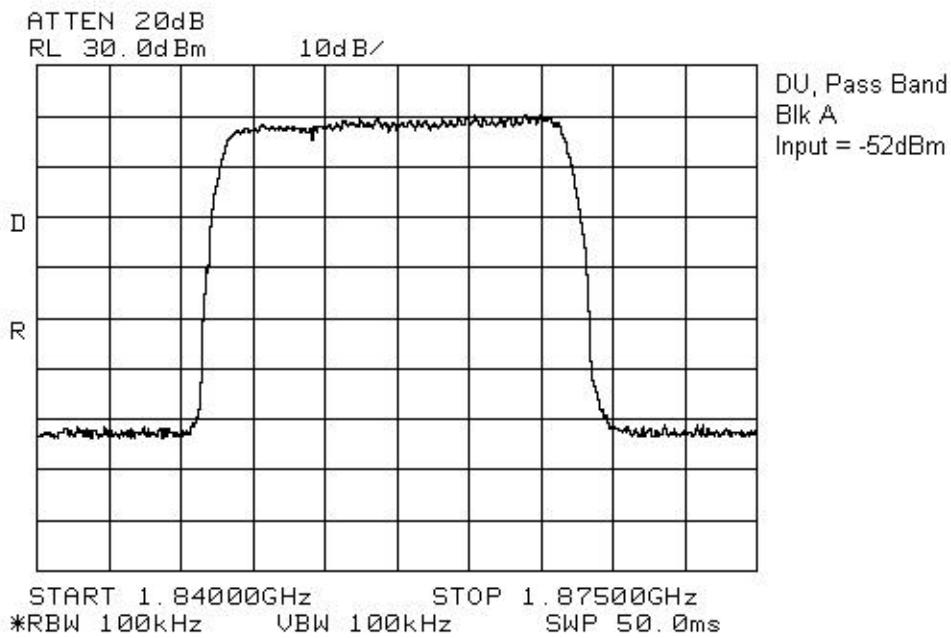
**Outdoor**      Temperature: 23 °C  
                    Humidity: 48 %

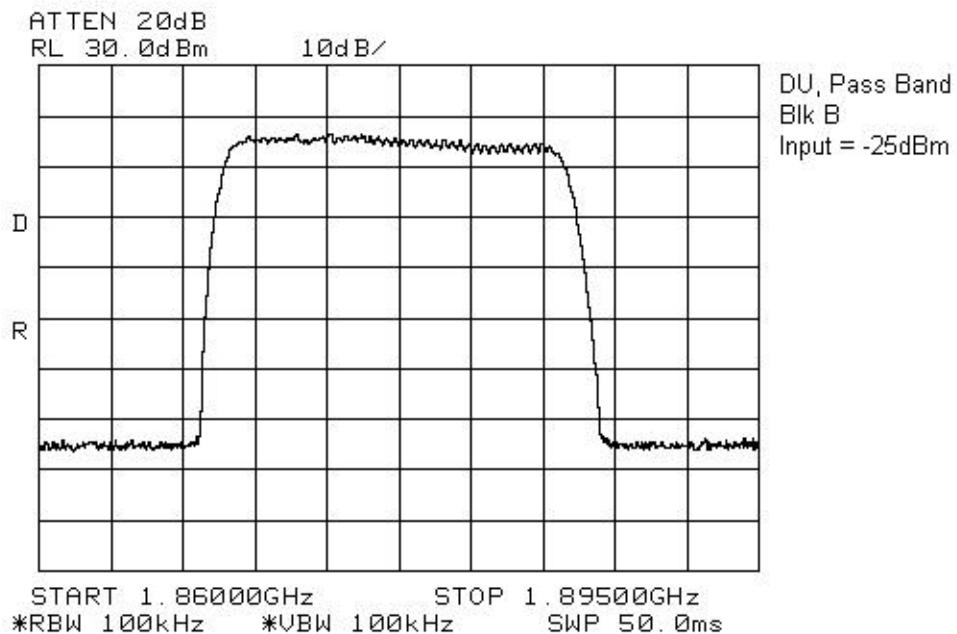
**Section 2. General Equipment Specification****Manufacturer:** Spotwave Wireless Inc.**Model No.:** SpotCell 111/112 DU**Serial No.:**  
DU (ABDE) S/N 020003020009  
DU (EFC) S/N 020003020010**Date Received In Laboratory:** 3 Sept., 2002**Nemko Identification No.:** #1&2**Supply Input Voltage:** 120 VAC**Frequency Range:**  
Uplink:  
BLK A: 1850-1865MHz  
BLK D: 1865-1870MHz  
BLK B: 1870-1885MHz  
BLK E: 1885-1890MHz  
BLK F: 1890-1895MHz  
BLK C: 1895-1910MHz**RF Output (Rated):** DU (Uplink): +18.5dBm**Antenna Gain (Integral):** DU (Uplink): 11.5dBi**Emission Designator(modulation):**  
CDMA - G7W  
GSM - F7W

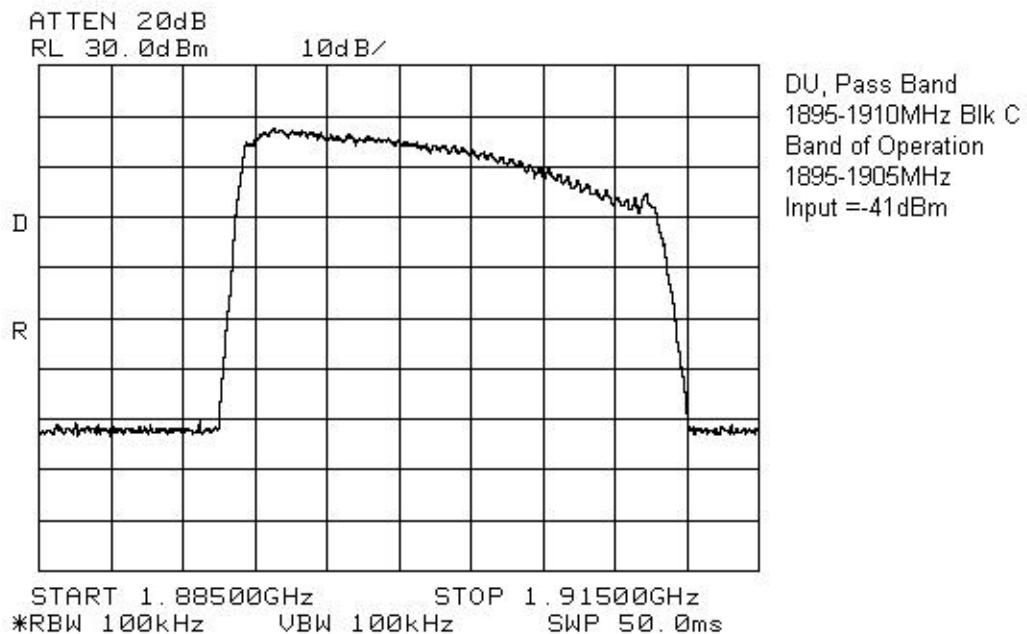
**Section 3. RF Power Output****Para. No.: 2.1046****Test Performed By:** Glen Westwell**Date of Test:** 5 Sept., 2002  
19 Dec. 2002**Minimum Standard:** 24.232**Test Results:** Complies.

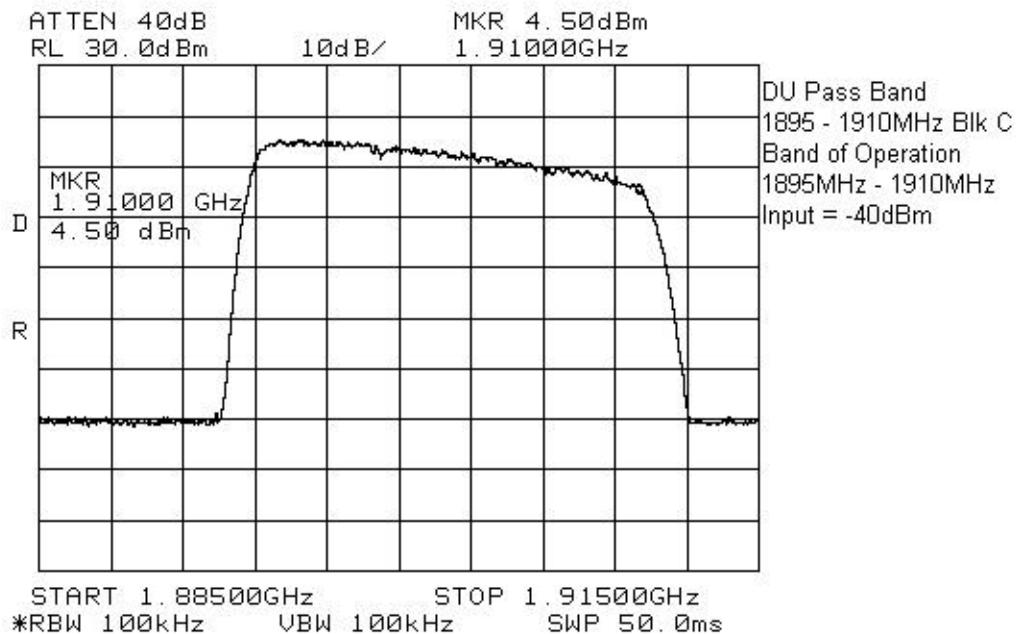
The maximum RF output power is within  $\pm$  1dB of the manufacturer's rating. The RF output power is de-rated according to the number of channels via AGE and is equal to  $P_{max} - 10\log N$ .

$P_{max}$  = Maximum RF Output Power  
 $N$  = Number Of Channels

*EQUIPMENT: SpotCell 111/112 DU, PCS Low Power Repeater*

*EQUIPMENT: SpotCell 111/112 DU, PCS Low Power Repeater*

*EQUIPMENT: SpotCell 111/112 DU, PCS Low Power Repeater*

*EQUIPMENT: SpotCell 111/112 DU, PCS Low Power Repeater***Class II Permissive Change Plot**

**Section 4.        Occupied Bandwidth****Para. No.: 2.1049**

<b>Test Performed By:</b> Glen Westwell	<b>Date of Test:</b> 5 Sept., 2002
---	------------------------------------

**Minimum Standard:**        24.238**Test Results:**        Complies.**Measurement Data:**        See attached graphs.

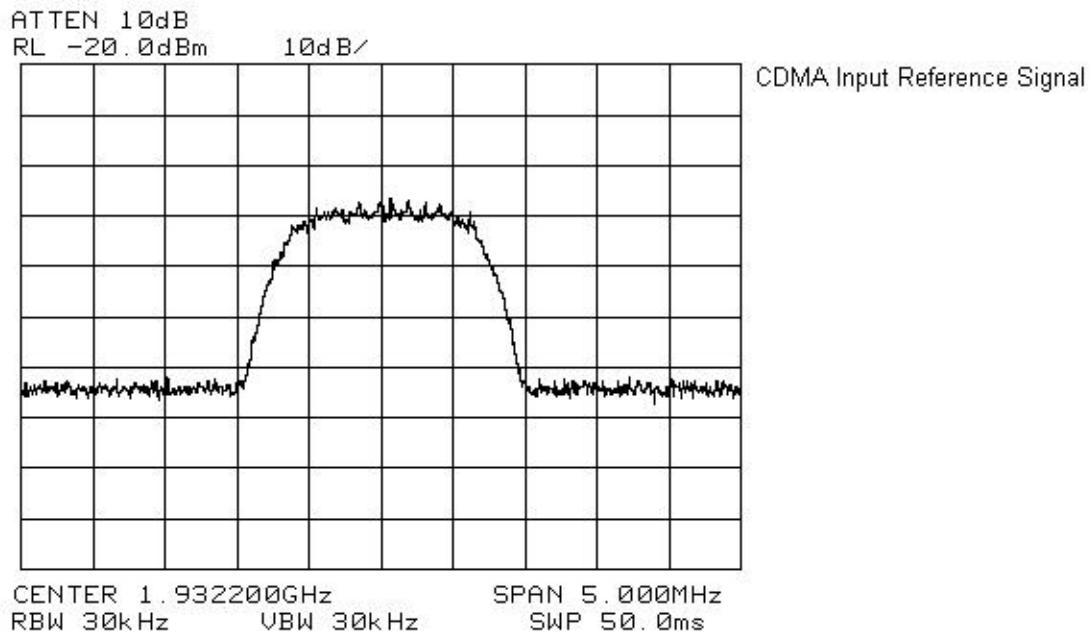
The occupied bandwidth was measured by comparison of input to the output signal. This was done in order to determine if there was any degradation to the output signal due to the amplification through the repeater.

**Nemko Canada Inc.**

FCC PART 24, SUBPART E  
PROJECT NO.: 2W06371.2

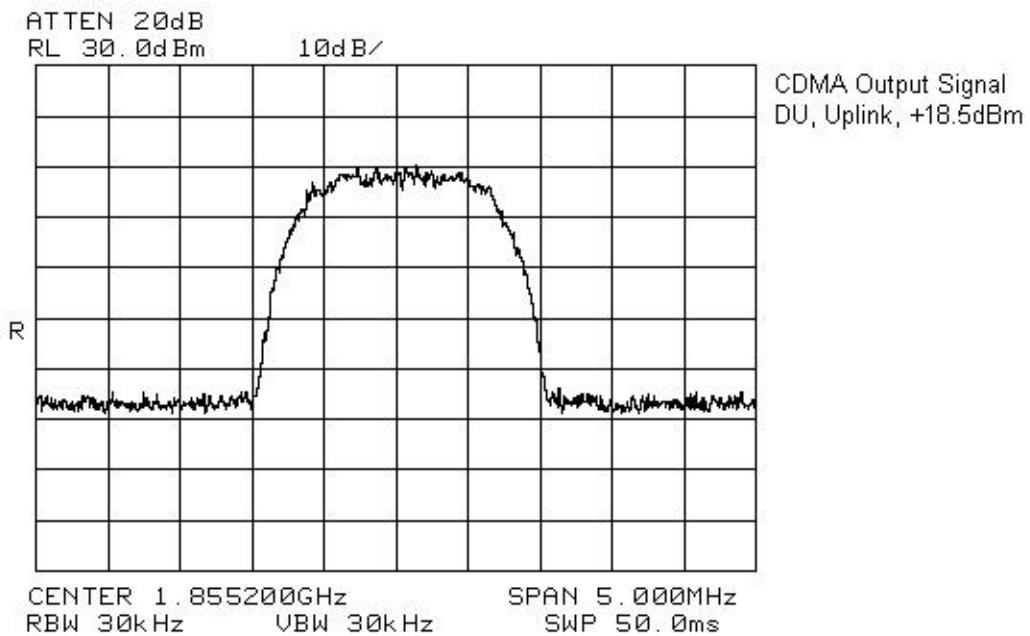
*EQUIPMENT: SpotCell 111/112 DU, PCS Low Power Repeater*

---



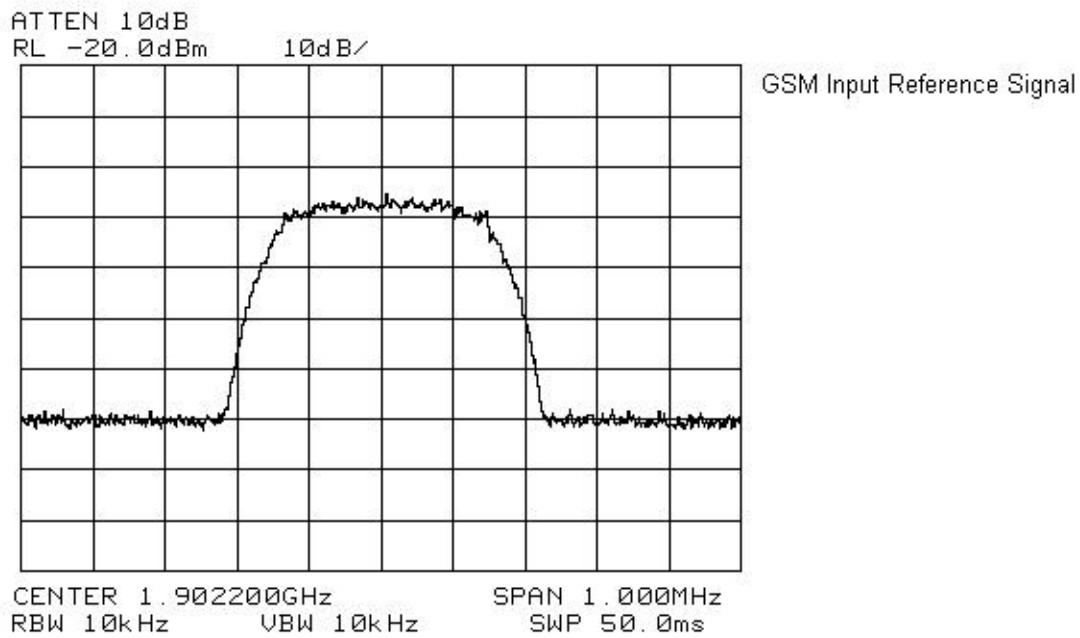
*EQUIPMENT: SpotCell 111/112 DU, PCS Low Power Repeater*

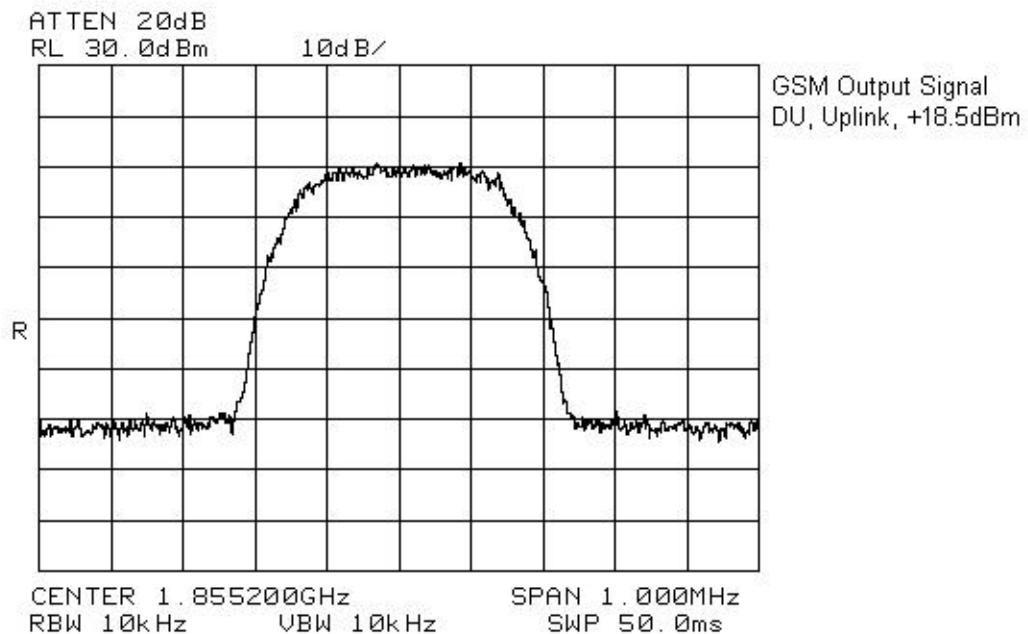
---



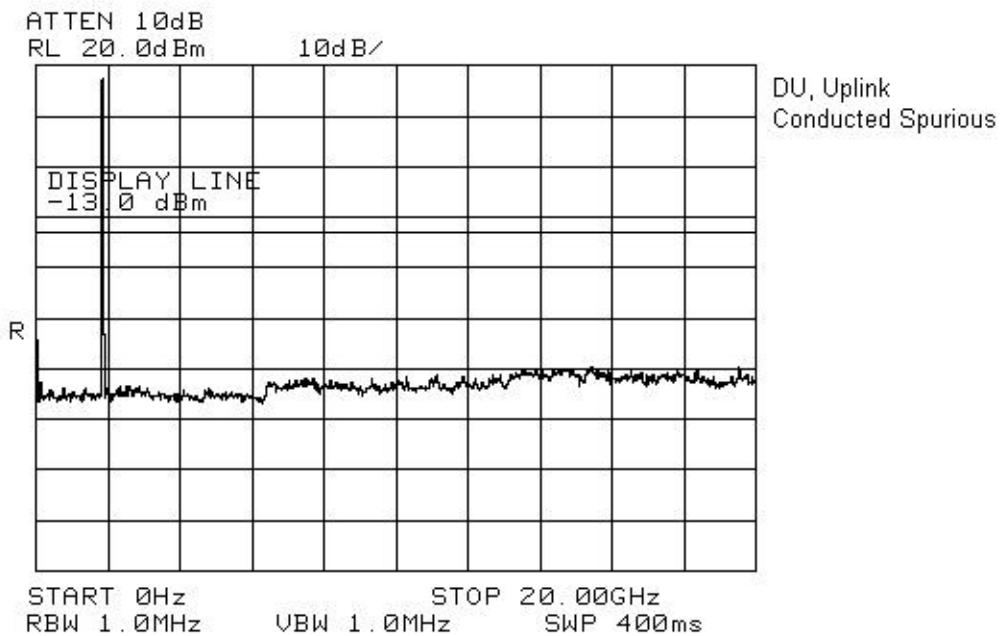
*EQUIPMENT: SpotCell 111/112 DU, PCS Low Power Repeater*

---



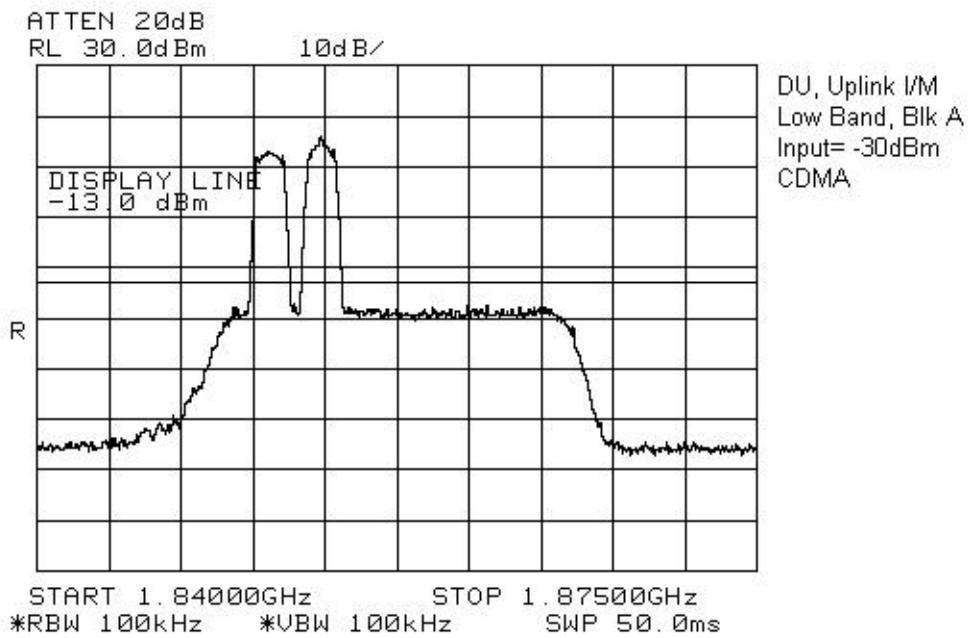
*EQUIPMENT: SpotCell 111/112 DU, PCS Low Power Repeater*

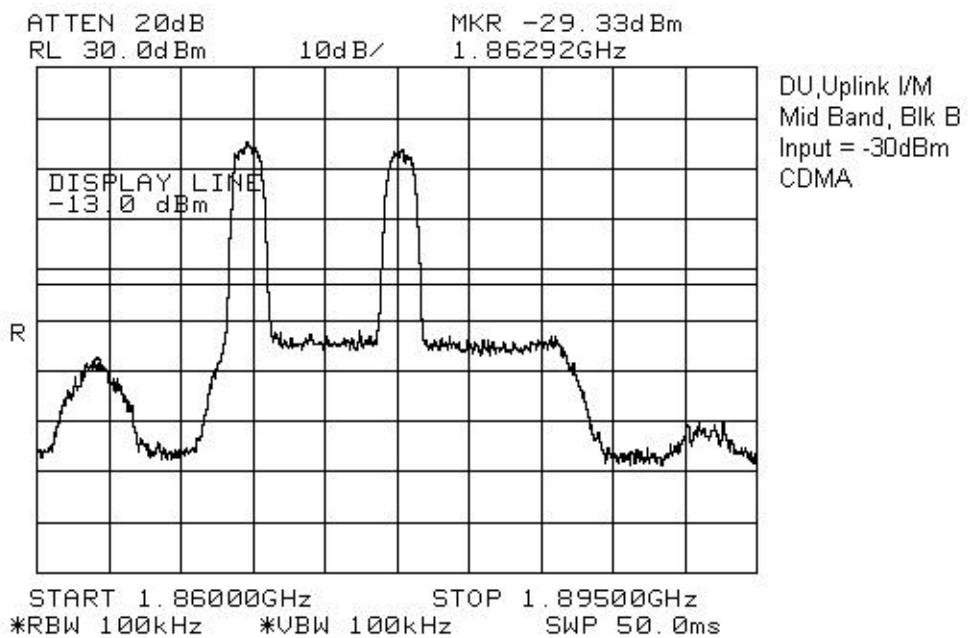
**Section 5. Spurious Emissions at Antenna Terminals****Para. No.: 2.1051****Test Performed By:** Glen Westwell**Date of Test:** 6 Sept., 2002  
19 Dec. 2002**Minimum Standard:** 24.238 (a); -13 dBm**Test Results:** Complies.**Measurement Data:** See attached graphs (worst case).

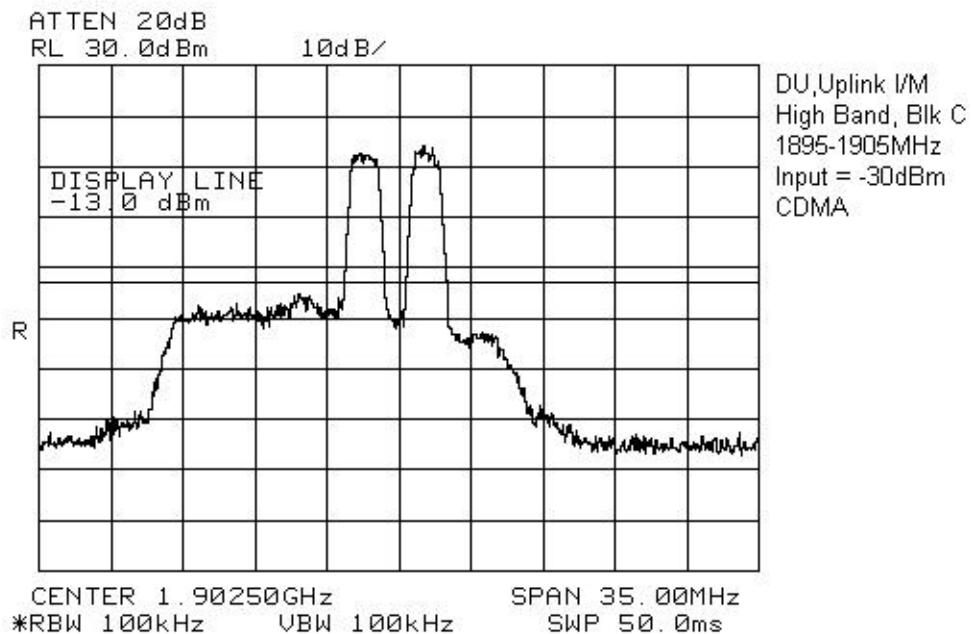
*EQUIPMENT: SpotCell 111/112 DU, PCS Low Power Repeater*

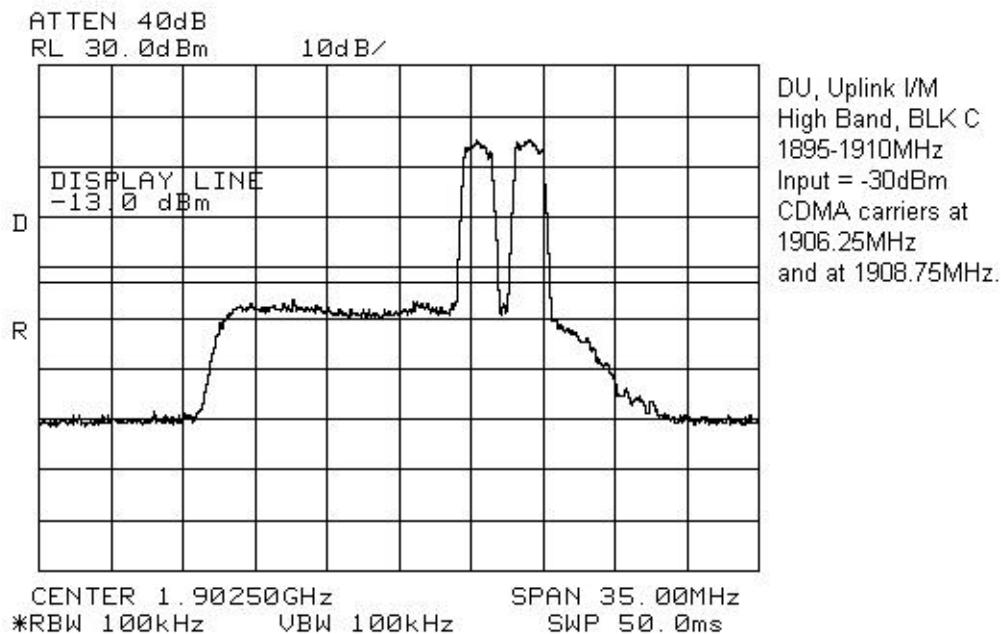
*EQUIPMENT: SpotCell 111/112 DU, PCS Low Power Repeater*

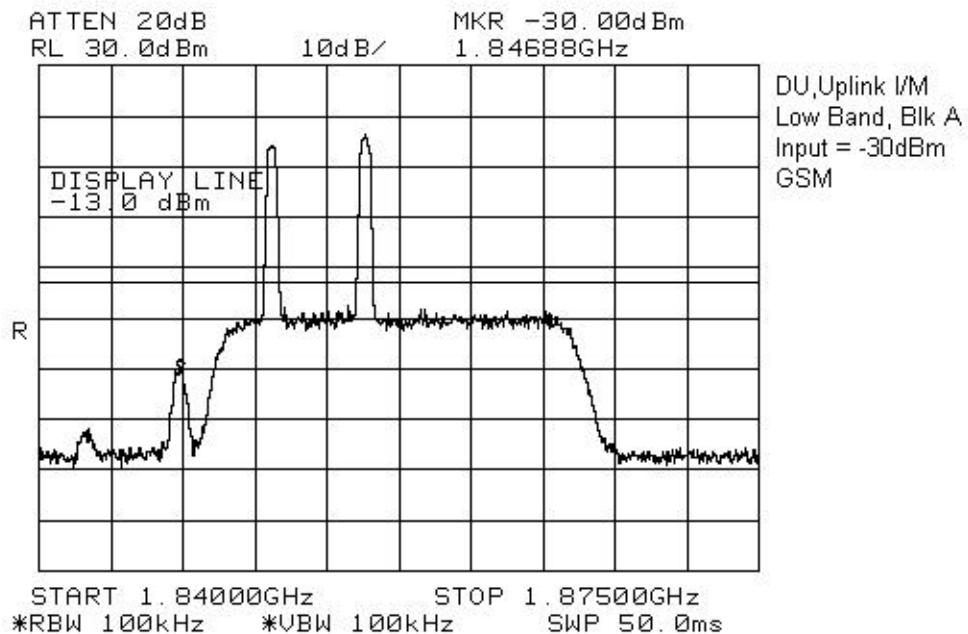
---

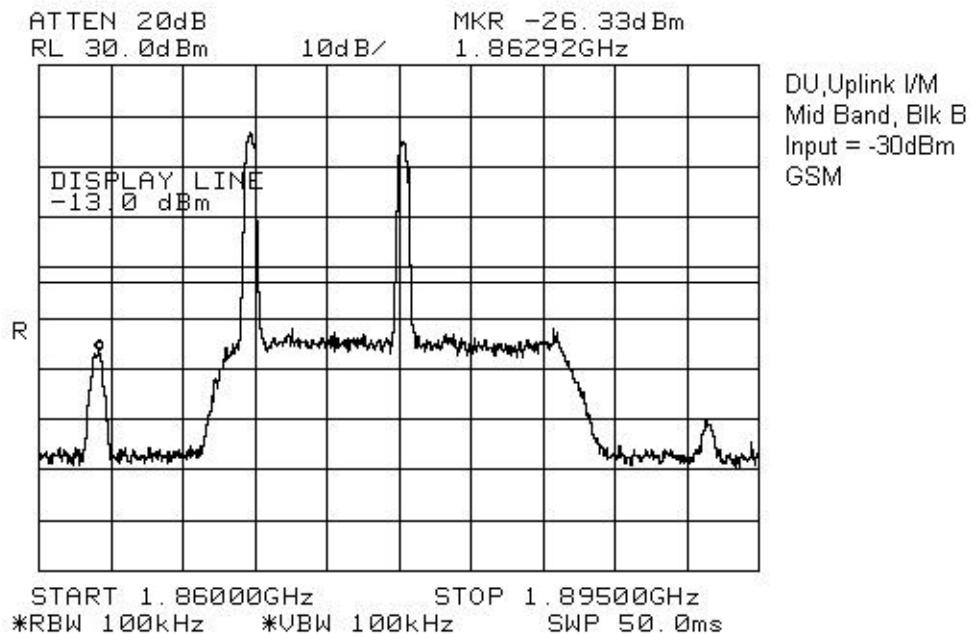


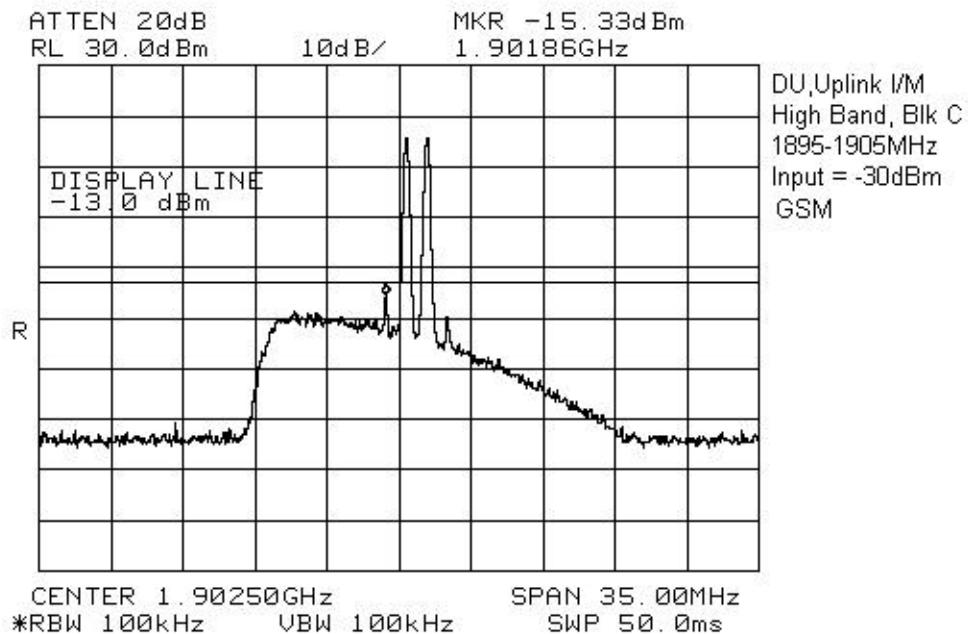
*EQUIPMENT: SpotCell 111/112 DU, PCS Low Power Repeater*

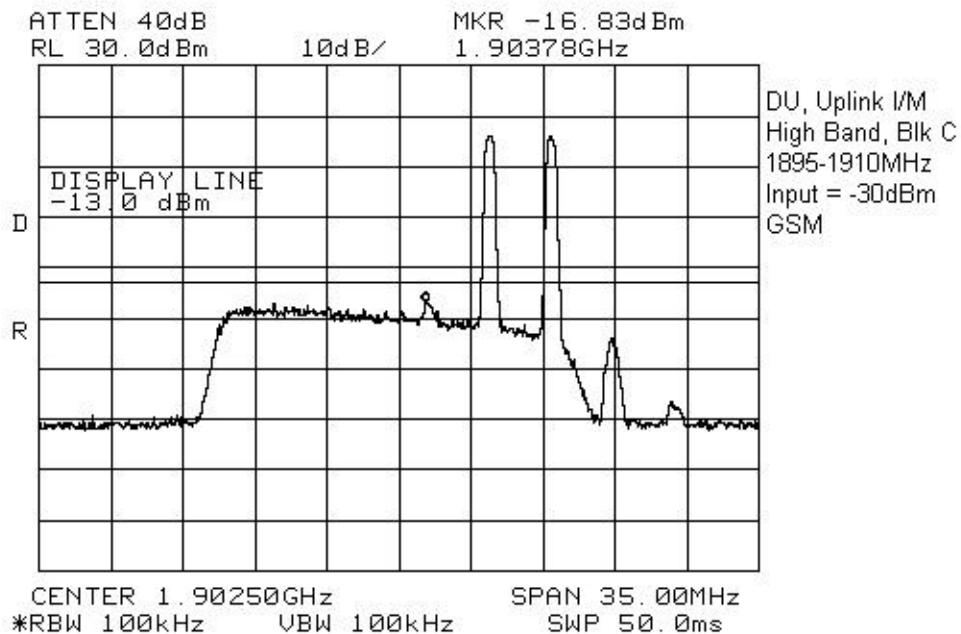


**Class II Permissive Change Plot**

*EQUIPMENT: SpotCell 111/112 DU, PCS Low Power Repeater*

*EQUIPMENT: SpotCell 111/112 DU, PCS Low Power Repeater*

*EQUIPMENT: SpotCell 111/112 DU, PCS Low Power Repeater*

**Class II Permissive Change Plot**

**Nemko Canada Inc.**

FCC PART 24, SUBPART E  
PROJECT NO.: 2W06371.2

*EQUIPMENT: SpotCell 111/112 DU, PCS Low Power Repeater*

---

**Section 6. Field Strength of Spurious Emissions**

**Para. No.: 2.1053**

<b>Test Performed By:</b> Glen Westwell	<b>Date of Test:</b> 9 Sept., 2002
---	------------------------------------

**Minimum Standard:** 24.238(a); -13dBm

**Test Results:** Complies.

**Measurement Data:** See Attached Table.

**Test Data - Field Strength of Spurious Emissions**

Test Distance (meters) : 3		Range: A Tower		Receiver: 8565E		RBW(kHz): 1000		Detector: Peak	
Freq. (MHz)	Ant. *	Pol. (V/H)	RCVD Signal (dB? V)	Signal Substitution Conversion Factor (dB)**	Amp. Gain (dB)***	Dist. Corr. (dB)	Field Strength (dBm)	Limit (dBm)	Margin (dB)
3710.0	SSV	V	56.7	-118.4			-61.7	-13.0	48.7
3710.0	SSH	H	62.2	-119.8			-57.6	-13.0	44.6

**Notes:**

B/C = Biconical, B/L = Biconilog, L/P = Log-Periodic, H = Horn, D/P = Dipole

\* Re-measured using dipole antenna.

\*\* Includes cable loss when amplifier is not used.

\*\*\* Includes cable loss.

( ) Denotes failing emission level.

N.D. = Not Detected

*All spurious and harmonic emissions to the 10<sup>th</sup> harmonic were searched.*

**Field Strength of Spurious Emissions - Photograph**  
**SpotCell 111/112 DU**

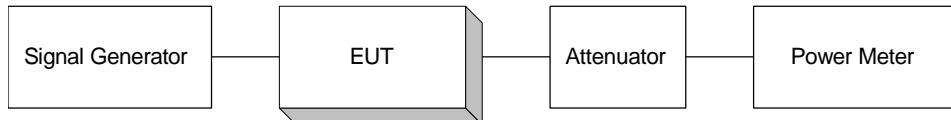
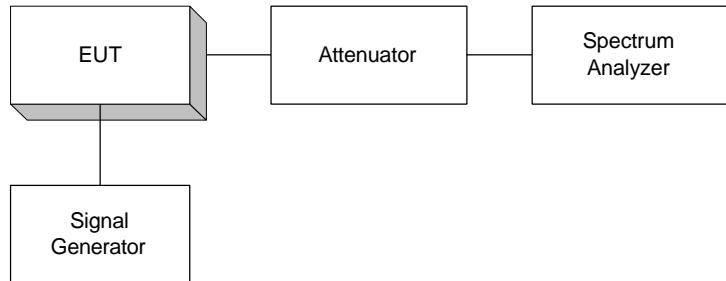
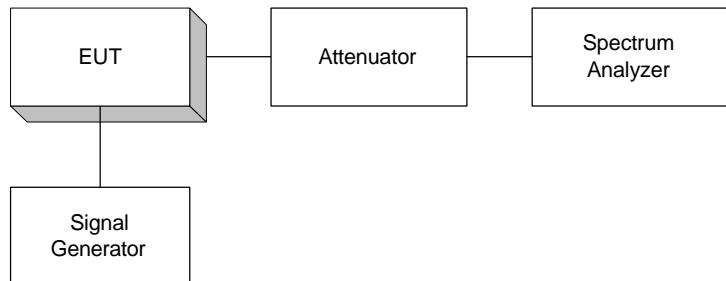


**Section 7. Frequency Stability****Para. No.: 2.1055**

<b>Test Performed By:</b> Glen Westwell	<b>Date of Test:</b> 10 Sept., 2002
---	-------------------------------------

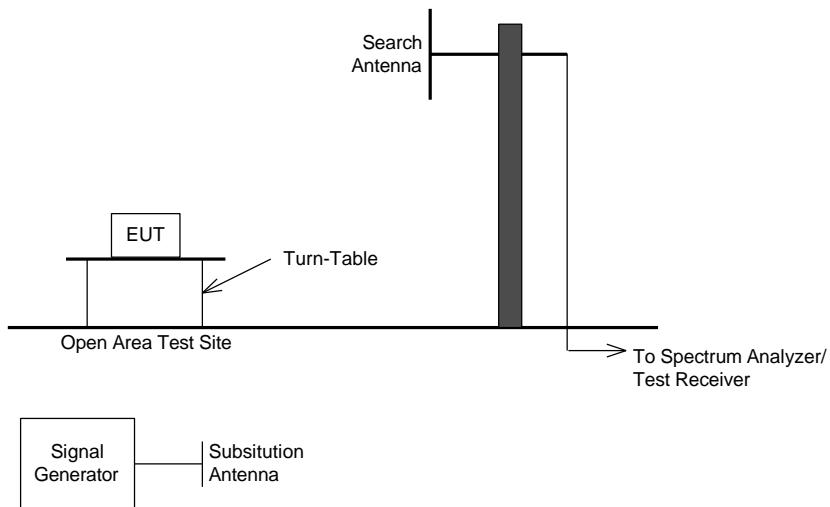
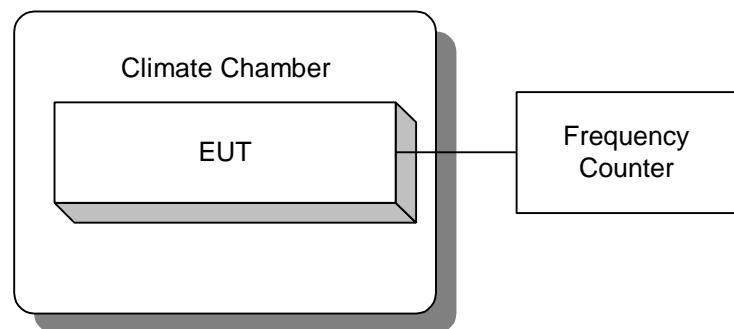
**Minimum Standard:** 22.355**Test Results:** Complies. The maximum frequency drift is 0 Hz.  
There is no frequency translation.**Measurement Data:** Standard Test Frequency: (-30°C to +50°C)

Uplink: 1855.000 000 MHz

**Section 8. Block Diagrams****Para. No. 2.1046 - R.F. Power Output****Para. No. 2.1049 - Occupied Bandwidth****Para. No. 2.1051 - Spurious Emissions at Antenna Terminals**

**Para. No. 2.1053 - Field Strength of Spurious Radiation****TIA/EIA 603**

Effective Radiated Power  
Spurious Emissions

**Para. No. 2.1055 - Frequency Stability**

**Section 9. Test Equipment List**

CAL CYCLE	EQUIPMENT	MANUFACTURER	MODEL	SERIAL	LAST CAL.	NEXT CAL.
1 Year	Spectrum Analyzer	Hewlett Packard	8565E	FA000981	6 Mar. 02	6 Mar. 03
1 Year	Spectrum Analyzer-1	Hewlett Packard	8566B	2311A02238	27 Nov 2001	27 Nov 2002
1 Year	Spectrum Analyzer Display-1	Hewlett Packard	8566B	2314A04759	27 Nov 2001	27 Nov 2002
1 Year	Quasi-peak adapter-1	Hewlett-Packard	85650A	2043A00302	27 Nov 2001	27 Nov 2002
1 Year	Climate Chamber	Thermotron	SM-16C	15649-S	COU	COU
1 Year	Horn Antenna	EMCO #2	3115	4336	Dec. 1/01	Dec. 1/02
1 Year	RF AMP	JCA	2-4 GHz	FA001496	COU	COU
1 Year	RF AMP	JCA	1-2 GHz	FA001498	COU	COU
1 Year	RF AMP	JCA	4-8 GHz	FA001497	COU	COU
1 Year	RF AMP	DBS Microwave	5-18GHz	FA001409	COU	COU
1 Year	Frequency Counter	Hewlett Packard	HP5350A	2444A00135	11 Jan 2002	11 Jan 2003
3 Year	RF Generator	Rohde & Schwarz	SIMIQ03	DE22004	Sept. 10/00	Sept. 18/03
3 Year	RF Generator	Rohde & Schwarz	SIMIQ03E	DE24154	Oct. 4/99	Oct. 4/02

NA: Not Applicable

NCR: No Cal Required

COU: CAL On Use