



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

Test report file number : E031R-032

Applicant : DECKTRON CO., LTD.

Address : 187-3, Sinbong-Dong, Hungduk-Gu, Cheongju-City, Chungcheongbuk-Do, 361-839, Korea

Manufacturer : DECKTRON CO., LTD.

Address : 187-3, Sinbong-Dong, Hungduk-Gu, Cheongju-City, Chungcheongbuk-Do, 361-839, Korea

Type of Equipment : MP3 PLAYER (Peripheral Device for Class B Computing Device)

FCC ID : P42DMR1800

Model Name : DMR-1832

Multiple Model Name : DMR-1816, DMR-1932, DMR-1916

Serial number : N/A

Total page of Report : 13 pages (including this page)

Date of Incoming : December 12, 2002

Date of Issuing : January 14, 2003

SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART B, Class B.**

This test report contains only the results of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by: 
G. W. Lee/ Chief Engineer
EMC Div.
ONETECH Corp.

Reviewed by: 
Y. K. Kwon/ Director
EMC Div.
ONETECH Corp.



CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCT DESCRIPTION	4
2.2 RELATED SUBMITTAL(S) / GRANT(S)	4
2.3 TEST SYSTEM DETAILS	4
2.4 TEST METHODOLOGY	4
2.5 TEST FACILITY	5
3. SYSTEM TEST CONFIGURATION.....	6
3.1 JUSTIFICATION	6
3.2 EUT EXERCISE SOFTWARE	6
3.3 CABLE DESCRIPTION	6
3.4 NOISE SUPPRESSION PARTS ON CABLE	6
3.5 EQUIPMENT MODIFICATIONS	6
3.6 CONFIGURATION OF TEST SYSTEM	7
4. PRELIMINARY TEST	8
4.1 AC POWER LINE CONDUCTED EMISSION TEST	8
4.2 RADIATED EMISSION TEST	8
5. FINAL RESULT OF MEASUREMENT	9
5.1 CONDUCTED EMISSION TEST	9
5.2 RADIATED EMISSION TEST	11
6. FIELD STRENGTH CALCULATION	12
7. LIST OF TEST EQUIPMENT	13

**1. VERIFICATION OF COMPLIANCE**

- APPLICANT : DECKTRON CO., LTD.
- ADDRESS : 187-3, Sinbong-Dong, Hungduk-Gu, Cheongju-City, Chungcheongbuk-Do, 361-839, Korea
- CONTACT PERSON : Mr. Dong-Woong, Shin / Assistant Manager
- TELEPHONE NO : +82-43-269-9671
- FCC ID : P42DMR1800
- MODEL NO/NAME : DMR-1832
- SERIAL NUMBER : N/A
- DATE : January 14, 2003

DEVICE TYPE	Peripheral Device for Class B Computing Device - Unintentional Radiator
E.U.T. DESCRIPTION	MP3 PLAYER
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4/1992
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15, SECTION 15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. GENERAL INFORMATION

2.1 Product Description

The DECKTRON CO., LTD., Model DMR-1832 (referred to as the EUT in this report) is a MP3 PLAYER that can record voice by using built-in microphone and connect to PC in order to transfer recorded message into the EUT and has a function of MP3 player. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic (Non-Shield Coated)
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	8.0 MHz
POWER REQUIREMENT	DC1.5V, AAA Type Battery
FLASH MEMORY SIZE	128MB
NUMBER OF LAYERS	6 Layers
EXTERNAL CONNECTOR	Earphone, USB

Model Differences:

-. The following lists consist of the added model and their differences. The added models are identical to the basic model except for below model difference only.

	Model Name	Model Difference
Basic Model	DMR-1832	
Multiple Model	DMR-1816	Only type designation by memory size of the EUT. (64MB)
	DMR-1932	Only type designation by enclosure and memory size of the EUT. (128MB)
	DMR-1918	Only type designation by enclosure and memory size of the EUT. (64MB)

2.2 Related Submittal(s) / Grant(s)

Original submittal only

2.3 Test System Details

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	FCC ID	Description	Connected to
DMR-1832	DECKTRON CO., LTD.	P42DMR1800	MP3 PLAYER (EUT)	NOTEBOOK PC
-	-	N/A	EARPHONE	EUT
S690	Samsung Elect.	DOC	NOTEBOOK PC	-
AD-6019(V)	Samsung Elect.	N/A	AC/DC ADAPTER	NOTEBOOK PC
2225C	HP	DSI6XU2225	PRINTER	NOTEBOOK PC



2.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.5 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 18, 2002. (Registration Number: 92819)



3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN B'D	DECTRON CO., LTD.	N/A	N/A

3.2 EUT exercise Software

- Play mode and Recording mode
- After connecting the EUT to USB port of a notebook PC, data were continuously uploading and downloading from HDD of the notebook PC to the EUT.
- The EUT was tested on up/downloading mode as the worst case.

3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
MP3 PLAYER (EUT)	N/A	Y	1.2 (D)
EARPHONE	N/A	N	1.2 (D)
NOTEBOOK PC	N	-	1.5 (P)
AC/DC ADAPTER (For Notebook PC)	N	N	1.2(P), 1.0(D)
PRINTER	N	Y	1.5(P), 1.5(D)

* The marked "(P)" means the Power Cable and "D" means the I/O Cable.

3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
MP3 PLAYER (EUT)	Y	BOTH END	Y	BOTH END
EARPHONE	N	N/A	Y	EUT END
NOTEBOOK PC	-	-	-	-
AC/DC ADAPTER (For Notebook PC)	Y	Notebook PC END	Y	Notebook PC END
PRINTER	N	N/A	Y	BOTH END



3.5 Equipment Modifications

To achieve compliance to CLASS B levels, the following change(s) was made by ONETECH Corp. during compliance testing:

“There were no Modified items during EMI test”

3.6 Configuration of Test System

Line Conducted Test : The EUT was connected to PC and the power line of PC was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

Radiated Emission Test : Preliminary radiated emission test was conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.



4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Play mode	
Recoding mode	
Files Up/Downloading mode	X

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Play mode	
Recoding mode	
Files Up/Downloading mode	X

**5. FINAL RESULT OF MEASUREMENT**

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

5.1 Conducted Emission TestHumidity Level : 49 %Temperature : 20 °CLimits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.107 (a)Type of Test : CLASS BResult : PASSED BY -15.12 dB at 0.46 MHz

EUT : MP3 PLAYER

Date: December 12, 2002

Operating Condition : Files Up/Downloading mode

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)


Frequency (MHz)	Line	Peak (dBuV)		Margin (dB)
		Emission level	Q.P Limits	
0.32	N	41.81	59.58	-17.77
0.46	N	41.57	56.69	-15.12
0.52	H	39.95	56.00	-16.05
0.59	H	39.00	56.00	-17.00
8.25	N	44.00	60.00	-16.00
8.38	H	43.94	60.00	-16.06
Frequency (MHz)	Line	Average (dBuV)		Margin (dB)
		Emission level	Limits	
-				
-				

Line Conducted Emission Tabulated Data


Remark : "H": Hot Line, "N": Neutral line, "P": Peak detect

Average data was not recorded, because Peak values were under the Average limit.

Tested by: Young-Min Choi / Project Engineer

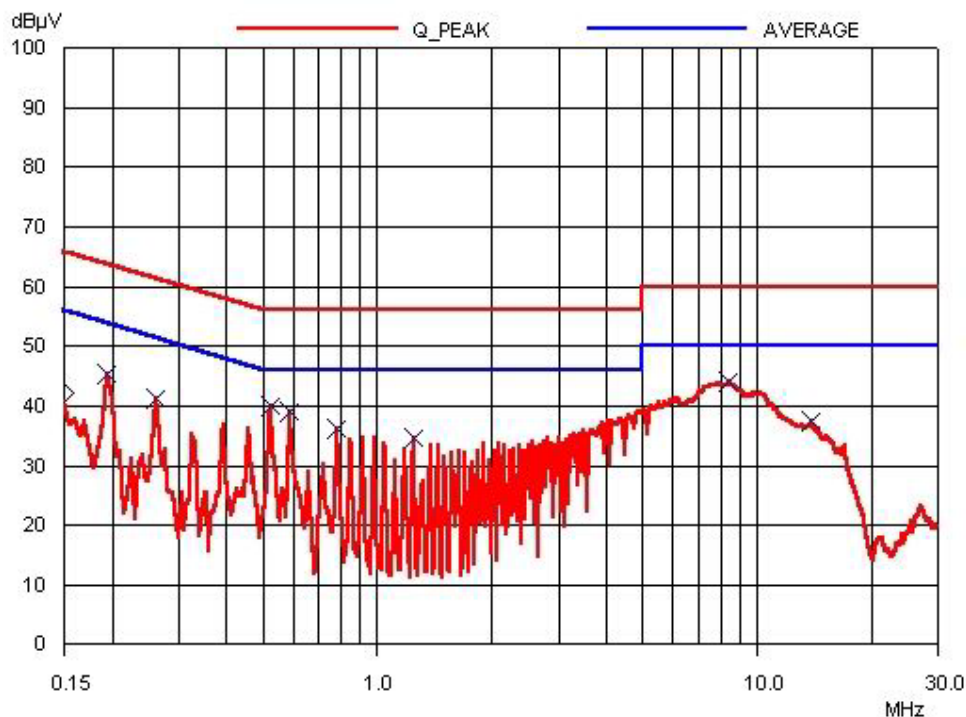

HOT LINE

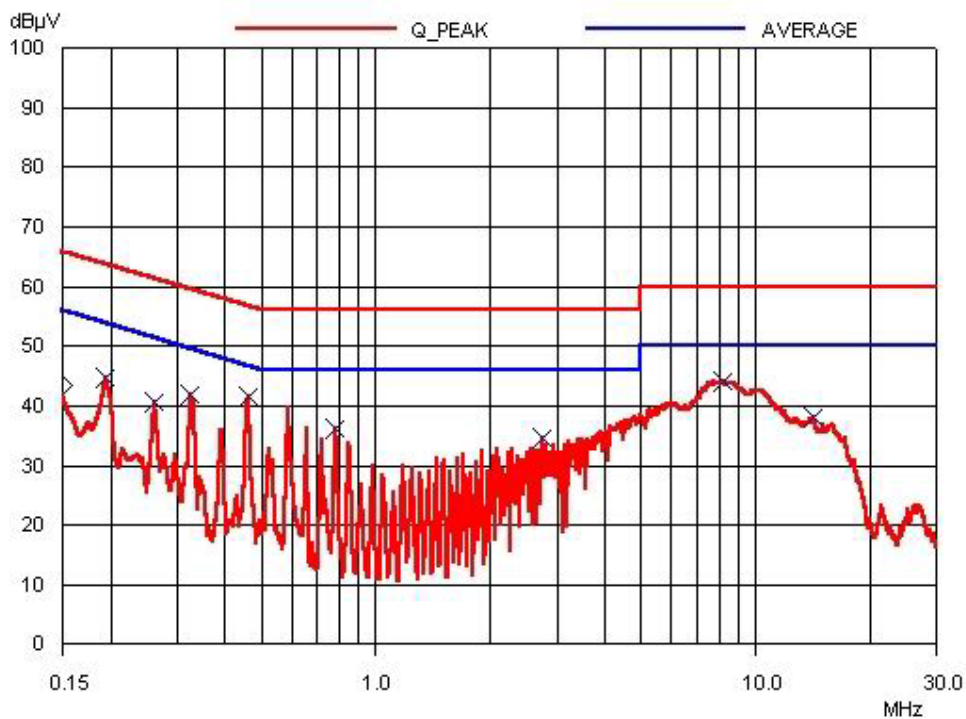

NEUTRAL LINE



5.2 Radiated Emission Test

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 51 % Temperature : 16 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.109 (a)
 Type of Test : CLASS B
 Result : PASSED BY -4.20 dB at 288.00 MHz

EUT : MP3 PLAYER Date: January 07, 2003
 Operating Condition : Files Up/Downloading mode
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Distance : 3 Meter

Radiated Emissions		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
60.00	14.00	V	9.41	0.98	24.39	40.00	-15.61
72.00	13.30	H	7.39	1.00	21.69	40.00	-18.31
120.00	11.50	V	13.47	1.23	26.20	43.50	-17.30
132.00	12.40	V	12.89	1.27	26.56	43.50	-16.94
144.00	18.90	V	12.93	1.33	33.16	43.50	-10.34
156.00	10.00	V	14.79	1.37	26.16	43.50	-17.34
168.00	14.30	H	15.75	1.42	31.47	43.50	-12.03
180.00	14.30	V	16.12	1.45	31.87	43.50	-11.63
192.00	16.20	H	16.59	1.52	34.31	43.50	-9.19
227.40	15.30	V	11.04	1.71	28.05	46.00	-17.95
239.80	18.00	H	11.61	1.78	31.39	46.00	-14.61
288.00	25.80	H	14.05	1.95	41.80	46.00	-4.20
336.40	10.90	H	14.30	2.21	27.41	46.00	-18.59
384.60	24.30	H	14.84	2.41	41.55	46.00	-4.45
431.60	10.70	H	15.88	2.50	29.08	46.00	-16.92
480.00	20.70	H	17.07	2.62	40.39	46.00	-5.61
528.40	10.60	H	17.60	2.74	30.94	46.00	-15.06
576.60	19.20	V	18.41	2.87	40.48	46.00	-5.52
768.00	15.40	H	20.76	3.58	39.74	46.00	-6.26

Radiated Emissions Tabulated Data


 Tested by: Young-Min Choi / Project Engineer

This report shall not be reproduced except in full without our written approval.

FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
 (TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do 464-860 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)

**7. LIST OF TEST EQUIPMENT**

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	OCT/02	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	APR/02	12MONTH	■
3.	Spectrum analyzer	HP	8568B	3109A05456	APR/02	12MONTH	■
4.	RF preselector	HP	85685A	3107A01264	APR/02	12MONTH	■
5.	Quasi-Peak Adapter	HP	85650A	3107A01542	APR/02	12MONTH	■
6.	Biconical antenna	EMCO	3104C	9109-4441 9109-4443 9109-4444	APR/02	12MONTH	■
7.	Log Periodic antenna	EMCO	3146	9109-3213 9109-3214 9109-3217	APR/02	12MONTH	■
8.	LISN	EMCO	3825/2	9109-1867 9109-1869	AUG/02	12MONTH	■
9.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
10.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
11.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■