

COMOHAC T-Coil probe Calibration Report



Ref: CR-280-20-08-SATB-A

Page: 1/3

Issue: A

Date: 2012/10/06

COMOHAC T-COIL PROBE CALIBRATION REPORT

Prepared By: LUC Jérôme, SATIMO
Project Description: HAC TEST BENCH
Prepared For (End User): Shenzhen Morlab Communication Technology

This document is issued by SATIMO, in confidence and is not to be reproduced in whole or in part without the prior written permission. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or in part without the prior written permission of SATIMO.

COMOHAC T-Coil probe Calibration Report



Ref: CR-280-20-08-SATB-A

Page: 2/3

Issue: A

Date: 2012/10/06

T-COIL PROBE CALIBRATION REPORT

DATE: 14/11/2008

REFERENCE: SN 39/08 TCP11

OBJECT: T-COIL PROBE

MANUFACTURER: SATIMO

SERIAL NUMBER: SN 39/08 TCP11

CUSTOMER: Shenzhen Morlab Communication Technology

CONTRACT: PF2130108b_SAR_Morlab

DATE OF CALIBRATION: 06/10/2012

WARRANTY:

This Calibration certificate may not be reproduced other than in full. Calibration certificates without signature and seal are not valid. This documentation contains property information which is protected by copyright. All right are reserved. No part of this document may be photocopied, reproduced without the prior written agreement of SATIMO. SATIMO shall not be liable for errors contained herein or for incidental or consequential in connection with the furnishing, performance or use of this material. Warranty doesn't apply to Normal wear, Normal tear, Improper use, Improper maintain, Improper installation.

Date

06/10/2012

SAR TEAM MANAGER

JS

SATIMO Bretagne
Technopôle Brest Iroise
Zone du Vernis
225 rue Pierre Rivoalon
29200 BREST

COMOHAC T-Coil probe Calibration Report



Ref: CR-280-20-08-SATB-A

Page: 3/3

Issue: A

Date: 2012/10/06

PRODUCT DESCRIPTION



COIL DIMENSION

Dimensions: 6.55 mm length * 2.29 mm diameter

DC resistance: 860.6 Ω


Wire size: 51 AWG

Inductance: 132.1 mH at 1 kHz

Sensitivity: -60.22 dB (V/A/m) at 1kHz

SENSITIVITY

Probe coil sensitivity relative to sensitivity at 1000 Hz

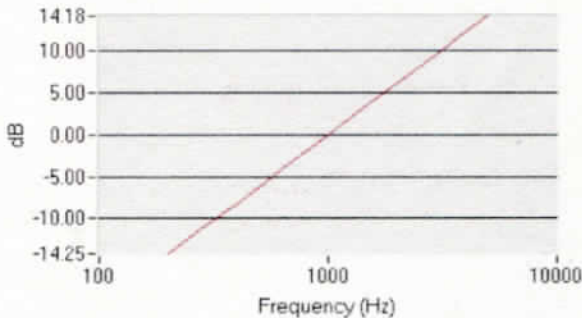

T-Coil probe sensitivity (dB V/(A/m)) -60.22

Frequency (Hz)	H (dB (V/(A/m)))
200	-73,92940009
250	-72,01119983
315	-70,06378892
400	-67,88880017
500	-66,00059991
630	-64,07318901
800	-62,00820026
1000	-60,22
1250	-58,29179974
1600	-56,20760035
2000	-54,31940009
2500	-52,36119983
3150	-50,38378892
4000	-48,50880017
5000	-46,44059991

LINEARITY

Linearity = 0.27 dB

Power (dB) relative to 1 A/m	0	-10	-20	-30	-40	-50
H (dB (V/(A/m)))	0	-9,95	-19,95	-30	-39,9	-49,73