



Report No.: SZ12090149H02

HAC TEST REPORT



Issued to

Unimax Communications

For

WCDMA 850/1900MHZ HSDPA and GSM850,1900,GPRS,EDGE Smartphone

Model Name : U310G
 Trade Name : TracFone/Unimax
 Brand Name : TracFone/Unimax
 FCC ID : P46-U310G
 Standard : ANSI C 63.19:2007

HAC Level : T-Coil: T3

Test date : 2012-10-18

Issue date : 2012-10-22



Shenzhen MORLAB Communication Technology Co., Ltd.

Tested by Zhu Zhan
 Zhu Zhan
 Date 2012.10.22

Approved by Wu Xuewen
 Wu Xuewen
 Date 2012.10.22

Review by Samuel Peng
 Samuel Peng
 Date 2012.10.22



The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Contents

1.1. Identification of the Responsible Testing Laboratory.....	3
1.2. Identification of the Responsible Testing Location.....	3
1.3. Accreditation Certificate.....	3
1.4. List of Test Equipments.....	3
2. TECHNICAL INFORMATION.....	4
2.1. Identification of Applicant.....	4
2.2. Identification of Manufacturer.....	4
2.3. Equipment Under Test (EUT).....	4
2.3.1. Photographs of the EUT.....	4
2.3.2. Identification of all used EUTs.....	5
2.4. Applied Reference Documents.....	5
2.5. Test Environment/Conditions.....	6
2.6. Operational Conditions During Test.....	7
2.6.1. INTRODUCTION.....	7
2.6.2. ANSI/IEEE PC 63.19 PERFORMANCE CATEGORIES.....	8
2.6.3. Description of Test System.....	9
2.6.4. TEST PROCEDURE.....	13
2.6.5. Uncertainty Estimation Table.....	17
2.6.6. OVERALL MEASUREMENT SUMMARY.....	18
2.6.7. TEST DATA.....	19
ANNEX A PHOTOGRAPHS OF THE EUT.....	28
ANNEX B EUT SETUP PHOTO.....	29

1.1. Identification of the Responsible Testing Laboratory

Company Name: Shenzhen Morlab Communications Technology Co., Ltd.
 Department: Morlab Laboratory
 Address: 3/F, Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, 518055 P. R. China
 Responsible Test Lab Manager: Mr. Shu Luan
 Telephone: +86 755 86130268
 Facsimile: +86 755 86130218

1.2. Identification of the Responsible Testing Location

Name: Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
 Address: 3/F, Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, 518055 P. R. China

1.3. Accreditation Certificate

Accredited Testing Laboratory: No. CNAS L3572

1.4. List of Test Equipments

No.	Instrument	Type	Cal. Date	Cal. Due
1	PC	Dell (Pentium IV 2.4GHz, SN:X10-23533)	(n.a)	(n.a)
2	Network Emulator	Rohde&Schwarz (CMU200, SN:105894)	2012-9-26	1year
3	Voltmeter	Keithley (2000, SN:1000572)	2012-9-26	1year
4	Signal Generator	Rohde&Schwarz (SMP_02)	2012-9-24	1year
5	Power Meter	Agilent (E4416A, SN:MY45102093)	2012-5-07	1year
6	Power Sensor	Agilent (N8482A, SN:MY41091706)	2012-5-07	1year
7	Directional coupler	Giga-tronics(SN:1829112)	2012-9-24	1year
8	Audio DAQ	NI (MonDAQ, SN:MonNumero)	2012-9-24	1year
9	T-coil Probe	SATIMO (SN:39/08 TCP11)	2012-10-06	1year
10	HAC holder	SN02_EPH02 (SN:SN_3608_SUPH16)	2012-9-24	1year



2. Technical Information

Note: the following data is based on the information by the applicant.

2.1. Identification of Applicant

Company Name: Unimax Communications
Address: 18201 McDermott St. West Suite E, Irvine, CA 92614

2.2. Identification of Manufacturer

Company Name: Unimax Communications
Address: 18201 McDermott St. West Suite E, Irvine, CA 92614

2.3. Equipment Under Test (EUT)

Model Name: U310G
Trade Name: TracFone/Unimax
Brand Name: TracFone/Unimax
Hardware Version: F2610_V1.1
Software Version: U310G.ICS.12370114
Frequency Bands: GSM 850MHz; PCS 1900MHz;
WCDMA 850MHz/1900MHz;
WIFI: 2412MHz-2462MHz
BT: 2402MHz-2480MHz
Modulation Mode: GSM:GMSK
WCDMA : CDMA
WIFI 802.11B : DSSS
WIFI 802.11G: OFDM
BT: GFSK
Antenna type: Fixed Internal Antenna
Development Stage: Identical prototype
Battery Model: U310G
Battery specification: 1450mAh 3.7V
GSM 850; BT OFF, Wifi OFF
HAC Test GSM 1900; BT OFF, Wifif OFF
Configurations: WCDMA 850; BT OFF, Wifi OFF
WCDMA 1900; BT OFF, Wifif OFF

2.3.1. Photographs of the EUT

Please see for photographs of the EUT.

2.3.2. Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	F2610_V1.1	U310G.ICS.12370114

2.4. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	ANSI C 63.19:2007	American National Standard Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids

Note: Test report, reference KDB 285076 documents.

2.5. Test Environment/Conditions

Normal Temperature (NT):	20 ... 25 °C
Relative Humidity:	30 ... 75 %
Air Pressure:	980 ... 1020 hPa
Test frequency:	GSM 850MHz /PCS 1900MHz; WCDMA 850MHz/ WCDMA 1900MHz;
Operation mode:	Call established
Power Level:	GSM 850 MHz Maximum output power(level 5) PCS 1900 MHz Maximum output power(level 0) WCDMA 850MHz Maximum output power(All up bits) WCDMA 1900MHz Maximum output power(All up bits)

During HAC test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

Air-interface	Band (MHz)	Type	C63.19-2007 Tested	Simultaneous Transmissions Scenarios invoice (Not to be tested)	Reduced power	VOIP
GSM	850	Voice	Yes	Yes: WIFI or BT	N/A	N/A
	1900	Voice	Yes	Yes: WIFI or BT	N/A	N/A
	GPRS/EDGE	Data	N/A	N/A	N/A	N/A
WCDMA	850	Voice	Yes	Yes: WIFI or BT	N/A	N/A
	1900	Voice	Yes	Yes: WIFI or BT	N/A	N/A
	HSDPA	Data	N/A	N/A	N/A	N/A
WIFI	2450	Data	N/A	Yes GSM or WCDMA	N/A	N/A
BT	2450	Data	N/A	Yes GSM or WCDMA	N/A	N/A

The volume is at the maximum value, and the backlight of the phone is turned off. The Manufacturer doesn't design HAC mode software on the EUT

2.6. Operational Conditions During Test

2.6.1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658 to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide suffer from hearing loss.

Compatibility Tests involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions.
- RF Magnetic- field emissions.
- T-coil mode, magnetic-signal strength in the audio band.
- T-coil mode, magnetic-signal frequency response through the audio band.
- T-coil mode, magnetic-signal and noise articulation index.

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device

2.6.2. ANSI/IEEE PC 63.19 PERFORMANCE CATEGORIES

4.3.2.1. T-coil

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

Category	Telephone RF Parameter
	Wireless Device Signal Quality (Signal + Noise-to-noise ratio in dB)
T1	0 to 10 dB
T2	10 to 20 dB
T3	20 to 30 dB
T4	>30 dB
Magnetic Coupling Parameters	

4.3.2.2. Articulation Weighing Factor (AWF)

Standard	Technology	AWF
T1/T1P1/3GPP	UMTS(WCDMA)	0
IS-95	CDMA	0
iden	GSM(22and 11Hz)	0
J-STD-007	GSM(217Hz)	-5
AWF has been developed from information presented to the committee regarding the interference potential of the various modulation types according to ANSI PC 63.19		

2.6.3. Description of Test System

4.3.3.1. COMO HAC E-FIELD PROBE



Serial Number:	SN 41/08 EPH17
Frequency:	100MHz – 3GHz
Probe length:	330mm
Length of one dipole:	3.3mm
Maximum external diameter:	8mm
Probe extremity diameter:	6mm
Distance between dipoles/probe extremity:	3mm
Resistance of the three dipole (at the connector):	Dipole 1:R1=2.1807 MΩ Dipole 2:R1=2.0612 MΩ Dipole 3:R3=2.1892 MΩ
Connector (HIROSE series SR30)	6 wire male (Hirose SR30series)

CALIBRATION TEST EQUIPMENT


TYPE	IDENTIFICATION
Calibration bench	SATIMO AIR CALIBRATION SOFTWARE
Multimeter	Keithley 2000

MEASUREMENT PROCEDURE

Probe calibration is realized by using the waveguide method. The probe was inserted in a waveguide loading by a 50 load. By controlling the input power in the waveguide, we are able to create a know EField value in the waveguide. ,

Keithley configuration:

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO

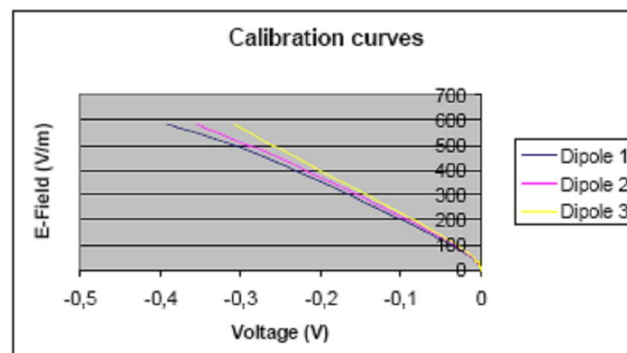

The following tables represent the calibration curves linearization by curve segment in CW signal.

4.3.3.2. COMO HAC H-FIELD PROBE



Serial Number:	SN 41/08 HPH18
Frequency:	100MHz – 3GHz
Probe length:	330mm
Length of one dipole:	3.3mm
Maximum external diameter:	8mm
Probe extremity diameter:	6mm
Distance between dipoles/probe extremity:	3mm
Resistance of the three dipole (at the connector):	Dipole 1:R1=2.1650 MΩ Dipole 2:R1=2.2176 MΩ Dipole 3:R3=2.4084 MΩ
Connector (HIROSE series SR30)	6 wire male (Hirose SR30series)

CALIBRATION TEST EQUIPMENT


TYPE	IDENTIFICATION
Calibration bench	SATIMO AIR CALIBRATION SOFTWARE
Multimeter	Keithley 2000

MEASUREMENT PROCEDURE

Probe calibration is realized by using the waveguide method. The probe was inserted in a waveguide loading by a 50 load. By controlling the input power in the waveguide, we are able to create a know HField value in the waveguide.

Keithley configuration:

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO

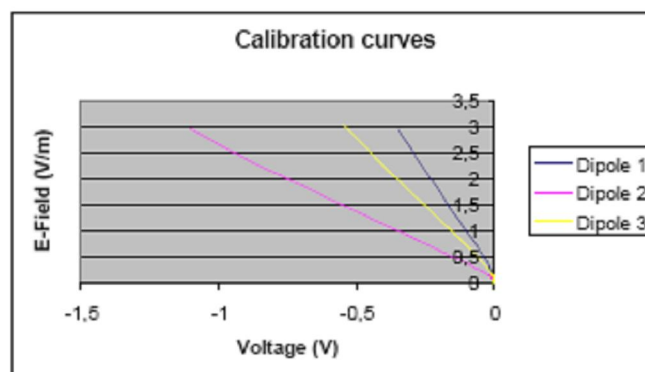

The following tables represent the calibration curves linearization by curve segment in CW signal.


4.3.3.3. COMOHAC T-COIL PROBE



Serial Number:	SN 39/08 TCP11
Dimensions:	6.55mm length*2.29mm diameter
DC resistance:	860.6Ω
Wire size:	51 AWG
Inductance:	132.1 mH at 1kHz
Sensitivity:	-60.22 dB (V/A/m) at 1kHz

SENSITIVITY

Probe coil sensitivity relative to sensitivity at 1000 Hz

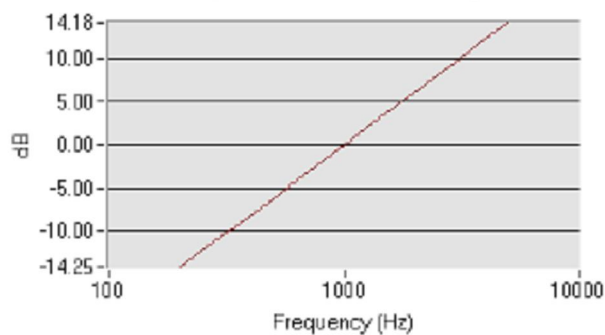

T-Coil probe sensitivity (dB V/(A/m))

Frequency (Hz)	H (dB (V/(A/m)))
200	-73.92940009
250	-72.01119983
315	-70.06378892
400	-67.88880017
500	-66.00059991
630	-64.07318901
800	-62.00820026
1000	-60.22
1250	-58.29179974
1600	-56.20760035
2000	-54.31940009
2500	-52.36119983
3150	-50.38378892
4000	-48.50880017
5000	-46.44059991

LINEARITY


Linearity = 0.27 dB

Power (dB) relative to 1 A/m	0	-10	-20	-30	-40	-50
H (dB (V/(A/m)))	0	-9.95	-19.95	-30	-39.9	-49.73

4.3.3.4. System Hardware

The HAC positioning ruler is used to position the phone properly with the regard to the position of the probe during a measurement. The positioning system is made of a dedicated frame that can be fixed on the table. The tip of the probe is positioned on a reference point located on the top of the positioning ruler. The distance between this reference point and the cross located on the ruler being known, the speaker of the phone is positioned on this cross in order to make sure both probe and phone are positioned properly.

During the measurement, the HAC ruler has to be removed so that it does not interfere with the measurement.

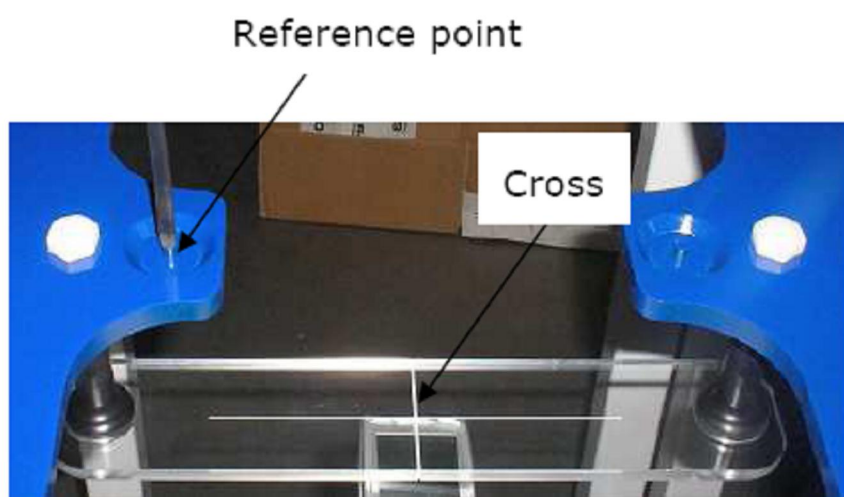


HAC positioning ruler

2.6.4. TEST PROCEDURE

4.3.4.1. T-coil Test Flow


The flow diagram below was followed (From C63.19):

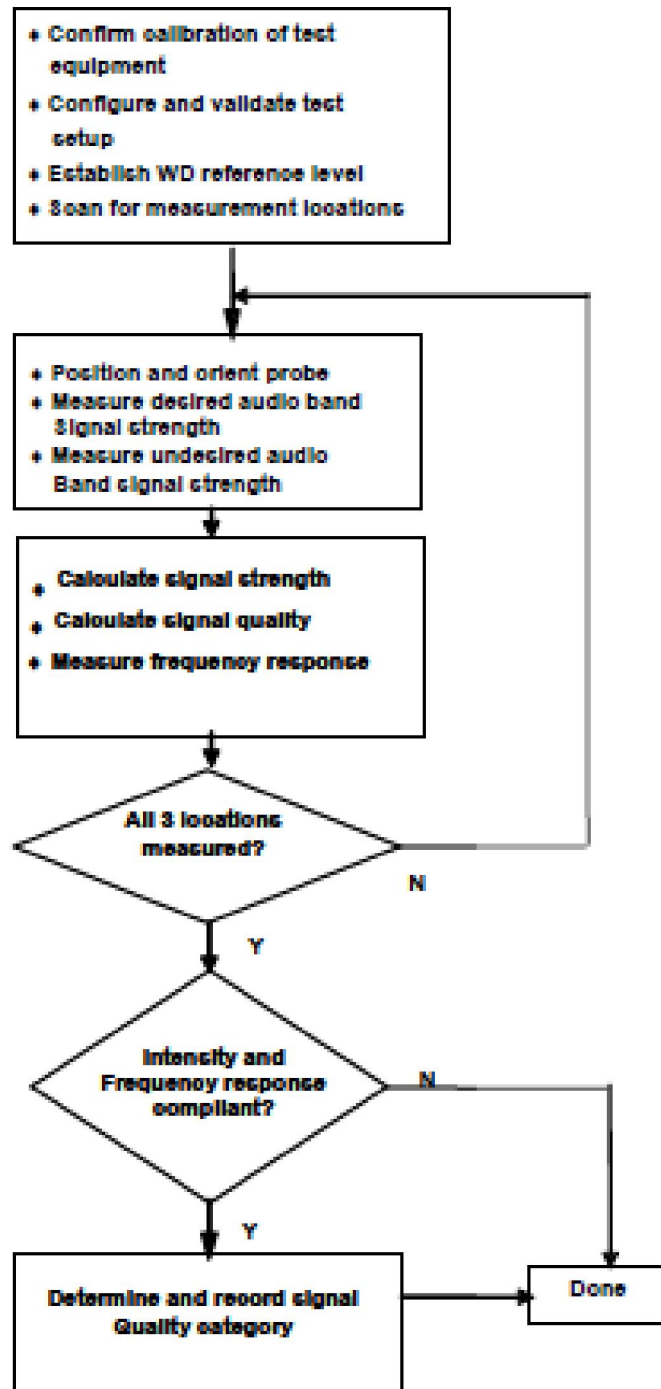


C63.19 T-Coil Signal Test Process

4.3.4.2. TEST Setup

The equipment was connected as shown in an acoustic/RF hemi-anechoic chamber:

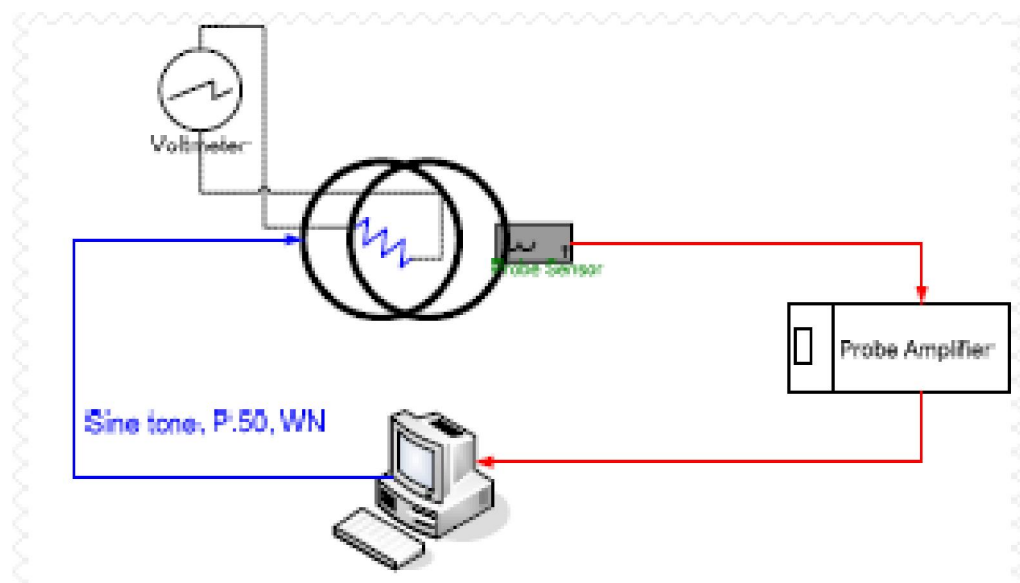

Validation Setup with Helmholtz Coil

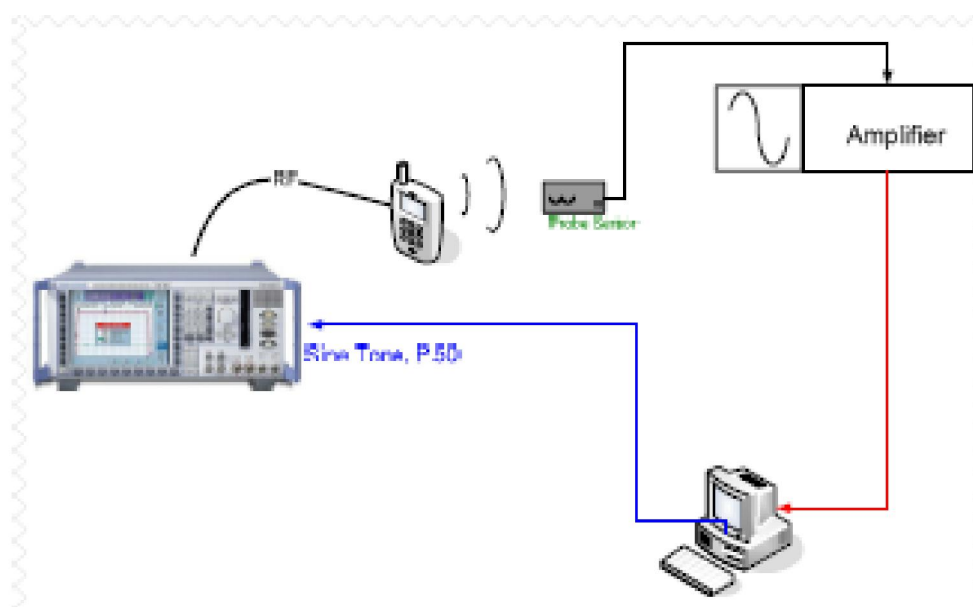


T-Coil Test Setup

4.3.4.3.T-coil Test Procedure

Frequency Response Validation

The frequency response through the Helmholtz Coil was verified to be within 0.5 dB relative to 1 kHz, between 300 – 3000 Hz using the ITU-P.50 artificial speech signal as shown below:

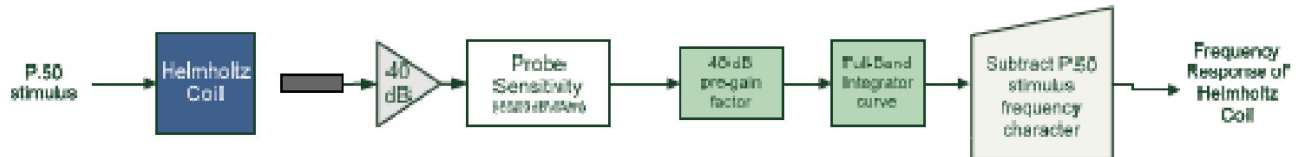


Frequency Response Validation

Measurement Validation

WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz – 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:

f(Hz)	HBI, A- Measured (dB re 1kHz)	HBI, A- Theoretical (dB re 1kHz)	dB Var.
100	-16.150	-16.170	0.020
125	-13.241	-13.250	0.009
160	-10.333	-10.340	0.007
200	-8.005	-8.010	0.005
250	-5.915	-5.920	0.005
315	-4.035	-4.040	0.005
400	-2.395	-2.400	0.005
500	-1.207	-1.210	0.003
630	-0.347	-0.350	0.003
800	0.068	0.070	0.002
1000	0.001	0.000	0.001
1250	-0.501	-0.500	-0.001
1600	-1.511	-1.510	-0.001
2000	-2.783	-2.780	-0.003
2500	-4.323	-4.320	-0.003
3150	-6.175	-6.170	-0.005
4000	-8.338	-8.330	-0.008
5000	-10.599	-10.590	-0.009
6300	-13.212	-13.200	-0.012
8000	-16.284	-16.270	-0.014
10000	-19.539	-19.520	-0.019

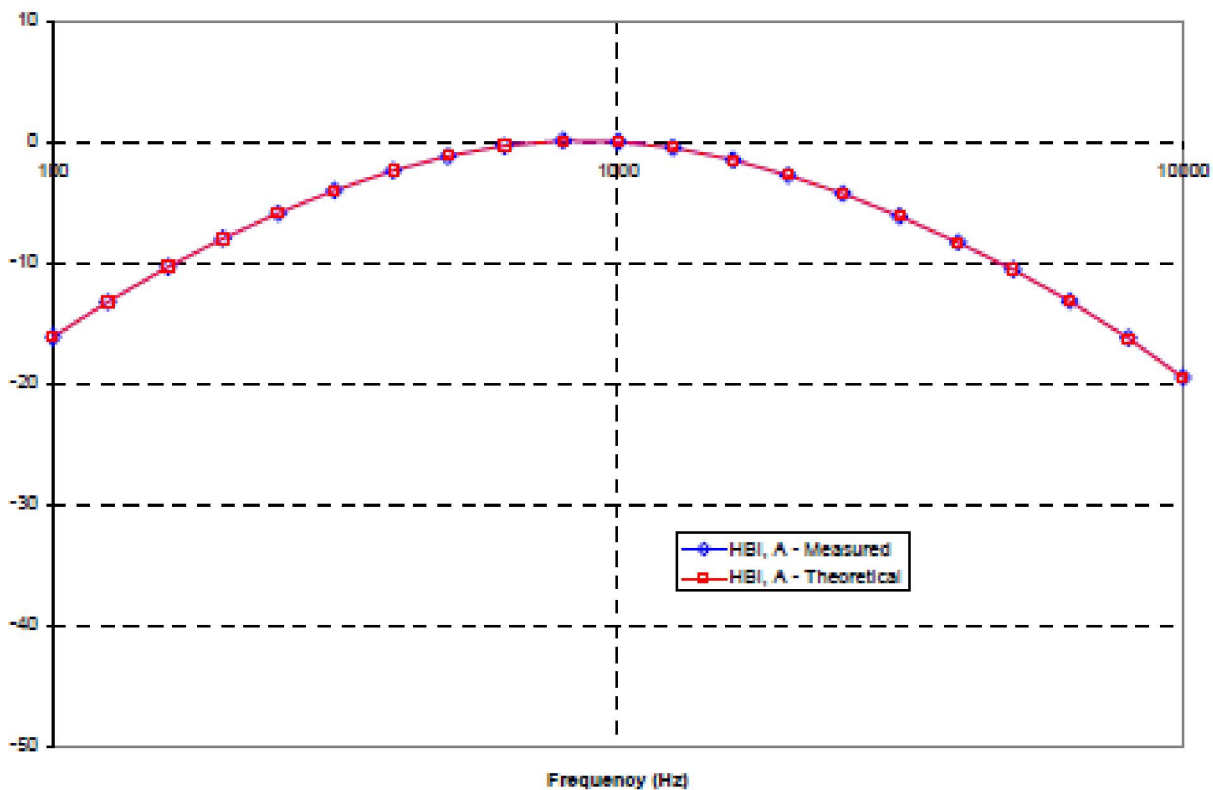

Frequency Response Validation

2.6.5. Uncertainty Estimation Table

Error Description	Uncertainty value	Probe Dist.	Div	c AMB1	C AMB2	Std. Unc.(+-%)	
						AMB1	AMB2
Probe Sensitivity	4.00	N	1.000	1	1	4.00	4.00
Reference level	0.70	R	1.732	1	1	0.40	0.40
AMCC geometry	0.60	R	1.732	1	1	0.35	0.35
AMCC current	0.10	R	1.732	1	1	0.06	0.06
Probe positioning during calibration	0.70	R	1.732	0.01	1	0.00	0.40
Noise contribution	5.90	R	1.732	0.1	1	0.34	3.41
Frequency slope	1.00	R	1.000	1	1	0.58	0.58
Repeatability/drift	0.60	R	1.732	1	1	0.35	0.35
Linearity/Dynamic range	1.00	R	1.732	0.1	1	0.06	0.58
Acoustic noise	2.40	R	1.732	1	1	1.39	1.39
Probe angle	0.90	R	1.732	1	1	0.52	0.52
Spectral processing	0.60	N	1.732	1	5	0.60	3.00
Integration time	0.20	R	1.732	1	1	0.12	0.12
Field disturbance	0.60	R	1.000	0	1	0.00	0.35
Reference signal spectral response	2.00	R	1.000	1	1	1.15	1.15
Probe positioning	0.90	R	1.732	1	1	0.52	0.52
EUT positioning	1.90	R	1.732	1	1	1.10	1.10
RF interference	0.00	R	1.732	1	1	0.00	0.00
Test signal variation	2.00	R	1.000	1	1	1.15	1.15
Combined Std. Uncertainty (ABM field)						4.85	6.66
Expanded Std. Uncertainty on (%)						9.71	13.31

Note for table

1. N-Nomal
2. R-Rectangular
3. Div.- Divisor used to obataion standard uncertainty

2.6.6. OVERALL MEASUREMENT SUMMARY

4.3.7.1 T-coil

Mode	Test Description	Ambient Noise	ABM1	ABM2	Measurement Results	T Rating
GSM850	Axial	-41.71	13.21	-24.51	37.46	T4
	Radial H	-43.21	7.25	-13.02	20.27	T3
	Radial V	-39.36	5.87	-32.40	38.27	T4
GSM1900	Axial	-41.49	13.32	-23.17	36.49	T4
	Radial H	-42.10	7.10	-20.32	27.42	T3
	Radial V	-40.11	5.85	-32.17	38.02	T4
WCDMA850	Axial	-41.00	13.15	-21.58	34.73	T4
	Radial H	-41.84	7.25	-15.3	22.55	T3
	Radial V	-39.18	5.98	-29.49	35.47	T4
WCDMA1900	Axial	-41.50	12.41	-22.32	34.72	T4
	Radial H	-42.84	7.00	-15.25	22.25	T3
	Radial V	-40.14	6.11	-29.70	35.81	T4

2.6.7. TEST DATA

<u>FREQUENCY</u>	<u>PARAMETERS</u>
<u>GSM 850</u>	<u>Measurement 1: T-coil</u> on GSM Mode
<u>GSM 1900</u>	<u>Measurement 2: T-coil</u> on GSM Mode
<u>WCDMA 850</u>	<u>Measurement 3: T-coil</u> on WCDMA Mode
<u>WCDMA 1900</u>	<u>Measurement 4: T-coil</u> on WCDMA Mode

MEASUREMENT 1


Date of measurement: 18/10/2012

A. Experimental conditions.


Grid size (mm x mm)	50.0, 50.0
Step (mm)	5
Scanning Height (mm)	10.0
Band	GSM850

B. HAC Measurement Results

	Axial			Radial H			Radial V		
	128	190	251	128	190	251	128	190	251
	Max	Max	Max	Max	Max	Max	Max	Max	Max
ABM1, dBA/m	13.21	13.21	NULL	7.25	7.18	7.18	5.87	5.90	5.90
ABM2, dBA/m	-24.25	NULL	NULL	-13.02	NULL-	NULL	-32.4	NULL-	NULL
Ambient noise, dBA/m	-41.71	-41.71	-41.71	-43.21	-43.21	-43.21	-39.36	-39.36	-39.36
Freq Reponse Margin (dB)									
S+N/N(dB)	37.46	NULL	NULL	20.27	NULL	NULL	43.64	NULL	NULL
S+N/N per orientation (dB)	37.46			20.27			38.27		

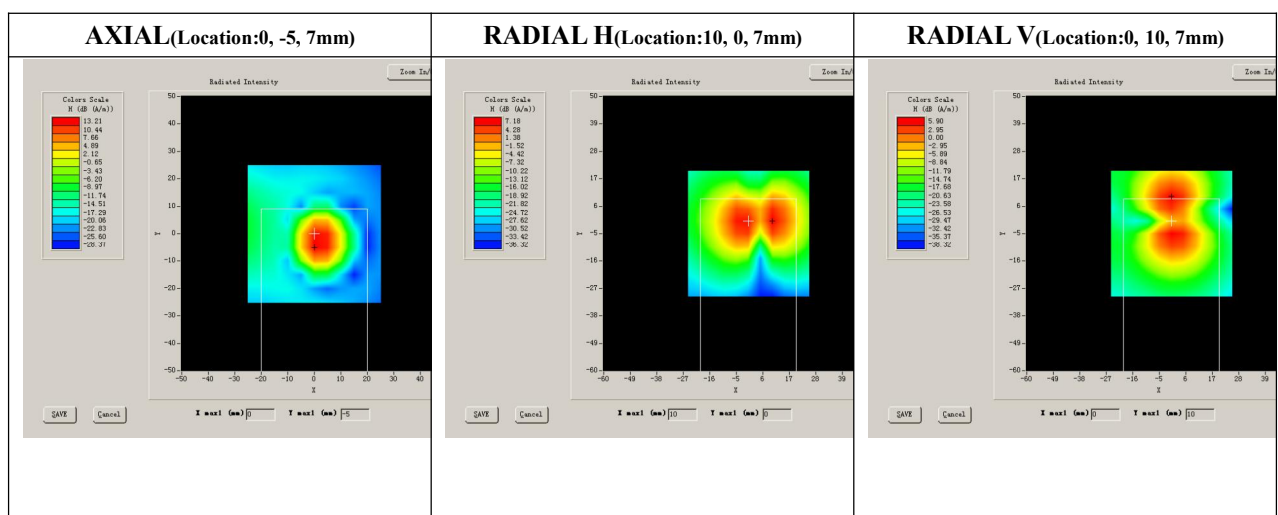

C63.19	Mode	Band	Test Description	Minimum Limit	Location	Measured	Category	Verdict		
				dB	-	dB	-	Pass/Fail		
7.3.1.1	GSM	GSM850	Intensity, Axial	-18	Max	7.88	-	PASS		
7.3.1.2			Intensity, RadialH	-18	Max	7.03	-	PASS		
					-	-	-	-	-	
7.3.1.2			Intensity, RadialV	-18	Max	4.37	-	PASS		
					-	-	-	-	-	
						dB		dB		
7.3.3			Signal to noise/noise, Axial	5	Max	37.46	T4	PASS		
7.3.3			Signal to noise/noise, RadialH	5	Max	20.27	T3	PASS		
					-	-	-	-	-	
7.3.3			Signal to noise/noise, RadialV	5	Max	38.27	T4	PASS		
			-	-	-	-	-			
7.3.2			Frequency reponse, Axial	-	-	-	-	-		

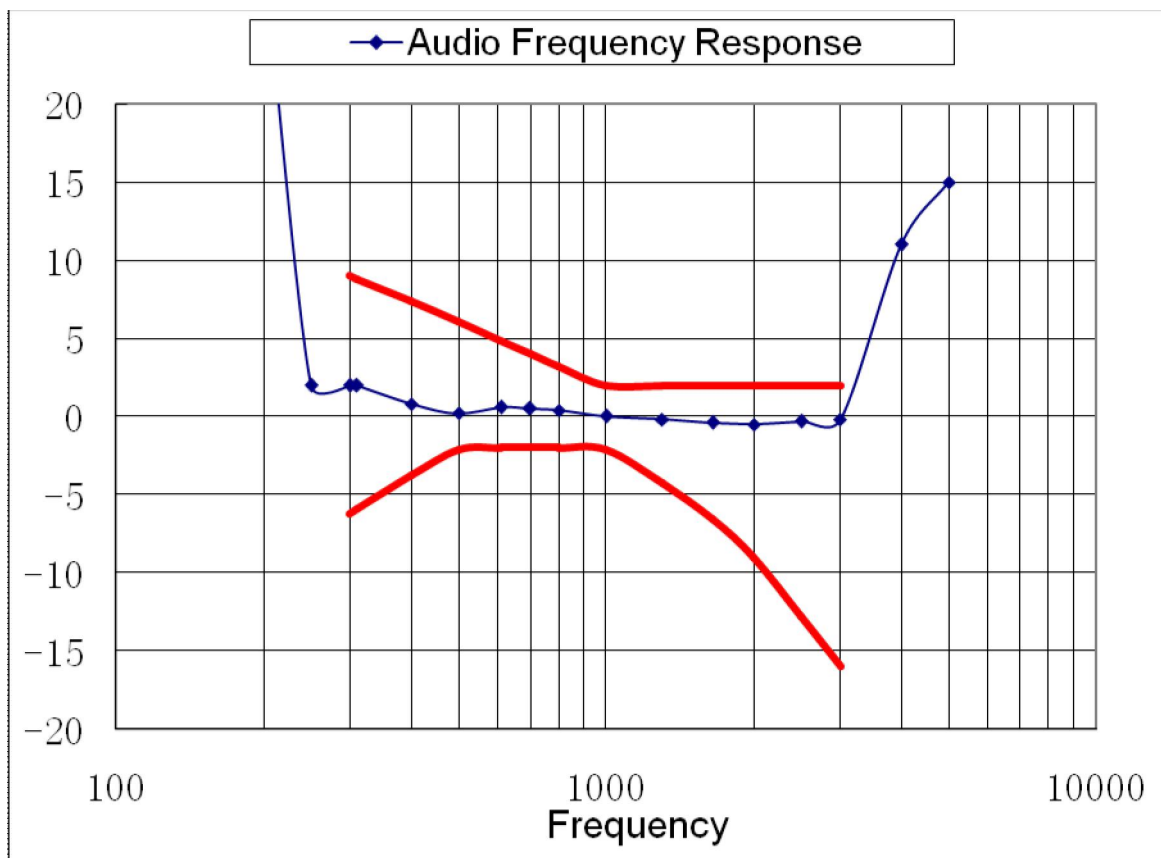

MEASUREMENT 2


Date of measurement: 18/10/2012

A. Experimental conditions.


Grid size (mm x mm)	50.0, 50.0
Step (mm)	5
Scanning Height (mm)	10.0
Band	GSM1900

B. HAC Measurement Results

	Axial			Radial H			Radial V		
	512	661	810	512	661	810	512	661	810
	Max	Max	Max	Max	Max	Max	Max	Max	Max
ABM1, dBA/m	NULL	13.32	NULL	NULL	7.10	7.10	NULL	5.85	5.85
ABM2, dBA/m	NULL	-23.17	NULL	NULL	-20.32	NULL	NULL	-32.17	NULL
Ambient noise, dBA/m	-41.49	-41.49	-41.49	-42.10	-42.10	-42.10	-40.11	-40.11	-40.11
Freq Reponse Margin (dB)	-		-	-	-	-	-	-	
S+N/N(dB)	NULL	36.49	NULL	NULL	27.42	NULL	NULL	38.02	NULL
S+N/N per orientation (dB)		36.49			27.42			38.02	

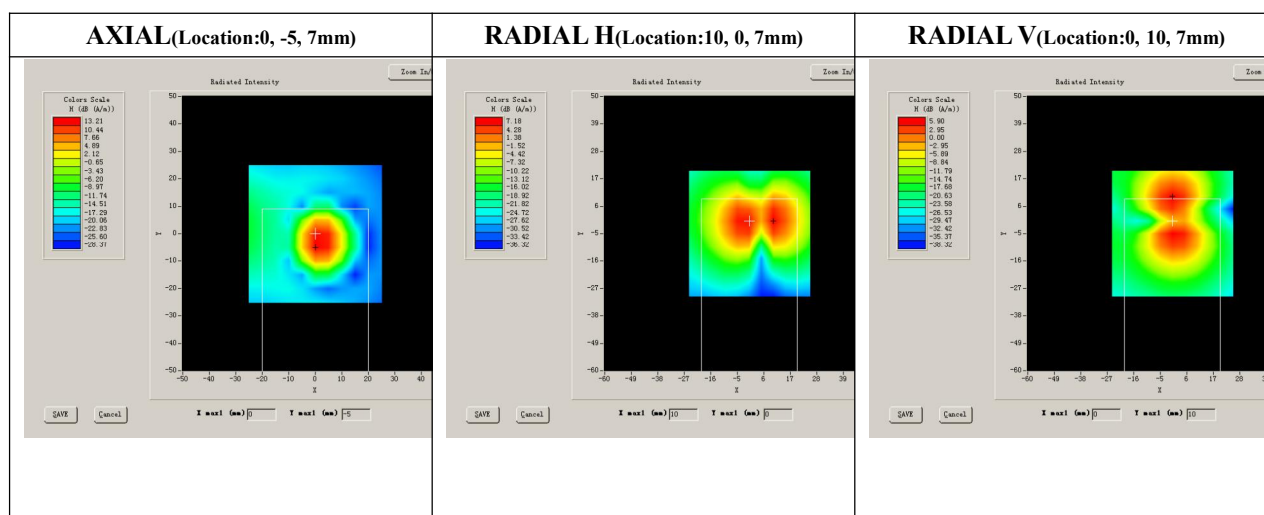

C63.19	Mode	Band	Test Description	Minimum Limit	Location	Measured	Category	Verdict		
				dBa/m	-	dBa/m	-	Pass/Fail		
7.3.1.1	GSM	GSM1900	Intensity, Axial	-18	Max	1.63	-	PASS		
7.3.1.2			Intensity, RadialH	-18	Max	-0.38	-	PASS		
					-	-	-	-	-	
7.3.1.2			Intensity, RadialV	-18	Max	-0.99	-	PASS		
					-	-	-	-	-	
						dB		dB		
7.3.3			Signal to noise/noise, Axial	5	Max	36.49	T4	PASS		
7.3.3			Signal to noise/noise, RadialH	5	Max	27.42	T3	PASS		
					-	-	-	-	-	
7.3.3			Signal to noise/noise, RadialV	5	Max	38.02	T4	PASS		
			-	-	-	-	-			
7.3.2			Frequency reponse, Axial	-	-	-	-	-		

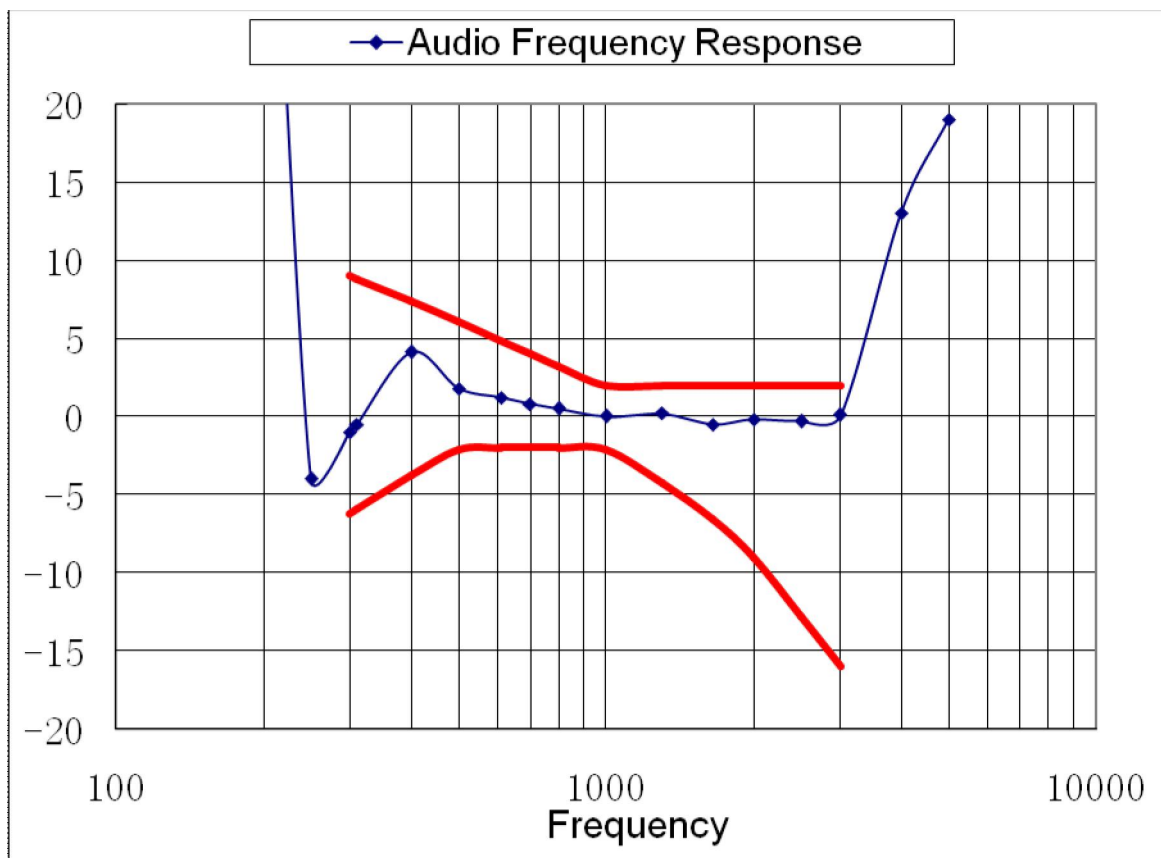

MEASUREMENT 3


Date of measurement: 18/10/2012

A. Experimental conditions.


Grid size (mm x mm)	50.0, 50.0
Step (mm)	5
Scanning Height (mm)	10.0
Band	WCDMA850

B. HAC Measurement Results

	Axial			Radial H			Radial V		
	4132	4175	4233	4132	4175	4233	4132	4175	4233
	Max	Max	Max	Max	Max	Max	Max	Max	Max
ABM1, dBA/m	NULL	12.98	13.15	NULL	7.25	7.25	NULL	5.98	5.98
ABM2, dBA/m	NULL	NULL	-21.58	NULL	NULL	-15.3	NULL	NULL	-29.49
Ambient noise, dBA/m	-41.00	-41.00	-41.00	-41.84	-41.84	-41.84	-39.18	-39.18	-39.18
Freq Reponse Margin (dB)		-	-	-	-	-	-	-	-
S+N/N(dB)	NULL	NULL	34.73	NULL	NULL	22.55	NULL	NULL	28.15
S+N/N per orientation (dB)		34.73			22.55			35.47	

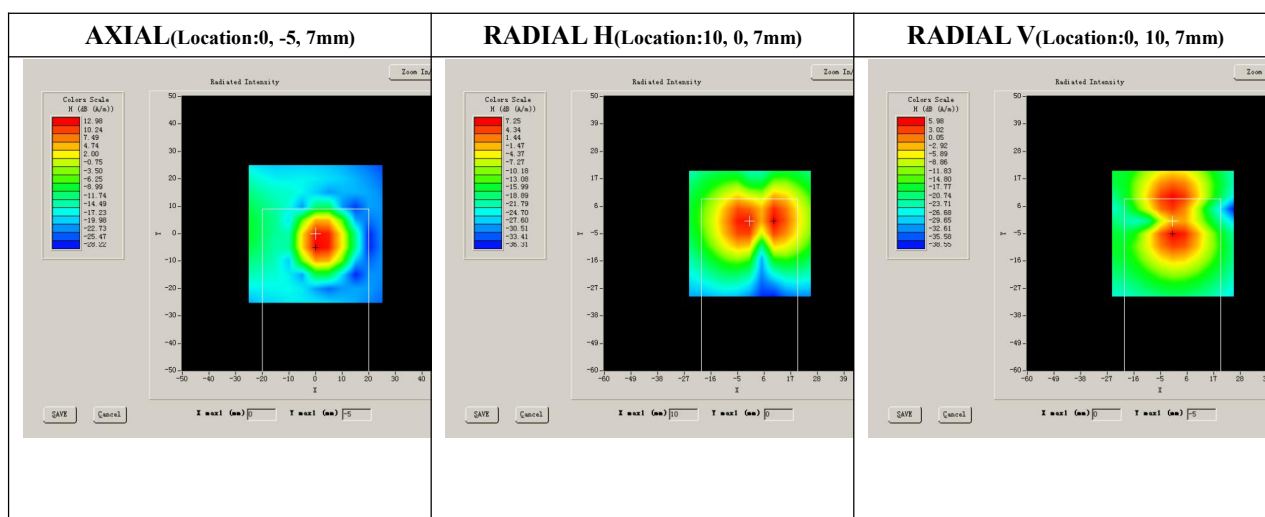

C63.19	Mode	Band	Test Description	Minimum Limit	Location	Measured	Category	Verdict		
				dBa/m	-	dBa/m	-	Pass/Fail		
7.3.1.1	GSM	GSM850	Intensity, Axial	-18	Max	7.32	-	PASS		
7.3.1.2			Intensity, RadialH	-18	Max	-1.21	-	PASS		
					-	-	-	-	-	
7.3.1.2			Intensity, RadialV	-18	Max	5.53	-	PASS		
					-	-	-	-	-	
						dB		dB		
7.3.3			Signal to noise/noise, Axial	5	Max	34.73	T4	PASS		
7.3.3			Signal to noise/noise, RadialH	5	Max	22.55	T3	PASS		
					-	-	-	-	-	
7.3.3			Signal to noise/noise, RadialV	5	Max	35.47	T4	PASS		
			-	-	-	-	-			
7.3.2			Frequency reponse, Axial	-	-	-	-	-		

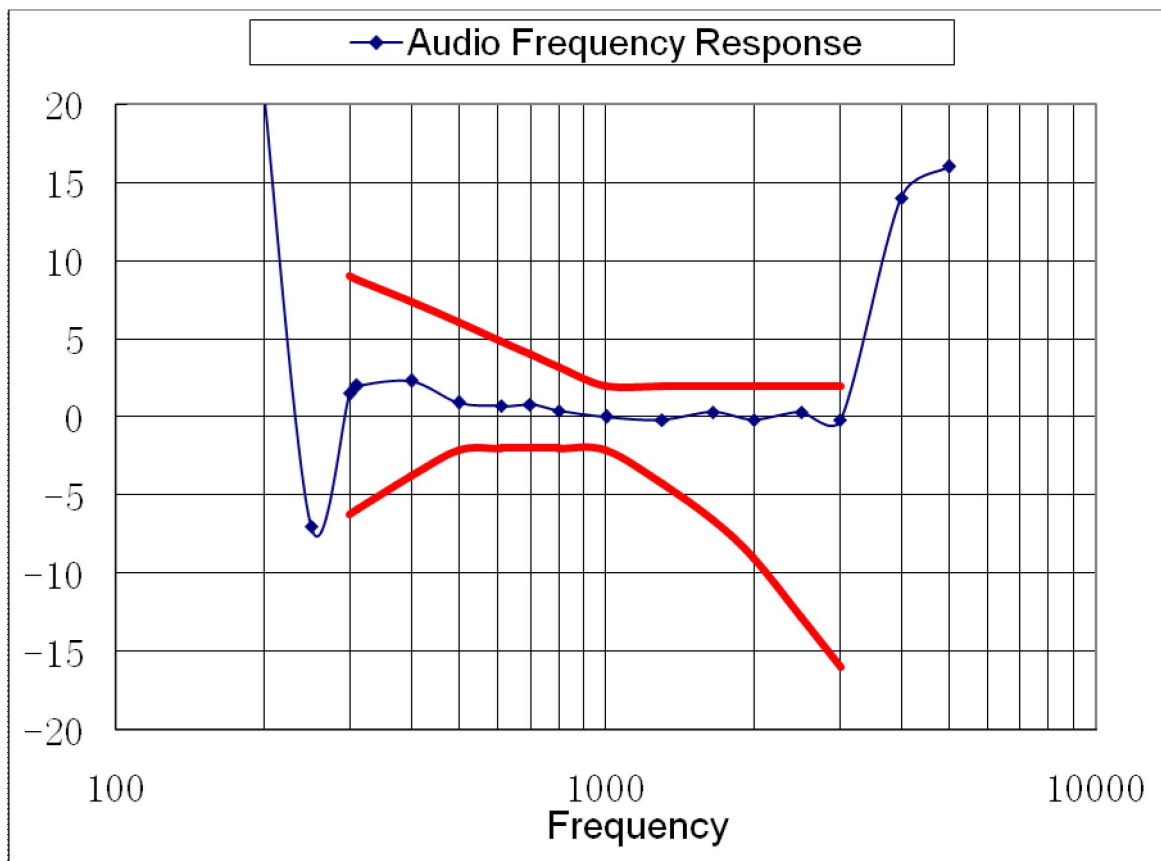

MEASUREMENT 4


Date of measurement: 18/10/2012

A. Experimental conditions.


Grid size (mm x mm)	50.0, 50.0
Step (mm)	5
Scanning Height (mm)	10.0
Band	WCDMA1900

B. HAC Measurement Results

	Axial			Radial H			Radial V		
	9262	9400	9538	9262	9400	9538	9262	9400	9538
	Max	Max	Max	Max	Max	Max	Max	Max	Max
ABM1, dBA/m	NULL	12.41	12.41	NULL	7.00	7.00	NULL	6.11	6.11
ABM2, dBA/m	NULL	NULL	-22.32	NULL	NULL	-15.25	NULL	NULL	-29.7
Ambient noise, dBA/m	-41.50	-41.50	-41.50	-42.84	-42.84	-42.84	-40.14	-40.14	-40.14
Freq Reponse Margin (dB)		-	-	-	-	-	-	-	-
S+N/N(dB)	NULL	NULL	34.73	NULL	NULL	22.55	NULL	NULL	28.15
S+N/N per orientation (dB)		34.72			22.25			35.81	

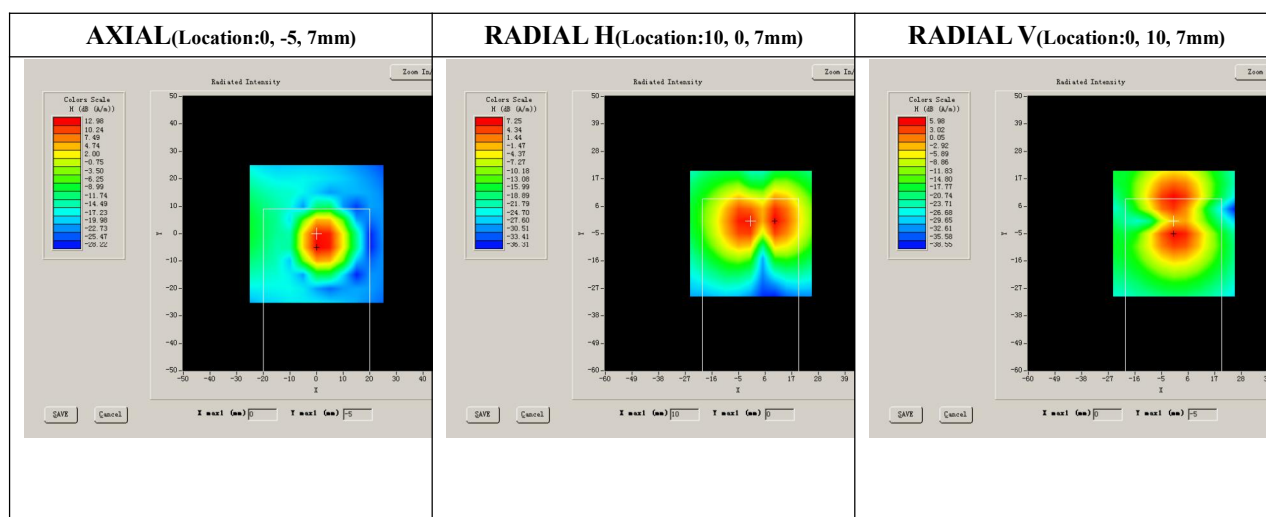

C63.19	Mode	Band	Test Description	Minimum Limit	Location	Measured	Category	Verdict	
				dB/m	-	dB/m	-	Pass/Fail	
7.3.1.1	WCDMA	WCDMA 1900	Intensity, Axial	-18	Max	10.12	-	PASS	
7.3.1.2			Intensity, RadialH	-18	Max	-1.12	-	PASS	
					-	-	-	-	-
7.3.1.2			Intensity, RadialV	-18	Max	7.71	-	PASS	
					-	-	-	-	-
						dB		dB	
7.3.3			Signal to noise/noise, Axial	5	Max	34.72	T4	PASS	
7.3.3			Signal to noise/noise, RadialH	5	Max	22.35	T3	PASS	
						-	-	-	-
7.3.3			Signal to noise/noise, RadialV	5	Max	35.81	T4	PASS	
				-	-	-	-		
7.3.2			Frequency response, Axial	-	-	-	-	-	

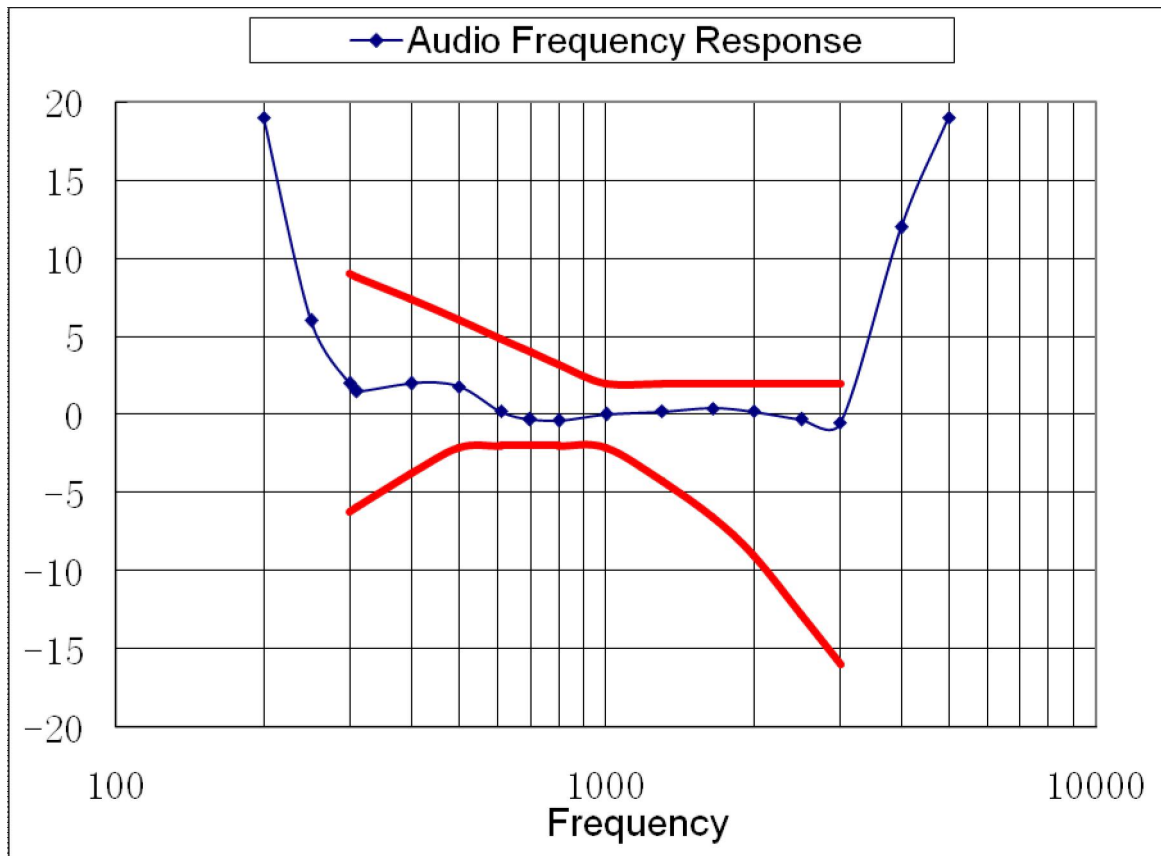

Annex A Photographs of the EUT



Annex B EUT Setup photo