

No. 1 Workshop, M-10, Middle section, Science & Report No.: HR/2019/1000503

Technology Park, Nanshan District, Shenzhen, Page: 1 of 83

Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Email: ee.shenzhen@sgs.com

# **FCC TEST REPORT**

Application No: HR/2019/10005

Applicant: Unimax communications

Address of Applicant 18201 McDurmott St.West Suite E,Irvine,CA 92614.

Manufacturer: Unimax communications

Address of Manufacturer 18201 McDurmott St.West Suite E,Irvine,CA 92614.

Factory: Unimax communications

Address of Factory 18201 McDurmott St.West Suite E,Irvine,CA 92614.

EUT Description: Smartphone

Model No.: U683CL

Trade Mark: UMX

FCC ID: P46-U683CL

Standards: 47 CFR FCC Part 2, Subpart J

47 CFR Part 15, Subpart C

KDB558074 D01 15.247 Meas Guidance v05

Test Method ANSI C63.4(2014)

ANSI C63.10 (2013)

**Date of Receipt:** 2019/1/10

**Date of Test:** 2019/1/10 to 2019/1/24

**Date of Issue:** 2019/1/24

Test Result: PASS \*

Authorized Signature:

Derele yang

Derek Yang

Wireless Laboratory Manager

<sup>. \*</sup> In the configuration tested, the EUT complied with the standards specified above.

Page: 2 of 83

# 1 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2019/1/24		Original

Authorized for issue by:		
Tested By	Nike Yu	2019/1/24
	(Mike Hu) /Project Engineer	Date
Checked By	David Chen	2019/1/24
	(David Chen) /Reviewer	Date

Page: 3 of 83

# 2 Test Summary

Test Item	Test Requirement	Test method	Test Result	Result
AC Power Line Conducted Emission	15.207	ANSI C63.10 2013	Clause 4.2	PASS
Duty Cycle	1	-	Clause 4.3	PASS
Conducted Output Power	15.247 (b)(3)	ANSI C63.10 2013	Clause 4.4	PASS
DTS (6 dB) Bandwidth & 99% Occupied Bandwidth	15.247 (a)(2)	ANSI C63.10 2013	Clause 4.5	PASS
Power Spectral Density	15.247 (e)	ANSI C63.10 2013	Clause 4.6	PASS
Band-edge for RF Conducted Emissions	15.247(d)	ANSI C63.10 2013	Clause 4.7	PASS
RF Conducted Spurious Emissions	15.247(d)	ANSI C63.10 2013	Clause 4.8	PASS
Radiated Spurious Emissions	15.247(d) ;15.205/15.209	ANSI C63.10 2013	Clause 4.9	PASS
Restricted bands around fundamental frequency (Radiated Emission)	15.247(d) ;15.205/15.209	ANSI C63.10 2013	Clause 4.10	PASS

Page: 4 of 83

# **Contents**

1	VERSION	
2	TEST SUMMARY	3
3		
	3.1 CLIENT INFORMATION	5
	3.2 TEST LOCATION	5
	3.3 TEST FACILITY	
	3.4 GENERAL DESCRIPTION OF EUT	
	3.5 TEST ENVIRONMENT AND MODE	
	3.6 DESCRIPTION OF SUPPORT UNITS	8
4	TEST RESULTS AND MEASUREMENT DATA	9
	4.1 ANTENNA REQUIREMENT	
	4.2 AC POWER LINE CONDUCTED EMISSIONS	
	4.3 DUTY CYCLE	14
	4.3.1 Test Results	
	4.3.1 Test Plots	
	4.4 CONDUCTED OUTPUT POWER	
	4.4.1 Test Results	
	4.5 DTS (6 dB) BANDWIDTH & 99% OCCUPIED BANDWIDTH	
	4.5.1 Test Results	
	4.5.2 Test plots	
	4.6 POWER SPECTRAL DENSITY	
	4.6.1 Test Results	
	4.6.2 Test plots	
	4.7.1 Test plots	
	4.8 RF CONDUCTED SPURIOUS EMISSIONS	
	4.8.1 Test plots	
	4.9 RADIATED SPURIOUS EMISSIONS	
	4.9.1 Radiated emission below 1GHz	
	4.9.2 Transmitter emission above 1GHz	
	4.10 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
	4.10.1 ANT1	
5	MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	82
6	EQUIPMENT LIST	83
7	PHOTOGRAPHS - FUT CONSTRUCTIONAL DETAILS	92

Page: 5 of 83

# 3 General Information

### 3.1 Client Information

Applicant:	Unimax communications
Address of Applicant:	18201 McDurmott St.West Suite E,Irvine,CA 92614.
Manufacturer:	Unimax communications
Address of Manufacturer:	18201 McDurmott St.West Suite E,Irvine,CA 92614.
Factory:	Unimax communications
Address of Factory:	18201 McDurmott St.West Suite E,Irvine,CA 92614.

### 3.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057
Telephone:	+86 (0) 755 2601 2053
Fax:	+86 (0) 755 2671 0594
E-mail:	ee.shenzhen@sgs.com

Page: 6 of 83

# 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### • A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

#### • FCC -Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

#### • Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

Page: 7 of 83

# 3.4 General Description of EUT

EUT Description::	Smartphone		
Model No.:	U683CL		
Trade Mark:	UMX		
Hardware Version:	Q5007-MB-V1.0		
Software Version:	U683CL_01.01.01.111634		
IEEE 802.11 WLAN Mode Supported	<ul> <li>⊠ 802.11B (20 MHz channel bandwidth),</li> <li>⊠ 802.11G (20 MHz channel bandwidth)</li> <li>⊠ 802.11N (20 MHz channel bandwidth),</li> <li>□ 802.11N (40 MHz channel bandwidth)</li> </ul>		
Operation Frequency:	2400 MHz -2483.5MHz fc = 2407 MHz + N * 5 MHz, where: -fc = "Operating Frequency" in MHz, -N = "Channel Number" with the range from 1 to 11 for the 20 MHz channel bandwidth, or 3 to 9 for the 40 MHz channel bandwidth.		
Type of Modulation:	IEEE for 802.11B: DSSS IEEE for 802.11G: OFDM IEEE for 802.11N(HT20): OFDM		
Sample Type:	⊠ Portable Device,		
Antenna Type:	☐ External, ☑ Integrated		
Antenna Ports			
Smart System	<ul> <li>SISO (for 802.11B/G/N),</li> <li>         ☐ MIMO (for 802.11N): 2 Tx &amp; 2 Rx,</li> <li>         ☐ Diversity (for 802.11B/G): Tx &amp; Rx     </li> </ul>		
Antenna Gain:	1.2dBi		
Power Supply			

	Operation Frequency of each channel (802.11B/G/N HT20)						
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

#### Remark:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency for 802.11B/G/N (HT20)
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

Page: 8 of 83

### 3.5 Test Environment and Mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	101.30 KPa
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

# 3.6 Description of Support Units

The EUT has been tested independent unit.

Page: 9 of 83

# 4 Test results and Measurement Data

# 4.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.2dBi.

Page: 10 of 83

### 4.2 AC Power Line Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15	5.207			
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	150kHz to 30MHz	150kHz to 30MHz			
	Frequency range (MHz)	Limit (dBuV)			
		Quasi-peak	Average		
I too the	0.15-0.5	66 to 56*	56 to 46*		
Limit:	0.5-5	56	46		
	5-30	60	50		
	* Decreases with the logarith	hm of the frequency.			
Test Procedure:	room.  2) The EUT was connected Impedance Stabilization impedance. The power of to a second LISN 2, which plane in the same way a multiple socket outlet strictly single LISN provided the 3) The tabletop EUT was placed on the horizontal 4) The test was performed of the EUT shall be 0.4 in vertical ground reference reference plane. The LIS unit under test and bond mounted on top of the ground associated	<ol> <li>The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was</li> </ol>			
	5) In order to find the maxin equipment and all of the ANSI C63.10: 2013 on c	interface cables must be ch			

Test Setup:

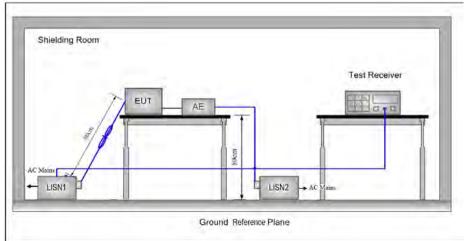

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms

Page: 11 of 83

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
	Charge + Transmitting mode.
First Tool Made	Through Pre-scan, find the 1Mbps of rate of 802.11B at lowest channel is the worst case.
Final Test Mode:	Charge + Transmitting mode.
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass


Page: 12 of 83

#### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

#### Live Line:

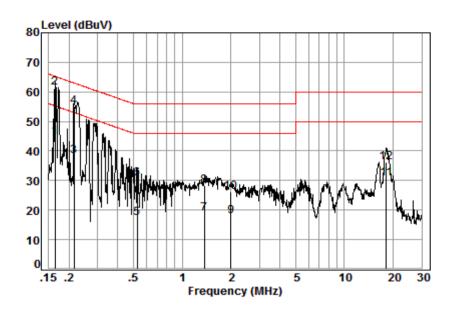

Site : Shielding Room

Condition: Line Job No. : 10005

Test mode: d


	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.16	0.01	9.66	35.02	44.69	55.25	-10.56	Average
2	0.16	0.01	9.66	51.68	61.35	65.25	-3.90	QP
3	0.22	0.03	9.66	28.56	38.25	53.01	-14.76	Average
4	0.22	0.03	9.66	45.28	54.97	63.01	-8.04	QP
5	0.53	0.06	9.67	7.51	17.24	46.00	-28.76	Average
6	0.53	0.06	9.67	20.85	30.58	56.00	-25.42	QP
7	1.37	0.12	9.73	9.12	18.97	46.00	-27.03	Average
8	1.37	0.12	9.73	18.56	28.41	56.00	-27.59	QP
9	1.99	0.16	9.72	7.97	17.85	46.00	-28.15	Average
10	1.99	0.16	9.72	16.21	26.09	56.00	-29.91	QP
11	18.14	0.23	10.16	20.36	30.75	50.00	-19.25	Average
12	18.14	0.23	10.16	25.76	36.15	60.00	-23.85	QP

Neutral Line:



Report No.: HR/2019/1000503

Page: 13 of 83

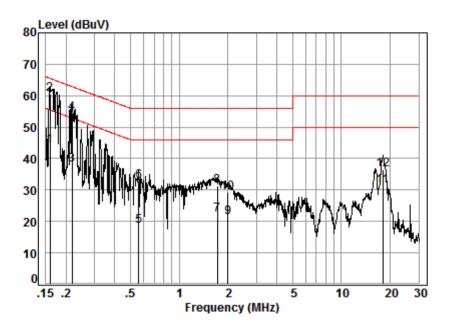

Site : Shielding Room

Condition: Neutral Job No. : 10005

Test mode: d

	Freq	Cable Loss dB	LISN Factor	Read Level dBuV	Level	Limit Line dBuV	Over Limit ———————————————————————————————————	Remark
1 2 3	0.16 0.16 0.22	0.01 0.01 0.03	9.63 9.63 9.64	34.44 50.87 28.33	44.08 60.51 38.00	65.52 52.88	-5.01 -14.88	Average
4 5 6 7	0.22 0.56 0.56 1.72	0.03 0.07 0.07 0.14	9.64 9.64 9.64 9.70	44.89 8.88 23.28 12.52	54.56 18.59 32.99	46.00 56.00	-23.01	Average QP
8 9 10	1.72 1.72 2.00 2.00	0.14 0.16 0.16	9.70 9.69 9.69	21.61 11.41 19.29	22.36 31.45 21.26 29.14	56.00 46.00	-24.55	Average
11 12	18.04 18.04	0.23 0.23	10.20	20.82	31.25 36.45	50.00		Average

#### Remarks:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

Page: 14 of 83

# 4.3 Duty Cycle


#### 4.3.1 Test Results

Test Mode	TX Freq. [MHz]	Duty cycle [%]
11B	Ant 1: CH1,CH6,CH11	97.80
11G	Ant 1: CH1,CH6,CH11	86.86
11N20	Ant 1: CH1,CH6,CH11	86.10

#### 4.3.1 Test Plots

#### 4.3.1.1 ANT1

#### 4.3.1.1.1 11B

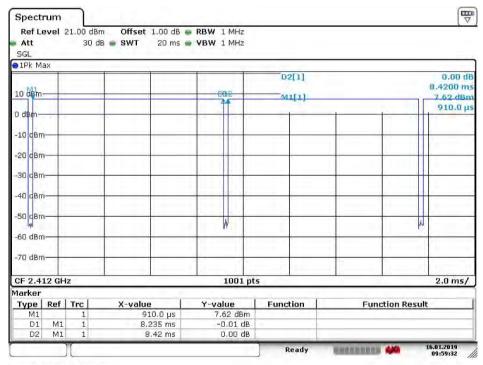


Date: 16.JAN.2019 09:59:32

Report No.: HR/2019/1000503


Page: 15 of 83

#### 4.3.1.1.2 11G

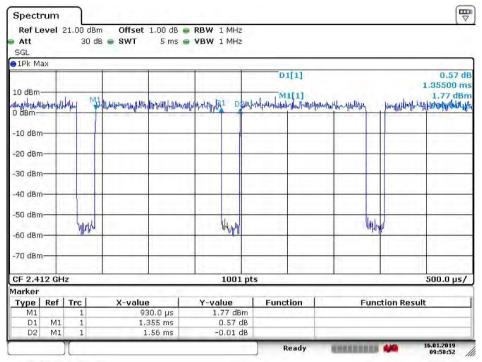

Date: 16.JAN.2019 09:58:53

#### 4.3.1.1.3 11N20

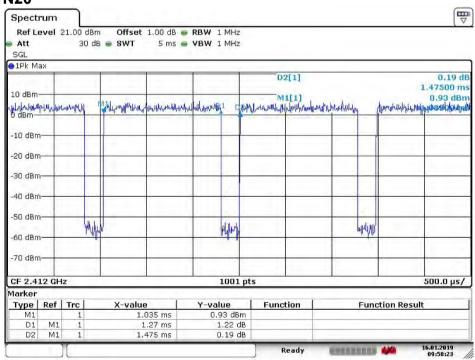

Date: 16.JAN.2019 09:58:23


# 4.4 Conducted Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
-------------------	---------------------------------------

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms

Report No.: HR/2019/1000503

Page: 16 of 83

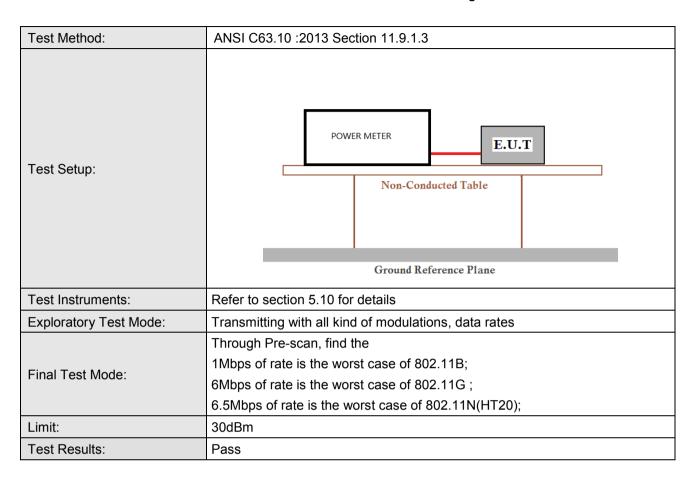

Page: 17 of 83

#### 4.4.1 Test Results

**Measurement Data of Average Power:** 


Mode	Test Channel	Average Output Power (dBm)	Result
	Lowest	12.36	Report purpose only
802.11B	Middle	13.43	Report purpose only
002.112	Highest	13.52	Report purpose only
	Lowest	11.69	Report purpose only
802.11G	Middle	12.57	Report purpose only
002.770	Highest	12.83	Report purpose only
	Lowest	11.50	Report purpose only
802.11N20	Middle	12.42	Report purpose only
	Highest	12.34	Report purpose only

#### Measurement Data of Peak Power:

Mode	Test Channel	Peak Output Power (dBm)	Limit (dBm)	Result
	Lowest	17.56	30.00	Pass
802.11B	Middle	19.08	30.00	Pass
002.115	Highest	18.37	30.00	Pass
	Lowest	21.18	30.00	Pass
802.11G	Middle	22.32	30.00	Pass
002.110	Highest	21.86	30.00	Pass
	Lowest	21.25	30.00	Pass
802.11N20	Middle	22.62	30.00	Pass
002.111120	Highest	22.27	30.00	Pass

Page: 18 of 83

# 4.5 DTS (6 dB) Bandwidth & 99% Occupied Bandwidth

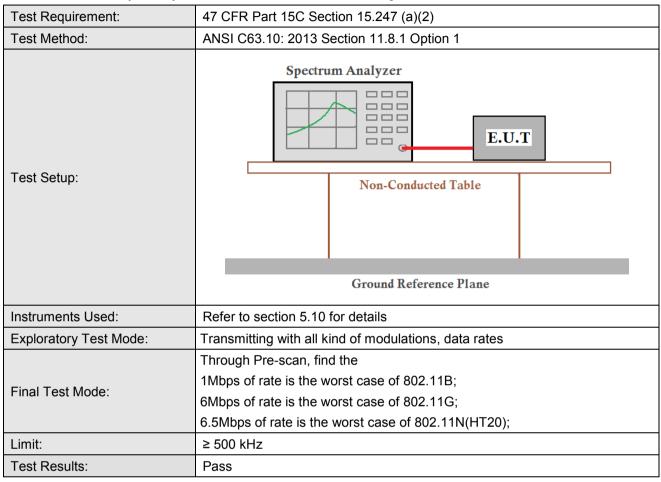

#### 4.5.1 Test Results


Mode	Test Channel	Occupied Bandwidth (MHz)	6dB Emission Bandwidth (MHz)	Limit (kHz)	Result
	Lowest	13.277	8.092	≥500	Pass
802.11B	Middle	13.157	8.092	≥500	Pass
0022	Highest	13.247	9.051	≥500	Pass
	Lowest	16.843	16.244	≥500	Pass
802.11G	Middle	16.873	16.454	≥500	Pass
3323	Highest	16.843	16.394	≥500	Pass
	Lowest	17.952	17.383	≥500	Pass
802.11N20	Middle	17.952	17.682	≥500	Pass
33=17111	Highest	17.922	17.592	≥500	Pass

Page: 19 of 83


### 4.5.2 Test plots

#### 4.5.2.1 ANT1

### 4.5.2.1.1 802.11B Lowest Channel

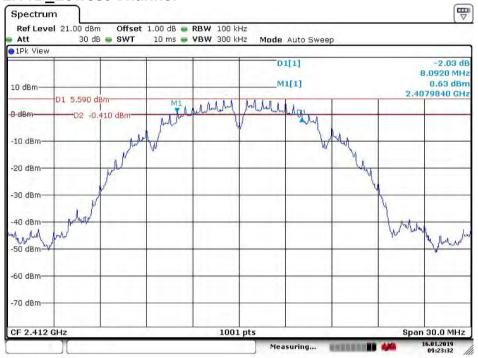



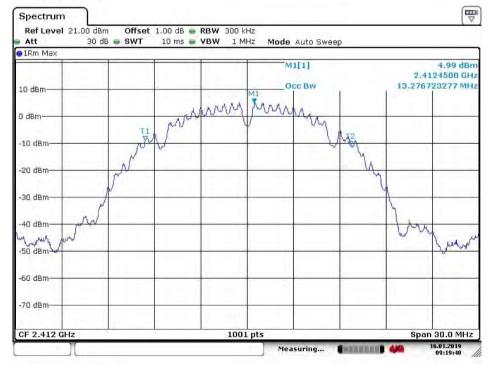


Date: 16.JAN.2019 09:19:41

Page: 20 of 83

#### 4.5.2.1.2 802.11B Middle Channel




Date: 16.JAN.2019 09:24:35

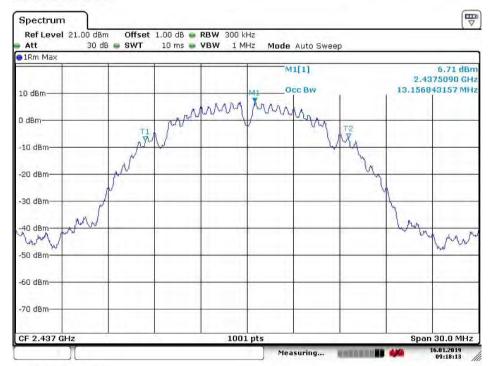


Date: 16.JAN.2019 09:18:13

Page: 21 of 83

### 4.5.2.1.3 802.11B Highest Channel

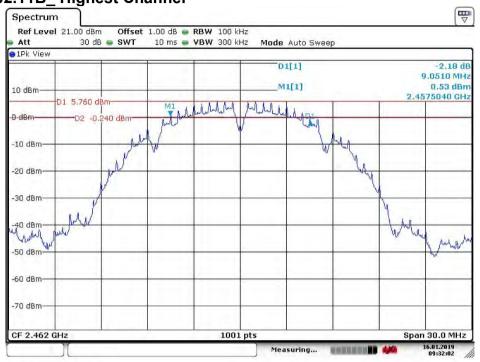



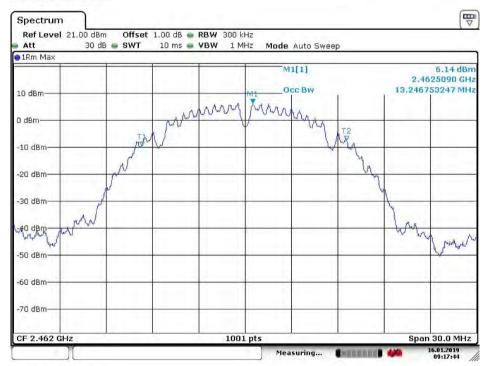


Date: 16.JAN.2019 09:17:44


Report No.: HR/2019/1000503

Page: 22 of 83

### 4.5.2.1.4 802.11G Lowest Channel

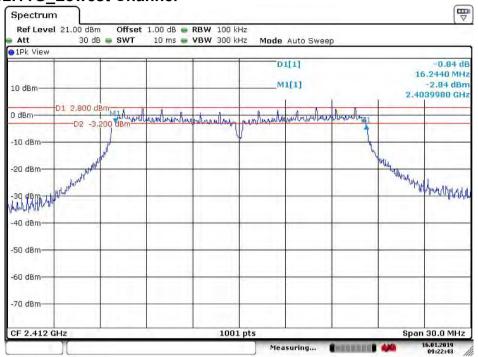

Date: 16.JAN.2019 09:22:44

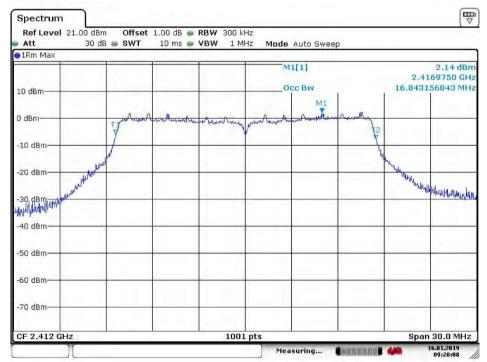


Date: 16.JAN.2019 09:20:08


Report No.: HR/2019/1000503

Page: 23 of 83

#### 4.5.2.1.5 802.11G Middle Channel

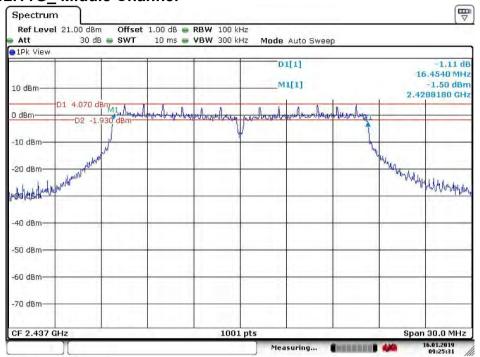

Date: 16.JAN.2019 09:25:32

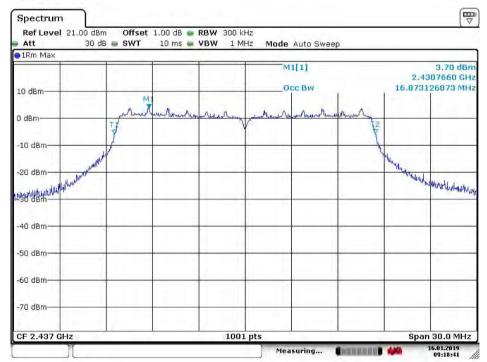


Date: 16.JAN.2019 09:18:41


Report No.: HR/2019/1000503

Page: 24 of 83

### 4.5.2.1.6 802.11G Highest Channel

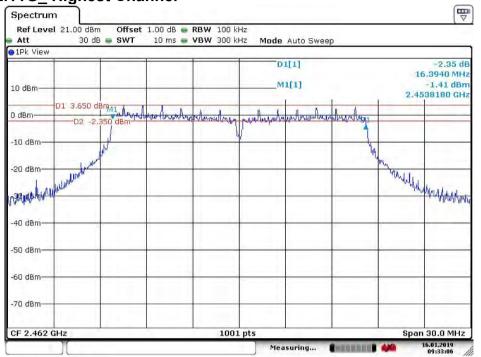

Date: 16.JAN.2019 09:33:06

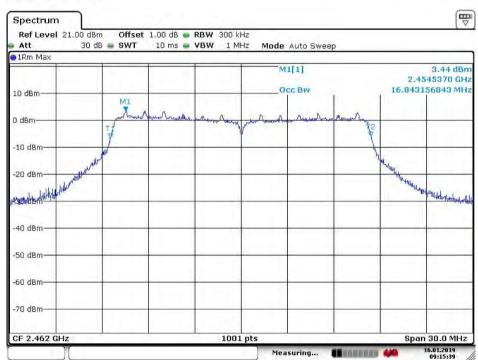


Date: 16.JAN.2019 09:15:40


Report No.: HR/2019/1000503

Page: 25 of 83

#### 4.5.2.1.7 802.11N20 Lowest Channel

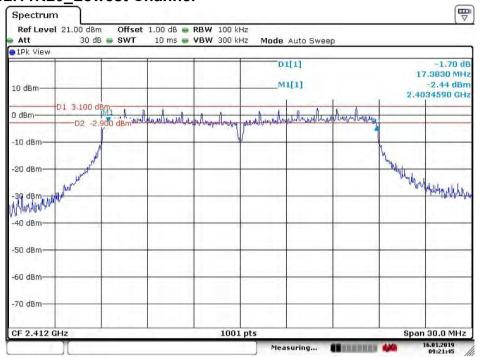

Date: 16.JAN.2019 09:21:46

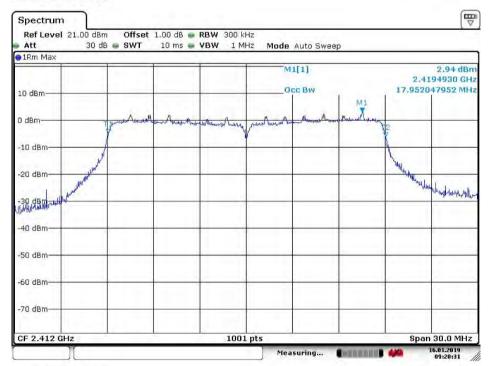


Date: 16.JAN.2019 09:20:32


Report No.: HR/2019/1000503

Page: 26 of 83

#### 4.5.2.1.8 802.11 N20 Middle Channel

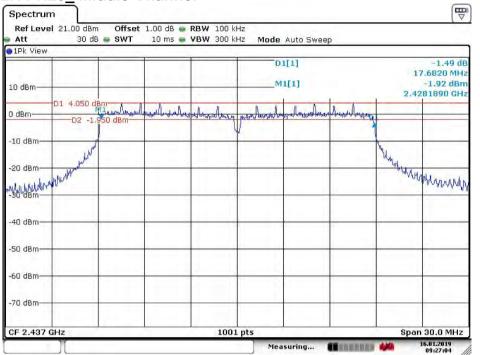


Date: 16.JAN.2019 09:27:04

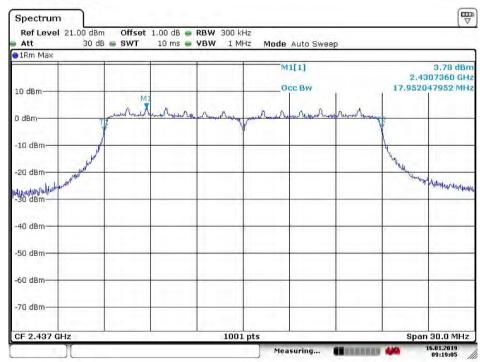


Date: 16.JAN.2019 09:19:06

Page: 27 of 83

# 4.5.2.1.9 802.11 N20\_ Highest Channel

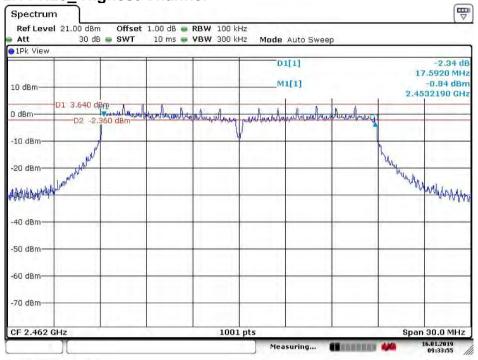


Date: 16.JAN.2019 09:33:55

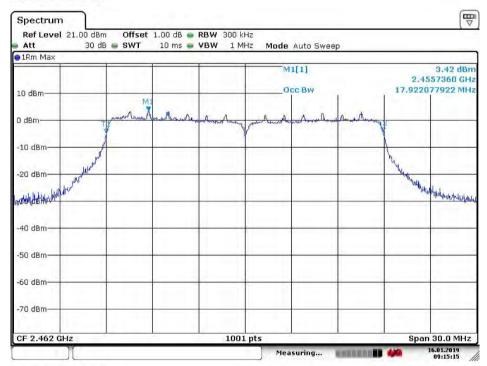

Date: 16.JAN.2019 09:15:15

Page: 28 of 83

# 4.6 Power Spectral Density

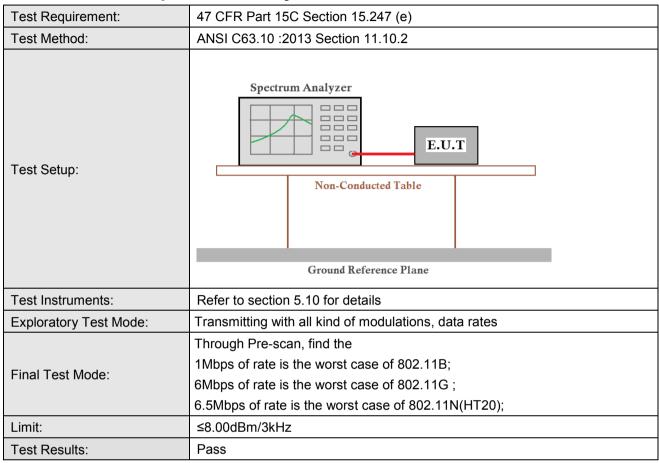

#### 4.6.1 Test Results

Mode	Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
	Lowest	-7.96	≤8.00	Pass
802.11B	Middle	-6.51	≤8.00	Pass
3022	Highest	-7.02	≤8.00	Pass
	Lowest	-9.71	≤8.00	Pass
802.11G	Middle	-9.24	≤8.00	Pass
	Highest	-9.22	≤8.00	Pass
	Lowest	-10.30	≥8.00	Pass
802.11N20	Middle	-8.58	≤8.00	Pass
	Highest	-9.02	≤8.00	Pass

Report No.: HR/2019/1000503

Page: 29 of 83

#### 4.6.2 Test plots

#### 4.6.2.1 ANT1

#### 4.6.2.1.1 802.11B Lowest Channel



Date: 16.JAN.2019 09:37:40

Page: 30 of 83

#### 4.6.2.1.2 802.11B Middle Channel



Date: 16.JAN.2019 09:36:06


### 4.6.2.1.3 802.11B Highest Channel



4.6.2.1.4 802.11G\_Lowest Channel


Report No.: HR/2019/1000503

Page: 31 of 83

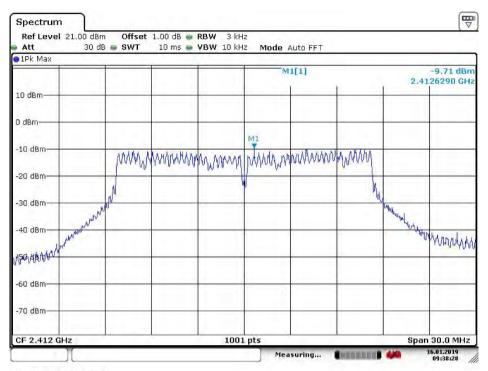

Date: 16.JAN.2019 09:38:29

### 4.6.2.1.5 802.11G\_ Middle Channel

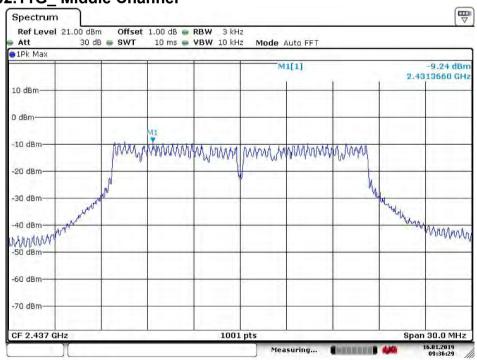


Date: 16.JAN.2019 09:36:29

#### 4.6.2.1.6 802.11G Highest Channel




Report No.: HR/2019/1000503

Page: 32 of 83

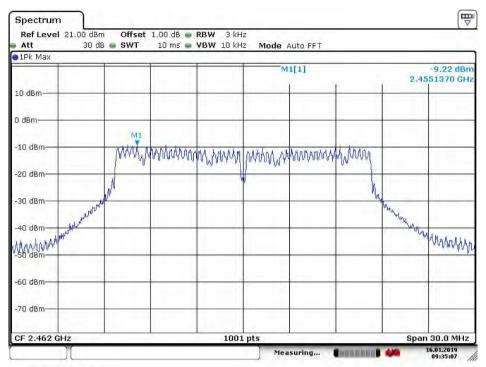

Date: 16.JAN.2019 09:35:08

# 4.6.2.1.7 802.11N20\_Lowest Channel

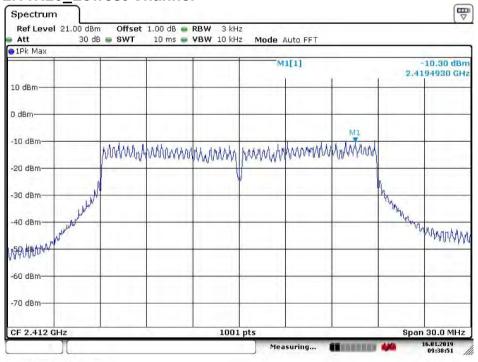


Date: 16.JAN.2019 09:38:52

#### 4.6.2.1.8 802.11 N20 Middle Channel


Report No.: HR/2019/1000503

Page: 33 of 83

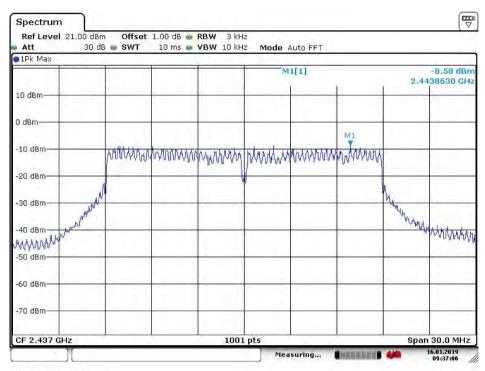

Date: 16.JAN.2019 09:37:06


## 4.6.2.1.9 802.11 N20\_ Highest Channel

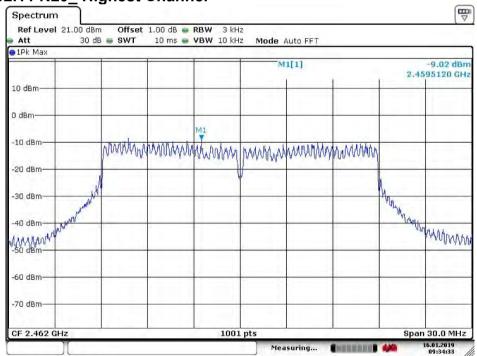

Date: 16.JAN.2019 09:34:33

Page: 34 of 83

# 4.7 Band-edge for RF Conducted Emissions

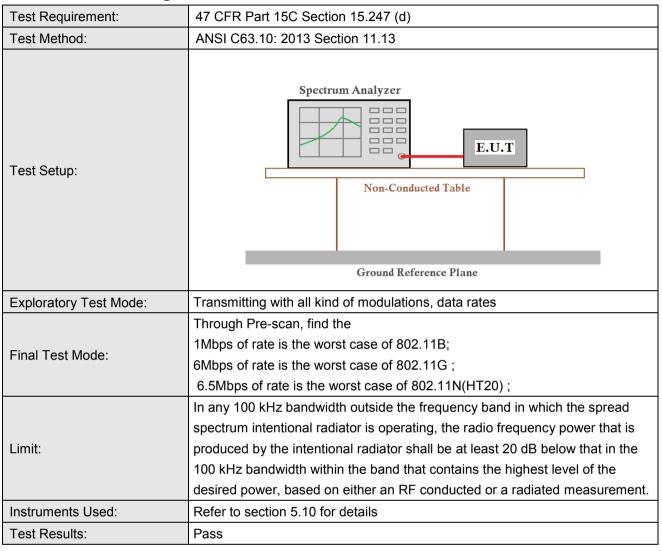


Report No.: HR/2019/1000503

Page: 35 of 83

## 4.7.1 Test plots

#### 4.7.1.1 ANT1

### 4.7.1.1.1 802.11B Lowest Channel

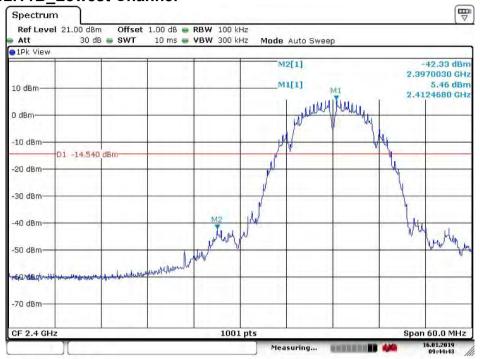

Date: 16.JAN.2019 09:44:44


Page: 36 of 83

# 4.7.1.1.2 802.11B\_ Highest Channel



Date: 16.JAN.2019 09:45:41

### 4.7.1.1.3 802.11G Lowest Channel

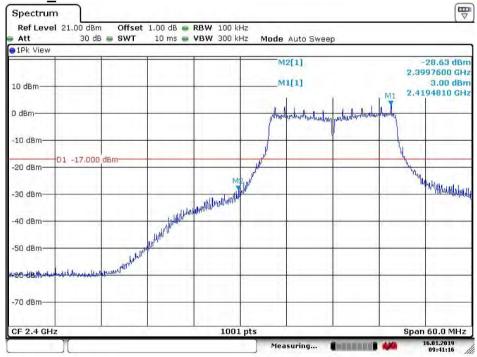


Date: 16.JAN.2019 09:41:17

## 4.7.1.1.4 802.11G\_ Highest Channel


Report No.: HR/2019/1000503

Page: 37 of 83

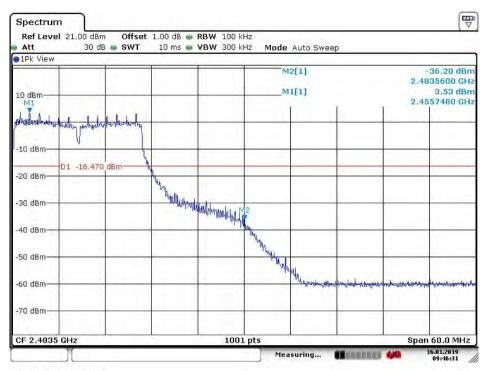

Date: 16.JAN.2019 09:46:31

### 4.7.1.1.5 802.11N20\_Lowest Channel

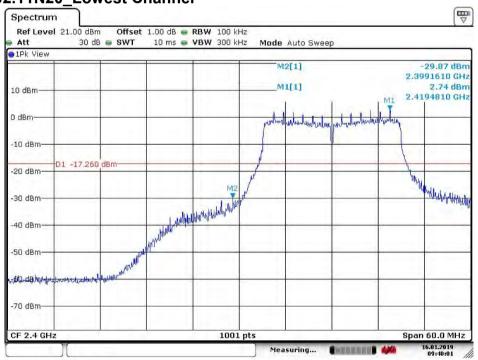


Date: 16.JAN.2019 09:40:01

### 4.7.1.1.6 802.11 N20 Highest Channel



Report No.: HR/2019/1000503

Page: 38 of 83

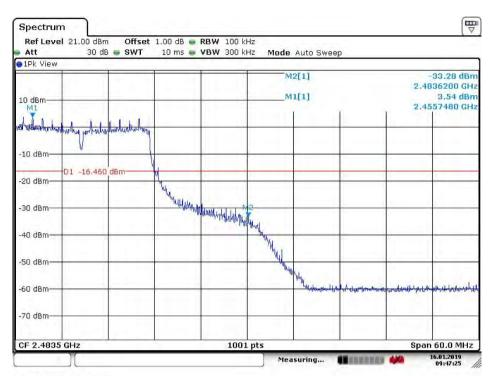


Date: 16.JAN.2019 09:47:26

Report No.: HR/2019/1000503

Page: 39 of 83

### 4.8 RF Conducted Spurious Emissions

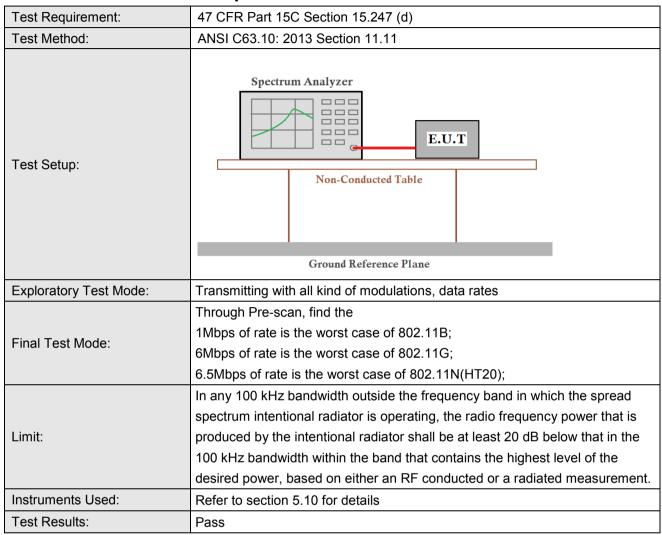


Report No.: HR/2019/1000503

Page: 40 of 83

### 4.8.1 Test plots

#### 4.8.1.1 ANT1

### 4.8.1.1.1 802.11B Lowest Channel

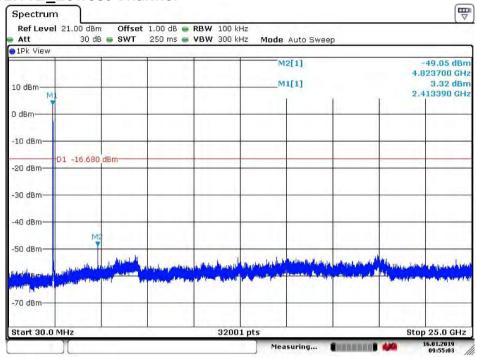


Date: 16.JAN.2019 09:55:03

Report No.: HR/2019/1000503


Page: 41 of 83

#### 4.8.1.1.2 802.11B Middle Channel

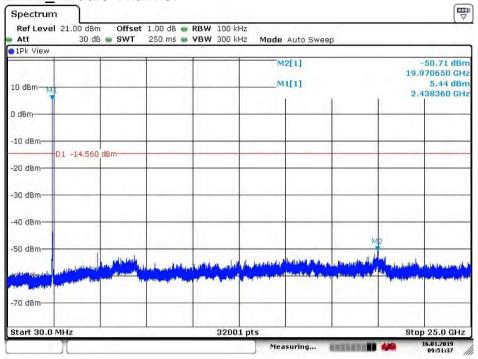

Date: 16.JAN.2019 09:51:37

### 4.8.1.1.3 802.11B Highest Channel

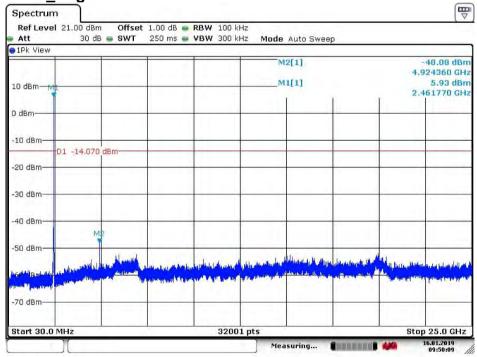

Date: 16.JAN.2019 09:50:09


### 4.8.1.1.4 802.11G Lowest Channel

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms




Report No.: HR/2019/1000503

Page: 42 of 83

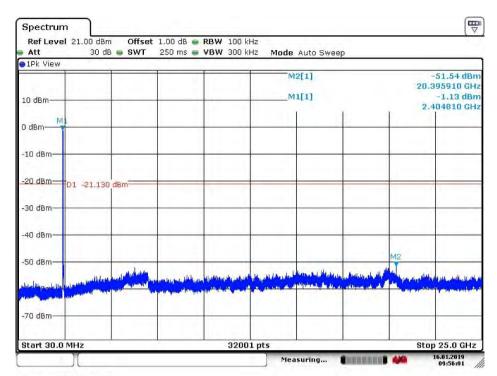

Date: 16.JAN.2019 09:56:01

### 4.8.1.1.5 802.11G\_ Middle Channel

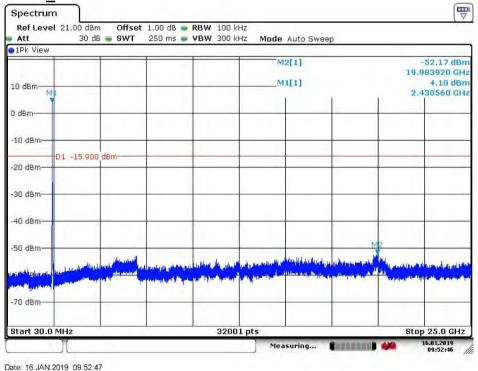


4.8.1.1.6 802.11G\_ Highest Channel




Report No.: HR/2019/1000503

Page: 43 of 83

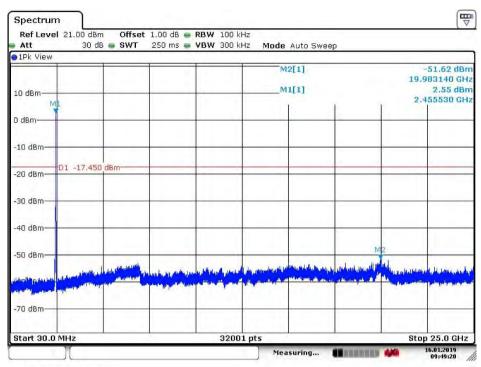

Date: 16.JAN.2019 09:49:21

#### 4.8.1.1.7 802.11N20 Lowest Channel

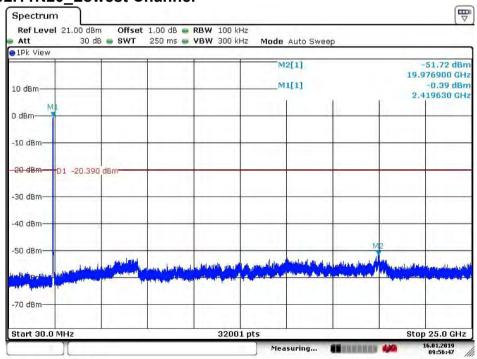


Date: 16.JAN.2019 09:56:48

### 4.8.1.1.8 802.11 N20\_ Middle Channel


Report No.: HR/2019/1000503

Page: 44 of 83

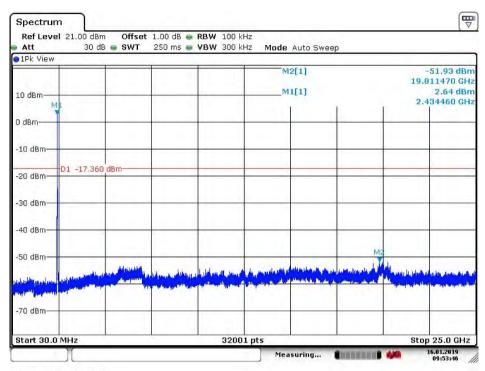

Date: 16.JAN.2019 09:53:46

### 4.8.1.1.9 802.11 N20\_ Highest Channel

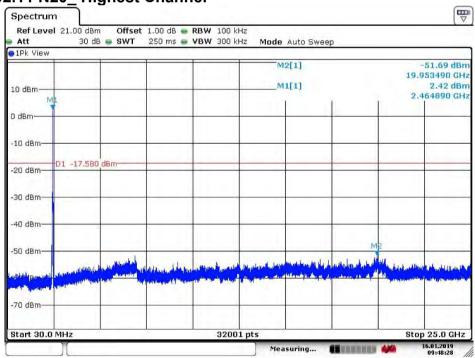

Date: 16.JAN.2019 09:48:28

#### Remark:

Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms

Report No.: HR/2019/1000503

Page: 45 of 83

### 4.9 Radiated Spurious Emissions


Test Requirement:	47 CFR Part 15C Section	on 15.209 and 15.2	205		
Test Method:	ANSI C63.10 :2013 See	ction 11.12			
Test Site:	Measurement Distance	: 3m or 10m (Semi	-Anechoic Cham	ber)	
	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
Deseiver Ceture	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
Receiver Setup:	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1CHz	Peak	1MHz	3MHz	Peak
	Above 1GHz	Peak	1MHz	10Hz	Average
	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
Limit:	88MHz-216MHz	150	43.5	Quasi-peak	3
Liiiit.	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Remark: 15.35(b), Unle	ess otherwise speci	fied, the limit on	peak radio fred	quency
	emissions is 20dB abov	ve the maximum pe	ermitted average	emission limit	
	applicable to the equ emission level radiated		. This peak lim	it applies to	the total peak

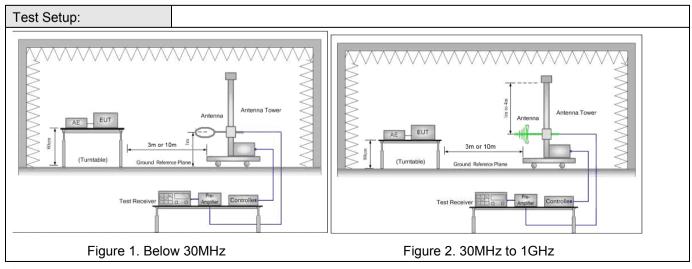

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms

Report No.: HR/2019/1000503

Page: 46 of 83

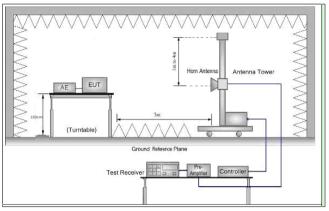

Test Receiver Pre- Amplifer Controller					
Figure 3. Above 1 GHz					
a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.					
b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation					
c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.					
d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.					
e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.					
f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.					
g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
h. Test the EUT in the lowest channel, the middle channel ,the Highest channel					
i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.					
j. Repeat above procedures until all frequencies measured was complete.					
Transmitting with all kind of modulations, data rates.					
Charge + Transmitting mode.					
Pretest the EUT at Charge + Transmitting mode.					
Through Pre-scan, find the					
1Mbps of rate is the worst case of 802.11B;					
6Mbps of rate is the worst case of 802.11G;					
6.5Mbps of rate is the worst case of 802.11N(HT20);					
For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11B at lowest channel is the worst case. Only the worst case is recorded in the report.					

Report No.: HR/2019/1000503

Page: 47 of 83


Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Report No.: HR/2019/1000503

Page: 48 of 83

#### 4.9.1 Radiated emission below 1GHz

### 4.9.1.1 Charge + Transmitting, Vertical

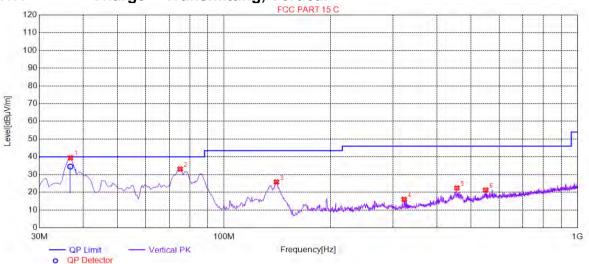


Suspe	Suspected List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	36.7934	39.43	-32.19	40.00	0.57	100	94	Vertical				
2	75.1276	33.13	-35.04	40.00	6.87	100	109	Vertical				
3	140.6353	25.80	-35.18	43.50	17.70	100	87	Vertical				
4	323.0865	15.97	-27.18	46.00	30.03	100	248	Vertical				
5	455.5578	22.38	-23.72	46.00	23.62	100	157	Vertical				
6	549.6948	21.29	-21.46	46.00	24.71	100	31	Vertical				

Report No.: HR/2019/1000503

Page: 49 of 83

### 4.9.1.2 Charge + Transmitting, Horizontal

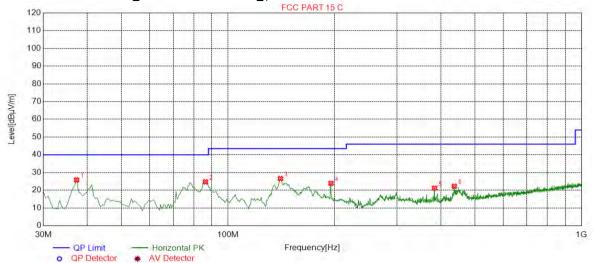

Suspe	Suspected List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	37.2786	25.80	-32.03	40.00	14.20	200	344	Horizontal				
2	86.2881	24.72	-34.32	40.00	15.28	200	177	Horizontal				
3	140.6353	26.58	-35.18	43.50	16.92	200	240	Horizontal				
4	195.4677	23.93	-31.29	43.50	19.57	100	302	Horizontal				
5	383.7419	21.23	-25.41	46.00	24.77	100	309	Horizontal				
6	436.6333	22.24	-24.12	46.00	23.76	200	240	Horizontal				


Report No.: HR/2019/1000503

Page: 50 of 83

#### 4.9.2 Transmitter emission above 1GHz

#### 4.9.2.1 ANT1


### 4.9.2.1.1 802.11B\_Lowest Channel\_ Peak\_ Vertical FCC PART 15 C

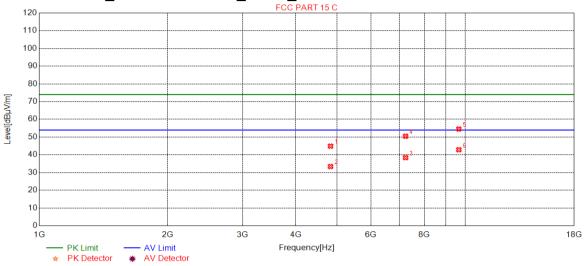

Suspe	Suspected List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	4824.0000	44.90	7.37	74.00	29.10	150	350	Vertical				
2	4824.0000	33.40	7.37	54.00	20.60	150	138	Vertical				
3	7236.0000	38.40	14.07	54.00	15.60	150	254	Vertical				
4	7236.0000	50.50	14.07	74.00	23.50	150	148	Vertical				
5	9648.0000	54.55	17.97	74.00	19.45	150	5	Vertical				
6	9648.0000	42.87	17.97	54.00	11.13	150	142	Vertical				

Report No.: HR/2019/1000503

51 of 83 Page:

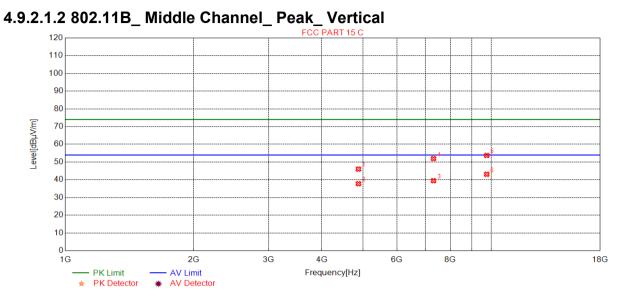


Ouspi	ecteu List											
Suspected List												
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	4874.0000	46.03	7.50	74.00	27.97	150	148	Vertical				
2	4874.6875	37.78	7.50	54.00	16.22	150	148	Vertical				
3	7311.0000	39.47	14.29	54.00	14.53	150	244	Vertical				
4	7311.0000	51.96	14.29	74.00	22.04	150	341	Vertical				
5	9748.0000	53.72	18.25	74.00	20.28	150	176	Vertical				
6	9748.0000	43.09	18.25	54.00	10.91	150	176	Vertical				

Report No.: HR/2019/1000503

Page: 52 of 83

### 4.9.2.1.3 802.11B\_ Highest Channel\_ Peak\_ Vertical

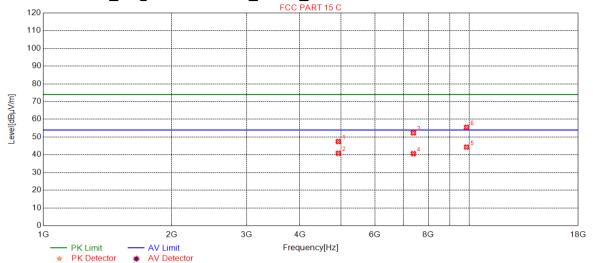


Cuop	ootou Liot												
Susp	Suspected List												
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity					
1	4924.1924	47.48	7.64	74.00	26.52	150	129	Vertical					
2	4924.6925	40.85	7.64	54.00	13.15	150	148	Vertical					
3	7386.0000	52.34	14.54	74.00	21.66	150	292	Vertical					
4	7386.0000	40.65	14.54	54.00	13.35	150	186	Vertical					
5	9848.0000	44.34	18.80	54.00	9.66	150	209	Vertical					
6	9848.0000	55.50	18.80	74.00	18.50	150	346	Vertical					

Report No.: HR/2019/1000503

Page: 53 of 83

### 4.9.2.1.4 802.11B\_Lowest Channel\_ Peak\_ Horizontal

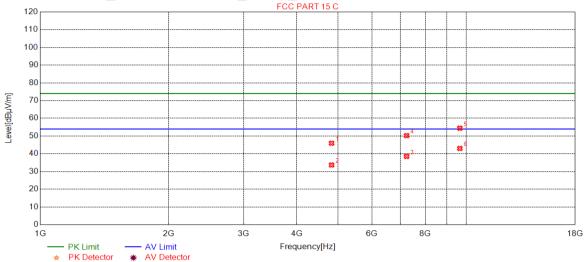


- Cuop	Odopotica List											
Suspected List												
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	4824.0000	45.95	7.37	74.00	28.05	150	183	Horizontal				
2	4824.0000	33.67	7.37	54.00	20.33	150	241	Horizontal				
3	7236.0000	38.53	14.07	54.00	15.47	150	327	Horizontal				
4	7236.0000	50.26	14.07	74.00	23.74	150	299	Horizontal				
5	9648.0000	54.44	17.97	74.00	19.56	150	269	Horizontal				
6	9648.0000	43.02	17.97	54.00	10.98	150	286	Horizontal				

Report No.: HR/2019/1000503

Page: 54 of 83

### 4.9.2.1.5 802.11B\_ Middle Channel\_ Peak\_ Horizontal

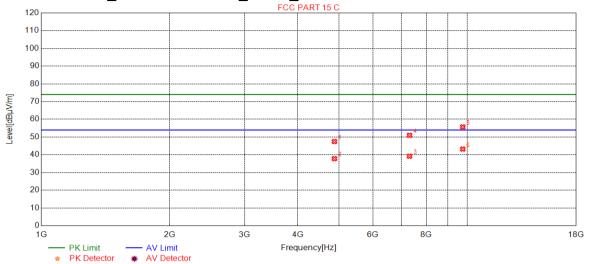


<u> Cusp</u>	cotca List											
Suspected List												
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	4874.0000	47.50	7.50	74.00	26.50	150	240	Horizontal				
2	4874.0000	37.81	7.50	54.00	16.19	150	164	Horizontal				
3	7311.0000	39.19	14.29	54.00	14.81	150	183	Horizontal				
4	7311.0000	50.98	14.29	74.00	23.02	150	164	Horizontal				
5	9748.0000	55.72	18.25	74.00	18.28	150	337	Horizontal				
6	9748.0000	43.22	18.25	54.00	10.78	150	14	Horizontal				

Report No.: HR/2019/1000503

Page: 55 of 83

### 4.9.2.1.6 802.11B\_ Highest Channel\_ Peak\_ Horizontal

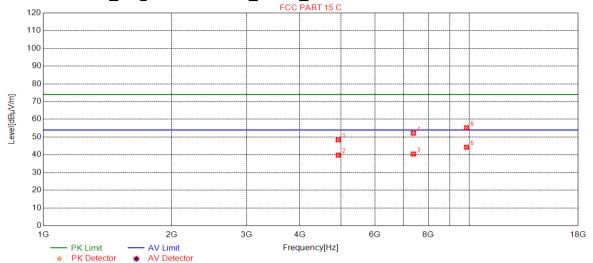


<u> </u>	JOIG LIGE											
Suspected List												
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	4923.6924	48.41	7.64	74.00	25.59	150	154	Horizontal				
2	4924.6925	39.80	7.64	54.00	14.20	150	164	Horizontal				
3	7386.0000	40.43	14.54	54.00	13.57	150	193	Horizontal				
4	7386.0000	52.19	14.54	74.00	21.81	150	58	Horizontal				
5	9848.0000	44.25	18.80	54.00	9.75	150	133	Horizontal				
6	9848.0000	55.25	18.80	74.00	18.75	150	82	Horizontal				

Report No.: HR/2019/1000503

Page: 56 of 83


### 4.9.2.1.7 802.11G\_Lowest Channel\_ Peak\_ Vertical

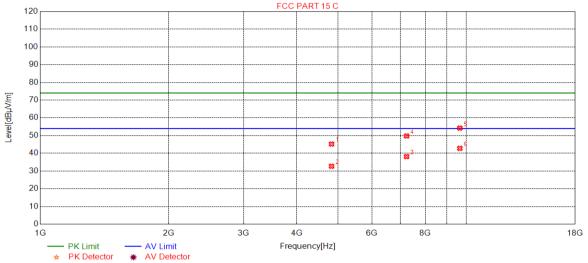

Suspe	Suspected List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	4824.0000	45.21	7.37	74.00	28.79	150	81	Vertical				
2	4824.0000	32.70	7.37	54.00	21.30	150	52	Vertical				
3	7236.0000	38.15	14.07	54.00	15.85	150	206	Vertical				
4	7236.0000	49.77	14.07	74.00	24.23	150	42	Vertical				
5	9648.0000	54.21	17.97	74.00	19.79	150	91	Vertical				
6	9648.0000	42.79	17.97	54.00	11.21	150	278	Vertical				

Report No.: HR/2019/1000503

57 of 83 Page:

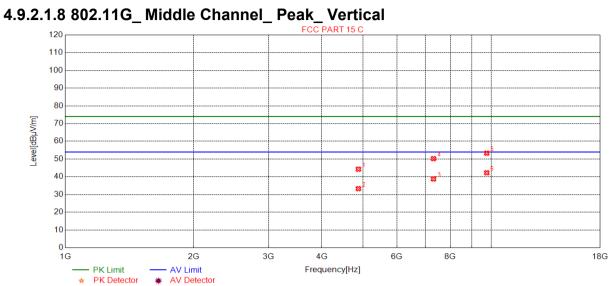


- C 0 C p .	Caopoctoa Liet									
Suspected List										
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	4874.0000	44.30	7.50	74.00	29.70	150	219	Vertical		
2	4874.0000	33.31	7.50	54.00	20.69	150	36	Vertical		
3	7311.0000	38.77	14.29	54.00	15.23	150	14	Vertical		
4	7311.0000	50.23	14.29	74.00	23.77	150	36	Vertical		
5	9748.0000	53.32	18.25	74.00	20.68	150	107	Vertical		
6	9748.0000	42.26	18.25	54.00	11.74	150	210	Vertical		

Report No.: HR/2019/1000503

Page: 58 of 83

### 4.9.2.1.9 802.11G\_ Highest Channel\_ Peak\_ Vertical

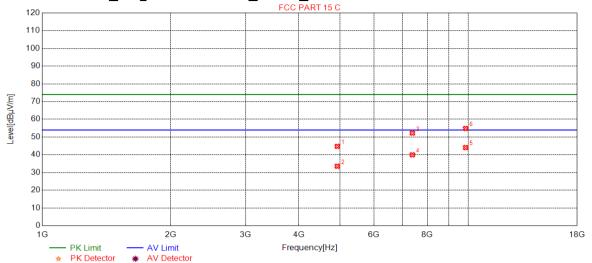


Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	4924.0000	44.75	7.64	74.00	29.25	150	71	Vertical		
2	4924.0000	33.54	7.64	54.00	20.46	150	148	Vertical		
3	7386.0000	52.23	14.54	74.00	21.77	150	215	Vertical		
4	7386.0000	39.98	14.54	54.00	14.02	150	321	Vertical		
5	9848.0000	44.08	18.80	54.00	9.92	150	141	Vertical		
6	9848.0000	54.83	18.80	74.00	19.17	150	35	Vertical		

Report No.: HR/2019/1000503

Page: 59 of 83

### 4.9.2.1.10 802.11G\_Lowest Channel\_ Peak\_ Horizontal

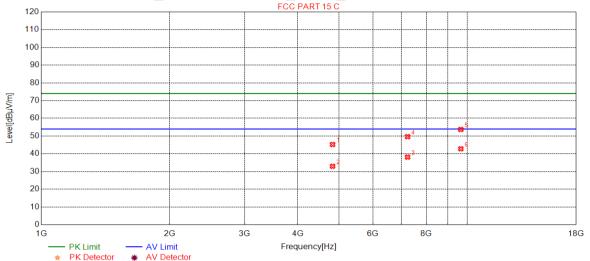


<u> </u>										
Susp	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	4824.0000	45.24	7.37	74.00	28.76	150	106	Horizontal		
2	4824.0000	32.95	7.37	54.00	21.05	150	144	Horizontal		
3	7236.0000	38.13	14.07	54.00	15.87	150	106	Horizontal		
4	7236.0000	49.66	14.07	74.00	24.34	150	87	Horizontal		
5	9648.0000	53.73	17.97	74.00	20.27	150	337	Horizontal		
6	9648.0000	42.81	17.97	54.00	11.19	150	132	Horizontal		

Report No.: HR/2019/1000503

Page: 60 of 83

### 4.9.2.1.11 802.11G\_ Middle Channel\_ Peak\_ Horizontal

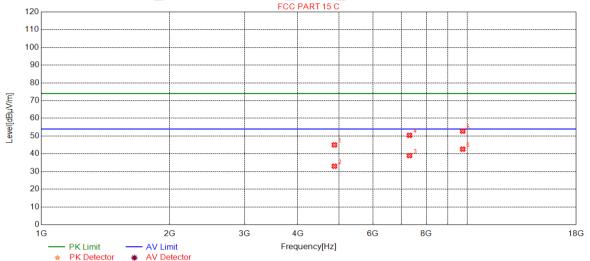


Cusp	Ouspected List									
Susp	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	4874.0000	45.00	7.50	74.00	29.00	150	29	Horizontal		
2	4874.0000	32.98	7.50	54.00	21.02	150	38	Horizontal		
3	7311.0000	38.96	14.29	54.00	15.04	150	115	Horizontal		
4	7311.0000	50.42	14.29	74.00	23.58	150	19	Horizontal		
5	9748.0000	52.77	18.25	74.00	21.23	150	14	Horizontal		
6	9748.0000	42.61	18.25	54.00	11.39	150	166	Horizontal		

Report No.: HR/2019/1000503

Page: 61 of 83

### 4.9.2.1.12 802.11G\_ Highest Channel\_ Peak\_ Horizontal

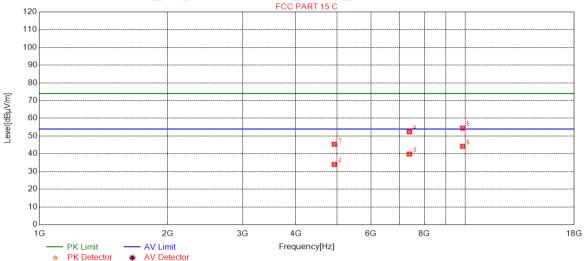


- С С.С р	oudpooled Elec									
Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	4924.0000	45.36	7.64	74.00	28.64	150	194	Horizontal		
2	4924.0000	33.98	7.64	54.00	20.02	150	204	Horizontal		
3	7386.0000	39.81	14.54	54.00	14.19	150	279	Horizontal		
4	7386.0000	52.39	14.54	74.00	21.61	150	279	Horizontal		
5	9848.0000	54.46	18.80	74.00	19.54	150	304	Horizontal		
6	9848.0000	44.24	18.80	54.00	9.76	150	14	Horizontal		

Report No.: HR/2019/1000503

Page: 62 of 83

### 4.9.2.1.13 802.11N20\_Lowest Channel\_ Peak\_ Vertical

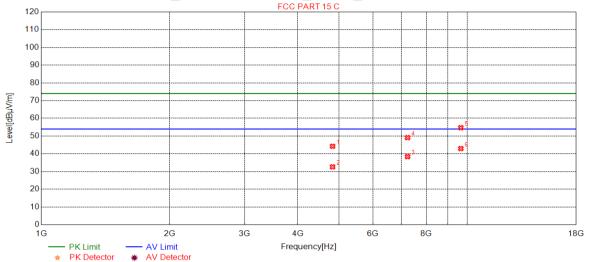


Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	4824.0000	44.24	7.37	74.00	29.76	150	81	Vertical		
2	4824.0000	32.64	7.37	54.00	21.36	150	245	Vertical		
3	7236.0000	38.38	14.07	54.00	15.62	150	14	Vertical		
4	7236.0000	49.12	14.07	74.00	24.88	150	158	Vertical		
5	9648.0000	54.71	17.97	74.00	19.29	150	244	Vertical		
6	9648.0000	42.95	17.97	54.00	11.05	150	312	Vertical		

Report No.: HR/2019/1000503

Page: 63 of 83

### 4.9.2.1.14 802.11N20\_ Middle Channel\_ Peak\_ Vertical

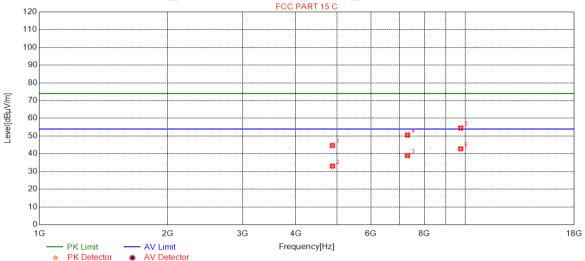


<del>Ousp.</del>	Guopeoteu Elot									
Susp	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	4874.0000	44.69	7.50	74.00	29.31	150	91	Vertical		
2	4874.0000	33.06	7.50	54.00	20.94	150	351	Vertical		
3	7311.0000	39.02	14.29	54.00	14.98	150	211	Vertical		
4	7311.0000	50.57	14.29	74.00	23.43	150	177	Vertical		
5	9748.0000	54.54	18.25	74.00	19.46	150	278	Vertical		
6	9748.0000	42.79	18.25	54.00	11.21	150	278	Vertical		

Report No.: HR/2019/1000503

Page: 64 of 83

### 4.9.2.1.15 802.11N20\_ Highest Channel\_ Peak\_ Vertical

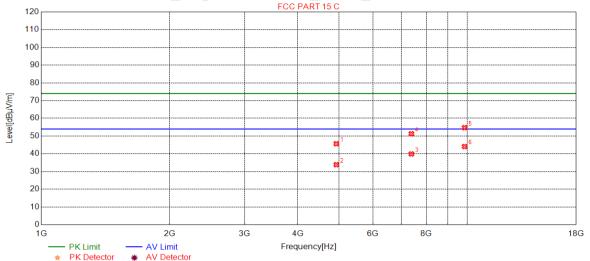


<u> </u>	Out botton List									
Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	4924.0000	45.64	7.64	74.00	28.36	150	14	Vertical		
2	4924.0000	33.84	7.64	54.00	20.16	150	143	Vertical		
3	7386.0000	39.91	14.54	54.00	14.09	150	105	Vertical		
4	7386.0000	51.29	14.54	74.00	22.71	150	206	Vertical		
5	9848.0000	54.73	18.80	74.00	19.27	150	240	Vertical		
6	9848.0000	44.08	18.80	54.00	9.92	150	18	Vertical		

Report No.: HR/2019/1000503

Page: 65 of 83

### 4.9.2.1.16 802.11N20\_Lowest Channel\_ Peak\_ Horizontal

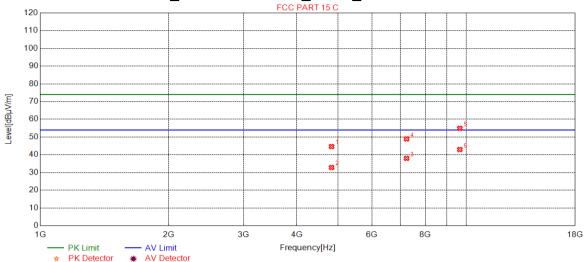


<u> </u>	Guopootou Elot									
Susp	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	4824.0000	44.66	7.37	74.00	29.34	150	24	Horizontal		
2	4824.0000	32.84	7.37	54.00	21.16	150	53	Horizontal		
3	7236.0000	38.00	14.07	54.00	16.00	150	279	Horizontal		
4	7236.0000	48.98	14.07	74.00	25.02	150	318	Horizontal		
5	9648.0000	54.93	17.97	74.00	19.07	150	286	Horizontal		
6	9648.0000	42.96	17.97	54.00	11.04	150	166	Horizontal		

Report No.: HR/2019/1000503

Page: 66 of 83

### 4.9.2.1.17 802.11N20\_ Middle Channel\_ Peak\_ Horizontal

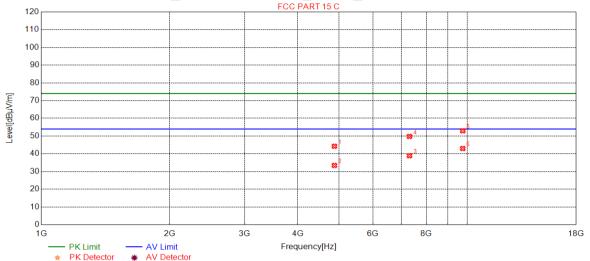


Susp	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	4874.0000	44.25	7.50	74.00	29.75	150	155	Horizontal		
2	4874.0000	33.43	7.50	54.00	20.57	150	19	Horizontal		
3	7311.0000	38.91	14.29	54.00	15.09	150	184	Horizontal		
4	7311.0000	49.80	14.29	74.00	24.20	150	97	Horizontal		
5	9748.0000	52.95	18.25	74.00	21.05	150	65	Horizontal		
6	9748.0000	42.98	18.25	54.00	11.02	150	134	Horizontal		



Report No.: HR/2019/1000503

Page: 67 of 83

### 4.9.2.1.18 802.11N20\_ Highest Channel\_ Peak\_ Horizontal

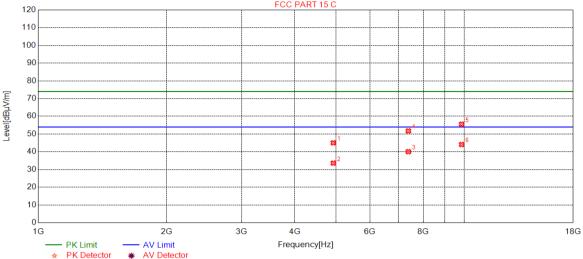

### **Suspected List**

Сиор	Guopottu List								
Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	4924.0000	45.04	7.64	74.00	28.96	150	163	Horizontal	
2	4924.0000	33.60	7.64	54.00	20.40	150	163	Horizontal	
3	7386.0000	40.06	14.54	54.00	13.94	150	1	Horizontal	
4	7386.0000	51.76	14.54	74.00	22.24	150	76	Horizontal	
5	9848.0000	55.57	18.80	74.00	18.43	150	64	Horizontal	
6	9848.0000	44.10	18.80	54.00	9.90	150	167	Horizontal	

#### Remark:


- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
  - Final Test Level =Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz and 18GHz to 25GHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.
- 4) All Modes have been tested, but only the worst case data displayed in this report.

Report No.: HR/2019/1000503

Page: 68 of 83

### 4.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2013 Sect	ANSI C63.10: 2013 Section 11.12								
Test Site:	Measurement Distance:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)								
	Frequency	Limit (dBuV/m @3m)	Remark							
	30MHz-88MHz	40.0	Quasi-peak Value							
	88MHz-216MHz	43.5	Quasi-peak Value							
Limit:	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.0	Quasi-peak Value							
	Above 4CH=	54.0	Average Value							
	Above 1GHz	74.0	Peak Value							
Test Setup:										

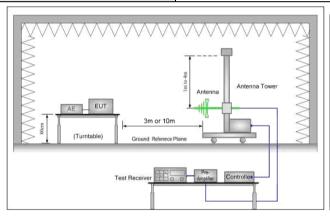

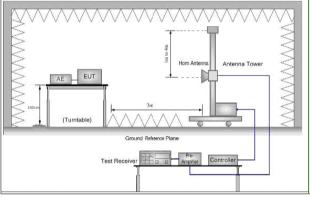


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: HR/2019/1000503

Page: 69 of 83

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.  b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.  c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.  d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.  e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.  f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.  g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel  h. Test the EUT in the lowest channel , the Highest channel  i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.  j. Repeat above procedures until all frequencies measured was complete.  Exploratory Test Mode:  Transmitting with all kind of modulations, data rates.  Charge + Transmitting mode.  Transmitting with all kind of modulations, data rates.  Charge + Transmitting mode.  Transmitting with all kind of modulations, data rates.  Charge + Transmitting mode.  Transmitting with all kind of modulations, data rates.  Charge		
meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.  c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.  d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.  e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and then the antenna was turned from 0 degrees to 360 degrees to find the maximum reading.  f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.  g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel  h. Test the EUT in the lowest channel, the Highest channel  i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case.  j. Repeat above procedures until all frequencies measured was complete.  Exploratory Test Mode:  Transmitting with all kind of modulations, data rates.  Charge + Transmitting mode.  Pretest the EUT at Charge + Transmitting mode.  Through Pre-scan, find the  1Mbps of rate is the worst case of 802.11B;  6Mbps of rate is the worst case of 802.11G;  6.5Mbps of rate is the worst case of 802.11N(HT20);  Only the worst case is recorded in the report.		meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the
antenna, which was mounted on the top of a variable-height antenna tower.  d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.  e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.  f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.  g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel  h. Test the EUT in the lowest channel, the Highest channel  i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.  j. Repeat above procedures until all frequencies measured was complete.  Exploratory Test Mode:  Transmitting with all kind of modulations, data rates.  Charge + Transmitting mode.  Transmitting mode.  Pretest the EUT at Charge + Transmitting mode.  Through Pre-scan, find the  1Mbps of rate is the worst case of 802.11B;  6Mbps of rate is the worst case of 802.11G;  6.5Mbps of rate is the worst case of 802.11N(HT20);  Only the worst case is recorded in the report.		meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest
ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.  e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was turned from 0 degrees to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.  f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.  g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel  h. Test the EUT in the lowest channel, the Highest channel  i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case.  j. Repeat above procedures until all frequencies measured was complete.  Exploratory Test Mode:  Transmitting with all kind of modulations, data rates.  Charge + Transmitting mode.  Pretest the EUT at Charge + Transmitting mode.  Through Pre-scan, find the  1Mbps of rate is the worst case of 802.11B;  6Mbps of rate is the worst case of 802.11G;  6.5Mbps of rate is the worst case of 802.11N(HT20);  Only the worst case is recorded in the report.  Instruments Used:  Refer to section 5.10 for details		antenna, which was mounted on the top of a variable-height antenna
and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.  f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.  g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel  h. Test the EUT in the lowest channel, the Highest channel  i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.  j. Repeat above procedures until all frequencies measured was complete.  Exploratory Test Mode:  Transmitting with all kind of modulations, data rates.  Charge + Transmitting mode.  Pretest the EUT at Charge +Transmitting mode.  Through Pre-scan, find the  1Mbps of rate is the worst case of 802.11B;  6Mbps of rate is the worst case of 802.11G;  6.5Mbps of rate is the worst case of 802.11N(HT20);  Only the worst case is recorded in the report.  Instruments Used:  Refer to section 5.10 for details		ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the
Specified Bandwidth with Maximum Hold Mode.  g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel  h. Test the EUT in the lowest channel, the Highest channel  i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.  j. Repeat above procedures until all frequencies measured was complete.  Transmitting with all kind of modulations, data rates.  Charge + Transmitting mode.  Pretest the EUT at Charge +Transmitting mode.  Through Pre-scan, find the  1Mbps of rate is the worst case of 802.11B;  6Mbps of rate is the worst case of 802.11G;  6.5Mbps of rate is the worst case of 802.11N(HT20);  Only the worst case is recorded in the report.  Instruments Used:  Refer to section 5.10 for details	Test Procedure:	and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to
frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel  h. Test the EUT in the lowest channel, the Highest channel  i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.  j. Repeat above procedures until all frequencies measured was complete.  Transmitting with all kind of modulations, data rates.  Charge + Transmitting mode.  Pretest the EUT at Charge +Transmitting mode.  Through Pre-scan, find the  1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G; 6.5Mbps of rate is the worst case of 802.11N(HT20); Only the worst case is recorded in the report.  Instruments Used:  Refer to section 5.10 for details		
i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case.  j. Repeat above procedures until all frequencies measured was complete.  Transmitting with all kind of modulations, data rates. Charge + Transmitting mode.  Pretest the EUT at Charge +Transmitting mode. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G; 6.5Mbps of rate is the worst case of 802.11N(HT20); Only the worst case is recorded in the report.  Instruments Used:  Refer to section 5.10 for details		frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each
for Transmitting mode,And found the X axis positioning which it is worse case.  j. Repeat above procedures until all frequencies measured was complete.  Transmitting with all kind of modulations, data rates. Charge + Transmitting mode.  Pretest the EUT at Charge +Transmitting mode. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G; 6.5Mbps of rate is the worst case of 802.11N(HT20); Only the worst case is recorded in the report.  Instruments Used:  Refer to section 5.10 for details		h. Test the EUT in the lowest channel , the Highest channel
complete.  Transmitting with all kind of modulations, data rates. Charge + Transmitting mode.  Pretest the EUT at Charge + Transmitting mode. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G; 6.5Mbps of rate is the worst case of 802.11N(HT20); Only the worst case is recorded in the report.  Instruments Used:  Refer to section 5.10 for details		for Transmitting mode, And found the X axis positioning which it is
Exploratory Test Mode:  Charge + Transmitting mode.  Pretest the EUT at Charge + Transmitting mode.  Through Pre-scan, find the  1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G; 6.5Mbps of rate is the worst case of 802.11N(HT20); Only the worst case is recorded in the report.  Instruments Used:  Refer to section 5.10 for details		1.5
Charge + Transmitting mode.  Pretest the EUT at Charge +Transmitting mode.  Through Pre-scan, find the  1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G; 6.5Mbps of rate is the worst case of 802.11N(HT20); Only the worst case is recorded in the report.  Instruments Used:  Refer to section 5.10 for details	Cymleretem: Teet Mede:	Transmitting with all kind of modulations, data rates.
Final Test Mode:  Through Pre-scan, find the  1Mbps of rate is the worst case of 802.11B;  6Mbps of rate is the worst case of 802.11G;  6.5Mbps of rate is the worst case of 802.11N(HT20);  Only the worst case is recorded in the report.  Instruments Used:  Refer to section 5.10 for details	Exploratory rest Mode:	Charge + Transmitting mode.
Final Test Mode:  1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G; 6.5Mbps of rate is the worst case of 802.11N(HT20); Only the worst case is recorded in the report.  Instruments Used:  Refer to section 5.10 for details		Pretest the EUT at Charge +Transmitting mode.
6Mbps of rate is the worst case of 802.11G; 6.5Mbps of rate is the worst case of 802.11N(HT20); Only the worst case is recorded in the report.  Instruments Used:  Refer to section 5.10 for details		Through Pre-scan, find the
6Mbps of rate is the worst case of 802.11G; 6.5Mbps of rate is the worst case of 802.11N(HT20); Only the worst case is recorded in the report.  Instruments Used: Refer to section 5.10 for details	Final Test Mode:	1Mbps of rate is the worst case of 802.11B;
Only the worst case is recorded in the report.  Refer to section 5.10 for details	i iiiai 165t Wioue.	6Mbps of rate is the worst case of 802.11G;
Instruments Used: Refer to section 5.10 for details		6.5Mbps of rate is the worst case of 802.11N(HT20);
		Only the worst case is recorded in the report.
Test Results: Pass	Instruments Used:	Refer to section 5.10 for details
	Test Results:	Pass


Report No.: HR/2019/1000503

Page: 70 of 83

#### Test plot as follows:

#### 4.10.1 ANT1

### 4.10.1.1 802.11B\_Lowest Channel\_Vertical

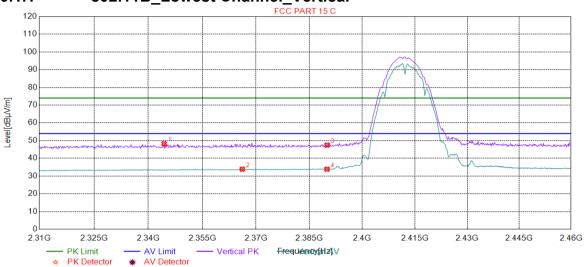


Suspe	Suspected List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	2344.3844	48.24	1.05	74.00	25.76	150	336	Vertical				
2	2366.1562	33.87	1.14	54.00	20.13	150	28	Vertical				
3	2390.0000	47.43	1.25	74.00	26.57	150	304	Vertical				
4	2390.0000	33.86	1.25	54.00	20.14	150	293	Vertical				

Report No.: HR/2019/1000503

Page: 71 of 83

### 4.10.1.2 802.11B\_ Highest Channel\_Vertical

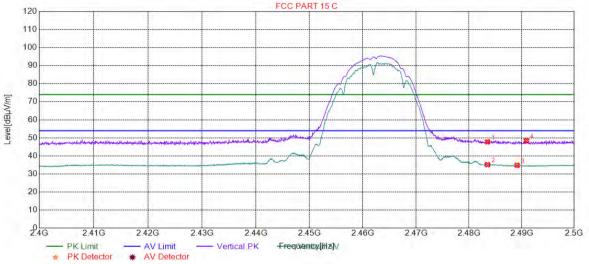


- Cuop	cotca List											
Susp	Suspected List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	2483.5000	47.78	1.52	74.00	26.22	150	154	Vertical				
2	2483.5000	35.16	1.52	54.00	18.84	150	41	Vertical				
3	2489.0945	34.82	1.54	54.00	19.18	150	166	Vertical				
4	2490.8954	48.49	1.54	74.00	25.51	150	275	Vertical				



Report No.: HR/2019/1000503

Page: 72 of 83

### 4.10.1.3 802.11B\_Lowest Channel\_ Horizontal

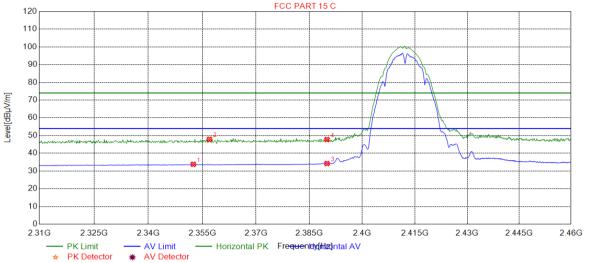


Susp	ected List										
Suspected List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2352.4925	33.78	1.08	54.00	20.22	150	345	Horizontal			
2	2356.9970	47.91	1.10	74.00	26.09	150	318	Horizontal			
3	2390.0000	34.21	1.25	54.00	19.79	150	255	Horizontal			
4	2390.0000	47.74	1.25	74.00	26.26	150	360	Horizontal			



Report No.: HR/2019/1000503

Page: 73 of 83

### 4.10.1.4 802.11B\_ Highest Channel\_ Horizontal

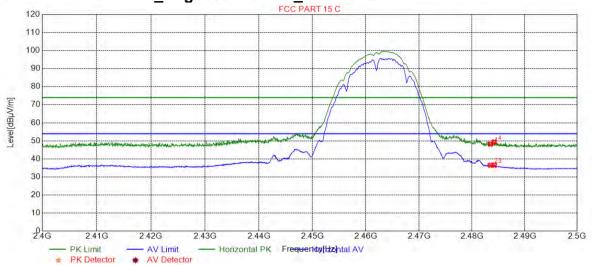


очор.	cotca List										
Suspected List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2483.5000	48.18	1.52	74.00	25.82	150	257	Horizontal			
2	2483.5000	36.48	1.52	54.00	17.52	150	257	Horizontal			
3	2484.2421	36.55	1.53	54.00	17.45	150	257	Horizontal			
4	2484.2421	49.38	1.53	74.00	24.62	150	257	Horizontal			



Report No.: HR/2019/1000503

Page: 74 of 83

### 4.10.1.5 802.11G\_Lowest Channel\_ Vertical

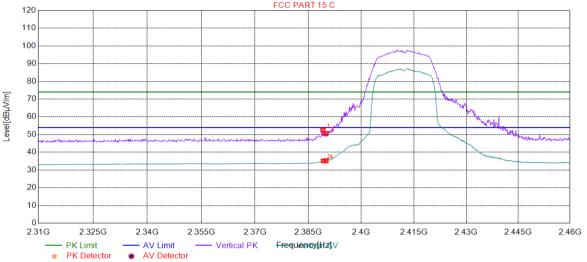


Ouop.	cted List										
Suspected List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2389.1291	52.50	1.24	74.00	21.50	150	167	Vertical			
2	2389.2793	35.13	1.24	54.00	18.87	150	161	Vertical			
3	2390.0000	50.57	1.25	74.00	23.43	150	171	Vertical			
4	2390.0000	35.24	1.25	54.00	18.76	150	167	Vertical			



Report No.: HR/2019/1000503

Page: 75 of 83



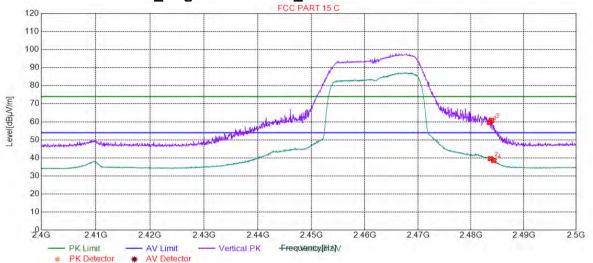


Ouspi	ected List										
Suspected List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2483.5000	59.63	1.52	74.00	14.37	150	1	Vertical			
2	2483.6918	39.56	1.52	54.00	14.44	150	38	Vertical			
3	2483.9420	60.82	1.53	74.00	13.18	150	34	Vertical			
4	2484.3422	38.53	1.53	54.00	15.47	150	42	Vertical			



Report No.: HR/2019/1000503

Page: 76 of 83

### 4.10.1.7 802.11G\_Lowest Channel\_ Horizontal

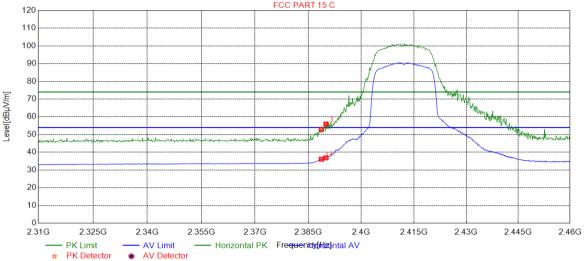


Ouspi	ecteu List											
Suspected List												
NO.	Freq.	Level [dBµV/m]	Factor	Limit	Margin	Height	Angle	Polarity				
	[MHz]	[αΒμν/ιιι]	[dB]	[dBµV/m]	[dB]	[cm]	[°]					
1	2388.6787	52.98	1.24	74.00	21.02	150	325	Horizontal				
2	2388.6787	36.08	1.24	54.00	17.92	150	250	Horizontal				
3	2390.0000	55.96	1.25	74.00	18.04	150	319	Horizontal				
4	2390.0000	36.92	1.25	54.00	17.08	150	250	Horizontal				



Report No.: HR/2019/1000503

Page: 77 of 83

### 4.10.1.8 802.11G\_ Highest Channel\_ Horizontal

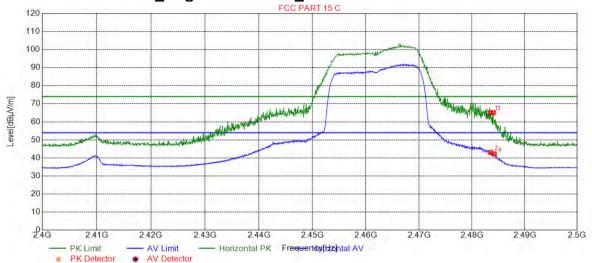


Ouspi	coted List											
Suspected List												
NO.	Freq.	Level	Factor	Limit	Margin	Height	Angle	Polarity				
	[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]					
1	2483.5000	65.12	1.52	74.00	8.88	150	244	Horizontal				
2	2483.5000	43.02	1.52	54.00	10.98	150	314	Horizontal				
3	2484.0420	65.06	1.53	74.00	8.94	150	314	Horizontal				
4	2484.1921	42.24	1.53	54.00	11.76	150	314	Horizontal				



Report No.: HR/2019/1000503

Page: 78 of 83

### 4.10.1.9 802.11N20\_Lowest Channel\_ Vertical

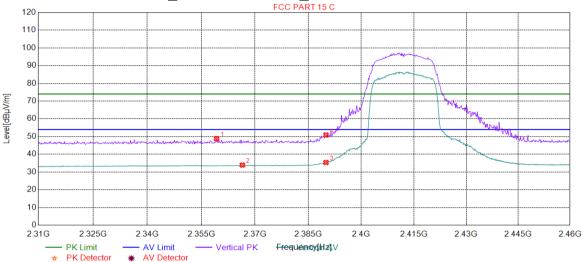


Ousp	ected List										
Suspected List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2359.2492	48.83	1.11	74.00	25.17	150	95	Vertical			
2	2366.4565	33.91	1.14	54.00	20.09	150	0	Vertical			
3	2390.0000	35.37	1.25	54.00	18.63	150	162	Vertical			
4	2390.0000	50.90	1.25	74.00	23.10	150	158	Vertical			



Report No.: HR/2019/1000503

Page: 79 of 83

### 4.10.1.10 802.11N20\_ Highest Channel\_ Vertical

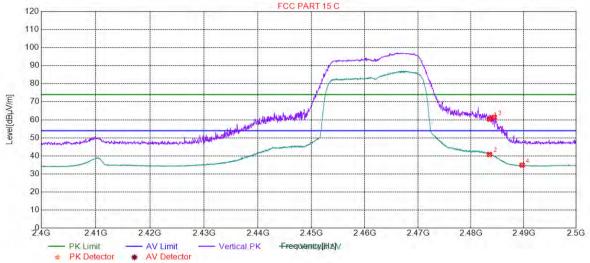


Оиор	cotoa Elst										
Suspected List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2483.5000	60.41	1.52	74.00	13.59	150	22	Vertical			
2	2483.5000	40.81	1.52	54.00	13.19	150	158	Vertical			
3	2484.3922	61.38	1.53	74.00	12.62	150	34	Vertical			
4	2489.6948	34.96	1.54	54.00	19.04	150	166	Vertical			



Report No.: HR/2019/1000503

Page: 80 of 83

### 4.10.1.11 802.11N20\_Lowest Channel\_ Horizontal

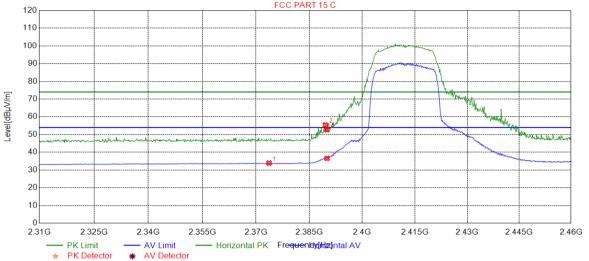


Ousp.	cotca List										
Suspected List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2373.6637	33.90	1.17	54.00	20.10	150	141	Horizontal			
2	2389.5796	55.42	1.24	74.00	18.58	150	316	Horizontal			
3	2390.0000	36.59	1.25	54.00	17.41	150	256	Horizontal			
4	2390.0000	52.68	1.25	74.00	21.32	150	250	Horizontal			



Report No.: HR/2019/1000503

Page: 81 of 83

### 4.10.1.12 802.11N20\_ Highest Channel\_ Horizontal

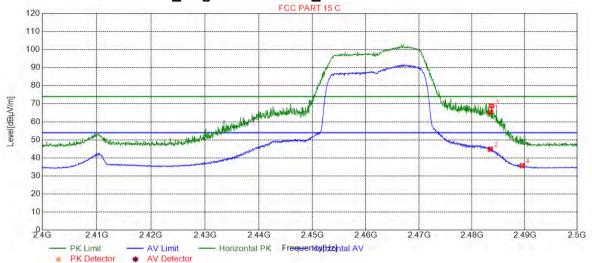

#### **Suspected List**

Cuspected List								
Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2483.5000	65.34	1.52	74.00	8.66	150	318	Horizontal
2	2483.5000	44.84	1.52	54.00	9.16	150	314	Horizontal
3	2483.6918	68.80	1.52	74.00	5.20	150	255	Horizontal
4	2489.4947	35.70	1.54	54.00	18.30	150	311	Horizontal

#### Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

All Modes have been tested, but only the worst case data displayed in this report.

Report No.: HR/2019/1000503

Page: 82 of 83

### 5 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty		
1	Total RF power, conducted	±0.75dB		
2	RF power density, conducted	±2.84dB		
3	Spurious emissions, conducted	±0.75dB		
4	Dedicted Churique emission test	±4.5dB (30MHz-1GHz)		
	Radiated Spurious emission test	±4.8dB (1GHz-25GHz)		
5	Conduct emission test	±3.12 dB (9KHz- 30MHz)		
6	Temperature test	±1°C		
7	Humidity test	±3%		
8	DC and low frequency voltages	±0.5%		

Report No.: HR/2019/1000503

Page: 83 of 83

### 6 Equipment List

Conducted Emission							
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Duedate		
rest Equipment				(yyyy-mm-dd)	(yyyy-mm-dd)		
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2017/5/10	2020/5/9		
LISN	Rohde & Schwarz	ENV216	SEM007-01	2018/9/2	2019/9/2		
LISN	ETS-LINDGREN	Feb-16	SEM007-02	2018/4/2	2019/4/1		
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A		
Coaxial Cable	SGS	N/A	SEM024-01	2018/7/12	2019/7/11		
2 Line ISN	Fischer Custom	FCC-TLISN-T2-02	EMC0122	2018/2/14	2019/2/13		
	Communications Inc.						
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2018/4/2	2019/4/1		

RF conducted test							
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Duedate		
rest Equipment				(yyyy-mm-dd)	(yyyy-mm-dd)		
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2018/9/2	2019/9/2		
Signal Analyzer	Rohde & Schwarz	FSV	W025-05	2018/3/13	2019/3/12		
Coaxial Cable	SGS	N/A	SEM031-01	2018/7/13	2019/7/12		
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A		
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2018/9/2	2019/9/2		
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2018/9/2	2019/9/2		

RE in Chamber							
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Due date		
rest Equipment				(yyyy-mm-dd)	(yyyy-mm-dd)		
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2017/8/5	2020/8/4		
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A		
Coaxial Cable	SGS	N/A	SEM025-01	2018/7/12	2019/7/11		
MXE EMI Receiver (20Hz- 8.4GHz)	Agilent Technologies	N9038A	SEM004-05	2018/9/2	2019/9/2		
BiConiLog Antenna (26- 3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2017/6/27	2020/6/26		
Pre-amplifier (0.1-1.3GHz)	Agilent Technologies	8447D	SEM005-01	2018/4/2	2019/4/1		

RE in Chamber							
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)		
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2018/3/31	2021/3/30		
EMI Test Receiver (9k-7GHz)	Rohde & Schwarz	ESR	SEM004-03	2018/4/2	2019/4/1		
Trilog-Broadband Antenna(25M-2GHz)	Schwarzbeck	VULB9168	SEM003-18	2016/6/29	2019/6/28		
Pre-amplifier (9k-1GHz)	Sonoma	310N	SEM005-03	2018/4/13	2019/4/12		
Loop Antenna (9kHz-30MHz)	ETS-Lindgren	6502	SEM003-08	2017/8/22	2020/8/21		
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A		
Coaxial Cable	SGS	N/A	SEM029-01	2018/7/12	2019/7/11		

### 7 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for HR/2019/10005.

The End