
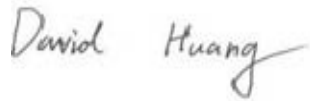



# RF TEST REPORT



Report No.: 16070898-FCC-R1

Supersede Report No.: N/A

Applicant	Unimax Communications	
Product Name	Mobile Phone	
Model No.	MXG-408	
Serial No.	N/A	
Test Standard	FCC Part 22(H):2015 ;FCC Part 24(E):2015; ANSI/TIA-603-D: 2010	
Test Date	July 22 to August 15, 2016	
Issue Date	August 16, 2016	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
		
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

**SIEMIC (SHENZHEN-CHINA) LABORATORIES**

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16070898-FCC-R1
Page	3 of 86

This page has been left blank intentionally.

# CONTENTS

<b>1. REPORT REVISION HISTORY .....</b>	<b>5</b>
<b>2. CUSTOMER INFORMATION .....</b>	<b>5</b>
<b>3. TEST SITE INFORMATION.....</b>	<b>5</b>
<b>4. EQUIPMENT UNDER TEST (EUT) INFORMATION.....</b>	<b>6</b>
<b>5. TEST SUMMARY .....</b>	<b>9</b>
<b>6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....</b>	<b>10</b>
6.1 RF EXPOSURE (SAR).....	10
6.2 RF OUTPUT POWER.....	11
6.3 PEAK-AVERAGE RATIO.....	23
6.4 OCCUPIED BANDWIDTH.....	27
6.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....	38
6.6 SPURIOUS RADIATED EMISSIONS.....	51
6.7 BAND EDGE.....	57
6.8 FREQUENCY STABILITY .....	67
<b>ANNEX A. TEST INSTRUMENT.....</b>	<b>75</b>
<b>ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....</b>	<b>76</b>
<b>ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....</b>	<b>82</b>
<b>ANNEX C.II. EUT OPERATING CONKITIONS.....</b>	<b>84</b>
<b>ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST.....</b>	<b>85</b>
<b>ANNEX E. DECLARATION OF SIMILARITY.....</b>	<b>86</b>

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
16070898-FCC-R1	NONE	Original	August 16, 2016

## 2. Customer information

Applicant Name	Unimax Communications
Applicant Add	18201 Mcdurmott St. West Suite E, Irvine, CA 92614
Manufacturer	Unimax Communications LLC
Manufacturer Add	18201 Mcdurmott St. West Suite E, Irvine, CA 92614

## 3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

## 4. Equipment under Test (EUT) Information

Description of EUT:	Mobile Phone
Main Model:	MXG-408
Serial Model:	N/A
Date EUT received:	July 21, 2016
Test Date(s):	July 22 to August 15, 2016
Equipment Category :	PCE
Antenna Gain:	GSM850: 0.33dBi PCS1900: 3.92dBi UMTS-FDD Band V: 0.33dBi UMTS-FDD Band II: 3.92dBi Bluetooth/BLE/WIFI: 1.98dBi
Antenna Type:	PIFA antenna
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK,8PSK UMTS-FDD: QPSK 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, $\pi$ /4DQPSK, 8DPSK BLE: GFSK
RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz WIFI: 802.11b/g/n(20M): 2412-2462 MHz Bluetooth& BLE: 2402-2480 MHz

	GSM Voce:GSM850: 32.64 dBm
	PCS1900: 30.35 dBm
	GPRS:GSM850: 32.31 dBm
	PCS1900: 30.24 dBm
	MCS1:GSM850: 31.84 dBm
	PCS1900: 28.95 dBm
Maximum Conducted	MCS5:GSM850: 27.81 dBm
AV Power to Antenna:	PCS1900: 26.98 dBm
	RMC:UMTS-FDD Band V: 21.23 dBm
	UMTS-FDD Band II: 21.98 dBm
	HSDPA:UMTS-FDD Band V: 20.96 Bm
	UMTS-FDD Band II: 20.98 dBm
	HSUPA:UMTS-FDD Band V: 20.96 dBm
	UMTS-FDD Band II: 20.99 dBm
	GSM Voce:GSM850: 30.61 dBm / ERP
	PCS1900: 32.29 dBm / EIRP
	GPRS:GSM850: 30.43 dBm / ERP
	PCS1900: 32.24 dBm / EIRP
	EGPRS(MCS 5):GSM850: 28.78 dBm / ERP
ERP/EIRP:	PCS1900: 26.95 dBm / EIRP
	RMC:UMTS-FDD Band V: 20.63 dBm / ERP
	UMTS-FDD Band II: 26.06 dBm / EIRP
	HSDPA:UMTS-FDD Band V: 19.10 dBm / ERP
	UMTS-FDD Band II: 25.09 dBm / EIRP
	HSUPA:UMTS-FDD Band V: 19.32 dBm / ERP
	UMTS-FDD Band II: 24.17 dBm / EIRP

Number of Channels: GSM 850: 124CH  
PCS1900: 299CH  
UMTS-FDD Band V : 102CH  
UMTS-FDD Band II : 277CH  
WIFI :802.11b/g/n(20M): 11CH  
Bluetooth: 79CH  
BLE: 40CH

Port: Earphone Port, USB Port

Input Power: Adapter:  
Model:UMXCHG  
Input: AC 100-240V~50/60Hz;0.15A  
Output: DC 5.0V,500mA  
Battery:  
Model:BU1350  
Spec: 3.7V,1350mAh(4.995Wh)

Trade Name : Unimax Communications

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: P46-UMX40INT



## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§ 1.1307; § 2.1093	RF Exposure (SAR)	Compliance
§2.1046; § 22.913(a); § 24.232(c); § 27.50(c.10) ;	RF Output Power	Compliance
§ 24.232 (d) ;	Peak-Average Ratio	Compliance
§ 2.1049; § 22.905; § 22.917; § 24.238;	99% & -26 dB Occupied Bandwidth	Compliance
§ 2.1051; § 22.917(a); § 24.238(a);	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917(a); § 24.238(a);	Field Strength of Spurious Radiation	Compliance
§ 22.917(a); § 24.238(a);	Out of band emission, Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235;	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

### Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

## 6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

### 6.1 RF Exposure (SAR)

Test Result: Pass

The EUT is a portable device, thus requires SAR evaluation;


Please refer to RF Exposure Evaluation Report: 16070898-FCC-H.

## 6.2 RF Output Power

Temperature	22°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	August 13, 2016
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable
§22.913 (a)	a)	ERP:38.45dBm	<input checked="" type="checkbox"/>
§24.232 (c)	b)	EIRP:33dBm	<input checked="" type="checkbox"/>

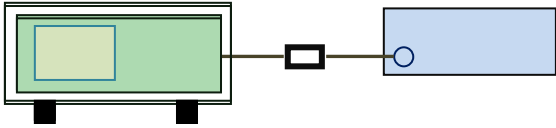Test Setup	
------------	---

Test Procedure	<p>For Conducted Power:</p> <ul style="list-style-type: none"> <li>- The transmitter output port was connected to base station.</li> <li>- Set EUT at maximum power through base station.</li> <li>- Select lowest, middle, and highest channels for each band and different test mode.</li> </ul> <p>For ERP/EIRP:</p> <p>According with KDB 971168 v02r02</p> <ul style="list-style-type: none"> <li>- The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.</li> <li>- The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.</li> <li>- The frequency range up to tenth harmonic of the fundamental frequency was investigated.</li> </ul>
----------------	---

Test Report	16070898-FCC-R1
Page	12 of 86

	<ul style="list-style-type: none"> <li>- Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.</li> <li>- Spurious emissions in dB = 10 log (TX power in Watts/0.001) – the absolute level</li> <li>- Spurious attenuation limit in dB = 43 + 10 Log10 (power out in Watts).</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

**Test Data**     Yes                       N/A  
**Test Plot**     Yes (See below)       N/A

## Conducted Power

### GSM Mode:

Burst Average Power (dBm);								
Band	GSM850				PCS1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice (1 uplink),GMSK	32.45	<b>32.64</b>	32.23	33±1	<b>30.35</b>	30.21	30.25	30±1
GPRS Multi-Slot Class 8 (1 uplink),GMSK	<b>32.31</b>	31.22	32.12	32±1	<b>30.24</b>	30.13	30.16	30±1
GPRS Multi-Slot Class 10 (2 uplink),GMSK	30.72	30.73	30.81	30±1	28.69	28.86	28.78	28±1
GPRS Multi-Slot Class 12 (4 uplink),GMSK	26.71	26.64	26.65	26±1	25.61	25.65	25.77	25±1
EGPRS Multi-Slot Class 8 (1 uplink) MCS1 GMSK	32.68	32.57	32.83	33±1	29.32	29.27	29.53	30±1
EGPRS Multi-Slot Class 10 (2 uplink) MCS1 GMSK	31.25	31.48	<b>31.84</b>	31±1	28.73	28.72	<b>28.95</b>	28±1
EGPRS Multi-Slot Class 12 (4 uplink) MCS1 GMSK	27.04	27.37	27.46	27±1	25.13	25.15	25.42	25±1
EGPRS Multi-Slot Class 8 (1 uplink) MCS 5 8PSK	27.66	27.73	<b>27.81</b>	27±1	26.75	26.67	<b>26.98</b>	26±1
EGPRS Multi-Slot Class 10 (2 uplink) MCS 5 8PSK	26.24	26.48	26.71	26±1	25.53	25.48	25.57	25±1
EGPRS Multi-Slot Class 12 (4 uplink) MCS 5 8PSK	23.04	23.12	23.46	23±1	22.08	22.15	22.24	22±1

Test Report	16070898-FCC-R1
Page	14 of 86

Remark :

GPRS, CS1 coding scheme.

EGPRS, MCS1 coding scheme.

EGPRS, MCS5 coding scheme.

Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link

Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link

Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link

## UMTS Mode:

### UMTS-FDD Band V

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	4132	826.4	21.16	21.5±1
	4175	835	<b>21.23</b>	21.5±1
	4233	846.6	21.18	21.5±1
HSDPA Subtest1	4132	826.4	20.64	21.5±1
	4175	835	20.78	21.5±1
	4233	846.6	<b>20.96</b>	21.5±1
HSDPA Subtest2	4132	826.4	20.74	21.5±1
	4175	835	20.84	21.5±1
	4233	846.6	20.59	21.5±1
HSDPA Subtest3	4132	826.4	20.84	21.5±1
	4175	835	20.95	21.5±1
	4233	846.6	20.74	21.5±1
HSDPA Subtest4	4132	826.4	20.86	21.5±1
	4175	835	20.75	21.5±1
	4233	846.6	20.78	21.5±1
HSUPA Subtest1	4132	826.4	20.69	21.5±1
	4175	835	<b>20.96</b>	21.5±1
	4233	846.6	20.67	21.5±1
HSUPA Subtest2	4132	826.4	20.94	21.5±1
	4175	835	20.56	21.5±1
	4233	846.6	20.58	21.5±1
HSUPA Subtest3	4132	826.4	20.77	21.5±1
	4175	835	20.87	21.5±1
	4233	846.6	20.93	21.5±1
HSUPA Subtest4	4132	826.4	20.84	21.5±1
	4175	835	20.95	21.5±1
	4233	846.6	20.54	21.5±1
HSUPA Subtest5	4132	826.4	20.89	21.5±1
	4175	835	20.56	21.5±1
	4233	846.6	20.66	21.5±2

## UMTS-FDD Band II

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	9262	1852.4	<b>21.98</b>	21.5±1
	9400	1880	21.94	21.5±1
	9538	1907.6	21.87	21.5±1
HSDPA Subtest1	9262	1852.4	20.87	21.5±1
	9400	1880	20.51	21.5±1
	9538	1907.6	20.78	21.5±1
HSDPA Subtest2	9262	1852.4	20.64	21.5±1
	9400	1880	<b>20.98</b>	21.5±1
	9538	1907.6	20.64	21.5±1
HSDPA Subtest3	9262	1852.4	20.59	21.5±1
	9400	1880	20.78	21.5±1
	9538	1907.6	20.97	21.5±1
HSDPA Subtest4	9262	1852.4	20.81	21.5±1
	9400	1880	20.65	21.5±1
	9538	1907.6	20.82	21.5±1
HSUPA Subtest1	9262	1852.4	20.83	21.5±1
	9400	1880	20.78	21.5±1
	9538	1907.6	20.79	21.5±1
HSUPA Subtest2	9262	1852.4	20.77	21.5±1
	9400	1880	20.96	21.5±1
	9538	1907.6	20.85	21.5±1
HSUPA Subtest3	9262	1852.4	20.91	21.5±1
	9400	1880	20.73	21.5±1
	9538	1907.6	20.84	21.5±1
HSUPA Subtest4	9262	1852.4	20.86	21.5±1
	9400	1880	20.87	21.5±1
	9538	1907.6	20.98	21.5±1
HSUPA Subtest5	9262	1852.4	20.87	21.5±1
	9400	1880	<b>20.99</b>	21.5±1
	9538	1907.6	20.78	21.5±1



## ERP & EIRP

### GSM Voice

#### ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	24.21	V	6.8	0.53	30.48	38.45
824.2	22.64	H	6.8	0.53	28.91	38.45
836.6	24.34	V	6.8	0.53	<b>30.61</b>	38.45
836.6	22.79	H	6.8	0.53	29.06	38.45
848.8	24.16	V	6.9	0.53	30.53	38.45
848.8	22.75	H	6.9	0.53	29.12	38.45

#### EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	27.26	V	7.88	0.85	<b>32.29</b>	33
1850.2	25.62	H	7.88	0.85	31.65	33
1880	27.21	V	7.88	0.85	32.24	33
1880	25.58	H	7.88	0.85	31.61	33
1909.8	27.18	V	7.86	0.85	32.19	33
1909.8	25.43	H	7.86	0.85	31.44	33

**GPRS:**

**ERP for Cellular Band (Part 22H)**

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	24.13	V	6.8	0.53	30.40	38.45
824.2	22.98	H	6.8	0.53	29.25	38.45
836.6	24.09	V	6.8	0.53	30.36	38.45
836.6	22.86	H	6.8	0.53	29.13	38.45
848.8	24.06	V	6.9	0.53	<b>30.43</b>	38.45
848.8	23.02	H	6.9	0.53	29.39	38.45

**EIRP for PCS Band (Part 24E)**

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	27.16	V	7.88	0.85	32.19	33
1850.2	25.69	H	7.88	0.85	31.72	33
1880	27.21	V	7.88	0.85	<b>32.24</b>	33
1880	25.77	H	7.88	0.85	32.80	33
1909.8	27.18	V	7.86	0.85	32.19	33
1909.8	25.72	H	7.86	0.85	32.73	33

**EGPRS (MCS5):**

**ERP for Cellular Band (Part 22H)**

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	24.86	V	6.8	0.53	27.13	38.45
824.2	22.36	H	6.8	0.53	28.63	38.45
836.6	24.79	V	6.8	0.53	27.06	38.45
836.6	22.29	H	6.8	0.53	28.56	38.45
848.8	24.83	V	6.9	0.53	28.20	38.45
848.8	22.41	H	6.9	0.53	<b>28.78</b>	38.45

**EIRP for PCS Band (Part 24E)**

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	26.23	V	7.88	0.85	26.26	33
1850.2	25.01	H	7.88	0.85	25.04	33
1880	26.19	V	7.88	0.85	26.22	33
1880	24.87	H	7.88	0.85	25.90	33
1909.8	27.94	V	7.86	0.85	<b>26.95</b>	33
1909.8	25.46	H	7.86	0.85	25.47	33

## RMC

### ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	14.15	V	6.8	0.53	20.42	38.45
826.4	12.56	H	6.8	0.53	18.83	38.45
835	14.08	V	6.8	0.53	20.35	38.45
835	12.47	H	6.8	0.53	18.74	38.45
846.6	14.26	V	6.9	0.53	<b>20.63</b>	38.45
846.6	12.69	H	6.9	0.53	19.06	38.45

### EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	18.84	V	7.88	0.85	25.87	33
1852.4	16.61	H	7.88	0.85	23.64	33
1880	19.03	V	7.88	0.85	<b>26.06</b>	33
1880	17.12	H	7.88	0.85	24.15	33
1907.6	18.96	V	7.86	0.85	25.97	33
1907.6	17.03	H	7.86	0.85	24.04	33

## HSDPA

### ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	12.56	V	6.8	0.53	18.83	38.45
826.4	11.23	H	6.8	0.53	17.50	38.45
835	12.69	V	6.8	0.53	18.96	38.45
835	11.37	H	6.8	0.53	17.64	38.45
846.6	12.73	V	6.9	0.53	<b>19.10</b>	38.45
846.6	11.47	H	6.9	0.53	17.84	38.45

### EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	18.06	V	7.88	0.85	<b>25.09</b>	33
1852.4	17.21	H	7.88	0.85	24.24	33
1880	17.89	V	7.88	0.85	24.92	33
1880	17.08	H	7.88	0.85	24.11	33
1907.6	17.65	V	7.86	0.85	24.66	33
1907.6	16.87	H	7.86	0.85	23.88	33

## HSUPA

### ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	12.93	V	6.8	0.53	19.20	38.45
826.4	11.24	H	6.8	0.53	17.51	38.45
835	13.05	V	6.8	0.53	<b>19.32</b>	38.45
835	11.36	H	6.8	0.53	17.63	38.45
846.6	12.87	V	6.9	0.53	19.24	38.45
846.6	11.31	H	6.9	0.53	17.68	38.45

### EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	17.11	V	7.88	0.85	24.14	33
1852.4	15.44	H	7.88	0.85	22.47	33
1880	17.09	V	7.88	0.85	24.12	33
1880	15.37	H	7.88	0.85	22.40	33
1907.6	17.16	V	7.86	0.85	<b>24.17</b>	33
1907.6	15.52	H	7.86	0.85	22.53	33

### 6.3 Peak-Average Ratio

Temperature	22°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	August 13, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§24.232(d)	a)	The peak-to-average ratio (PAR) of the transmission may not exceed 13dB.	<input checked="" type="checkbox"/>

Test Setup	
------------	--

Test Procedure	<p><b>According with KDB 971168 v02r02</b></p> <p><b>5.7.2 Alternate procedure for PAPR</b></p> <p><b>5.1.2 Peak power measurements with a peak power meter</b></p> <p>The total peak output power may be measured using a broadband peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector.</p> <p><b>5.2.3 Average power measurement with average power meter</b></p> <p>As an alternative to the use of a spectrum/signal analyzer or EMI receiver to perform a measurement of the total in-band average output power, a wideband RF average power meter with a thermocouple detector or equivalent can be used under certain conditions</p> <p>If the EUT can be configured to transmit continuously (i.e., the burst duty cycle <math>\geq 98\%</math>) and at all times the EUT is transmitting at its maximum output</p>
----------------	--

Test Report	16070898-FCC-R1
Page	24 of 86

	<p>power level, then a conventional wide-band RF power meter can be used.</p> <p>If the EUT cannot be configured to transmit continuously (i.e., the burst duty cycle &lt; 98%), then there are two options for the use of an average power meter. First, a gated average power meter can be used to perform the measurement if the gating parameters can be adjusted such that the power is measured only over active transmission bursts at maximum output power levels. A conventional average power meter can also be used if the measured burst duty cycle is constant (i.e., duty cycle variations are less than <math>\pm 2</math> percent) by performing the measurement over the on/off burst cycles and then correcting (increasing) the measured level by a factor equal to <math>10\log(1/\text{duty cycle})</math></p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

**Test Data**     Yes                       N/A  
**Test Plot**     Yes (See below)             N/A



**GSM : GSM 1900 PK-AV POWER (PART 24E)**

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	32.37	30.35	2.02
1880	32.48	30.21	2.27
1909.8	32.69	31.10	1.59

**GPRS 1900 PK-AV POWER (PART 24E)**

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	31.14	29.32	1.82
1880	31.31	29.27	2.04
1909.8	31.02	29.53	1.49

**EGPRS (MSC5) 1900 PK-AV POWER (PART 24E)**

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	28.46	26.75	1.71
1880	28.72	26.67	2.05
1909.8	28.69	26.98	1.71

**RMC : UMTS-FDD Band 2 PK-AV POWER (PART 24E)**

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	25.56	21.98	3.58
1880	25.13	21.64	3.49
1907.6	25.32	21.87	3.45

**HSUPA : UMTS-FDD Band 2 PK-AV POWER (PART 24E)**

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	24.32	20.83	3.49
1880	24.16	20.78	3.38
1907.6	24.21	20.79	3.42


**HSDPA : UMTS-FDD Band 2 PK-AV POWER (PART 24E)**

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	24.16	20.87	3.29
1880	24.26	20.51	3.75
1907.6	24.51	20.78	3.73

## 6.4 Occupied Bandwidth

Temperature	24°C
Relative Humidity	53%
Atmospheric Pressure	1011mbar
Test date :	August 11, 2016
Tested By :	Loren Luo

### Requirement(s):

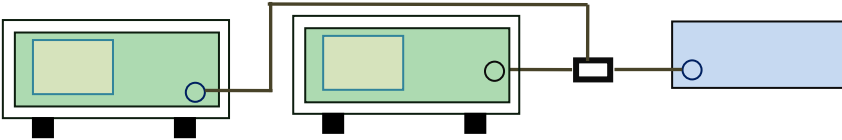Spec	Item	Requirement	Applicable
§2.1049, §22.917, §22.905 §24.238	a)	99% Occupied Bandwidth(kHz)	<input checked="" type="checkbox"/>
	b)	26 dB Bandwidth(kHz)	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<ul style="list-style-type: none"> <li>- The EUT was connected to Spectrum Analyzer and Base Station via power divider.</li> <li>- The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes       N/A

Test Plot     Yes (See below)       N/A

**GSM Voice:**

**Cellular Band (Part 22H) result**

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	244.49	316.5
190	836.6	244.37	321.5
251	848.8	237.99	295.3

**PCS Band (Part 24E) result**

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	247.91	317.4
661	1880.0	243.84	318.9
810	1909.8	242.94	318.6

**GPRS:**

**Cellular Band (Part 22H) result**

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	245.99	316.8
190	836.6	247.98	318.6
251	848.8	243.13	320.4

**PCS Band (Part 24E) result**

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	243.72	317.9
661	1880.0	242.01	319.2
810	1909.8	242.42	311.8

**EGPRS (MCS 5):**

**Cellular Band (Part 22H) result**

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	245.55	321.7
190	836.6	241.66	314.6
251	848.8	244.14	318.1

**PCS Band (Part 24E) result**

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	243.36	317.6
661	1880.0	243.68	322.2
810	1909.8	242.91	323.4

**RMC:**

**UMTS-FDD Band V (Part 22H)**

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.4	4.0655	4.604
4175	835.0	4.0382	4.569
4233	846.6	4.0632	4.581

**UMTS-FDD Band II (Part 24E)**

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.0690	4.604
9400	1880.0	4.0736	4.615
9538	1907.6	4.0617	4.614

**HSDPA:**

**UMTS-FDD Band V (Part 22H)**

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.4	4.0645	4.604
4175	835.0	4.0373	4.566
4233	846.6	4.0556	4.587

**UMTS-FDD Band II (Part 24E)**

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.0575	4.607
9400	1880.0	4.0757	4.631
9538	1907.6	4.0571	4.635

**HSUPA:**

**UMTS-FDD Band V (Part 22H)**


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.4	4.0580	4.567
4175	835.0	4.0369	4.579
4233	846.6	4.0560	4.574

**UMTS-FDD Band II (Part 24E)**


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1852.4	4.0611	4.620
9400	1880.0	4.0664	4.628
9538	1907.6	4.0624	4.622

### Test Plots


#### GMS Voice:

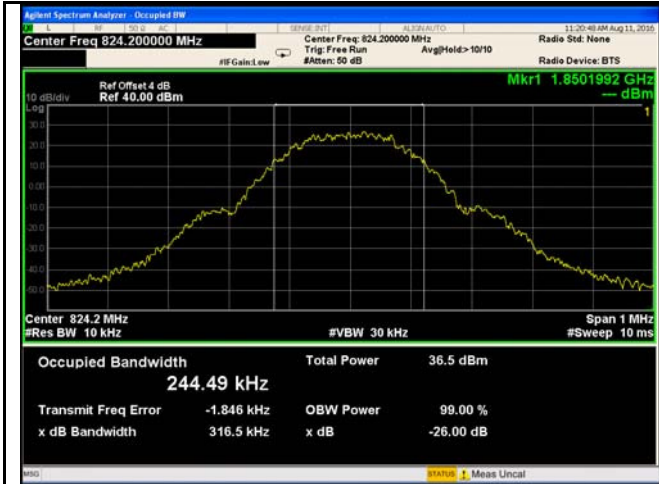


GSM 850 BW - Low CH 824.2MHz

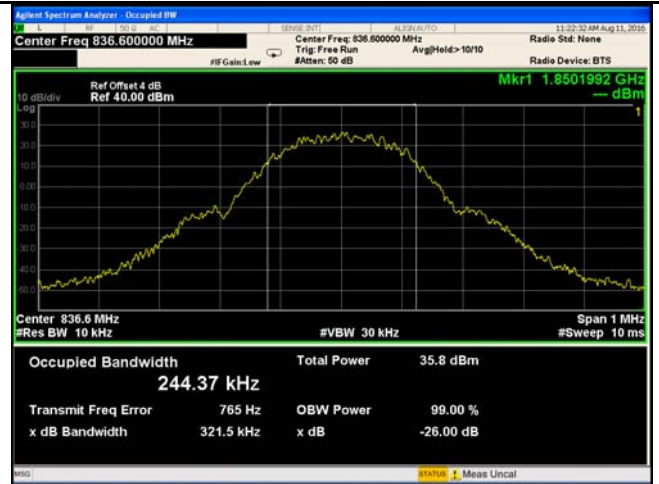


GSM 850 BW - Mid CH 836.6MHz

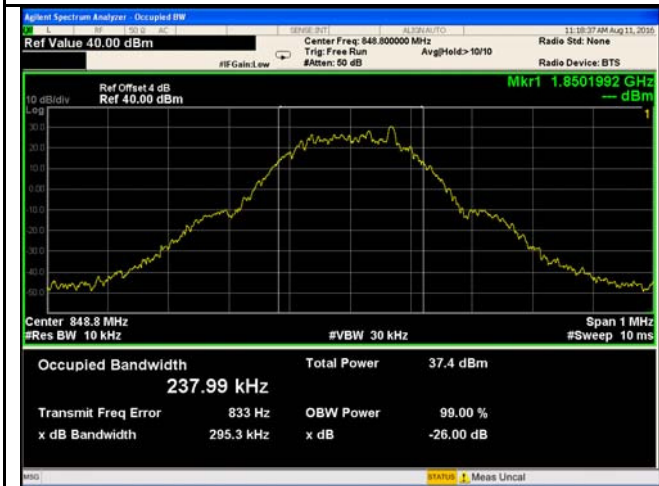


GSM 850 BW - High CH 848.8MHz

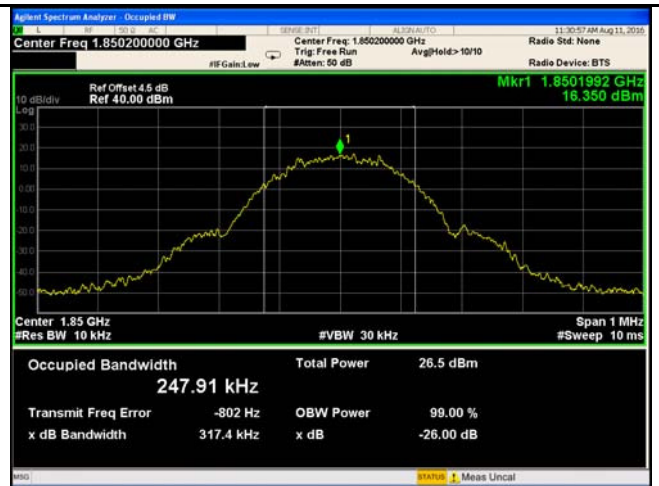

PCS 1900 BW - Low CH 1850.2MHz

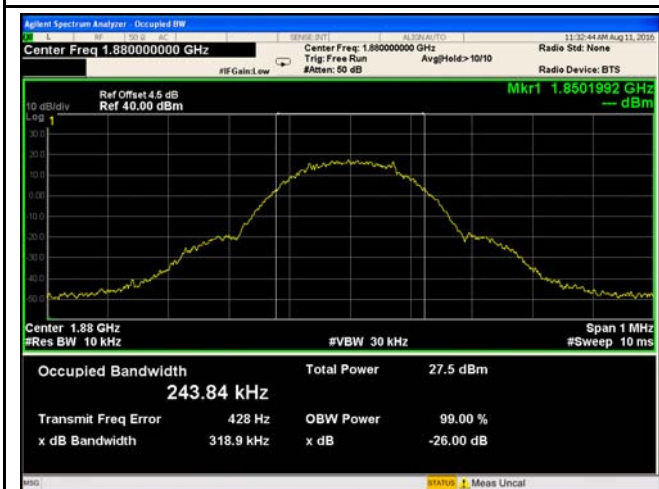


PCS 1900 BW - Mid CH 1880MHz

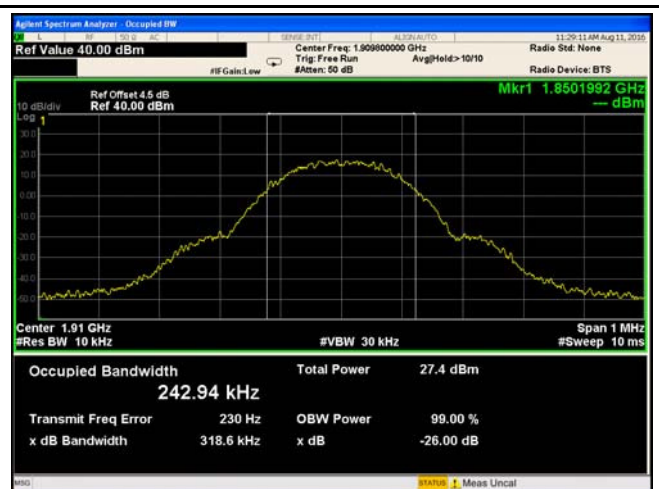

PCS 1900 BW - High CH 1909.8MHz




**GPRS:**

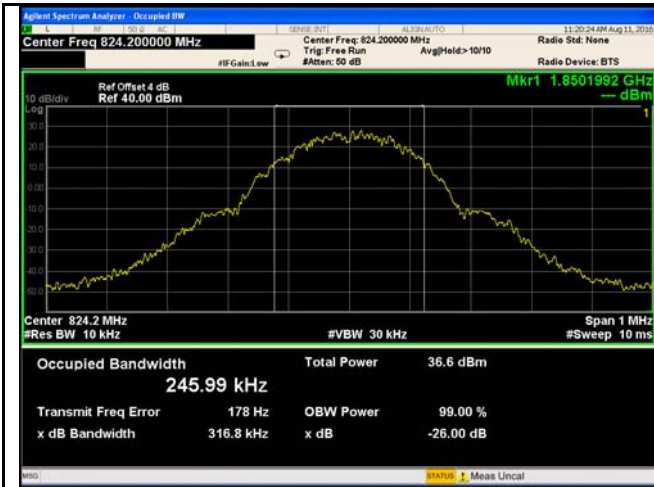

GSM 850 BW - Low CH 824.2MHz




GSM 850 BW - Mid CH 836.6MHz

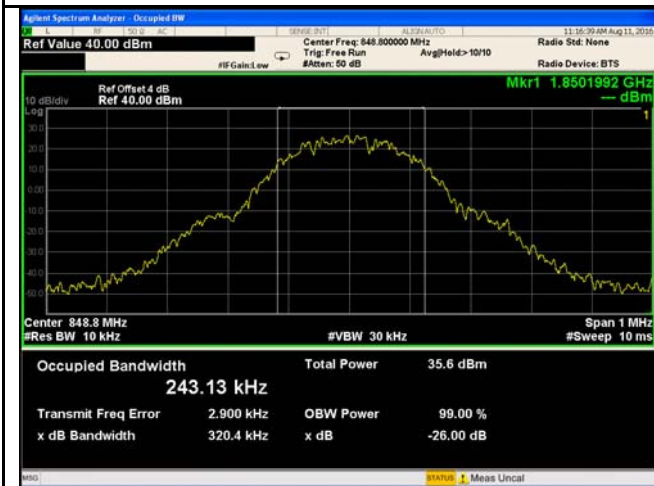


GSM 850 BW - High CH 848.8MHz



PCS 1900 BW - Low CH 1850.2MHz

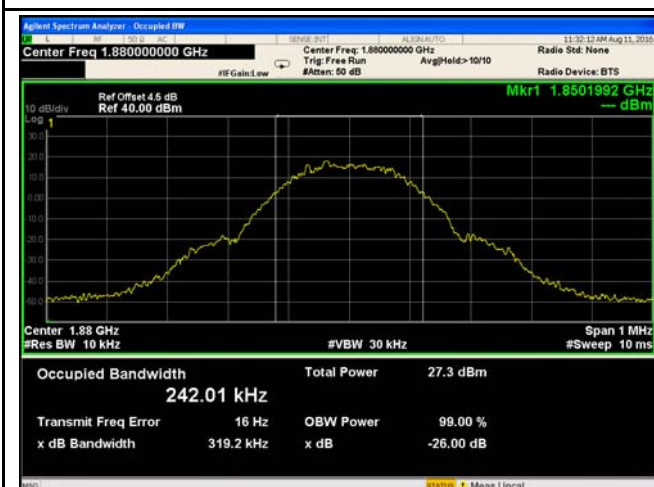


PCS 1900 BW - Mid CH 1880MHz

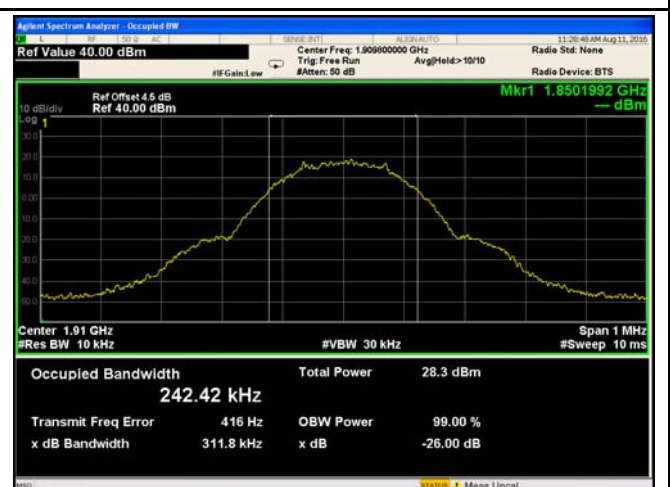


PCS 1900 BW - High CH 1909.8MHz


**EGPRS (MCS 5) :**

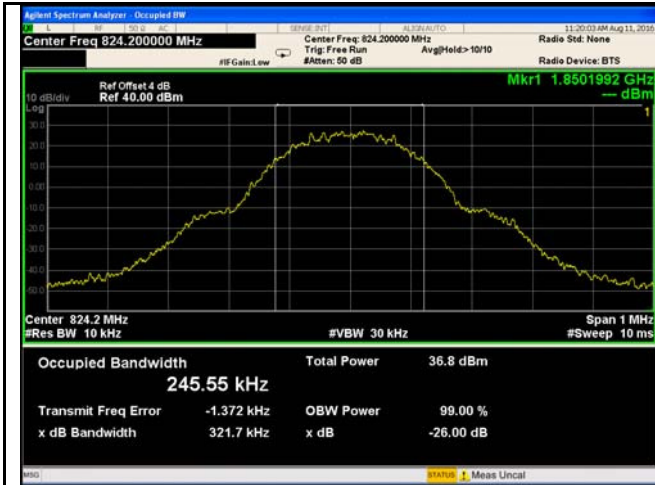


GSM 850 BW - Low CH 824.2MHz

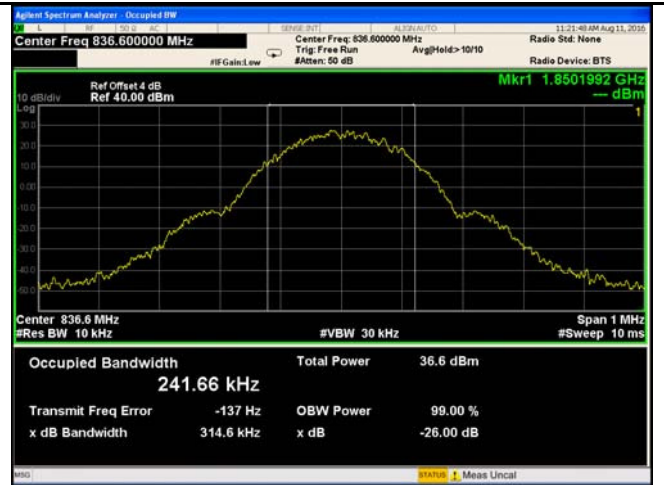


GSM 850 BW - Mid CH 836.6MHz

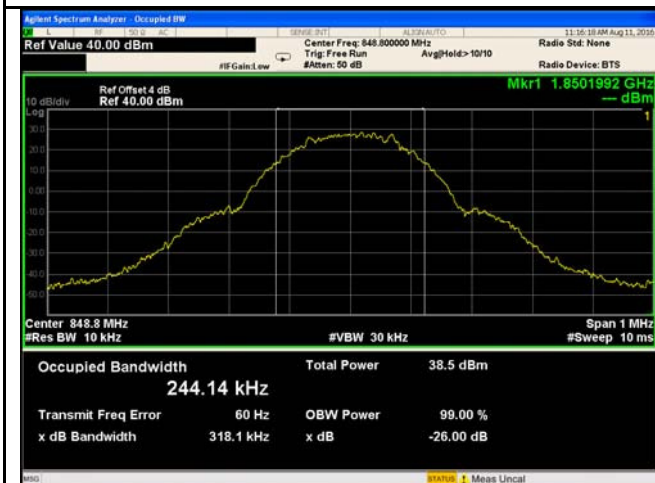


GSM 850 BW - High CH 848.8MHz

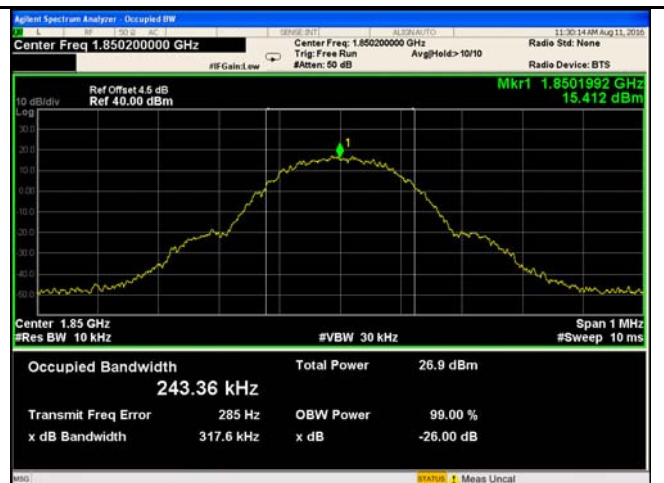

PCS 1900 BW - Low CH 1850.2MHz

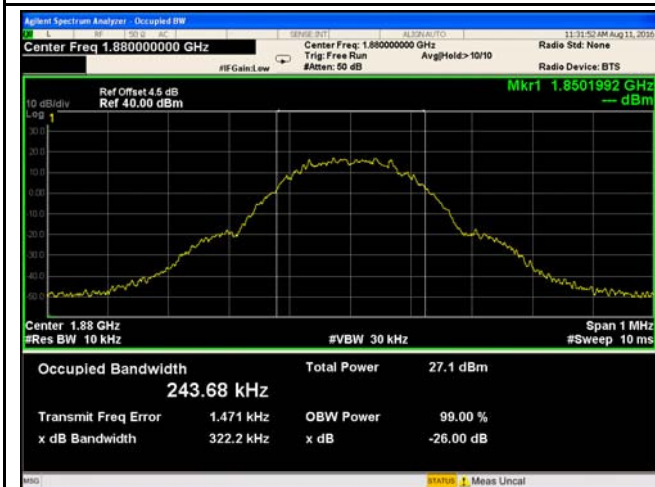


PCS 1900 BW - Mid CH 1880MHz

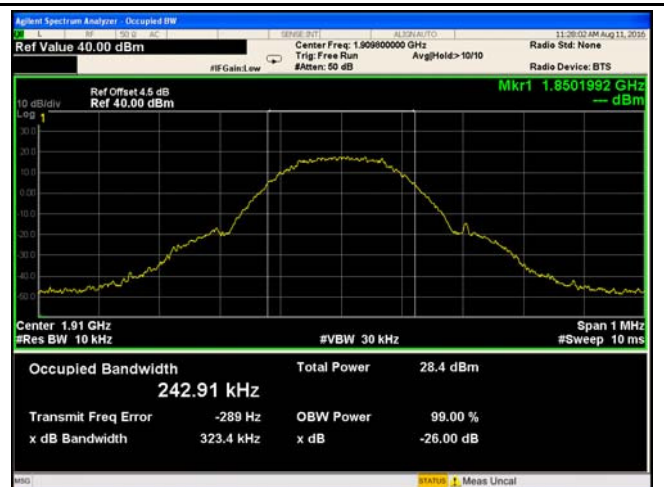

PCS 1900 BW - High CH 1909.8MHz


RMC:

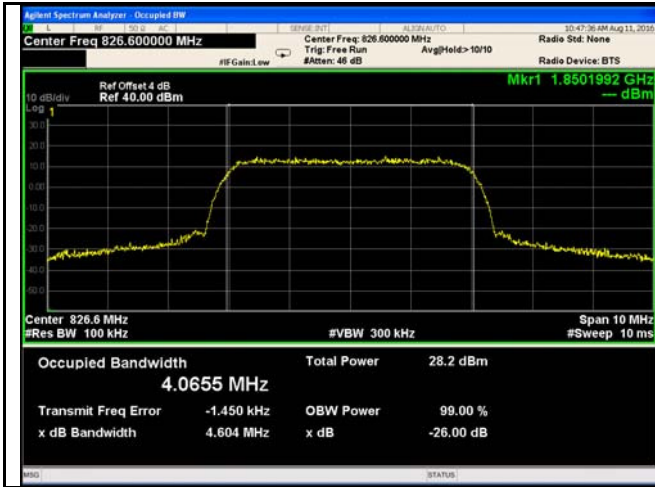

Band V BW - Low CH 826.6 MHz




Band V BW - Mid CH 835.0 MHz

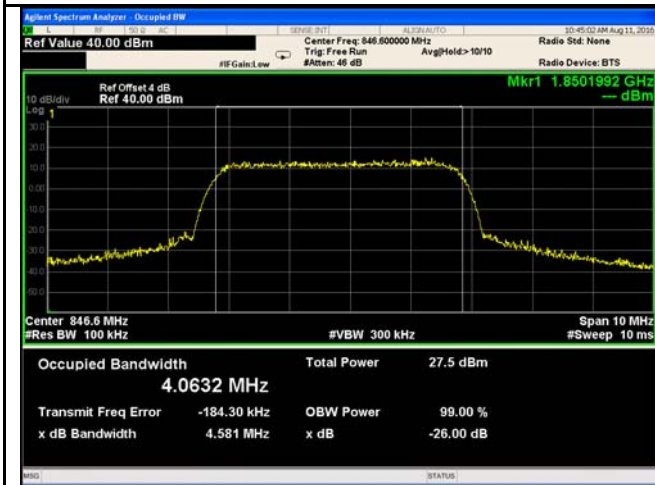


Band V BW - High CH 846.4 MHz



Band II BW - Low CH 1852.4MHz

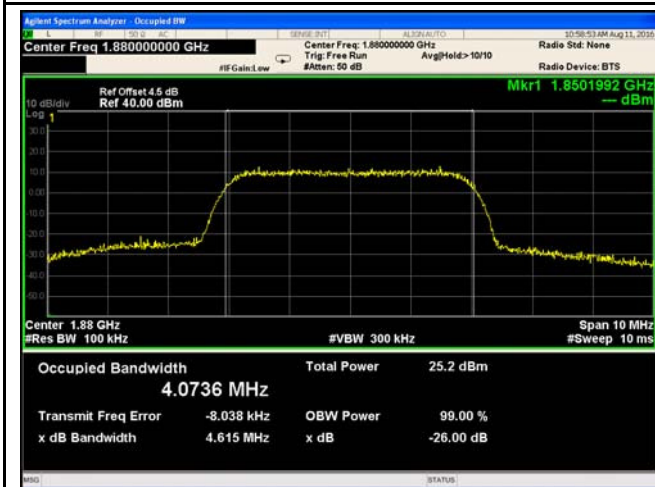


Band II BW - Mid CH 1880MHz

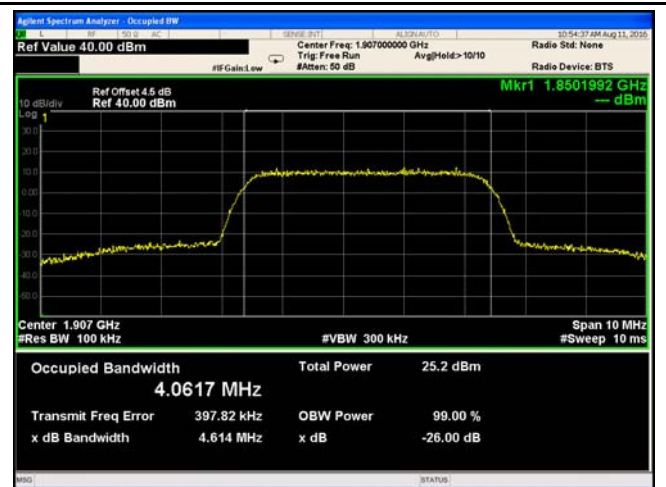


Band II BW - High CH 1907.6MHz


**HSDPA:**

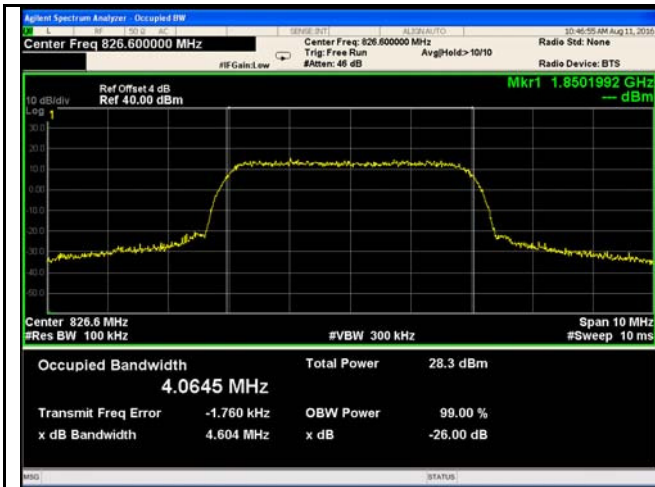

Band V BW - Low CH 826.6 MHz

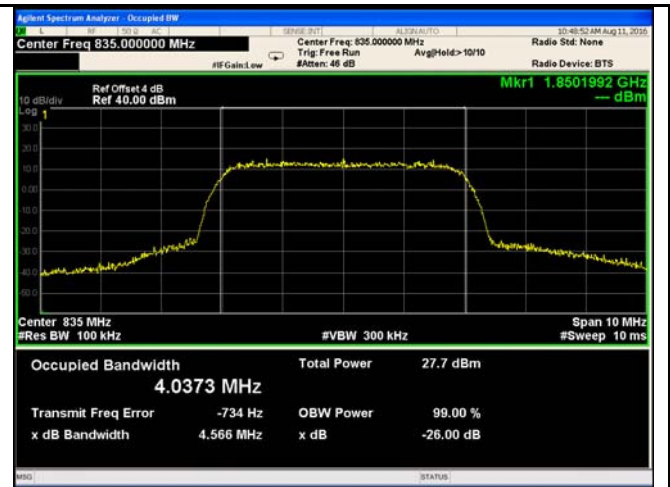


Band V BW - Mid CH 835.0 MHz

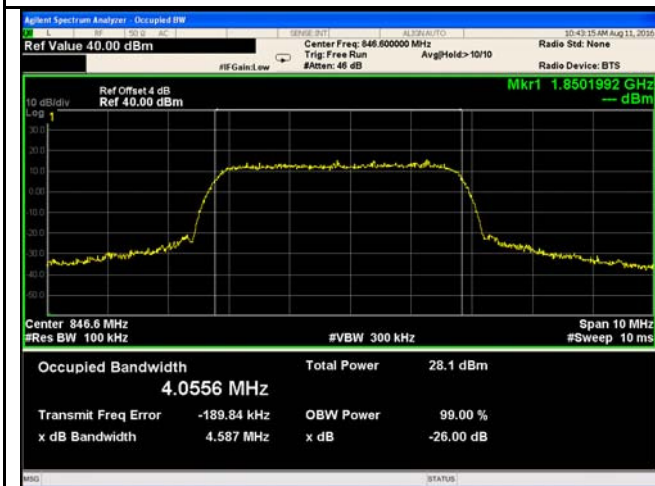


Band V BW - High CH 846.4 MHz



Band II BW - Low CH 1852.4 MHz

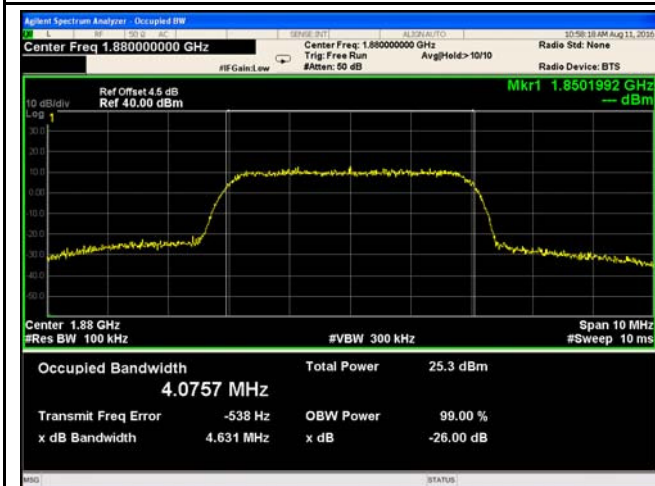


Band II BW - Mid CH 1880 MHz

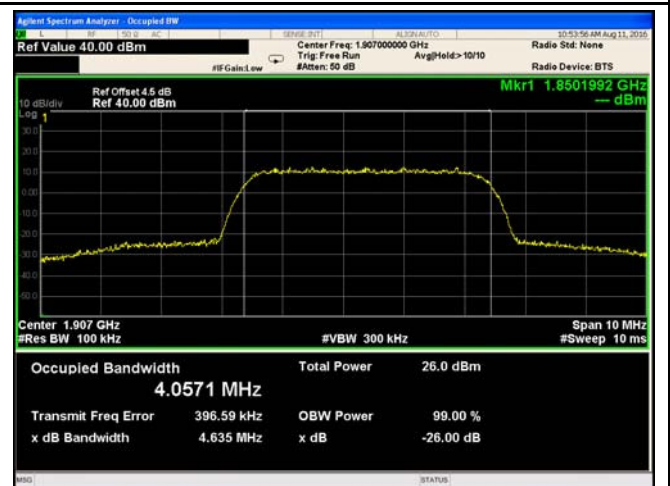


Band II BW - High CH 1907.6 MHz




**HSUPA:**

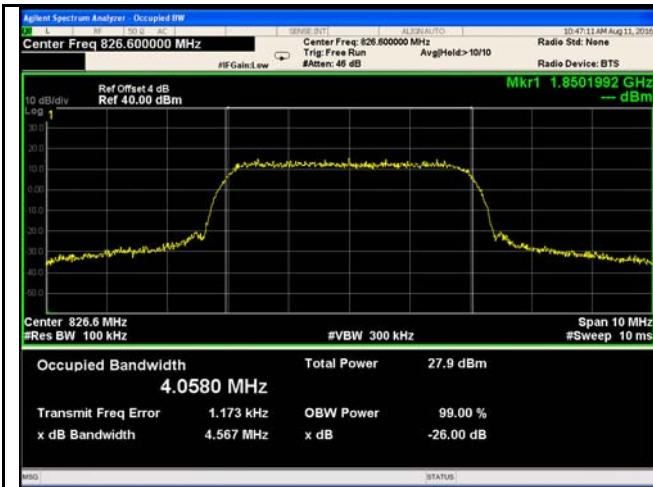


Band V BW - Low CH 826.6 MHz

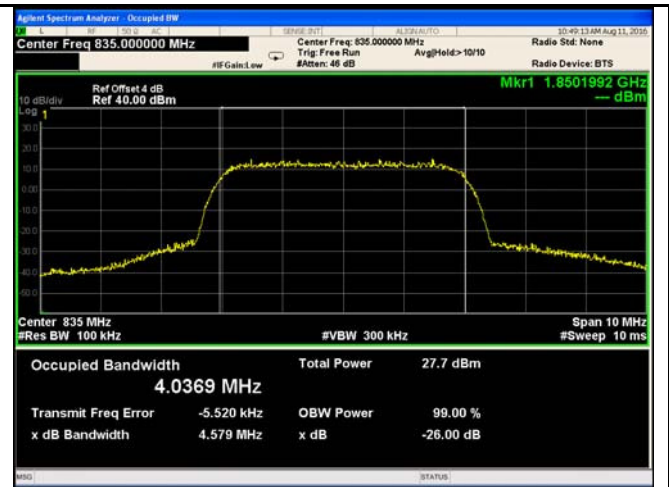


Band V BW - Mid CH 835.0 MHz

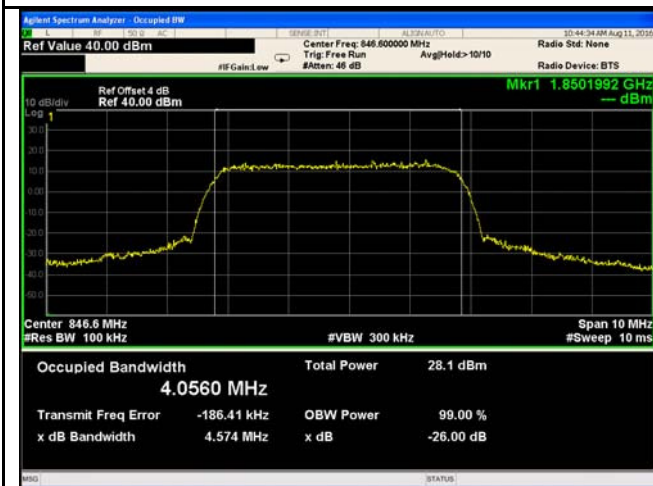


Band V BW - High CH 846.4 MHz

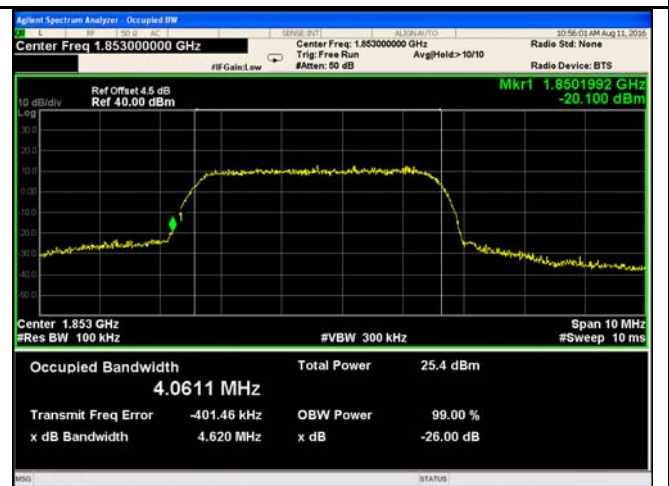

Band II BW - Low CH 1852.4MHz

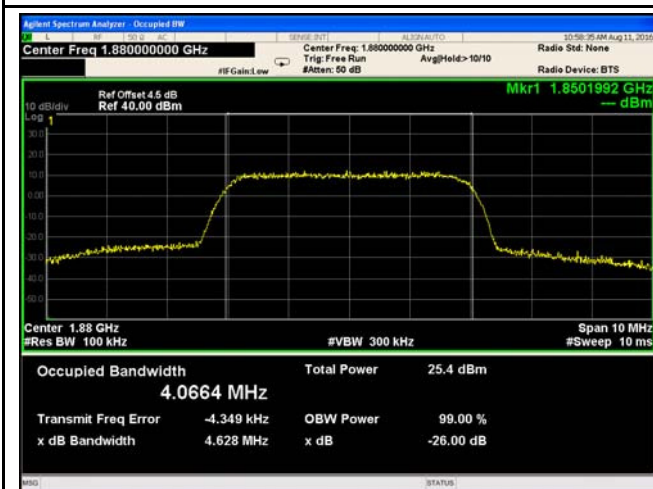

Band II BW - Mid CH 1880MHz

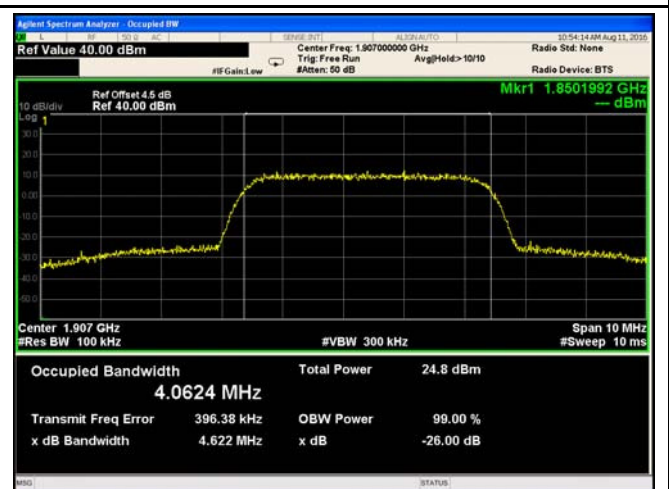

Band II BW - High CH 1907.6MHz