



**TEST REPORT CONCERNING THE COMPLIANCE
OF AN INDUCTIVE PROXIMITY CARD READER,
BRAND INTEGRATED ENGINEERING,
MODEL SMARTID USB, WITH 47 CFR PART 15 (2003-
12-08).**

FCC listed : 90828
Industry Canada : IC3501
VCCI registered : R-1518, C-1598

TNO Electronic Products & Services (EPS) B.V.
P.O. Box 15
9822 ZG Niekerk (NL)
Smidshornerweg 18
9822 TL Niekerk (NL)

Telephone: +31 594 505005
Telefax: +31 594 504804

E-mail: info@eps.tno.nl



Test specification(s): 47 CFR Part 15 (2003-07-22)
Description of EUT: Inductive proximity card reader
Manufacturer: Integrated Engineering B.V.
Brand mark: Integrated Engineering
Model: SmartID USB
FCC ID: P4E-SMARTPROX12

MEASUREMENT/TECHNICAL REPORT

Integrated Engineering B.V.

Model : SmartID USB

FCC ID: P4E-SMARTPROX12

August 24, 2004

| | | | | |
|---|---|------------------------|---------------------|--|
| This report concerns: | Original grant/certification | <u>Class 2 change</u> | <u>Verification</u> | |
| Equipment type: | Inductive proximity card reader | operating on 13.56 MHz | | |
| Deferred grant requested per 47 CFR 0.457(d)(1)(ii) ? | <u>Yes</u> | <u>No</u> | n.a. | |
| Report prepared by: | Name : J. Schuurmans Company name : TNO Electronic Products & Services (EPS) B.V. Address : Smidshornerweg 18 Postal code/city : 9822 ZG Niekerk Mailing address : P.O. Box 15 Postal code/city : 9822 TL Niekerk Country : The Netherlands Telephone number : + 31 594 505 005 Telefax number : + 31 594 504 804 E-mail : info@eps.tno.nl | | | |

The data taken for this test and report herein was done in accordance with 47 CFR Part 15 and the measurement procedures of ANSI C63.4-1992. TNO Electronic Products & Services (EPS) B.V. at Niekerk, The Netherlands, certifies that the data is accurate and contains a true representation of the emission profile of the Equipment Under Test (EUT) on the date of the test as noted in the test report. I have reviewed the test report and find it to be an accurate description of the test(s) performed and the EUT so tested.

Date: August 24, 2004

Signature:

P. de Beer, location manager
TNO Electronic Products & Services (EPS) B.V.



Test specification(s): 47 CFR Part 15 (2003-07-22)
Description of EUT: Inductive proximity card reader
Manufacturer: Integrated Engineering B.V.
Brand mark: Integrated Engineering
Model: SmartID USB
FCC ID: P4E-SMARTPROX12

Description of test item

Test item : Inductive proximity card reader operating on 13.56 MHz
Manufacturer : Integrated Engineering B.V.
Brand : Integrated Engineering
Model : SmartID USB
Serial number : 04345-0020
Revision : n.a.
Receipt number : 1
Receipt date : August 16, 2004

Applicant information

Applicant's representative : Mr. R.J. Hol slag
Company : Integrated Engineering B.V.
Address : Paasheuvelsweg 20
Postal code : 1105 BJ
City : Amsterdam
PO-box : n.a.
Postal code : n.a.
City : n.a.
Country : The Netherlands
Telephone number : + 31 (0)20 46 20 755
Telefax number : + 31 (0)20 46 20 756
Email address : info@ieprox.com
Website address : www.ieprox.com

Test(s) performed

Location : Niekerk
Test(s) started : August 18, 2004
Test(s) completed : August 24, 2004
Purpose of test(s) : Type approval / certification
Test specification(s) : 47 CFR Part 15 (2003-12-08)

Test engineer : J. Schuurmans

Report written by : J. Schuurmans

Project leader: J. Schuurmans

This report is in conformity with NEN-EN-ISO/IEC 17025: 2000.

This report shall not be reproduced, except in full, without the written permission of TNO Electronic Products & Services (EPS) B.V.

The test results relate only to the item(s) tested.



Test specification(s): 47 CFR Part 15 (2003-07-22)
Description of EUT: Inductive proximity card reader
Manufacturer: Integrated Engineering B.V.
Brand mark: Integrated Engineering
Model: SmartID USB
FCC ID: P4E-SMARTPROX12

Table of contents

| | | |
|-------|--|----|
| 1 | General information..... | 5 |
| 1.1 | Product description..... | 5 |
| 1.1.1 | Introduction..... | 5 |
| 1.1.2 | Choice of operating frequency..... | 5 |
| 1.1.3 | Operating principles..... | 5 |
| 1.2 | Related submittal(s) and/or Grant(s)..... | 5 |
| 1.3 | Tested system details..... | 5 |
| 1.4 | Test methodology..... | 6 |
| 1.5 | Test facility..... | 6 |
| 1.6 | Product labeling..... | 6 |
| 2 | System test configuration..... | 7 |
| 2.1 | Justification..... | 7 |
| 2.2 | EUT mode of operation..... | 7 |
| 2.3 | Special accessories..... | 7 |
| 2.4 | Equipment modifications..... | 7 |
| 2.5 | Configuration of the tested system..... | 7 |
| 2.6 | Block diagram of the EUT..... | 8 |
| 2.7 | Schematics of the EUT..... | 8 |
| 2.8 | Partlist of the EUT..... | 8 |
| 3 | Radiated emission data..... | 9 |
| 3.1 | Radiated field strength measurements (frequency range of 30-1000 MHz, E-field)..... | 9 |
| 3.2 | Radiated field strength measurements (frequency range of 0.009-30 MHz, H-field)..... | 10 |
| 4 | Conducted emission data..... | 11 |
| 5 | Carrier signal frequency stability..... | 12 |
| 5.1 | Stability with respect to temperature..... | 12 |
| 5.2 | Stability with power supply variation..... | 13 |
| 6 | List of utilized test equipment..... | 14 |



Test specification(s): 47 CFR Part 15 (2003-07-22)
Description of EUT: Inductive proximity card reader
Manufacturer: Integrated Engineering B.V.
Brand mark: Integrated Engineering
Model: SmartID USB
FCC ID: P4E-SMARTPROX12

1 General information.

1.1 Product description.

1.1.1 Introduction.

The inductive proximity reader, brand Integrated Engineering, model SmartID USB, is designed to function as a security measure. A key card in which a valid access code is stored is read by the inductive proximity reader. When the key card is in close proximity of the card reader the code will be transmitted and validated by a computer system which is connected to the reader itself.

1.1.2 Choice of operating frequency.

The operating frequency of the inductive proximity card reader brand Integrated Engineering, model SmartID USB, is 13.56 MHz (continuous carrier).

1.1.3 Operating principles.

The inductive proximity card reader is a DC powered system with an integral antenna. The inductive proximity card reader generates a RF-field at a frequency of 13.56 MHz. (continuous carrier) which activates the electronics in the key card. The activated key card then sends an identification code to the inductive proximity card reader by modulating the RF-field. The modulation of the 13.56 MHz RF-field can be detected and then the code is demodulated by the inductive proximity card reader. The code is then transmitted by a USB connection to the computer system for validation.

1.2 Related submittal(s) and/or Grant(s).

Not applicable.

1.3 Tested system details.

Details and an overview of the system and all of its components, as it has been tested, may be found in table 1 below. FCC ID's are stated in this overview where applicable. The EUT is listed in the first row of table 1. The EUT is powered using the USB power supply in the computer.

| Description | Manufacturer | Model number | Serial number | FCC ID | Cable descriptions |
|--|-----------------------------|--------------|---------------|-----------------|------------------------|
| Inductive cardreader | Integrated Engineering B.V. | SmartID USB | 04345-0020 | P4E-SMARTPROX12 | USB data cable |
| AC/DC power adapter Input: 120 VAC/60 Hz 15W/ Output: 9 VDC, 1A | Sceptre | PD9010APL5 | n.a. | n.a. (DoC) | DC power cable to EUT. |

Table 1 - Tested system details overview.



Test specification(s): 47 CFR Part 15 (2003-07-22)
Description of EUT: Inductive proximity card reader
Manufacturer: Integrated Engineering B.V.
Brand mark: Integrated Engineering
Model: SmartID USB
FCC ID: P4E-SMARTPROX12

1.4 Test methodology.

The test methodology used is based on the requirements of 47 CFR Part 15 (2003-12-08), sections 15.207, 15.205, 15.209 and 15.225

The test methods, which have been used, are based on ANSI C63.4: 1992.

Radiated emission tests above 30 MHz were performed at a measurement distance of 3 meters. Below 30 MHz the radiated emission tests were carried out at measurement distances of 3 and 10 meters. The test results regarding the radiated emission tests on frequencies below 30 MHz have been extrapolated in order to determine the field strength of the measured values at measurement distances of 30 and 300 meters (as required by 47 CFR Part 15).

The receivers are switching automatically to the right bandwidth in accordance with CISPR 16. This is implemented in the receiver. The antenna factors are programmed in the test receiver. The receiver automatically calculates the appropriate correction factor for the utilized antenna and also the appropriate antenna factor for the cable loss. The total correction is automatically added to the measured value.

1.5 Test facility.

The Federal Communications Commission has reviewed the technical characteristics of the test facilities at TNO Electronic Products & Services (EPS) B.V., located in Niekerk, 9822 TL Smidshornerweg 18, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 2, section 2.948, per October 23, 2000.

The description of the test facilities has been filed at the Office of the Federal Communications Commission under registration number 90828. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The list of all public test facilities is available on the Internet at <http://www.fcc.gov>.

1.6 Product labeling.

In accordance with 47 CFR Part 15.19 (a)(3) the following text shall be placed on a label, which is attached to the EUT:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

In accordance with 47 CFR Part 2.925 (a)(1), the FCC ID shall be placed on a label, which is attached to the EUT.

For further details about the labeling requirements (size, legibility, etc.) as set by the Federal Communications Commission see 47 CFR Part 15.19 (a)(3), 47 CFR Part 15.19 (b)(2), 47 CFR Part 15.19 (b)(4), 47 CFR Part 2.925 and 47 CFR Part 2.926.



Test specification(s): 47 CFR Part 15 (2003-07-22)
Description of EUT: Inductive proximity card reader
Manufacturer: Integrated Engineering B.V.
Brand mark: Integrated Engineering
Model: SmartID USB
FCC ID: P4E-SMARTPROX12

2 System test configuration.

2.1 Justification.

The system was configured for testing in a typical fashion (as a customer would normally use it). During all tests the EUT was set up to function in accordance with the manufacturer's instructions.

The justification and manipulation of cables and equipment in order to simulate a worst-case behaviour of the test setup has been carried out as prescribed in ANSI C63.4: 1992.

2.2 EUT mode of operation.

Radiated and conducted emission measurements were carried out when the system was active and was generating a continuous transmitting signal.

2.3 Special accessories.

No special accessories are used and/or needed to achieve compliance with the appropriate sections of 47 CFR Part 15.

2.4 Equipment modifications.

No modifications have been made to the equipment in order to achieve compliance with the appropriate sections of 47 CFR Part 15.

2.5 Configuration of the tested system.

| | | |
|-------------------------|---|---|
| Unit title | : | Inductive proximity card reader |
| Model number | : | SmartID USB |
| Part number | : | 500-8080 |
| FCC ID | : | P4E-SMARTPROX12 |
| Frequency range | : | 13.56 MHz (continuous carrier) |
| Description/details | : | see section 1.1 of this test report |
| Power supply | : | 5 V (USB power supply) |
| Clock Oscillator(s) | : | 13.56 Transmit, 22.1184 (CPU), 6 MHz (USB). |
| Cabinet & Screening | : | Plastic, Poly Urethane potting |
| Interface Cable(s) | : | USB |
| Method of screening | : | n.a. |
| Method of grounding | : | n.a. |
| Operating configuration | : | See section 1.3 of this test report |



Test specification(s): 47 CFR Part 15 (2003-07-22)
Description of EUT: Inductive proximity card reader
Manufacturer: Integrated Engineering B.V.
Brand mark: Integrated Engineering
Model: SmartID USB
FCC ID: P4E-SMARTPROX12

2.6 Block diagram of the EUT.

The block diagram is available in the technical documentation package.

2.7 Schematics of the EUT.

The schematics are available in the technical documentation package.

2.8 Partlist of the EUT.

The partlist is available in the technical documentation package.



Test specification(s): 47 CFR Part 15 (2003-07-22)
Description of EUT: Inductive proximity card reader
Manufacturer: Integrated Engineering B.V.
Brand mark: Integrated Engineering
Model: SmartID USB
FCC ID: P4E-SMARTPROX12

3 Radiated emission data.

3.1 Radiated field strength measurements (frequency range of 30-1000 MHz, E-field).

| Frequency (MHz) | Measurement results dB(µV)/m @ 3 metres Quasi-peak | | Limits dB(µV)/m @ 3 metres Quasi-peak | Margin (dB) Quasi-peak | | Result |
|-----------------|--|------------|---------------------------------------|------------------------|------------|--------|
| | Vertical | Horizontal | | Vertical | Horizontal | |
| 67.81 | 14.2 | 17.6 | 7.3 | 21.5 | 24.9 | 40.0 |
| 108.48 | 3.0 | - | 13.1 | 16.1 | 13.1 | 43.5 |
| 135.60 | 14.6 | 11.6 | 14.1 | 28.7 | 25.7 | 43.5 |
| 162.75 | 15.9 | 13.2 | 12.9 | 28.8 | 26.1 | 43.5 |
| 189.87 | 11.1 | 12.7 | 11.9 | 23.0 | 24.6 | 43.5 |
| 217.06 | 4.0 | 10.5 | 12.9 | 16.9 | 23.4 | 46.0 |
| 244.08 | 5.6 | 7.0 | 15.7 | 21.3 | 22.7 | 46.0 |
| 271.24 | 3.0 | - | 16.9 | 19.9 | 16.9 | 46.0 |
| 359.04 | 2.0 | 3.8 | 19.9 | 21.9 | 23.7 | 46.0 |
| 366.12 | 1.2 | 2.0 | 20.1 | 21.3 | 22.1 | 46.0 |
| 379.68 | 2.5 | 1.6 | 20.7 | 23.2 | 22.3 | 46.0 |
| 406.80 | 5.0 | 1.6 | 21.6 | 26.6 | 23.2 | 46.0 |
| 786.47 | 2.0 | - | 30.7 | 32.7 | 30.7 | 46.0 |

Table 2

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15, sections 15.205 and 15.209, with the EUT operating in continuous transmit mode on 13.56 MHz, are depicted in table 2.

Note: - Field strength values of radiated emissions at frequencies not listed in table 2 are more than 20 dB below the applicable limit.

Test engineer

Signature :

Name : J. Schuurmans

Date : August 23, 2004



Test specification(s): 47 CFR Part 15 (2003-07-22)
Description of EUT: Inductive proximity card reader
Manufacturer: Integrated Engineering B.V.
Brand mark: Integrated Engineering
Model: SmartID USB
FCC ID: P4E-SMARTPROX12

3.2 Radiated field strength measurements (frequency range of 0.009-30 MHz, H-field).

| Frequency (MHz) | Measurement results dB μ V Quasi-peak | | Antenna factor | Cable loss | Measurement results dB(μ V)/m Quasi-peak (calculated) | Limits Part 15.209 & 225 dB(μ V)/m |
|--------------------|---|-----------|----------------|------------|--|---|
| | 3 meters | 10 meters | | | | |
| 0.009 - 0.490 | <10.0 | n.a. | 20.5 | 1 | - | 28.5 – 13.8 (300 m) |
| 0.490 - 1.705 | <10.0 | n.a. | 19.5 | 1 | - | 33.8 - 22.9 (30 m) |
| 1.705 – 13.56 | < 10.0 | n.a. | 19.5 | 1 | - | 29.5 (30 m) |
| 13.110-13.410 | <10 | n.a. | 19.5 | 1 | - | 40.5 (30 m) |
| 13.410-13.553 | <10 | n.a. | 19.5 | 1 | - | 50.5 (30 m) |
| 13.553-13.567 | 48.1 | 26.0 | 19.5 | 1 | 25.38 | 84.0 (30m) |
| 13.567-13.710 | <10 | n.a. | 19.5 | 1 | - | 50.5 (30m) |
| 13.710—14.010 | <10 | n.a. | 19.5 | 1 | - | 40.5 (30m) |
| 27.124 | <10 | n.a. | 19.7 | 1 | - | 29.5 (30m) |

Table 3

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15, sections 15.205 and 15.209, with the EUT operating in continuous transmit mode on 13.56 kHz, are depicted in table 3.

Notes:

- A total work out of the calculated measurement result can be found in the Appendix 1.
- Frequency range: 9-90 kHz Average detector used during measurements
110-490 kHz Average detector used during measurements
- The radiated field strengths were measured at a distance of 3 and 10 meters. Measured field strengths at a distance of 10 meters were already below the limit of 30/300 meters
- n.a. indicates that no field strength values could be measured on the listed frequencies or in the listed frequency range
- Field strength values of radiated emissions at frequencies not listed in table 3 are more than 20 dB below the applicable limit

The EUT was varied in three positions, the loop antenna was varied in two orientations. The reported value is the worst case found at the reported frequency.

The EUT was tested in both normal mode (i.e. without a label in its proximity) and in activated mode (i.e. with a label in its proximity).

Test engineer

Signature

Name : J. Schuurmans

Date : August 23 , 2004



Test specification(s): 47 CFR Part 15 (2003-07-22)
Description of EUT: Inductive proximity card reader
Manufacturer: Integrated Engineering B.V.
Brand mark: Integrated Engineering
Model: SmartID USB
FCC ID: P4E-SMARTPROX12

4 Conducted emission data.

| Frequency (MHz) | Measurement results dB(µV) Neutral | | Measurement results dB(µV) Line 1 | | Limits dB(µV) | | Margin (dB) Neutral | | Margin (dB) Line 1 | | Result |
|--------------------|--|------|---|------|------------------|------|---------------------------|-------|--------------------------|-------|--------|
| | QP | AV | QP | AV | QP | AV | QP | AV | QP | AV | |
| 0.15 | 45.1 | 10.5 | 45.0 | 10.4 | 66.0 | 59.0 | -20.9 | -48.5 | -21.0 | -48.6 | PASS |
| 0.19 | 48.9 | 34.8 | 48.0 | 34.7 | 63.9 | 56.3 | -15.0 | -21.5 | -15.9 | -21.6 | PASS |
| 0.20 | 48.3 | 34.0 | 48.2 | 34.1 | 63.4 | 55.7 | -15.1 | -21.7 | -15.2 | -21.6 | PASS |
| 0.31 | 35.5 | 29.5 | 35.6 | 29.6 | 60.1 | 51.3 | -24.6 | -21.8 | -24.5 | -21.7 | PASS |
| 0.52 | 34.4 | 33.1 | 34.5 | 33.0 | 56.0 | 46.0 | -21.6 | -12.9 | -21.5 | -13.0 | PASS |
| 1.00 | 29.5 | 27.0 | 29.6 | 26.9 | 56.0 | 46.0 | -26.5 | -19.0 | -26.4 | -19.1 | PASS |
| 3.01 | 36.9 | 27.5 | 36.8 | 27.4 | 56.0 | 46.0 | -19.1 | -18.5 | -19.2 | -18.6 | PASS |
| 13.56 | 34.7 | 33.4 | 35.0 | 33.5 | 60.0 | 50.0 | -25.3 | -16.6 | -25.0 | -16.5 | PASS |
| 27.12 | 26.6 | 27.2 | 26.7 | 17.0 | 60.0 | 50.0 | -33.4 | -22.8 | -33.3 | -33.0 | PASS |

Table 4.

The results of the conducted emission tests, carried out in accordance with 47 CFR Part 15, section 15.207, at the 110 Volts AC mains connection terminals of the AC/DC power supply connected to the EUT and with the EUT operating in continuous transmit mode on 13.56 MHz, are depicted in table 4. The EUT was tested with and without card detected, however, no differences could be observed.

Test engineer

Signature :

Name : J. Schuurmans

Date : August 23, 2004

5 Carrier signal frequency stability.

5.1 Stability with respect to temperature

In the plots below are shown of the carrier signal, measured using a magnetic loop probe. The plot shows the carrier frequency at -20 degrees C, 20 degrees C and +50 degrees C. The stability is better than +/-0.01% as required for compliance with 47 CFR 15.225 (e).

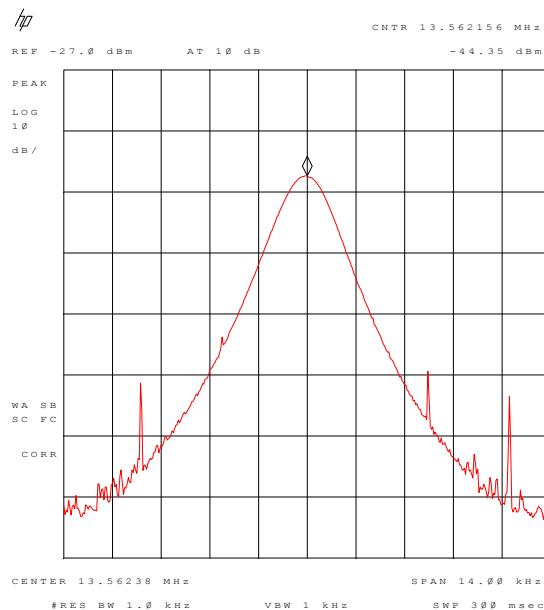


Figure 1: Spectrum of carrier at +20 degrees. 1 unit horizontally corresponds to 1.4 kHz, or 0.01%


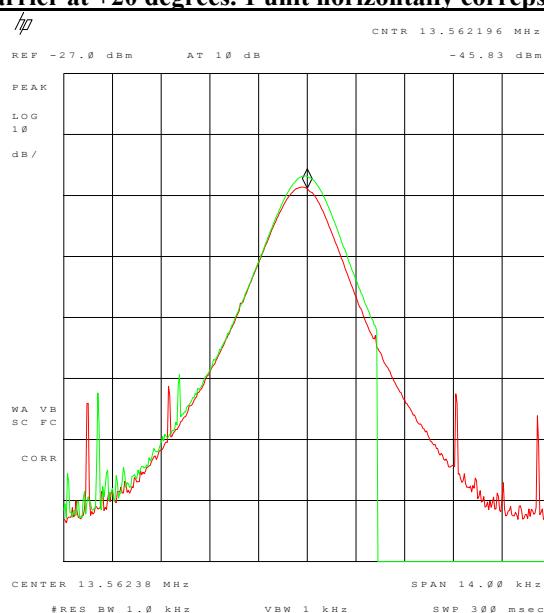


Figure 2 Spectrum of carrier at -20 degrees. 1 unit horizontally corresponds to 1.4 kHz, or 0.01%

The red trace is +20 degrees C, the green trace is -20 degrees C



Test specification(s): 47 CFR Part 15 (2003-07-22)
Description of EUT: Inductive proximity card reader
Manufacturer: Integrated Engineering B.V.
Brand mark: Integrated Engineering
Model: SmartID USB
FCC ID: P4E-SMARTPROX12

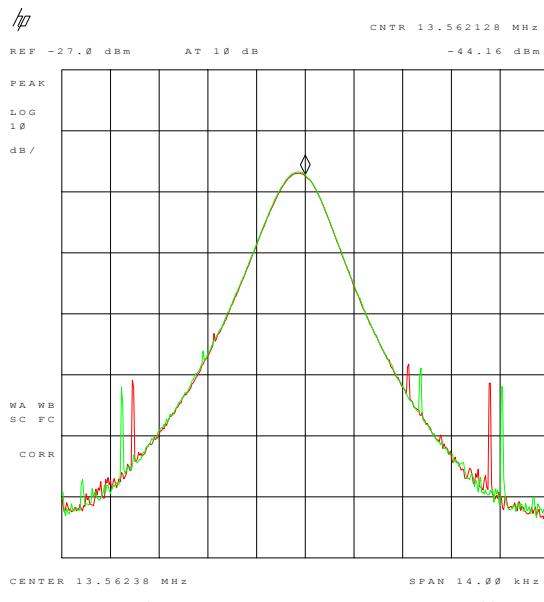


Figure 3 Spectrum of carrier at +50 degrees. 1 unit horizontally corresponds to 1.4 kHz, or 0.01%

The red trace corresponds to +20 degrees C, the green trace corresponds to +50 degrees C

5.2 Stability with power supply variation

While the mains voltage was varied from 85% (93.5 Vac) to 115% (126.5%) the carrier frequency varied less than 100 Hz. This is within the limits in 47 CFR 15.225 (e).

Test engineer

Signature

Name : J. Schuurmans

Date : August 23, 2004



Test specification(s): 47 CFR Part 15 (2003-07-22)
Description of EUT: Inductive proximity card reader
Manufacturer: Integrated Engineering B.V.
Brand mark: Integrated Engineering
Model: SmartID USB
FCC ID: P4E-SMARTPROX12

6 List of utilized test equipment.

| Inventory number | Description | Brand | Type |
|------------------|--------------------------------|-------------------|----------------------|
| 12471 | Biconical antenna 20MHz-200MHz | EATON | 94455-1 |
| 12473 | Log-per antenna 200-1000MHz | EATON | 96005 |
| 12476 | Antenna mast | EMCO | TR3 |
| 12477 | Antenna mast 1-4 mtr | Poelstra | -- |
| 12482 | Loop antenna | EMCO | 6507 |
| 12483 | Guidehorn | EMCO | 3115 |
| 12484 | Guidehorn | EMCO | 3115 |
| 12488 | Guidehorn 18 - 26.5 GHz | EMCO | RA42-K-F-4B-C |
| 12533 | Signalgenerator | MARCONI | 2032 |
| 12559 | Digital storage oscilloscope | Le Croy | 9310M |
| 12561 | DC Power Supply 20A/70V | DELTA | SM7020D |
| 12567 | Plotter | HP | 7440A |
| 12605 | calibrated dipole 28MHz-1GHz | Emco | 3121c |
| 12608 | HF milliwattmeter | Hewlett Packard | HP435a |
| 12609 | Power sensor 10MHz-18GHz | Hewlett Packard | HP8481A |
| 12636 | Polyester chamber | Polyforce | -- |
| 12640 | Temperature chamber | Heraeus | VEM03/500 |
| 13664 | Spectrum analyzer | HP | HP8593E |
| 13078 | Preamplifier 0.1 GHz - 12 GHz | Miteq | AMF-3D-001120-35-14p |
| 13452 | Digital multi meter | HP | 34401A |
| 13526 | Signalgenerator 20 GHz | Hewlett & Packard | 83620A |
| 13594 | Preamplifier 10 GHz - 25 GHz | Miteq | AMF-6D-100250-10p |
| 13886 | Open Area testsite | Comtest | -- |
| 14051 | Anechoic room | Comtest | -- |
| 14450 | 2.4 GHz bandrejectfilter | BSC | XN-1783 |
| 15633 | Biconilog Testantenna | Chase | CBL 6111B |
| 15667 | Measuring receiver | R&S | ESCS 30 |
| 99045 | DC Power Supply 3A/30V | DELTA | E030/3 |
| 99055 | Non-conducting support | NMi | -- |
| 99061 | Non-conducting support 150cm | NMi | -- |
| 99068 | Detector N-F/BNC-F | Radiall | R451576000 |
| 99069 | Cable 5m RG214 | NMi | -- |
| 99071 | Cable 10m RG214 | NMi | -- |
| 99076 | Bandpassfilter 4 - 10 GHz | Reactel | 7AS-7G-6G-511 |
| 99077 | Regulating trafo | RFT | LTS006 |
| 99112 | Tripod | Chase | -- |
| 99136 | Bandpassfilter 10 - 26.5 GHz | Reactel | 9HS-10G/26.5G-S11 |



Test specification(s): 47 CFR Part 15 (2003-07-22)
Description of EUT: Inductive proximity card reader
Manufacturer: Integrated Engineering B.V.
Brand mark: Integrated Engineering
Model: SmartID USB
FCC ID: P4E-SMARTPROX12

Appendix 1

Calculated measurements results radiated field strength, H-Field

Calculated measurements results radiated field strength, H-Field

General Formula:

d_s = short distance; H_s is field strength at short distance

d_l = long distance; H_l is field strength at long distance

$$(d_s/d_l)^n = H_l/H_s \dots \dots \dots \text{[eq1]}$$

$$n \log(d_s/d_l) = \log(H_l/H_s) \text{ or } n = \log(H_l/H_s) / \log(d_s/d_l)$$

Calculation of n, for measured field strengths

$$H_s = 67.6 \text{ dB}\mu\text{V/m} = 2398.8 \mu\text{V/m}$$

$$H_l = 45.5 \text{ dB}\mu\text{V/m} = 188.4 \mu\text{V/m}$$

$$n = \log(188.4/2398.8) / \log(3/10)$$

$$n = 2.11$$

Calculated field strength at new distance, from the 10 meter value:

H_s now becomes $H_s = 188.4 \mu\text{V/m}$ and $d_s=10$

Assume $d_l = 30$

Now from [eq1] H_l becomes:

$$H_l = H_s * (d_l/d_s)^{-n}$$

$$\text{So } H_l = 188.4 * (30/10)^{-2.11} = 18.59 \mu\text{V/m} \text{ or } 25.38 \text{ dB}\mu\text{V/m}$$