


Mobile Touch 'Mobi' Block Diagram

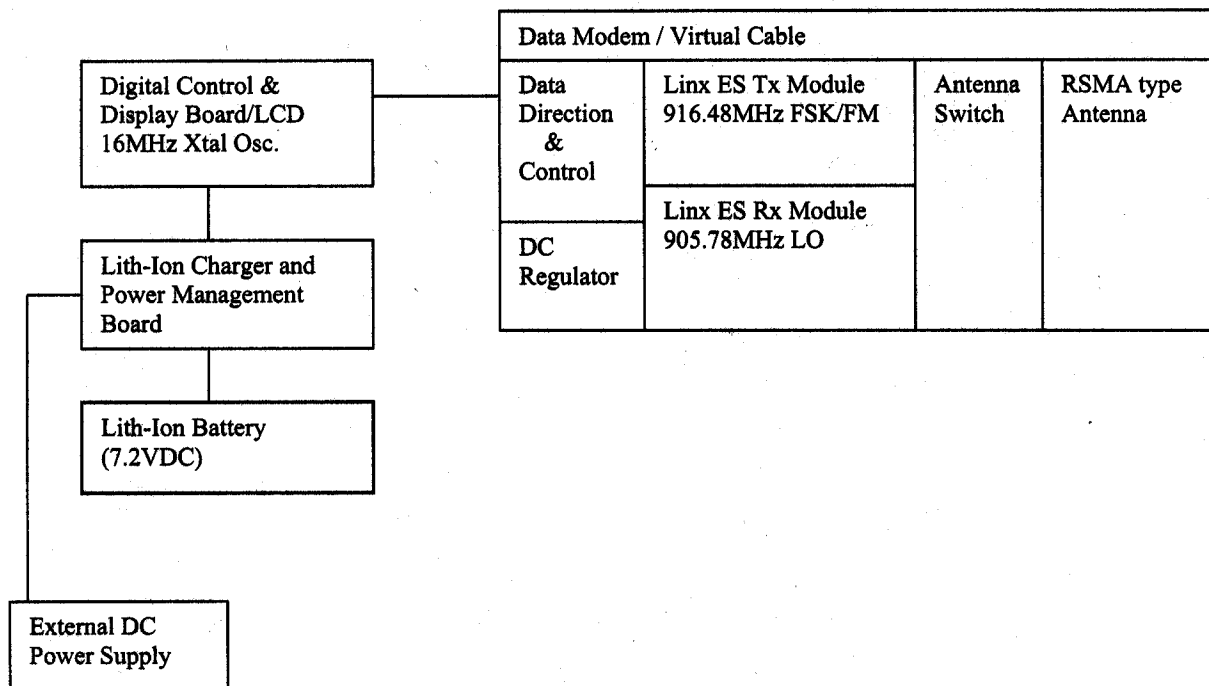

Normal Operation:

The system has a very low duty cycle. Typically less than 1% Transmit on time. When not transmitting the direction detection and control circuit reverts back to 'listen' mode, and the Transmit module/stage is powered down.

Data between the digital control/display electronics and the transceiver has a max rate of 9600 bits per second, and an average duty of 1%. I.e. small data bursts.

NOTICE:

All information and records attached, enclosed or otherwise presented herein that pertains to the business of Pentair Pool Products, Inc. (PPP, Inc.), and/or its customers/suppliers/employees are strictly confidential. This confidential information may only be used for legitimate PPP, Inc. business purposes. Disclosure to anyone, whether inside or outside of PPP, Inc., except where required in furtherance of a legitimate PPP, Inc. business purpose is expressly prohibited. In the event you are unsure about the confidential nature of any information attached, enclosed or otherwise presented herein, or if you have any questions concerning what constitutes an authorized disclosure of confidential information, you are directed to seek clarification from an authorized PPP, Inc. official.