


COMPUTER GENERATED DOCUMENT
MANUAL CHANGES NOT ALLOWED.



REVISIONS					
PCO	REV.	DESCRIPTION	DATE	DRWN	CHKD
10332	A	MOBI COMPONENTS 2	05/09/03		
	-	REDRAWN IN SOLIDWORKS WITHOUT CHANGE	7/25/2006	JG	
	B.1	CHANGED FOR MOBI 2	7/25/2006	DWS	
	B.2	UPDATED LABE FOR UL REQUIREMENTS	4/9/2007	DWS	
	B.3	CHANGED FCC/IC ID	2/26/2008	DWS	
	B.04	CHANGED MODEL NAME FROM: MOBILETOUCH TO: MOBILETOUCH 2	5/6/2008	DWS	

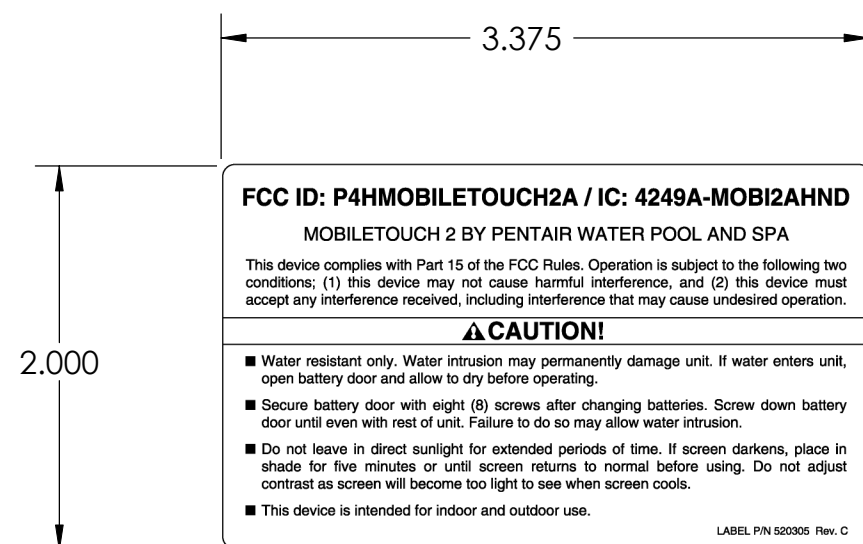


– R.050

1. MATERIAL: 3302-33 7860 TH/TR 3M 2MTL WHITE POLYESTER 3001-10 10092 CLASSIC PLUS 1 MIL CLEAR LAMINATE OR APPROVED EQUIVALENT.
2. INTERPRET DIMENSIONS AND TOLERANCING IN ACCORDANCE WITH ASME Y14.5-1994.
3. OVAL SYMBOL (X.XXX) DENOTES CRITICAL DIMENSION.
4. REVISION SYMBOL (X) DENOTES LAST CHANGE.
5. THE SOLID GEOMETRIC MODEL ASSOCIATED WITH THE DRAWING MUST BE CONSIDERED A PART OF THE SPECIFICATION FOR THE PART AND MUST BE REFERED TO FOR FEATURES THAT CANNOT BE DETERMINED BY DIMENSIONS ON THE DRAWING. THIS DRAWING IS TO CONFORM TO SOLIDWORKS GEOMETRY MODEL: 520305
6. COLOR: BACKGROUND WHITE, TEXT BLACK, UV RESISTANT.

NOTES: UNLESS OTHERWISE SPECIFIED,

<div>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: .X OR X/X ± 1/64 .XX ± .01 .XXX ± .005 ANGULAR ± 1° REMOVE ALL BURRS & BREAK SHARP EDGES .010 MAXIMUM EXCEPT AT P/L & SHUT OFF'S ALL DIAMETERS TO BE CONCENTRIC WITHIN .005 T.I.R. THIRD ANGLE PROJECTION</div> <div></div>	DO NOT SCALE DRAWING		<div>1620 HAWKINS AVE. SANFORD, NC 27330</div>	
	SIGNATURES	DATE	TITLE <div>LABEL SAFETY MOBI</div>	
	DRAWN	JG 3/22/2006		
	CHKD			
	SEE PCO FOR APPROVAL SIGNATURES			
		SIZE	DWG NO.	REV.
		B		520305 B.4
		SCALE	1:1	SHEET 1 OF 1

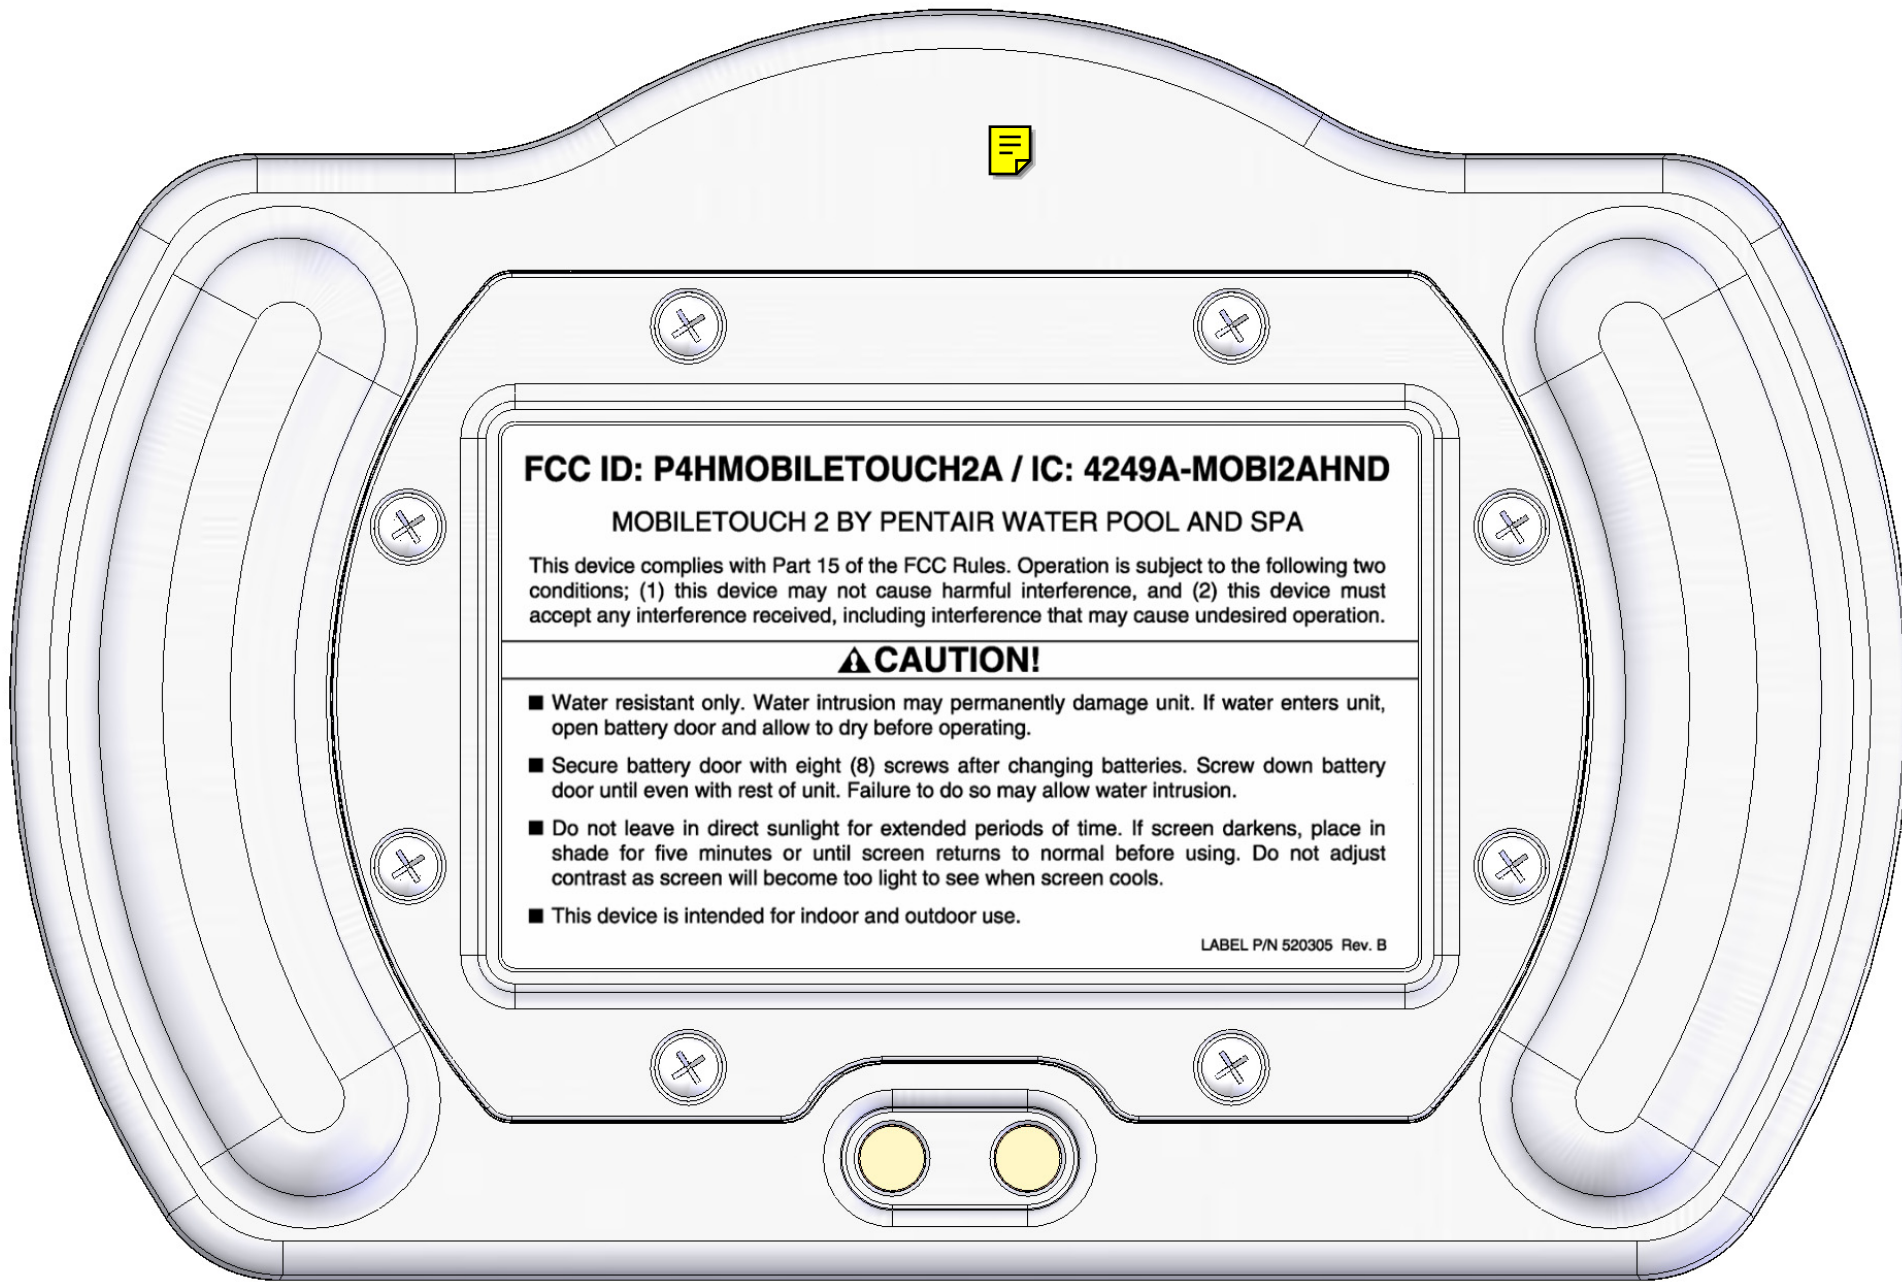

FCC ID: P4HMOBILETOUCH2A / IC: 4249A-MOBi2AHND

MOBILETOUCH 2 BY PENTAIR WATER POOL AND SPA

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions; (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

⚠ CAUTION!

- Water resistant only. Water intrusion may permanently damage unit. If water enters unit, open battery door and allow to dry before operating.
- Secure battery door with eight (8) screws after changing batteries. Screw down battery door until even with rest of unit. Failure to do so may allow water intrusion.
- Do not leave in direct sunlight for extended periods of time. If screen darkens, place in shade for five minutes or until screen returns to normal before using. Do not adjust contrast as screen will become too light to see when screen cools.
- This device is intended for indoor and outdoor use.

LABEL P/N 520305 Rev. B

