


Fujian Flaircomm Microelectronics, Inc.

Bluetooth module

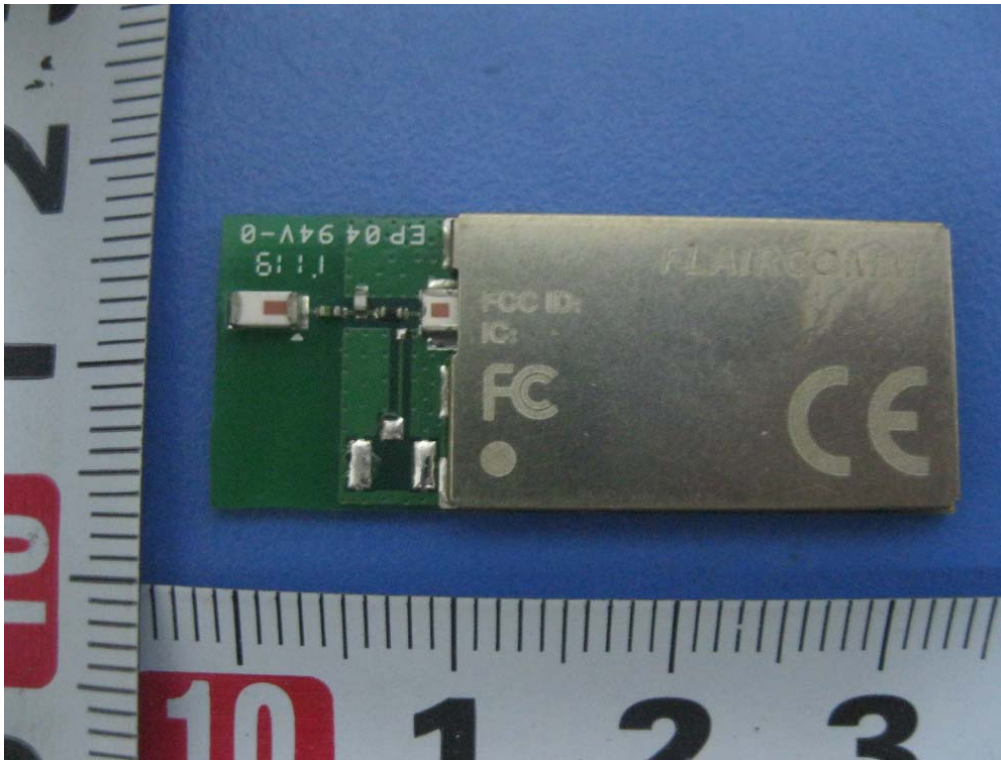


Main Model: FLC-BTM403IQ2A
Serial Model: See P5

October 30, 2012
Report No.: 12020708-FCC-R1
(This report supersedes NONE)



Modifications made to the product : None

This Test Report is Issued Under the Authority of:

		
Alan Lv Compliance Engineer	Alex Liu Technical Manager	

This test report may be reproduced in full only.
Test result presented in this test report is applicable to the representative sample only.

RF Exposure Report

To: FCC 2.1091: 2012

SIEMIC, INC.
Accessing global markets



Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to [testing](#) and [certification](#), SIEMIC provides initial design reviews and [compliance management](#) through out a project. Our extensive experience with [China](#), [Asia Pacific](#), [North America](#), [European](#), and [international](#) compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the [global markets](#).

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC , RF/Wireless , Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless , Telecom
Taiwan	BSMI , NCC , NIST	EMC, RF, Telecom , Safety
Hong Kong	OFTA , NIST	RF/Wireless ,Telecom
Australia	NATA, NIST	EMC, RF, Telecom , Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF , Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC , RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom , Safety

Accreditations for Product Certifications

Country/Region	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC , RF , Telecom
Canada	IC FCB , NIST	EMC , RF , Telecom
Singapore	iDA, NIST	EMC , RF , Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC, (RCB 208)	RF , Telecom
Hong Kong	OFTA (US002)	RF , Telecom

This page has been left blank intentionally.

CONTENTS

1. EXECUTIVE SUMMARY & EUT INFORMATION.....5

2. TECHNICAL DETAILS6

3. MAXIMUM PERMISSIBLE EXPOSURE (MPE)7

FCC §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE).....7

1. EXECUTIVE SUMMARY & EUT INFORMATION

The purpose of this test programme was to demonstrate compliance of the Fujian Flaircomm Microelectronics, Inc. Bluetooth module and model: FLC-BTM403IQ2A against the current Stipulated Standards. The Bluetooth module has demonstrated compliance with the FCC 2.1091: 2012.

EUT Information

- EUT Description** : Bluetooth module
- Main Model** : FLC-BTM403IQ2A
- Serial Model** : FLC-BTM403VQ2A, FLC-BTM403IQ2B , FLC-BTM403VQ2B, FLC-BTM403IQ2C ,FLC-BTM403VQ2C
- Antenna Gain** : 0.5 dBi
- Input Power** : Voltage Range: 2.7 ~ 3.6V DC
- Classification Per Stipulated Test Standard** : FCC 2.1091: 2012

NOTE: According to the description of the FLC-BTM403 Datasheet and Declaration letter, the BTM403B can be decision belong to BTM403A's serial model. So BTM403B do not need to do the test.(Please refer to the Declaration letter in page 83/84/85 of report 12020708-FCC-R1 and the FLC-BTM403 Datasheet page 38).

2. TECHNICAL DETAILS

Purpose	Compliance testing of Bluetooth module with stipulated standard
Applicant / Client	Fujian Flaircomm Microelectronics, Inc. 7F, Guomai Building, 116 East JiangBin Ave, Fuzhou, Fujian, China
Manufacturer	Fujian Flaircomm Microelectronics, Inc. 7F, Guomai Building, 116 East JiangBin Ave, Fuzhou, Fujian, China
Laboratory performing the tests	SIEMIC Nanjing (China) Laboratories NO.2-1, Longcang Dadao, Yuhua Economic Development Zone, Nanjing, China Tel: +86(25)86730128/86730129 Fax: +86(25)86730127 Email: info@siemic.com
Test report reference number	12020708-FCC-R1
Date EUT received	August 23, 2012
Standard applied	FCC 2.1091: 2012
Dates of test	August 28 to October 09, 2012
No of Units	#1
Equipment Category	mobile device
Trade Name	N/A
RF Operating Frequency (ies)	2402-2480MHz
Number of Channels	79 CH
Modulation	GFSK, $\pi/4$-DQPSK, 8DPSK
FCC ID	P4IBTM403

3. MAXIMUM PERMISSIBLE EXPOSURE (MPE)

FCC §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz
 * = Plane-wave equivalent power density

Test Data

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

Where: S = power density (in appropriate units, e.g. mW/cm²)
 P = power input to the antenna (in appropriate units, e.g., mW).
 G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.
 R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

GFSK Modulation:

Maximum peak output power at antenna input terminal: 17.63 (dBm)
 Maximum peak output power at antenna input terminal: 57.94 (mW)

Prediction distance: >20 (cm)
 Predication frequency: 2402-2480 (MHz)
 Antenna Gain (typical): 0.5 (dBi)
 Antenna Gain (typical): 1.122 (numeric)

The worst case is power density at predication frequency at 20 cm: 0.0129 (mW/cm²)
MPE limit for general population exposure at prediction frequency: 1 (mW/cm²)

0.0129 (mW/cm²) < 1 (mW/cm²)

Result: Pass

Note: The EUT has the maximum peak output power. in the GFSK Modulation, so we only show one modulation in the report.