



TTI-P-G-166/98-30

Accredited Bluetooth Test Facility (BQTF)

Test report no.: 2_2863-01-02/02

FCC Part 22.901 (d)

NOKIA D311 Type DTE-3

FCC ID: P4JDTE-3

CETECOM – ICT Services GmbH

Untertürkheimerstr. 6-10

66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0

Fax: + 49 (0) 681 / 9075

Table of Contents

1 **General information**

- 1.1 **Notes**
- 1.2 **Testing laboratory**
- 1.3 **Details of applicant**
- 1.4 **Application details**
- 1.5 **Test item**
- 1.6 **Test standards**

2 **Technical test**

- 2.1 **Summary of test results**
- 2.2 **Test report**

1 **General information**

1.1 **Notes**

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

1.2 **Testing laboratory**

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telephone : + 49 681 598 - 9100

Telefax : + 49 681 598 - 9075

E-mail : Michael.Berg@ict.cetecom.de

Internet : www.cetecom.de

Accredited testing laboratory

DAR-registration number : TTI-P-G-166/98-30

Accredited Bluetooth™ Test Facility (BQTF)

BLUETOOTH™ is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM

1.3 Details of applicant

Name : Nokia Mobile Phones / TCC Salo
Street : P.O. Box 86 (Joensuunkatu 7 E / Kiila 1 B)
City : FIN-24101 Salo
Country : Finland
Telephone : +358 (0) 7180 42913
Telefax : +358 (0) 7180 42920
Contact : Mr. Jarkko Luoma
Telephone : +358 (0) 7180 42913

1.4 Application details

Date of receipt of application : 04.04.2002
Date of receipt of test item : 24.04.2002
Date of test : 24.-26.04.2002
Re-issued : 01.07.2002

1.5 Test item

Type of equipment : **Dual Band GSM PCMCIA Card (PCS 850 / 1900 MHz) with 2.4 GHz RLAN**
Type designation : NOKIA D311, Type DTE-3
Manufacturer : Applicant
Street :
City :
Country :
Serial number : 976000716; IMEI : 001004100753483
Additional informations:
Frequency range : 824 - 849 MHz
Type of modulation : 300KGXW
Number of channels : 124
Antenna : Integral antenna and socket
Power supply : 5V via PCMCIA Slot
Output power : 0,870W Peak , ERP : 0.537 W (Burst); EIRP:0.851 W (Burst)
Type of equipment : Temperature range : -30°C - +60°C
FCC – ID : P4JDTE-3
Hardware : 0303
Software : 2.02

1.6 Test standards: **FCC Part 22.901 (d)**

2 Technical test

The radiated measurements were performed vertical and horizontal over the whole frequency range. We start at 1 m high with vertical receiving antenna and rotate the dish continuously. During rotation we use the antenna lift system to vary the high from 1 to 4 m. So we find maximum radiation output. At this points we do manual re-measurements. After this we do the same measurements in horizontal position of the receiving antenna. This (horizontal and vertical) is made for all the three planes of the test sample. We use the maximum received results.


All measurements was done based on ANSI C63.4.

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

FINAL VERDICT: PASS

Technical responsibility for area of testing :

2002-04-29	RSC 8411	Berg M.	
Date	Section	Name	Signature

Technical responsibility for area of testing :

2002-04-29	RSC8412	Hausknecht D.	
Date	Section	Name	Signature

2.2 Testreport

TEST REPORT

Test report no. : 2_2863-01-02/02

TEST REPORT REFERENCE


LIST OF MEASUREMENTS

PARAMETER TO BE MEASURED Paragraph	PAGE
POWER OUTPUT 10	SUBCLAUSE § 24.232
FREQUENCY STABILITY 12	SUBCLAUSE § 24.235
AFC FREQ ERROR vs. VOLTAGE	13
AFC FREQ ERROR vs. TEMPERATURE	13
EMISSIONS LIMITS 15	§24.238
NO RADIATED EMISSIONS LESS THAN 20 DB BELOW THE LIMIT WAS FOUND !	16
OCCUPIED BANDWIDTH 48	§2.989
EMISSION LIMITATIONS FOR CELLULAR 55	§22.917(F)




Ref Lvl
-22 dBm

RBW 30 kHz RF Att 0 dB
VBW 30 kHz
SWT 70 ms Unit dBm

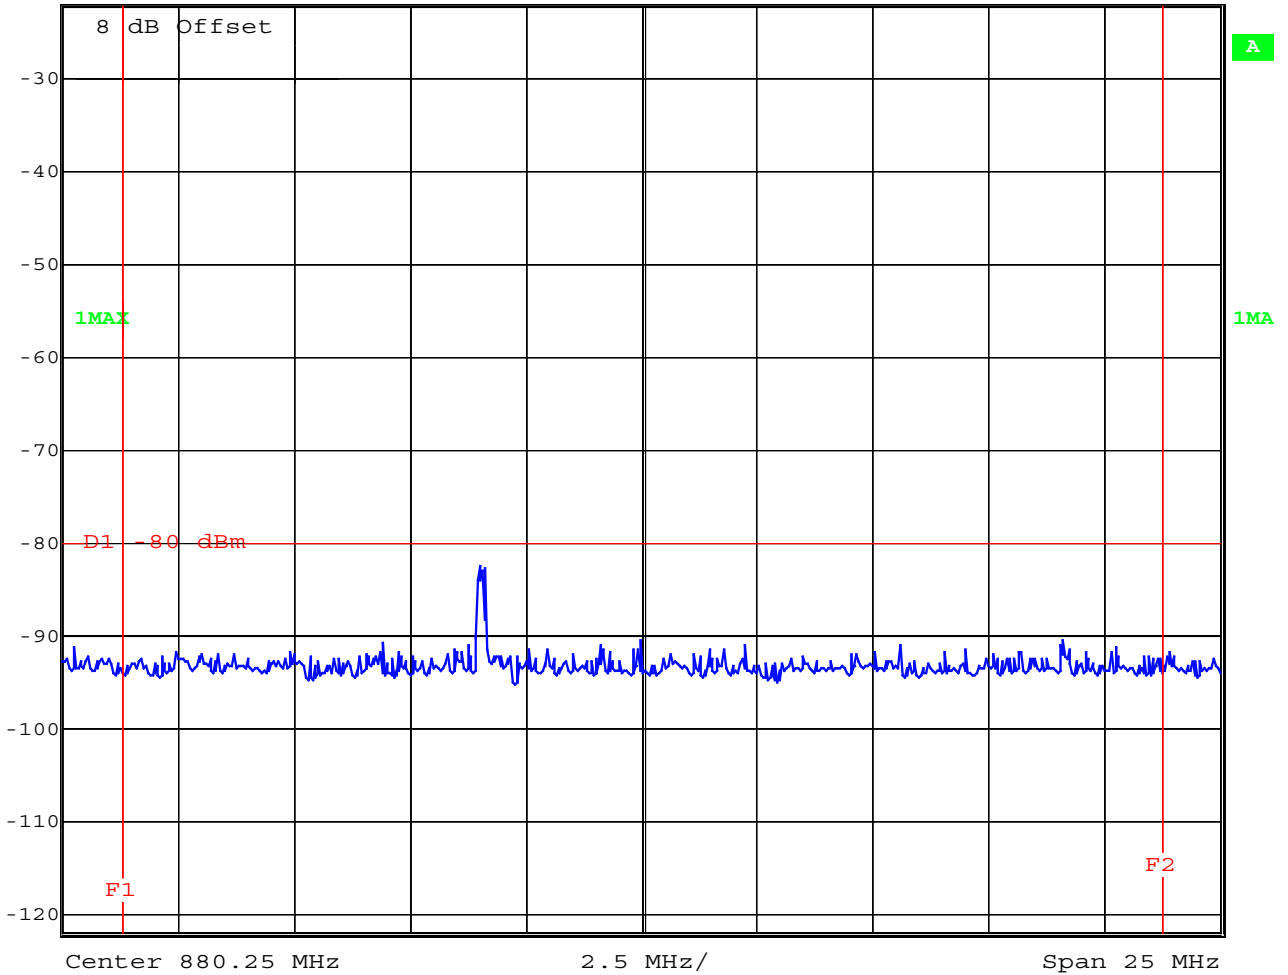


Date: 24.MAY.2002 09:29:02

	Marker 1 [T1]	RBW	30 kHz	RF Att	0 dB
	Ref Lvl	-82.16 dBm	VBW	30 kHz	
	-22 dBm	877.70180361 MHz	SWT	380 ms	Unit dBm

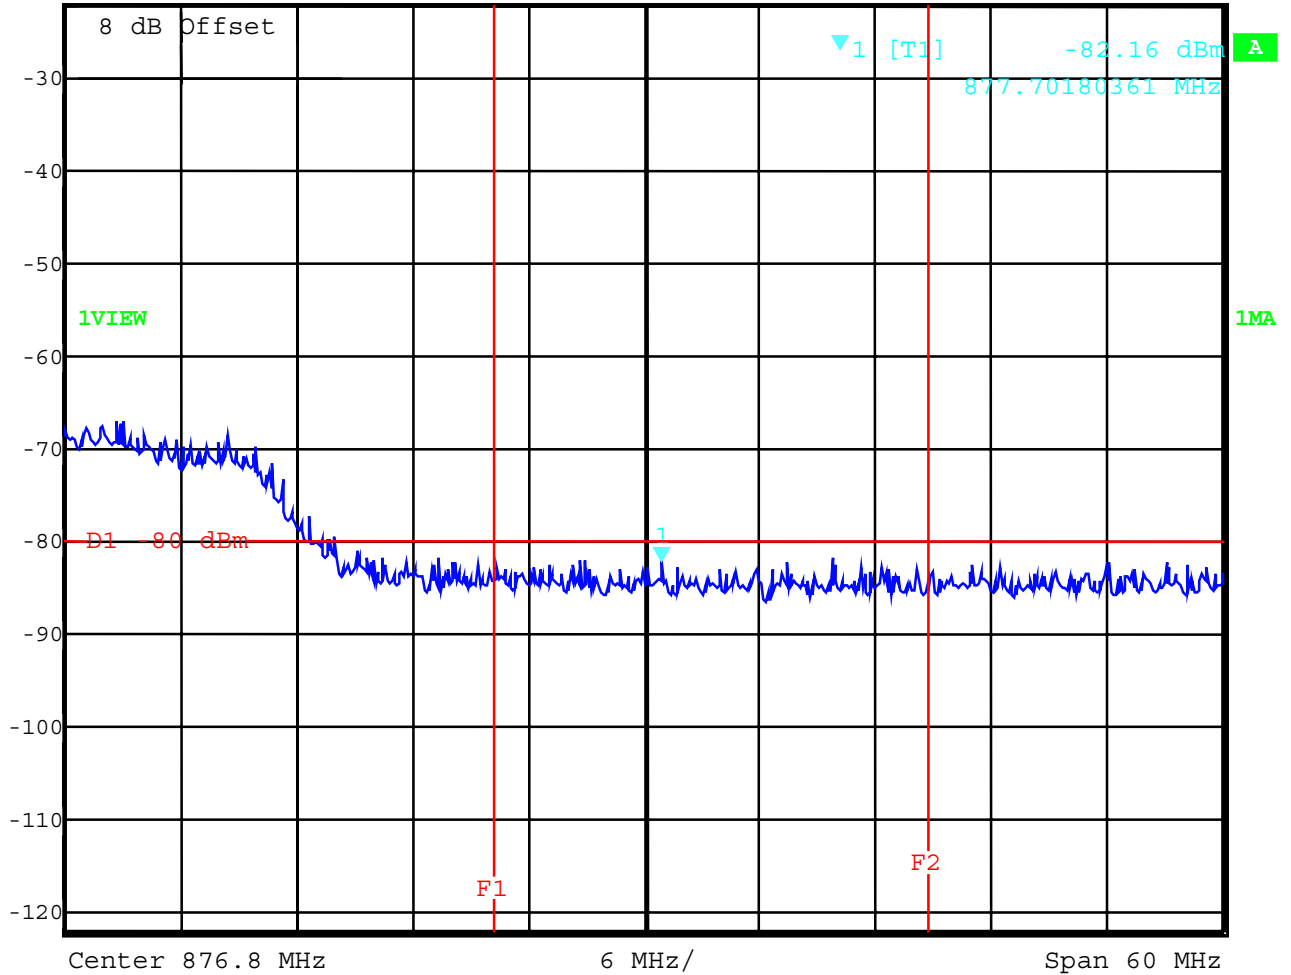

Date: 24.MAY.2002 09:51:28

	OVLD	Marker 2 [T1]	RBW	30 kHz	RF Att	0 dB
	Ref Lvl	-85.22 dBm	VBW	30 kHz	Mixer	-20 dBm
	-22 dBm	878.89939880 MHz	SWT	380 ms	Unit	dBm

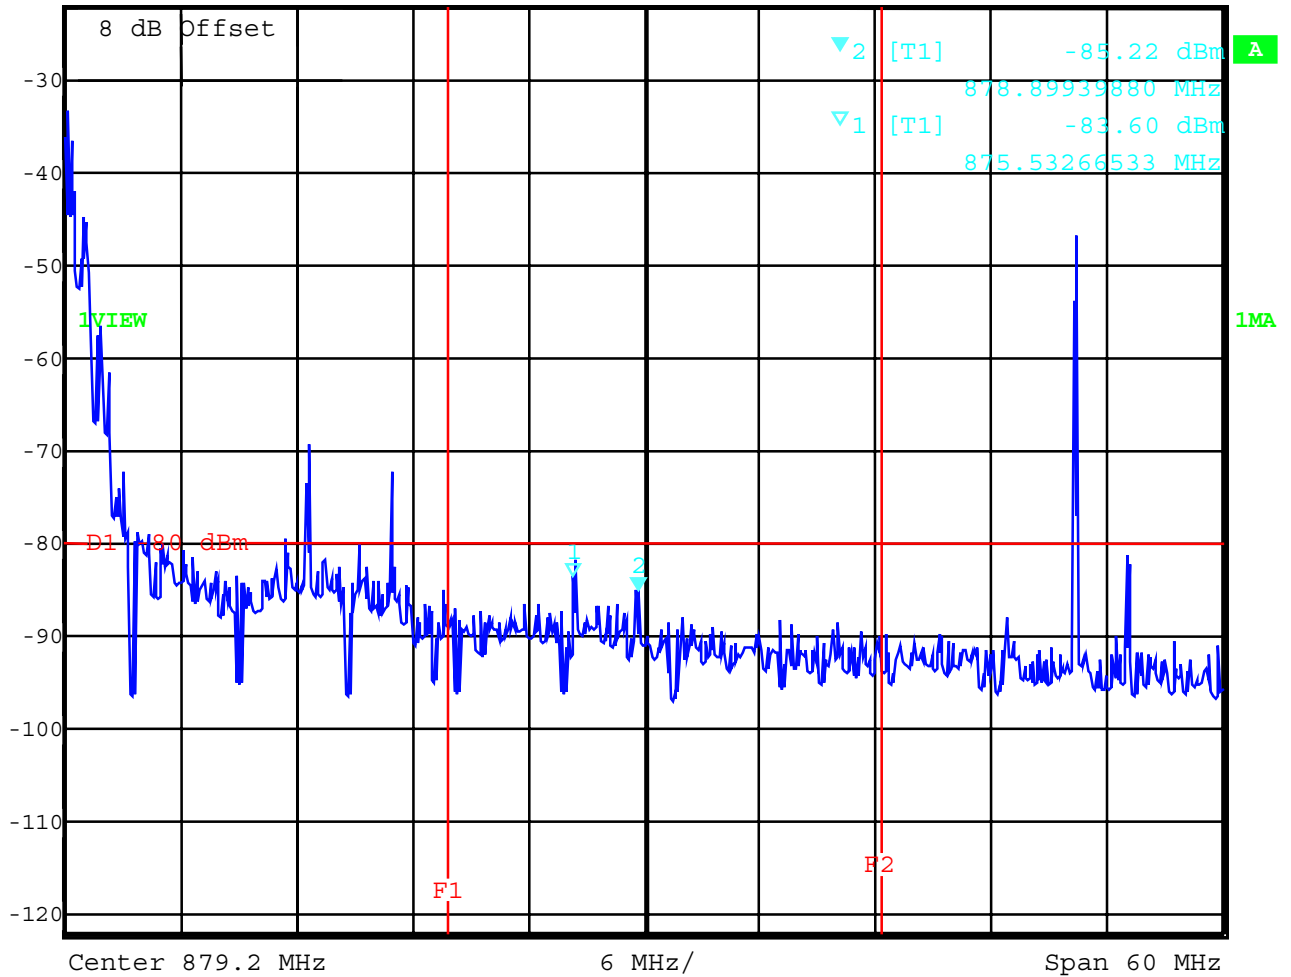

Date: 24.MAY.2002 10:01:10

POWER OUTPUT

SUBCLAUSE § 24.232

Summary:

This paragraph contains both average , peak output powers and EIRP measurements for the mobile station.

In all cases, the peak output power is within the required mask (this mask is specified in the JTC standarts, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with Hewlett Packard Power meter E4419B (peak and average)

This measurements were done at 3 frequencies, 824.22 MHz, 836.6 MHz and 848.8 MHz (bottom, middle and top of operational frequency range)

Peak power and Average power was measured with a calibrated Power Meter (HP E4419B).

Average power is the integrated Power over Time from the modulated GSM Signal in the CW-mode measured in burst

Limits:

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
0	+30	± 2

Power Measurements:

Conducted:

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average Output Power (dBm)
824.2	7	29.39	29.27
836.6	7	29.31	29.21
848.8	7	29.14	29.03
Measurement uncertainty		±0.5 dB	

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

12 , 14

EIRP Measurements

Description: This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Method of Measurement:

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference center of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
2. A "reference path loss" is established as $Pin + 2.1 - Pr$.
3. The EUT is substituted for the dipole at the reference centre of the chamber. The EUT is put into CW test mode and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
5. The EUT is then put into pulse mode at its maximum power level (Power Step 0).
6. "Gated mode" power measurements are performed with the receiving antenna placed at the co-ordinates determined in Step 3 to determine the output power as defined in FCC Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (Pin).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.1 \text{ dBi}$.

Limits:

Power Step	Burst Average EIRP (dBm)
0	<33

Power Measurements:

Radiated:

Frequency (MHz)	Power Step	BURST AVERAGE (dBm)		MODULATION AVERAGE (dBm)	
		EIRP	ERP	EIRP	ERP
824.2	7	29.0	26.9	20.0	17.9
836.6	7	29.1	27.0	20.1	18.0
848.8	7	29.3	27.2	20.3	18.2
Measurement uncertainty		±3 dB			

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

FREQUENCY STABILITY

SUBCLAUSE § 24.235

Method of Measurement:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a “call mode”. This is accomplished with the use of a R&S CMD 65 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with 3.6 Volts, connected to the CMD 65 and in a simulated call on channel 661 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal 5,0 Volts. Vary supply voltage from minimum 4.75 Volts to maximum 5.25 Volts, in 0.05 Volt increments remeasuring carrier frequency at each voltage. Pause at 5.00 V dc
Volts for 1 1/2 hours unpowered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with 5.0 Volts, connected to the CMD 65 and in a simulated call on channel 190(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

Measurement Limit:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.. This transceiver is specified to operate with an input voltage of between 4.75 Vdc and 5.25 Vdc, with a nominal voltage of 5.0 Vdc (powered via Laptop/PCMCIA Slot). Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of + 5 % and – 5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)



AFC FREQ ERROR vs. VOLTAGE

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
4,75	-17	-0,0000203	-0,0203
4,80	-33	-0,0000394	-0,0394
4,85	-29	-0,0000347	-0,0347
4,90	-24	-0,0000287	-0,0287
4,95	-21	-0,0000251	-0,0251
5,00	-29	-0,0000347	-0,0347
5,05	-35	-0,0000418	-0,0418
5,10	-30	-0,0000359	-0,0359
5,15	-22	-0,0000263	-0,0263
5,20	-27	-0,0000323	-0,0323
5,25	-16	-0,0000191	-0,0191

AFC FREQ ERROR vs. TEMPERATURE

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-30	-29	-0,0000347	-0,0347
-20	-10	-0,0000120	-0,0120
-10	-29	-0,0000347	-0,0347
±0.0	-15	-0,0000179	-0,0179
+10	-15	-0,0000179	-0,0179
+20	-31	-0,0000371	-0,0371
+30	-13	-0,0000155	-0,0155
+40	-11	-0,0000131	-0,0131
+50	-23	-0,0000275	-0,0275
+60	-21	-0,0000251	-0,0251

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

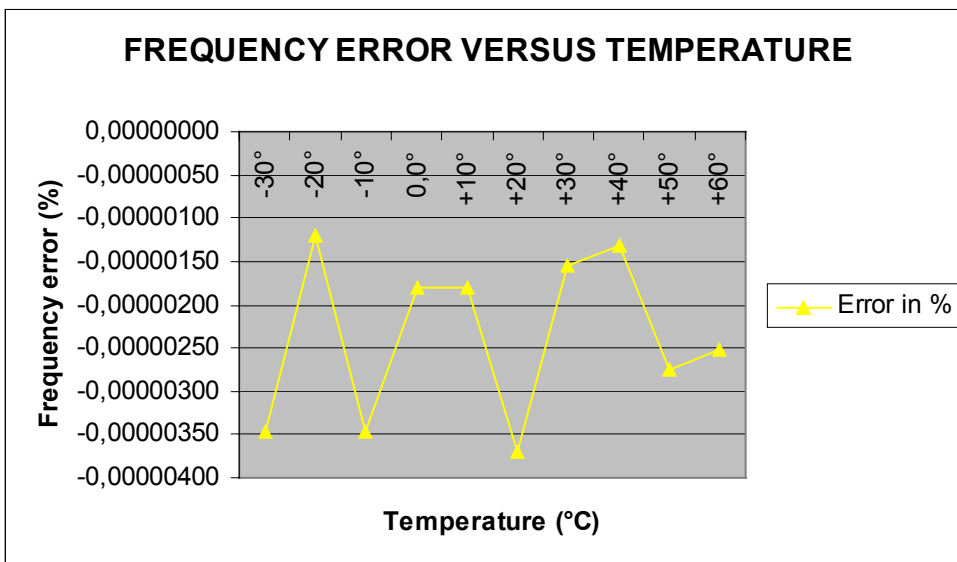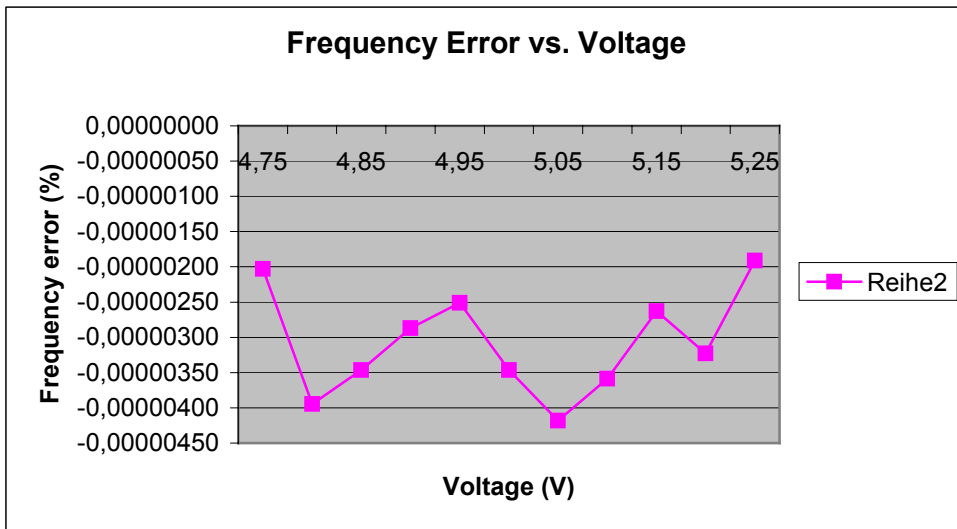

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

EMISSIONS LIMITS

§24.238

Measurement Procedure:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC to be in compliance for a 3 and a10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission test procedure is as follows:

- The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- The antenna output was terminated in a 50 ohm load.
- A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters using the equation shown below:

$$P_g = E^2 4\pi d^2 / 120\pi = E^2 d^2 / 30$$

where : P = power in watts
g = arithmetic gain of transmitting antenna over isotropic radiator.
E = maximum field strength in volts/meter
d = measurement distance in meter

Using a dipole gain of 1.67 or 2.2 dB and a test distance of 3 meters, this equation reduces to:

$$P(\text{dBm}) = E(\text{dBuV/m}) - 97.2\text{dB}$$

Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10\log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10\log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Measurement Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (824.2 MHz, 836.6 MHz and 848.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

No Radiated Emissions less than 20 dB below the limit was found !

As can be seen from this data, the emissions from the test item were within the specification limit. The plots are made to have an overview on which frequencies we have to the substitutions method

Channel 128

Data File : /22863_35.DOC

25 Apr 2002

No	EMISSION	SPEC LIMIT	MEASUREMENTS			POL	SITE		CORR FACTOR	COMMENTS
	FREQUENCY MHz		ABS	dLIM	MODE		HGT	AZM		
		dBuV/m		dB		cm	deg			
1	66.4	29.5	23.1	-6.4	PK	H	99	0	N/T	
2	132.3	33.0	25.3	-7.7	PK	H	99	0	N/T	
3	191.7	33.0	21.6	-11.4	PK	H	327	0	N/T	
4	198.9	33.0	24.4	-8.6	PK	H	99	0	N/T	
5	240.8	35.5	25.2	-10.3	PK	H	99	360	N/T	
6	297.9	35.5	24.9	-10.7	PK	H	328	0	N/T	
7	813.270	35.5	23.9	-11.6	QP	H	341	313	24.2	
8	821.9	35.5	103.	68.1	PK	H	99	360	N/T	LINK
9	866.8	35.5	37.1	1.6	PK	H	328	0	N/T	LINK
10	874.1	35.5	37.1	1.6	PK	H	328	0	N/T	LINK

N/T in CORR FACTOR column denotes a non-traceable signal.

Channel 190

Data File : /22863_30.DOC

25 Apr 2002

No	EMISSION	SPEC LIMIT	MEASUREMENTS			POL	SITE		CORR FACTOR	COMMENTS
	FREQUENCY MHz		ABS	dLIM	MODE		HGT	AZM		
			dBuV/m	dB		cm	deg			
1	66.4	29.5	24.1	-5.4	PK	V	100	0	N/T	
2	99.3	33.0	21.7	-11.3	PK	V	100	0	N/T	
3	120.2	33.0	21.1	-11.9	PK	H	333	316	N/T	
4	132.6	33.0	24.8	-8.2	PK	V	100	0	N/T	
5	191.7	33.0	21.9	-11.1	PK	H	333	360	N/T	
6	198.9	33.0	22.8	-10.2	PK	V	100	0	N/T	
7	240.8	35.5	25.7	-9.8	PK	V	99	0	N/T	
8	298.7	35.5	24.4	-11.1	PK	V	99	0	N/T	
9	398.3	35.5	29.5	-6.0	PK	V	328	360	N/T	
10	497.9	35.5	31.5	-4.0	PK	V	99	0	N/T	
11	824.3	35.5	33.9	-1.6	PK	V	99	0	N/T	LINK
12	825.9	35.5	38.9	3.4	PK	V	328	360	N/T	LINK
13	834.9	35.5	103.	68.3	PK	V	99	0	N/T	LINK
14	836.6	35.5	52.8	17.3	PK	V	328	360	N/T	LINK
15	874.1	35.5	37.0	1.5	PK	V	328	360	N/T	LINK
16	879.8	35.5	37.9	2.4	PK	V	328	360	N/T	LINK
17	964.089	43.5	33.0	-10.5	QP	H	306	298	25.8	



Channel 251

Data File : /22863_25.DOC

25 Apr 2002



No	EMISSION	SPEC LIMIT	MEASUREMENTS			POL	SITE		CORR FACTOR	COMMENTS
	FREQUENCY MHz		ABS	dLIM	MODE		HGT	AZM		
			dBuV/m	dB		cm	deg			
1	66.2	29.5	23.4	-6.1	PK	V	97	0	N/T	
2	99.5	33.0	22.4	-10.6	PK	V	97	0	N/T	
3	132.3	33.0	24.2	-8.8	PK	V	97	0	N/T	
4	191.7	33.0	22.4	-10.6	PK	H	331	44	N/T	
5	198.9	33.0	25.4	-7.6	PK	V	97	0	N/T	
6	210.6	33.0	21.8	-11.2	PK	V	100	360	N/T	
7	240.8	35.5	26.5	-9.0	PK	V	100	360	N/T	
8	297.9	35.5	24.3	-11.3	PK	V	100	360	N/T	
9	396.7	35.5	28.9	-6.6	PK	V	100	360	N/T	
10	599.1	35.5	32.0	-3.6	PK	V	100	360	N/T	
11	848.865	35.5	114.	79.4	PK	V	311	348	24.7	LINK
12	874.1	35.5	37.9	2.4	PK	H	330	360	N/T	LINK
13	891.2	35.5	36.5	1.0	PK	H	330	360	N/T	LINK

Channel 128 : 1 – 12 GHz (vertical)

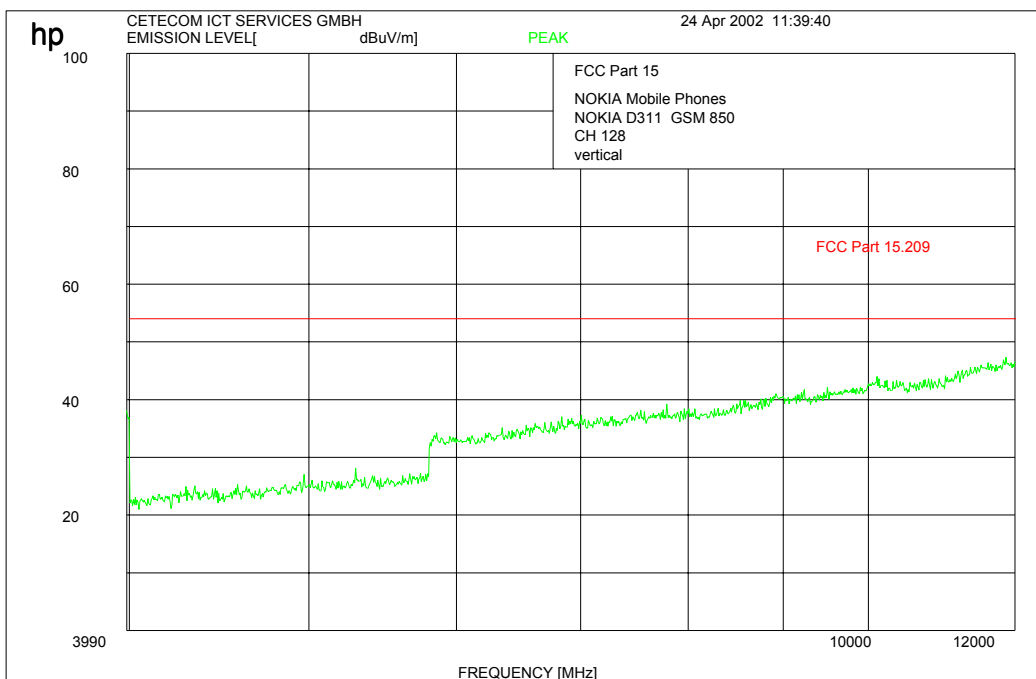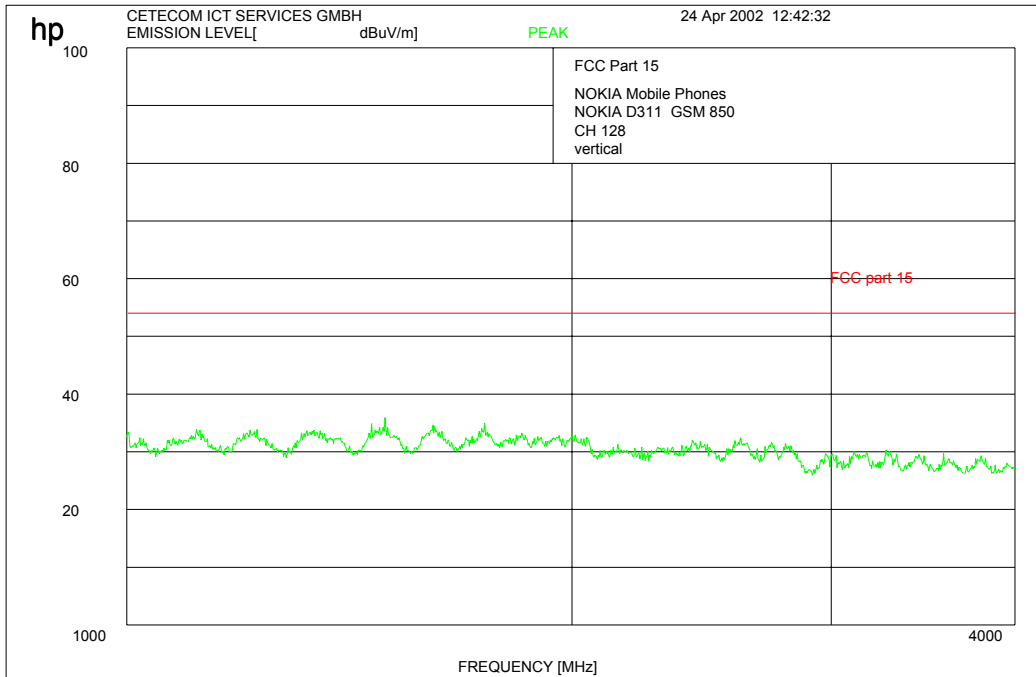

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 128 : 1 – 12 GHz (horizontal)

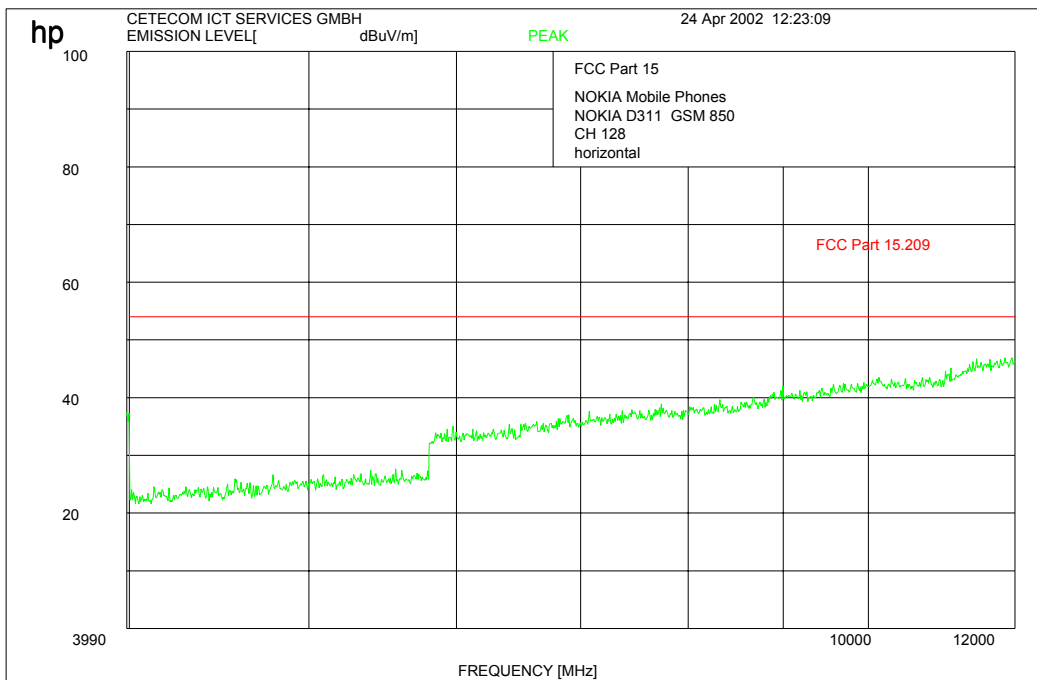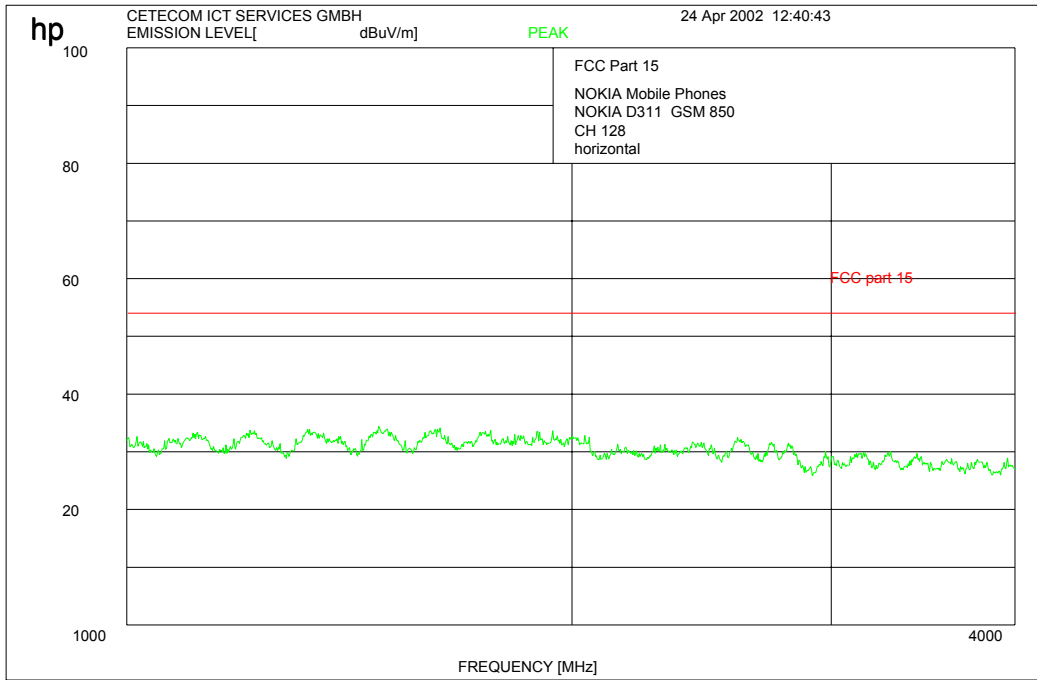


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 128 : 12 – 20 GHz





Marker 1 [T1] RBW 1 MHz RF Att 0 dB
 Ref Lvl 38.76 dBμV VBW 1 MHz
 87 dBμV 12.00000000 GHz SWT 46 ms Unit dBμV

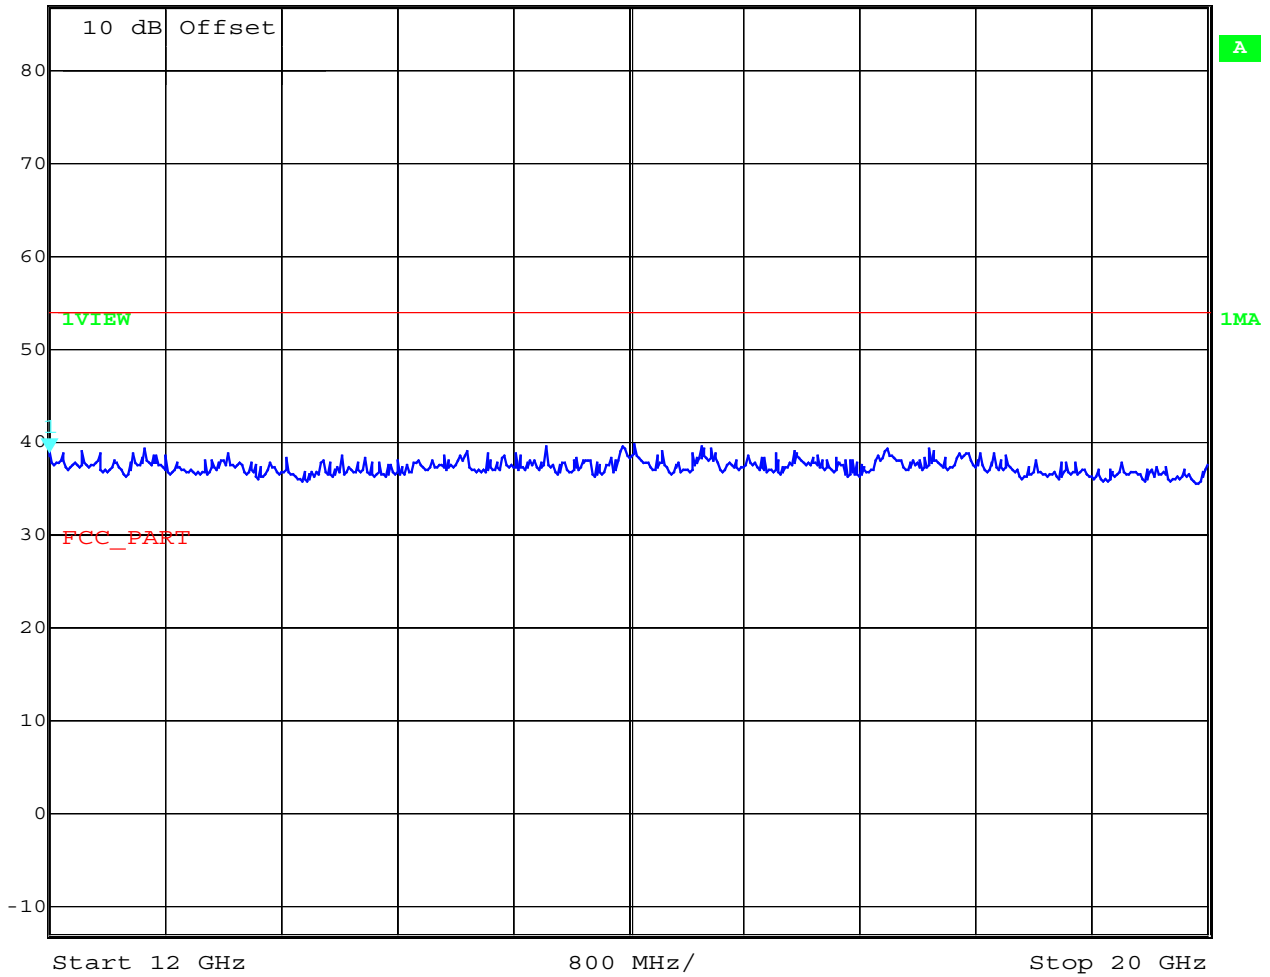

Date: 25.APR.2002 12:07:53



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 190 (up to 1 GHz vertical)

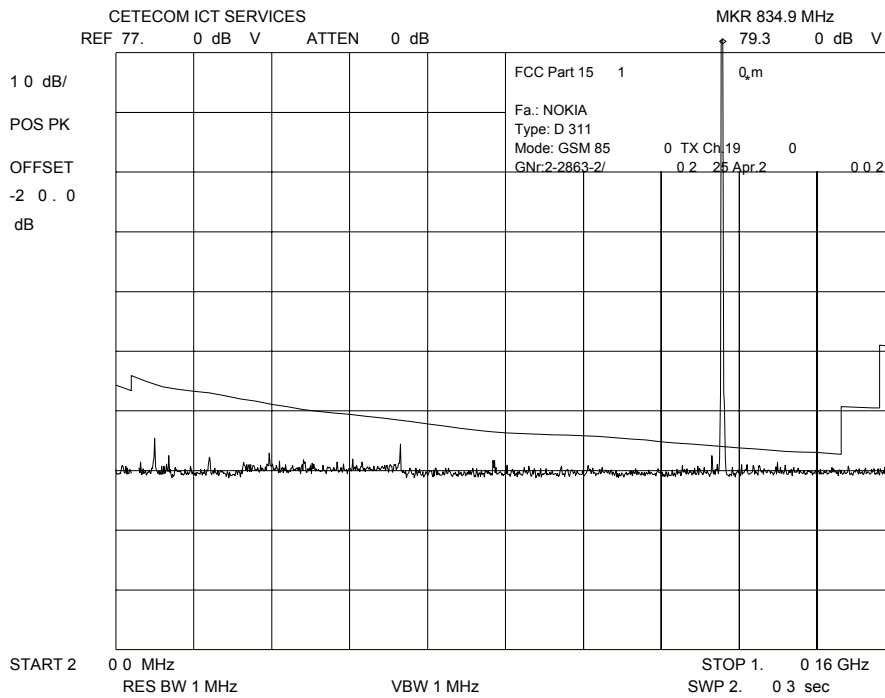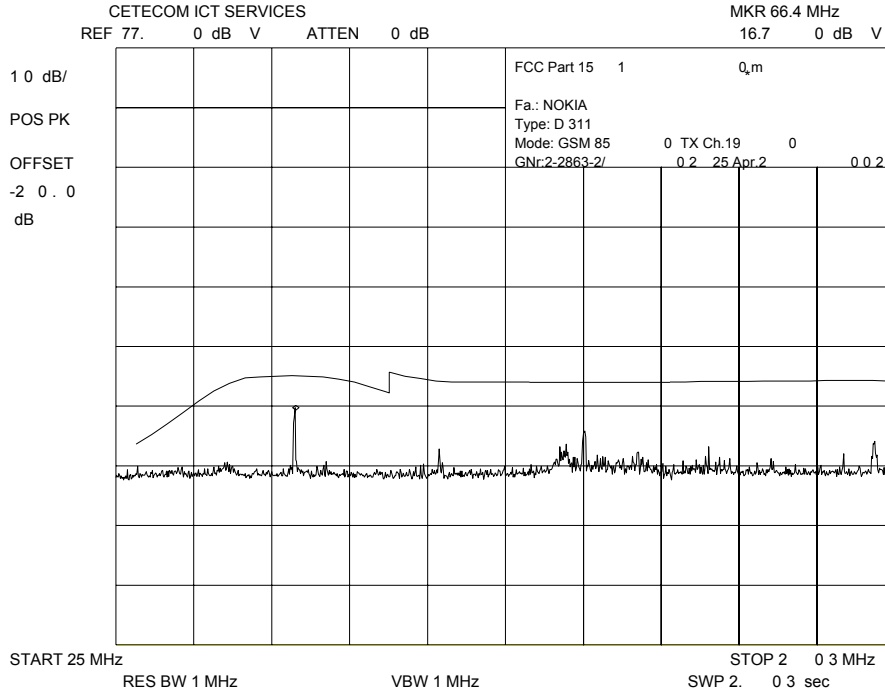



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 190 (up to 1 GHz horizontal)

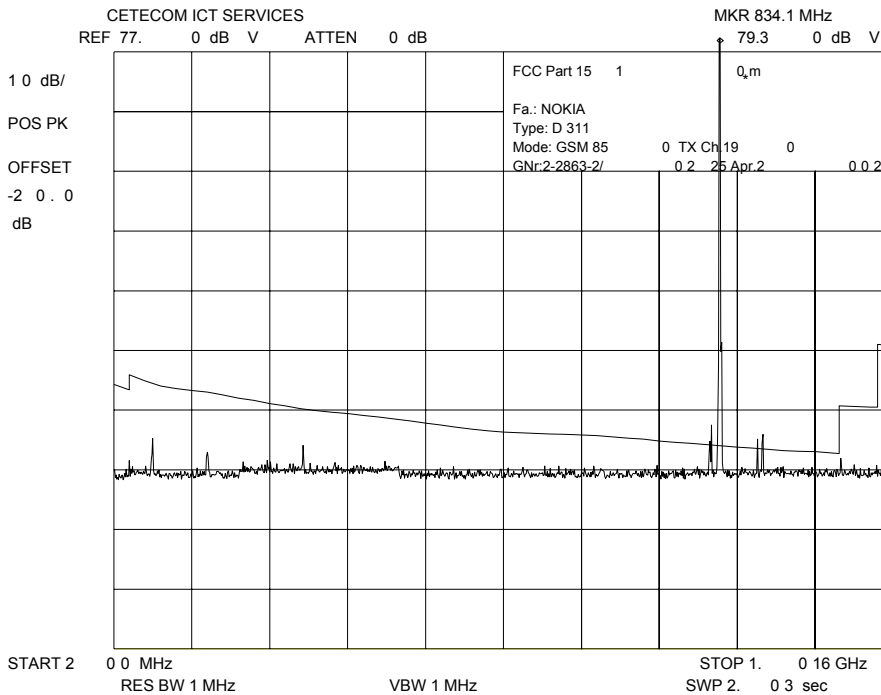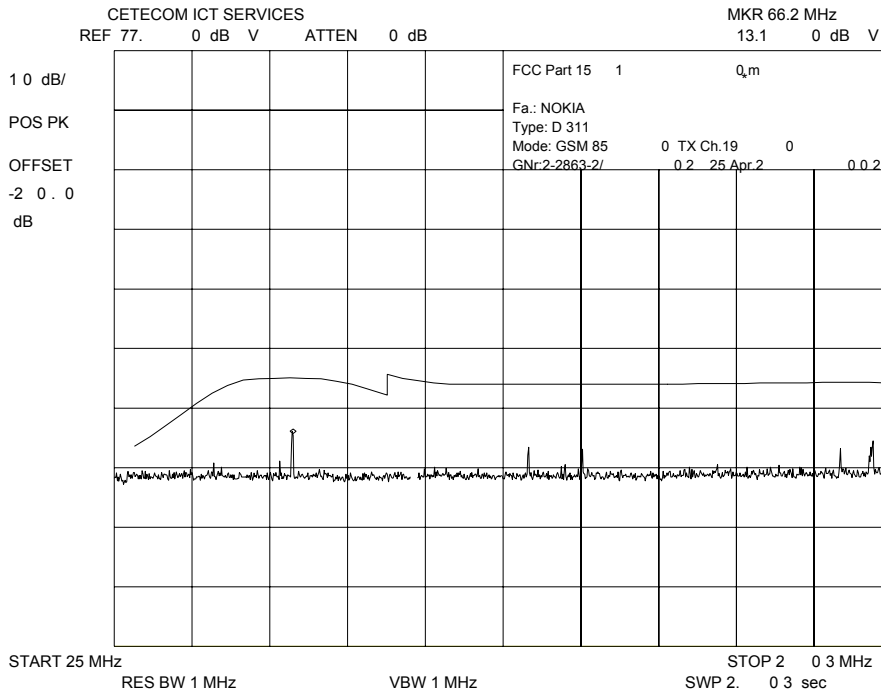



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 190 : 1 – 12 GHz (vertical)

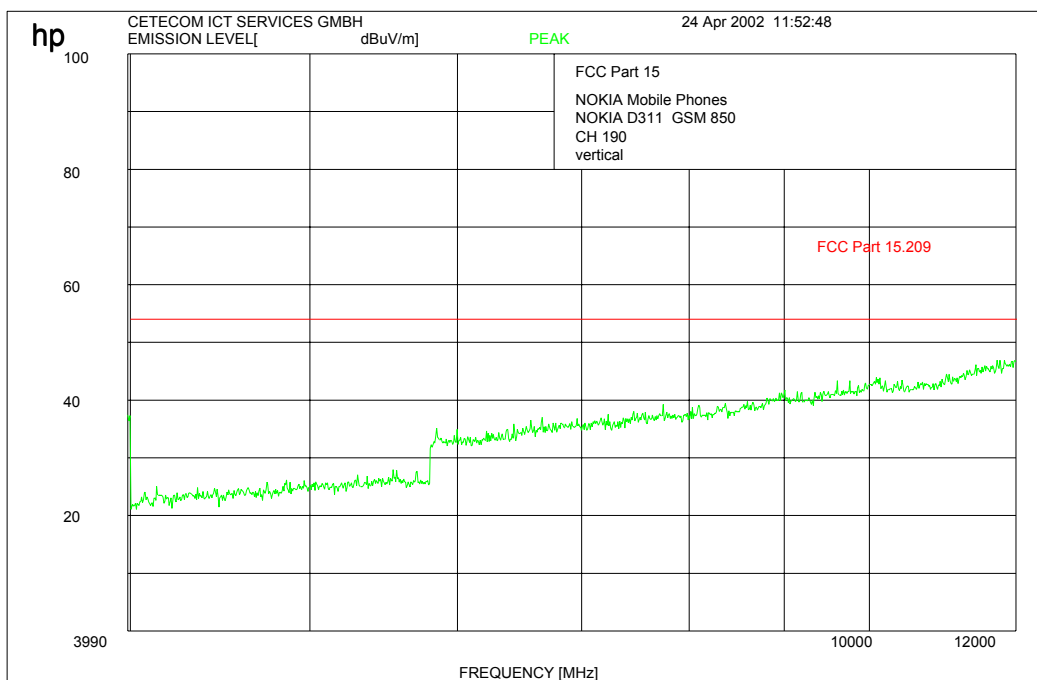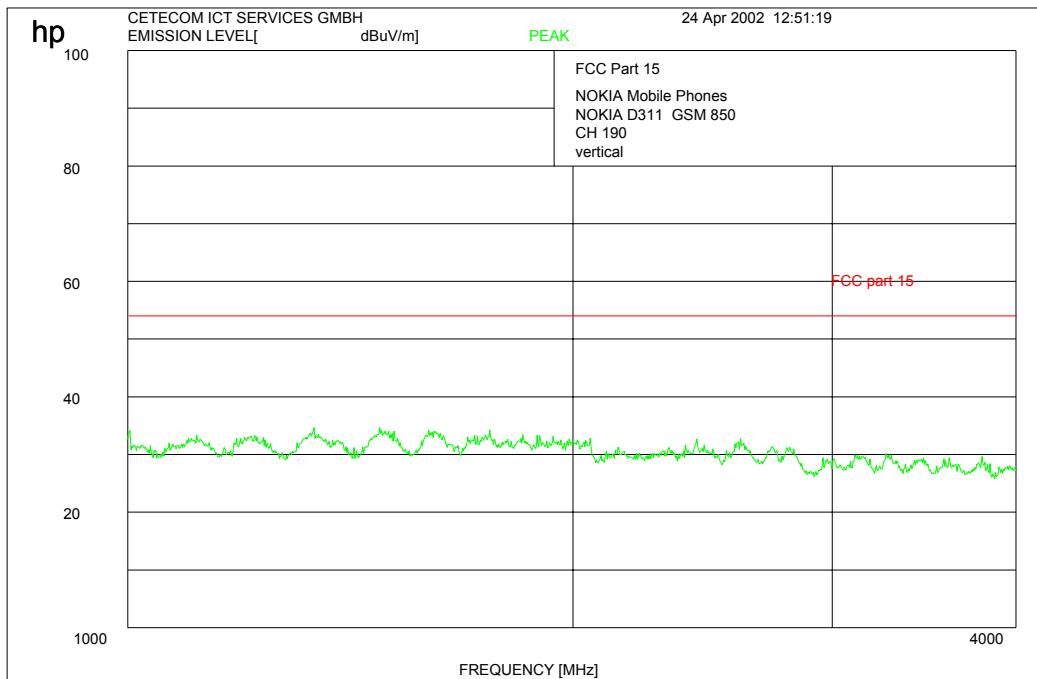



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 190 : 1 – 12 GHz (horizontal)

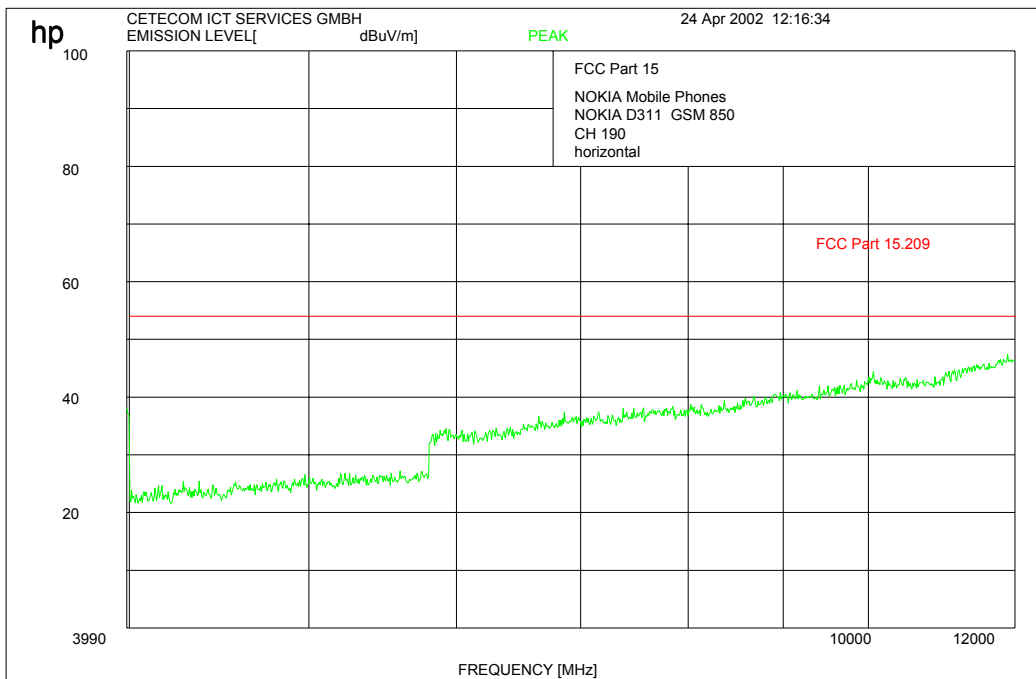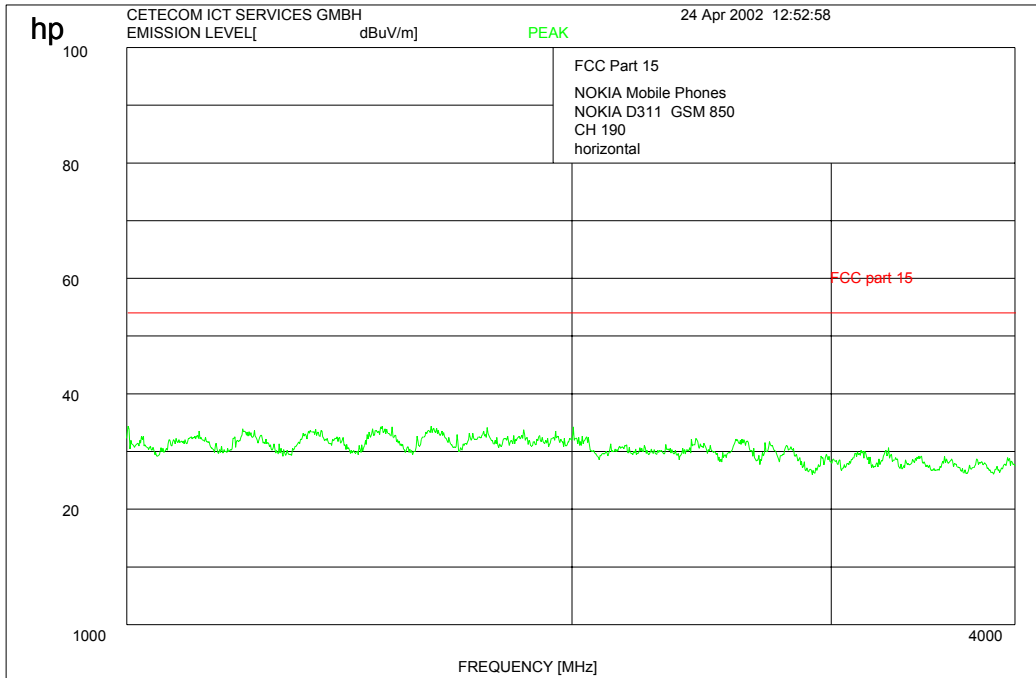



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 251 up to 1 GHz (vertical)

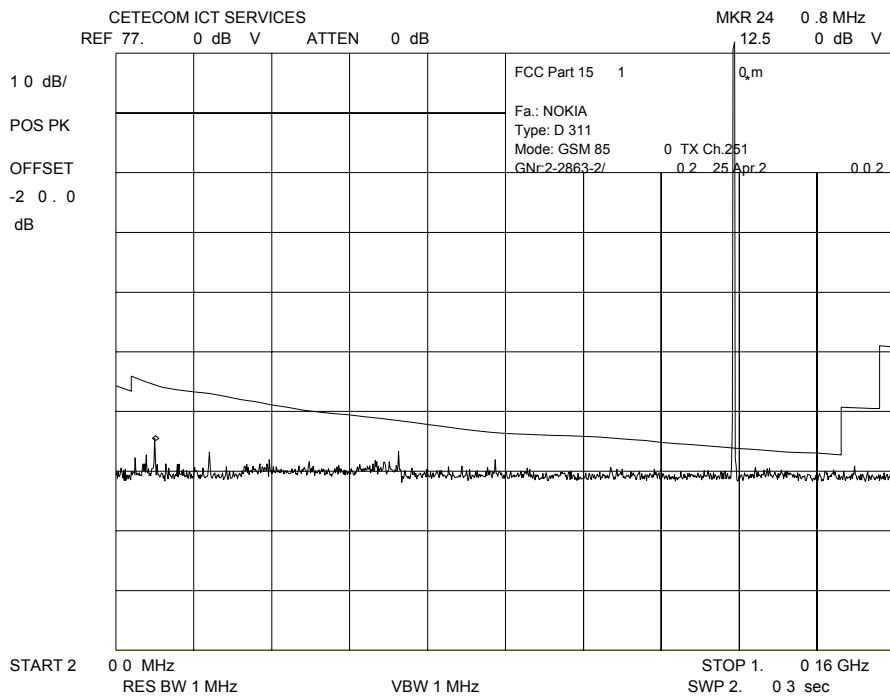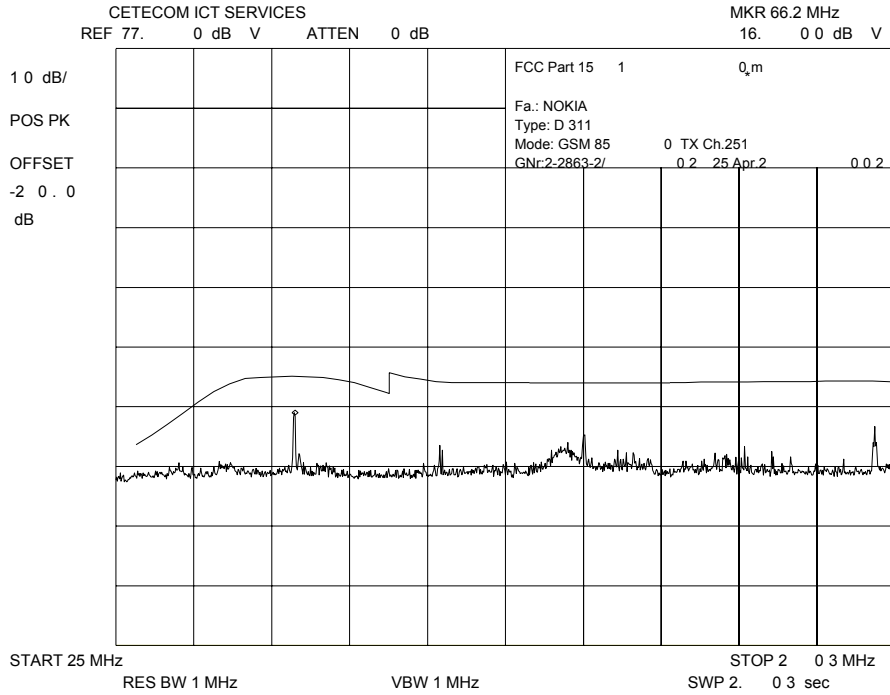



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 251 : 1 –12 GHz (vertical)

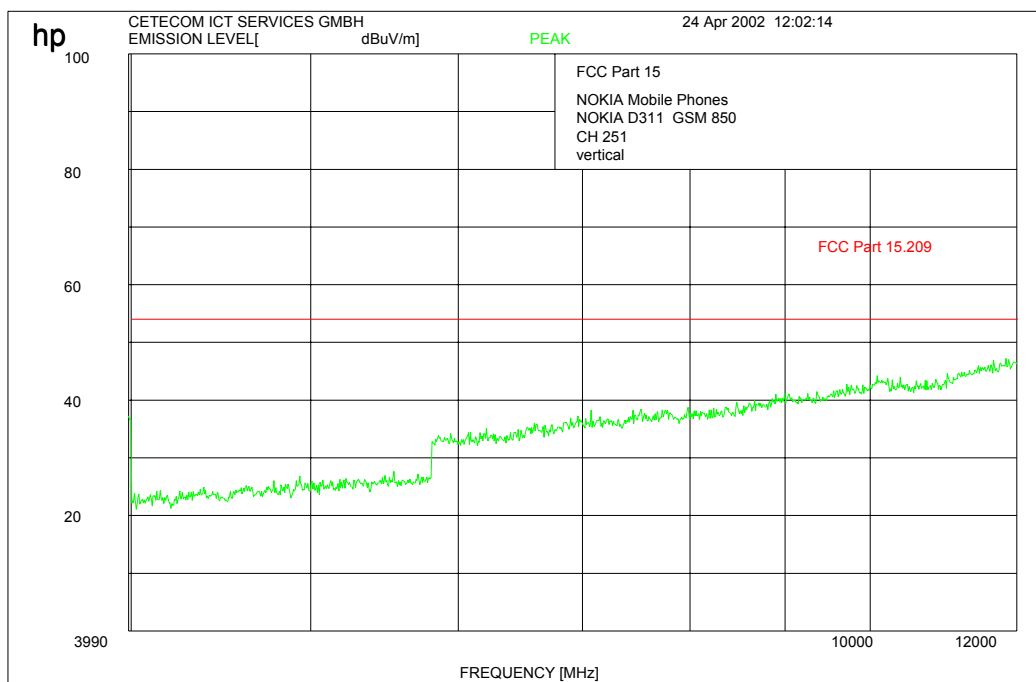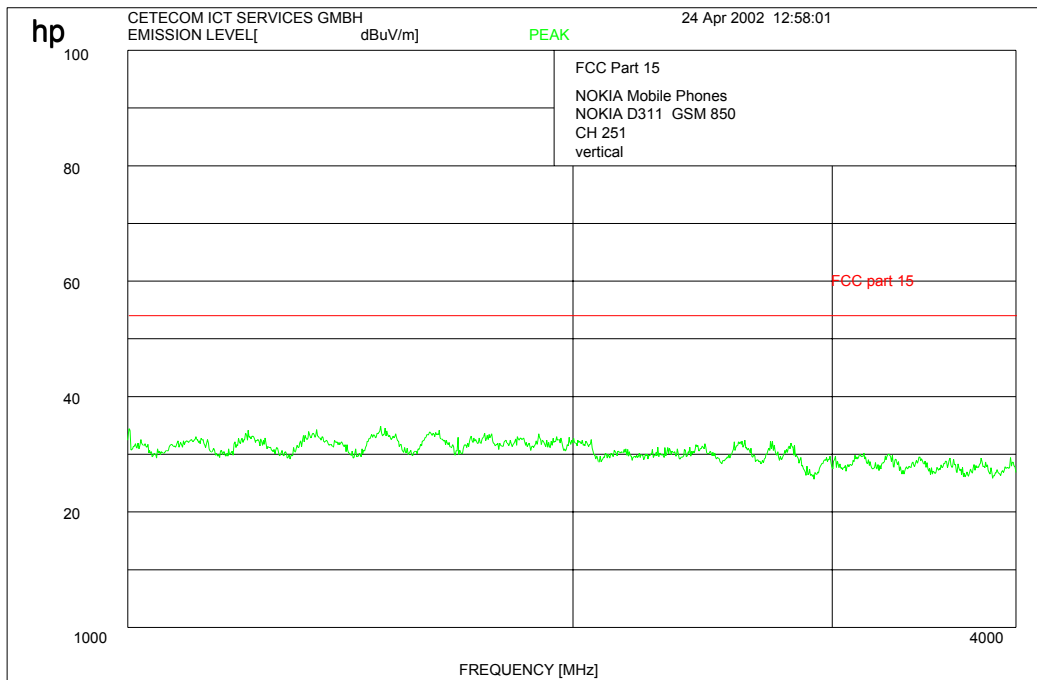

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


Channel 251 : 1 –12 GHz (horizontal)

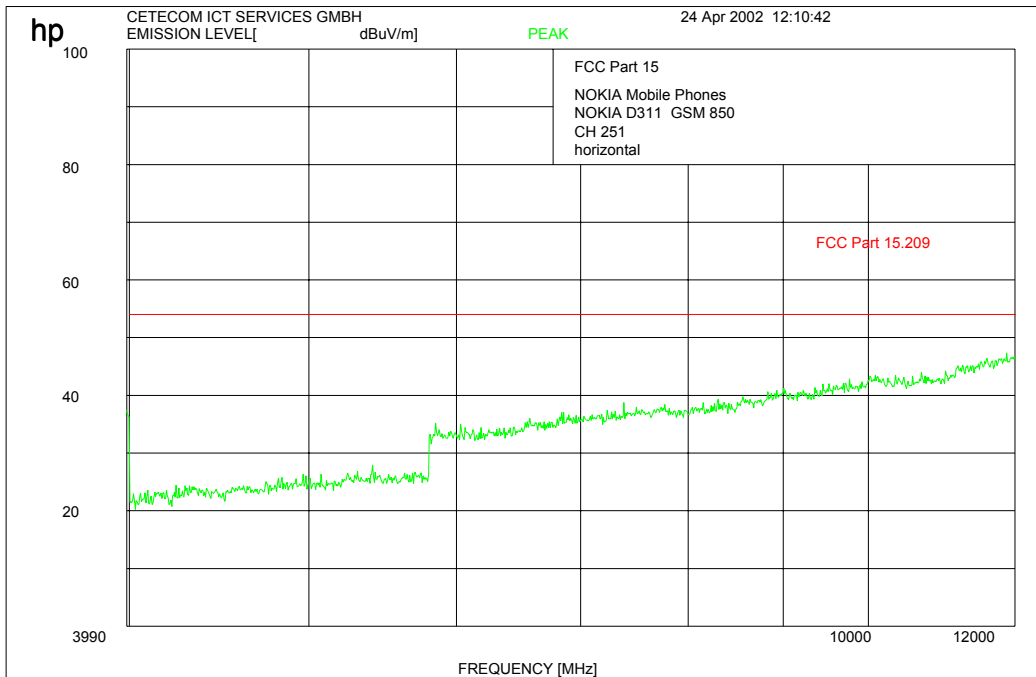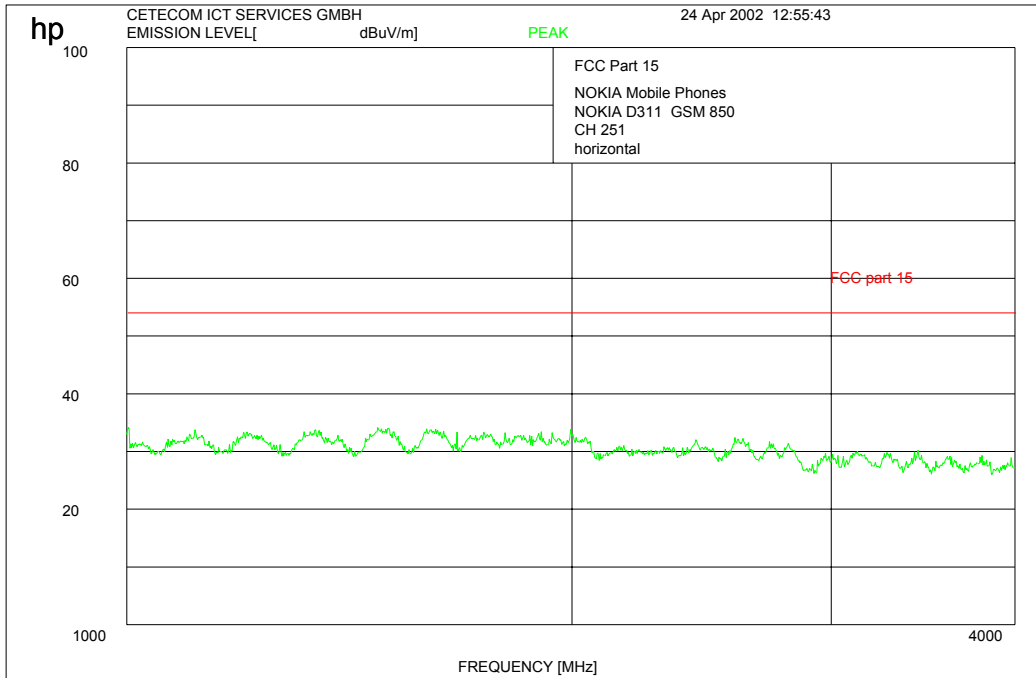

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 251 : 12 – 20 GHz

	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
	Ref Lvl	37.57 dBV	VBW	1 MHz	
	87 dBV	12.00000000 GHz	SWT	46 ms	Unit

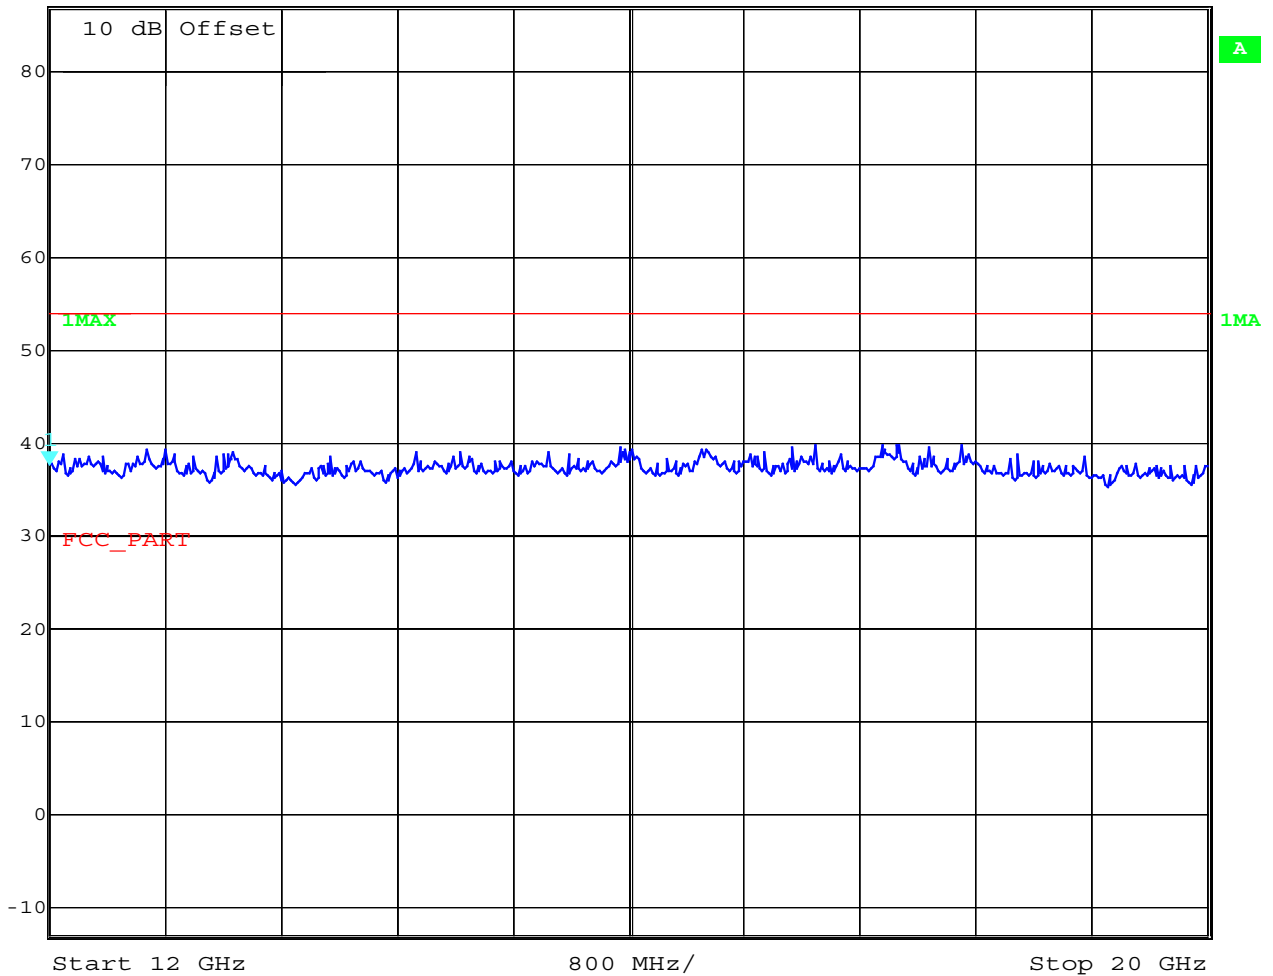

Date: 25.APR.2002 12:08:27

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

**Channel 661 (this is valid for all 3 channels and up to 1 GHz)
Idle-Mode**



Data File : /22863_40.DOC

25 Apr 2002

No	EMISSION	SPEC	MEASUREMENTS			SITE			CORR	COMMENTS
	FREQUENCY MHz	LIMIT dBuV/m	ABS	dLIM dB	MODE	POL	HGT cm	AZM deg	FACTOR dB	
1	47.9	29.5	18.0	-11.5	PK	V	100	0	N/T	
2	149.4	33.0	21.6	-11.4	PK	V	100	0	N/T	
3	198.7	33.0	21.3	-11.7	PK	V	100	0	N/T	
4	240.8	35.5	24.4	-11.1	PK	H	329	57	N/T	
5	297.1	35.5	24.2	-11.3	PK	H	329	0	N/T	
6	876.074	35.5	37.2	1.7	QP	H	305	128	25.	LINK



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

**Channel 190 (this is valid for all 3 channels and up to 1 GHz , vertical)
Idle-Mode**

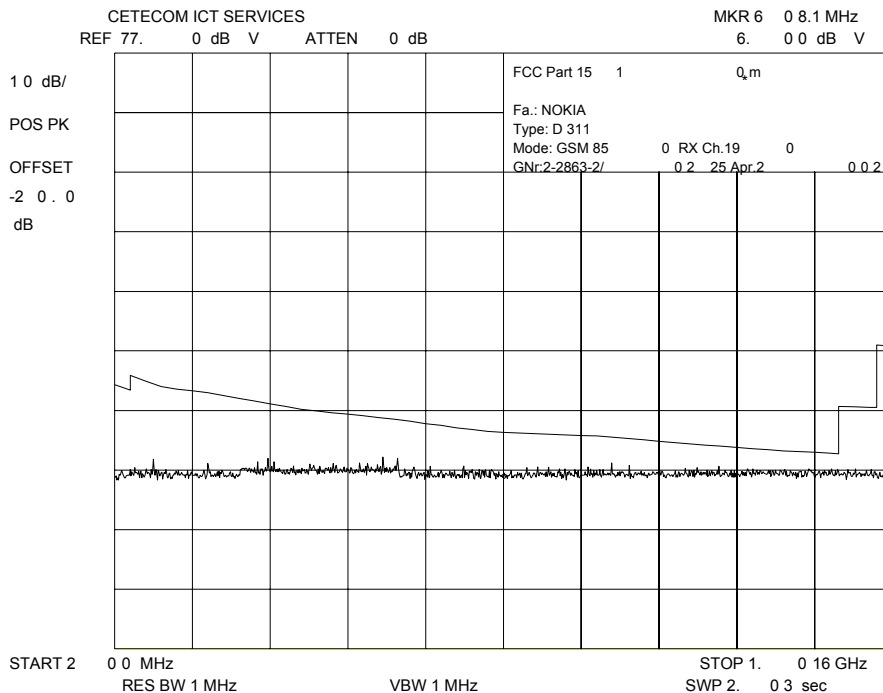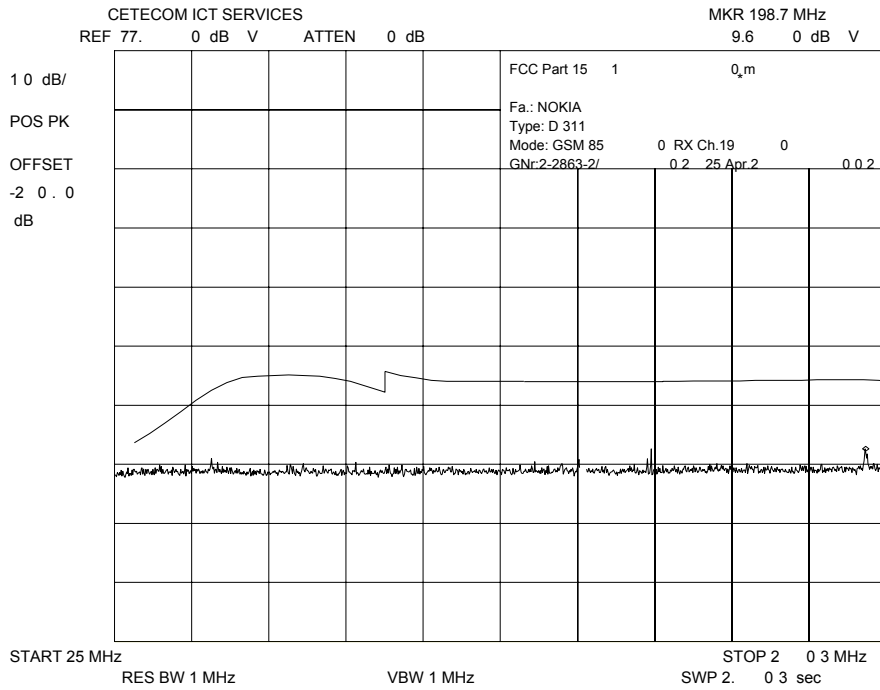



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 190 (this is valid for all 3 channels and up to 1 GHz , horizontal) Idle-Mode

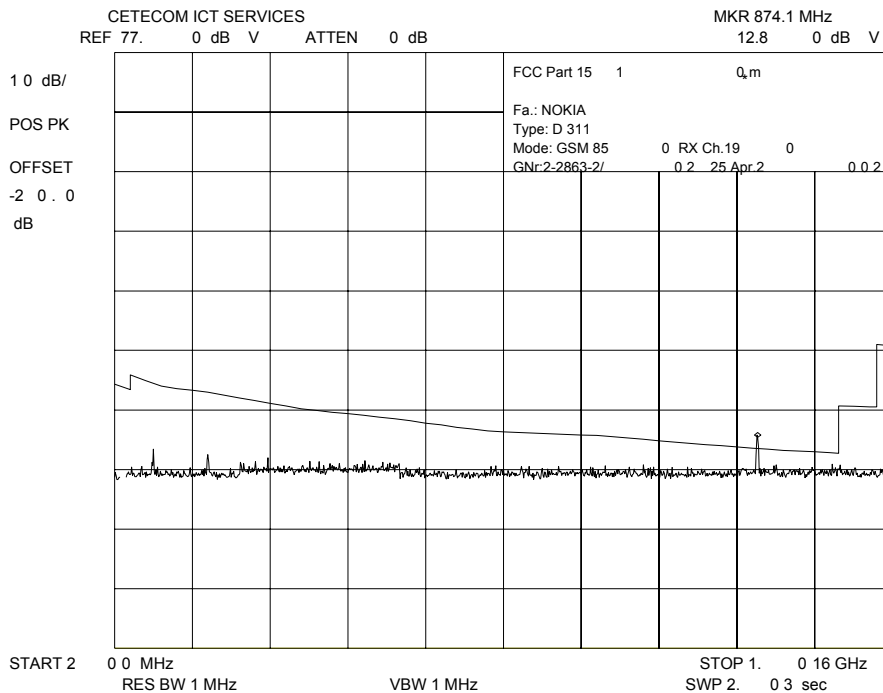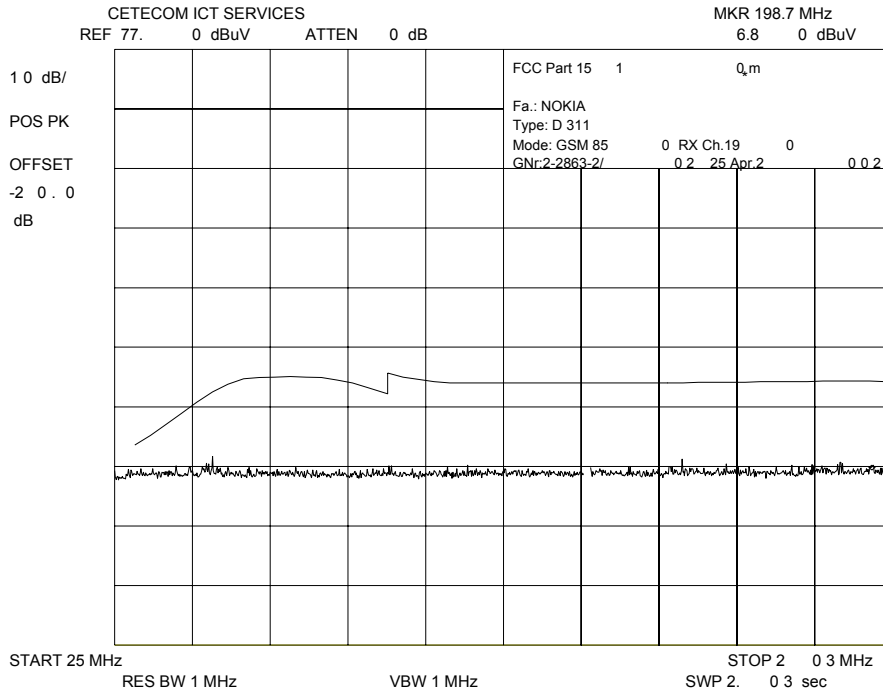



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

**Channel 190 (this is valid for all 3 channels and up to 4 GHz)
Idle-Mode**

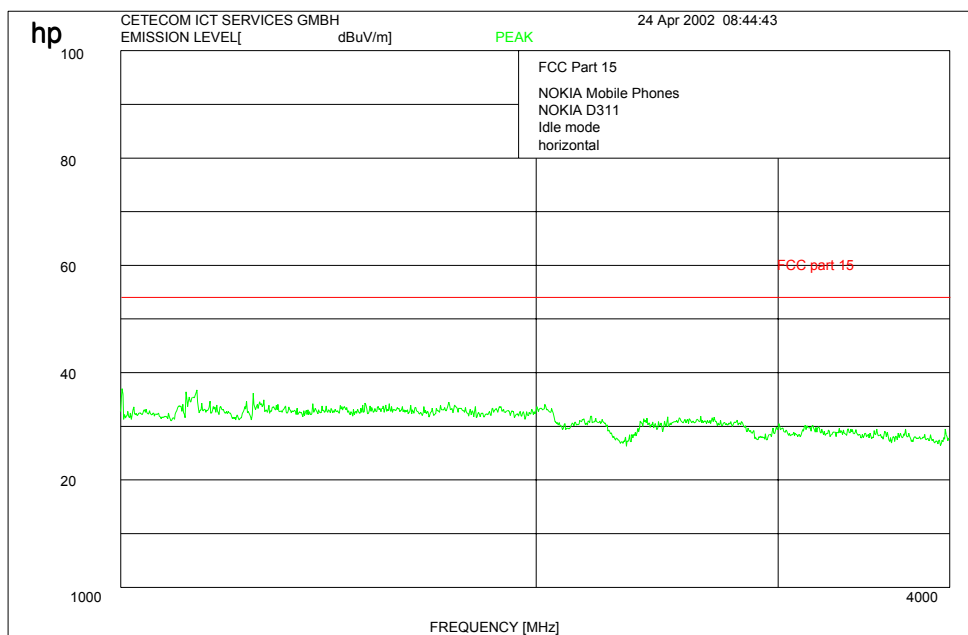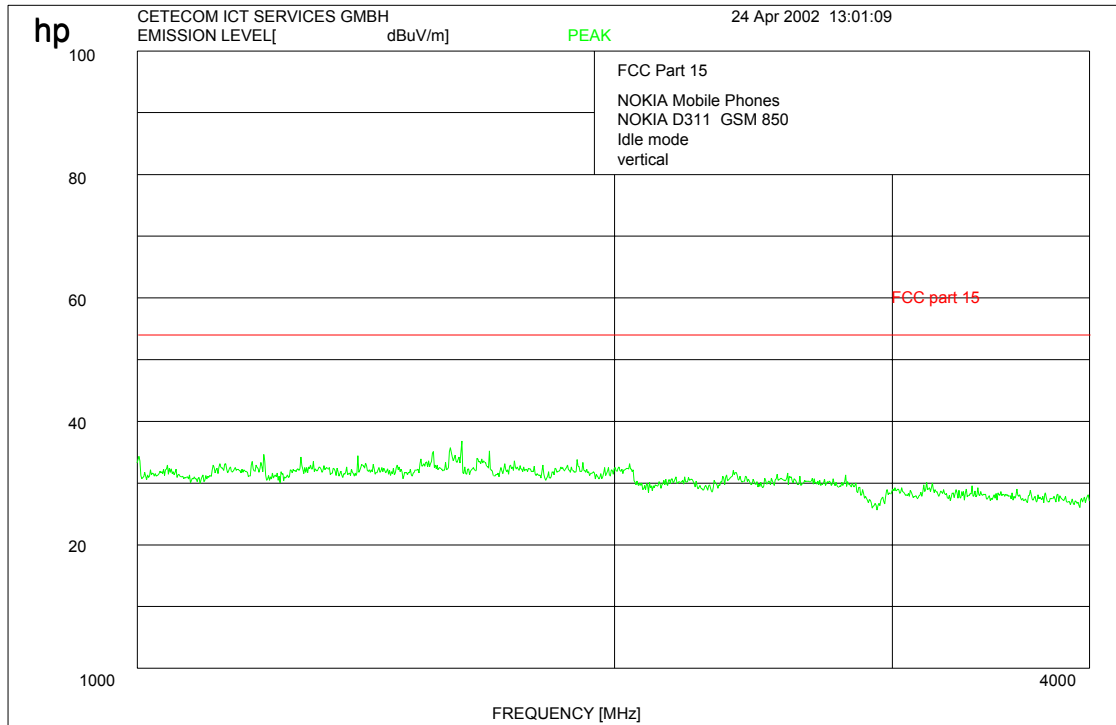

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 190 (this is valid for all 3 channels and 4 to 12 GHz)
Idle-Mode

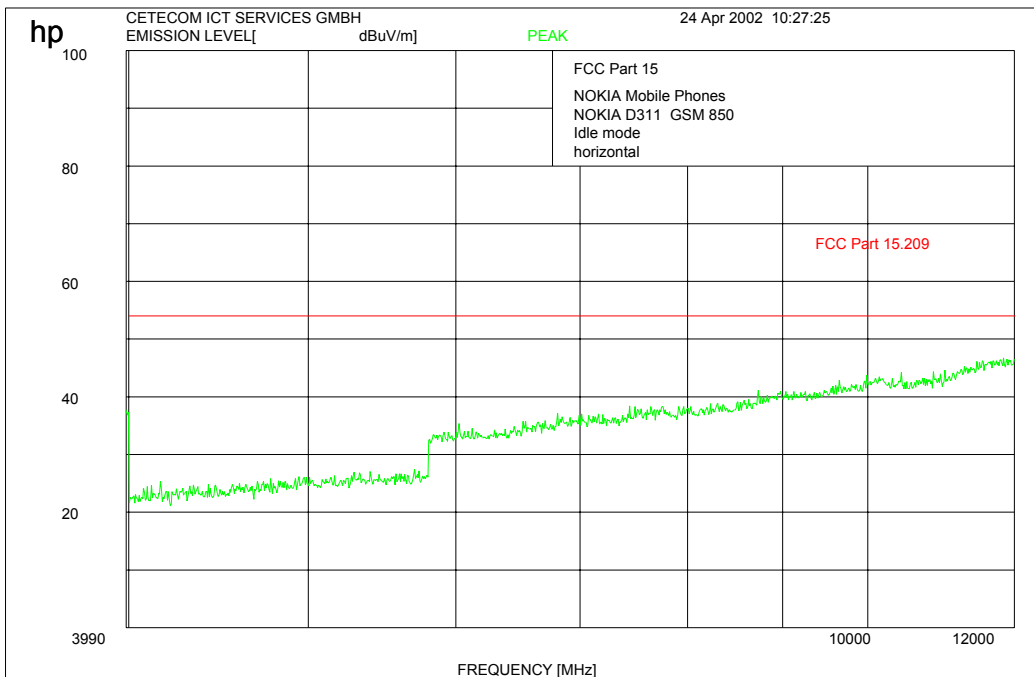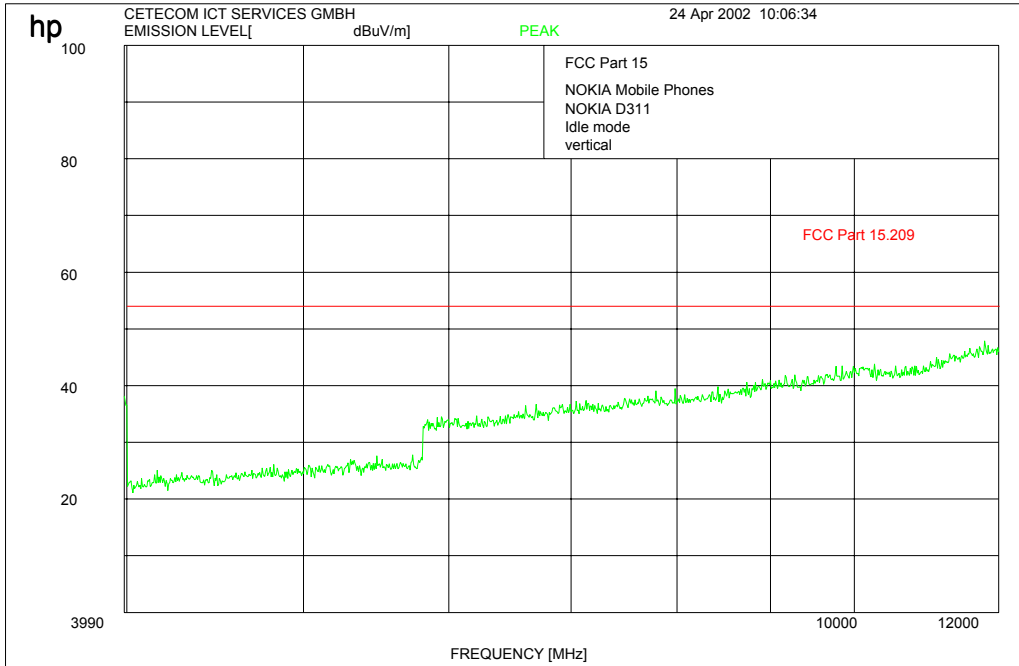

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Conducted Spurious Emissions

Measurement Procedure:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter

Channel Frequency

128 824.2 MHz

190 836.6 MHz

251 848.8 MHz

Measurement Limit:

Sec. 24.238 Emission Limits.


(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\text{Log}(P)$ dB. For all power levels +30 dBm to 0


dBm, this becomes a constant specification limit of -13 dBm.

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emmission power (dBm)	actual attenuation below frequency of operation (dBc)	results
CH 512					
798.9		-41.62	-13 (42.39 dBc)	71.01	Complies
824.0		-16.60		45.99	Complies
1648.4		-38.24		67.63	
CH 661					
605.2		-42.23	-13 (42.31dBc)	71.54	Complies
CH 810					
809.4		-42.38	-13 (42.14dBc)	71.52	Complies
849.0		-19.43		48.57	Complies
1531.0		-40.74		69.88	Complies
Measurement uncertainty		± 0.5dB			

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 128


Marker 1 [T1]
RBW 3 kHz
RF Att 40 dB
Ref Lvl -16.60 dBm
VBW 3 kHz
22.3 dBm
824.0000000 MHz
SWT 560 ms
Unit dBm

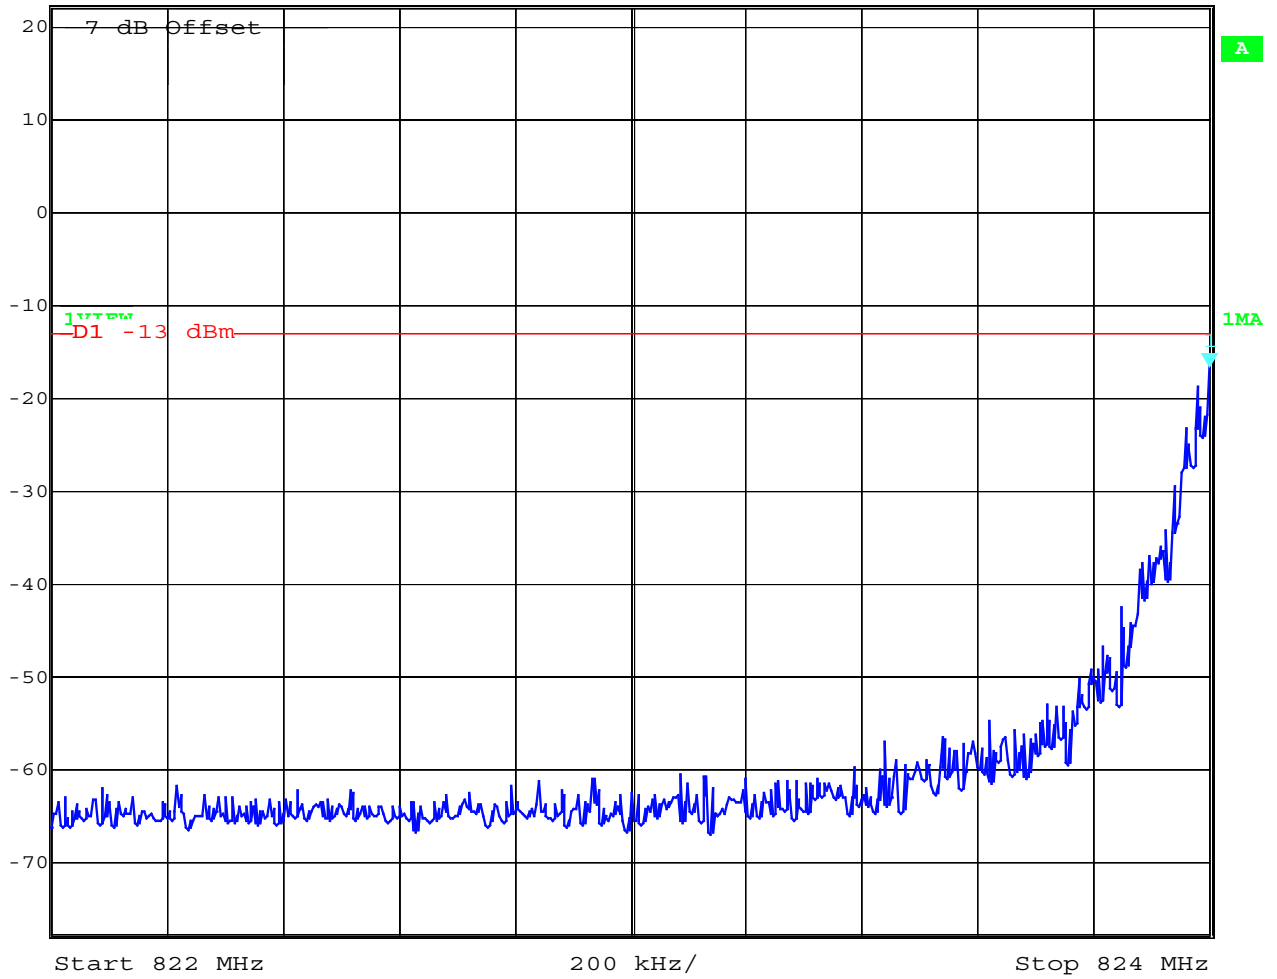


Date: 25.APR.2002 12:29:41

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 128

	Marker 1 [T1]	RBW	100 kHz	RF Att	40 dB
	Ref Lvl	-38.24 dBm	VBW	100 kHz	
	22.3 dBm	1.63675351 GHz	SWT	4.8 s	Unit
					dBm

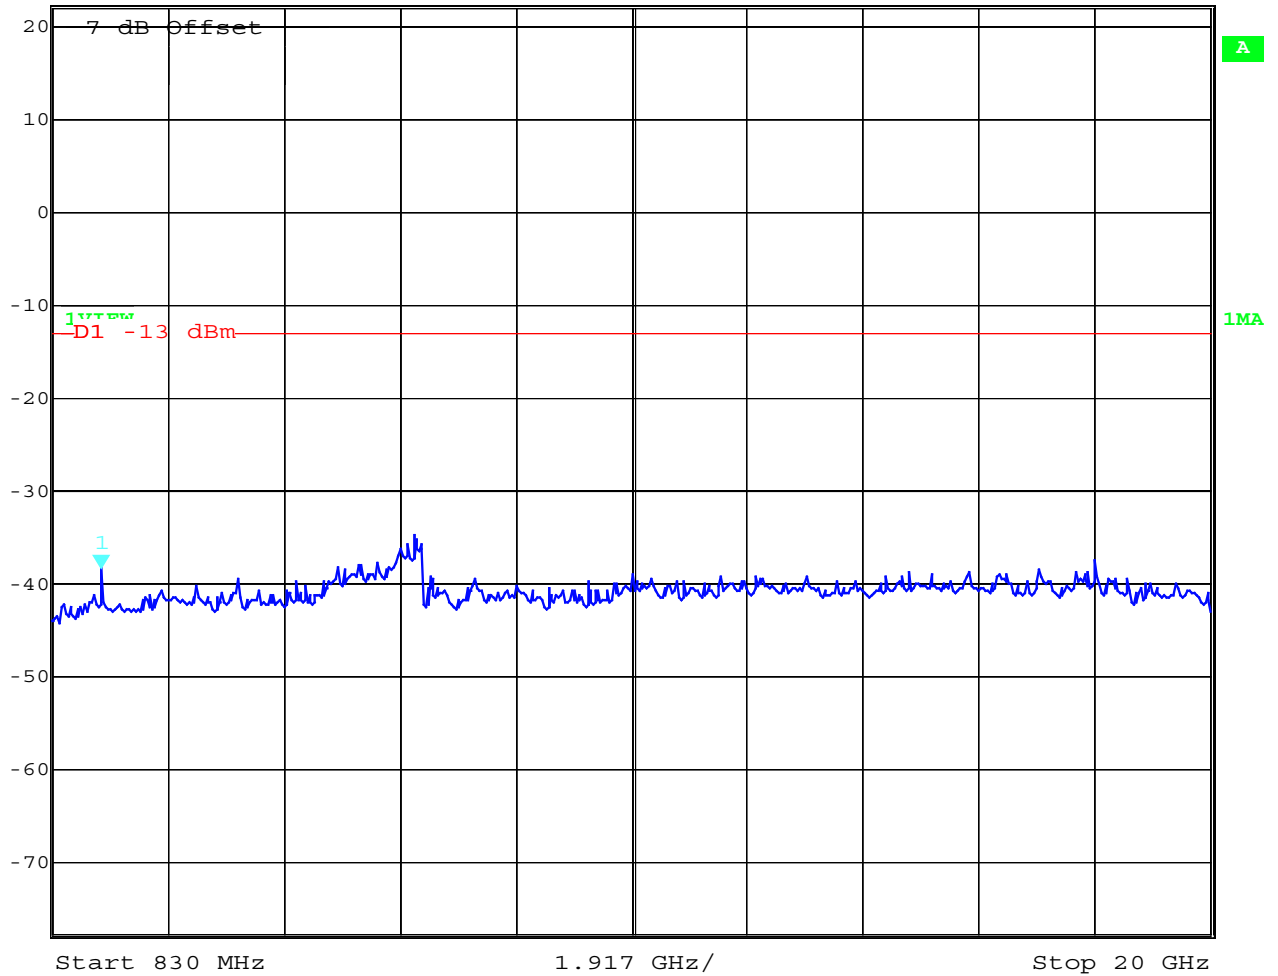


Date: 25.APR.2002 12:30:40

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 190

	Marker 1 [T1]	RBW	100 kHz	RF Att	40 dB
	Ref Lvl	-42.23 dBm	VBW	100 kHz	
	22.3 dBm	605.24493788 MHz	SWT	210 ms	Unit

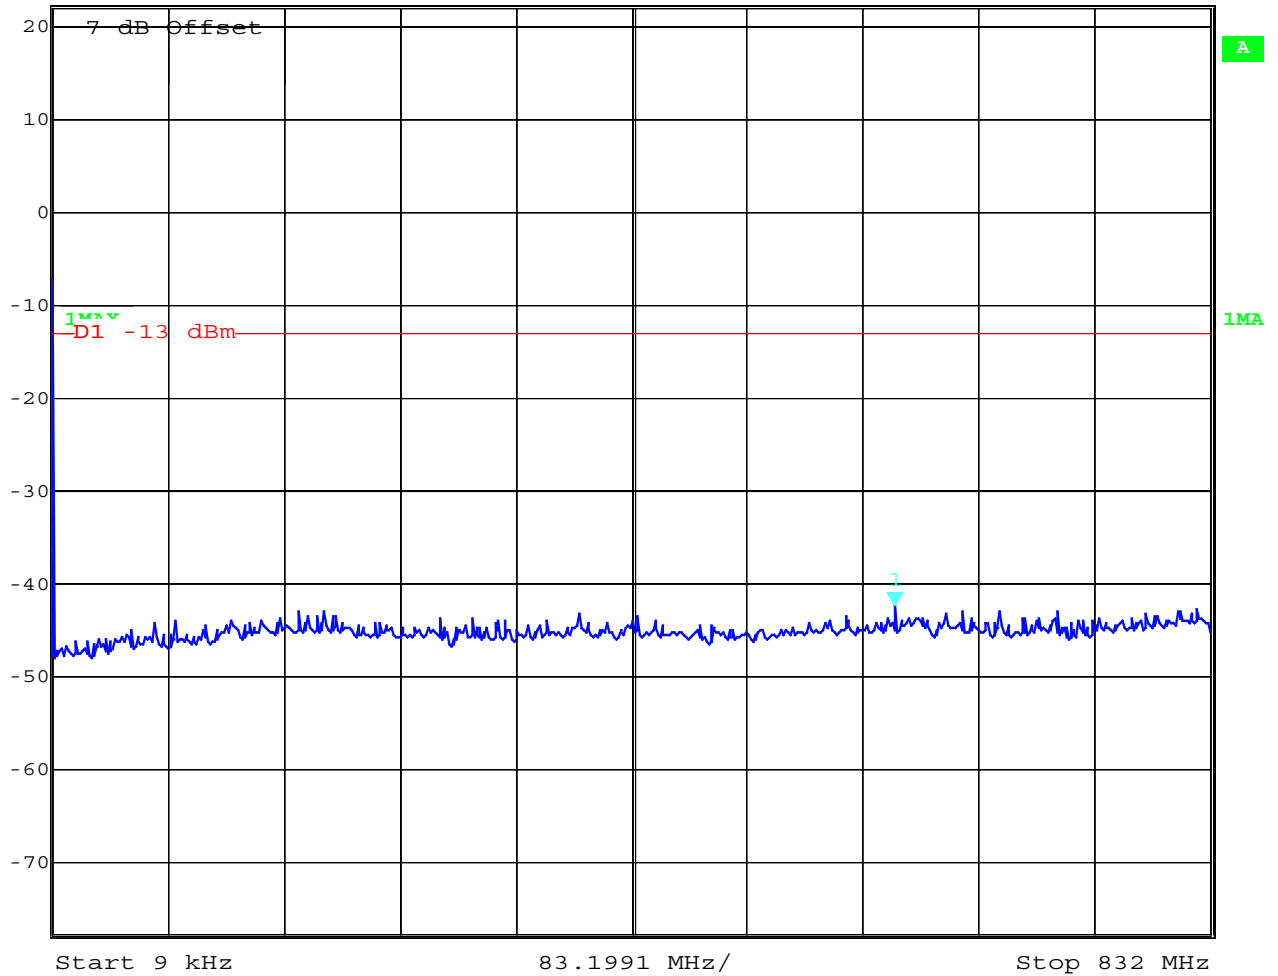


Date: 25.APR.2002 12:31:41

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 190

	Marker 1 [T1]	RBW	100 kHz	RF Att	40 dB
	Ref Lvl	-41.94 dBm	VBW	100 kHz	
	22.3 dBm	1.37755511 GHz	SWT	4.8 s	Unit
					dBm

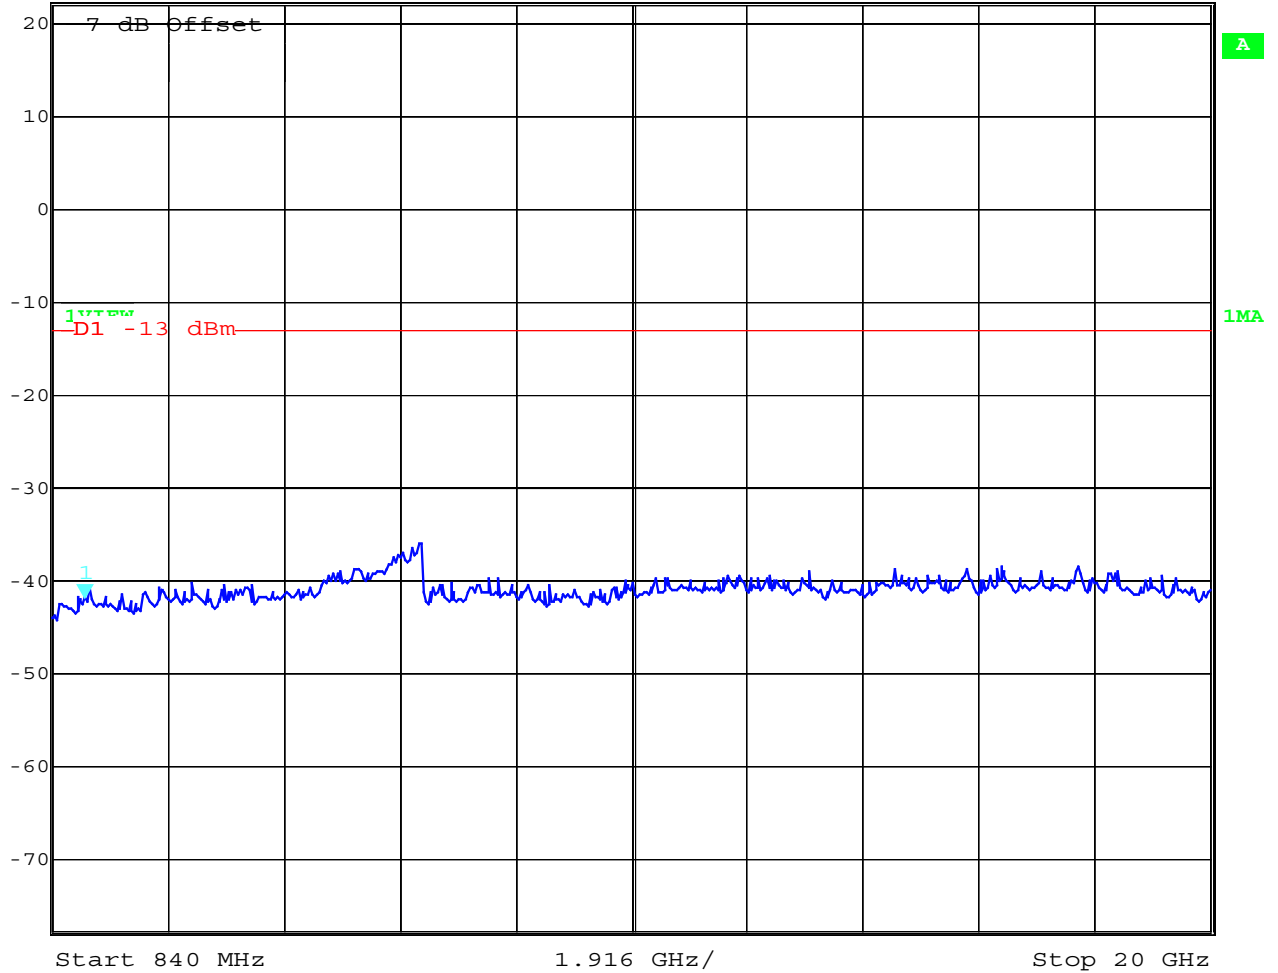


Date: 25.APR.2002 12:32:43

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 251


	Marker 1 [T1]	RBW	100 kHz	RF Att	40 dB
	Ref Lvl	-42.38 dBm	VBW	100 kHz	
	22.3 dBm	809.43925651 MHz	SWT	215 ms	Unit dBm

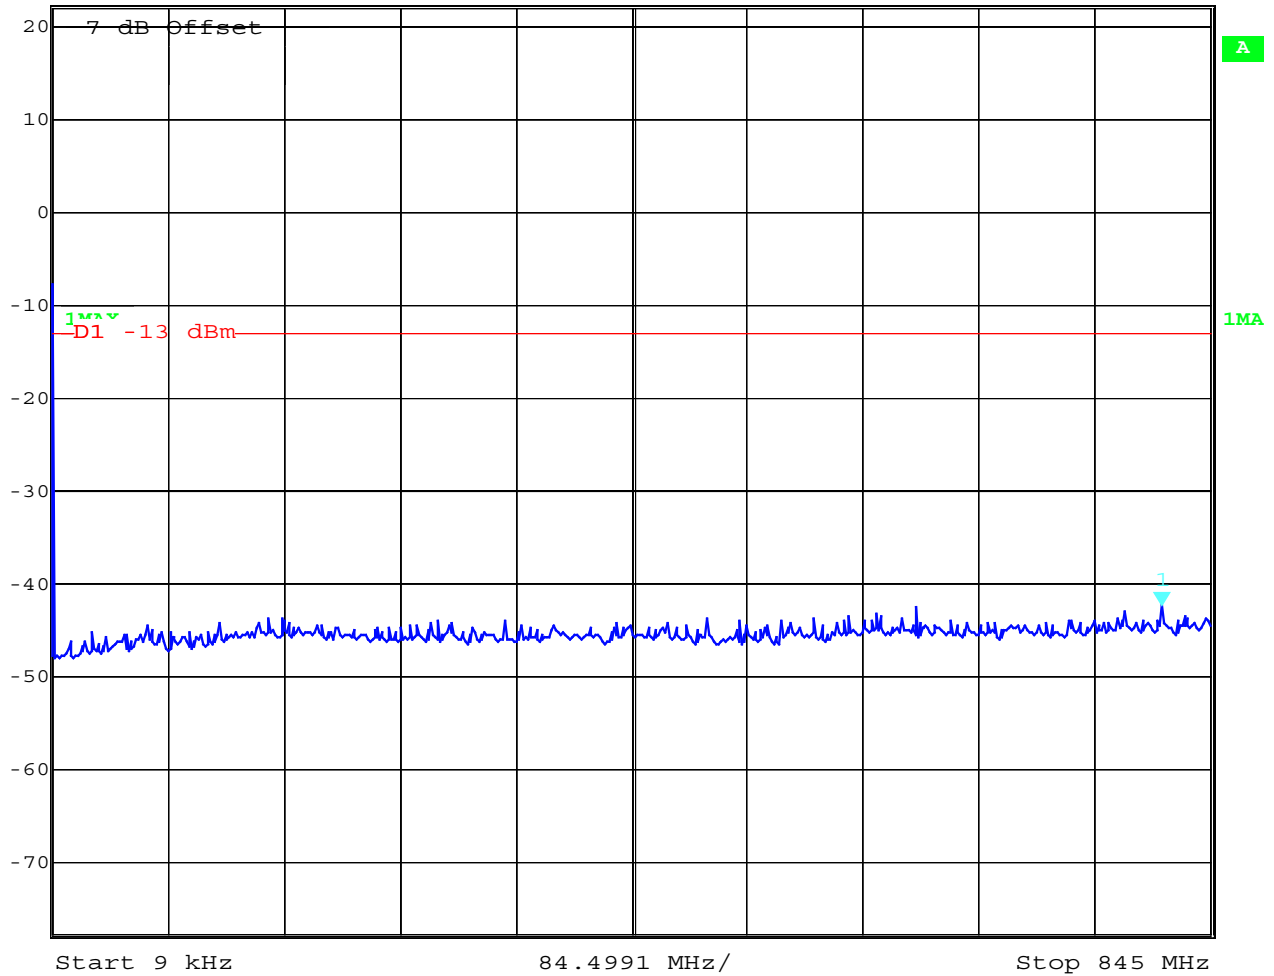


Date: 25.APR.2002 12:35:12

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 251


Marker 1 [T1]
RBW 3 kHz
RF Att 40 dB
Ref Lvl -19.43 dBm
VBW 3 kHz
22.3 dBm
849.01202405 MHz
SWT 1.7 s
Unit dBm

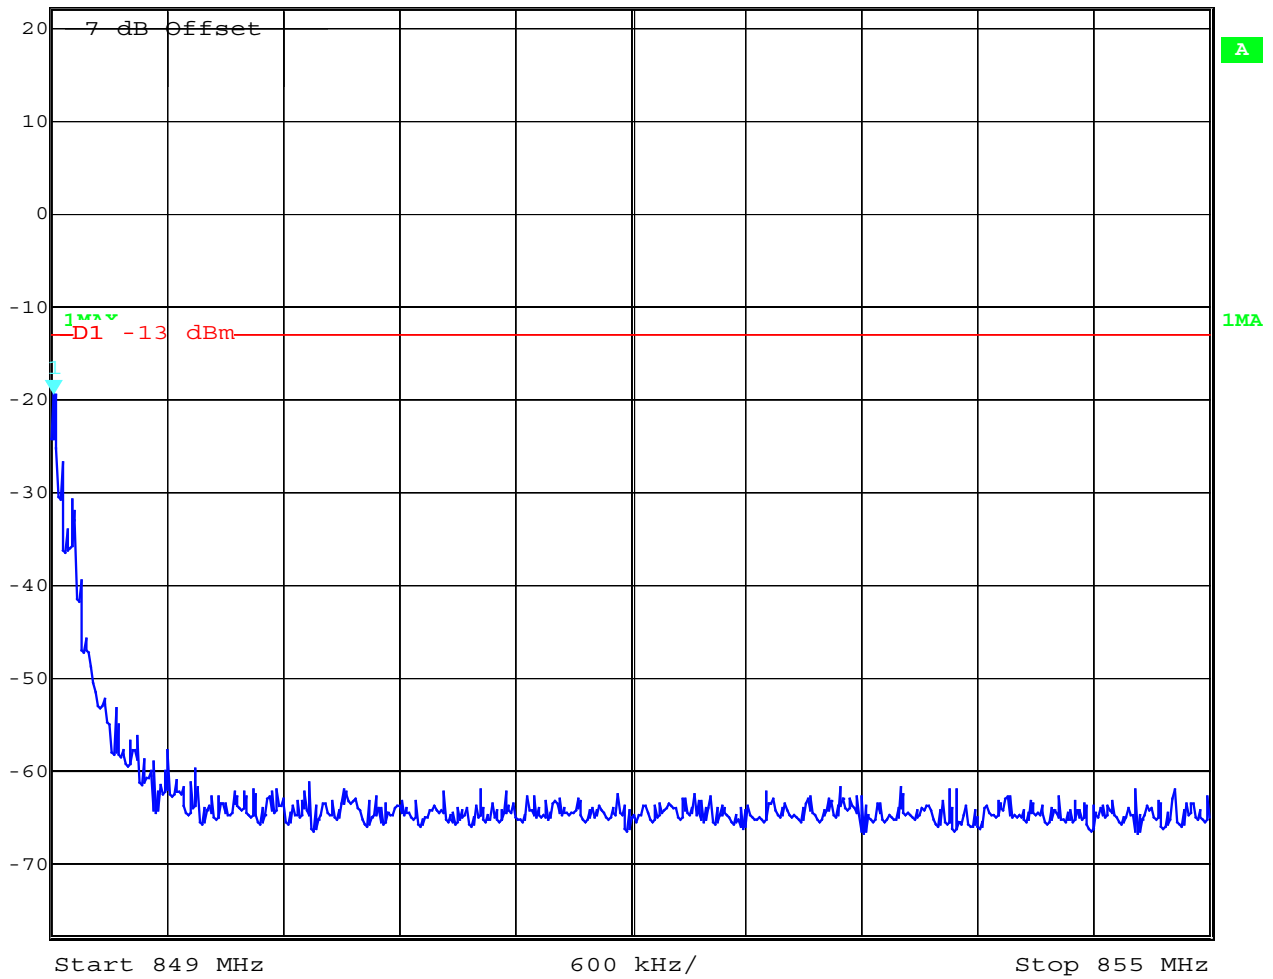


Date: 25.APR.2002 12:35:56

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Channel 251

	Marker 1 [T1]	RBW	100 kHz	RF Att	40 dB
	Ref Lvl	-40.74 dBm	VBW	100 kHz	
	22.3 dBm	1.53102204 GHz	SWT	4.8 s	Unit dBm

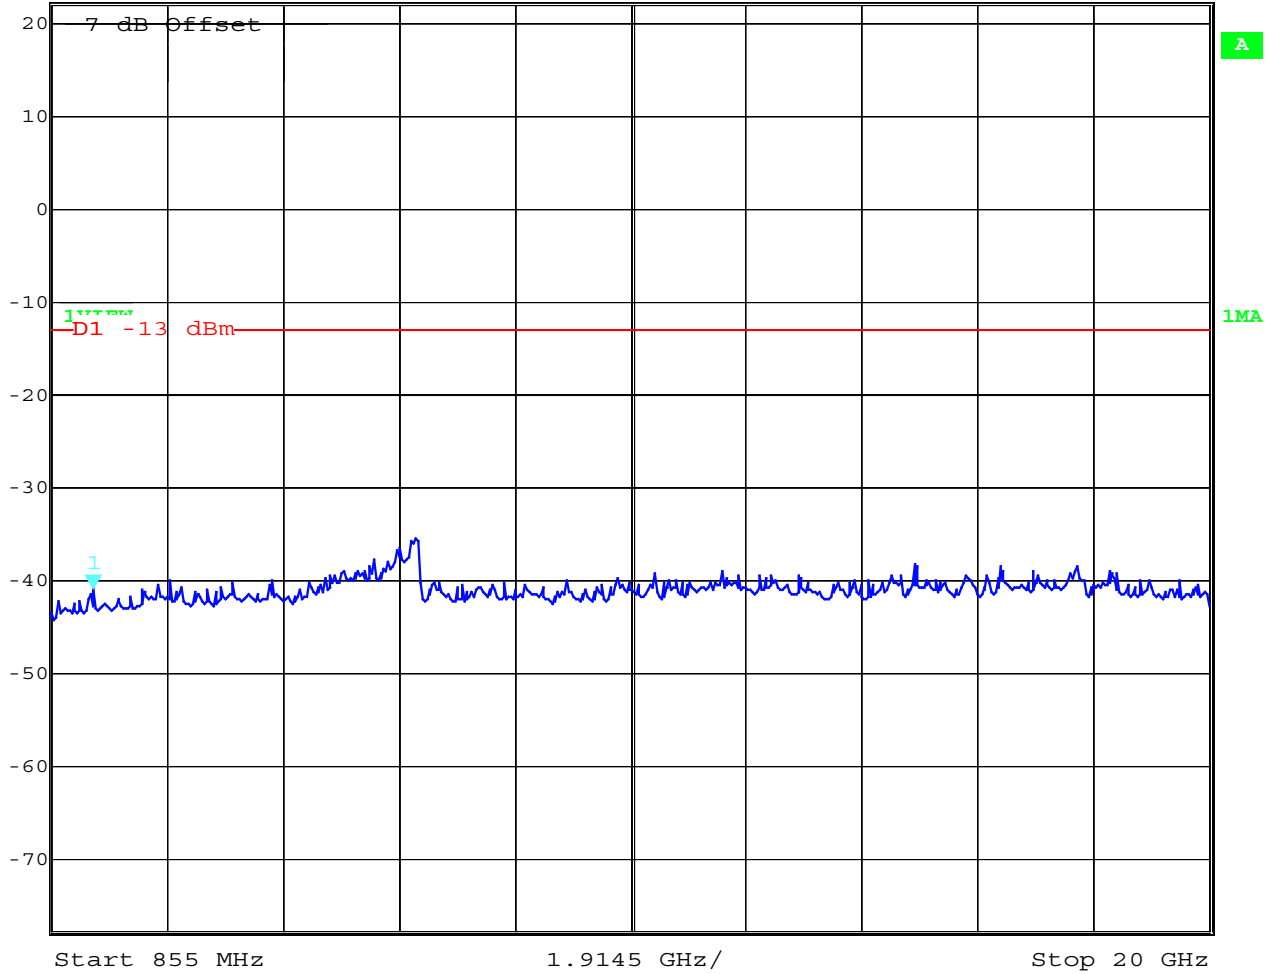

Date: 25.APR.2002 12:33:38

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

OCCUPIED BANDWIDTH **§2.989**

Occupied Bandwidth Results


Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Frequency	99% Occupied Bandwidth	-26 dBc Bandwidth
824.2 MHz	260.521	292.585
836.6 MHz	258.517	296.593
848.8 MHz	264.529	300.601

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 264 kHz, this equates to a resolution bandwidth of at least 2.64 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.

Channel 128
99% Occupied Bandwidth

	Delta 1 [T1]	RBW	3 kHz	RF Att	40 dB
	Ref Lvl	-2.16 dB	VBW	3 kHz	
	22.3 dBm	260.52104208 kHz	SWT	280 ms	Unit dBm

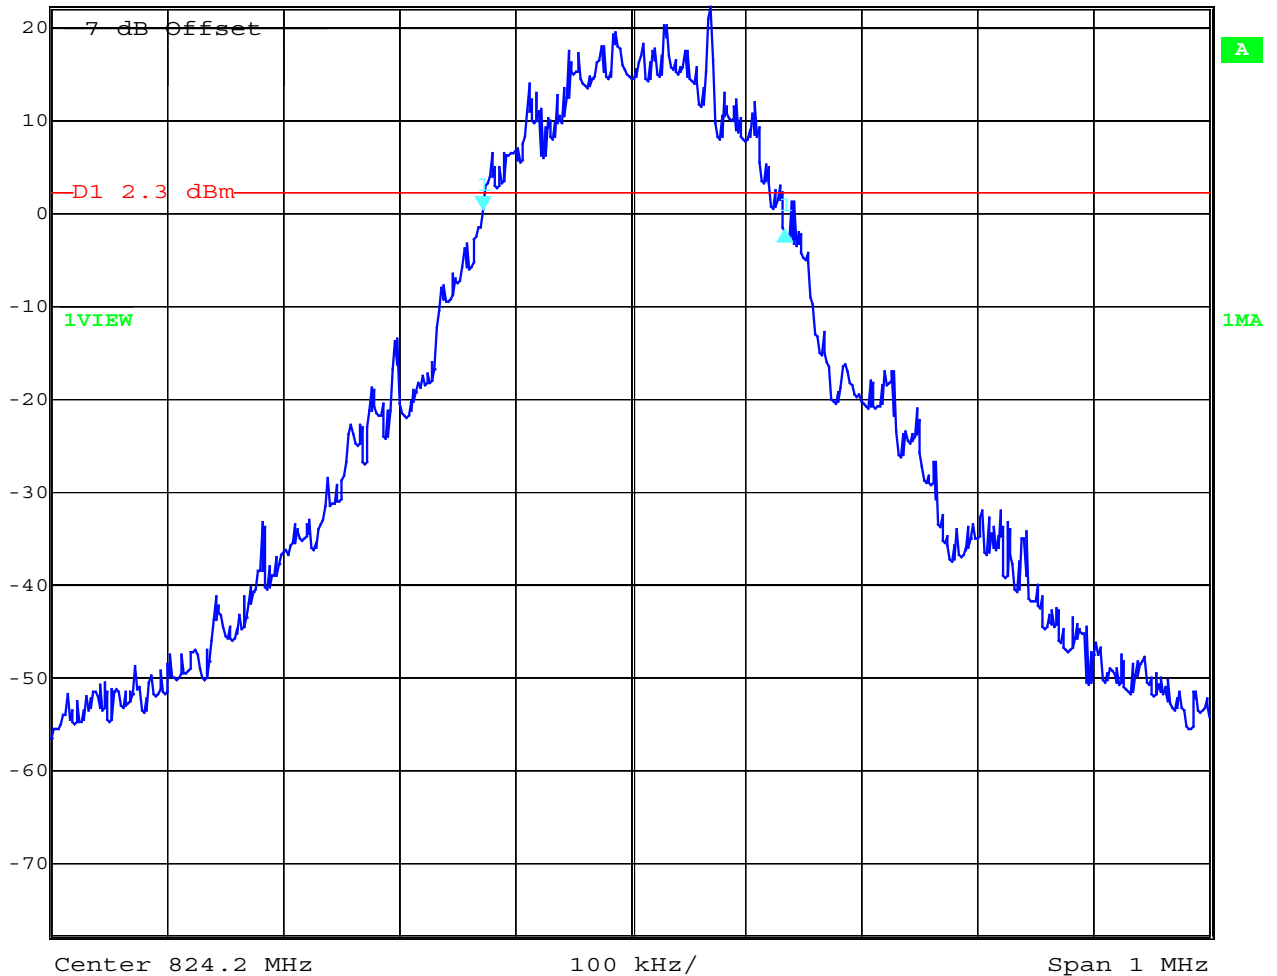


Date: 25.APR.2002 12:25:49

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 128
-26 dBc Bandwidth

	Delta 1 [T1]	RBW	3 kHz	RF Att	40 dB
	Ref Lvl	-0.67 dB	VBW	3 kHz	
	22.3 dBm	292.58517034 kHz	SWT	280 ms	Unit

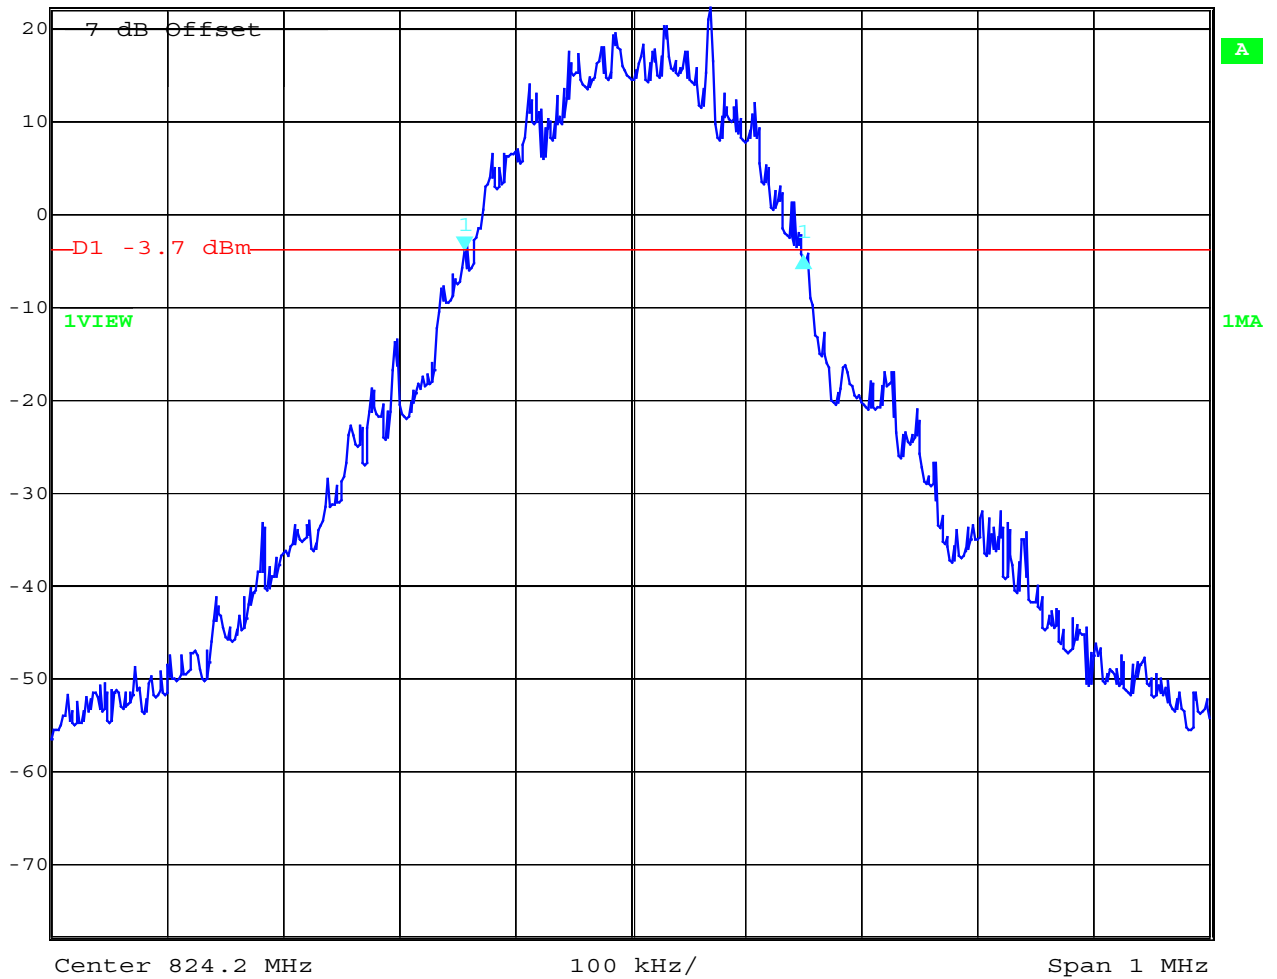


Date: 25.APR.2002 12:26:40

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 190
99% Occupied Bandwidth

	Delta 1 [T1]	RBW	3 kHz	RF Att	40 dB
	Ref Lvl	-1.60 dB	VBW	3 kHz	
	21.9 dBm	258.51703407 kHz	SWT	280 ms	Unit

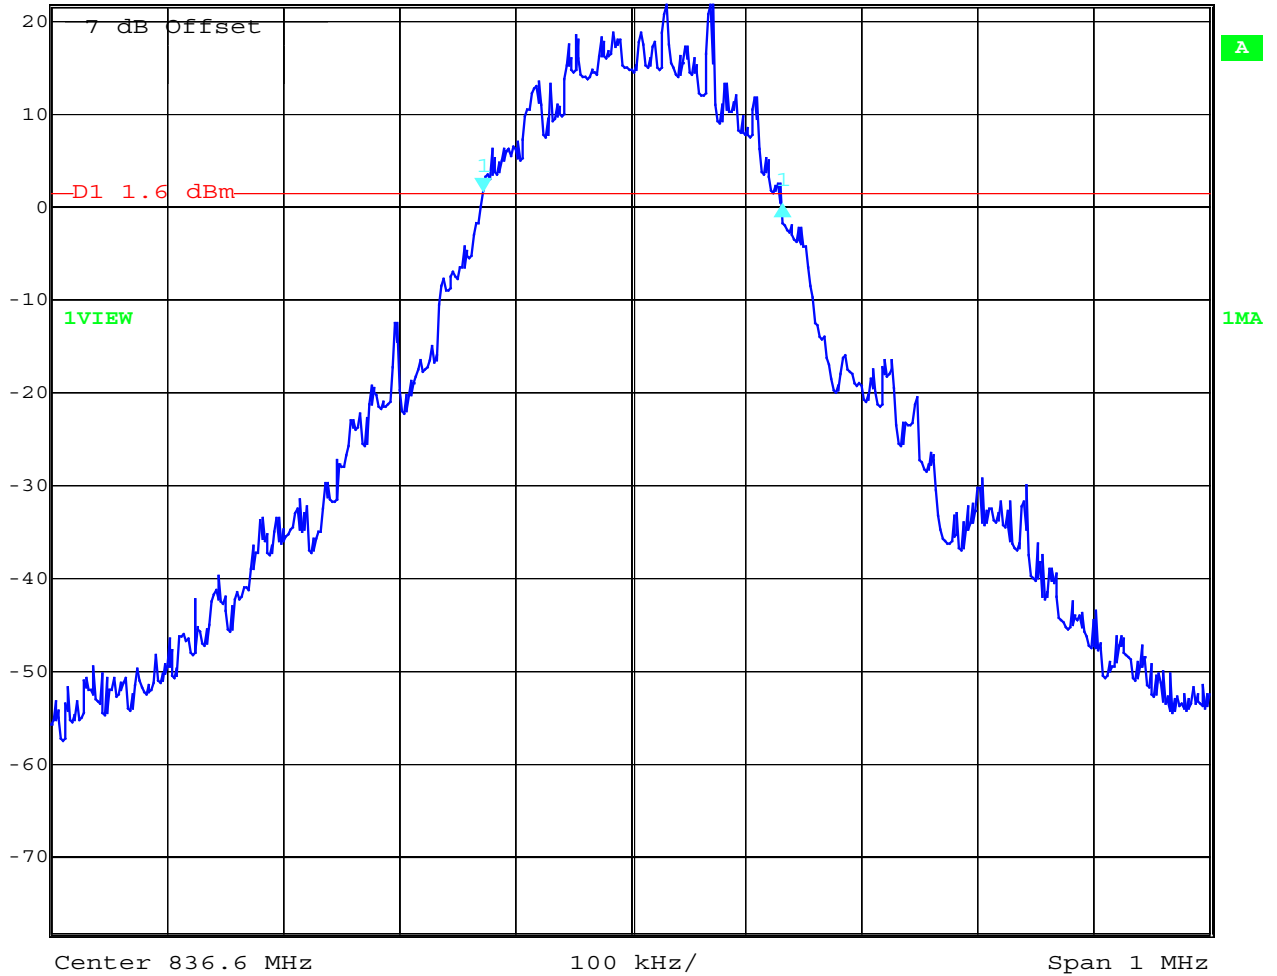


Date: 25.APR.2002 12:24:37

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 190
-26 dBc Bandwidth

	Delta 1 [T1]	RBW	3 kHz	RF Att	40 dB
	Ref Lvl	-0.40 dB	VBW	3 kHz	
	21.9 dBm	296.59318637 kHz	SWT	280 ms	Unit dBm

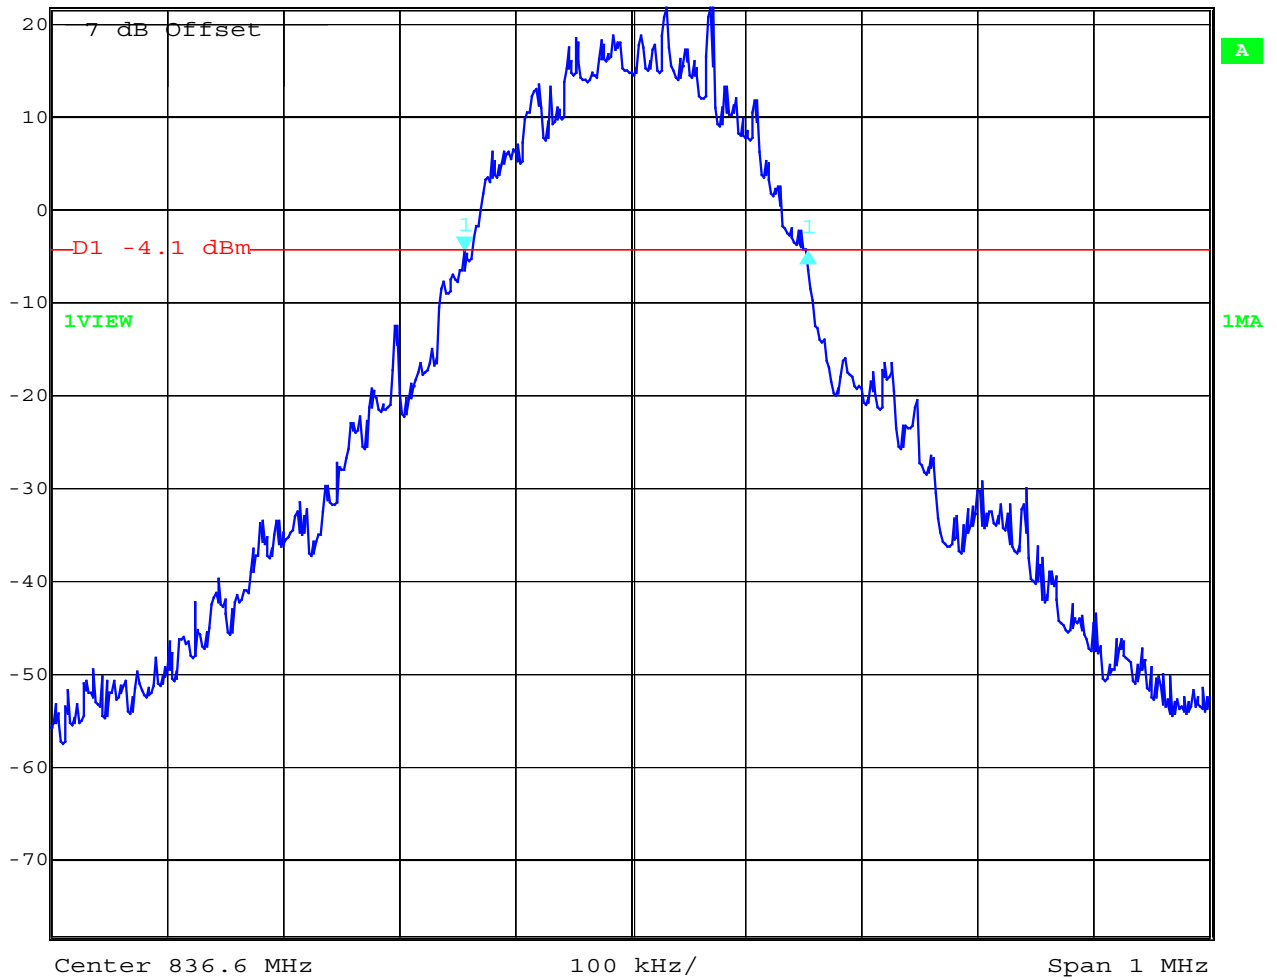


Date: 25.APR.2002 12:24:03

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 251
99% Occupied Bandwidth

	Delta 1 [T1]	RBW	3 kHz	RF Att	40 dB
	Ref Lvl	3.49 dB	VBW	3 kHz	
	21.9 dBm	264.52905812 kHz	SWT	280 ms	Unit

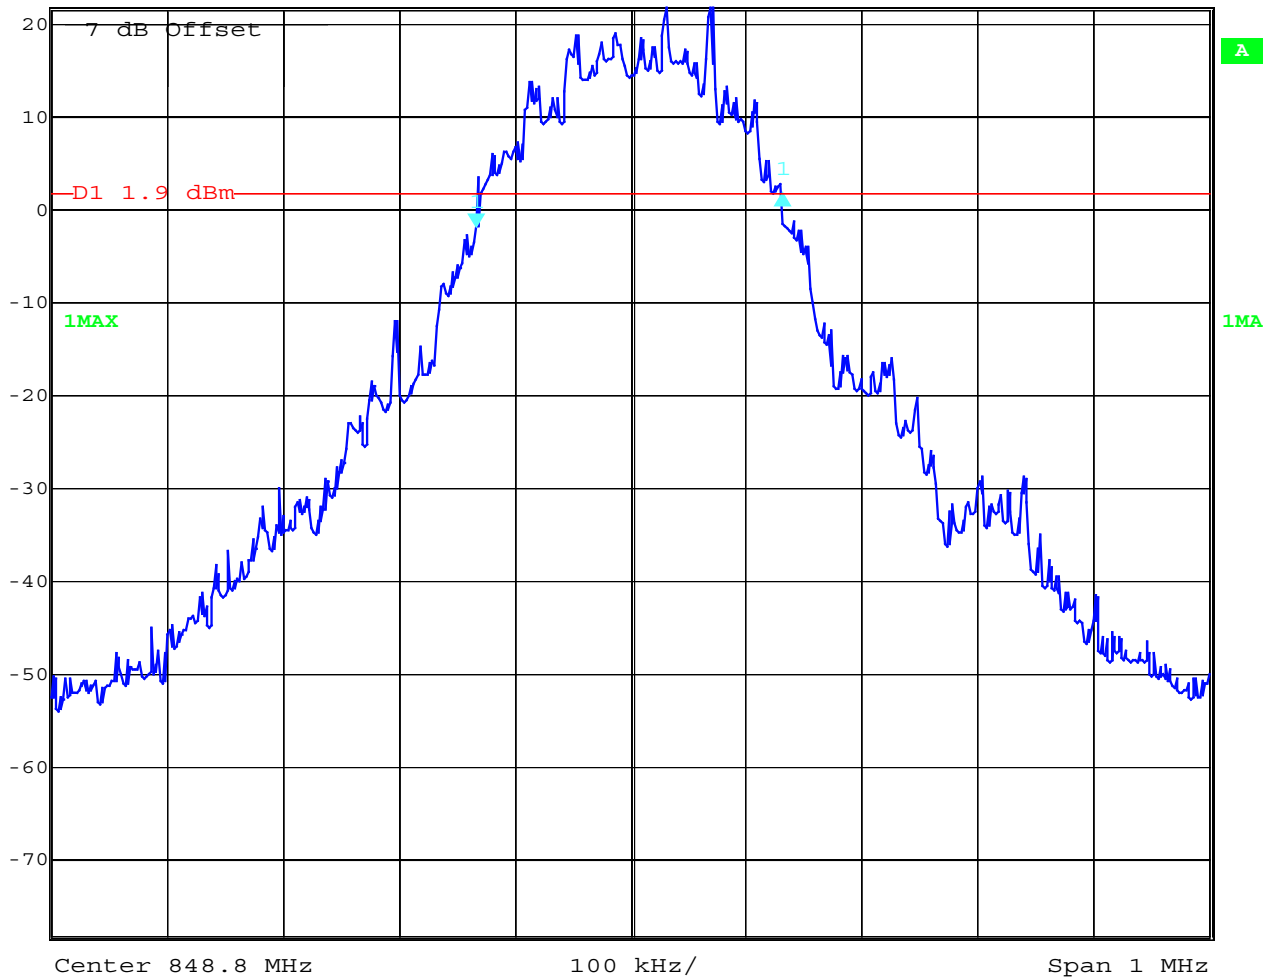

Date: 25.APR.2002 12:21:42

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 251
-26 dBc Bandwidth



Delta 1 [T1]

RBW 3 kHz RF Att 40 dB


Ref Lvl -0.11 dB

VBW 3 kHz

21.9 dBm 300.60120240 kHz

SWT 280 ms

Unit dBm

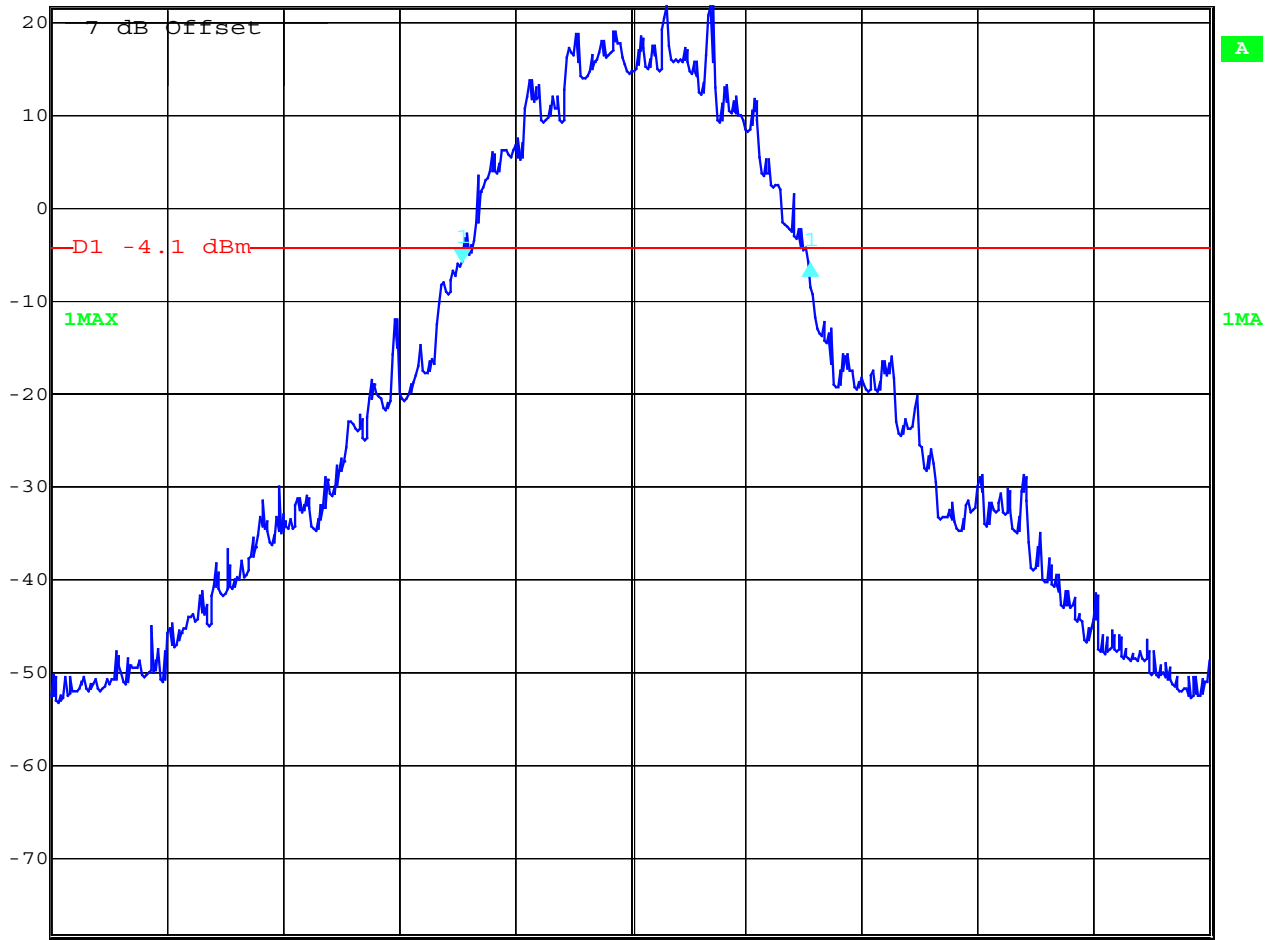

Center 848.8 MHz

100 kHz/

Span 1 MHz

Date: 25.APR.2002 12:22:17


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Emission limitations for cellular §22.917(f)

Mobile emissions in the base frequency range

Idle Mode base station frequency range A

	Ref Lvl	RBW	30 kHz	RF Att	0 dB
	-22 dBm	VBW	30 kHz	Unit	dBm
		SWT	70 ms		

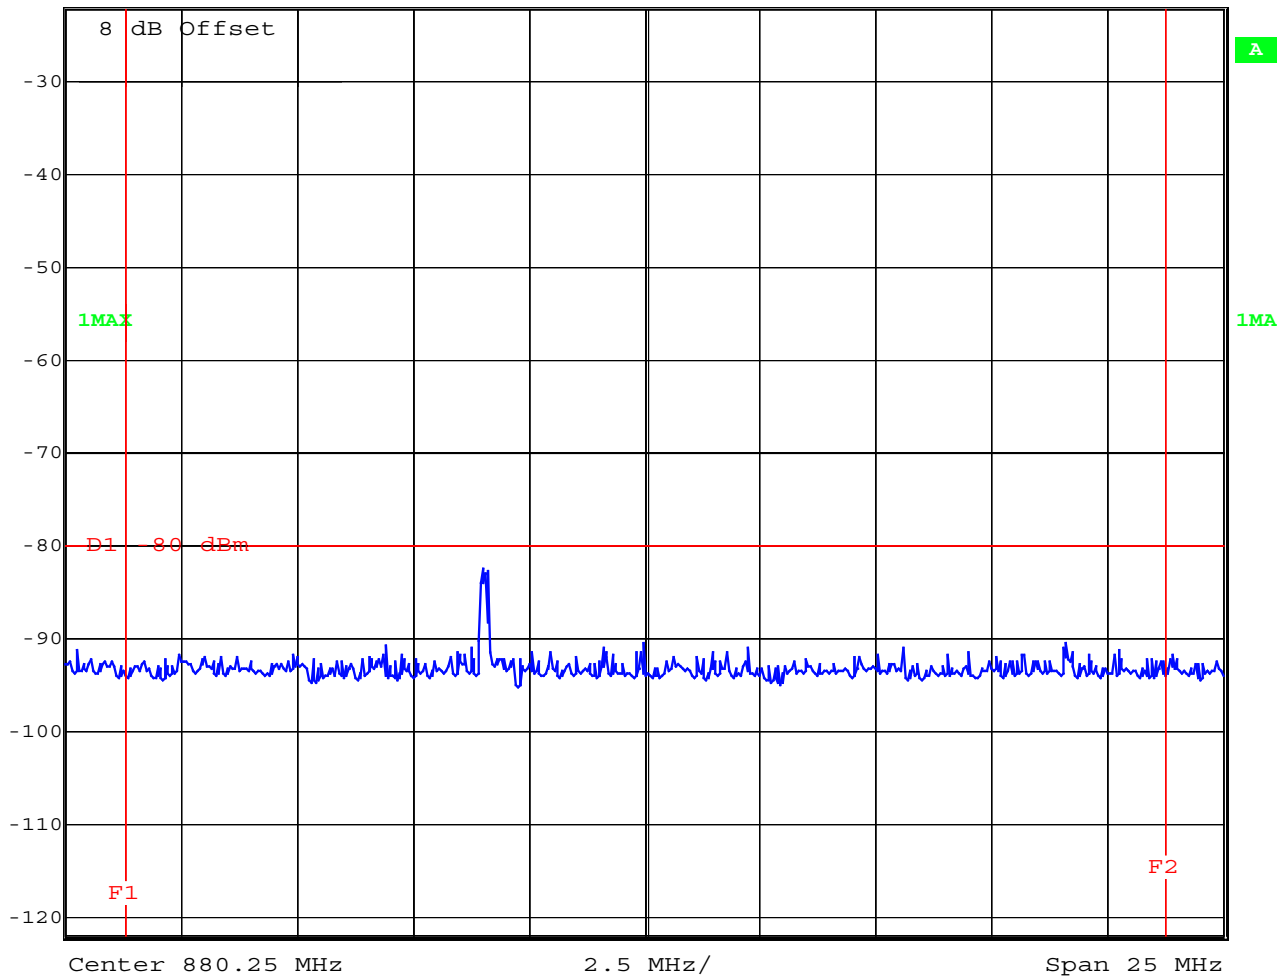

Date: 24.MAY.2002 09:29:02

LIMITS


§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Mobile emissions in the base frequency range
Idle Mode base station frequency range B

	Ref Lvl	Marker 1 [T1]	RBW	30 kHz	RF Att	0 dB
	-22 dBm	-94.43 dBm	VBW	30 kHz	Mixer	-20 dBm
		889.16833667 MHz	SWT	380 ms	Unit	dBm

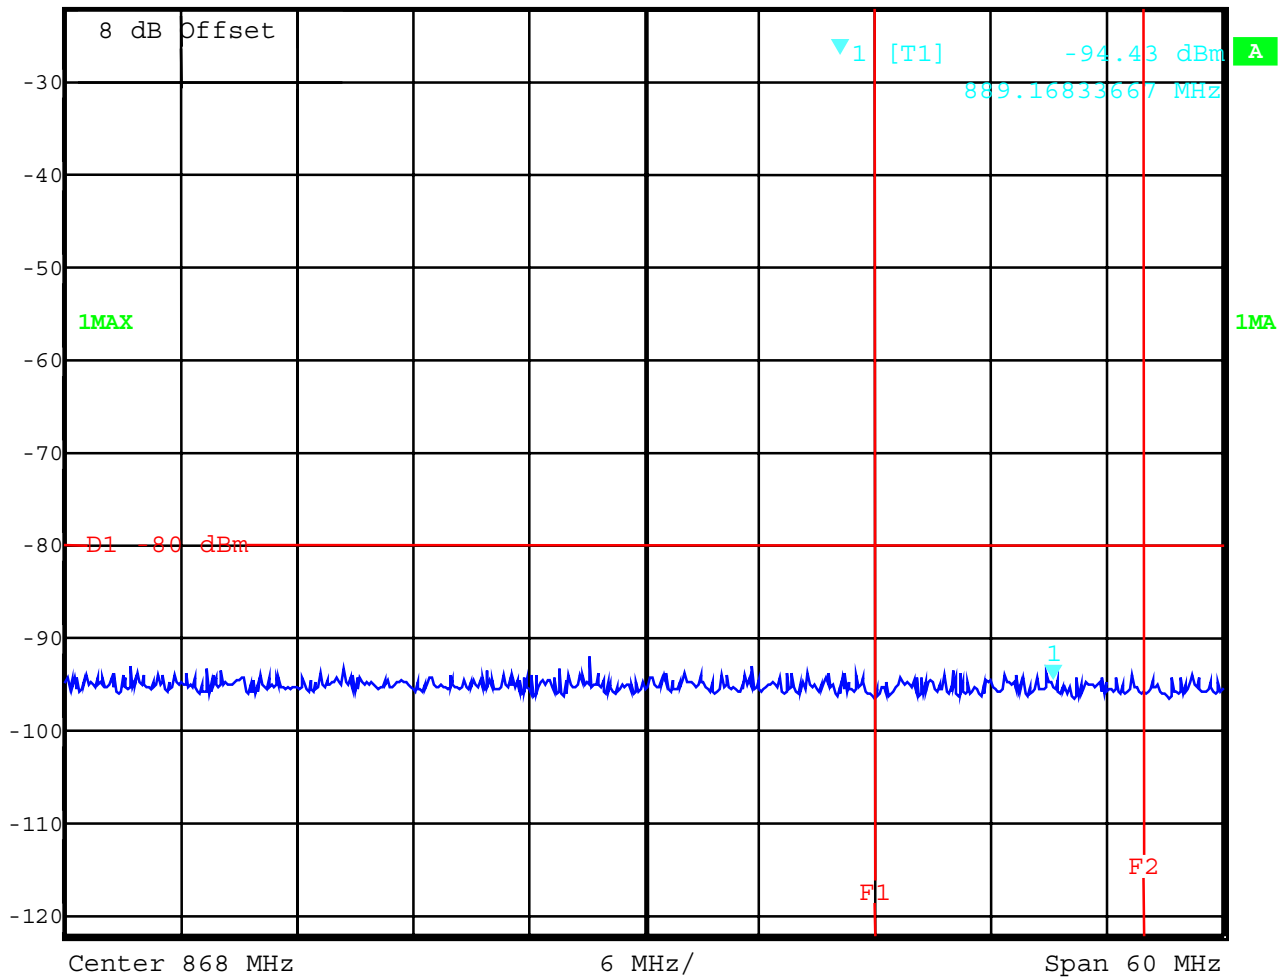

Date: 24.MAY.2002 10:08:37

LIMITS


§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Mobile emissions in the base frequency range
 TX Mode CH 128 base station frequency range A

	Ref Lvl	Marker 1 [T1]	RBW	30 kHz	RF Att	0 dB
	-22 dBm	-82.16 dBm	VBW	30 kHz		
		877.70180361 MHz	SWT	380 ms	Unit	dBm

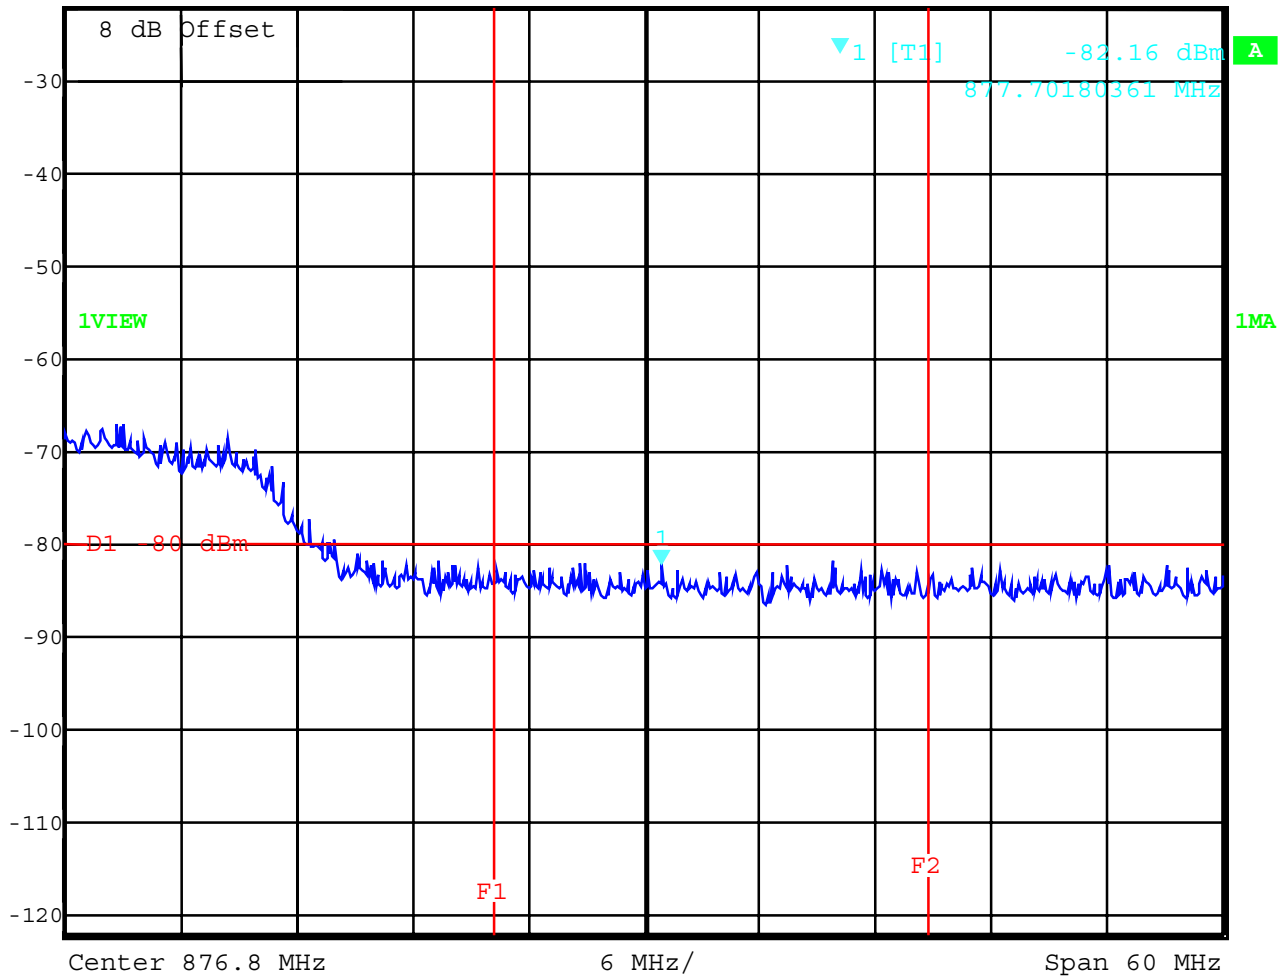

Date: 24.MAY.2002 09:51:28

LIMITS


§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Mobile emissions in the base frequency range
TX Mode CH 251 base station frequency range A

	OVLd	Marker 2 [T1]	RBW	30 kHz	RF Att	0 dB
	Ref Lvl	-85.22 dBm	VBW	30 kHz	Mixer	-20 dBm
	-22 dBm	878.89939880 MHz	SWT	380 ms	Unit	dBm

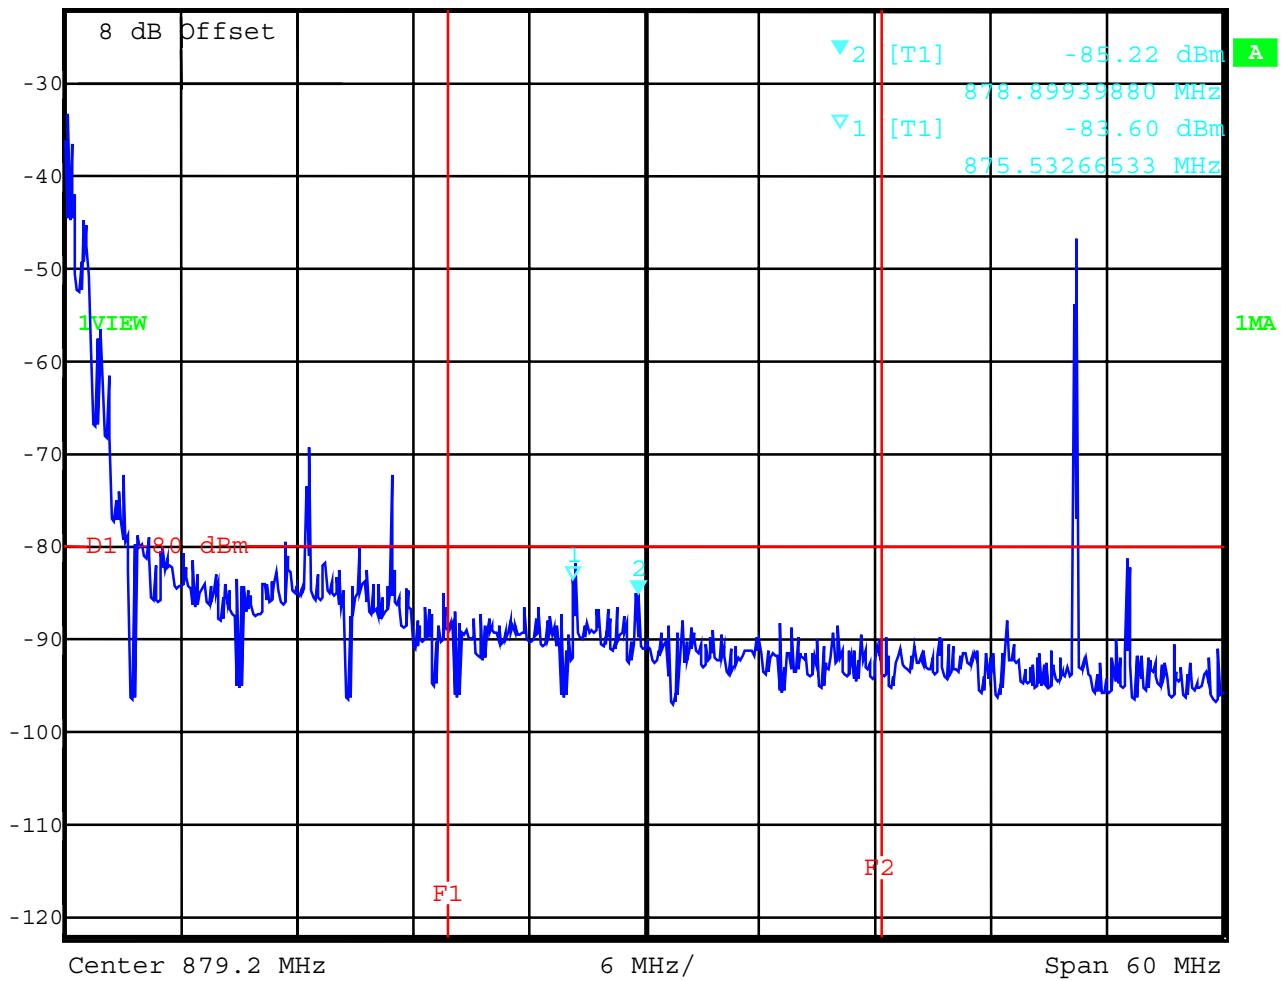

Date: 24.MAY.2002 10:01:10

LIMITS

§22.917(f)


The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Mobile emissions in the base frequency range

TX Mode CH 251 base station frequency range B

	OVLD	Marker 1 [T1]	RBW	30 kHz	RF Att	0 dB
	Ref Lvl	-86.52 dBm	VBW	30 kHz	Mixer	-20 dBm
	-22 dBm	881.06372745 MHz	SWT	380 ms	Unit	dBm

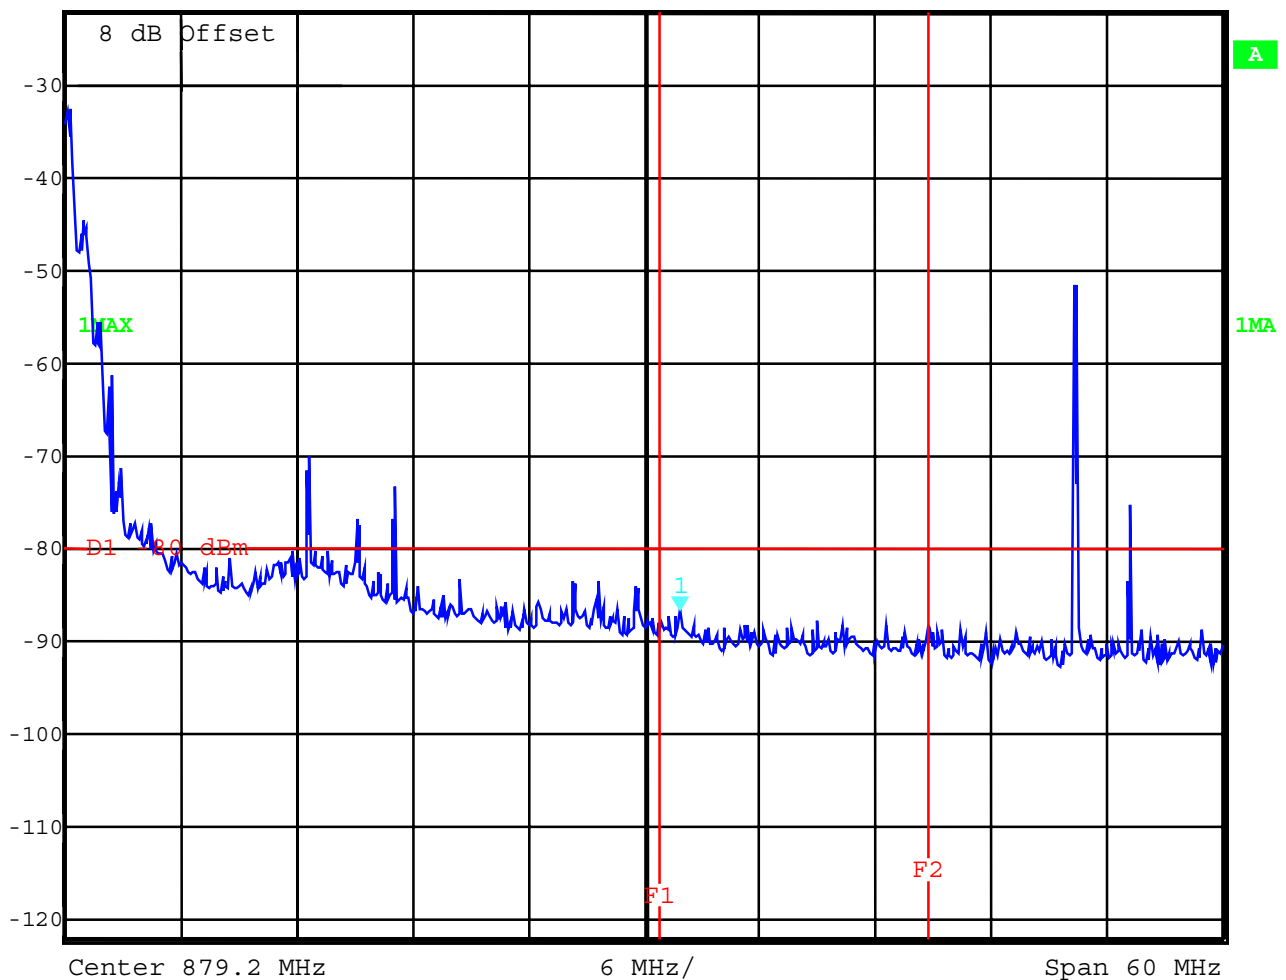

Date: 24.MAY.2002 10:02:16

LIMITS

§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Communication Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Function Generator	AFGU	Rohde & Schwarz	862 480/032
09	Regulating Transformer	MPL	Erfi	91350
10	LISN	NNLA 8120	Schwarzbeck	8120331
11	Relay-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	E4419B	Hewlett-Packard	GB39510924
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulation Meter	9008	Racal-Dana	2647
16	Frequency Counter	5340 A	Hewlett-Packard	1532A03899
17	Anechoic Chamber	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenna	3104	Emco	3758
23	Log. Per. Antenna	3146	Emco	2130
24	Double Ridged Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenna	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenna	HL 223	Rohde & Schwarz	825 584/002
29	Relay-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Anechoic Chamber		Frankonia	
33	Control Computer	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Receiver	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Control Computer	HD 100	Deisel	100/322/93
37	Relay Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relay Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spectrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Measuring Receiver	ESH 3	Rohde & Schwarz	890 174/002
43	Measuring Receiver	ESVP	Rohde & Schwarz	891 752/005
44	Bicon Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisation Network	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridged Horn Antenna 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Controler	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Network	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Network	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phase V-Network	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Power Supply	6032A	Rohde & Schwarz	2933A05441
59	RF-Test Receiver	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	RF-Test Receiver	ESH3	Rohde & Schwarz	881 515/002
62	Relay Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relay Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
66				
67				
68				