



Site : 03CH04-HY  
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL  
EUT : PDA Phone  
POWER : 120Vac/60Hz  
MODEL : FR 742004-01  
MODE : 11b Tx\_Ch11;2462MHz  
Data Rate: 11  
Plane : E2

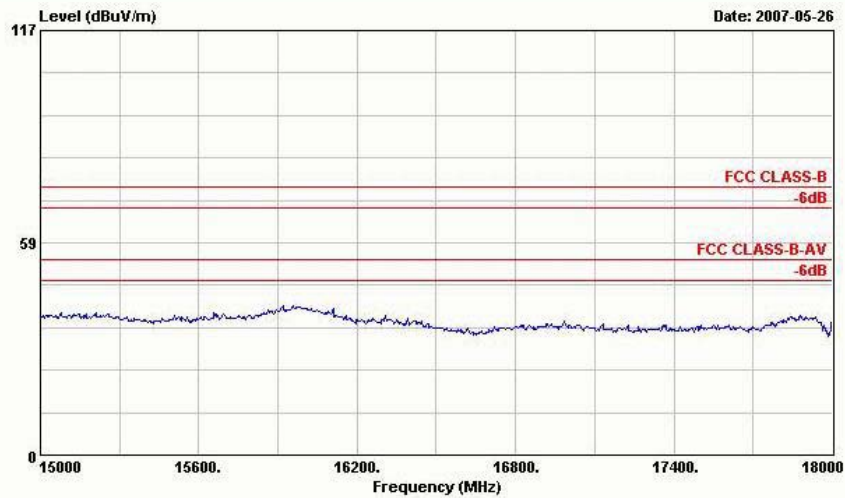

Site : 03CH04-HY  
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL  
EUT : PDA Phone  
POWER : 120Vac/60Hz  
MODEL : FR 742004-01  
MODE : 11b Tx\_Ch11;2462MHz  
Data Rate: 11  
Plane : E2

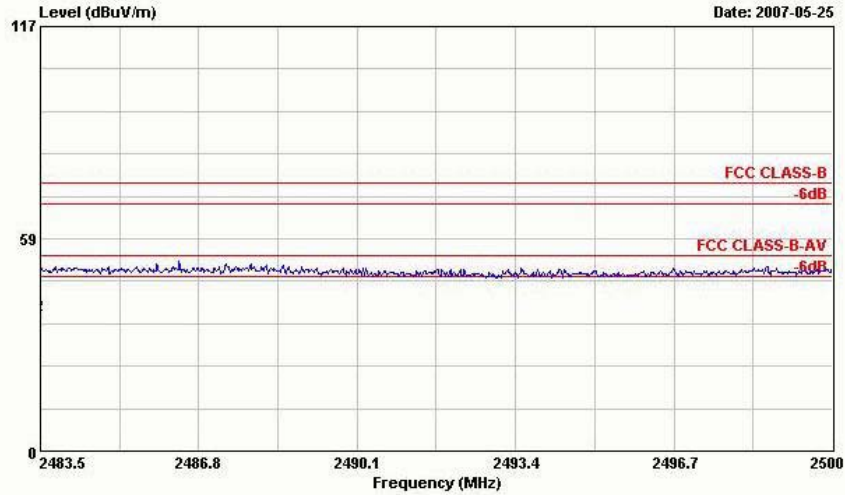


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11b Tx\_Ch11;2462MHz  
 Data Rate: 11  
 Plane : E2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark	
			Limit	Line							Level
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2483.500	50.83	-23.17	74.00	50.36	30.43	3.84	33.80	100		0 Peak
2	2483.500	37.16	-16.84	54.00	36.69	30.43	3.84	33.80	100	154	Average




- Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

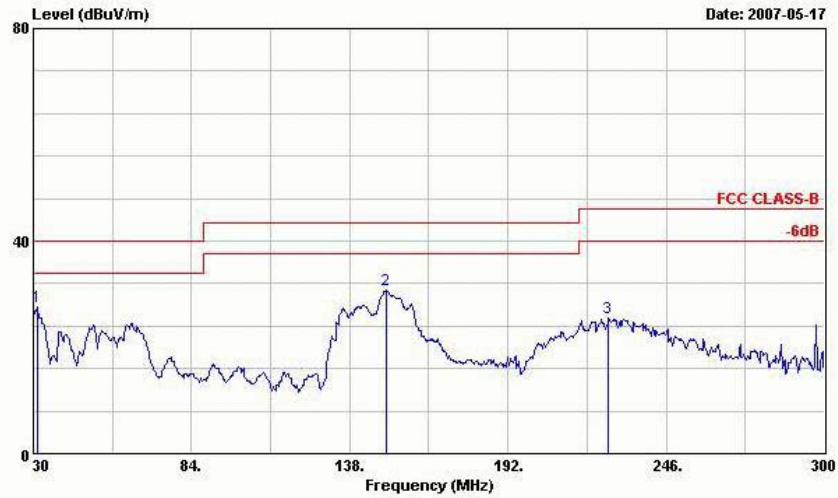


Site : 03CHO4-HY  
 Condition: FCC CLASS-B 3m ANT2724 VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11b Tx\_Ch11;2462MHz  
 Data Rate: 11  
 Plane : E2

Peak	Freq MHz	Level dBuV/m	Over Limit dB	Limit Line dBuV/m	ReadAntenna Level dBuV	Cable Factor dB/m	Preamp Loss dB	Ant Pos cm	Table Pos deg	Remark	
											dB
1	31.620	27.51	-12.49	40.00	43.49	16.34	0.65	32.98	124	267	Peak
2	150.690	30.74	-12.76	43.50	51.49	10.77	1.42	32.94	---	---	Peak
3	226.290	25.58	-20.42	46.00	45.92	10.72	1.76	32.82	---	---	Peak

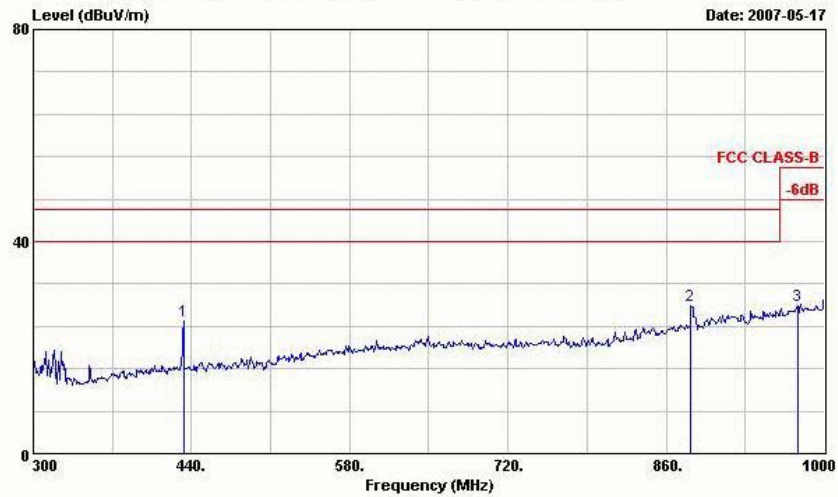

Site : 03CHO4-HY  
 Condition: FCC CLASS-B 3m ANT2724 VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11b Tx\_Ch11;2462MHz  
 Data Rate: 11  
 Plane : E2


Peak	Freq MHz	Level dBuV/m	Over Limit dB	Limit Line dBuV/m	ReadAntenna Level dBuV	Cable Factor dB/m	Preamp Loss dB	Ant Pos cm	Table Pos deg	Remark	
											dB
1	433.000	24.98	-21.02	46.00	39.19	16.13	2.43	32.78	---	---	Peak
2	881.700	27.80	-18.20	46.00	32.95	22.83	3.61	31.59	---	---	Peak
3	976.200	27.97	-26.03	54.00	30.05	25.43	3.67	31.18	---	---	Peak

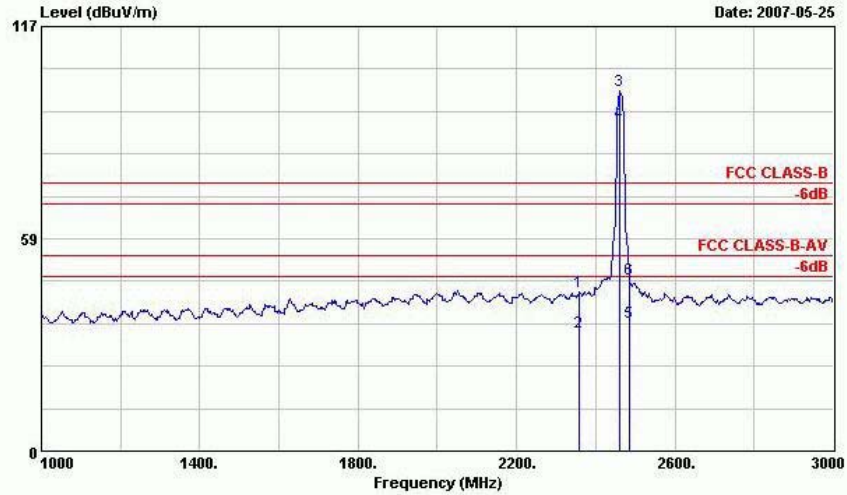

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11b Tx\_Ch11;2462MHz  
 Data Rate: 11  
 Plane : E2


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					dBuV	dB/m	dB	cm	deg	
1	2358.000	44.05	-29.95	74.00	43.46	30.65	3.71	33.77	100	0 Peak
2	2358.000	32.81	-41.19	74.00	32.22	30.65	3.71	33.77	100	153 Average
3 @	2462.000	99.24			98.76	30.46	3.81	33.79	100	0 Peak
4 @	2462.000	90.27			89.79	30.46	3.81	33.79	100	153 Average
5	2483.550	35.35	-38.65	74.00	34.88	30.43	3.84	33.80	100	153 Average
6	2483.550	47.30	-26.70	74.00	46.83	30.43	3.84	33.80	100	0 Peak

Remark: #3 and #4 Fundamental Signal

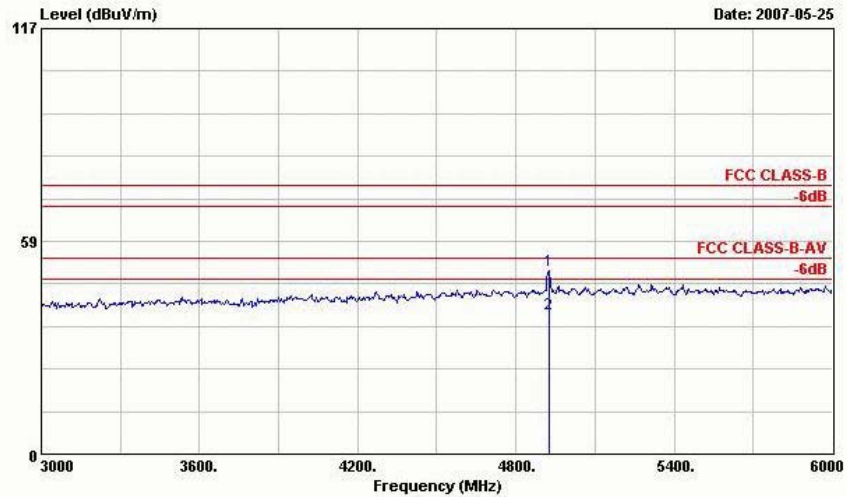


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11b Tx\_Ch11;2462MHz  
 Data Rate: 11  
 Plane : E2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					dBuV	dB/m	dB	cm	deg	
1	4926.000	50.60	-23.40	74.00	45.23	33.72	5.95	34.30	100	0 Peak
2	4926.000	38.53	-15.47	54.00	33.16	33.72	5.95	34.30	100	233 Average

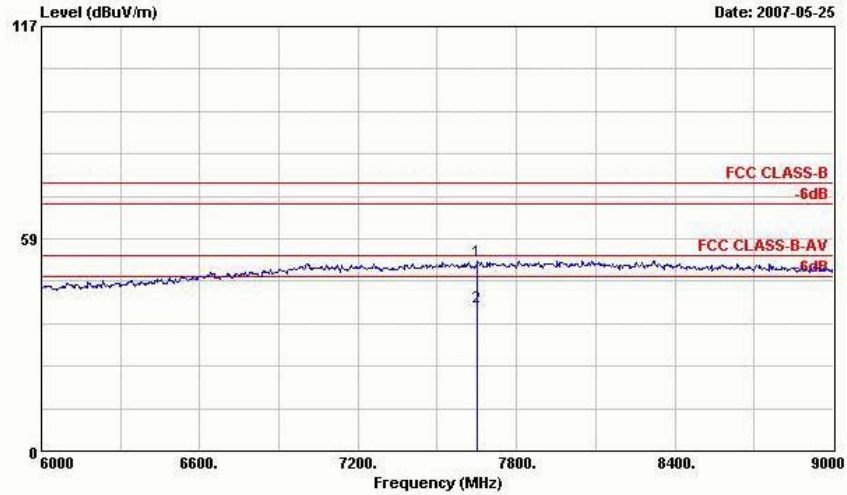


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11b Tx\_Ch11;2462MHz  
 Data Rate: 11  
 Plane : E2


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7653.000	52.45	-21.55	74.00	40.35	39.22	6.62	33.74	100	0 Peak
2	7653.000	39.60	-14.40	54.00	27.50	39.22	6.62	33.74	100	0 Average

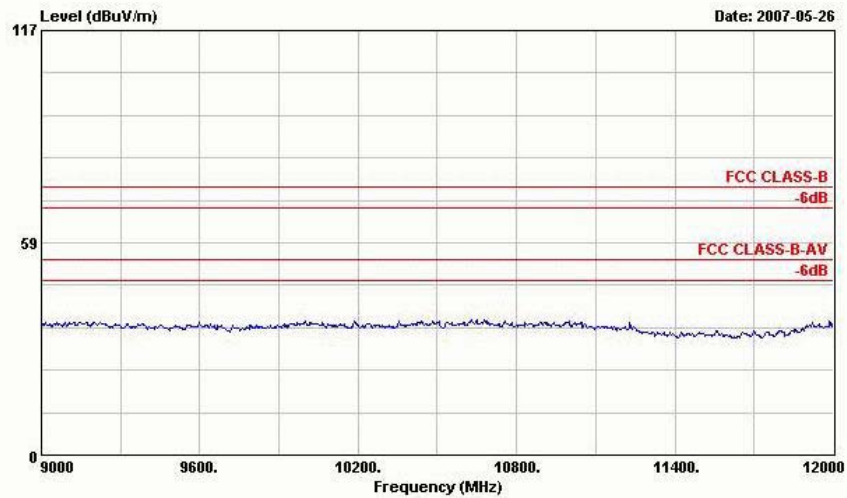

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11b Tx\_Ch11;2462MHz  
 Data Rate: 11  
 Plane : E2

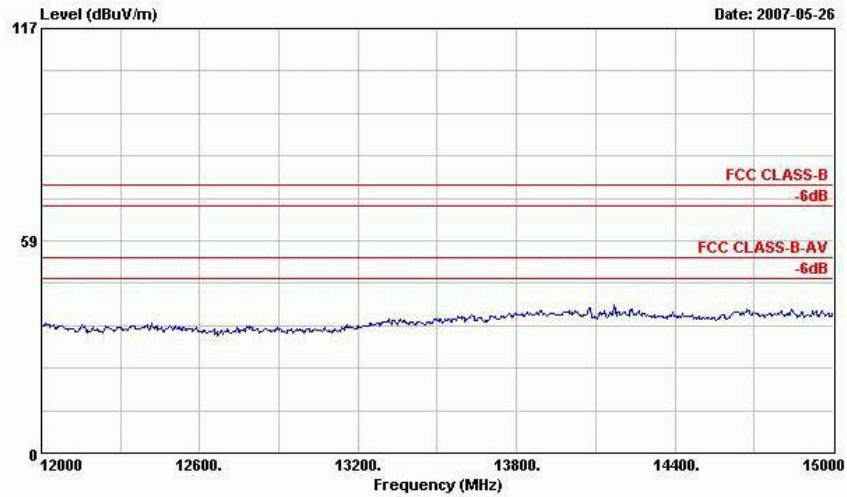


Site : 03CH04-HY  
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL  
EUT : PDA Phone  
POWER : 120Vac/60Hz  
MODEL : FR 742004-01  
MODE : 11b Tx\_Ch11;2462MHz  
Data Rate: 11  
Plane : E2

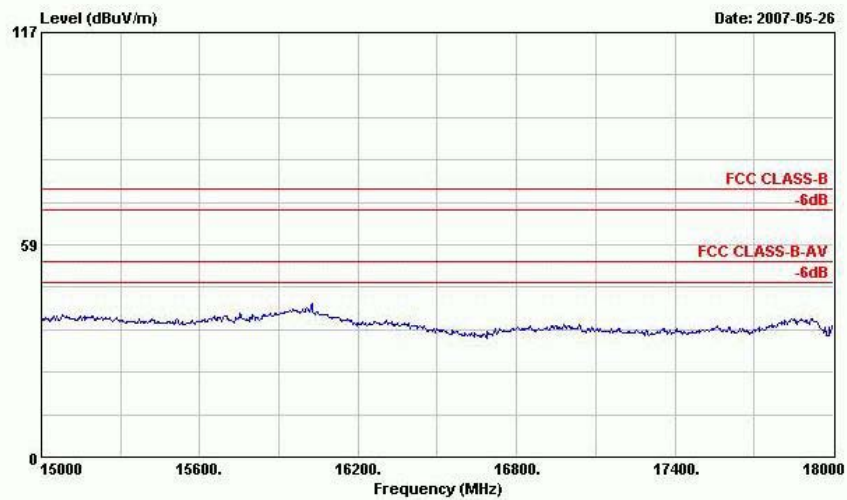

Site : 03CH04-HY  
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL  
EUT : PDA Phone  
POWER : 120Vac/60Hz  
MODEL : FR 742004-01  
MODE : 11b Tx\_Ch11;2462MHz  
Data Rate: 11  
Plane : E2



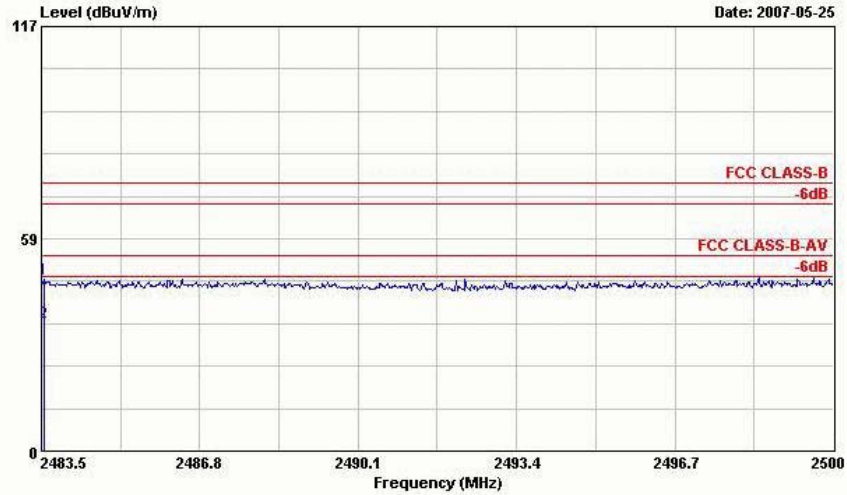

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11b Tx\_Ch11;2462MHz  
 Data Rate: 11  
 Plane : E2


	Freq MHz	Level dBuV/m	Over Limit dB	Limit Line dBuV/m	ReadAntenna		Cable Preamp		Ant Pos cm	Table Pos deg	Remark
					Level dBuV	Factor dB/m	Loss dB	Factor dB			
1	2483.550	47.30	-26.70	74.00	46.83	30.43	3.84	33.80	100	0	Peak
2	2483.550	35.35	-38.65	74.00	34.88	30.43	3.84	33.80	100	153	Average

Remark : Frequency from 18GHz to 25GHz, the emission emitted by the EUT is too low to be measured.




- Test Mode : Mode 4
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

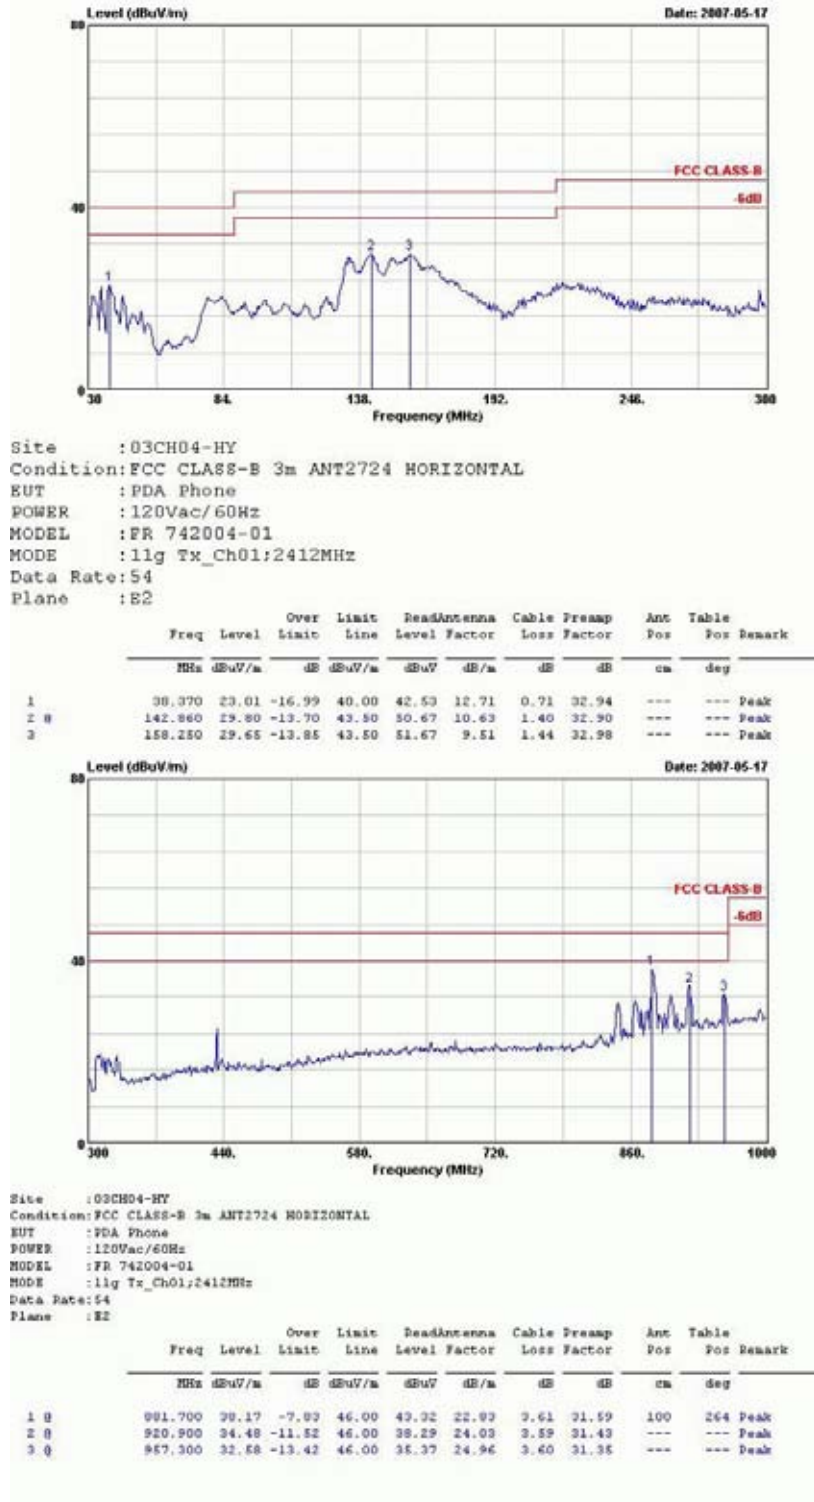




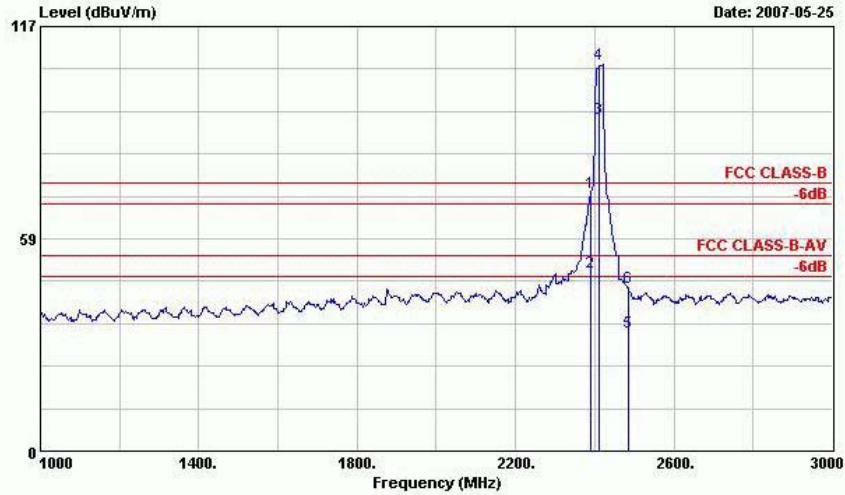


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch01;2412MHz  
 Data Rate: 54  
 Plane : E2

Line	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	2389.920	71.39	-2.61	74.00	70.85	30.59	3.74	33.78	100	0 Peak
2 @	2389.920	49.22	-4.78	54.00	48.68	30.59	3.74	33.78	100	156 Average
3 @	2412.000	91.46			90.92	30.56	3.76	33.78	100	156 Average
4 @	2412.000	106.44			105.94	30.52	3.76	33.79	100	0 Peak
5	2483.500	32.69	-21.31	54.00	32.22	30.43	3.84	33.80	100	156 Average
6	2483.500	44.85	-29.15	74.00	44.38	30.43	3.84	33.80	100	0 Peak

Remark: #3 and #4 Fundamental Signal

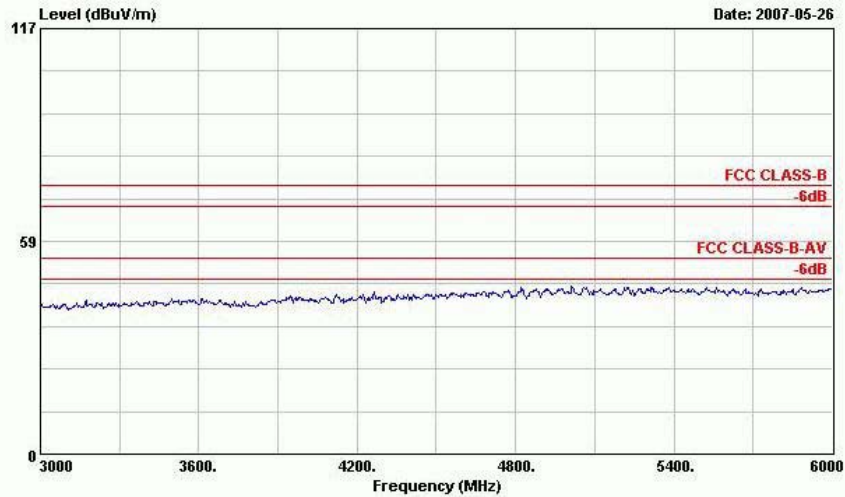


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch01;2412MHz  
 Data Rate: 54  
 Plane : E2

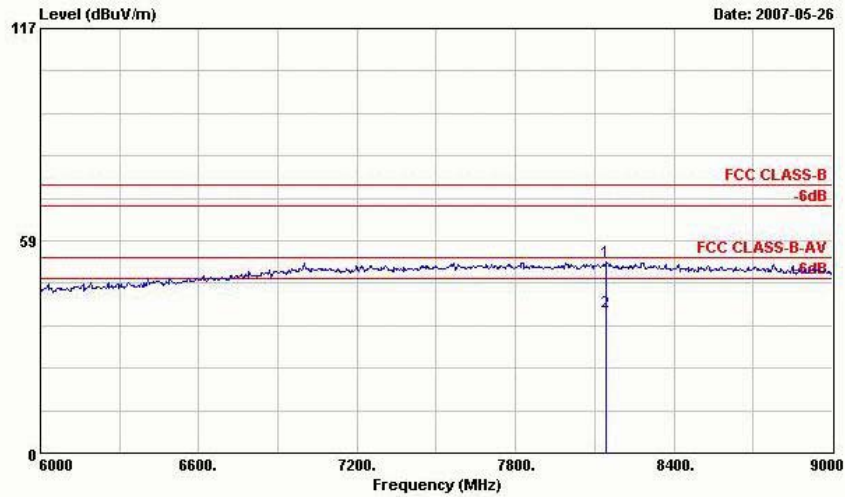


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch01;2412MHz  
 Data Rate: 54  
 Plane : E2


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8145.000	52.60	-21.40	74.00	40.13	39.44	6.83	33.81	100	0 Peak
2	8145.000	38.94	-15.06	54.00	26.47	39.44	6.83	33.81	100	0 Average

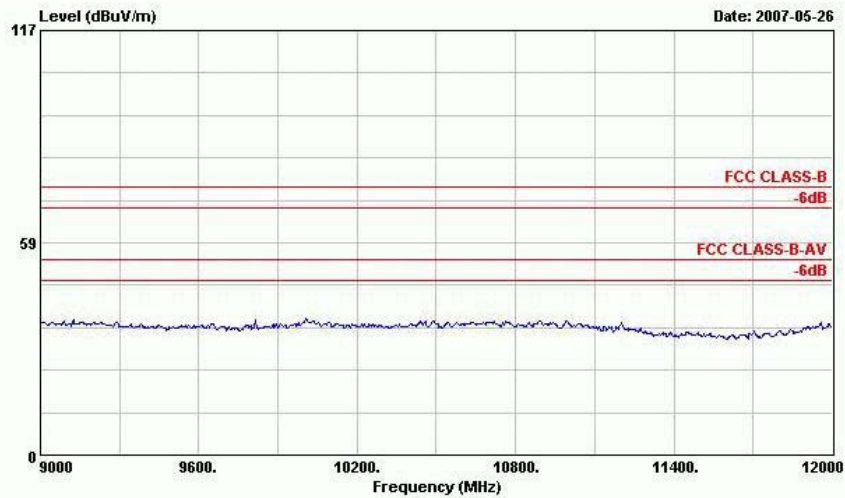


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch01;2412MHz  
 Data Rate: 54  
 Plane : E2

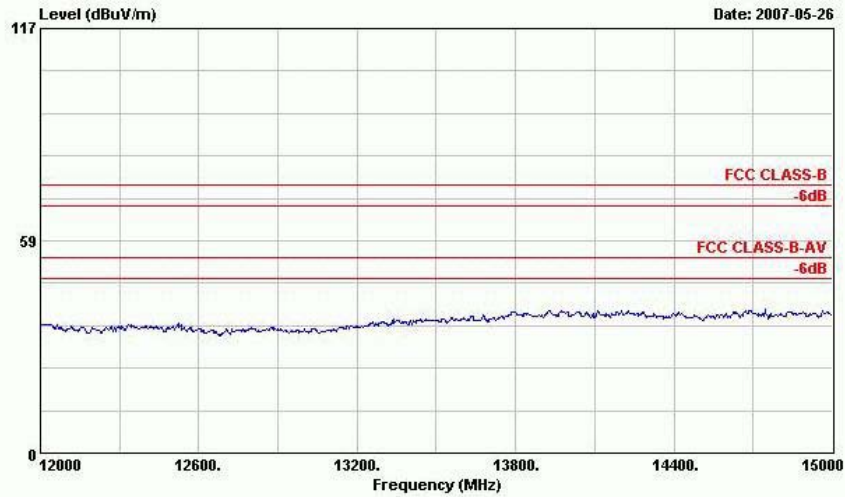

Site : 03CH04-HY  
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL  
EUT : PDA Phone  
POWER : 120Vac/60Hz  
MODEL : FR 742004-01  
MODE : 11g Tx\_Ch01;2412MHz  
Data Rate: 54  
Plane : E2

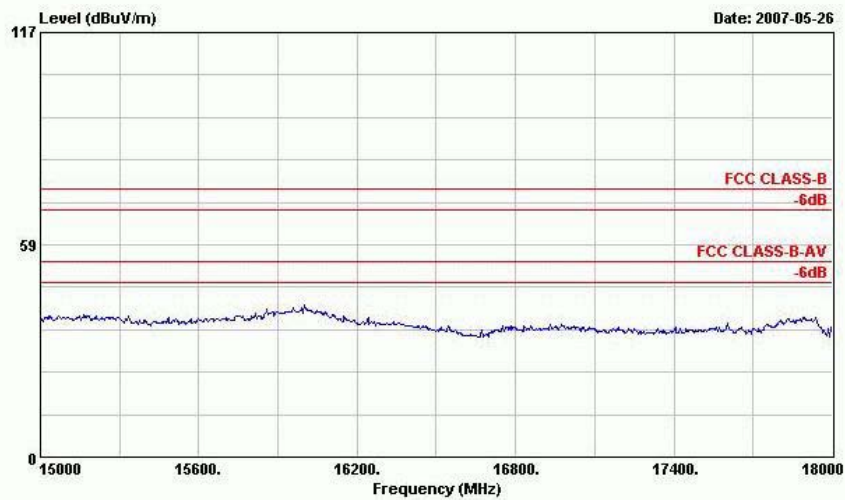

Site : 03CH04-HY  
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL  
EUT : PDA Phone  
POWER : 120Vac/60Hz  
MODEL : FR 742004-01  
MODE : 11g Tx\_Ch01;2412MHz  
Data Rate: 54  
Plane : E2

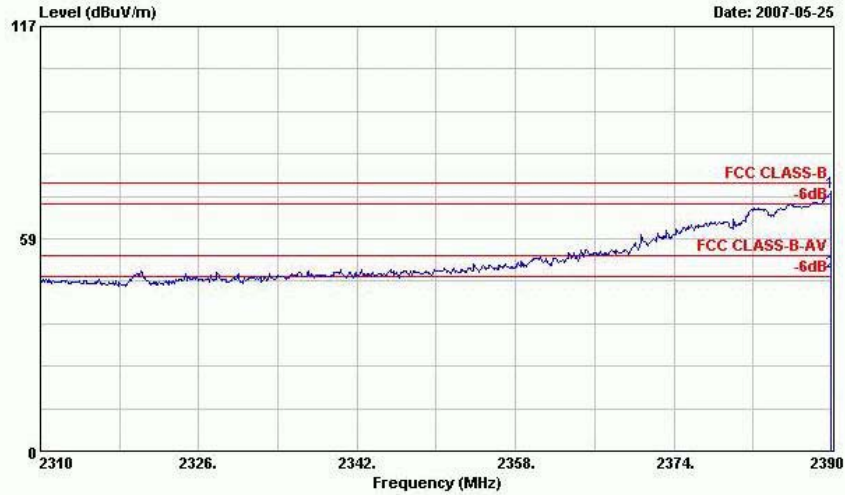


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch01;2412MHz  
 Data Rate: 54  
 Plane : E2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	2389.920	71.39	-2.61	74.00	70.85	30.59	3.74	33.78	100	0 Peak
2 @	2389.920	49.22	-4.78	54.00	48.68	30.59	3.74	33.78	100	156 Average




- Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

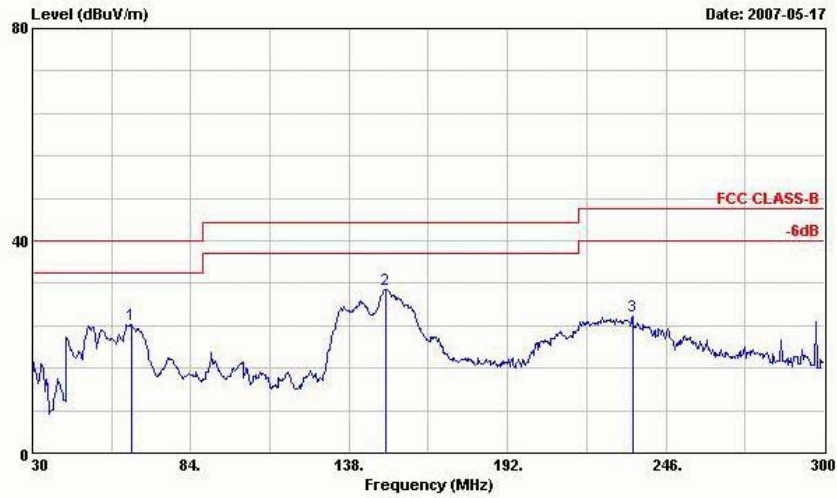

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ANT2724 VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 1lg Tx\_Ch01;2412MHz  
 Data Rate: 54  
 Plane : E2


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	64.020	24.28	-15.72	40.00	51.91	4.29	0.87	32.80	---	---
2	150.420	30.77	-12.73	43.50	51.52	10.77	1.42	32.94	241	246
3	234.660	25.75	-20.25	46.00	45.39	11.39	1.81	32.84	---	---

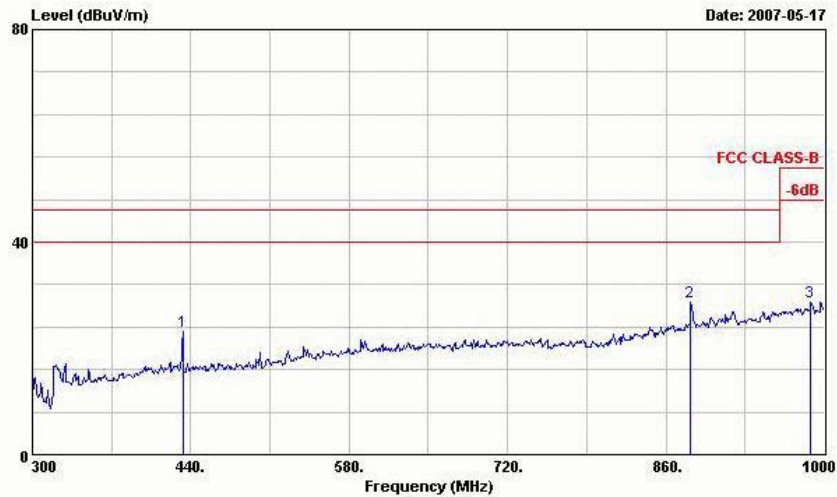

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ANT2724 VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 1lg Tx\_Ch01;2412MHz  
 Data Rate: 54  
 Plane : E2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	433.000	23.06	-22.94	46.00	37.27	16.13	2.43	32.78	---	---
2	881.700	28.67	-17.33	46.00	33.82	22.83	3.61	31.59	---	---
3	988.100	28.79	-25.21	54.00	30.39	25.75	3.71	31.07	---	---




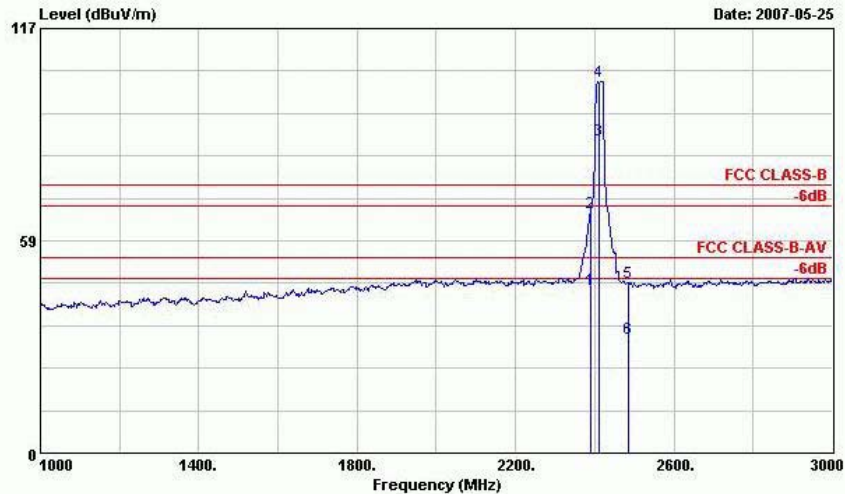

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch01;2412MHz  
 Data Rate: 54  
 Plane : E2


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	2389.600	44.86	-9.14	54.00	44.31	30.59	3.74	33.78	100	152 Average
2 @	2389.600	66.37	-7.63	74.00	65.82	30.59	3.74	33.78	100	0 Peak
3 @	2412.000	86.31			85.77	30.56	3.76	33.78	100	152 Average
4 @	2412.000	102.52			101.98	30.56	3.76	33.78	100	0 Peak
5	2483.500	47.10	-26.90	74.00	46.63	30.43	3.84	33.80	100	0 Peak
6	2483.500	31.46	-22.54	54.00	30.99	30.43	3.84	33.80	100	152 Average

Remark: #3 and #4 Fundamental Signal

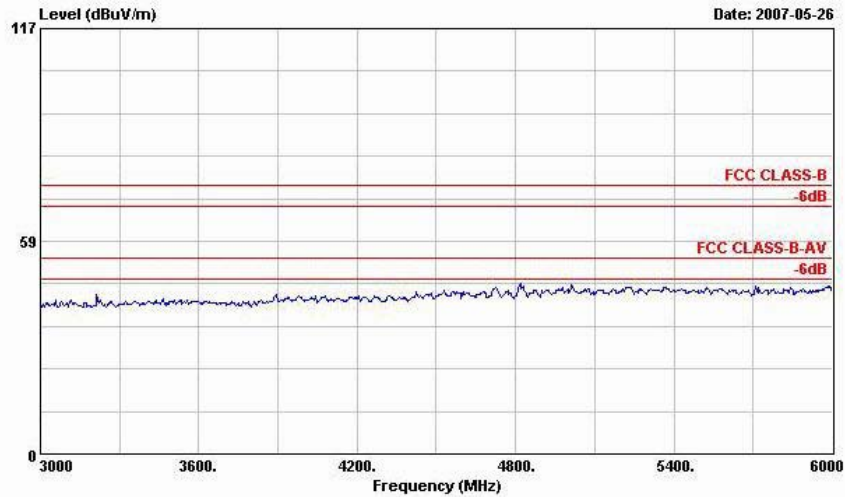


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch01;2412MHz  
 Data Rate: 54  
 Plane : E2



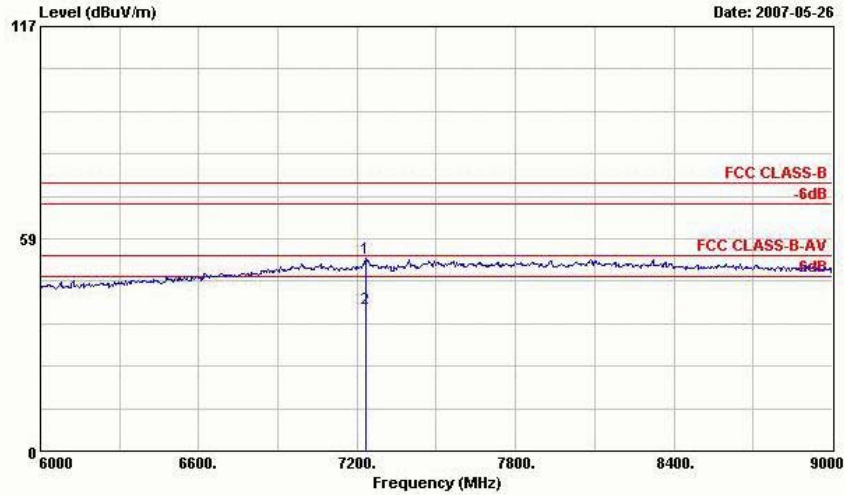


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch01;2412MHz  
 Data Rate: 54  
 Plane : E2


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	Pos	Pos Remark
									cm	deg
1	7233.000	53.07	-20.93	74.00	41.32	38.38	6.46	33.09	100	0 Peak
2	7233.000	39.11	-14.89	54.00	27.36	38.38	6.46	33.09	100	0 Average

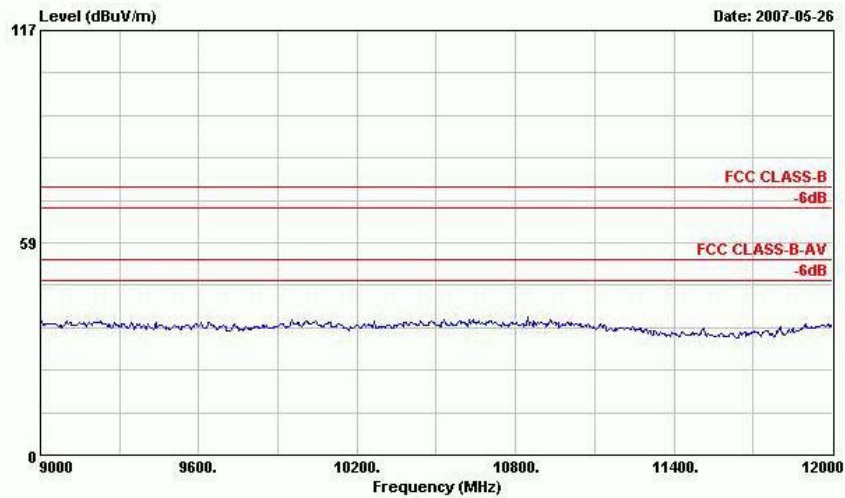


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch01;2412MHz  
 Data Rate: 54  
 Plane : E2

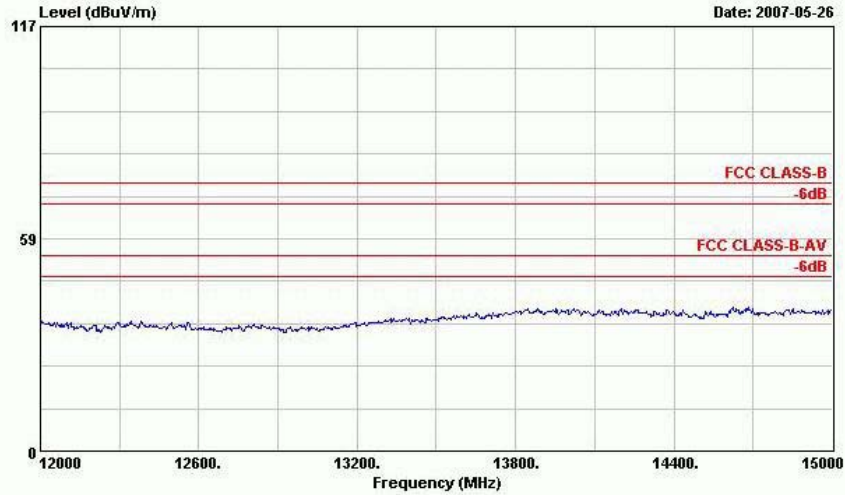

Site : 03CH04-HY  
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL  
EUT : PDA Phone  
POWER : 120Vac/60Hz  
MODEL : FR 742004-01  
MODE : 11g Tx\_Ch01;2412MHz  
Data Rate: 54  
Plane : E2

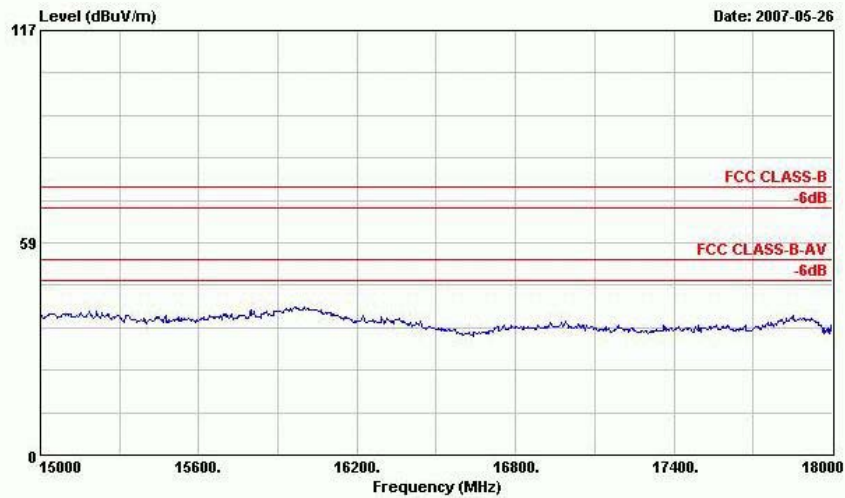

Site : 03CH04-HY  
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL  
EUT : PDA Phone  
POWER : 120Vac/60Hz  
MODEL : FR 742004-01  
MODE : 11g Tx\_Ch01;2412MHz  
Data Rate: 54  
Plane : E2

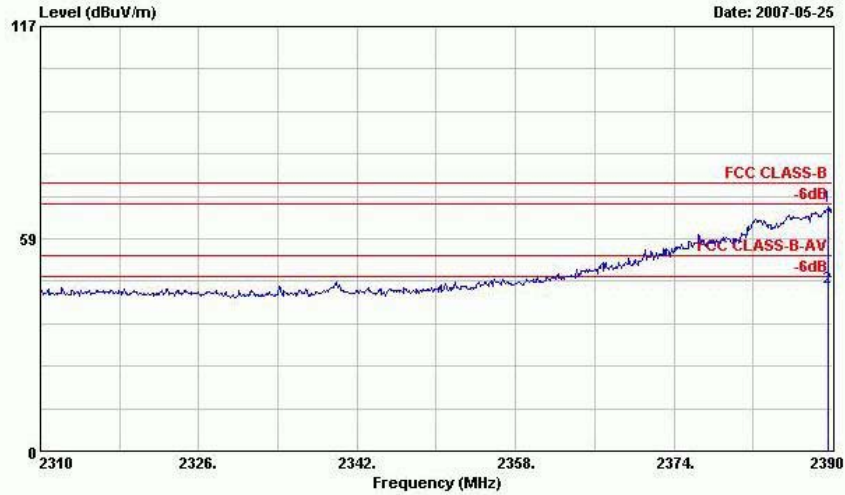

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch01;2412MHz  
 Data Rate: 54  
 Plane : E2


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2389.600	67.37	-6.63	74.00	66.82	30.59	3.74	33.78	100	0 Peak
2	2389.600	44.86	-9.14	54.00	44.31	30.59	3.74	33.78	100	152 Average

Remark : Frequency from 18GHz to 25GHz, the emission emitted by the EUT is too low to be measured.




- Test Mode : Mode 5
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

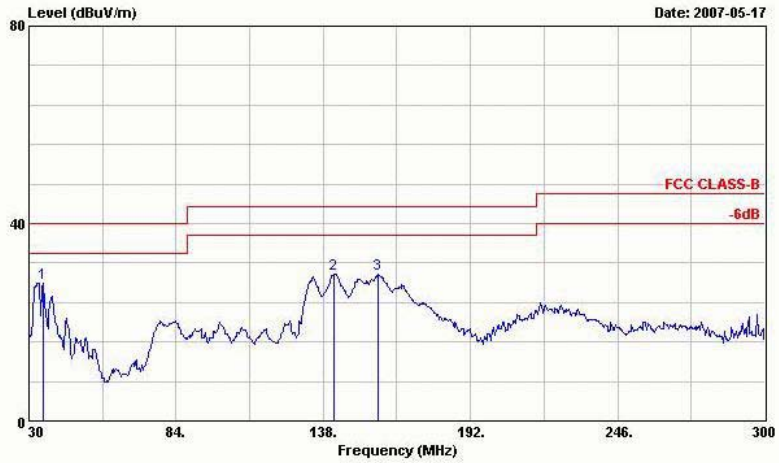


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch06;2437MHz  
 Data Rate: 54  
 Plane : E2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	35.130	27.90	-12.10	40.00	44.04	16.29	0.68	33.11	---	---
2	142.050	29.70	-13.80	43.50	50.57	10.63	1.40	32.90	---	---
3	158.250	29.62	-13.88	43.50	51.64	9.51	1.44	32.98	---	---

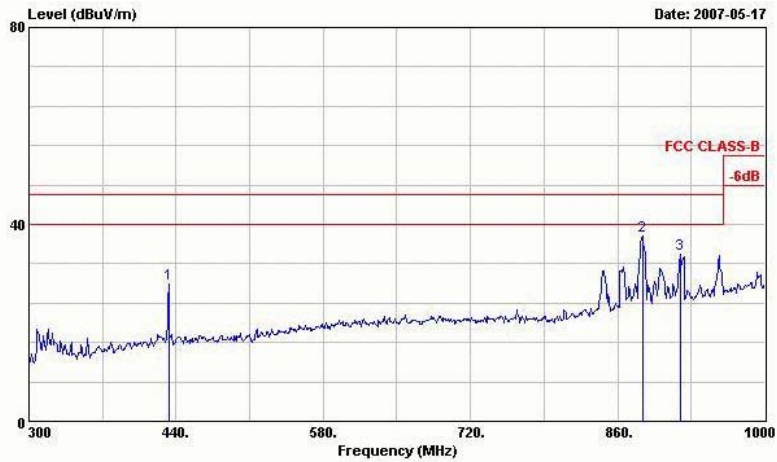

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch06;2437MHz  
 Data Rate: 54  
 Plane : E2


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	433.000	27.81	-18.19	46.00	42.02	16.13	2.43	32.78	---	---
2 @	883.800	37.68	-8.32	46.00	42.74	22.91	3.61	31.58	124	221
3	920.200	33.88	-12.12	46.00	37.69	24.03	3.59	31.43	---	---

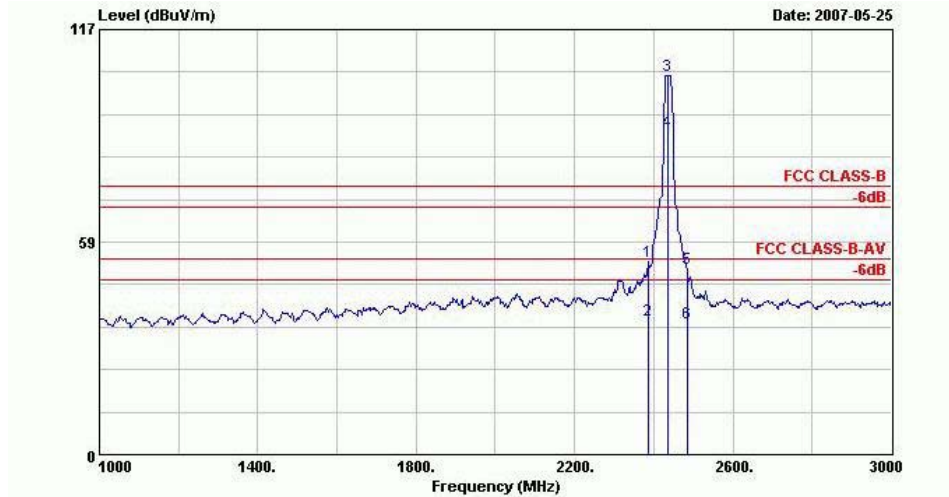

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch06;2437MHz  
 Data Rate: 54  
 Plane : E2



	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2388.000	53.03	-20.97	74.00	52.48	30.59	3.74	33.78	---	---
2	2388.000	36.90	-17.10	54.00	36.35	30.59	3.74	33.78	100	151
3 @	2437.000	104.33			103.80	30.52	3.79	33.79	---	---
4 @	2437.000	88.84			88.37	30.43	3.84	33.80	100	151
5	2483.500	51.20	-22.80	74.00	50.73	30.43	3.84	33.80	---	---
6	2483.500	36.15	-17.85	54.00	35.68	30.43	3.84	33.80	100	151

Remark: #3 and #4 Fundamental Signal


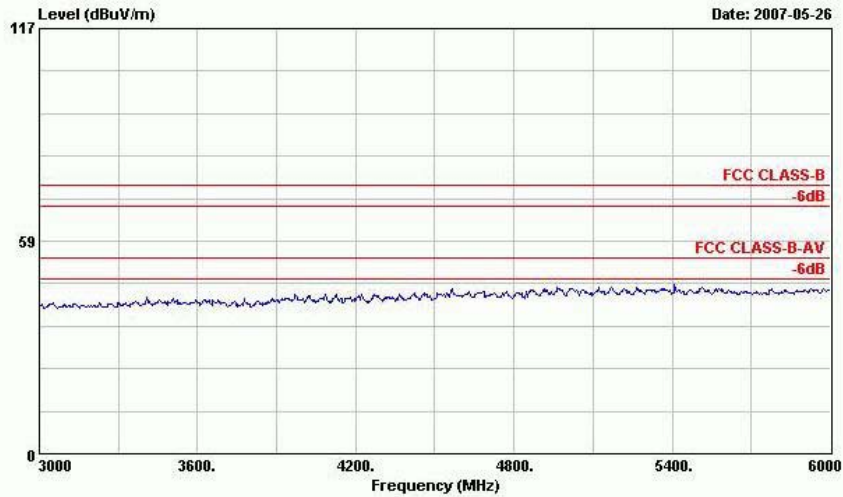



Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch06;2437MHz  
 Data Rate: 54  
 Plane : E2



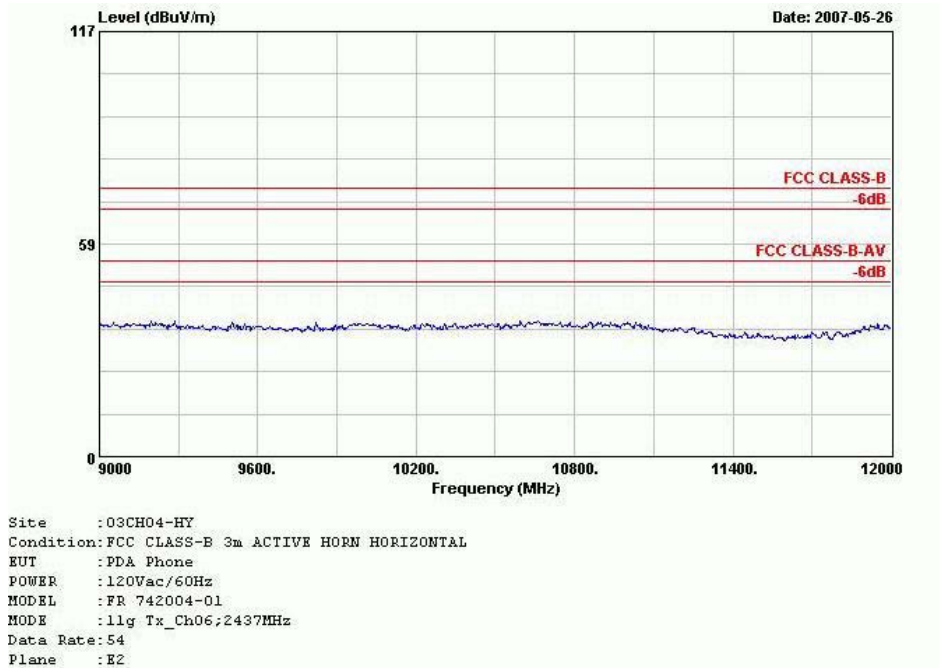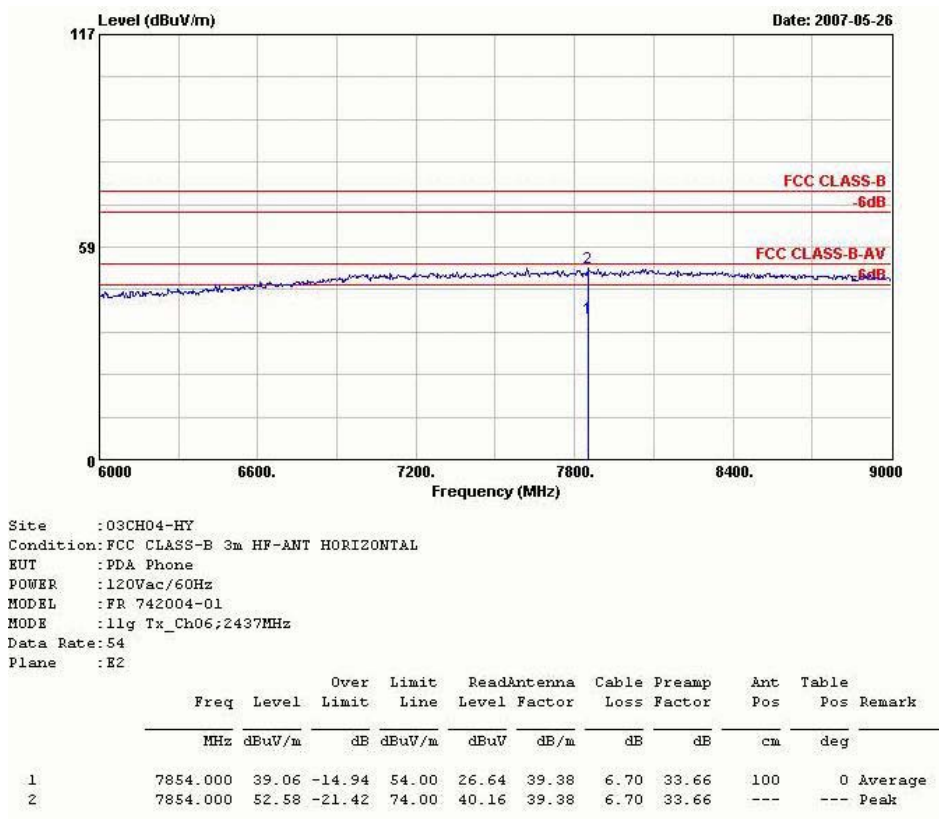



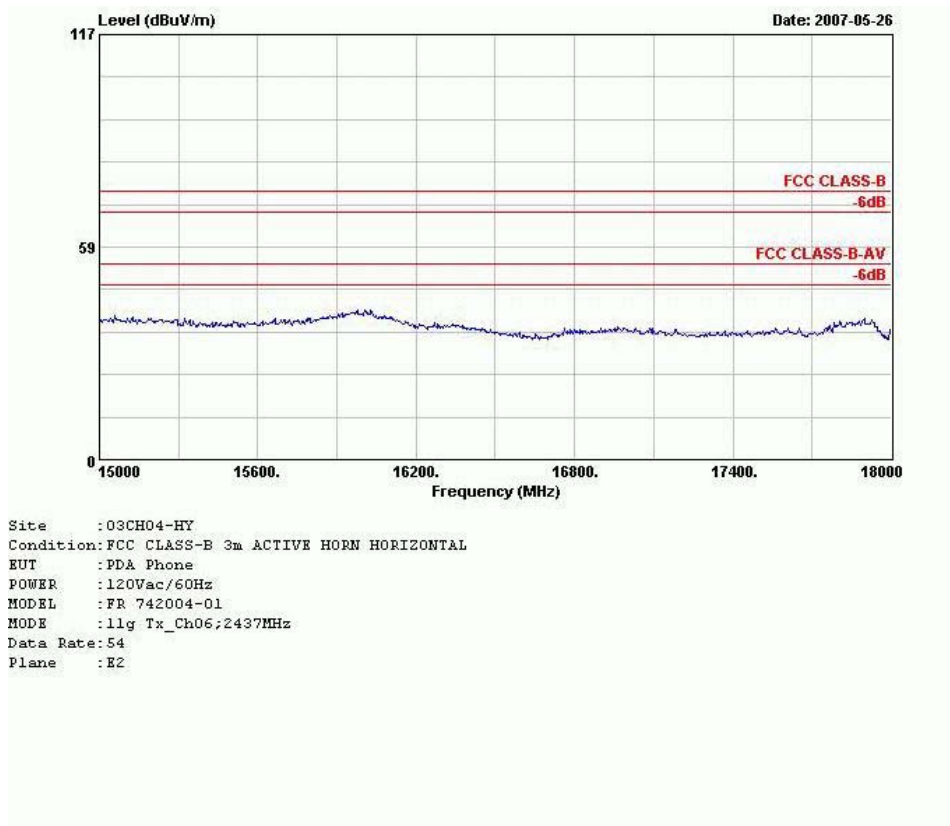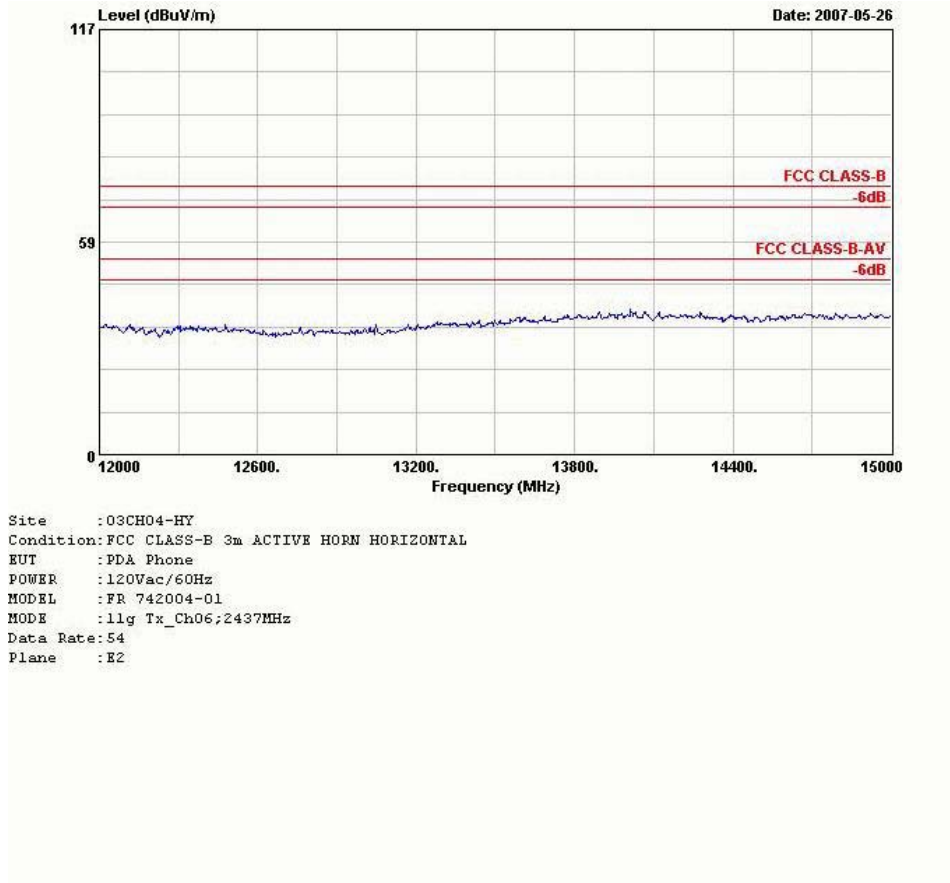


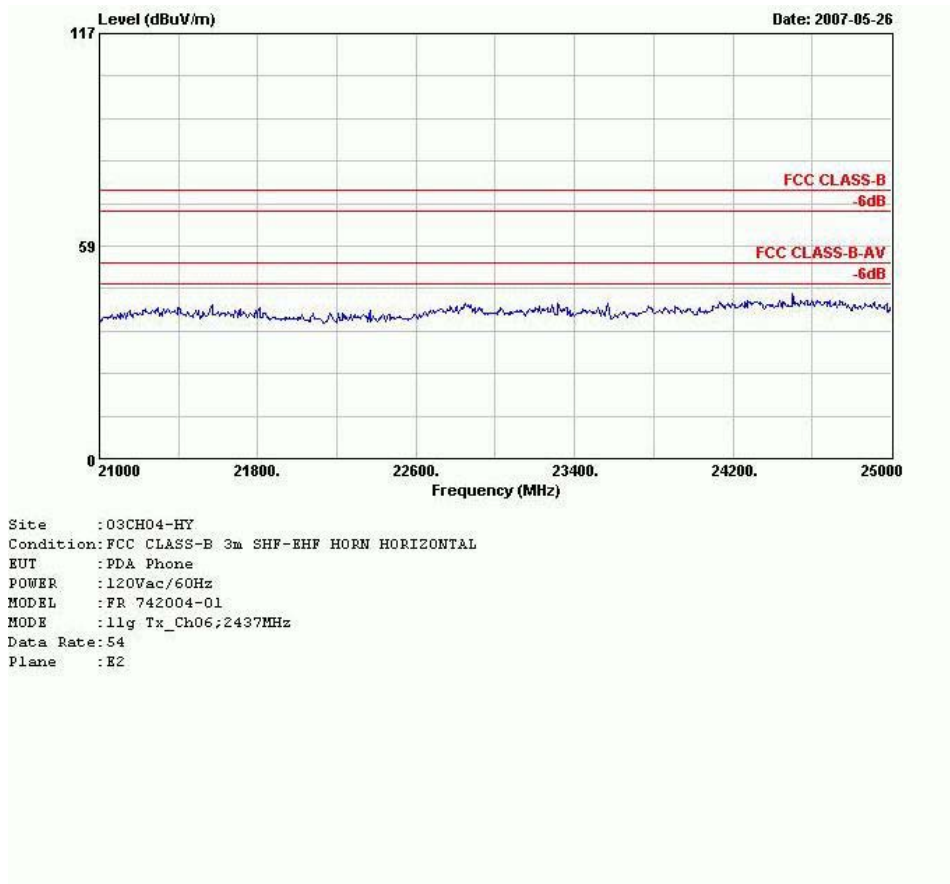




- Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

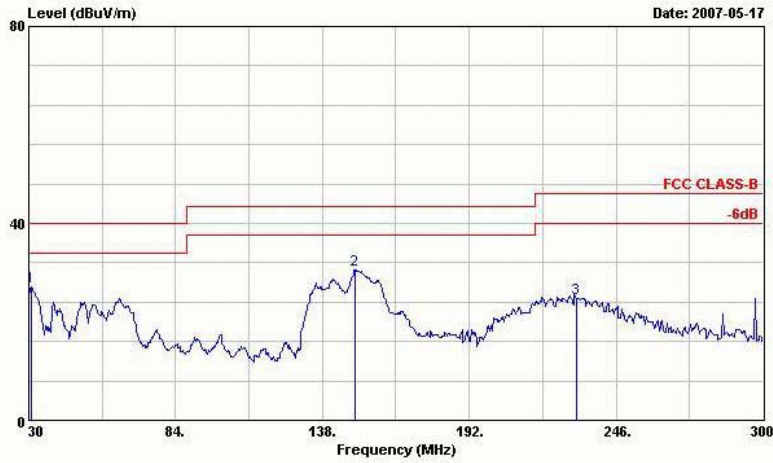


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ANT2724 VERTICAL  
 EUT : PDA Phone  
 POWER : 1.20Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch06;2437MHz  
 Data Rate: 54  
 Plane : E2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	30.810	27.04	-12.96	40.00	42.97	16.36	0.64	32.93	100	264 Peak
2	149.880	30.49	-13.01	43.50	51.24	10.77	1.42	32.94	---	---
3	231.420	24.81	-21.19	46.00	44.69	11.16	1.79	32.83	---	---

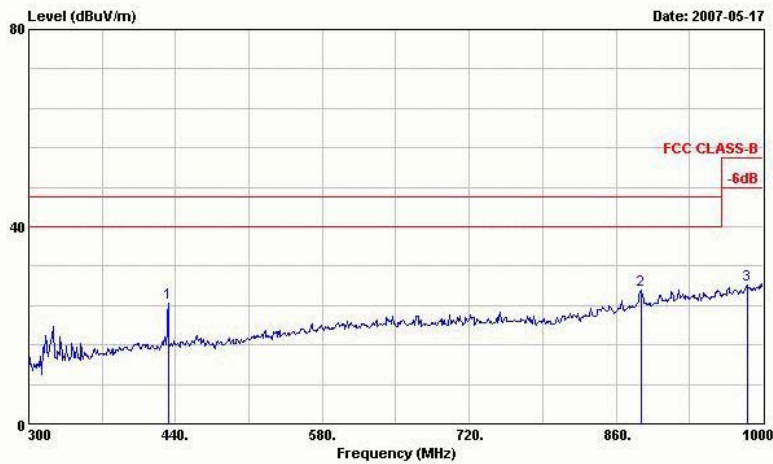

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ANT2724 VERTICAL  
 EUT : PDA Phone  
 POWER : 1.20Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch06;2437MHz  
 Data Rate: 54  
 Plane : E2


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	433.000	24.59	-21.41	46.00	38.80	16.13	2.43	32.78	---	---
2	883.800	27.10	-18.90	46.00	32.16	22.91	3.61	31.58	---	---
3	984.600	28.06	-25.94	54.00	29.81	25.66	3.70	31.10	---	---

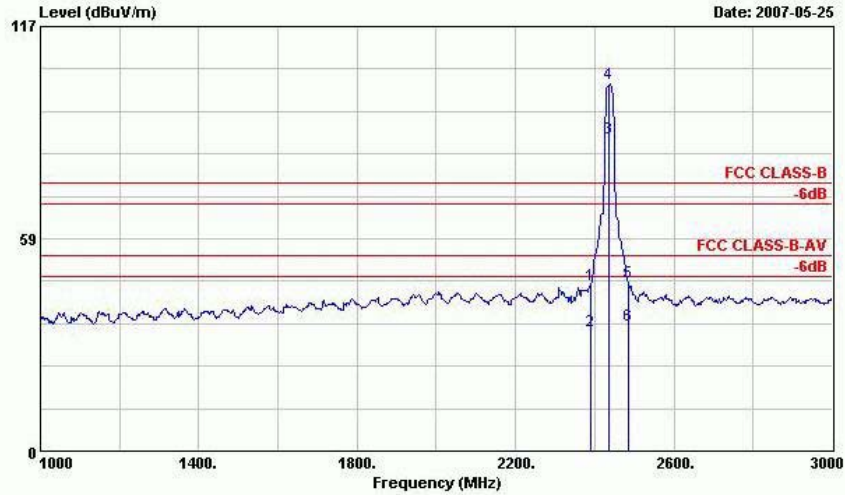


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch06;2437MHz  
 Data Rate: 54  
 Plane : E2

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	
MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Remark
		dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.000	45.80	-28.20	74.00	45.26	30.59	3.74	33.78	100	0 Peak
2	2390.000	33.07	-20.93	54.00	32.53	30.59	3.74	33.78	100	151 Average
3 @	2437.000	86.27			85.77	30.49	3.79	33.79	100	151 Average
4 @	2437.000	101.28			100.78	30.49	3.79	33.79	100	0 Peak
5	2483.500	46.56	-27.44	74.00	46.09	30.43	3.84	33.80	100	0 Peak
6	2483.500	34.81	-19.19	54.00	34.34	30.43	3.84	33.80	100	151 Average

Remark: #3 and #4 Fundamental Signal

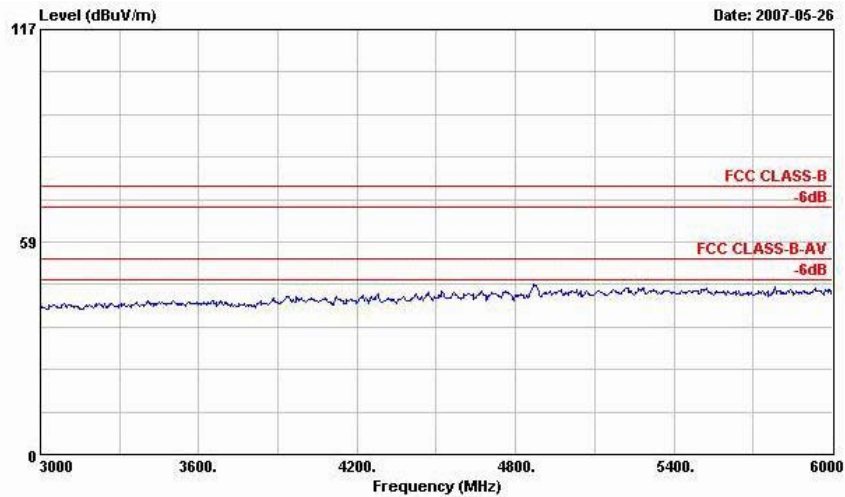


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch06;2437MHz  
 Data Rate: 54  
 Plane : E2

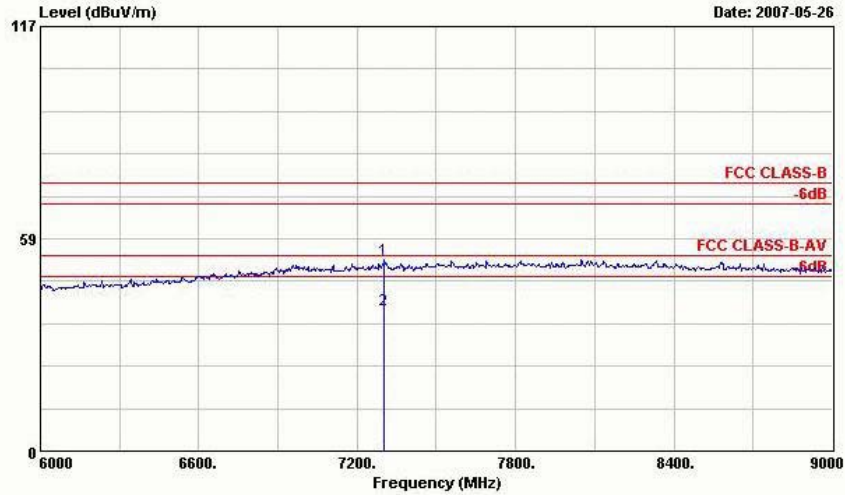


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch06;2437MHz  
 Data Rate: 54  
 Plane : E2


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7302.000	52.64	-21.36	74.00	40.87	38.57	6.48	33.28	100	0 Peak
2	7302.000	38.91	-35.09	74.00	27.14	38.57	6.48	33.28	100	0 Peak

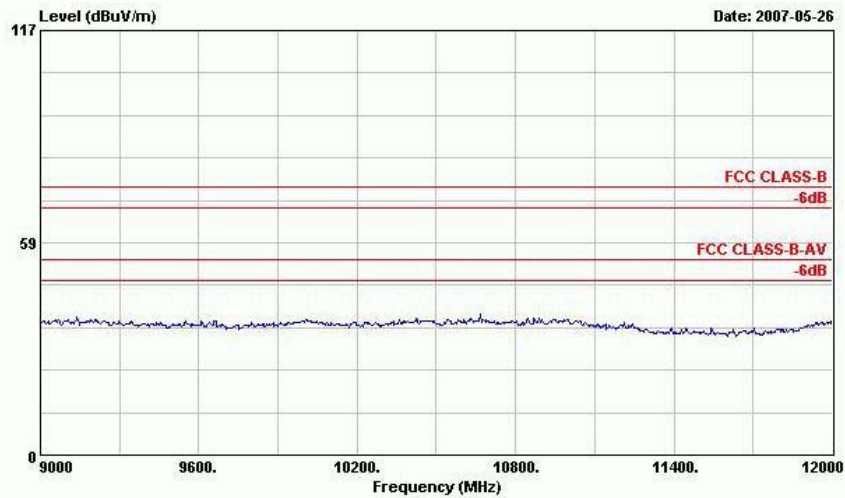

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch06;2437MHz  
 Data Rate: 54  
 Plane : E2

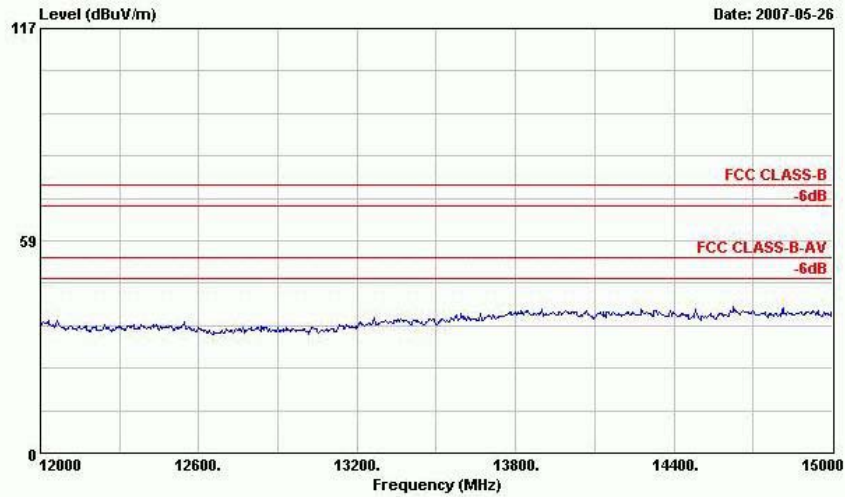


Site : 03CH04-HY  
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL  
EUT : PDA Phone  
POWER : 120Vac/60Hz  
MODEL : FR 742004-01  
MODE : 11g Tx\_Ch06;2437MHz  
Data Rate: 54  
Plane : E2

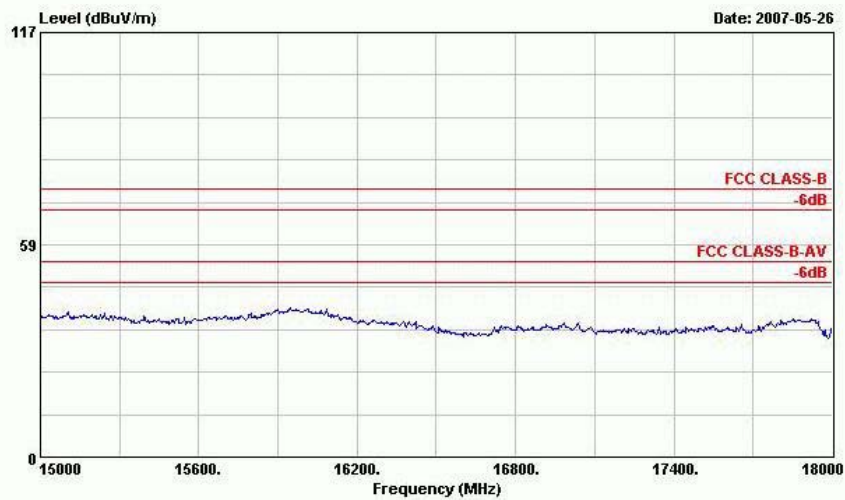


Site : 03CH04-HY  
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL  
EUT : PDA Phone  
POWER : 120Vac/60Hz  
MODEL : FR 742004-01  
MODE : 11g Tx\_Ch06;2437MHz  
Data Rate: 54  
Plane : E2



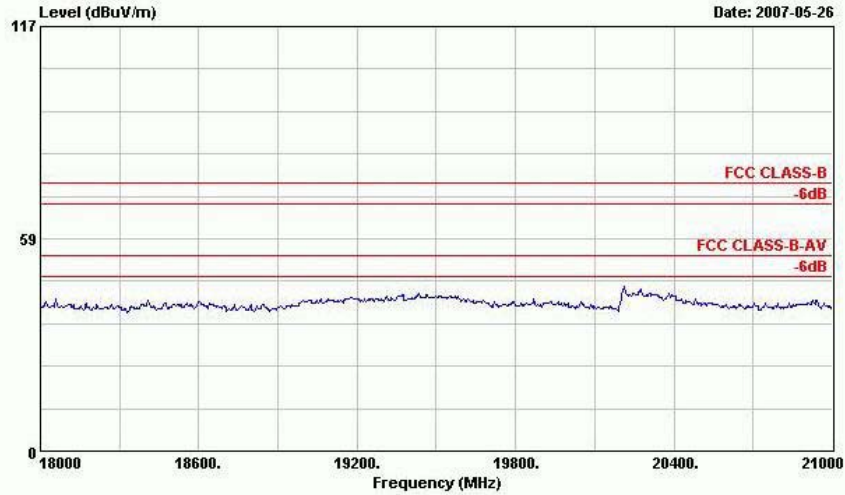

Site : 03CH04-HY  
Condition: FCC CLASS-B 3m SHF-EHF HORN VERTICAL  
EUT : PDA Phone  
POWER : 120Vac/60Hz  
MODEL : FR 742004-01  
MODE : 11g Tx\_Ch06;2437MHz  
Data Rate: 54  
Plane : E2

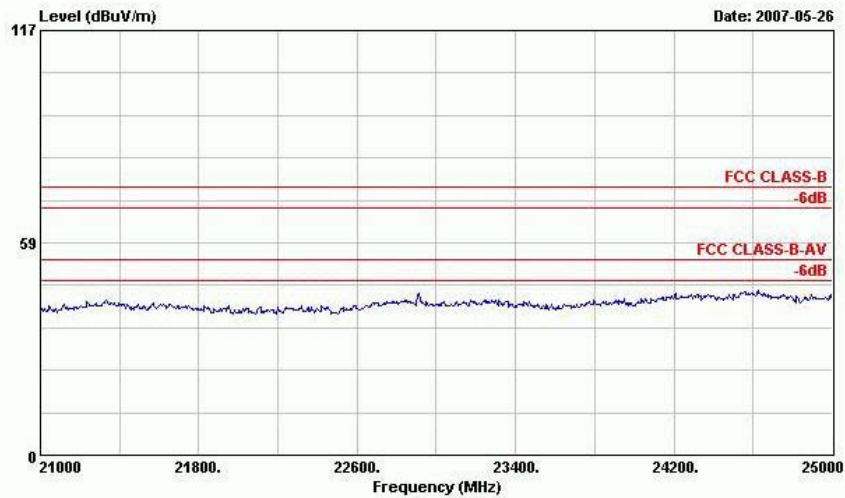


Site : 03CH04-HY  
Condition: FCC CLASS-B 3m SHF-EHF HORN VERTICAL  
EUT : PDA Phone  
POWER : 120Vac/60Hz  
MODEL : FR 742004-01  
MODE : 11g Tx\_Ch06;2437MHz  
Data Rate: 54  
Plane : E2




- Test Mode : Mode 6
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

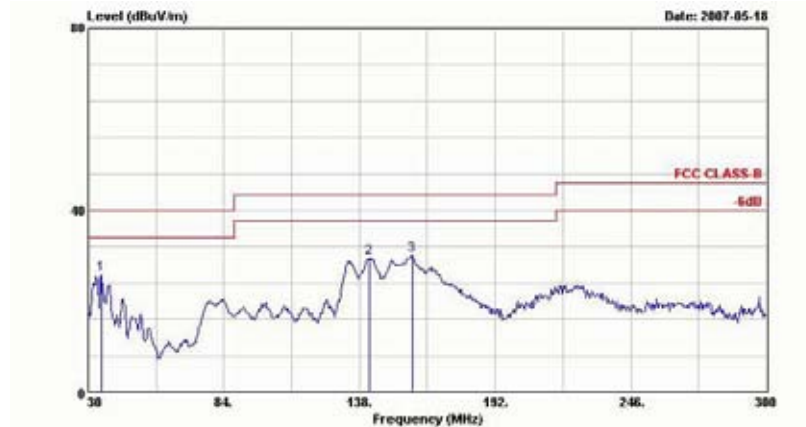


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 1lg Tx\_Ch11;2462MHz  
 Data Rate: 54  
 Plane : E2

Peak	Freq MHz	Level dBuV/m	Over Limit dB	Limit Line dBuV/m	HeadAntenna Level dBuV	Cable Loss Factor dB/m	Preamp Loss Factor dB	Ant Pos cm	Table Pos deg	Remark
1	35.130	25.71	-14.29	40.00	41.05	16.29	0.60	33.11	---	Peak
2	142.050	29.43	-14.07	43.50	50.30	10.63	1.40	32.90	---	Peak
3	159.060	30.05	-13.45	43.50	52.23	9.36	1.44	32.99	---	Peak

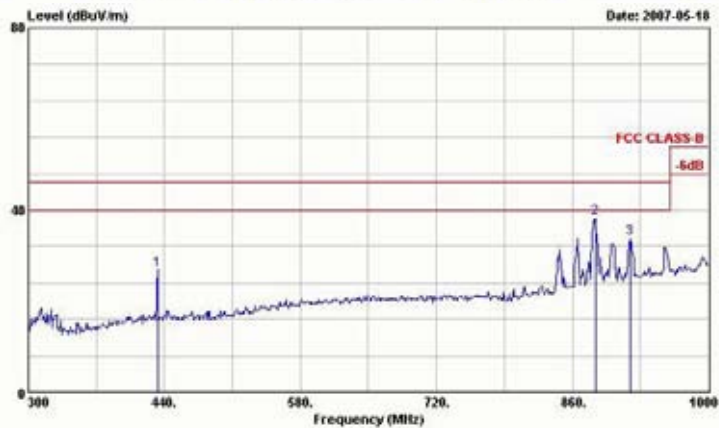

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 1lg Tx\_Ch11;2462MHz  
 Data Rate: 54  
 Plane : E2


Peak	Freq MHz	Level dBuV/m	Over Limit dB	Limit Line dBuV/m	HeadAntenna Level dBuV	Cable Loss Factor dB/m	Preamp Loss Factor dB	Ant Pos cm	Table Pos deg	Remark
1	439.000	26.72	-19.28	46.00	40.93	16.13	2.43	32.70	---	Peak
2	883.000	38.22	-7.78	46.00	43.28	22.91	3.61	31.58	124	Peak
3	920.200	33.74	-12.26	46.00	37.66	24.03	3.69	31.43	---	Peak

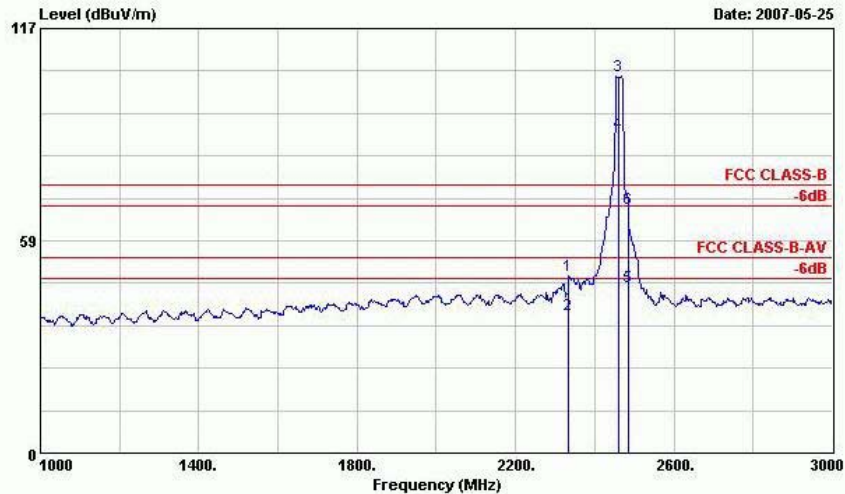


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch11;2462MHz  
 Data Rate: 54  
 Plane : E2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2334.000	48.75	-25.25	74.00	48.12	30.71	3.69	33.77	100	0 Peak
2	2334.000	38.20	-15.80	54.00	37.57	30.71	3.69	33.77	100	165 Average
3 @	2462.000	104.08			103.60	30.46	3.81	33.80	100	0 Peak
4 @	2462.000	88.26			87.78	30.46	3.81	33.79	100	165 Average
5 @	2483.555	45.84	-8.16	54.00	45.37	30.43	3.84	33.80	100	165 Average
6 @	2483.555	67.28	-6.72	74.00	66.81	30.43	3.84	33.80	100	0 Peak

Remark: #3 and #4 Fundamental Signal

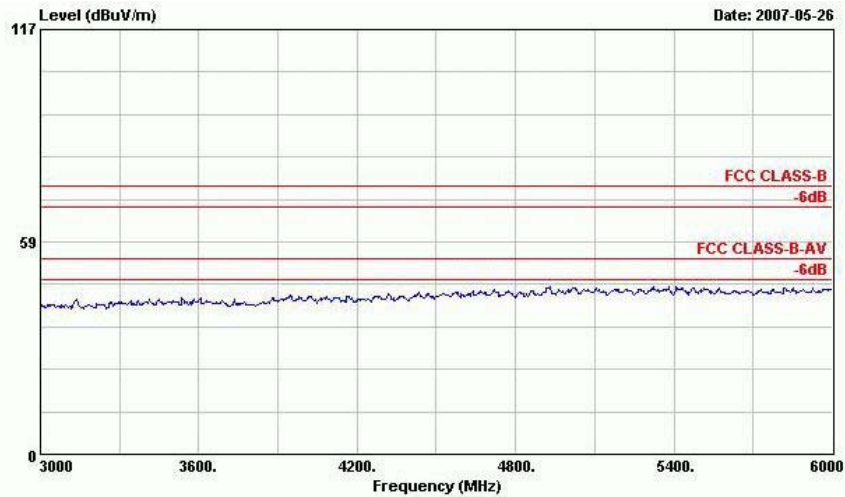


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch11;2462MHz  
 Data Rate: 54  
 Plane : E2

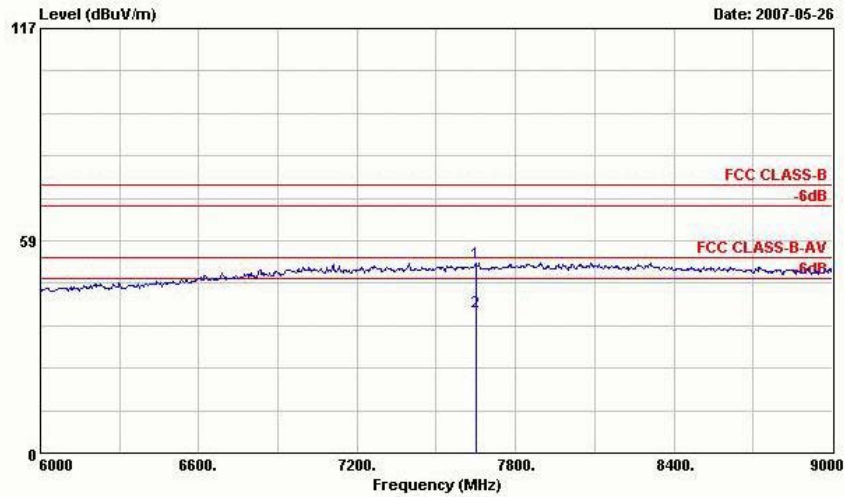


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch11;2462MHz  
 Data Rate: 54  
 Plane : E2


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark
1	7650.000	52.40	-21.60	74.00	40.30	39.22	6.62	33.74	100	0	Peak
2	7650.000	38.93	-15.07	54.00	26.83	39.22	6.62	33.74	100	0	Average

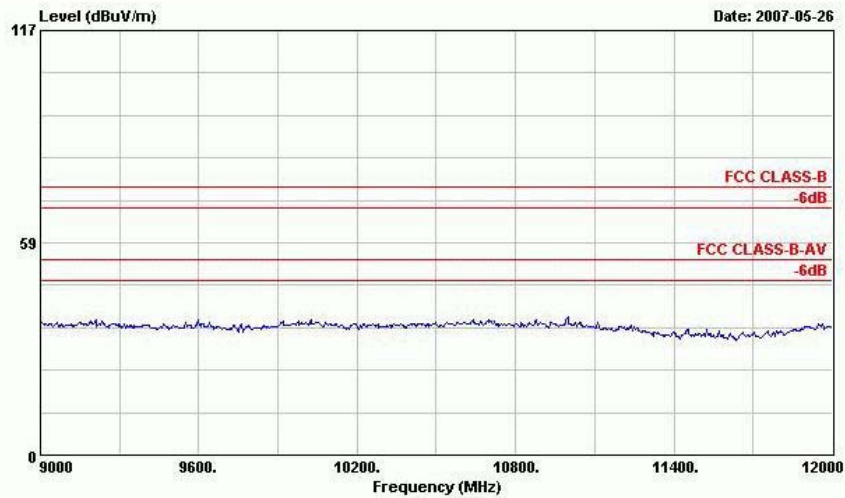


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch11;2462MHz  
 Data Rate: 54  
 Plane : E2

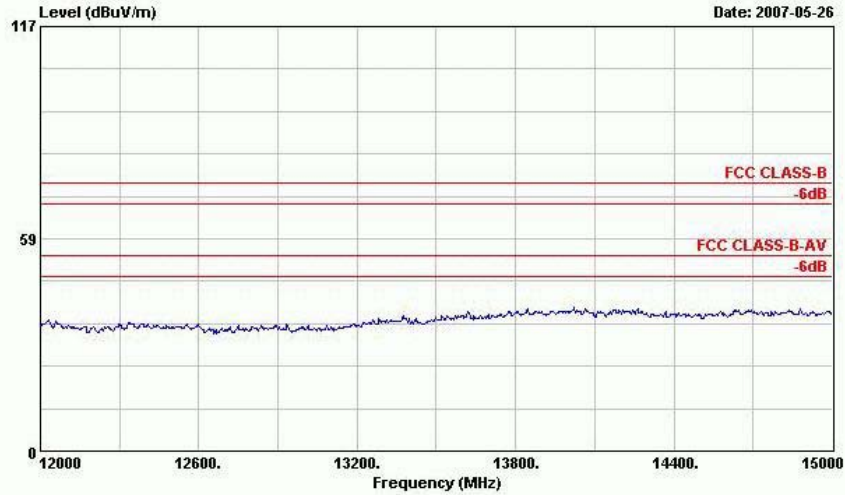

Site : 03CH04-HY  
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL  
EUT : PDA Phone  
POWER : 120Vac/60Hz  
MODEL : FR 742004-01  
MODE : 11g Tx\_Ch11;2462MHz  
Data Rate: 54  
Plane : E2

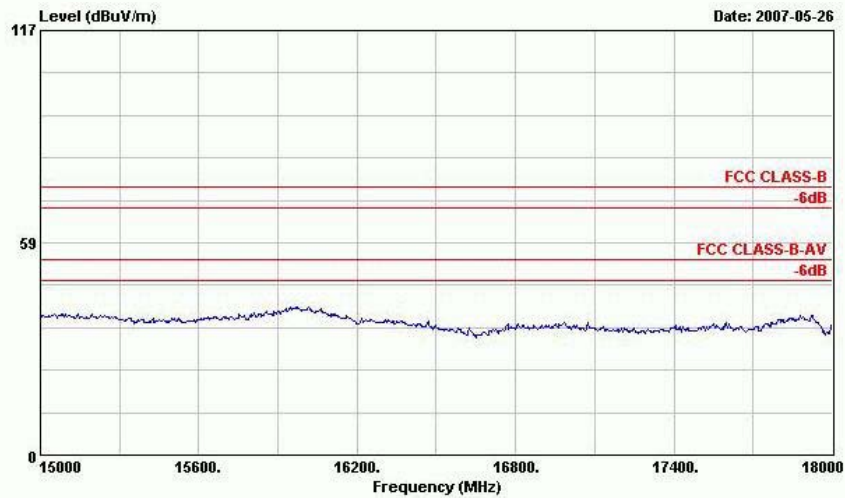

Site : 03CH04-HY  
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL  
EUT : PDA Phone  
POWER : 120Vac/60Hz  
MODEL : FR 742004-01  
MODE : 11g Tx\_Ch11;2462MHz  
Data Rate: 54  
Plane : E2

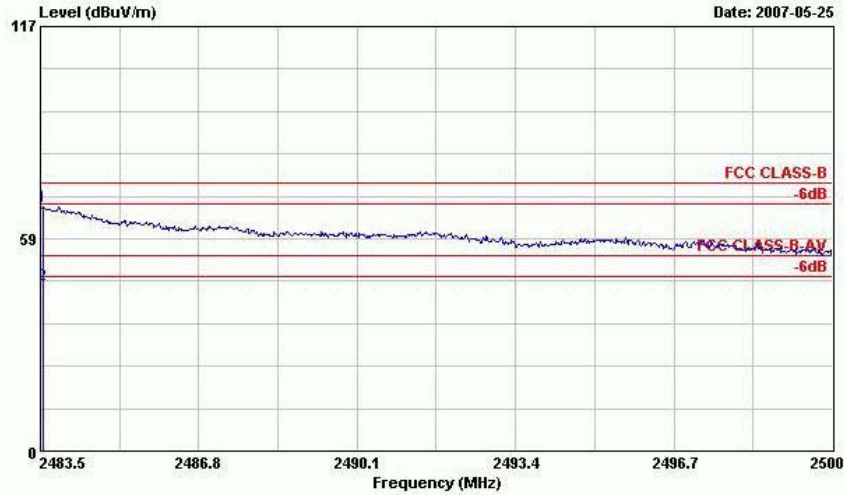

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch11;2462MHz  
 Data Rate: 54  
 Plane : E2


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB	dB	cm	deg	
1 @	2483.550	67.28	-6.72	74.00	66.81	30.43	3.84	33.80	100	0 Peak
2 @	2483.550	45.84	-8.16	54.00	45.37	30.43	3.84	33.80	100	165 Average






- Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

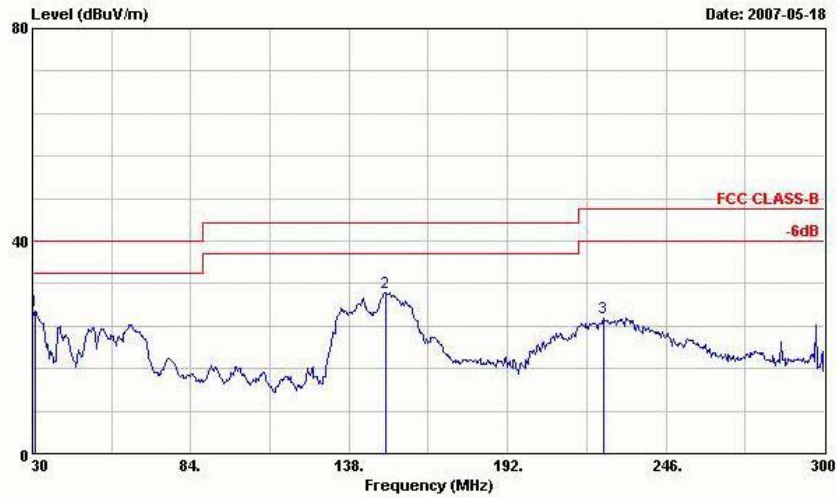


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ANT2724 VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch11;2462MHz  
 Data Rate: 54  
 Plane : E2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table		
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Pos	Pos	Remark	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	30.810	26.89	-13.11	40.00	42.82	16.36	0.64	32.93	---	---	Peak
2 @	150.420	30.35	-13.15	43.50	51.10	10.77	1.42	32.94	---	---	Peak
3	224.940	25.48	-20.52	46.00	45.90	10.65	1.75	32.82	100	246	Peak

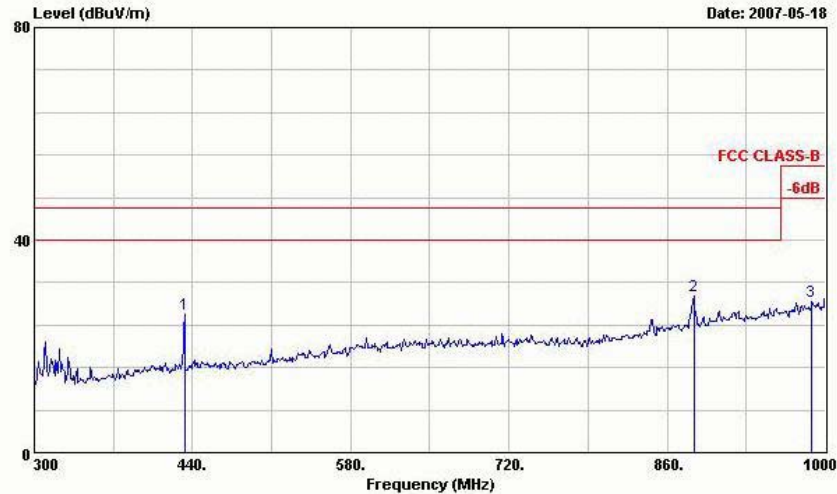

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ANT2724 VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch11;2462MHz  
 Data Rate: 54  
 Plane : E2


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table		
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Pos	Pos	Remark	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	433.000	25.94	-20.06	46.00	40.15	16.13	2.43	32.78	---	---	Peak
2	883.800	29.39	-16.61	46.00	34.45	22.91	3.61	31.58	---	---	Peak
3	988.100	28.47	-25.53	54.00	30.07	25.75	3.71	31.07	---	---	Peak

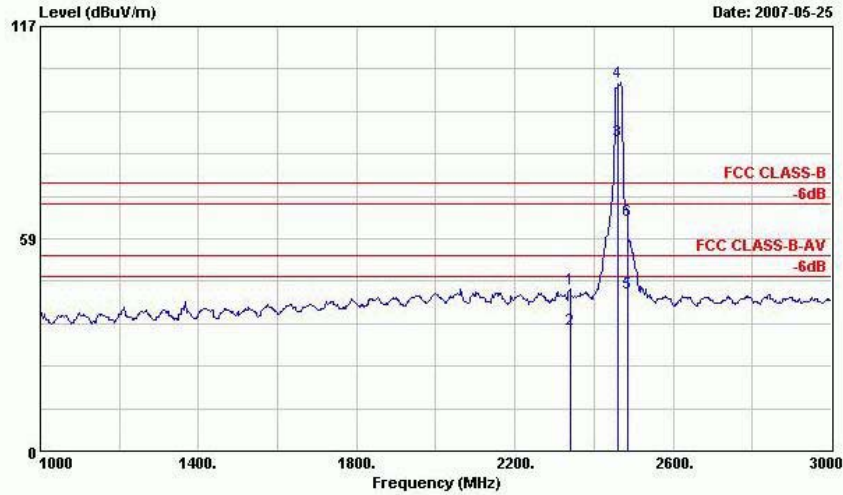


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch11;2462MHz  
 Data Rate: 54  
 Plane : E2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark
1	2340.000	44.55	-29.45	74.00	43.95	30.68	3.69	33.77	100	0 Peak
2	2340.000	33.53	-20.47	54.00	32.93	30.68	3.69	33.77	100	152 Average
3 @	2462.000	85.37			84.89	30.46	3.81	33.79	100	152 Average
4 @	2462.000	101.66			101.18	30.46	3.81	33.80	100	0 Peak
5 @	2483.730	43.54	-10.46	54.00	43.07	30.43	3.84	33.80	100	152 Average
6 @	2483.730	63.65	-10.35	74.00	63.18	30.43	3.84	33.80	100	0 Peak

Remark: #3 and #4 Fundamental Signal

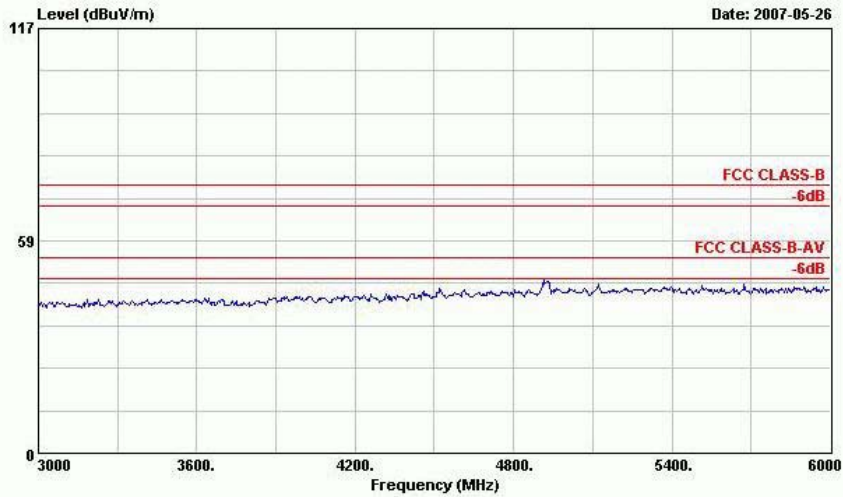


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch11;2462MHz  
 Data Rate: 54  
 Plane : E2

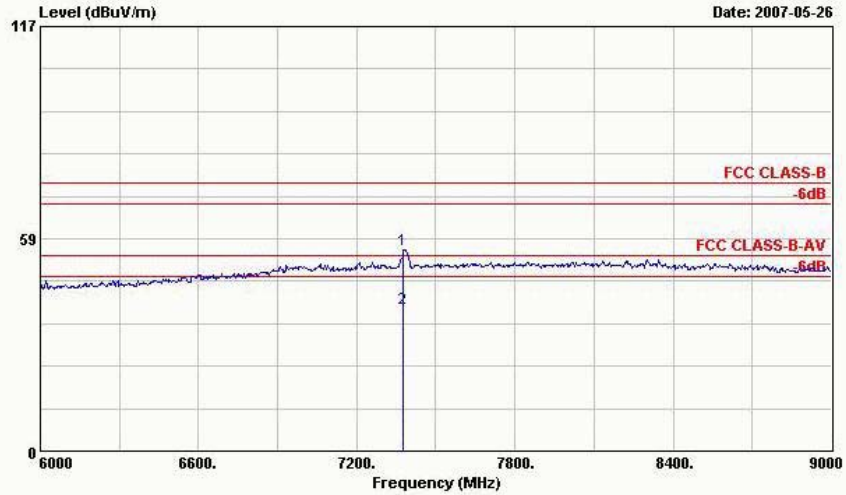


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch11;2462MHz  
 Data Rate: 54  
 Plane : E2


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB	dB	cm	deg	
1	7377.000	55.54	-18.46	74.00	43.74	38.76	6.51 33.48	100	0	Peak
2	7377.000	39.15	-14.85	54.00	27.35	38.76	6.51 33.48	100	192	Average

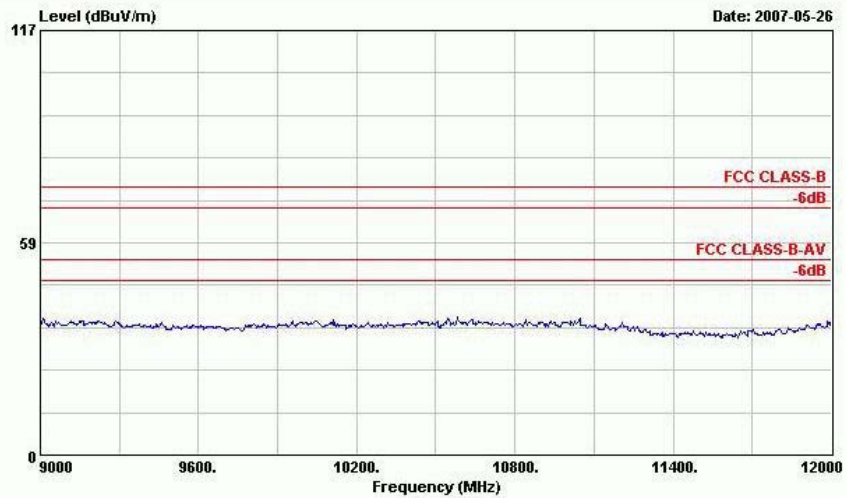


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch11;2462MHz  
 Data Rate: 54  
 Plane : E2

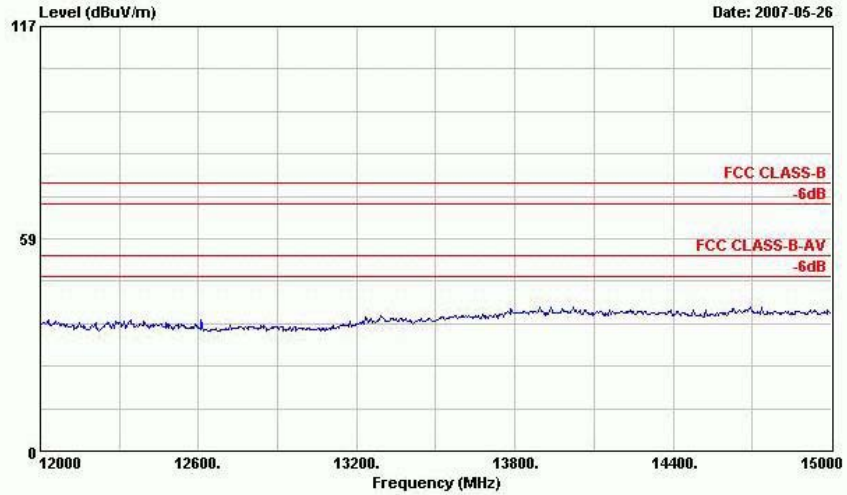

Site : 03CH04-HY  
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL  
EUT : PDA Phone  
POWER : 120Vac/60Hz  
MODEL : FR 742004-01  
MODE : 11g Tx\_Ch11;2462MHz  
Data Rate: 54  
Plane : E2

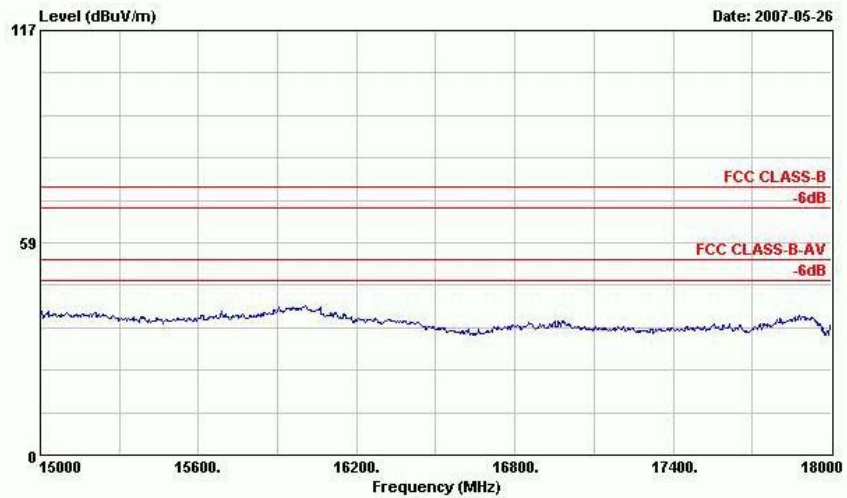

Site : 03CH04-HY  
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL  
EUT : PDA Phone  
POWER : 120Vac/60Hz  
MODEL : FR 742004-01  
MODE : 11g Tx\_Ch11;2462MHz  
Data Rate: 54  
Plane : E2

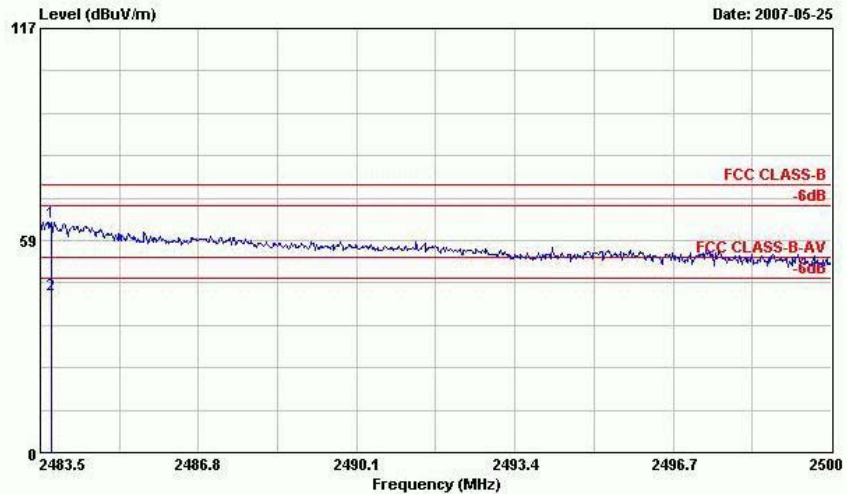

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT VERTICAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : 11g Tx\_Ch11;2462MHz  
 Data Rate: 54  
 Plane : E2

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2483.730	63.65	-10.35	74.00	63.18	30.43	3.84	33.80	100		0 Peak
2 @	2483.730	43.54	-10.46	54.00	43.07	30.43	3.84	33.80	100	152	Average


Remark : Frequency from 18GHz to 25GHz, the emission emitted by the EUT is too low to be measured.






- Test Mode : Mode 7
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

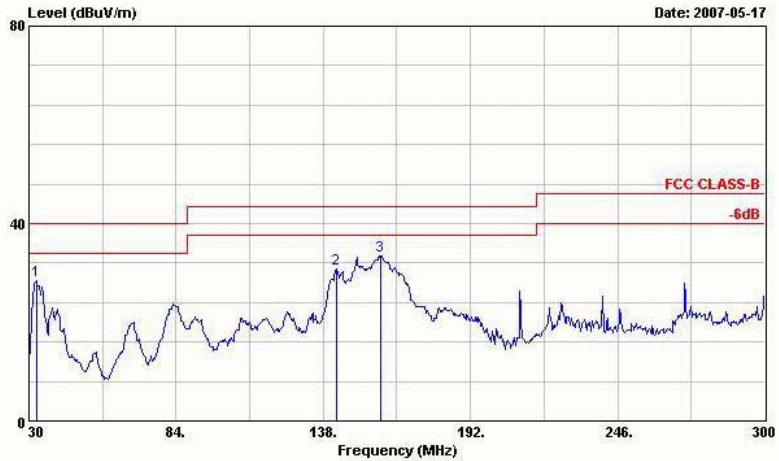

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : BT Tx\_Ch00;2402MHz  
 Data Rate: DH5  
 Plane : E1


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table		
	MHz	dBuV/m	dB	dBuV/m	dEuV	dB/m	dB	dB	cm	deg	
1 @	32.700	28.30	-11.70	40.00	44.33	16.33	0.66	33.02	---	---	Peak
2 @	142.860	30.88	-12.62	43.50	51.75	10.63	1.40	32.90	---	---	Peak
3 @	159.060	33.50	-10.00	43.50	55.68	9.36	1.44	32.99	100	95	Peak

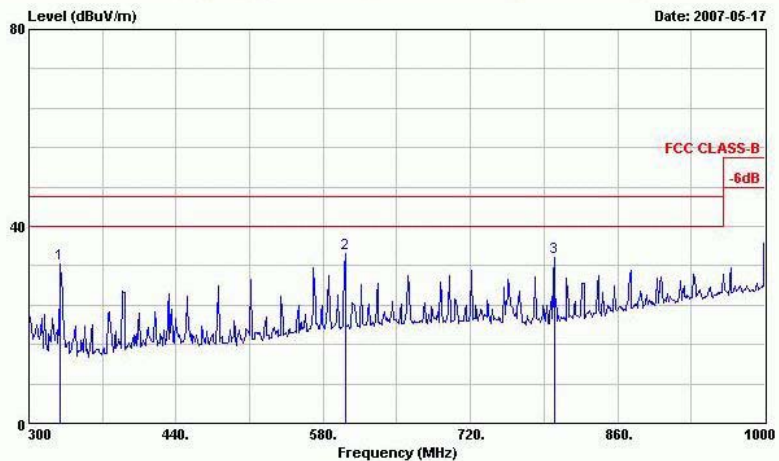

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : BT Tx\_Ch00;2402MHz  
 Data Rate: DH5  
 Plane : E1

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table		
	MHz	dBuV/m	dB	dBuV/m	dEuV	dB/m	dB	dB	cm	deg	
1 @	330.100	32.34	-13.66	46.00	49.73	13.35	2.09	32.82	---	---	Peak
2 @	601.000	34.54	-11.46	46.00	44.27	19.90	2.82	32.45	---	---	Peak
3 @	799.800	33.63	-12.37	46.00	42.25	19.85	3.24	31.71	---	---	Peak




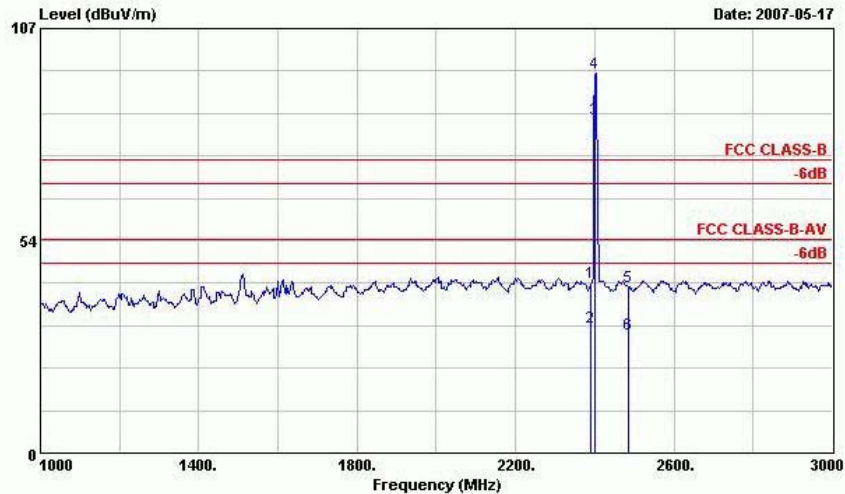


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : BT Tx\_Ch00;2402MHz  
 Data Rate: DHS  
 Plane : E1

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2390.000	42.97	-31.03	74.00	42.43	30.59	3.74	33.78	100	0 Peak
2 @	2390.000	31.66	-22.34	54.00	31.12	30.59	3.74	33.78	100	208 Average
3 @	2402.000	84.01			83.47	30.59	3.74	33.78	100	208 Average
4 @	2402.000	95.67			95.16	30.56	3.74	33.78	100	0 Peak
5	2484.000	42.03	-31.97	74.00	41.56	30.43	3.84	33.80	100	0 Peak
6	2484.000	29.78	-24.22	54.00	29.31	30.43	3.84	33.80	100	208 Average

Remark: #3 and #4 Fundamental Signal

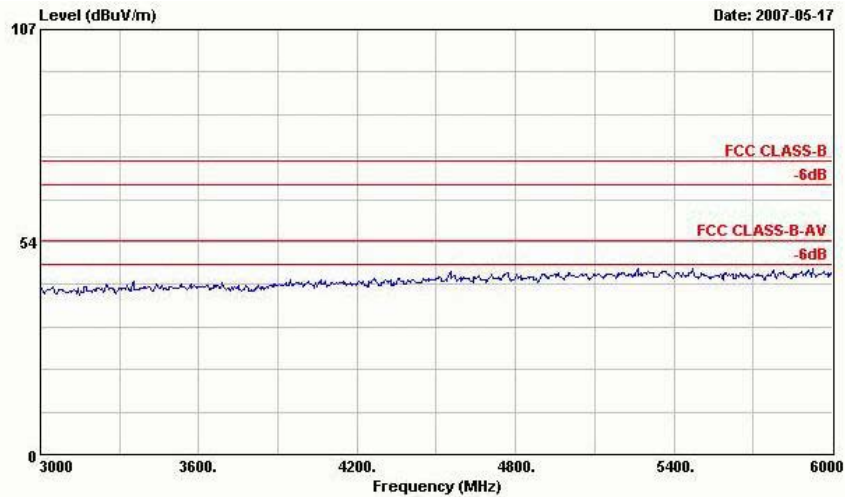


Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : BT Tx\_Ch00;2402MHz  
 Data Rate: DHS  
 Plane : E1

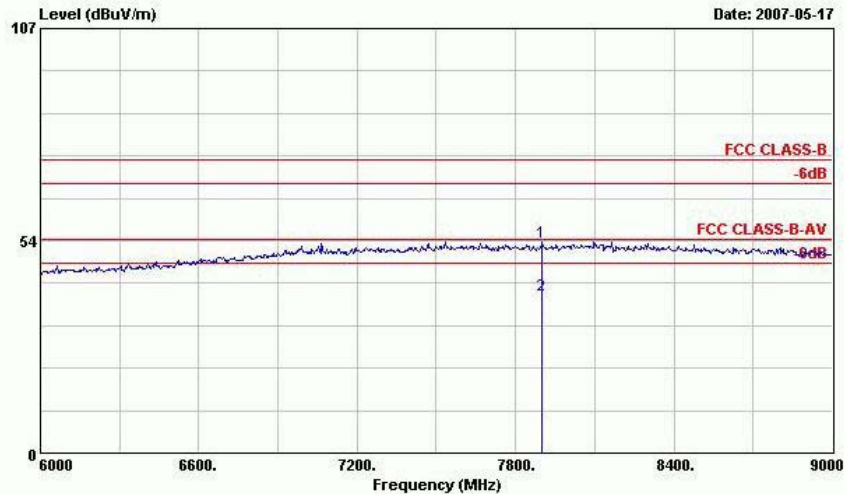

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : BT Tx\_Ch00;2402MHz  
 Data Rate: DHS  
 Plane : E1

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	7902.000	53.02	-20.98	74.00	40.52	39.42	6.72	33.64	100	0 Peak
2 @	7902.000	39.79	-14.21	54.00	27.29	39.42	6.72	33.64	100	174 Average

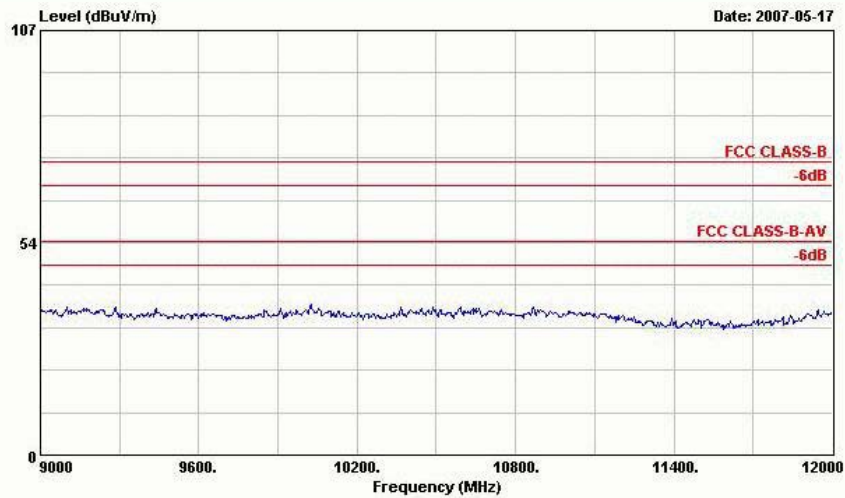

Site : 03CH04-HY  
 Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL  
 EUT : PDA Phone  
 POWER : 120Vac/60Hz  
 MODEL : FR 742004-01  
 MODE : BT Tx\_Ch00;2402MHz  
 Data Rate: DHS  
 Plane : E1