



FCC TEST REPORT

REPORT NO.: RF951125L01

MODEL NO.: MUD100

RECEIVED: Nov. 21, 2006

TESTED: Nov. 21 ~ Dec. 06, 2006

ISSUED: Dec. 12, 2006

APPLICANT: MITAC INTERNATIONAL CORP.

ADDRESS: 6th Floor, No. 187, Tiding Blvd., Sec. 2,
Nei-Hu, Taipei, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Kueishan, Taoyuan,
Taiwan, R.O.C.

This test report consists of 56 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA or any government agencies. The test results in the report only apply to the tested sample.





Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4	DESCRIPTION OF SUPPORT UNITS	10
3.5	OPERATIONAL LIMITATIONS	11
4	TEST TYPES AND RESULTS	12
4.1	CONDUCTED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	12
4.1.2	TEST INSTRUMENTS	12
4.1.3	TEST PROCEDURES	13
4.1.4	DEVIATION FROM TEST STANDARD	13
4.1.5	TEST SETUP	14
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS	15
4.2	RADIATED EMISSION MEASUREMENT (FOR 15.519 (C))	23
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	23
4.2.2	INSTRUMENT SETUP VALUE AND MEASUREMENT DISTANCE	24
4.2.3	TEST INSTRUMENTS	25
4.2.4	TEST PROCEDURES	26
4.2.5	DEVIATION FROM TEST STANDARD	26
4.2.6	TEST SETUP	27
4.2.7	EUT OPERATING CONDITIONS	27
4.2.8	TEST RESULTS	28
4.3	RADIATED EMISSION MEASUREMENT (FOR 15.519 (D))	38
4.3.1	LIMITS OF RADIATED EMISSION MEASUREMENT	38
4.3.2	INSTRUMENT SETUP VALUE AND MEASUREMENT DISTANCE	39
4.3.3	TEST INSTRUMENTS	40
4.3.4	TEST PROCEDURES	41
4.3.5	DEVIATION FROM TEST STANDARD	41
4.3.6	TEST SETUP	42
4.3.7	EUT OPERATING CONDITIONS	42



4.3.8	TEST RESULTS	43
4.4	UWB BANDWIDTH MEASUREMENT	45
4.4.1	LIMITS OF UWB BANDWIDTH MEASUREMENT	45
4.4.2	INSTRUMENT SETUP VALUE AND MEASUREMENT DISTANCE	45
4.4.3	TEST INSTRUMENT	45
4.4.4	TEST PROCEDURE	45
4.4.5	DEVIATION FROM TEST STANDARD	45
4.4.6	TEST SETUP	46
4.4.7	EUT OPERATING CONDITIONS	46
4.4.8	TEST RESULTS	47
4.5	PEAK EMISSION WITHIN A 50MHZ BANDWIDTH	51
4.5.1	LIMITS OF PEAK EMISSION	51
4.5.2	INSTRUMENT SETUP VALUE AND MEASUREMENT DISTANCE	51
4.5.3	TEST INSTRUMENTS	52
4.5.4	TEST PROCEDURE	52
4.5.5	DEVIATION FROM TEST STANDARD	52
4.5.6	TEST SETUP	52
4.5.7	EUT OPERATING CONDITIONS	52
4.5.8	TEST RESULTS	53
4.6	ANTENNA REQUIREMENT	54
4.6.1	STANDARD APPLICABLE	54
4.6.2	ANTENNA CONNECTED CONSTRUCTION	54
5	INFORMATION ON THE TESTING LABORATORIES	55
	APPENDIX-A	A-1



1 CERTIFICATION

PRODUCT: WIRELESS USB DONGLE
MODEL: MUD100
BRAND: MITAC
APPLICANT: MITAC INTERNATIONAL CORP.
TESTED: Nov. 21 ~ Dec. 06, 2006
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: FCC Part 15, Subpart F (Section 15.519),
ANSI C63.4-2003

The above equipment have been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Rennie Wang , **DATE:** Dec. 12, 2006
Rennie Wang

TECHNICAL ACCEPTANCE : Long Chen , **DATE:** Dec. 12, 2006
Responsible for RF Long Chen

APPROVED BY : Gary Chang , **DATE:** Dec. 12, 2006
Gary Chang / Supervisor

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart F			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.52dB at 0.150MHz.
15.519(b)	UWB Bandwidth	PASS	Meet the requirement of limit.
15.209 15.519(c)	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -7.11dB at 792.26MHz..
15.209 15.519(d)	Radiated Emissions in GPS Band	PASS	Meet the requirement of limit. Minimum passing margin is -16.62dB at 1584.00MHz..
15.519(e)	Peak Emissions within a 50MHz Bandwidth	PASS	Meet the requirement of limit. Minimum passing margin is -0.72dB at 4488.00MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.71 dB
	200MHz ~ 1000MHz	3.73 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	WIRELESS USB DONGLE
MODEL NO.	MUD100
FCC ID	P4Q-MUD-100
POWER SUPPLY	5.0Vdc from host equipment
MODULATION TECHNOLOGY	MOFDM
FREQUENCY RANGE	3.1 to 4.8GHz (Supporting up to 3 MBOA sub-bands, 528MHz each)
MAXIMUM OUTPUT POWER	-34.72dBm (60.48 dBuV/m)
ANTENNA TYPE	Printed antenna with 2.5dBi gain
I/O PORTS	Refer to user's manual
DATA CABLE	NA
ASSOCIATED DEVICES	NA

NOTE:


The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Three sub-bands are provided to this EUT.

SUB-BAND	FREQUENCY
1	3432 MHz
2	3960 MHz
3	4488 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

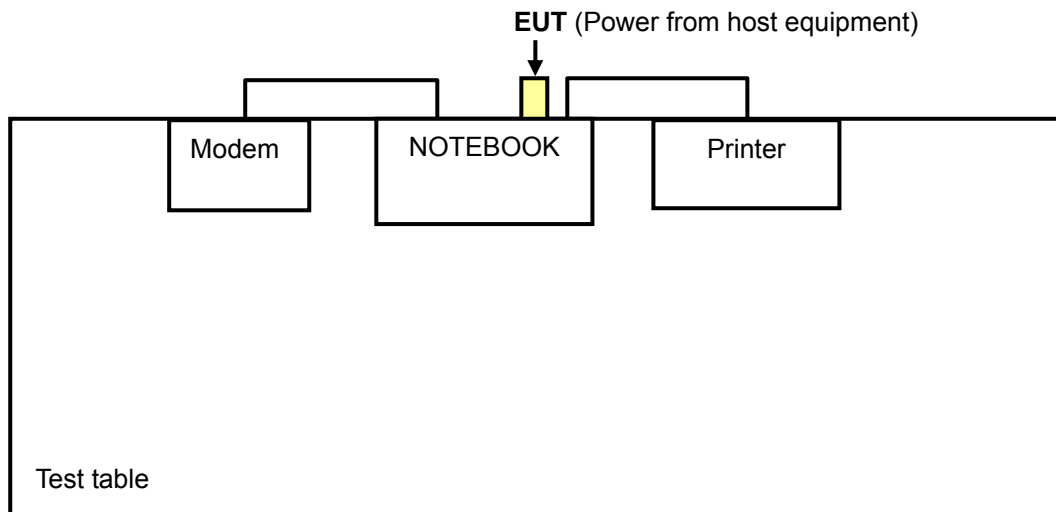

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT configure mode	Applicable to					Description
	PLC	RE<1G	RE≥1G	UB	PE	
A	√	-	√	√	√	Sub-band 1
B	√	-	√	√	√	Sub-band 2
C	√	-	√	√	√	Sub-band 3
D	√	√	√	√	√	Sub-band 1, 2, 3

Where **PLC**: Power Line Conducted Emission **RE<1G**: Radiated Emission below 1GHz
RE≥1G: Radiated Emission above 1GHz **UB**:UBW Bandwidth
PE: Peak Emission

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Available Sub-band	Tested Sub-band	Modulation Technology
A	1 to 3	1	MOFDM
B	1 to 3	2	MOFDM
C	1 to 3	3	MOFDM
D	1 to 3	1, 2, 3	MOFDM

RADIATED EMISSION TEST (BELOW 960 MHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Available Sub-band	Tested Sub-band	Modulation Technology
D	1 to 3	1, 2, 3	MOFDM

RADIATED EMISSION TEST (ABOVE 960 MHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Available Sub-band	Tested Sub-band	Modulation Technology
A	1 to 3	1	MOFDM
B	1 to 3	2	MOFDM
C	1 to 3	3	MOFDM
D	1 to 3	1, 2, 3	MOFDM

UWB BANDWIDTH MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Available Sub-band	Tested Sub-band	Modulation Technology
A	1 to 3	1	MOFDM
B	1 to 3	2	MOFDM
C	1 to 3	3	MOFDM
D	1 to 3	1, 2, 3	MOFDM

PEAK EMISSION MEASUREMENT

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Available Sub-band	Tested Sub-band	Modulation Technology
A	1 to 3	1	MOFDM
B	1 to 3	2	MOFDM
C	1 to 3	3	MOFDM
D	1 to 3	1, 2, 3	MOFDM



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a UWB product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart F. (15.519)

ANSI C63.4-2003

THE EVOLUTION OF MODERN UWB TECHNOLOGY

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	12130898320	E2K24CLNS
2	PRINTER	EPSON	LQ-300+	DCGY047265	FCC DoC Approved
3	MODEM	ACEEX	1414V/3	0401008248	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m shielded cable
3	1.6m shielded cable

NOTE: All power cords of the above support units are non-shielded (1.8m).



3.5 OPEARTIONAL LIMIIATIONS

FCC 47 CFR Section 15.519(a)(1)

- (1) A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

Client has been advised and showed on page 19 of users manual.

FCC 47 CFR Section 15.519(a)(2)

- (2) The use of antennas mounted on outdoor structures, *e.g.*, antennas mounted on the outside of a building or on a telephone pole, or any fixed outdoors infrastructure is prohibited. Antennas may be mounted only on the hand held UWB device.

The antenna used in this product is Printed antenna

FCC 47 CFR Section 15.519(a)(3)

- (3) UWB devices operating under the provisions of this section may operate indoors or outdoors.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Dec. 07, 2007
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 06, 2007
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Feb. 15, 2007
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 07, 2007
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

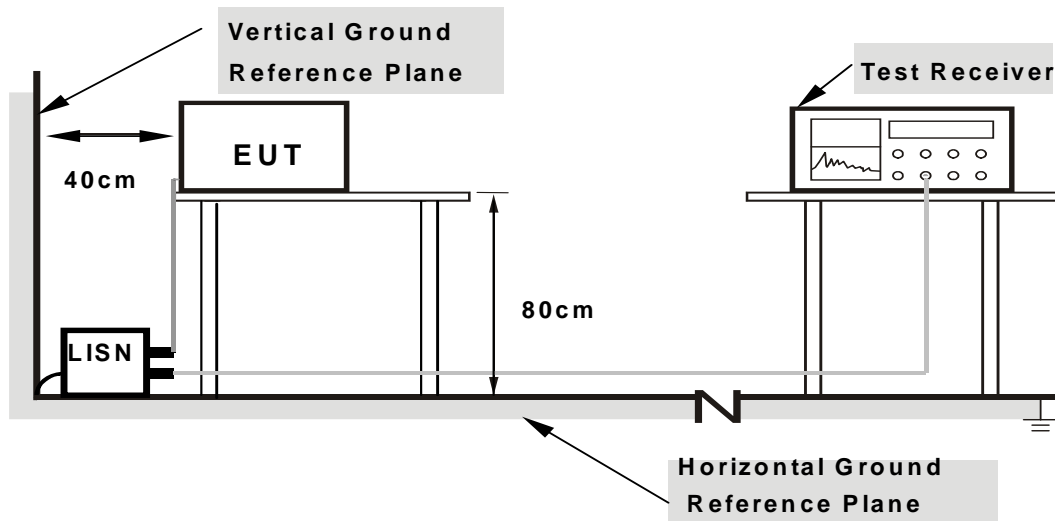

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT to the notebook and placed on a testing table.
- b. The notebook ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- c. The notebook sent "H" messages to its screen.
- d. The necessary accessories enable the EUT in full functions.

4.1.7 TEST RESULTS


CONDUCTED WORST-CASE DATA

TEST MODE A (SUB-BAND 1):

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	1	PHASE	Line 1
MODULATION TECHNOLOGY	MOFDM	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.155	0.20	50.23	-	50.43	-	65.72	55.72	-15.29	-
2	0.186	0.20	46.40	-	46.60	-	64.20	54.20	-17.60	-
3	0.215	0.20	46.11	-	46.31	-	63.01	53.01	-16.70	-
4	0.681	0.20	35.44	-	35.64	-	56.00	46.00	-20.36	-
5	1.348	0.20	35.50	-	35.70	-	56.00	46.00	-20.30	-
6	15.219	0.94	22.01	-	22.95	-	60.00	50.00	-37.05	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

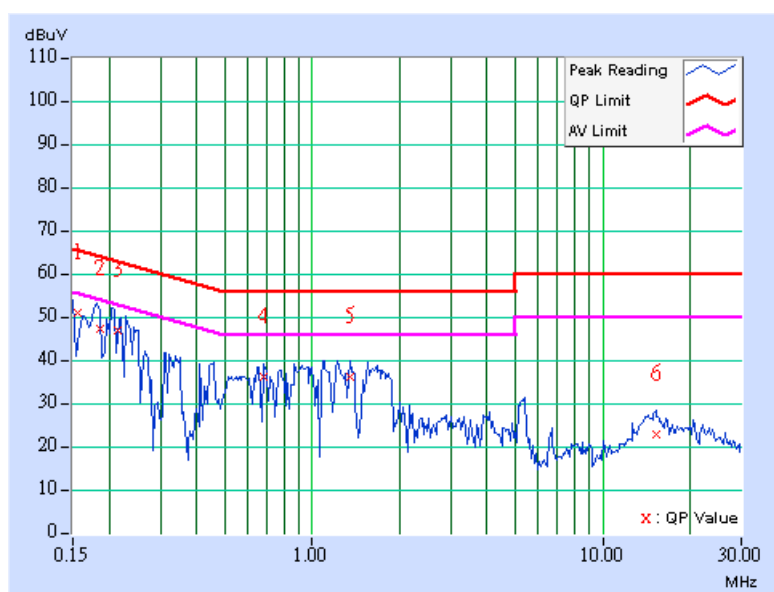

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	1	PHASE	Line 2
MODULATION TECHNOLOGY	MOFDM	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.152	0.20	48.94	-	49.14	-	65.92
2	0.177	0.20	47.00	-	47.20	-	64.61	54.61	-17.41	-
3	0.252	0.20	41.47	-	41.67	-	61.71	51.71	-20.04	-
4	1.348	0.20	34.39	-	34.59	-	56.00	46.00	-21.41	-
5	2.078	0.21	29.46	-	29.67	-	56.00	46.00	-26.33	-
6	4.969	0.48	21.76	-	22.24	-	56.00	46.00	-33.76	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

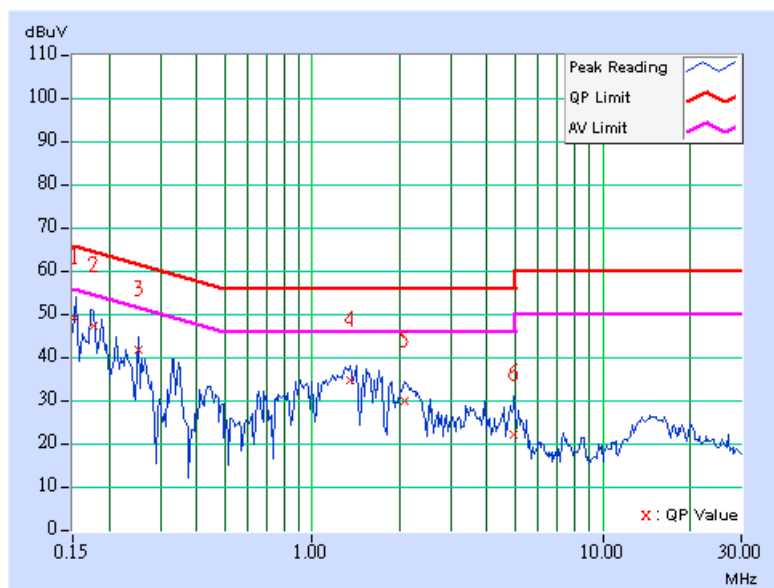


TEST MODE B (SUB-BAND 2):

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	2	PHASE	Line 1
MODULATION TECHNOLOGY	MOFDM	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.155	0.20	47.51	-	47.71	-	65.72	55.72	-18.01	-
2	0.201	0.20	42.63	-	42.83	-	63.58	53.58	-20.75	-
3	0.255	0.20	40.42	-	40.62	-	61.58	51.58	-20.96	-
4	0.670	0.20	35.69	-	35.89	-	56.00	46.00	-20.11	-
5	1.254	0.20	35.99	-	36.19	-	56.00	46.00	-19.81	-
6	15.125	0.94	22.04	-	22.98	-	60.00	50.00	-37.02	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

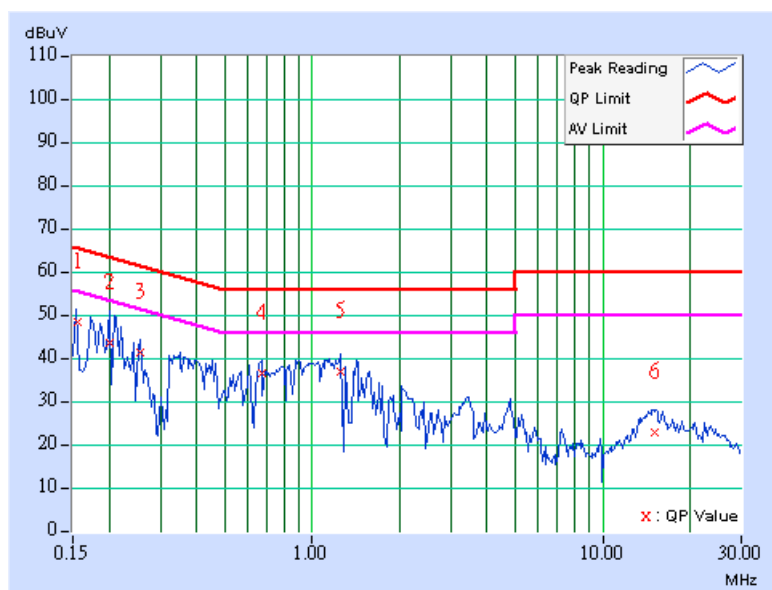

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	2	PHASE	Line 2
MODULATION TECHNOLOGY	MOFDM	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	0.20	48.39	-	48.59	-	66.00
2	0.224	0.20	45.20	-	45.40	-	62.66	52.66	-17.26	-
3	0.255	0.20	40.49	-	40.69	-	61.58	51.58	-20.89	-
4	1.234	0.20	33.95	-	34.15	-	56.00	46.00	-21.85	-
5	1.664	0.20	32.46	-	32.66	-	56.00	46.00	-23.34	-
6	14.590	0.62	22.13	-	22.75	-	60.00	50.00	-37.25	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

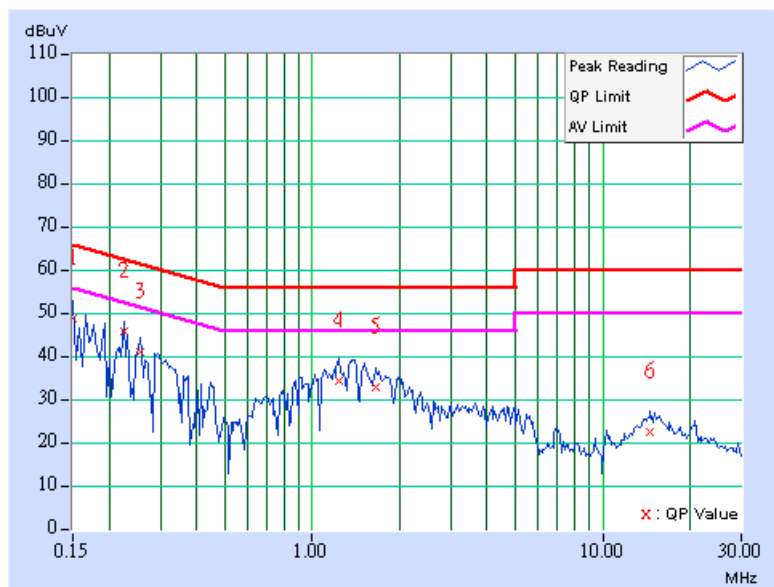


TEST MODE C (SUB-BAND 3):

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	3	PHASE	Line 1
MODULATION TECHNOLOGY	MOFDM	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.20	51.10	-	51.30	-	66.00	56.00	-14.70	-
2	0.185	0.20	41.65	-	41.85	-	64.25	54.25	-22.40	-
3	0.232	0.20	41.07	-	41.27	-	62.38	52.38	-21.11	-
4	0.451	0.20	35.48	-	35.68	-	56.86	46.86	-21.18	-
5	1.027	0.20	33.78	-	33.98	-	56.00	46.00	-22.02	-
6	1.531	0.20	32.61	-	32.81	-	56.00	46.00	-23.19	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

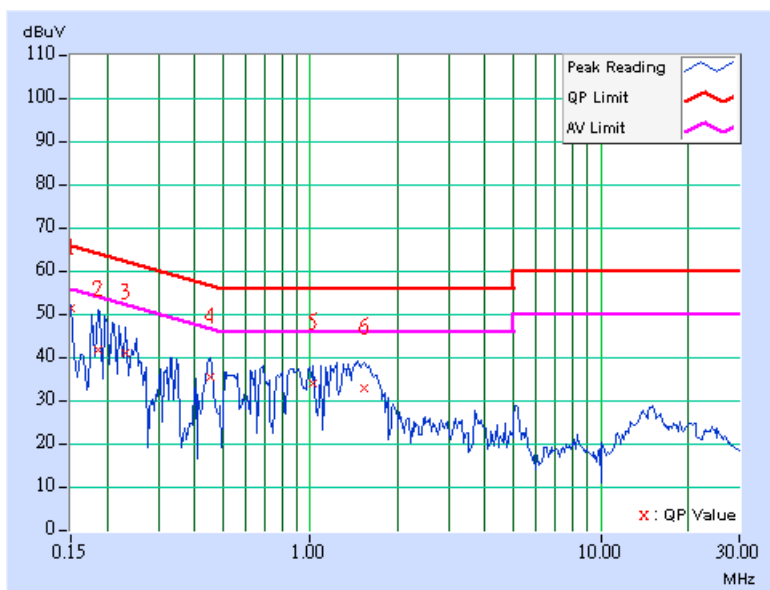

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	3	PHASE	Line 2
MODULATION TECHNOLOGY	MOFDM	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.20	51.28	-	51.48	-	66.00	56.00	-14.52	-
2	0.224	0.20	43.50	-	43.70	-	62.66	52.66	-18.96	-
3	0.314	0.20	33.09	-	33.29	-	59.86	49.86	-26.57	-
4	0.994	0.20	26.50	-	26.70	-	56.00	46.00	-29.30	-
5	1.461	0.20	31.18	-	31.38	-	56.00	46.00	-24.62	-
6	14.535	0.62	22.35	-	22.97	-	60.00	50.00	-37.03	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

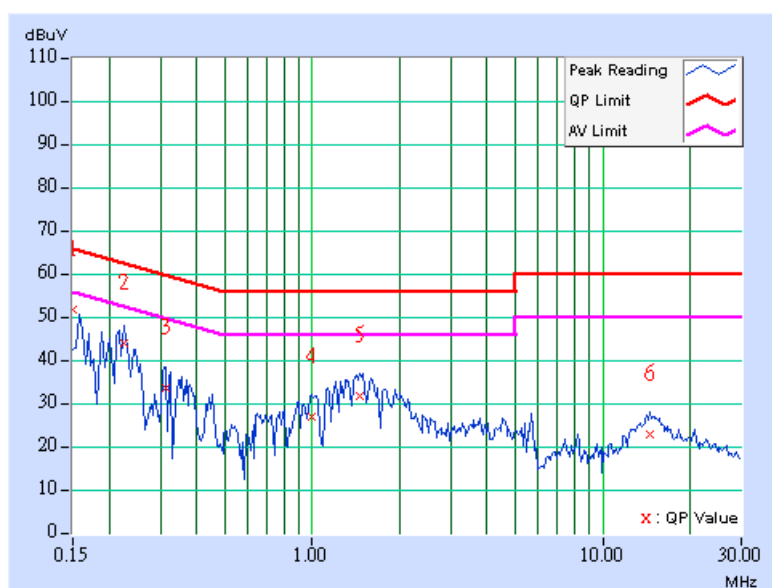


TEST MODE D (SUB-BAND 1, 2, 3):

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	1, 2, 3	PHASE	Line 1
MODULATION TECHNOLOGY	MOFDM	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.20	49.26	-	49.46	-	66.00	56.00	-16.54	-
2	0.166	0.20	41.61	-	41.81	-	65.18	55.18	-23.37	-
3	0.224	0.20	45.56	-	45.76	-	62.66	52.66	-16.90	-
4	0.443	0.20	35.06	-	35.26	-	57.01	47.01	-21.75	-
5	1.227	0.20	33.54	-	33.74	-	56.00	46.00	-22.26	-
6	14.398	0.89	22.68	-	23.57	-	60.00	50.00	-36.43	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

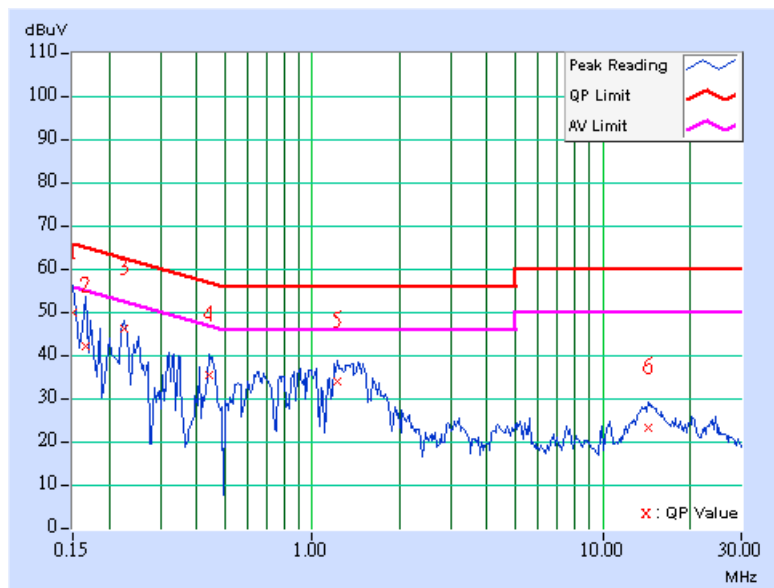

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	1, 2, 3	PHASE	Line 2
MODULATION TECHNOLOGY	MOFDM	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Long Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.20	46.38	-	46.58	-	65.38	55.38	-18.80	-
2	0.185	0.20	39.55	-	39.75	-	64.25	54.25	-24.50	-
3	0.236	0.20	37.34	-	37.54	-	62.24	52.24	-24.70	-
4	0.443	0.20	28.82	-	29.02	-	57.01	47.01	-27.99	-
5	1.438	0.20	30.71	-	30.91	-	56.00	46.00	-25.09	-
6	15.359	0.63	21.77	-	22.40	-	60.00	50.00	-37.60	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

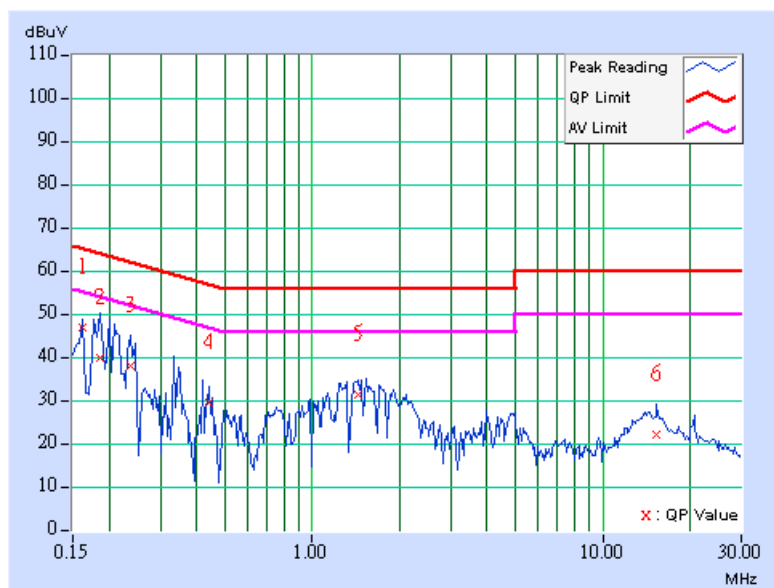

4.2 RADIATED EMISSION MEASUREMENT (FOR 15.519 (c))

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The radiated emissions at or below 960MHz from a device operating under the provisions of this section shall not exceed the emission levels in Section 15.209.

FREQUENCIES (MHz)	FIELD STRENGTH (mV/m)	MEASUREMENT DISTANCE (m)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

The radiated emissions above 960MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1MHz:

FREQUENCY IN MHz	EIRP IN dBm	dBuV/m@3m	dBuV/m@1m
960 ~ 1,610	-75.3	19.9	29.44
1,610 ~ 1,990	-63.3	31.9	41.44
1,990 ~ 3,100	-61.3	33.9	43.44
3,100 ~ 10,600	-41.3	53.9	63.44
Above 10600	-61.3	33.9	43.44

Transfer rules follow 15.521(g),15.31(f)(1).

15.521(c) Emissions from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in Section 15.209 of this chapter, rather than the limits specified in this subpart.

NOTE: Use conducted measurement to determine emissions is from digital circuitry or not.
Emissions from digital circuitry follow 15.209 else 15.519

The radiated emissions from a device operating under the provisions of this section shall not exceed the emission levels in Section 15.209.

FREQUENCY IN MHz	dBuV/m@3m	dBuV/m@1m
	Quasi Peak	Quasi Peak
216 ~ 960	46.00	55.54
960 ~ 1000	54.00	63.54

FREQUENCY IN MHz	dBuV/m@3m		dBuV/m@1m	
Above 1000	Peak	Average	Peak	Average
	74.00	54.00	83.54	63.54

4.2.2 INSTRUMENT SETUP VALUE AND MEASUREMENT DISTANCE

FREQUENCY RANGE	RESOLUTION BANDWIDTH	VIDEO BANDWIDTH	DETECTOR	MEASUREMENT DISTANCE
Below 960MHz	120kHz	120kHz	Quasi Peak	3 meters
Above 960MHz	1MHz	3MHz	RMS	1 meter



4.2.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	May. 22, 2007
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100025	Dec. 05, 2007
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	May 31, 2007
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 08, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 19, 2007
Preamplifier Agilent	8447D	2944A10633	Oct. 26, 2007
Preamplifier Agilent	8449B	3008A01964	Oct. 26, 2007
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	214377/4	Nov. 14, 2007
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219272/4	Nov. 14, 2007
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The VCCI Site Registration No. is R-237.
 5. The IC Site Registration No. is IC4924-3.




4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 1, 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

4.2.5 DEVIATION FROM TEST STANDARD

No deviation

4.2.6 TEST SETUP

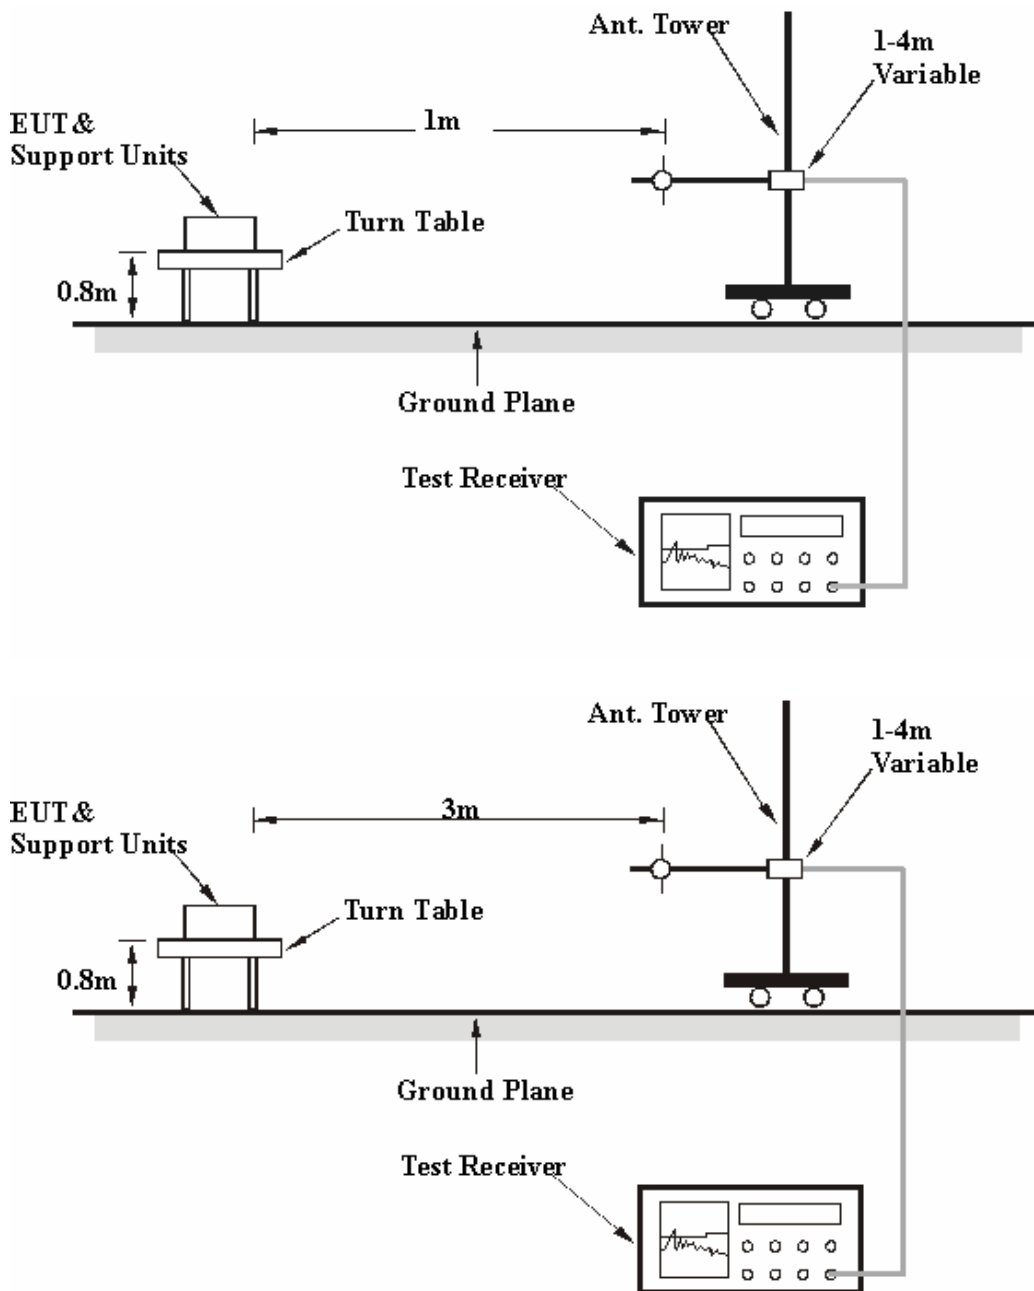

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.7 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.8 TEST RESULTS

RADIATED BELOW 960MHz WORST-CASE DATA TEST MODE D (SUB-BAND 1, 2, 3):

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	1, 2, 3	FREQUENCY RANGE	Below 960MHz
MODULATION TECHNOLOGY	MOFDM	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	113.87	30.93 QP	43.50	-12.57	1.75 H	37	19.04	11.89
2	199.60	29.95 QP	43.50	-13.55	1.75 H	139	18.66	11.29
3	249.92	34.13 QP	46.00	-11.87	1.00 H	172	20.64	13.49
4	395.29	32.62 QP	46.00	-13.38	1.50 H	34	15.09	17.53
5	466.11	32.22 QP	46.00	-13.78	1.75 H	313	12.57	19.64
6	527.62	36.51 QP	46.00	-9.49	1.00 H	121	15.84	20.67
7	600.30	35.17 QP	46.00	-10.83	1.75 H	265	12.83	22.34
8	719.58	36.05 QP	46.00	-9.95	1.75 H	205	11.45	24.59
9	751.26	32.40 QP	46.00	-13.60	1.50 H	238	6.95	25.46
10	768.04	34.85 QP	46.00	-11.15	1.25 H	301	9.31	25.54
11	816.49	36.59 QP	46.00	-9.41	1.50 H	340	10.57	26.02
12	864.95	37.56 QP	46.00	-8.44	1.00 H	121	10.70	26.86
13	924.59	35.49 QP	46.00	-10.51	1.00 H	121	7.91	27.58
14	960.00	34.15 QP	46.00	-11.85	1.50 H	238	6.18	27.97

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	1, 2, 3	FREQUENCY RANGE	Below 960MHz
MODULATION TECHNOLOGY	MOFDM	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	113.87	30.53 QP	43.50	-12.97	1.00 V	175	18.64	11.89
2	132.96	26.13 QP	43.50	-17.37	1.00 V	100	12.77	13.36
3	177.23	34.66 QP	43.50	-8.84	1.50 V	226	21.46	13.21
4	199.60	31.40 QP	43.50	-12.10	2.00 V	136	20.10	11.29
5	221.96	33.29 QP	46.00	-12.71	2.00 V	136	21.05	12.24
6	233.15	32.76 QP	46.00	-13.24	2.00 V	136	20.02	12.74
7	266.69	29.37 QP	46.00	-16.63	2.00 V	136	15.22	14.15
8	395.29	31.52 QP	46.00	-14.48	1.25 V	331	13.99	17.53
9	432.57	32.52 QP	46.00	-13.48	1.00 V	331	13.73	18.79
10	467.98	35.62 QP	46.00	-10.38	1.00 V	337	15.95	19.67
11	527.62	36.50 QP	46.00	-9.50	1.25 V	133	15.83	20.67
12	624.53	32.54 QP	46.00	-13.46	1.25 V	343	9.69	22.85
13	659.94	33.87 QP	46.00	-12.13	1.25 V	343	10.34	23.53
14	792.26	38.89 QP	46.00	-7.11	1.25 V	352	13.23	25.66
15	864.95	37.57 QP	46.00	-8.43	1.00 V	247	10.72	26.86
16	924.59	37.93 QP	46.00	-8.07	1.00 V	247	10.35	27.58

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



RADIATED ABOVE 960MHz DATA

TEST MODE A (SUB-BAND 1):

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	1	FREQUENCY RANGE	960MHz ~ 40GHz
MODULATION TECHNOLOGY	MOFDM	DETECTOR FUNCTION	RMS
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 1 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5280.00	44.51	63.44	-18.93	1.00 H	339	4.77	39.74
2	6864.00	50.19	63.44	-13.25	1.00 H	3	5.55	44.64

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 1 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5280.00	44.01	63.44	-19.43	1.05 V	15	4.27	39.74
2	6864.00	48.03	63.44	-15.41	1.06 V	19	3.39	44.64

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

TEST MODE B (SUB-BAND 2):

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	2	FREQUENCY RANGE	960MHz ~ 40GHz
MODULATION TECHNOLOGY	MOFDM	DETECTOR FUNCTION	RMS
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 1 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5280.00	45.53	63.44	-17.91	1.04 H	11	5.79	39.74
2	7920.00	50.68	63.44	-12.76	1.00 H	1	4.15	46.53

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 1 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5280.00	44.68	63.44	-18.76	1.07 V	13	4.94	39.74
2	7920.00	48.76	63.44	-14.68	1.03 V	26	2.23	46.53

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

TEST MODE C (SUB-BAND 3):

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	3	FREQUENCY RANGE	960MHz ~ 40GHz
MODULATION TECHNOLOGY	MOFDM	DETECTOR FUNCTION	RMS
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 1 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5280.00	44.76	63.44	-18.68	1.00 H	325	5.02	39.74
2	8976.00	50.23	63.44	-13.21	1.00 H	352	2.54	47.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 1 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5280.00	44.32	63.44	-19.12	1.08 V	26	4.58	39.74
2	8976.00	48.43	63.44	-15.01	1.01 V	14	0.74	47.69

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

TEST MODE D (SUB-BAND 1, 2, 3):

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	1, 2, 3	FREQUENCY RANGE	960MHz ~ 40GHz
MODULATION TECHNOLOGY	MOFDM	DETECTOR FUNCTION	RMS
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 1 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5280.00	44.85	63.44	-18.59	1.00 H	342	5.11	39.74
2	6864.00	49.55	63.44	-13.89	1.00 H	26	4.91	44.64
3	7920.00	50.03	63.44	-13.41	1.00 H	357	3.50	46.53
4	8976.00	49.52	63.44	-13.92	1.00 H	15	1.83	47.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 1 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5280.00	44.12	63.44	-19.32	1.04 V	55	4.38	39.74
2	6864.00	47.56	63.44	-15.88	1.02 V	26	2.92	44.64
3	7920.00	48.06	63.44	-15.38	1.01 V	15	1.53	46.53
4	8976.00	47.89	63.44	-15.55	1.00 V	9	0.20	47.69

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EMISSIONS FROM DIGITAL CIRCUITRY

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	1, 2, 3	FREQUENCY RANGE	Below 1GHz
MODULATION TECHNOLOGY	MOFDM	DETECTOR FUNCTION	Quasi - Peak
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 1 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	960.00	42.66 QP	55.54	-12.88	2.00 H	34	14.69	27.97
2	990.00	44.15 QP	63.54	-19.39	1.00 H	25	16.02	28.13

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 1 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	960.00	40.42 QP	55.54	-15.12	1.00 V	284	12.45	27.97
2	990.00	43.25 QP	63.54	-20.29	1.00 V	298	15.12	28.13

REMARKS:

1. Emission source for each frequency.

Frequency (MHz)	Emission Source
960.00	2th Harmonic of USB controller PHY clock (480MHz)
990.00	15th Harmonic of 66MHz BB processor Debug clock.

2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
4. The other emission levels were very low against the limit.
5. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	1, 2, 3	FREQUENCY RANGE	Above 1GHz
MODULATION TECHNOLOGY	MOFDM	DETECTOR FUNCTION	Peak / Average
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 1 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1056.00	51.52 PK	83.54	-32.02	1.00 H	296	23.25	28.27
1	1056.00	47.40 AV	63.54	-16.14	1.00 H	296	19.13	28.27
2	1320.00	40.28 PK	83.54	-43.26	1.03 H	31	11.23	29.05
2	1320.00	35.41 AV	63.54	-28.13	1.03 H	31	6.36	29.05
3	1440.00	48.93 PK	83.54	-34.61	1.05 H	65	19.52	29.40
3	1440.00	44.16 AV	63.54	-19.38	1.05 H	65	14.75	29.40
4	1536.00	48.34 PK	83.54	-35.20	1.00 H	16	18.69	29.65
4	1536.00	43.11 AV	63.54	-20.43	1.00 H	16	13.46	29.65
5	1584.00	51.69 PK	83.54	-31.85	1.05 H	106	21.93	29.75
5	1584.00	46.92 AV	63.54	-16.62	1.05 H	106	17.16	29.75
6	2111.96	50.64 PK	83.54	-32.90	1.00 H	346	19.60	31.03
6	2111.96	45.76 AV	63.54	-17.78	1.00 H	346	14.72	31.03
7	2640.00	59.01 PK	83.54	-24.53	1.00 H	125	26.15	32.86
7	2640.00	55.01 AV	63.54	-8.53	1.00 H	125	22.15	32.86

REMARKS:

1. Emission source for each frequency.

Frequency (MHz)	Emission Source
1056.00	8th Harmonic of BB processor clock (132MHz)
1320.00	10th Harmonic of BB processor clock (132MHz)
1440.00	3th Harmonic of USB controller PHY clock (480MHz)
1536.00	32th Harmonic of 48 MHz USB clock.
1584.00	12th Harmonic of BB processor clock. (132MHz)
2111.96	16th Harmonic of BB processor clock. (132MHz)
2640.00	20th Harmonic of BB processor clock. (132MHz)

2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)

3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)

4. The other emission levels were very low against the limit.

5. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	1, 2, 3	FREQUENCY RANGE	Above 1GHz
MODULATION TECHNOLOGY	MOFDM	DETECTOR FUNCTION	Peak / Average
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 1 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1056.00	50.12 PK	83.54	-33.42	1.05 V	281	21.85	28.27
1	1056.00	46.38 AV	63.54	-17.16	1.05 V	281	18.11	28.27
2	1320.00	39.15 PK	83.54	-44.39	1.05 V	315	10.10	29.05
2	1320.00	34.22 AV	63.54	-29.32	1.05 V	315	5.17	29.05
3	1440.00	47.89 PK	83.54	-35.65	1.00 V	25	18.49	29.40
3	1440.00	43.05 AV	63.54	-20.49	1.00 V	25	13.65	29.40
4	1536.00	46.25 PK	83.54	-37.29	1.00 V	36	16.60	29.65
4	1536.00	41.09 AV	63.54	-22.45	1.00 V	36	11.44	29.65
5	1584.00	48.78 PK	83.54	-34.76	1.08 V	111	19.03	29.75
5	1584.00	43.76 AV	63.54	-19.78	1.08 V	111	14.01	29.75
6	2111.96	49.22 PK	83.54	-34.32	1.00 V	30	18.19	31.03
6	2111.96	44.53 AV	63.54	-19.01	1.00 V	30	13.50	31.03
7	2640.00	57.89 PK	83.54	-25.65	1.00 V	136	25.03	32.86
7	2640.00	53.91 AV	63.54	-9.63	1.00 V	136	21.05	32.86

REMARKS:

1. Emission source for each frequency.


Frequency (MHz)	Emission Source
1056.00	8th Harmonic of BB processor clock (132MHz)
1320.00	10th Harmonic of BB processor clock (132MHz)
1440.00	3th Harmonic of USB controller PHY clock (480MHz)
1536.00	32th Harmonic of 48 MHz USB clock.
1584.00	12th Harmonic of BB processor clock. (132MHz)
2111.96	16th Harmonic of BB processor clock. (132MHz)
2640.00	20th Harmonic of BB processor clock. (132MHz)

2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)

3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)

4. The other emission levels were very low against the limit.

5. Margin value = Emission level – Limit value.

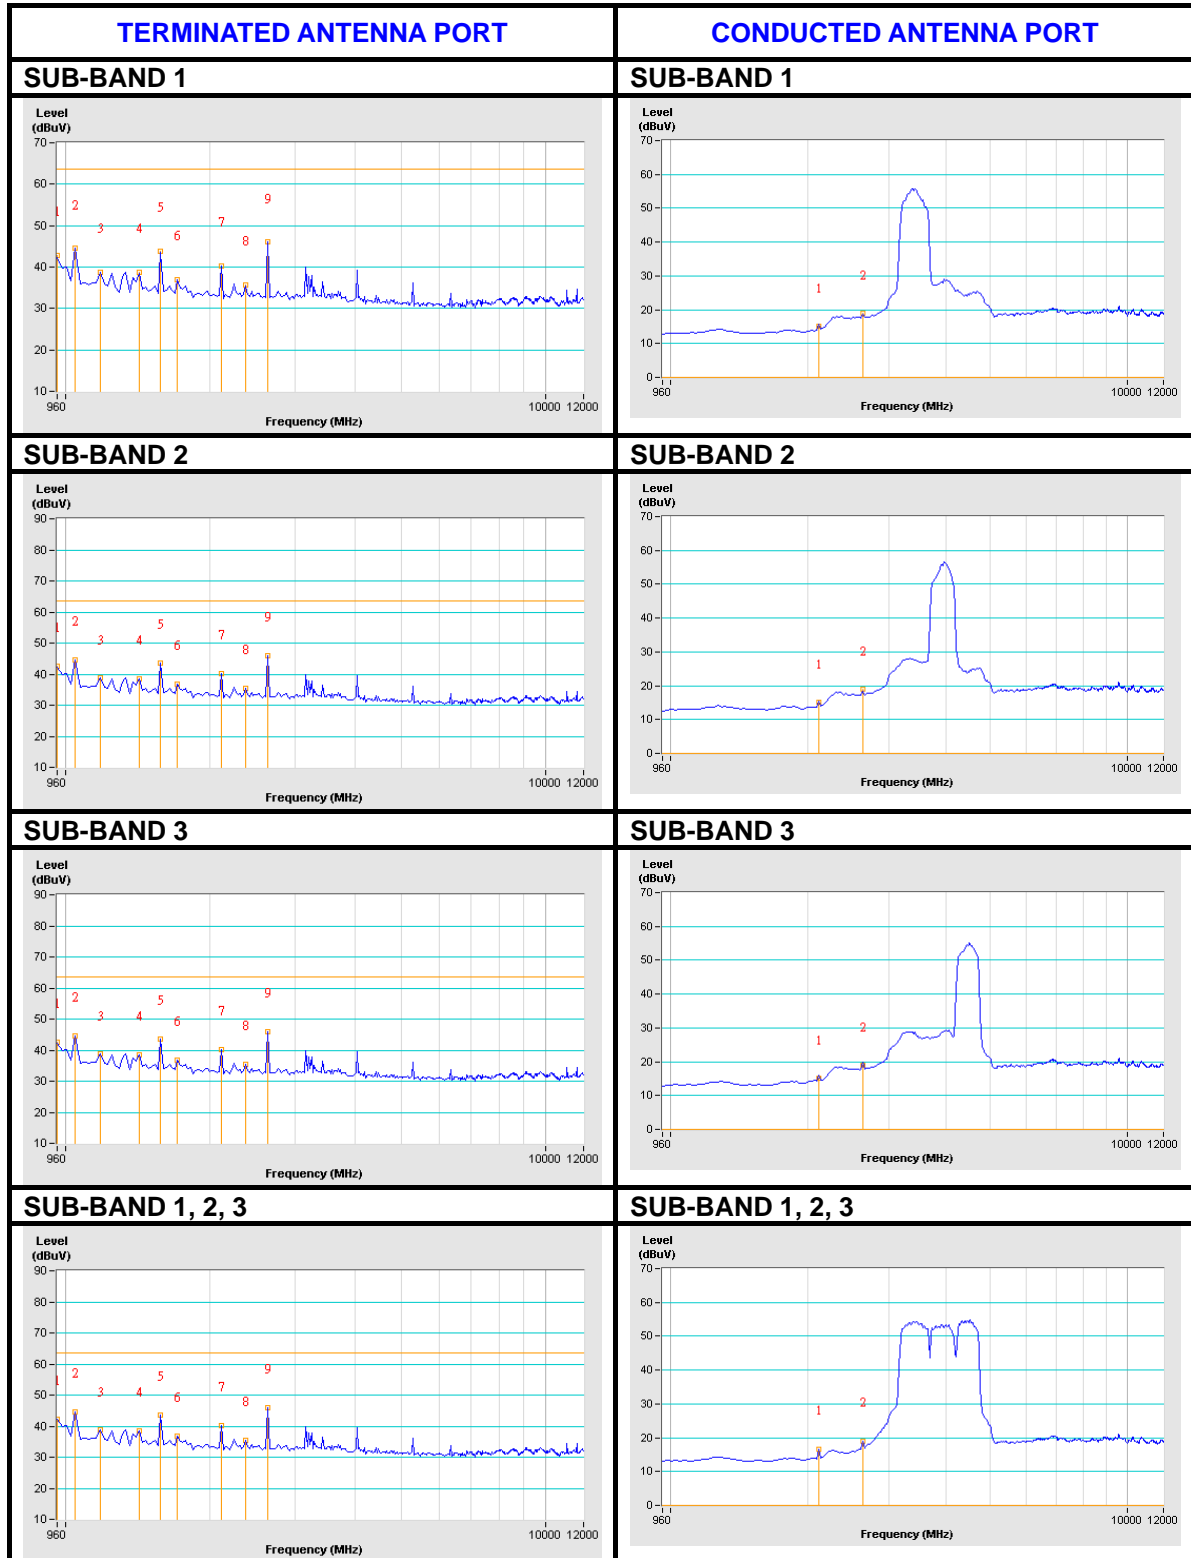

4.3 RADIATED EMISSION MEASUREMENT (FOR 15.519 (d))


4.3.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY IN MHz	EIRP IN dBm	dBuV/m@3m	dBuV/m@1m
1,164 ~ 1,240	-85.3	9.9	19.44
1,559 ~ 1,610	-85.3	9.9	19.44

Transfer rules follow 15.521(g), 15.31(f)(1).

- NOTE:** 1. 15.521(g) converted to a peak field strength level at 3 meters using $E(\text{dBuV/m}) = P(\text{dBmEIRP}) + 95.2$.
2. 15.31(f)(1) When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade, Measurement distance moves from 3m to 1m, $\text{Limit (1m)} = \text{Limit (3m)} + 20\text{Log (3/1)} = \text{Limit (3m)} + 9.54$.

Instrument Noise Floor

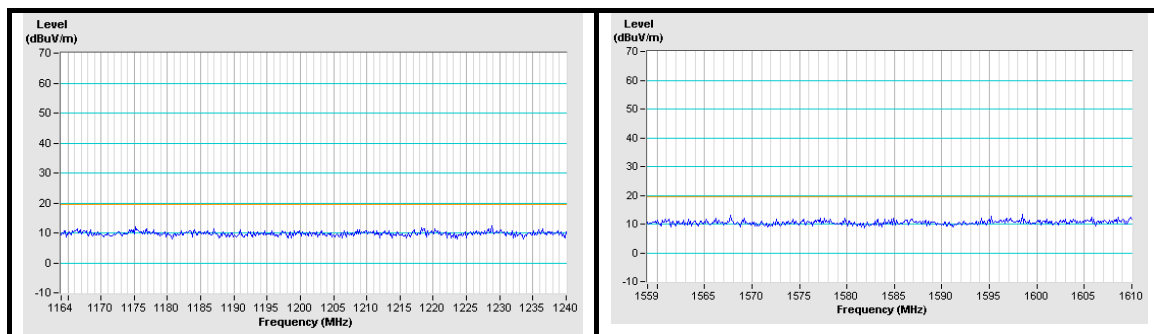

15.521(c) Emissions from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in Section 15.209 of this chapter, rather than the limits specified in this subpart.

- NOTE:** Use conducted measurement to determine emissions is from digital circuitry or not. Emissions from digital circuitry follow 15.209 else 15.517

The radiated emissions above 1000MHz from a device operating under the provisions of this section shall not exceed the emission levels in Section 15.209.

FREQUENCY IN MHz	dBuV/m@3m		dBuV/m@1m	
	Peak	Average	Peak	Average
Above 1000	74.00	54.00	83.54	63.54

4.3.2 INSTRUMENT SETUP VALUE AND MEASUREMENT DISTANCE

UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

FREQUENCY RANGE	RESOLUTION BANDWIDTH	VIDEO BANDWIDTH	DETECTOR	MEASUREMENT DISTANCE
1,164 ~ 1,240	*10kHz	30kHz	RMS	1 meter
1,559 ~ 1,610	*10kHz	30kHz	RMS	1 meter

NOTE: *reference The Evolution of Modern UWB Technology.



4.3.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	May. 22, 2007
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100025	Dec. 05, 2007
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	May 31, 2007
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 08, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 19, 2007
Preamplifier Agilent	8447D	2944A10633	Oct. 26, 2007
Preamplifier Agilent	8449B	3008A01964	Oct. 26, 2007
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	214377/4	Nov. 14, 2007
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219272/4	Nov. 14, 2007
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The VCCI Site Registration No. is R-237.
 5. The IC Site Registration No. is IC4924-3.




4.3.4 TEST PROCEDURES

- e. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 1 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- f. The EUT was set 1 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- g. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- h. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation

4.3.6 TEST SETUP

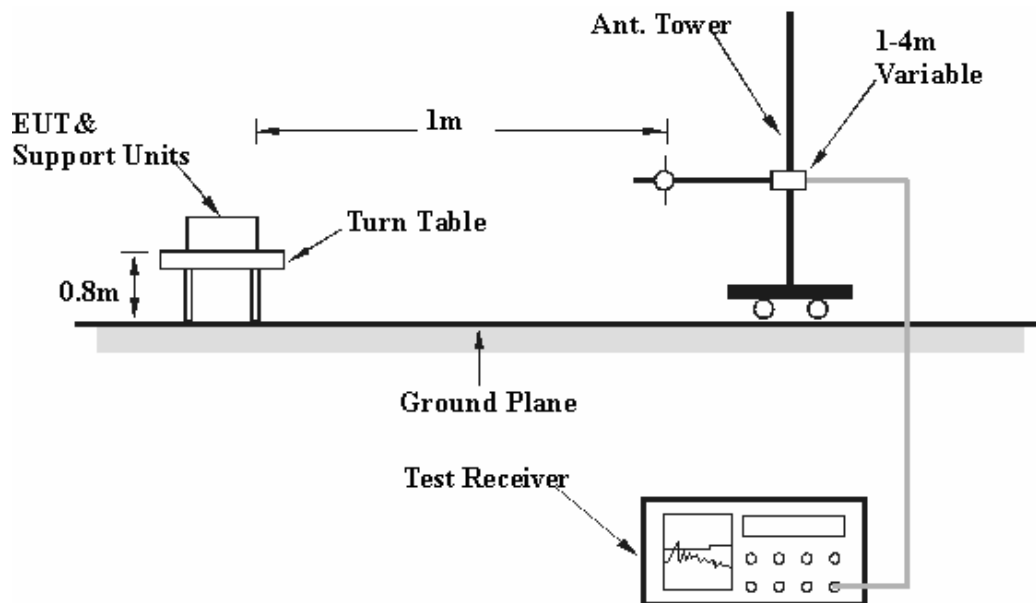

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.3.7 EUT OPERATING CONDITIONS

Same as 4.1.6

4.3.8 TEST RESULTS

EMISSIONS FROM DIGITAL CIRCUITRY

EUT TEST CONDITION		MEASUREMENT DETAIL	
SUB-BAND	1, 2, 3	FREQUENCY RANGE	Above 1GHz
MODULATION TECHNOLOGY	MOFDM	DETECTOR FUNCTION	Peak / Average
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 1 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1584.00	51.69 PK	83.54	-31.85	1.05 H	106	21.93	29.75
1	1584.00	46.92 AV	63.54	-16.62	1.05 H	106	17.16	29.75

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 1 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1584.00	48.78 PK	83.54	-34.76	1.08 V	111	19.03	29.75
1	1584.00	43.76 AV	63.54	-19.78	1.08 V	111	14.01	29.75

REMARKS:

1. Emission source for the frequency.


Frequency (MHz)	Emission Source
1584.00	12th Harmonic of BB processor clock. (132MHz)

2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)

3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)

4. The other emission levels were very low against the limit.

5. Margin value = Emission level – Limit value.

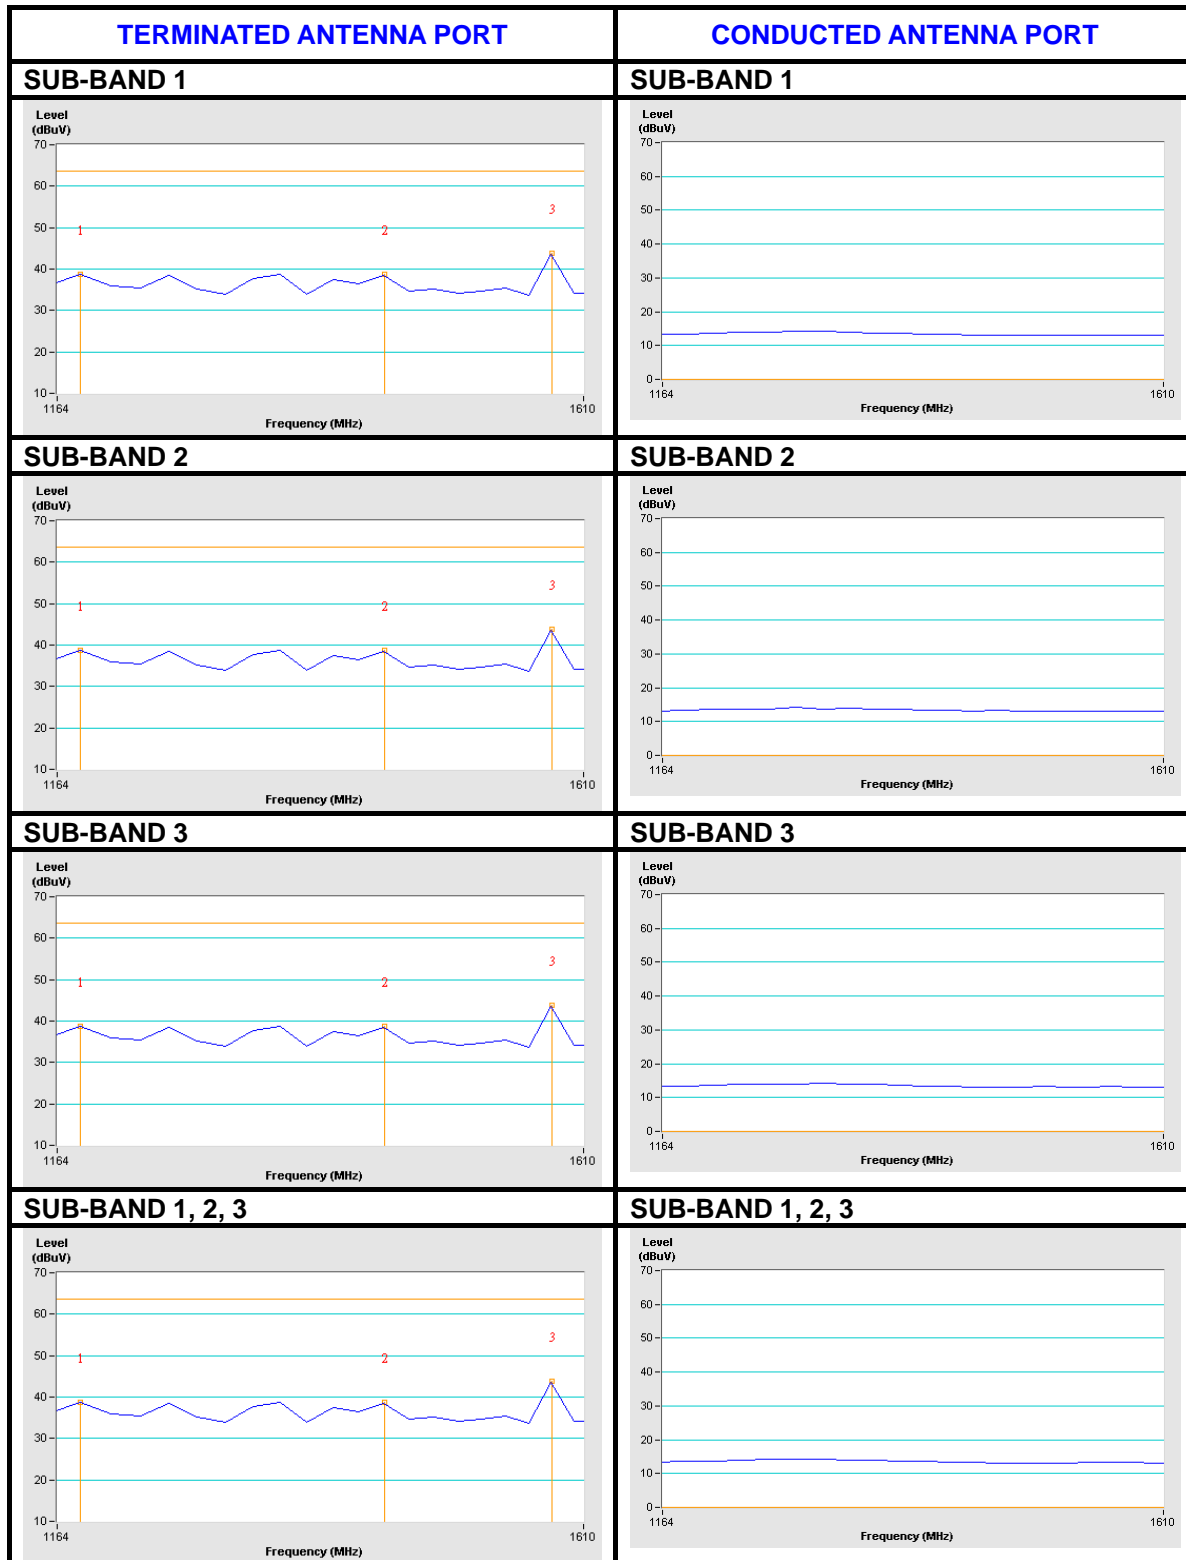



4.4 UWB BANDWIDTH MEASUREMENT

4.4.1 LIMITS OF UWB BANDWIDTH MEASUREMENT

The UWB bandwidth of a UWB system operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

4.4.2 INSTRUMENT SETUP VALUE AND MEASUREMENT DISTANCE

FREQUENCY RANGE	RESOLUTION BANDWIDTH	VIDEO BANDWIDTH	DETECTOR	MEASUREMENT DISTANCE
3,100 ~ 10,600	1MHz	3MHz	Peak	3 meters

4.4.3 TEST INSTRUMENT

Same as Item 4.2.3

4.4.4 TEST PROCEDURE

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The Spectrum Analyzer system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- The UWB Bandwidth is measured at the 10 dB point (F_L , F_H).

4.4.5 DEVIATION FROM TEST STANDARD

No deviation



4.4.6 TEST SETUP

Same as Item 4.2.6

4.4.7 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously.


4.4.8 TEST RESULTS

TEST MODE A (SUB-BAND 1):

MODULATION TECHNOLOGY	MOFDM	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Morgan Chen

F_L (MHz)	F_H (MHz)	$F_C=(F_L+F_H)/2$ (MHz)	LIMIT (MHz)	PASS/FAIL
3180.00	3686.00	3433.00	Between 3100.00 ~ 10600.00	PASS

UWB Bandwidth = $F_H - F_L = 506\text{MHz}$

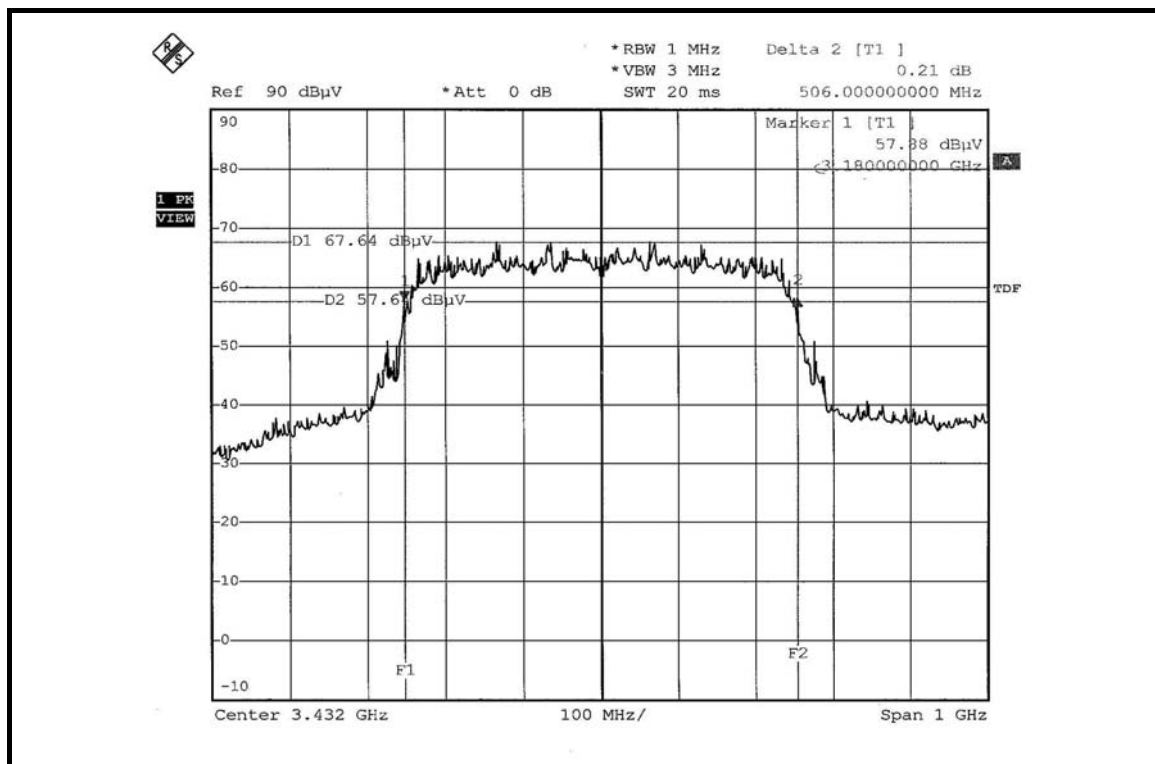


TEST MODE B (SUB-BAND 2):

MODULATION TECHNOLOGY	MOFDM	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Morgan Chen

F_L (MHz)	F_H (MHz)	$F_C=(F_L+F_H)/2$ (MHz)	LIMIT (MHz)	PASS/FAIL
3708.00	4214.00	3961.00	Between 3100.00 ~ 10600.00	PASS

UWB Bandwidth = $F_H - F_L = 506\text{MHz}$

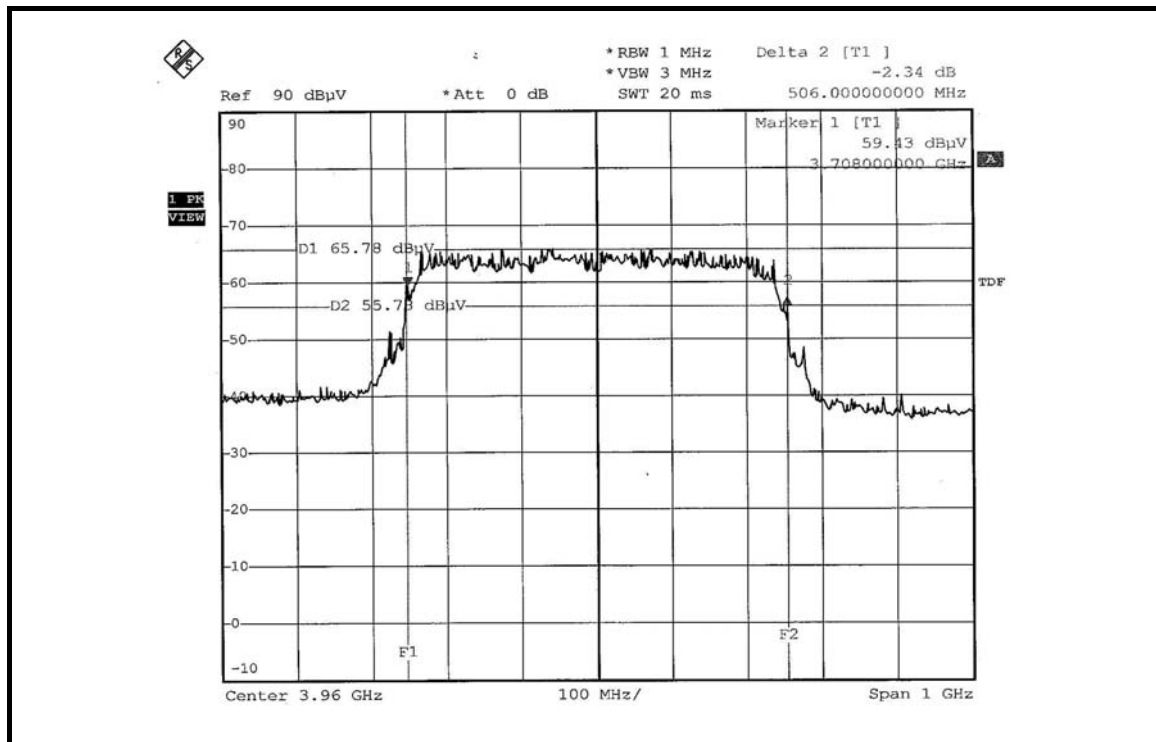


TEST MODE C (SUB-BAND 3):

MODULATION TECHNOLOGY	MOFDM	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Morgan Chen

F_L (MHz)	F_H (MHz)	$F_C=(F_L+F_H)/2$ (MHz)	LIMIT (MHz)	PASS/FAIL
4234.00	4742.00	4488.00	Between 3100.00 ~ 10600.00	PASS

UWB Bandwidth = $F_H - F_L = 508\text{MHz}$

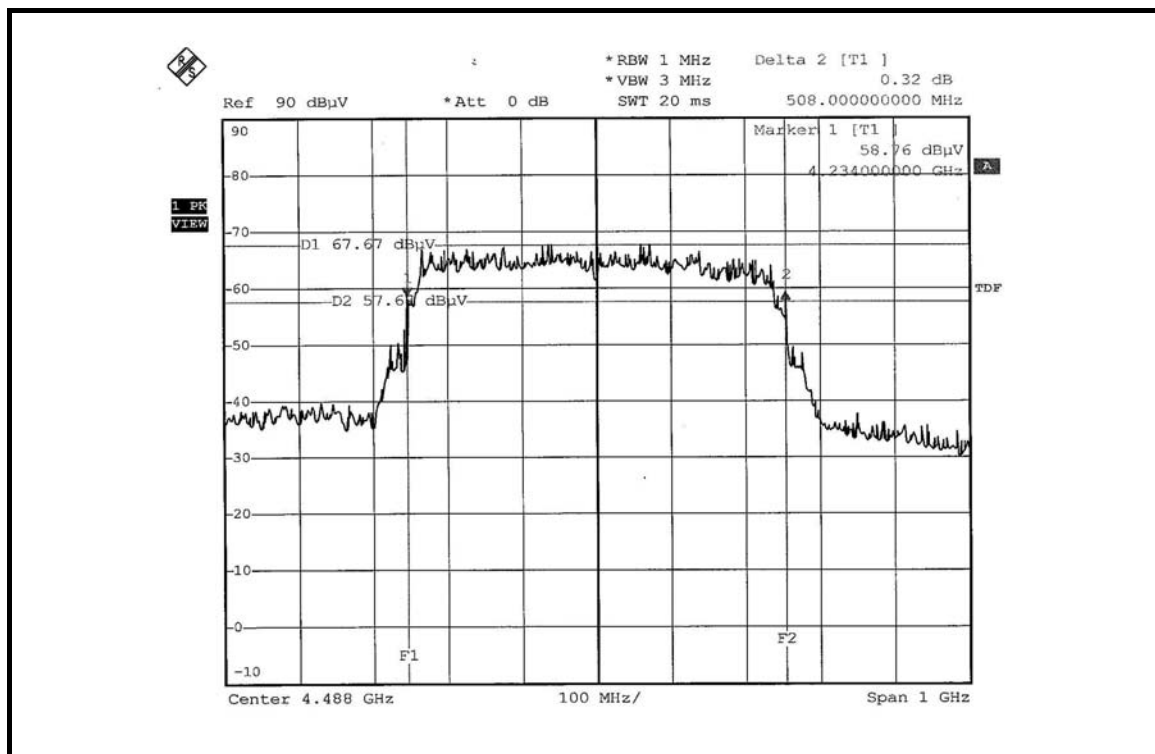




TEST MODE D (SUB-BAND 1, 2, 3):

MODULATION TECHNOLOGY	MOFDM	ENVIRONMENTAL CONDITIONS	26deg.C, 66%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Morgan Chen

F_L (MHz)	F_H (MHz)	F_C=(F_L+F_H)/2 (MHz)	LIMIT (MHz)	PASS/FAIL
3180.00	4740.00	3960.00	Between 3100.00 ~ 10600.00	PASS

UWB Bandwidth = F_H - F_L=1560MHz

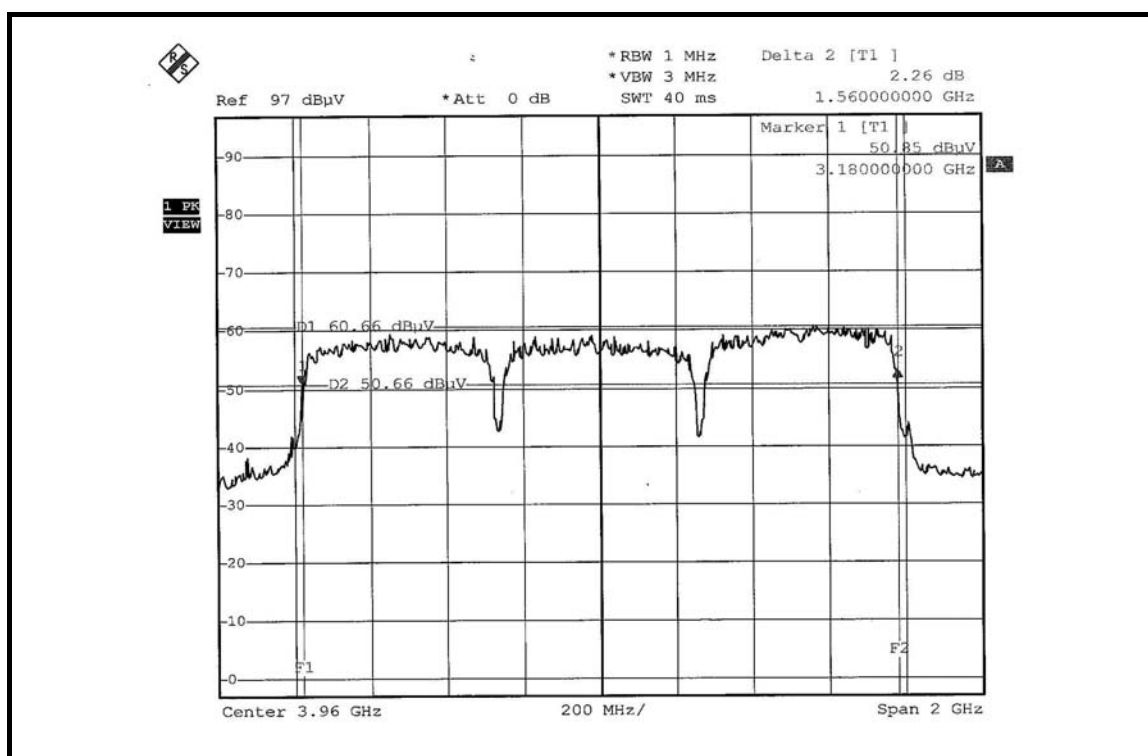



4.5 PEAK EMISSION WITHIN A 50MHz BANDWIDTH

4.5.1 LIMITS OF PEAK EMISSION

The Maximum Peak Output Power Measurement is 0dBm(RBW=50MHz)

If a resolution bandwidth other than 50 MHz is Employed, the peak EIRP limit shall be $20 \log (RBW/50)$ dBm where RBW is the resolution bandwidth in megahertz that is employed. The resolution bandwidth used to make the peak measurement was 1 MHz, resulting in a limit of -34dBm

This may be converted to a peak field strength level at 3 meters using

$$E(\text{dBuV/m}) = P(\text{dBm EIRP}) + 95.2 = -34 + 95.2 = 61.2.$$

4.5.2 INSTRUMENT SETUP VALUE AND MEASUREMENT DISTANCE

RADIATED EMISSIONS 15.517 (e):

FREQUENCY RANGE	RESOLUTION BANDWIDTH	VIDEO BANDWIDTH	DETECTOR	MEASUREMENT DISTANCE
3,100 ~ 10,600	1MHz	3MHz	*Peak	3 meters

NOTE: *reference The Evolution of Modern UWB Technology

4.5.3 TEST INSTRUMENTS

Same as 4.2.3

4.5.4 TEST PROCEDURE

Same as 4.2.4

4.5.5 DEVIATION FROM TEST STANDARD

No deviation

4.5.6 TEST SETUP

Same as Item 4.2.6

4.5.7 EUT OPERATING CONDITIONS

Same as 4.1.6

4.5.8 TEST RESULTS

MODULATION TECHNOLOGY	MOFDM	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Morgan Chen

TEST MODE A (SUB-BAND 1):

ANTENNA POLARITY & TEST DISTANCE AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3432.00	58.60 PK	61.20	-2.60	1.35 H	241	24.00	34.59
1	3432.00	57.26 PK	61.20	-3.94	1.10 V	94	22.66	34.59

TEST MODE B (SUB-BAND 2):

ANTENNA POLARITY & TEST DISTANCE AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3960.00	60.27 PK	61.20	-0.93	1.39 H	351	23.26	37.01
1	3960.00	59.12 PK	61.20	-2.08	1.13 V	87	22.11	37.01

TEST MODE C (SUB-BAND 3):

ANTENNA POLARITY & TEST DISTANCE AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4488.00	60.48 PK	61.20	-0.72	1.29 H	0	22.60	37.88
1	4488.00	59.56 PK	61.20	-1.64	1.15 V	93	21.68	37.88

TEST MODE D (SUB-BAND 1, 2, 3):

ANTENNA POLARITY & TEST DISTANCE AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (Db/m)
1	3432.00	57.52 PK	61.20	-3.68	1.28 H	253	22.93	34.59
2	3960.00	59.07 PK	61.20	-2.13	1.23 H	346	22.06	37.01
3	4488.00	59.25 PK	61.20	-1.95	1.30 H	329	21.37	37.88
1	3432.00	56.41 PK	61.20	-4.79	1.05 V	56	21.82	34.59
2	3960.00	57.91 PK	61.20	-3.29	1.00 V	19	20.90	37.01
3	4488.00	58.11 PK	61.20	-3.09	1.09 V	36	20.23	37.88



4.6 ANTENNA REQUIREMENT

4.6.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

4.6.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Printed antenna without antenna connector. The maximum Gain of the antenna is 2.5dBi.



5 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025

USA	FCC, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, NCC
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.