

# TEST REPORT

of

## FCC Part 15 Subpart C and CANADA RSS-210

New Application;  Class I PC;  Class II PC

**Product :** Fitness Device  
**Brand:** Magellan, Mio, Navman, Mitac  
**Model:** Switch Up, Switch, N387  
**Model Difference:** Please see the table in page 5  
**FCC ID:** P4Q-N387  
**IC:** 2420C-N387  
**FCC Rule Part:** §15.249  
**IC Rule Part:** RSS-210 issue 8:2010, Annex 2.9  
**Applicant:** Mitac International Corporation  
**Address:** Building B, No. 209, Sec. 1, Nan Gang Rd., Nan Gang Dist., Taipei, 11568, Taiwan, R.O.C.

### Test Performed by:

#### International Standards Laboratory

<Lung-Tan LAB>

\*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW1036; TAF: 0997; IC: IC4067B-3;

\*Address:

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.

Lung-Tan Hsiang, Tao Yuan County 325, Taiwan

\*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: **ISL-11LR054FC**

Issue Date : **2011/09/22**



Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report MUST not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory.

## VERIFICATION OF COMPLIANCE

**Applicant:** Mitac International Corporation  
**Product Description:** Fitness Device  
**Brand Name:** Magellan, Mio, Navman, Mitac  
**Model No.:** Switch Up, Switch, N387  
**Model Difference:** Please see the table in page 5  
**FCC ID:** P4Q-N387  
**IC:** 2420C-N387  
**FCC Rule Part:** §15.249  
**IC Rule Part:** RSS-210 issue 8:2010, Annex 2.9  
**Date of test:** 2011/08/05 ~ 2011/09/06  
**Date of EUT Received:** 2011/08/05

### We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

**Test By:**



**Date:**

2011/09/22

*Dion Chang / Engineer*

**Prepared By:**



**Date:**

2011/09/22

*Eva Kao / Technical Supervisor*

**Approved By:**



**Date:**

2011/09/22

*Vincent Su / Technical Manager*

## Version

Version No.	Date	Description
00	2011/09/22	Initial creation of document

## Table of Contents

<b>1.</b>	<b>GENERAL INFORMATION .....</b>	<b>5</b>
1.1	PRODUCT DESCRIPTION .....	5
1.2	RELATED SUBMITTAL(S) / GRANT (S) .....	5
1.3	TEST METHODOLOGY .....	6
1.4	TEST FACILITY .....	6
1.5	SPECIAL ACCESSORIES .....	6
1.6	EQUIPMENT MODIFICATIONS .....	6
<b>2.</b>	<b>SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
2.1	EUT CONFIGURATION.....	7
2.2	EUT EXERCISE .....	7
2.3	TEST PROCEDURE .....	7
2.4	LIMITATION .....	8
2.5	CONFIGURATION OF TESTED SYSTEM .....	10
<b>3.</b>	<b>SUMMARY OF TEST RESULTS .....</b>	<b>11</b>
<b>4.</b>	<b>CONDUCTED EMISSIONS TEST .....</b>	<b>12</b>
4.1	MEASUREMENT PROCEDURE:.....	12
4.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	12
4.3	MEASUREMENT EQUIPMENT USED: .....	12
4.4	MEASUREMENT RESULT: .....	12
<b>5.</b>	<b>RADIATED EMISSION TEST (TX,RX) .....</b>	<b>15</b>
5.1	MEASUREMENT PROCEDURE.....	15
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	15
5.3	MEASUREMENT EQUIPMENT USED: .....	16
5.4	FIELD STRENGTH CALCULATION.....	16
5.5	MEASUREMENT RESULT .....	17
<b>6.</b>	<b>20 DB BAND WIDTH MEASUREMENT.....</b>	<b>21</b>
6.1	MEASUREMENT PROCEDURE.....	31
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	31
6.3	MEASUREMENT EQUIPMENT USED: .....	31
6.4	MEASUREMENT RESULTS:.....	31
<b>7.</b>	<b>99% BAND WIDTH MEASUREMENT .....</b>	<b>34</b>
7.1	MEASUREMENT PROCEDURE.....	34
7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	34
7.3	MEASUREMENT EQUIPMENT USED: .....	34
7.4	MEASUREMENT RESULTS:.....	34

## 1. GENERAL INFORMATION

### 1.1. Product Description

Product Name:	Fitness Device
Brand Name:	Magellan, Mio, Navman, Mitac
Model Name:	Switch Up, Switch, N387
Model Difference:	Please see below table
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	2401~2478MHz
Channel number:	78 channels
Rated Power	Less than 10mW
Modulation Type:	GFSK
Power Supply	3.7Vdc from Li-ion battery or 5Vdc from AC/DC adapter, model: MII050100B
Antenna Designation:	PIFA Antenna
USB data cable	One provide, shielded, 1m

Description for different mode:

	Switch Up, N387	Switch
ANT	V	V
GPS	V	V
Buzzer	V	V
Barometer	V	X
Vibrate	V	X

**1.2. Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for **FCC ID: P4Q-N387** filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules and **IC: 2420C-N387** filing to comply with Industry Canada RSS-210 issue 8:2010 Annex 2.9.

**1.3. Test Methodology**

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003) and RSS-Gen: 2010. Radiated testing was performed at an antenna to EUT distance 3 meters.

**1.4. Test Facility**

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of **International Standards Laboratory** <Lung-Tan LAB> No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd., Lung-Tan Hsiang, Tao Yuan County 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number is: TW1036, Canada Registration Number: 4067B-3.

**1.5. Special Accessories**

Not available for this EUT intended for grant.

**1.6. Equipment Modifications**

Not available for this EUT intended for grant.

## **2. SYSTEM TEST CONFIGURATION**

### **2.1. EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### **2.2. EUT Exercise**

The Transmitter was operated in the engineering operating mode. the Tx frequency was fixed at 2401, 2439 and 2478MHz which were for the purpose of the measurements.

### **2.3. Test Procedure**

#### **2.3.1 Conducted Emissions**

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003 and RSS-Gen: 2010. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

#### **2.3.2 Radiated Emissions**

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4-2003 and RSS-Gen:2010.

## 2.4. Limitation

### (1) Conducted Emission

According to section 15.207(a) and RSS-Gen §7.2.2 Conducted Emission Limits is as following.

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 – 0.5	66 - 56	56 - 46
0.5 – 5	56	46
5 - 30	60	50

### (2) Radiated Emission 15.249(a) and RSS-210 issue 8,§A2.9(a)

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following.

Frequency (MHz)	Field strength of Fundamental	Field strength of Harmonics	Distance (m)
902 - 928	50 mV/m (94dBuV/m)	500 uV/m (54dBuV/m)	3
2400 – 2483.5	50 mV/m (94dBuV/m)	500 uV/m (54dBuV/m)	3
5725 – 5875	50 mV/m (94dBuV/m)	500 uV/m (54dBuV/m)	3



**(3) Radiated Emission 15.249 (d) and RSS-210 issue 8, §A2.9(b)**

Emission Radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209 and RSS-210 issue 8, §A2.9(a) as below, whichever is the lesser attenuation.

Frequency (MHz)	Field strength $\mu\text{V/m}$	Distance (m)	Field strength at 3m $\text{dB}\mu\text{V/m}$
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

**(4) Radiated Emission 15.249(e) and RSS-210 issue 8**

For frequencies above 1000MHz, the above field strength limits are based on average limits. The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

- Remark:
1. Emission level in  $\text{dB}\mu\text{V/m} = 20 \log (\mu\text{V/m})$
  2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
  3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205
  4. Emission spurious frequency which appearing within the Restricted Bands specified in provision of § 15.205, then the general radiated emission limits in § 15.209 apply.

## 2.5. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

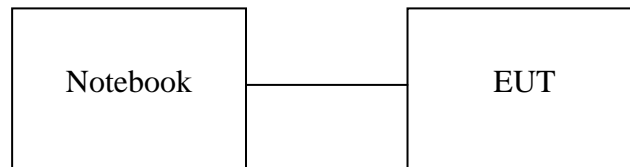


Table 2-2 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	Notebook	IBM	X40	N/A	Shield	Non-shield

**Note:** All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

**Grounding:** Grounding was in accordance with the manufacturer's requirements and conditions for the intended use.

### 3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207/ RSS-Gen §7.2.2	Conducted Emission	Compliant
§15.249(a)(d)(e) RSS-210 issue 8, §A2.9(a)(b)	Field Strength Measurement (TX and RX)	Compliant
§15.215(c)	20dB band width Measurement	Compliant
RSS-Gen §4.6.1	99% Power Bandwidth	Compliant

#### Description of test modes

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receive mode is programmed.

Channel low (2401MHz) 、 mid (2439MHz) and high (2478MHz) with highest data rate are chosen for full testing.


The field strength of spurious radiation emission was measured as EUT stand-up position (E1 mode) and lie down position (E1, E2 mode) The worst-case of H position were reported.

## 4. CONDUCTED EMISSIONS TEST

### 4.1 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

### 4.2 Test SET-UP (Block Diagram of Configuration)

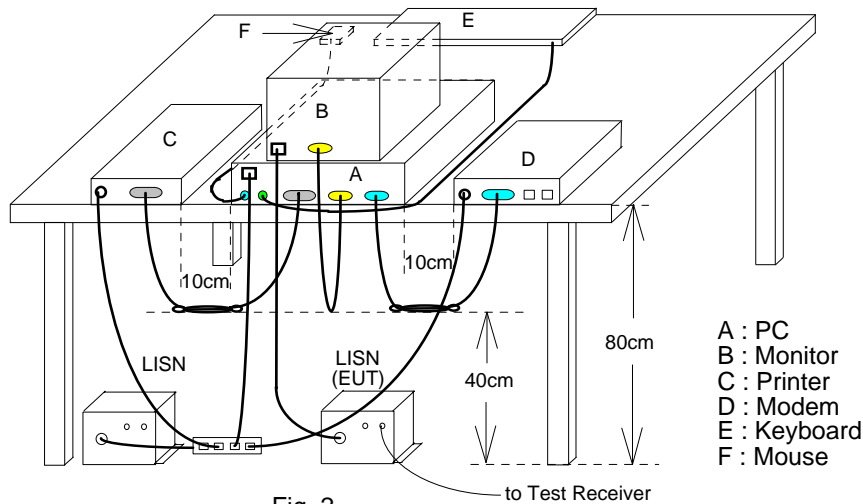


### 4.3 Measurement Equipment Used:

AC Power Line Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Conduction 03 -1 Cable	WOKEN	CFD 300-NL	Conduction 0-1	06/27/2011	06/27/2012
EMI Receiver 12	ROHDE & SCHWARZ	ESCI	100804	06/25/2011	06/25/2012
LISN 07	FCC Inc.	FCC-LISN-50-100-4-02	07040	06/02/2011	06/02/2012
LISN 08	FCC	FCC-LISN50-25-2-01	07039	06/25/2011	06/25/2012

### 4.4 Measurement Result:

Note: Refer to next page for measurement data and plots.



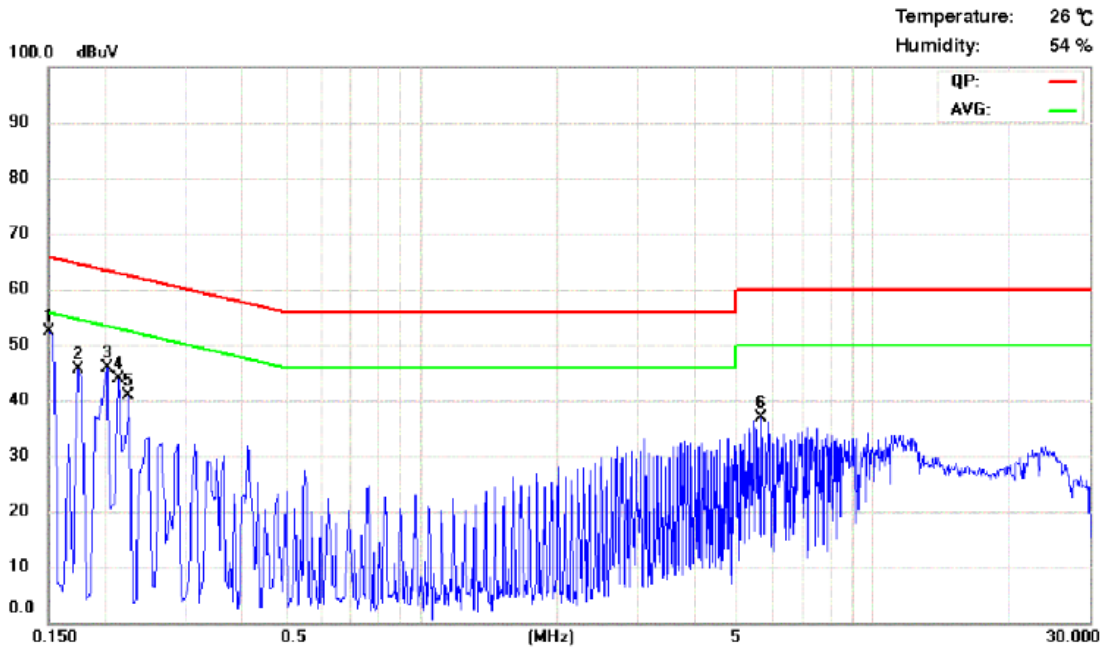

Site: Conduction 02  
Phase: **N**  
Limit: CISPR22 Class B Conduction  
Power: AC 120V/60Hz  
Company: ULT  
Witness:  
EUT Model: Ant  
Execute Program:  
Note: 11LR054

No.	Frequency MHz	LISN Loss dB	Cable Loss dB	QP Correct. dBuV	QP Limit dBuV	QP Margin dB	AVG Correct. dBuV	AVG Limit dBuV	AVG Margin dB	Note
1	0.1501	0.13	0.01	44.98	65.99	-21.0	20.26	55.99	-35.7	
2	0.1740	0.13	0.01	37.82	64.77	-26.9	10.29	54.77	-44.4	
3	0.2020	0.13	0.01	40.45	63.53	-23.0	28.38	53.53	-25.1	
4	0.2140	0.13	0.01	42.68	63.05	-20.3	31.80	53.05	-21.2	
5	0.2260	0.13	0.02	31.39	62.60	-31.2	5.03	52.60	-47.5	
6	5.6300	0.25	0.14	35.65	60.00	-24.3	27.24	50.00	-22.7	


## 5. RADIATED EMISSION TEST (TX,RX)

### 5.1 Measurement Procedure


1. The EUT was placed on a turntable that is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

### 5.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

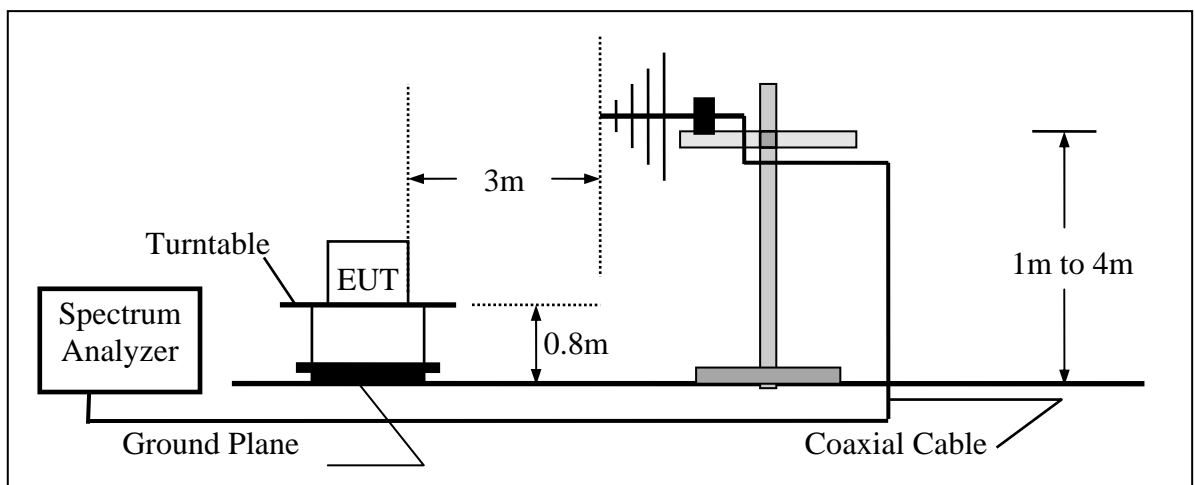

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

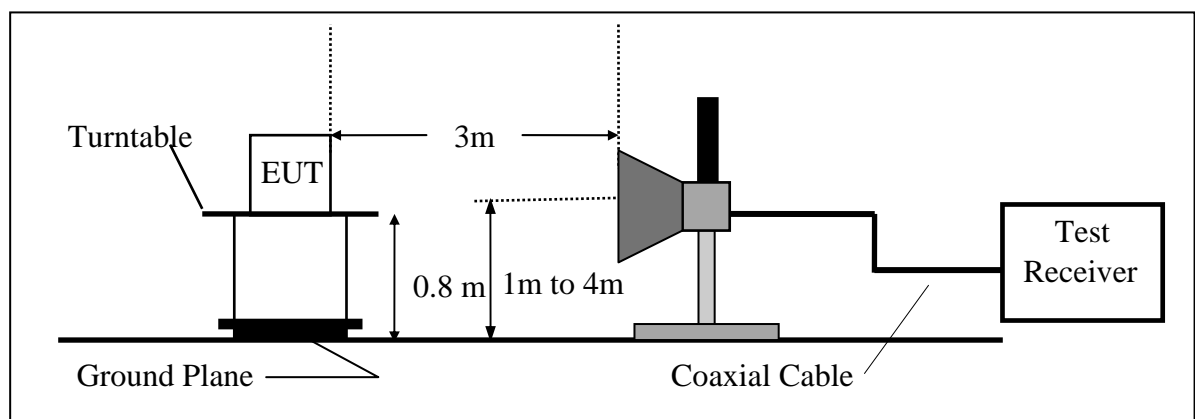

### 5.3 Measurement Equipment Used:

Chamber 14(966)					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer 21	Agilent	N9010A	MY49060537	07/18/2011	07/17/2012
Spectrum Analyzer 19	R&S	FSP40	100116	10/18/2010	10/17/2011
Spectrum Analyzer 20	Agilent	E4443A	MY48250315	05/12/2011	05/11/2012
Short Dipole antenna	Schwarzbeck Mess-Elektronik	VHAA9110	NA	07/17/2011	07/16/2012
Dipole antenna	SCHWARZBECK	VHAP&HUA P	NA	07/17/2011	07/16/2012
Dipole antenna	SCHWARZBECK	UHA9105	NA	07/17/2011	07/16/2012
Loop Antenna	A.H.SYSTEM	SAS-564	294	02/28/2011	02/27/2012
Bilog Antenna	Schaffner	CBL 6111D	22612	03/30/2011	03/29/2012
Horn antenna(06)	EMCO	3117	0006665	09/28/2010	09/27/2011
Horn antenna(05)	Com-power	AH-640	100A	01/11/2011	01/10/2013
Horn antenna(04)	Com-power	AH-826	081001	05/04/2011	05/03/2013
Horn antenna(02)	EMCO	AH118	0006665	02/15/2011	02/14/2012
PREAMPLIFIER	HP	8447F	NA	05/04/2011	05/03/2012
PREAMPLIFIER 15	Agilent	8449B	3008A2471	02/16/2011	02/15/2012
Cable	Huber Suhner	Sucoflex 106	NA	02/09/2011	02/08/2012
Cable	Pacific	8D-FB	NA	10/18/2010	10/17/2011
Signal Generator	R&S	SMU200A	NA	10/12/2010	09/12/2011

### 5.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	



## 5.5 Measurement Result

### Radiated Spurious Emission Measurement Result (below 1GHz) (worst case: Y mode)

Operation Mode	TX CH Low	Test Date	2011/08/18
Fundamental Frequency	2401 MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	89.17	49.61	-18.15	31.46	43.50	-12.04	Peak	VERTICAL
2	331.67	43.97	-12.22	31.75	46.00	-14.25	Peak	VERTICAL
3	496.57	35.74	-10.69	25.05	46.00	-20.95	Peak	VERTICAL
4	663.41	33.38	-8.95	24.43	46.00	-21.57	Peak	VERTICAL
5	832.19	37.38	-7.64	29.74	46.00	-16.26	Peak	VERTICAL
6	923.37	32.37	-6.58	25.79	46.00	-20.21	Peak	VERTICAL
1	89.17	50.87	-18.15	32.72	43.50	-10.78	Peak	HORIZONTAL
2	203.63	49.39	-16.51	32.88	43.50	-10.62	Peak	HORIZONTAL
3	443.22	51.61	-11.04	40.57	46.00	-5.43	Peak	HORIZONTAL
4	666.32	36.49	-8.96	27.53	46.00	-18.47	Peak	HORIZONTAL
5	831.22	36.50	-7.67	28.83	46.00	-17.17	Peak	HORIZONTAL
6	940.83	34.76	-6.29	28.47	46.00	-17.53	Peak	HORIZONTAL

#### Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 “F” denotes fundamental frequency; “H” denotes harmonics frequency. “S” denotes spurious frequency.
- 4 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Radiated Spurious Emission Measurement Result (below 1GHz) (worst case: Y mode)**

Operation Mode	TX CH Mid	Test Date	2011/08/18
Fundamental Frequency	2439 MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	87.23	52.06	-18.52	33.54	40.00	-6.46	Peak	VERTICAL
2	198.78	48.62	-16.75	31.87	43.50	-11.63	Peak	VERTICAL
3	324.88	47.04	-12.38	34.66	46.00	-11.34	Peak	VERTICAL
4	498.51	42.83	-10.68	32.15	46.00	-13.85	Peak	VERTICAL
5	598.42	38.02	-9.58	28.44	46.00	-17.56	Peak	VERTICAL
6	831.22	43.90	-7.67	36.23	46.00	-9.77	Peak	VERTICAL
1	87.23	50.22	-18.52	31.70	40.00	-8.30	Peak	HORIZONTAL
2	349.13	43.14	-11.78	31.36	46.00	-14.64	Peak	HORIZONTAL
3	455.83	51.88	-10.99	40.89	46.00	-5.11	Peak	HORIZONTAL
4	593.57	33.82	-9.60	24.22	46.00	-21.78	Peak	HORIZONTAL
5	846.74	37.30	-7.41	29.89	46.00	-16.11	Peak	HORIZONTAL
6	940.83	33.20	-6.29	26.91	46.00	-19.09	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 “F” denotes fundamental frequency; “H” denotes harmonics frequency. “S” denotes spurious frequency.
- 4 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Radiated Spurious Emission Measurement Result (below 1GHz) (worst case: Y mode)**

Operation Mode	TX CH High	Test Date	2011/08/18
Fundamental Frequency	2478 MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	86.26	49.35	-18.70	30.65	40.00	-9.35	Peak	VERTICAL
2	324.88	44.26	-12.38	31.88	46.00	-14.12	Peak	VERTICAL
3	405.39	36.80	-11.08	25.72	46.00	-20.28	Peak	VERTICAL
4	665.35	31.70	-8.96	22.74	46.00	-23.26	Peak	VERTICAL
5	831.22	36.98	-7.67	29.31	46.00	-16.69	Peak	VERTICAL
6	896.21	36.05	-7.00	29.05	46.00	-16.95	Peak	VERTICAL
1	87.23	52.89	-18.52	34.37	40.00	-5.63	Peak	HORIZONTAL
2	198.78	48.84	-16.75	32.09	43.50	-11.41	Peak	HORIZONTAL
3	323.91	44.47	-12.41	32.06	46.00	-13.94	Peak	HORIZONTAL
4	443.22	52.04	-11.04	41.00	46.00	-5.00	Peak	HORIZONTAL
5	824.43	37.87	-7.79	30.08	46.00	-15.92	Peak	HORIZONTAL
6	947.62	32.52	-6.18	26.34	46.00	-19.66	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 “F” denotes fundamental frequency; “H” denotes harmonics frequency. “S” denotes spurious frequency.
- 4 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

### Fundamental Emission Measurement Result

Operation Mode : TX X mode Test Date : 2011/08/18  
 Fundamental Frequency : 2401 MHz, 2439 MHz, 2478MHz Test By : Dino  
 Temp : 25 °C Hum. : 60%

#### CH Low:

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2401.00	77.63	-1.05	76.58	114.00	-37.42	Peak	VERTICAL
1	2401.00	80.83	-1.05	79.78	114.00	-34.22	Peak	HORIZONTAL

#### CH Mid:

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2439.00	78.67	-1.00	77.67	114.00	-36.33	Peak	VERTICAL
1	2439.01	80.30	-1.00	79.30	114.00	-34.70	Peak	HORIZONTAL

#### CH High:

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2478.00	79.98	-0.97	79.01	114.00	-34.99	Peak	VERTICAL
1	2478.00	81.18	-0.97	80.21	114.00	-33.79	Peak	HORIZONTAL

#### Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 "F" denotes fundamental frequency; "H" denotes harmonics frequency. "S" denotes spurious frequency.
- 4 Measurement of data within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 AV level = Peak reading – Duty Cycle Correction factor..

### Fundamental Emission Measurement Result

Operation Mode : TX Y mode Test Date : 2011/08/18  
 Fundamental Frequency : 2401 MHz, 2439 MHz, 2478MHz Test By : Dino  
 Temp : 25 °C Hum. : 60%

#### CH Low:

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2401.00	81.56	-1.05	80.51	114.00	-33.49	Peak	VERTICAL
1	2401.00	78.13	-1.05	77.08	114.00	-36.92	Peak	HORIZONTAL

#### CH Mid:

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2439.00	84.25	-1.00	83.25	114.00	-30.75	Peak	VERTICAL
1	2439.01	79.72	-1.00	78.72	114.00	-35.28	Peak	HORIZONTAL

#### CH High:

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2478.00	84.90	-0.97	83.93	114.00	-30.07	Peak	VERTICAL
1	2478.00	80.81	-0.97	79.84	114.00	-34.16	Peak	HORIZONTAL

#### Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 “F” denotes fundamental frequency; “H” denotes harmonics frequency. “S” denotes spurious frequency.
- 4 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 AV level = Peak reading – Duty Cycle Correction factor..



**Radiated Spurious Emission Measurement Result (above 1GHz) (worst case: Y mode)**

Operation Mode : TX CH Mid Test Date : 2011/08/18  
 Fundamental Frequency : 2439 MHz Test By : Dino  
 Temp : 25 °C Hum. : 60%

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	4878.00	40.93	10.32	51.25	54.00	-2.75	Average	VERTICAL
2	4878.00	45.85	10.32	56.17	74.00	-17.83	Peak	VERTICAL
3	7317.00	---						VERTICAL
4	9756.00	---						VERTICAL
5	12195.00	---						VERTICAL
1	4878.00	38.84	10.32	49.16	54.00	-4.84	Average	HORIZONTAL
2	4878.00	43.76	10.32	54.08	74.00	-19.92	Peak	HORIZONTAL
3	7317.00	---						HORIZONTAL
4	9756.00	---						HORIZONTAL
5	12195.00	---						HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 “F” denotes fundamental frequency; “H” denotes harmonics frequency. “S” denotes spurious frequency.
- 4 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 AV level = Peak reading – Duty Cycle Correction factor..

**Radiated Spurious Emission Measurement Result (above 1GHz) (worst case: Y mode)**

Operation Mode	: TX CH High	Test Date	: 2011/08/18
Fundamental Frequency	: 2478 MHz	Test By	: Dino
Temp	: 25 °C	Hum.	: 60%

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2483.50	45.19	-0.96	44.23	74.00	-29.77	Peak	VERTICAL
2	4956.00	38.21	10.65	48.86	54.00	-5.14	Average	VERTICAL
3	4956.00	43.73	10.65	54.38	74.00	-19.62	Peak	VERTICAL
4	7434.00	---						VERTICAL
5	9912.00	---						VERTICAL
6	12390.00	---						VERTICAL
1	2483.50	45.14	-0.96	44.18	74.00	-29.82	Peak	HORIZONTAL
2	4956.00	38.27	10.65	48.92	54.00	-5.08	Average	HORIZONTAL
3	4956.00	43.57	10.65	54.22	74.00	-19.78	Peak	HORIZONTAL
4	7434.00	---						HORIZONTAL
5	9912.00	---						HORIZONTAL
6	12390.00	---						HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 “F” denotes fundamental frequency; “H” denotes harmonics frequency. “S” denotes spurious frequency.
- 4 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 AV level = Peak reading – Duty Cycle Correction factor..



**Radiated Spurious Emission Measurement Result (below 1GHz) (worst case: Y mode)**

Operation Mode	RX CH Low	Test Date	2011/08/18
Fundamental Frequency	2401 MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	198.78	48.92	-16.75	32.17	43.50	-11.33	Peak	VERTICAL
2	328.76	45.15	-12.29	32.86	46.00	-13.14	Peak	VERTICAL
3	467.47	42.87	-10.91	31.96	46.00	-14.04	Peak	VERTICAL
4	664.38	34.07	-8.95	25.12	46.00	-20.88	Peak	VERTICAL
5	831.22	42.95	-7.67	35.28	46.00	-10.72	Peak	VERTICAL
6	945.68	31.54	-6.21	25.33	46.00	-20.67	Peak	VERTICAL
1	89.17	52.12	-18.15	33.97	43.50	-9.53	Peak	HORIZONTAL
2	198.78	55.16	-16.75	38.41	43.50	-5.09	Peak	HORIZONTAL
3	338.46	41.46	-12.05	29.41	46.00	-16.59	Peak	HORIZONTAL
4	443.22	47.26	-11.04	36.22	46.00	-9.78	Peak	HORIZONTAL
5	665.35	35.22	-8.96	26.26	46.00	-19.74	Peak	HORIZONTAL
6	828.31	32.70	-7.72	24.98	46.00	-21.02	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 “F” denotes fundamental frequency; “H” denotes harmonics frequency. “S” denotes spurious frequency.
- 4 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Radiated Spurious Emission Measurement Result (below 1GHz) (worst case: Y mode)**

Operation Mode	RX CH Mid	Test Date	2011/08/18
Fundamental Frequency	2439 MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	89.17	48.60	-18.15	30.45	43.50	-13.05	Peak	VERTICAL
2	191.99	41.93	-17.20	24.73	43.50	-18.77	Peak	VERTICAL
3	323.91	43.18	-12.41	30.77	46.00	-15.23	Peak	VERTICAL
4	664.38	31.74	-8.95	22.79	46.00	-23.21	Peak	VERTICAL
5	845.77	39.44	-7.42	32.02	46.00	-13.98	Peak	VERTICAL
6	940.83	31.23	-6.29	24.94	46.00	-21.06	Peak	VERTICAL
1	86.26	50.16	-18.70	31.46	40.00	-8.54	Peak	HORIZONTAL
2	191.99	51.07	-17.20	33.87	43.50	-9.63	Peak	HORIZONTAL
3	431.58	50.31	-11.05	39.26	46.00	-6.74	Peak	HORIZONTAL
4	663.41	34.08	-8.95	25.13	46.00	-20.87	Peak	HORIZONTAL
5	846.74	37.34	-7.41	29.93	46.00	-16.07	Peak	HORIZONTAL
6	940.83	32.50	-6.29	26.21	46.00	-19.79	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 “F” denotes fundamental frequency; “H” denotes harmonics frequency. “S” denotes spurious frequency.
- 4 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Radiated Spurious Emission Measurement Result (below 1GHz) (worst case: Y mode)**

Operation Mode	RX CH High	Test Date	2011/08/18
Fundamental Frequency	2478 MHz	Test By	Dino
Temperature	25 °C	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	89.17	50.64	-18.15	32.49	43.50	-11.01	Peak	VERTICAL
2	199.75	49.23	-16.69	32.54	43.50	-10.96	Peak	VERTICAL
3	347.19	47.78	-11.83	35.95	46.00	-10.05	Peak	VERTICAL
4	491.72	39.22	-10.74	28.48	46.00	-17.52	Peak	VERTICAL
5	664.38	40.44	-8.95	31.49	46.00	-14.51	Peak	VERTICAL
6	831.22	41.45	-7.67	33.78	46.00	-12.22	Peak	VERTICAL
1	87.23	53.86	-18.52	35.34	40.00	-4.66	Peak	HORIZONTAL
2	191.99	50.70	-17.20	33.50	43.50	-10.00	Peak	HORIZONTAL
3	347.19	43.14	-11.83	31.31	46.00	-14.69	Peak	HORIZONTAL
4	444.19	47.96	-11.04	36.92	46.00	-9.08	Peak	HORIZONTAL
5	663.41	35.23	-8.95	26.28	46.00	-19.72	Peak	HORIZONTAL
6	845.77	33.40	-7.42	25.98	46.00	-20.02	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 “F” denotes fundamental frequency; “H” denotes harmonics frequency. “S” denotes spurious frequency.
- 4 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

**Radiated Spurious Emission Measurement Result (above 1GHz) (worst case: Y mode)**

Operation Mode : RX CH Low Test Date : 2011/08/18  
 Fundamental Frequency : 2401 MHz Test By : Dino  
 Temp : 25 °C Hum. : 60%

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2722.00	43.66	-0.16	43.50	74.00	-30.50	Peak	VERTICAL
2	4802.00	---						VERTICAL
3	7203.00	---						VERTICAL
4	9604.00	---						VERTICAL
5	12005.00	---						VERTICAL
1	2512.00	44.28	-0.91	43.37	74.00	-30.63	Peak	HORIZONTAL
2	4802.00	---						HORIZONTAL
3	7203.00	---						HORIZONTAL
4	9604.00	---						HORIZONTAL
5	12005.00	---						HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 “F” denotes fundamental frequency; “H” denotes harmonics frequency. “S” denotes spurious frequency.
- 4 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 AV level = Peak reading – Duty Cycle Correction factor..

**Radiated Spurious Emission Measurement Result (above 1GHz) (worst case: Y mode)**

Operation Mode : RX CH Mid Test Date : 2011/08/18  
 Fundamental Frequency : 2439 MHz Test By : Dino  
 Temp : 25 °C Hum. : 60%

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2645.00	43.84	-0.43	43.41	74.00	-30.59	Peak	VERTICAL
2	4878.00	---						VERTICAL
3	7317.00	---						VERTICAL
4	9756.00	---						VERTICAL
5	12195.00	---						VERTICAL
1	2967.00	42.92	0.72	43.64	74.00	-30.36	Peak	HORIZONTAL
2	4878.00	---						HORIZONTAL
3	7317.00	---						HORIZONTAL
4	9756.00	---						HORIZONTAL
5	12195.00	---						HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 “F” denotes fundamental frequency; “H” denotes harmonics frequency. “S” denotes spurious frequency.
- 4 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 AV level = Peak reading – Duty Cycle Correction factor..

**Radiated Spurious Emission Measurement Result (above 1GHz) (worst case: Y mode)**

Operation Mode	: RX CH High	Test Date	: 2011/08/18
Fundamental Frequency	: 2478 MHz	Test By	: Dino
Temp	: 25 °C	Hum.	: 60%

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	3191.00	43.64	2.04	45.68	74.00	-28.32	Peak	VERTICAL
2	4956.00	---						VERTICAL
3	7434.00	---						VERTICAL
4	9912.00	---						VERTICAL
5	12390.00	---						VERTICAL
1	2799.00	43.48	0.13	43.61	74.00	-30.39	Peak	HORIZONTAL
2	4956.00	---						HORIZONTAL
3	7434.00	---						HORIZONTAL
4	9912.00	---						HORIZONTAL
5	12390.00	---						HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 “F” denotes fundamental frequency; “H” denotes harmonics frequency. “S” denotes spurious frequency.
- 4 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 AV level = Peak reading – Duty Cycle Correction factor..

## **6. 20 DB BAND WIDTH MEASUREMENT**

### **6.1 Measurement Procedure**

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set ETU normal operating mode.
3. Set SPA Center Frequency = fundamental frequency, RBW = 100kHz, VBW = 300kHz, Span =500kHz.
4. Set SPA Max hold. Mark peak, -20dB.

### **6.2 Test SET-UP (Block Diagram of Configuration)**

Same as 4.2 Radiated Emission Measurement.

### **6.3 Measurement Equipment Used:**

Same as 4.2 Radiated Emission Measurement.

### **6.4 Measurement Results:**

2401 Channel = 275 kHz


2439 Channel = 233 kHz

2478 Channel = 289 kHz

Refer to attached data chart.


## 20dB Band Width test Plot

### CH Low

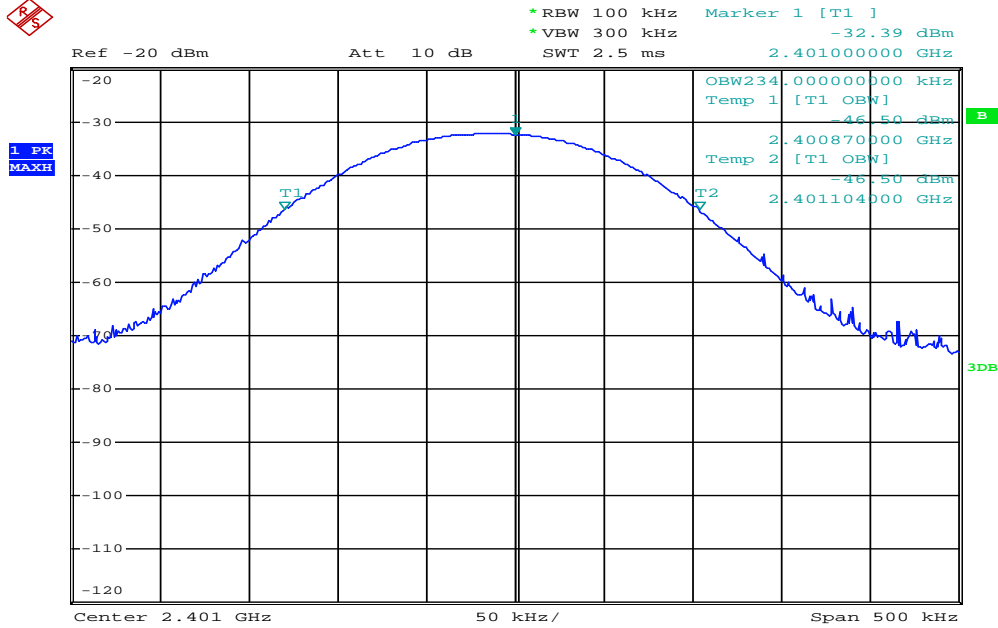

Date: 18.AUG.2011 17:44:58


## CH Mid

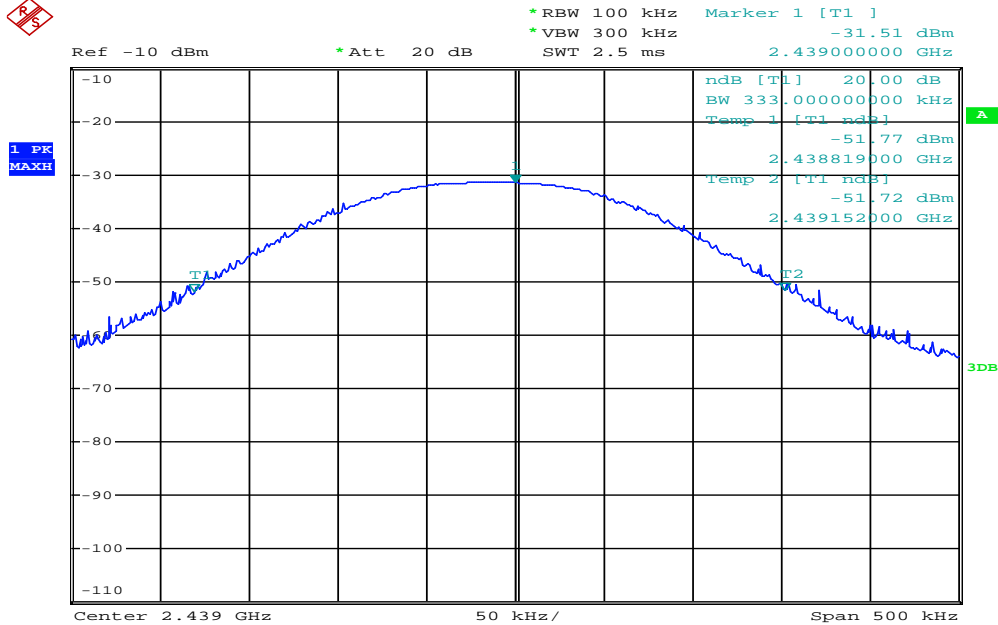

Date: 18.AUG.2011 17:46:17



CH High

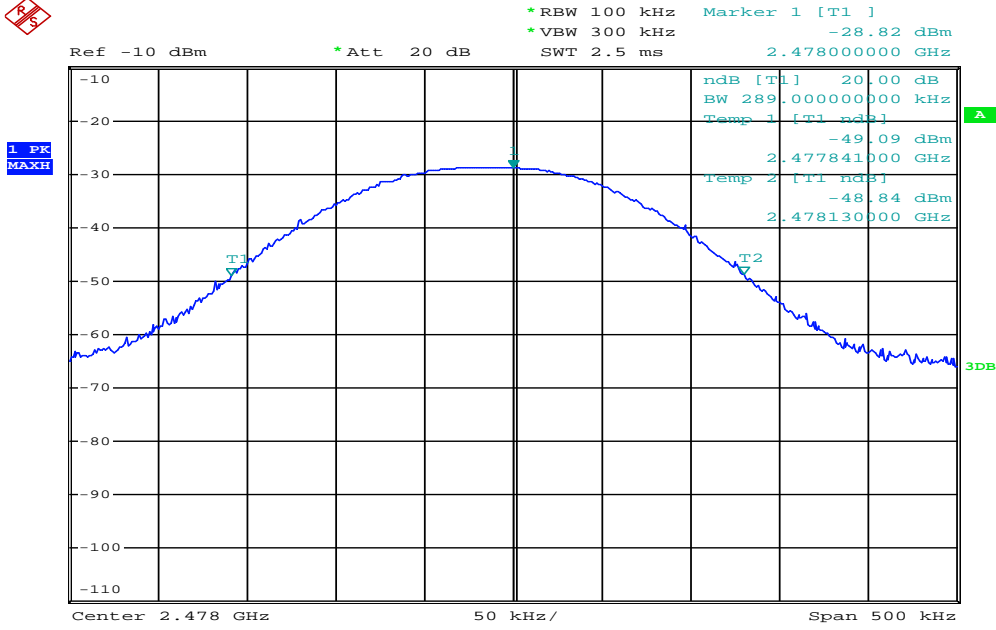

Date: 18.AUG.2011 17:46:53

## **7. 99% BAND WIDTH MEASUREMENT**

### **7.1 Measurement Procedure**

- 1 Place the EUT on the table and set it in transmitting mode.
- 2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3 Set the spectrum analyzer as RBW=1% of the approximate emission bandwidth, VBW = 3 times RBW, Span= approximately 20dB below the peak level. Sweep=auto
- 4 Turn on the 99% bandwidth function, max reading.
- 5 Repeat above procedures until all frequency measured were complete.

### **7.2 Test SET-UP (Block Diagram of Configuration)**

Same as 4.2 Radiated Emission Measurement.

### **7.3 Measurement Equipment Used:**

Same as 4.2 Radiated Emission Measurement.

### **7.4 Measurement Results:**


2401 Channel = 234 kHz

2439 Channel = 287 kHz

2478 Channel = 244 kHz


Refer to attached data chart.

### 99% Band Width test Plot CH Low

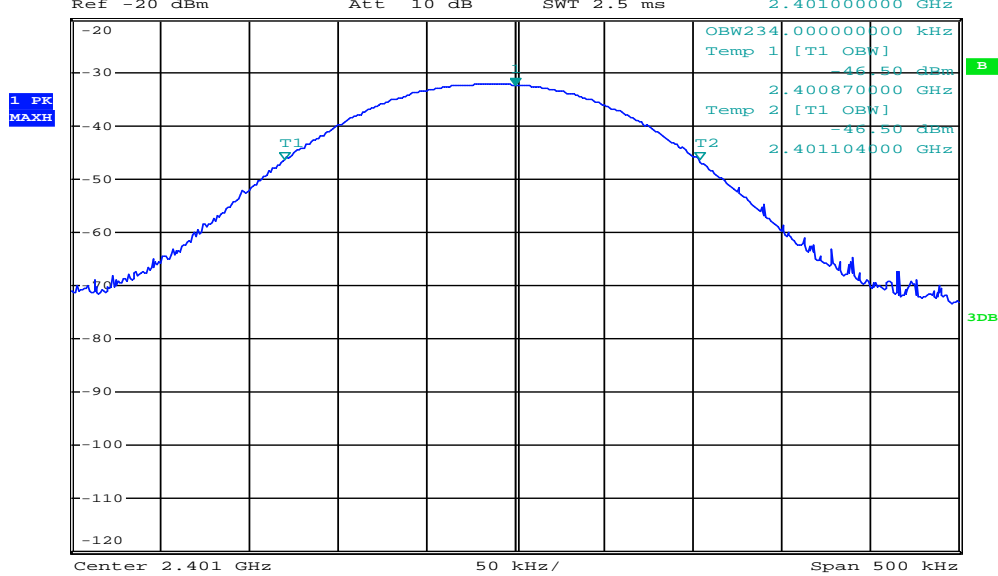


Date: 18.AUG.2011 17:44:58

### CH Mid

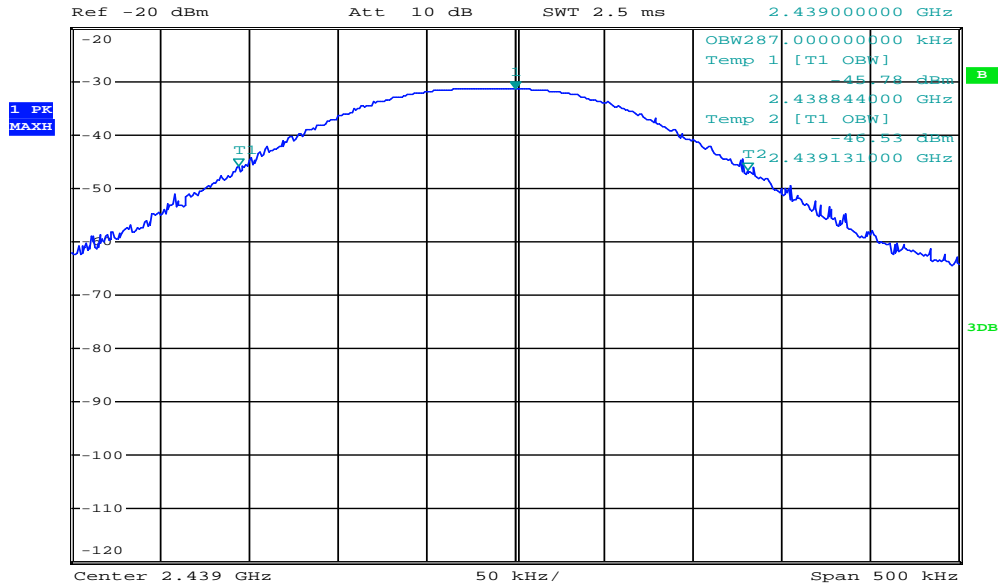

Date: 18.AUG.2011 17:45:47

CH High

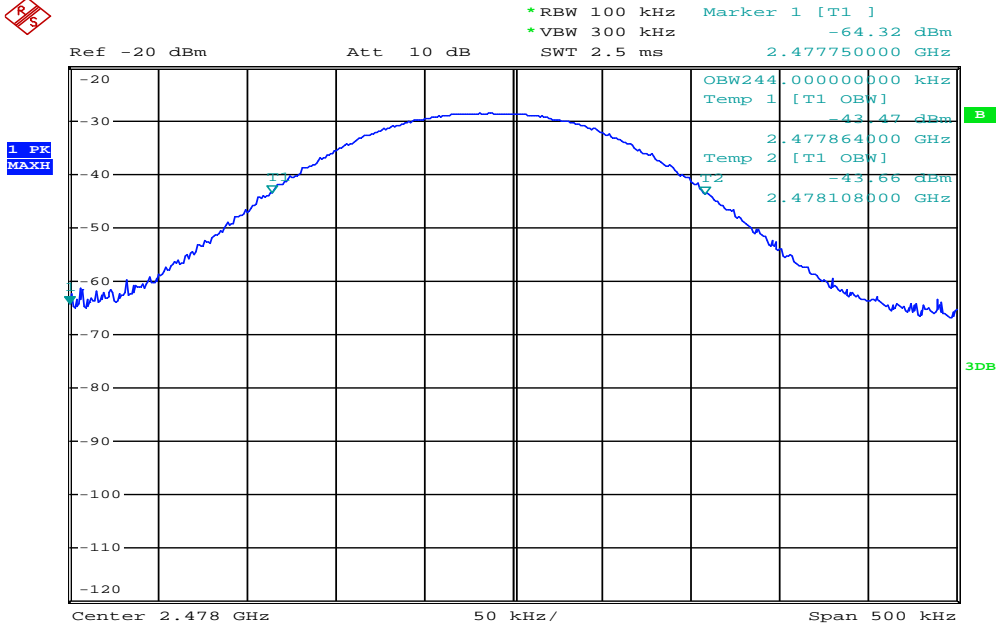

Date: 18.AUG.2011 17:47:22