

Date: 2019/12/20

WCDMA Band II_Body_Back_CH 9400_0mm_Down power

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.446$ S/m; $\epsilon_r = 39.198$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(8.23, 8.23, 8.23); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (81x61x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.59 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.131 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.66 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.598 W/kg

Maximum value of SAR (measured) = 1.88 W/kg

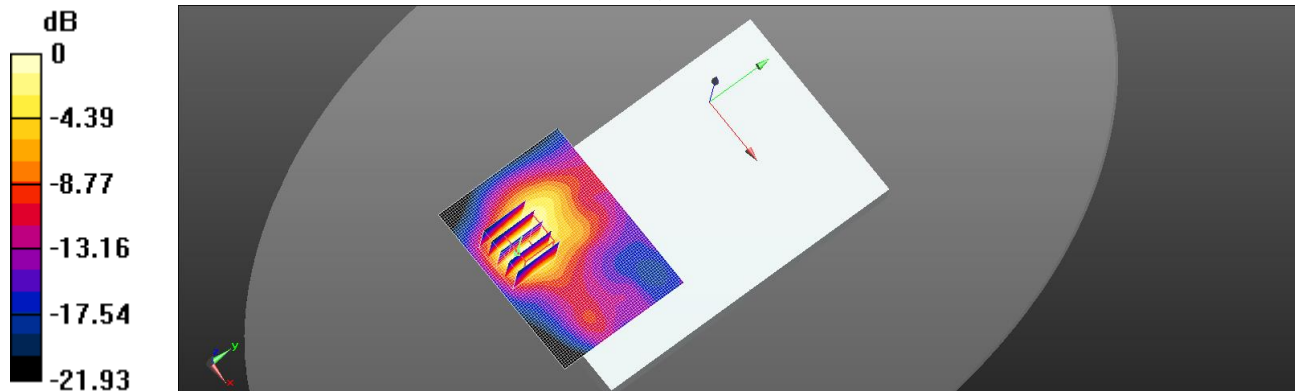

0 dB = 1.88 W/kg = 2.74 dBW/kg

Date: 2019/12/20

WCDMA Band II_Body_Back_CH 9400_0mm_Down power_Repeat

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.446$ S/m; $\epsilon_r = 39.198$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(8.23, 8.23, 8.23); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x61x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.30 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.680 V/m; Power Drift = 2.06 dB

Peak SAR (extrapolated) = 2.39 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.571 W/kg

Maximum value of SAR (measured) = 1.60 W/kg

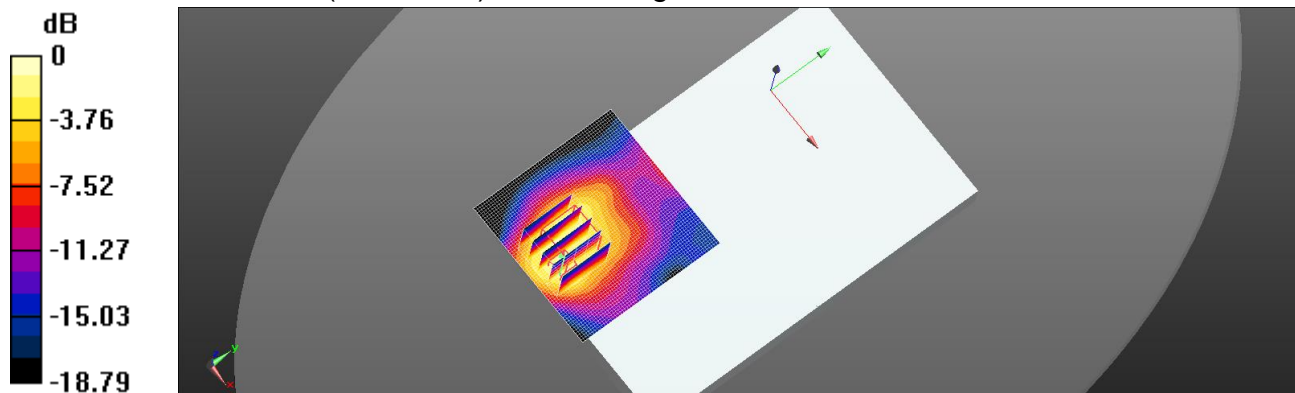

0 dB = 1.60 W/kg = 2.04 dBW/kg

Date: 2019/12/24

WCDMA Band IV_Body_Back_CH 1312_0mm_Down power

Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.306$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.1°C; Liquid temperature: 20.5°C

DASY5 Configuration:

- Probe: EX3DV4 – SN3770; ConvF(8.44, 8.44, 8.44); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (81x61x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.983 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.831 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.854 W/kg; SAR(10 g) = 0.490 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

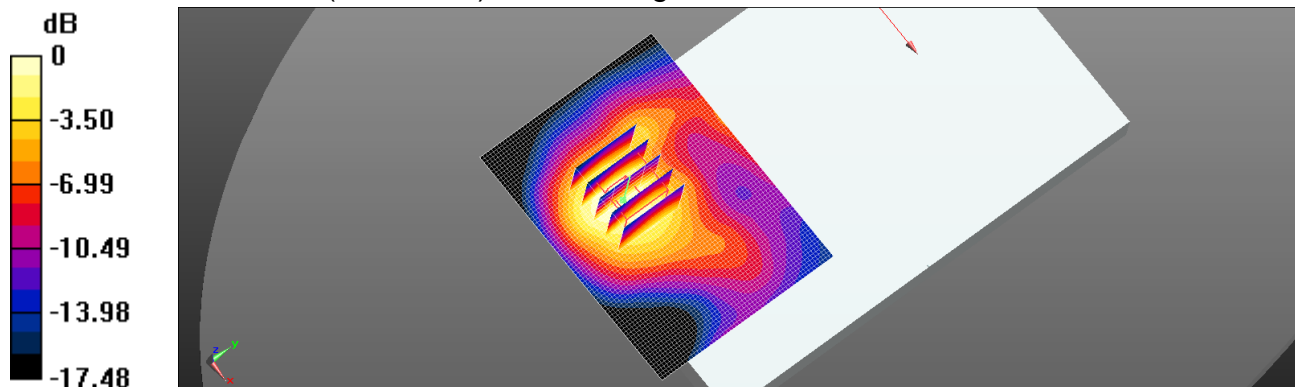

Date: 2019/12/25

WCDMA Band V_Body_Edge4_CH 4183_0mm

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 43.118$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(9.44, 9.44, 9.44); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI ; ;
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (41x61x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.28 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.39 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.720 W/kg; SAR(10 g) = 0.339 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

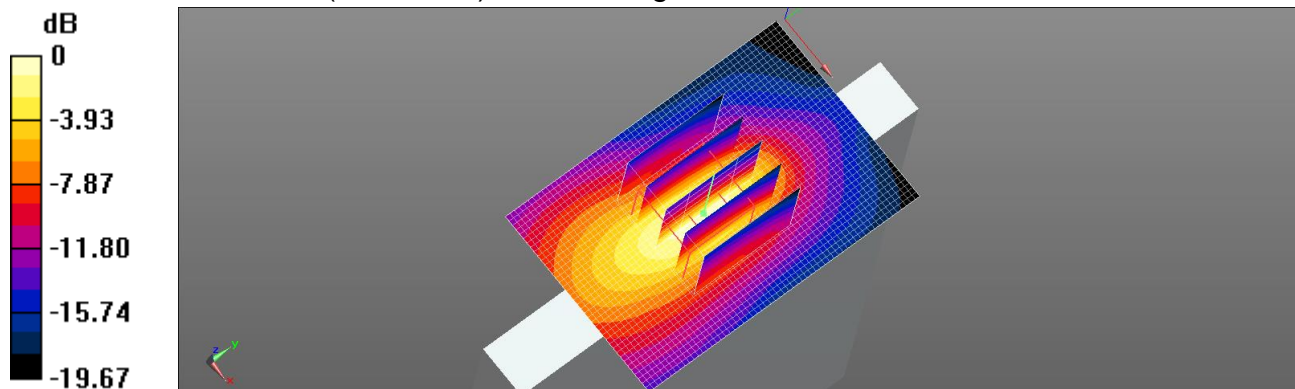

0 dB = 1.23 W/kg = 0.90 dBW/kg

Date: 2019/12/23

LTE Band 2 (20MHz)_Body_Back_CH 18900_QPSK_1-0_10mm_Full Power

Communication System: LTE; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.448$ S/m; $\epsilon_r = 38.882$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.9°C; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(8.23., 8.23, 8.23); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7373)

Area Scan (81x61x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.37 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.196 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.953 W/kg; SAR(10 g) = 0.554 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

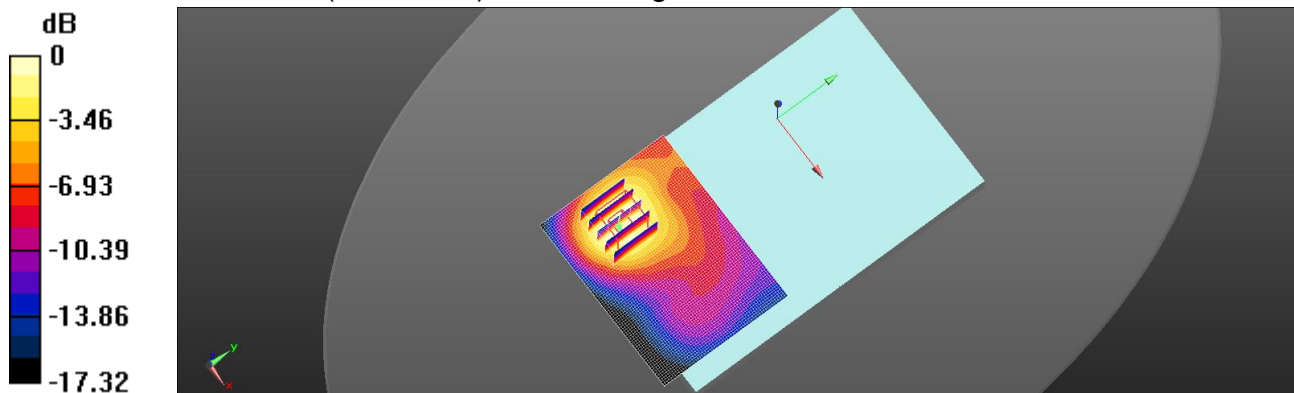

Date: 2019/12/24

LTE Band 4 (20MHz)_Body_Back_CH 20175_QPSK_1-0_0mm_Down Power

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.324$ S/m; $\epsilon_r = 39.402$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.1°C; Liquid temperature: 20.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(8.44, 8.44, 8.44); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (81x61x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.15 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.421 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.802 W/kg; SAR(10 g) = 0.458 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

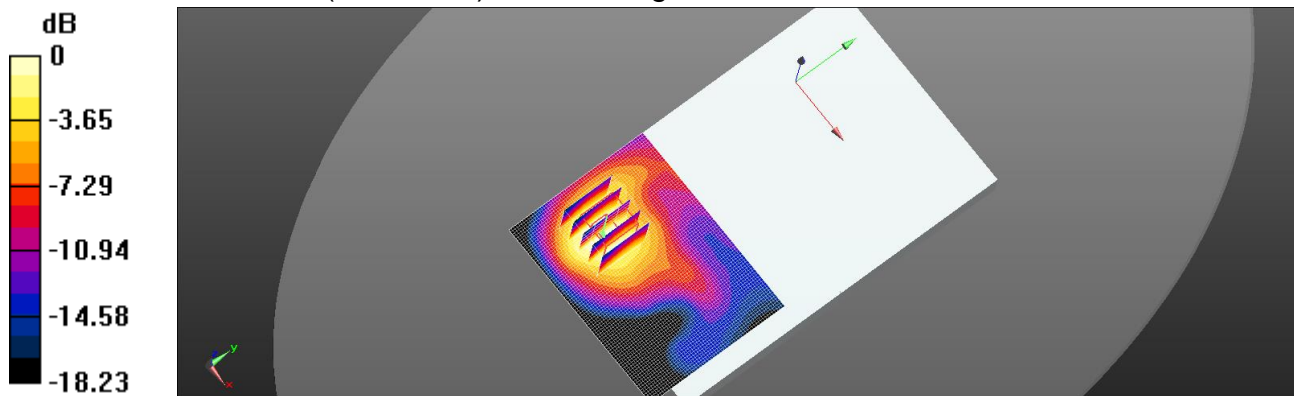

0 dB = 1.08 W/kg = 0.33 dBW/kg

Date: 2019/12/25

LTE Band 5 (10MHz)_Body_Edge4_CH 20525_QPSK_1-0_0mm

Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 43.11$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(9.44, 9.44, 9.44); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (41x61x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.77 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.69 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.77 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.473 W/kg

Maximum value of SAR (measured) = 1.86 W/kg

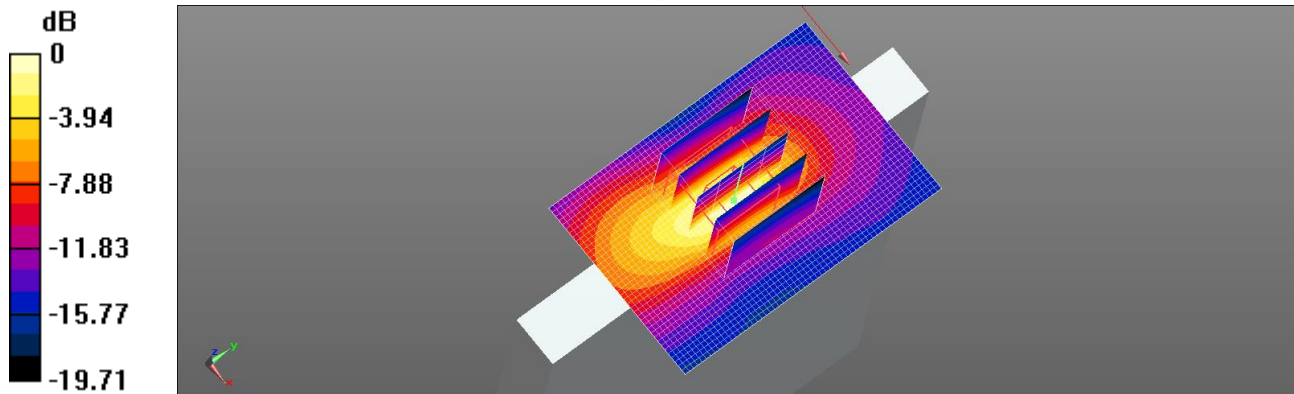

0 dB = 1.86 W/kg = 2.70 dBW/kg

Date: 2019/12/18

LTE Band 7 (20MHz)_Body_Edge4_CH 21350_QPSK_1-0_5mm_Full Power

Communication System: LTE; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 37.354$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(7.3, 7.3, 7.3); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x61x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 2.21 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.65 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.539 W/kg

Maximum value of SAR (measured) = 2.16 W/kg

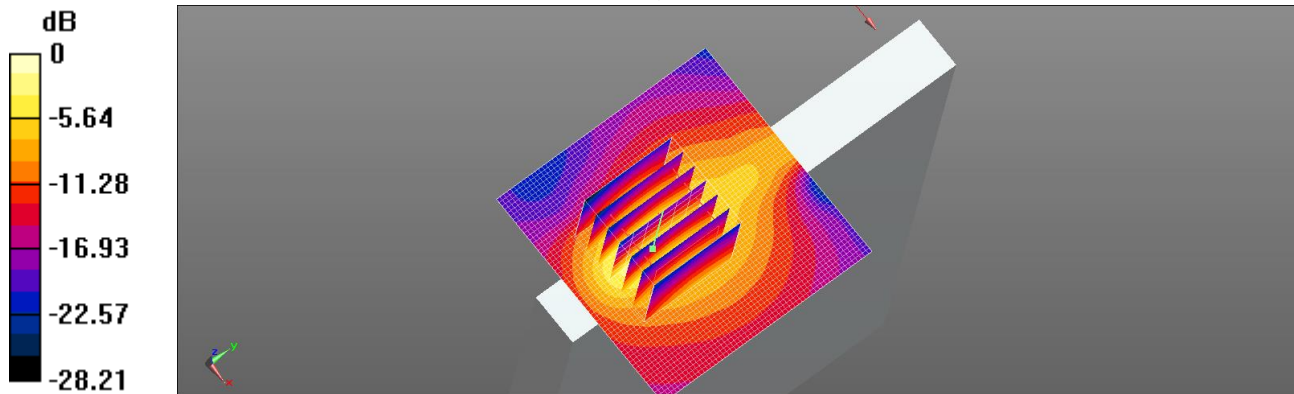

0 dB = 2.16 W/kg = 3.34 dBW/kg

Date: 2019/12/18

LTE Band 7 (20MHz)_Body_Edge4_CH 21350_QPSK_1-0_5mm_Full Power _Repeat

Communication System: LTE; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 37.354$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(7.3, 7.3, 7.3); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x61x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 1.62 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.609 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.61 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.457 W/kg

Maximum value of SAR (measured) = 1.83 W/kg

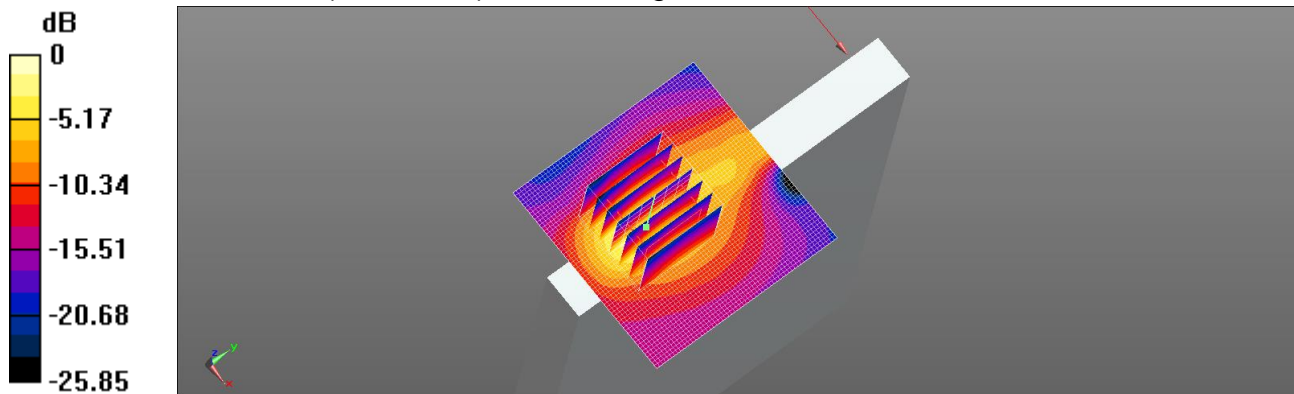

0 dB = 1.83 W/kg = 2.62 dBW/kg

Date: 2019/12/26

LTE Band 12 (10MHz)_Body_Edge4_CH 23095_QPSK_1-0_0mm

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.854$ S/m; $\epsilon_r = 42.499$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(9.68, 9.68, 9.68); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (41x51x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.823 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.87 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.216 W/kg

Maximum value of SAR (measured) = 0.808 W/kg

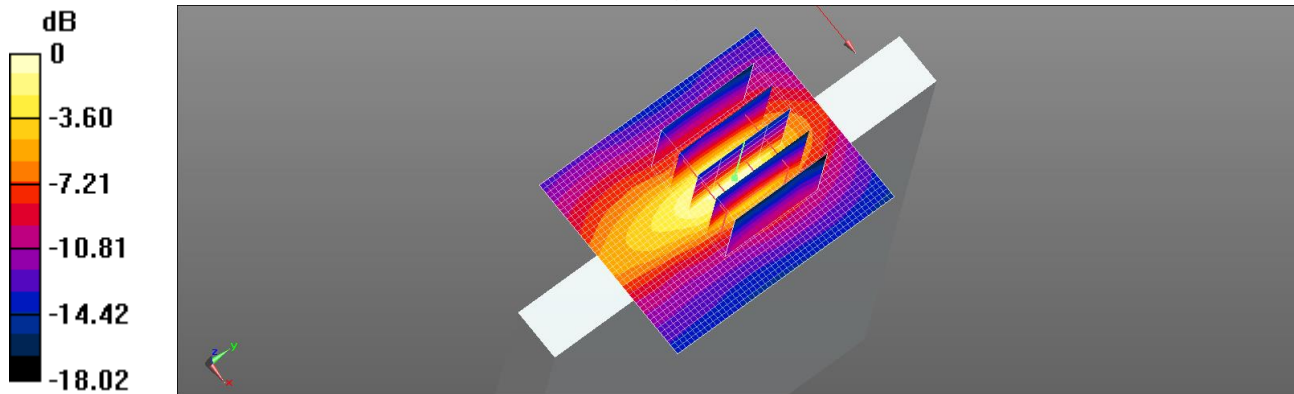

0 dB = 0.808 W/kg = -0.93 dBW/kg

Date: 2019/12/26

LTE Band 13 (10MHz)_Body_Edge4_CH 23230_QPSK_1-0_0mm

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.459$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(9.68, 9.68, 9.68); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (41x51x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.70 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.99 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.532 W/kg

Maximum value of SAR (measured) = 1.69 W/kg

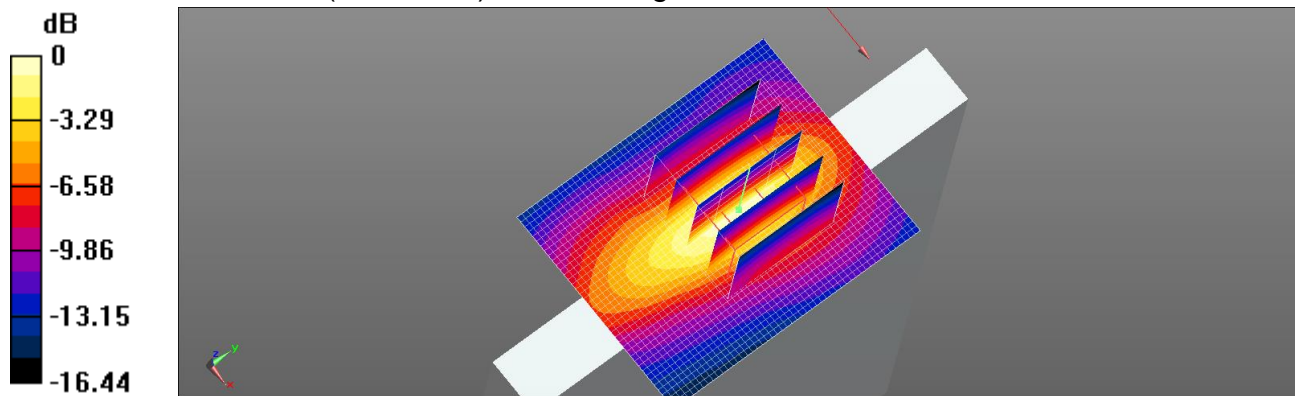

0 dB = 1.69 W/kg = 2.28 dBW/kg

Date: 2019/12/26

LTE Band 13 (10MHz)_Body_Edge4_CH 23230_QPSK_1-0_0mm_Repeat

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.459$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(9.68, 9.68, 9.68); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (41x51x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.70 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.31 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.28 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.517 W/kg

Maximum value of SAR (measured) = 1.65 W/kg

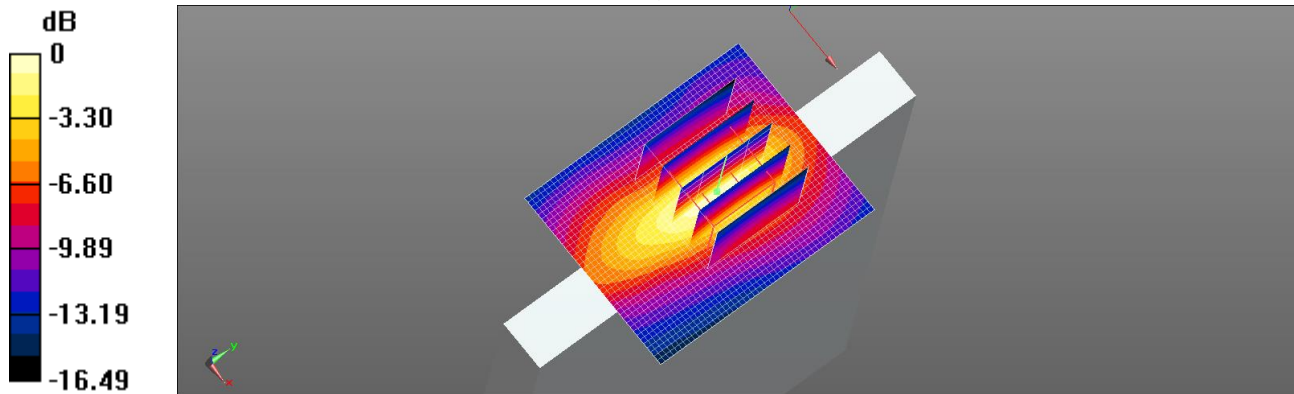

0 dB = 1.65 W/kg = 2.17 dBW/kg

Date: 2019/12/26

LTE Band 14 (10MHz)_Body_Edge4_CH 23330_QPSK_1-49_0mm

Communication System: LTE; Frequency: 793 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 793$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.282$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(9.68, 9.68, 9.68); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (41x61x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.56 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.52 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 0.972 W/kg; SAR(10 g) = 0.491 W/kg

Maximum value of SAR (measured) = 1.60 W/kg

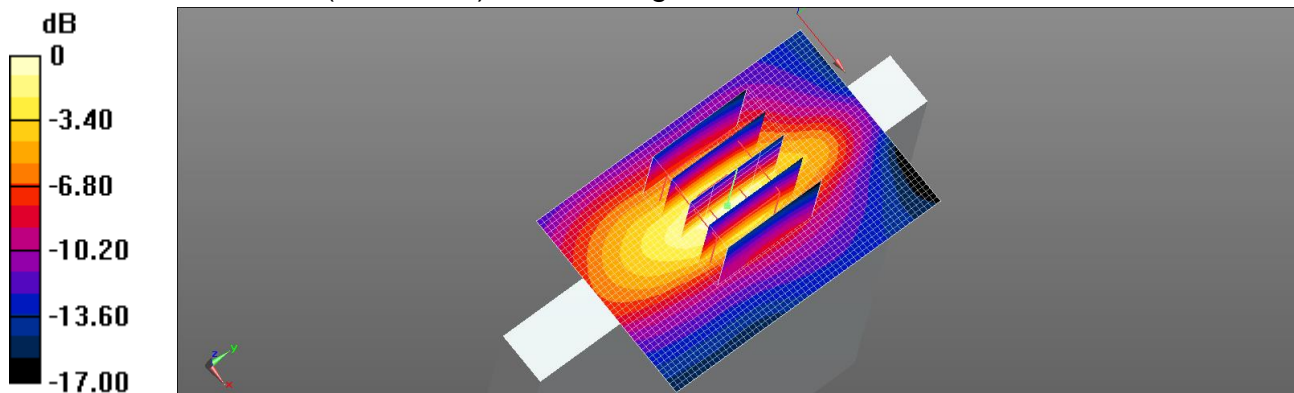

0 dB = 1.60 W/kg = 2.04 dBW/kg

Date: 2019/12/26

LTE Band 17 (10MHz)_Body_Edge4_CH 23790_QPSK_1-49_0mm

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.861$ S/m; $\epsilon_r = 42.378$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(9.68, 9.68, 9.68); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (41x61x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.15 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.16 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.709 W/kg; SAR(10 g) = 0.332 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

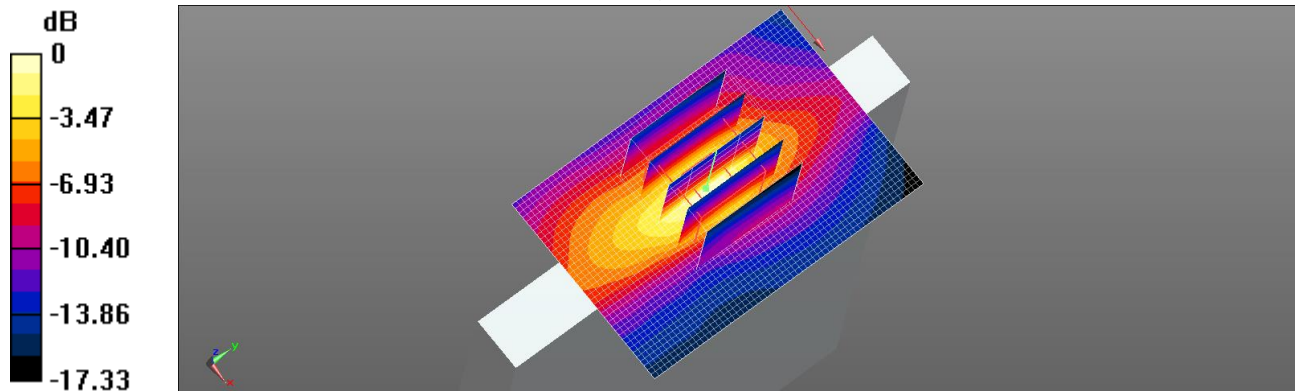

0 dB = 1.23 W/kg = 0.90 dBW/kg

Date: 2019/12/23

LTE Band 25 (20MHz)_Body_Back_CH 26590_QPSK_1-0_0mm_Down Power

Communication System: LTE; Frequency: 1905 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1905$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 38.795$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.9°C; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(8.23., 8.23, 8.23); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (81x61x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.50 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.518 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 0.972 W/kg; SAR(10 g) = 0.487 W/kg

Maximum value of SAR (measured) = 1.44 W/kg

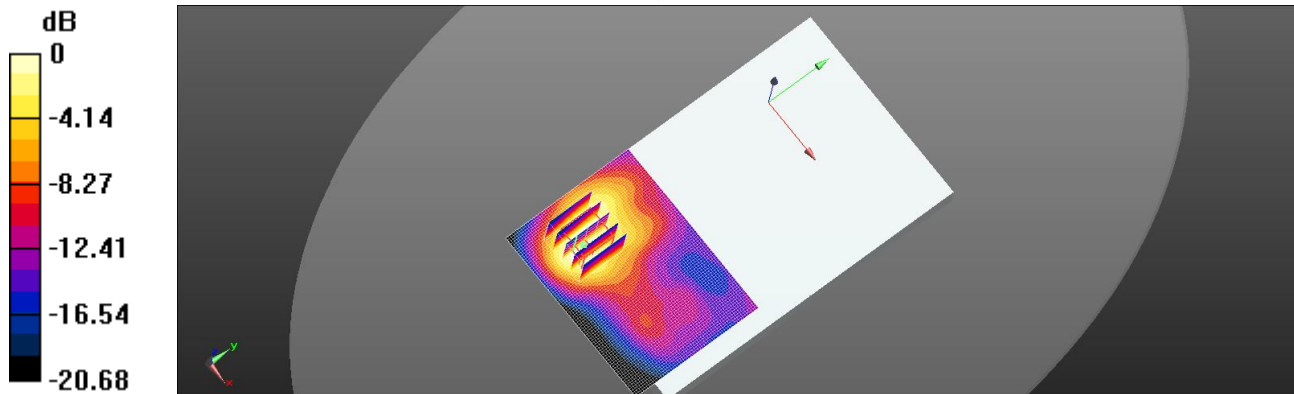

0 dB = 1.44 W/kg = 1.58 dBW/kg

Date: 2019/12/25

LTE Band 26 (15MHz)_Body_Edge4_CH 26865_QPSK_1-0_0mm

Communication System: LTE; Frequency: 831 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.207$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(9.44, 9.44, 9.44); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (41x51x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.79 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.15 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.38 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.591 W/kg

Maximum value of SAR (measured) = 1.77 W/kg

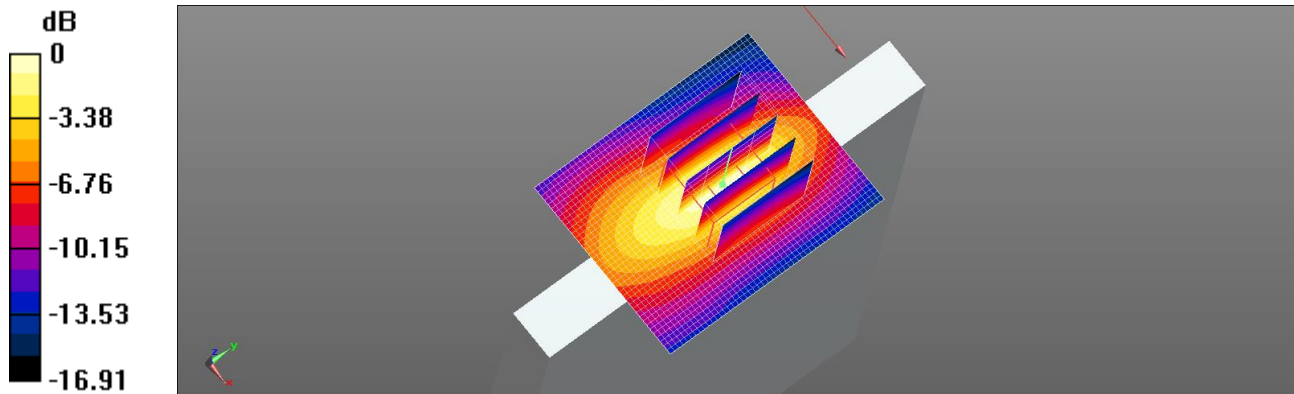

0 dB = 1.77 W/kg = 2.48 dBW/kg

Date: 2019/12/25

LTE Band 26 (15MHz)_Body_Edge4_CH 26865_QPSK_1-0_0mm_Repeat

Communication System: LTE; Frequency: 831 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.207$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(9.44, 9.44, 9.44); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (41x51x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.83 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.07 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.88 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.506 W/kg

Maximum value of SAR (measured) = 1.71 W/kg

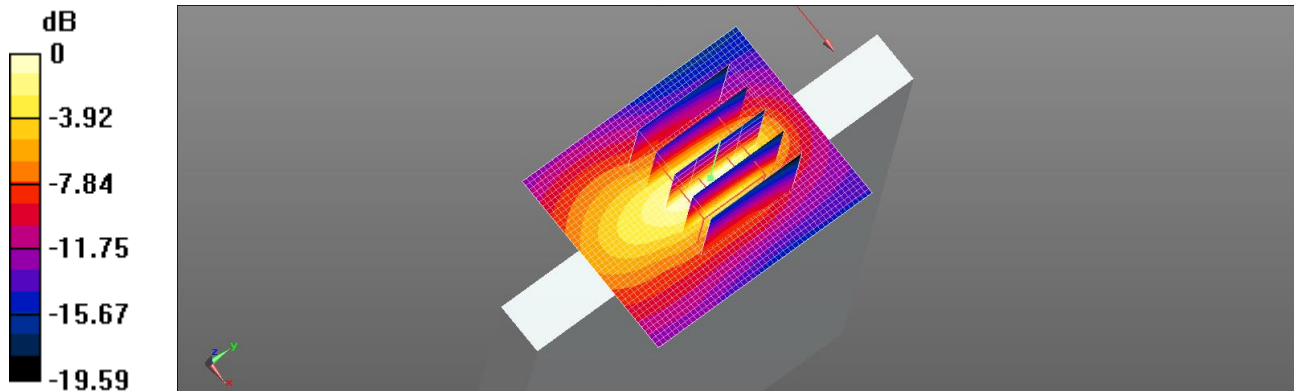

0 dB = 1.71 W/kg = 2.33 dBW/kg

Date: 2019/12/19

LTE Band 41 (20MHz)_Body_Edge4_CH 41490_QPSK_1-0_5mm_Full Power

Communication System: LTE; Frequency: 2680 MHz; Duty Cycle: 1: 1.59956

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.094$ S/m; $\epsilon_r = 37.191$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(7.3, 7.3, 7.3); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x61x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 1.76 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.457 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.53 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.431 W/kg

Maximum value of SAR (measured) = 1.80 W/kg

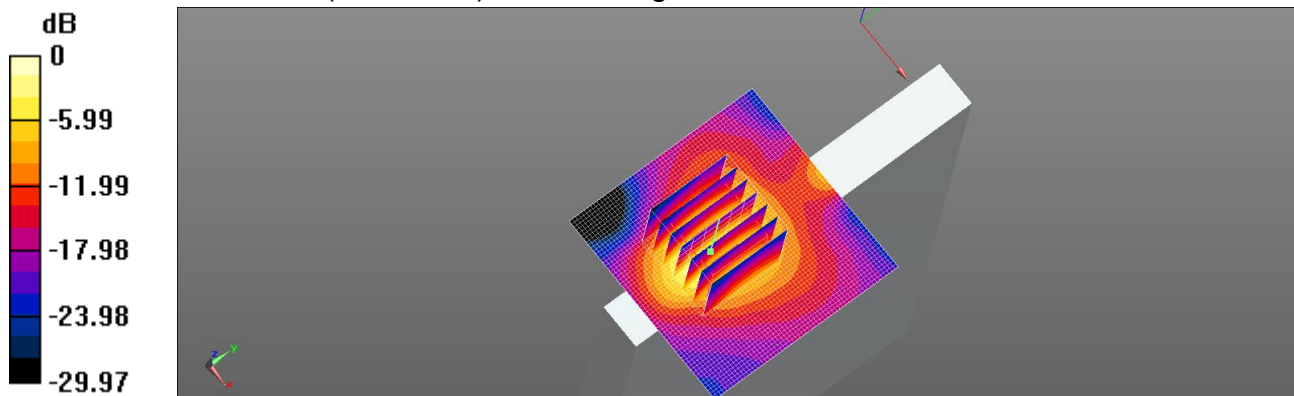

0 dB = 1.80 W/kg = 2.55 dBW/kg

Date: 2019/12/24

LTE Band 66 (20MHz)_Body_Edge3_CH 132572_QPSK_1-0_0mm_Full Power

Communication System: LTE; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39.257$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.1°C; Liquid temperature: 20.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(8.44, 8.44, 8.44); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (41x51x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.22 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.79 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.877 W/kg; SAR(10 g) = 0.492 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

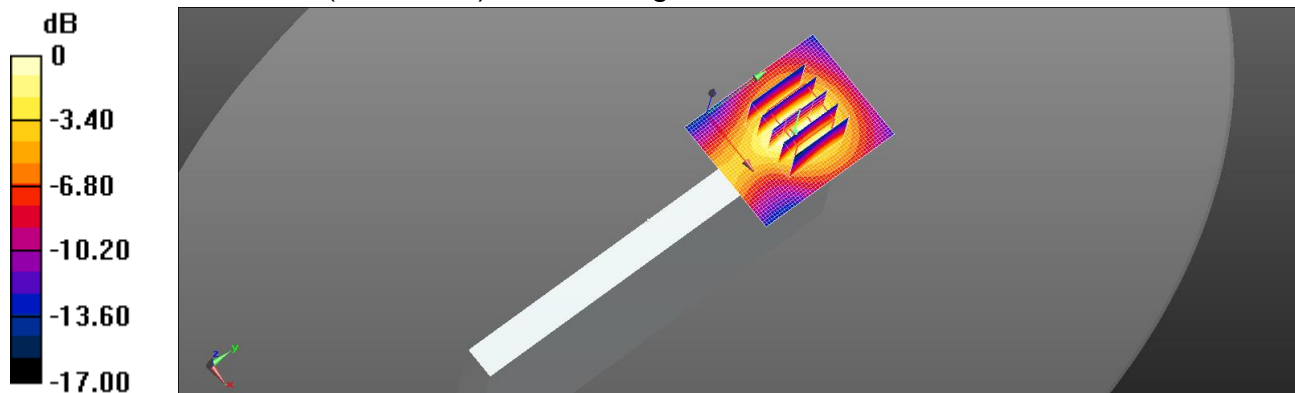

0 dB = 1.21 W/kg = 0.83 dBW/kg

Date: 2019/12/24

LTE Band 66 (20MHz)_Body_Edge3_CH 132572_QPSK_1-0_0mm_Full Power _Repeat

Communication System: LTE; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39.257$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(8.44, 8.44, 8.44); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (41x51x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.19 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.19 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.866 W/kg; SAR(10 g) = 0.495 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

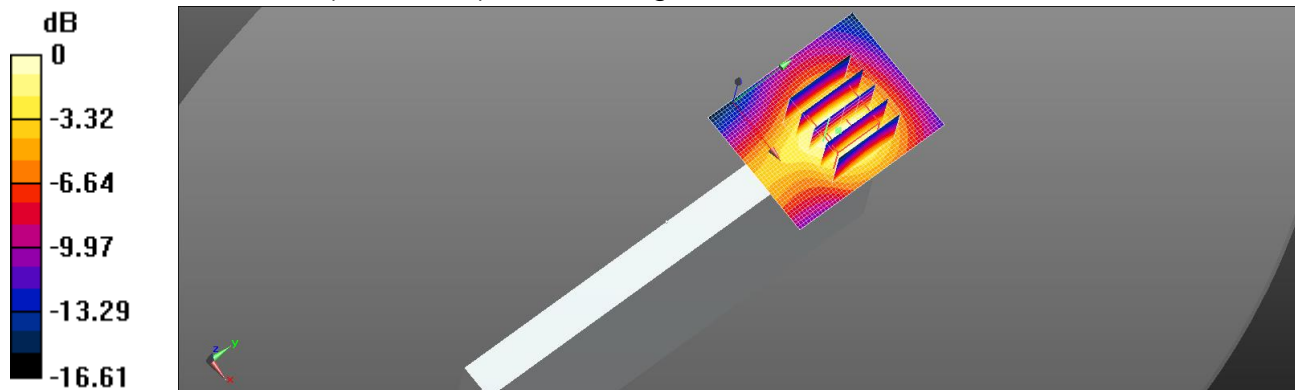

Date: 2019/12/27

LTE Band 71 (20MHz)_Body_Edge4_CH 133222_QPSK_1-0_0mm_Full Power

Communication System: LTE; Frequency: 673 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 673$ MHz; $\sigma = 0.849$ S/m; $\epsilon_r = 43.987$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 – SN3770; ConvF(9.68, 9.68, 9.68); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (41x61x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.788 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.59 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 0.786 W/kg

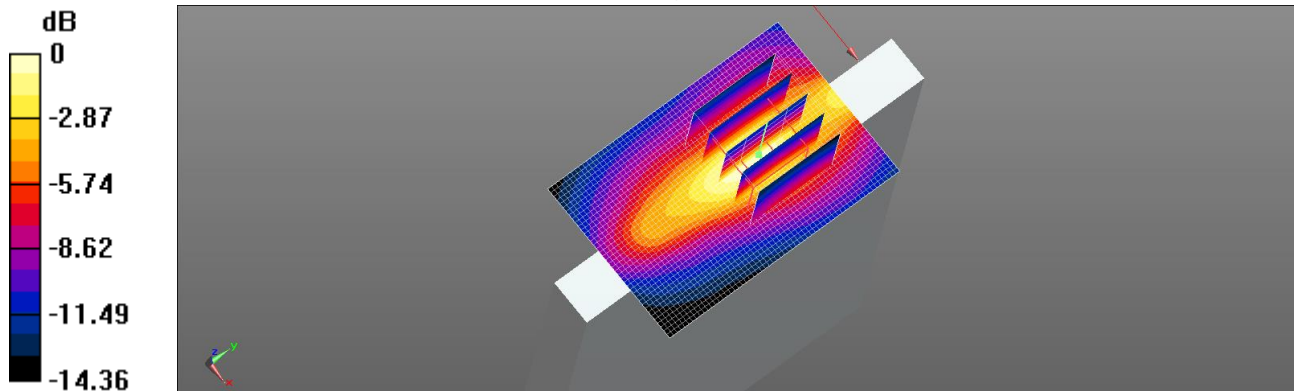

Date: 2019/12/18

WLAN 802.11b_Body_Edge1_CH 1_0mm

Communication System: Wi-Fi; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.815$ S/m; $\epsilon_r = 38.568$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 23.2°C; Liquid temperature: 22.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(7.48, 7.48, 7.48); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (51x71x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 1.60 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.092 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.10 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.493 W/kg

Maximum value of SAR (measured) = 1.58 W/kg

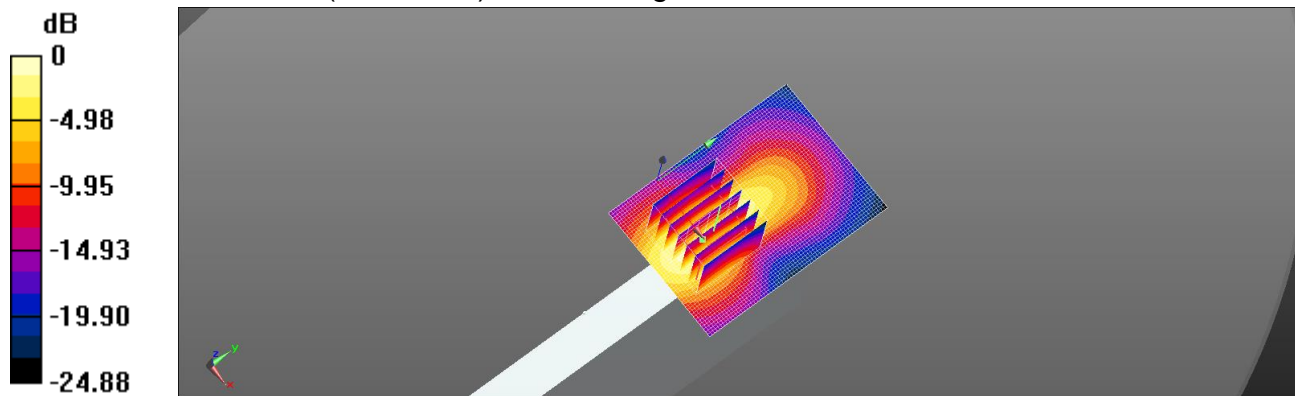

0 dB = 1.58 W/kg = 1.99 dBW/kg

Date: 2019/12/18

WLAN 802.11b_Body__Edge1_CH 1_0mm_repeat

Communication System: Wi-Fi; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.815$ S/m; $\epsilon_r = 38.568$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 23.2°C; Liquid temperature: 22.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(7.48, 7.48, 7.48); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI ; ;
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (51x71x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 1.65 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.85 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 1 W/kg; SAR(10 g) = 0.460 W/kg

Maximum value of SAR (measured) = 1.53 W/kg

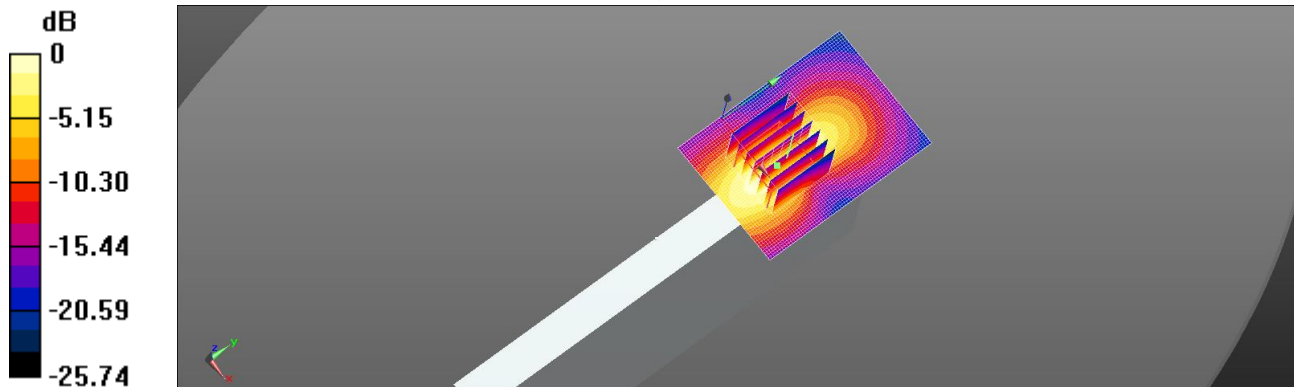

0 dB = 1.53 W/kg = 1.85 dBW/kg

Date: 2019/12/16

WLAN 802.11ac(40M) 5.3G_Body_Edge1_CH 62_0mm

Communication System: Wi-Fi; Frequency: 5310 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5310$ MHz; $\sigma = 4.628$ S/m; $\epsilon_r = 35.497$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(5.3, 5.3, 5.3); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x71x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.95 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.791 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 4.17 W/kg

SAR(1 g) = 0.935 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 1.99 W/kg

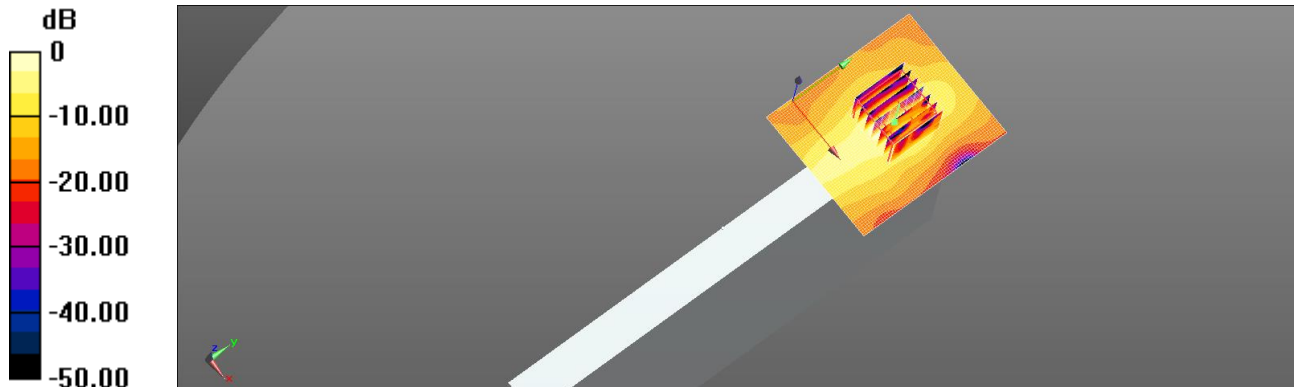

0 dB = 1.99 W/kg = 2.99 dBW/kg

Date: 2019/12/16

WLAN 802.11ac(40M) 5.3G_Body_Edge1_CH 62_0mm_Repeat

Communication System: Wi-Fi; Frequency: 5310 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5310$ MHz; $\sigma = 4.628$ S/m; $\epsilon_r = 35.497$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(5.3, 5.3, 5.3); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x71x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.86 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.307 V/m; Power Drift = 0.94 dB

Peak SAR (extrapolated) = 3.88 W/kg

SAR(1 g) = 0.899 W/kg; SAR(10 g) = 0.248 W/kg

Maximum value of SAR (measured) = 1.90 W/kg

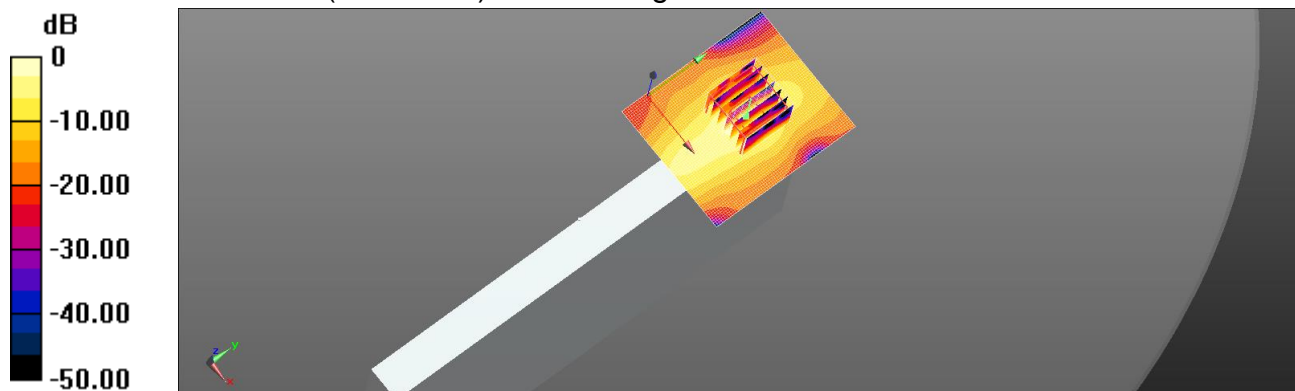

0 dB = 1.90 W/kg = 2.79 dBW/kg

Date: 2019/12/16

WLAN 802.11ac(40M) 5.5G_Body_Edge1_CH 134_0mm

Communication System: Wi-Fi; Frequency: 5670 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5670$ MHz; $\sigma = 5.095$ S/m; $\epsilon_r = 34.349$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(4.82, 4.82, 4.82); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (71x81x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.08 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.792 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 4.27 W/kg

SAR(1 g) = 0.899 W/kg; SAR(10 g) = 0.236 W/kg

Maximum value of SAR (measured) = 1.96 W/kg

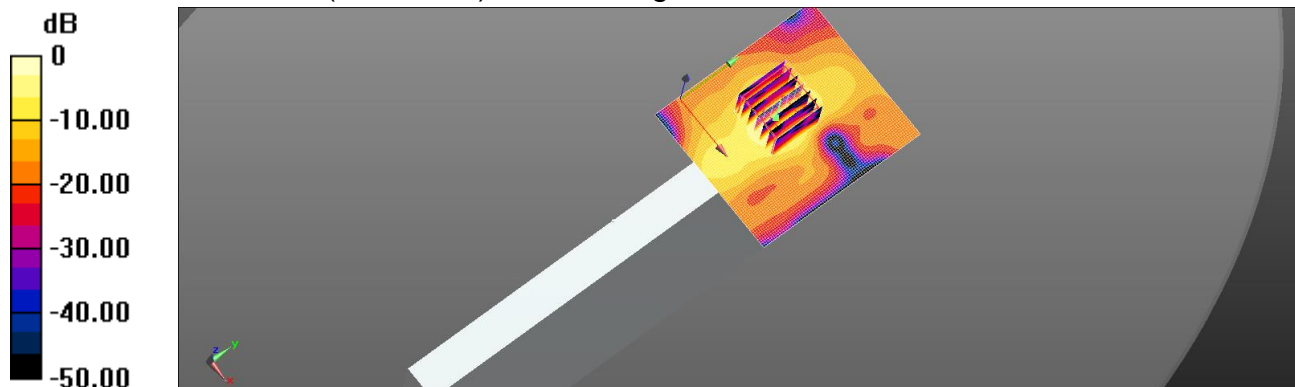

0 dB = 1.96 W/kg = 2.92 dBW/kg

Date: 2019/12/16

WLAN 802.11ac(40M) 5.5G_Body_Edge1_CH 134_0mm_Repeat

Communication System: Wi-Fi; Frequency: 5670 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5670$ MHz; $\sigma = 5.095$ S/m; $\epsilon_r = 34.349$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(4.82, 4.82, 4.82); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (71x81x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.00 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.000 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 4.21 W/kg

SAR(1 g) = 0.877 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 1.91 W/kg

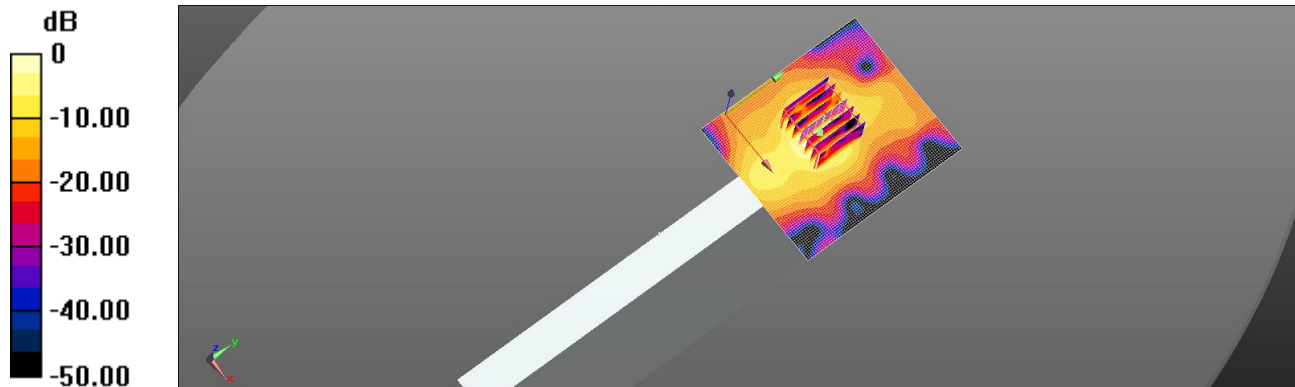

0 dB = 1.91 W/kg = 2.81 dBW/kg

Date: 2019/12/17

WLAN 802.11ac(40M) 5.8G_Body_Edge1_CH 159_0mm

Communication System: Wi-Fi; Frequency: 5795 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5795$ MHz; $\sigma = 5.251$ S/m; $\epsilon_r = 33.948$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.9°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(5.12, 5.12, 5.12); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (71x71x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.18 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.352 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 4.79 W/kg

SAR(1 g) = 0.955 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 2.13 W/kg

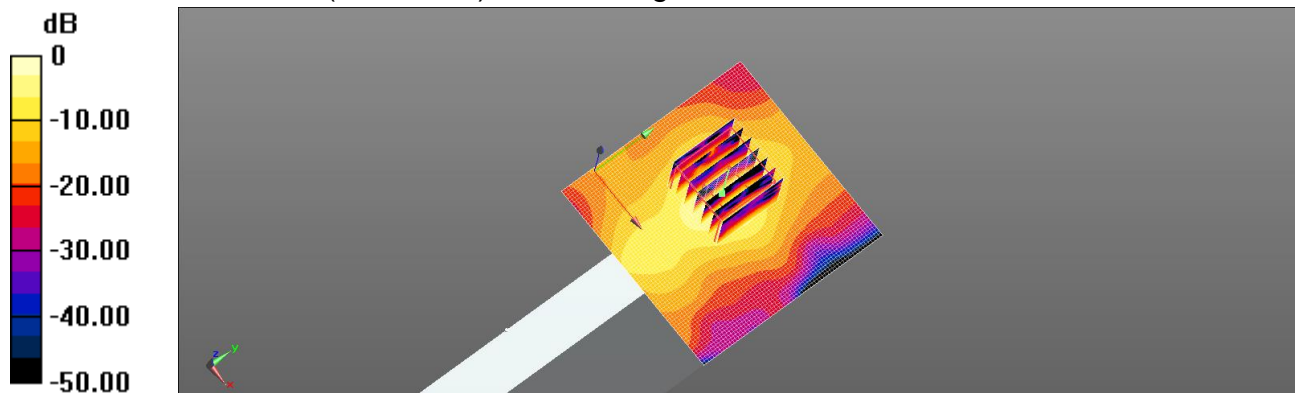

0 dB = 2.13 W/kg = 3.28 dBW/kg

Date: 2019/12/17

WLAN 802.11ac(40M) 5.8G_Body_Edge1_CH 159_0mm_Repeat

Communication System: Wi-Fi; Frequency: 5795 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5795$ MHz; $\sigma = 5.251$ S/m; $\epsilon_r = 33.948$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.9°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(5.12, 5.12, 5.12); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI ; ;
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (71x71x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.90 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.147 V/m; Power Drift = 0.70 dB

Peak SAR (extrapolated) = 4.38 W/kg

SAR(1 g) = 0.891 W/kg; SAR(10 g) = 0.242 W/kg

Maximum value of SAR (measured) = 1.92 W/kg

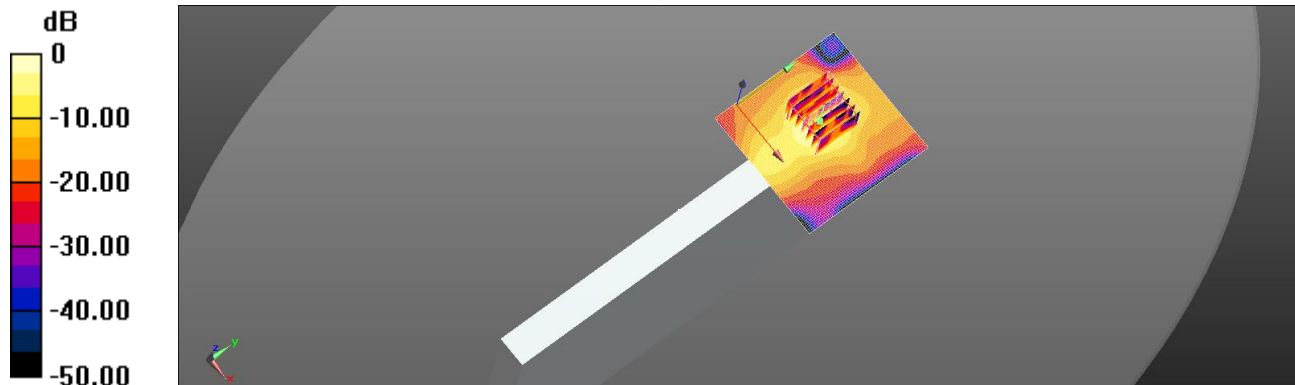

0 dB = 1.92 W/kg = 2.83 dBW/kg

Date: 2019/12/18

Bluetooth(GFSK)_Body_Edge1_CH 78_0mm

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.9$ S/m; $\epsilon_r = 38.566$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 23.2°C; Liquid temperature: 22.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3770; ConvF(7.48, 7.48, 7.48); Calibrated: 2019/4/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2019/10/11
- Phantom: ELI
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (71x81x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.00598 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.8950 V/m; Power Drift = 4.53 dB

Peak SAR (extrapolated) = 0.00884 W/kg

SAR(1 g) = 0.0019 W/kg; SAR(10 g) = 0.00106 W/kg

Maximum value of SAR (measured) = 0.00884 W/kg

