

WCDMA Band II_Edge 3_Ch 9262_0mm

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.4°C
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 39.087$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(8.32, 8.32, 8.32) @ 1852.4 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 3/Ch 9262_0mm/Area Scan (61x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.07 W/kg

Edge 3/Ch 9262_0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.44 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.721 W/kg; SAR(10 g) = 0.405 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 60.6%

Maximum value of SAR (measured) = 0.975 W/kg

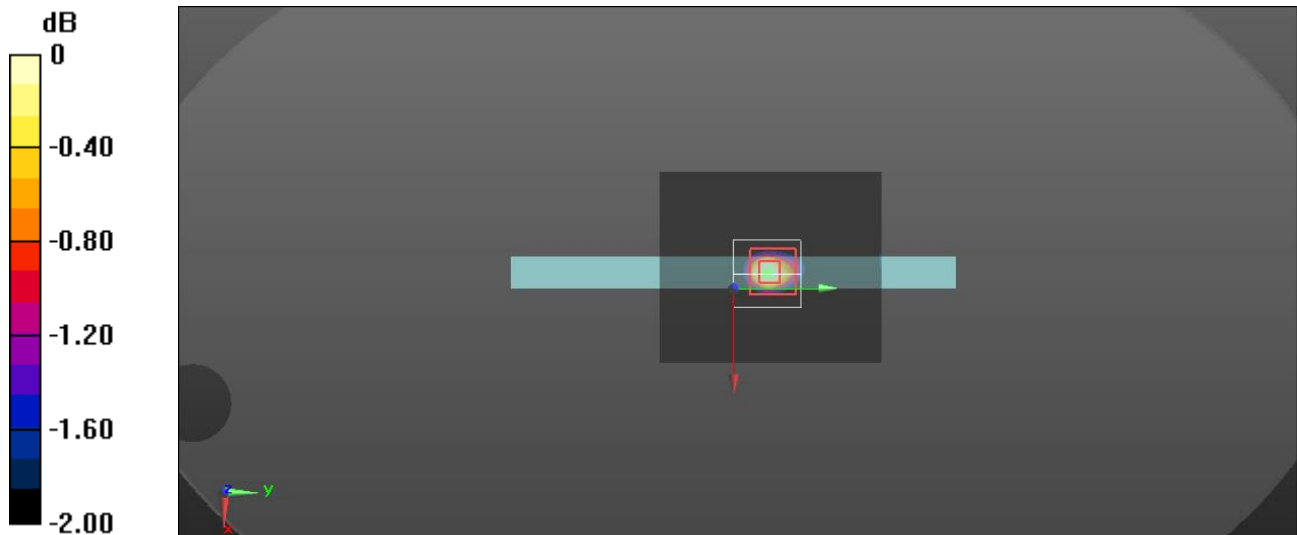

0 dB = 0.975 W/kg = -0.11 dBW/kg

WCDMA Band IV_Rear_Ch 1513_0mm


Frequency: 1752.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.2°C; Liquid Temperature: 22.1°C
Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.336$ S/m; $\epsilon_r = 40.563$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(8.61, 8.61, 8.61) @ 1752.6 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Rear/Ch 1513_0mm/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.07 W/kg

Rear/Ch 1513_0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 28.04 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.26 W/kg
SAR(1 g) = 0.724 W/kg; SAR(10 g) = 0.411 W/kg
Smallest distance from peaks to all points 3 dB below = 13.7 mm
Ratio of SAR at M2 to SAR at M1 = 60.7%
Maximum value of SAR (measured) = 0.978 W/kg

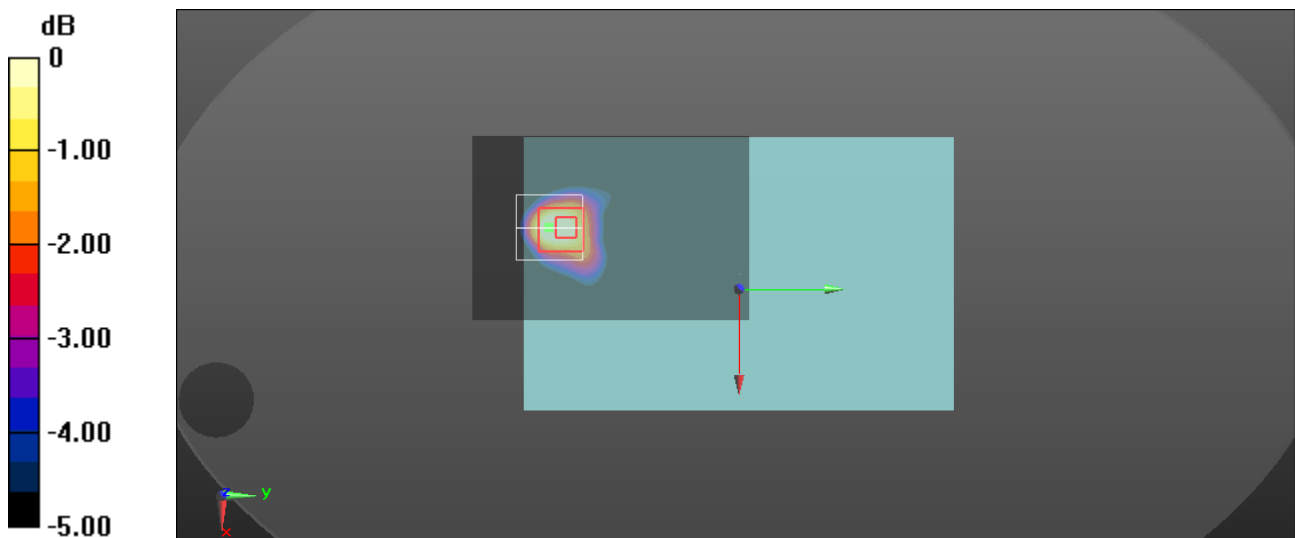

0 dB = 0.978 W/kg = -0.10 dBW/kg

WCDMA Band V_Rear_Ch 4132_0mm


Frequency: 826.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.1°C; Liquid Temperature: 22.4°C
Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.458$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(9.45, 9.45, 9.45) @ 826.4 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Rear/Ch 4132_0mm/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.24 W/kg

Rear/Ch 4132_0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 30.91 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.56 W/kg
SAR(1 g) = 0.882 W/kg; SAR(10 g) = 0.508 W/kg
Smallest distance from peaks to all points 3 dB below = 11.5 mm
Ratio of SAR at M2 to SAR at M1 = 57.3%
Maximum value of SAR (measured) = 1.17 W/kg

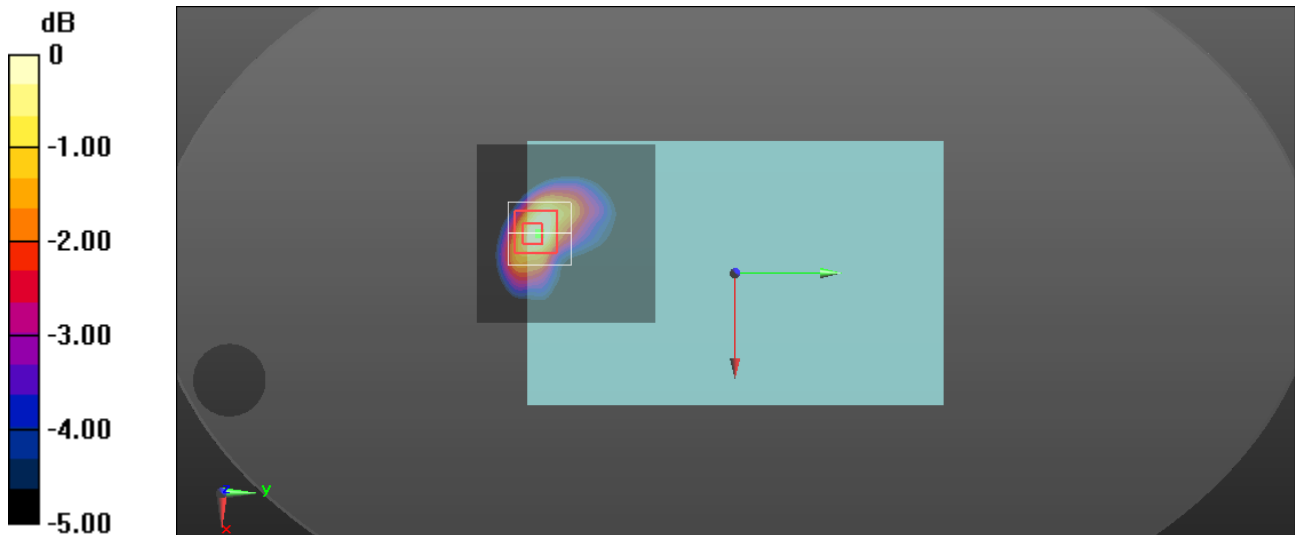

0 dB = 1.17 W/kg = 0.68 dBW/kg

LTE Band 2_Edge 3_Ch 18900_RB_1_99_0mm


Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.4°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.427$ S/m; $\epsilon_r = 38.985$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(8.32, 8.32, 8.32) @ 1880 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 3/Ch 18900_RB_1_99_0mm/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.97 W/kg

Edge 3/Ch 18900_RB_1_99_0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 35.91 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 2.58 W/kg
SAR(1 g) = 1.39 W/kg; SAR(10 g) = 0.755 W/kg
Smallest distance from peaks to all points 3 dB below = 11.3 mm
Ratio of SAR at M2 to SAR at M1 = 53.8%
Maximum value of SAR (measured) = 2.03 W/kg

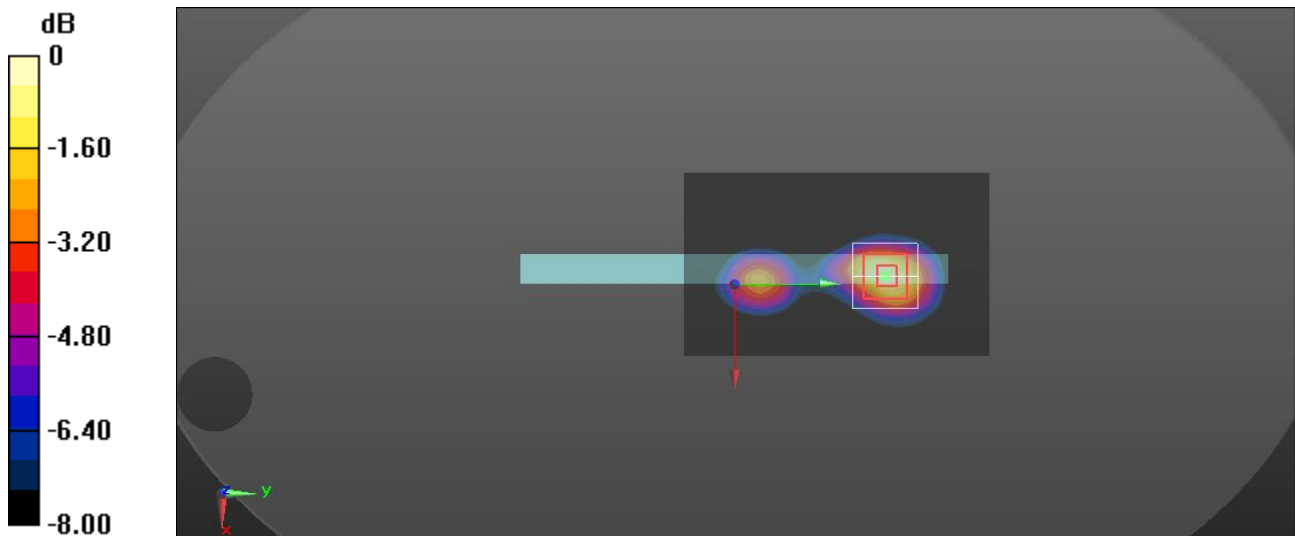

0 dB = 2.03 W/kg = 3.07 dBW/kg

LTE Band 4_Rear_Ch 20300_RB_50_0_0mm

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.2°C; Liquid Temperature: 22.1°C
Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.581$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(8.61, 8.61, 8.61) @ 1745 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Rear/Ch 20300_RB_50_0_0mm/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.942 W/kg

Rear/Ch 20300_RB_50_0_0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.59 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.681 W/kg; SAR(10 g) = 0.390 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 60.1%

Maximum value of SAR (measured) = 0.892 W/kg

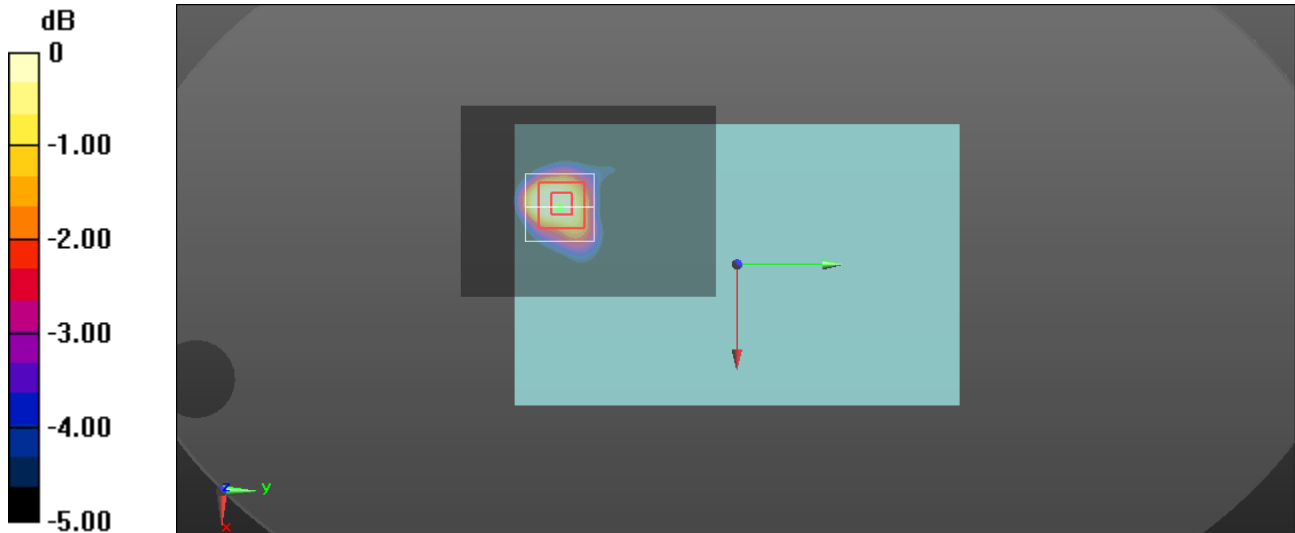

0 dB = 0.892 W/kg = -0.50 dBW/kg

LTE Band 5_Edge 4_Ch 20600_RB_1_0_0mm

Frequency: 844 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.1°C; Liquid Temperature: 22.4°C
Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 41.394$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(9.45, 9.45, 9.45) @ 844 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 4/Ch 20600_RB_1_0_0mm/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.45 W/kg

Edge 4/Ch 20600_RB_1_0_0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 46.76 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 2.65 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.497 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 45.3%

Maximum value of SAR (measured) = 1.68 W/kg

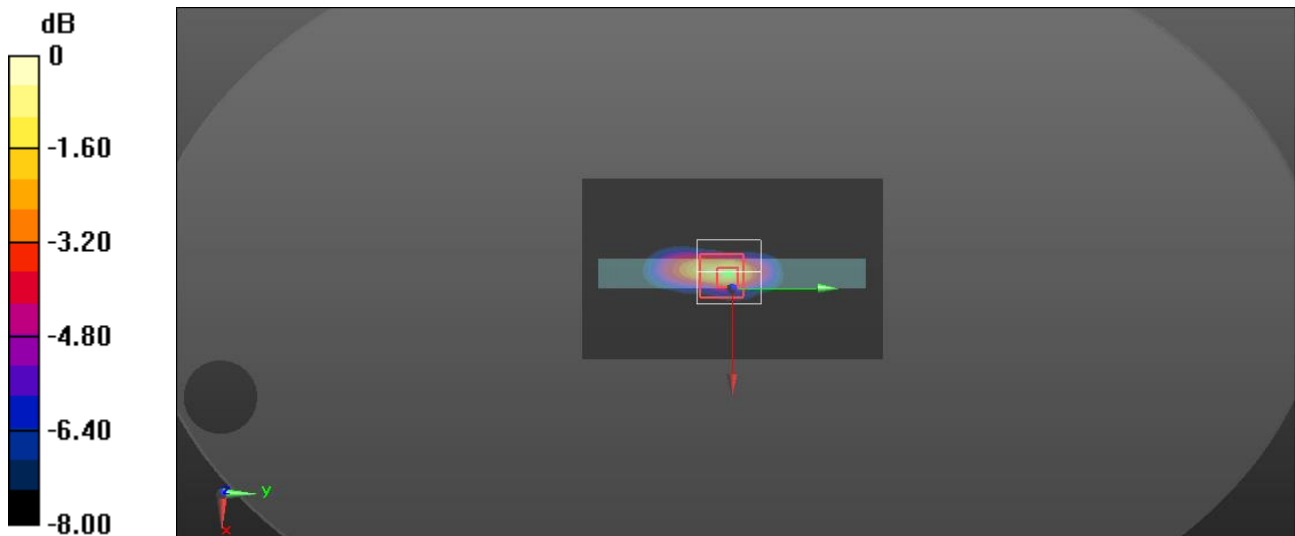

0 dB = 1.68 W/kg = 2.25 dBW/kg

LTE Band 7_Edge 4_Ch 20850_RB_1_0_3mm

Frequency: 2510 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.7°C; Liquid Temperature: 22.4°C
Medium parameters used: $f = 2510$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 37.496$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(7.38, 7.38, 7.38) @ 2510 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 4/Ch 20850_RB_1_0_3mm/Area Scan (81x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.63 W/kg

Edge 4/Ch 20850_RB_1_0_3mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.44 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 2.81 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.386 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 40.5%

Maximum value of SAR (measured) = 1.77 W/kg

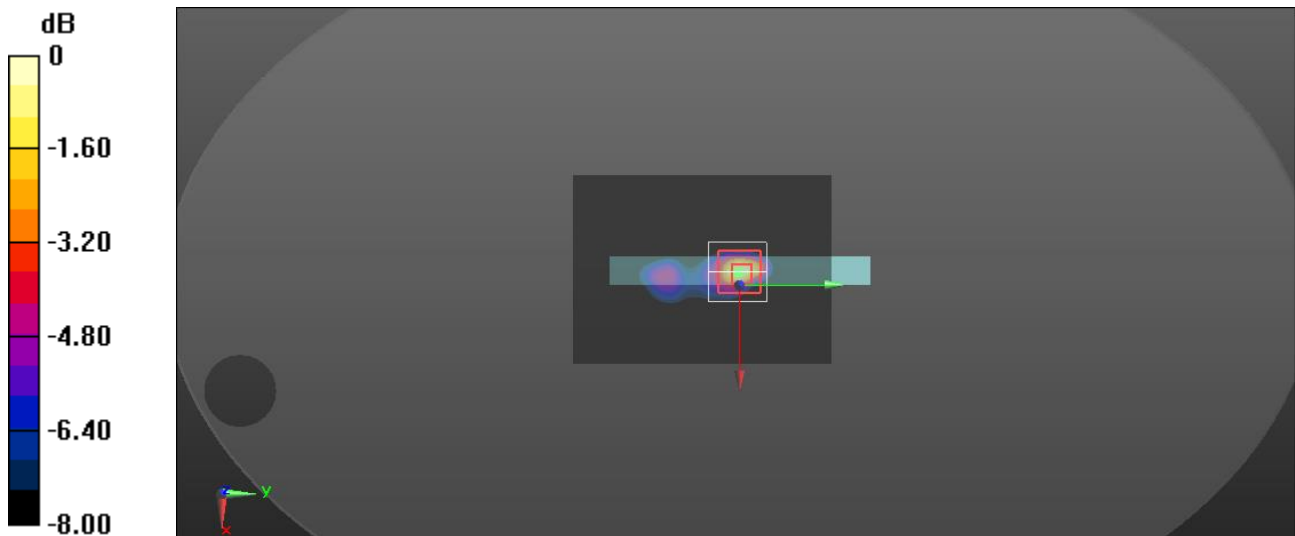

0 dB = 1.77 W/kg = 2.48 dBW/kg

LTE Band 12_Edge 4_Ch 23095_RB_1_0_0mm

Frequency: 707.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.2°C
Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 42.943$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(9.79, 9.79, 9.79) @ 707.5 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 4/Ch 23095_RB_1_0_0mm/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.11 W/kg

Edge 4/Ch 23095_RB_1_0_0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.97 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.265 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 34.2%

Maximum value of SAR (measured) = 1.01 W/kg

Edge 4/Ch 23095_RB_1_0_0mm/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.97 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.743 W/kg; SAR(10 g) = 0.417 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 1.08 W/kg

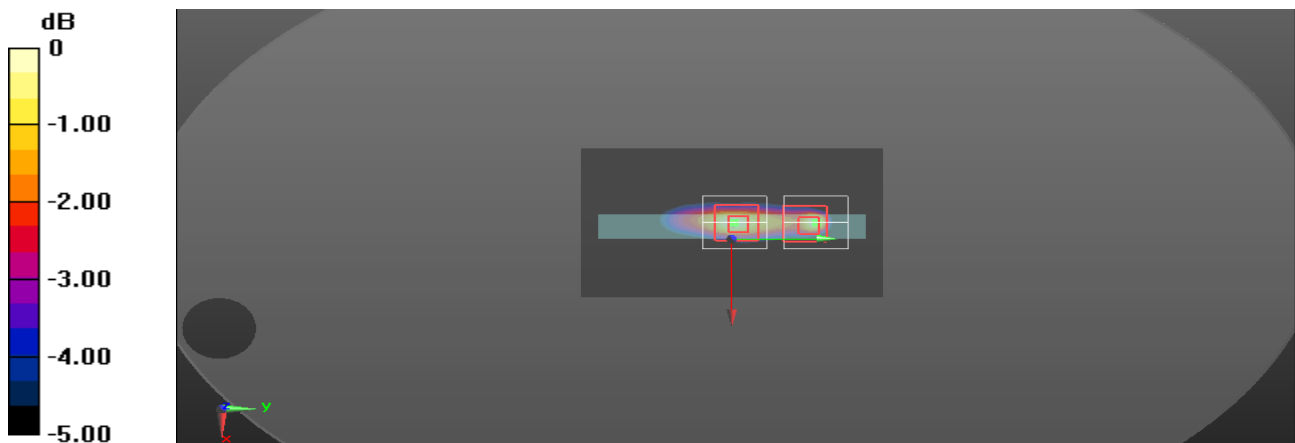

0 dB = 1.08 W/kg = 0.33 dBW/kg

LTE Band 13_Edge 4_Ch 23230_RB_1_0_0mm

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.2°C
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 41.957$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(9.79, 9.79, 9.79) @ 782 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 4/Ch 23230_RB_1_0_0mm/Area Scan (61x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.30 W/kg

Edge 4/Ch 23230_RB_1_0_0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 42.14 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 0.864 W/kg; SAR(10 g) = 0.391 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 41.5%

Maximum value of SAR (measured) = 1.45 W/kg

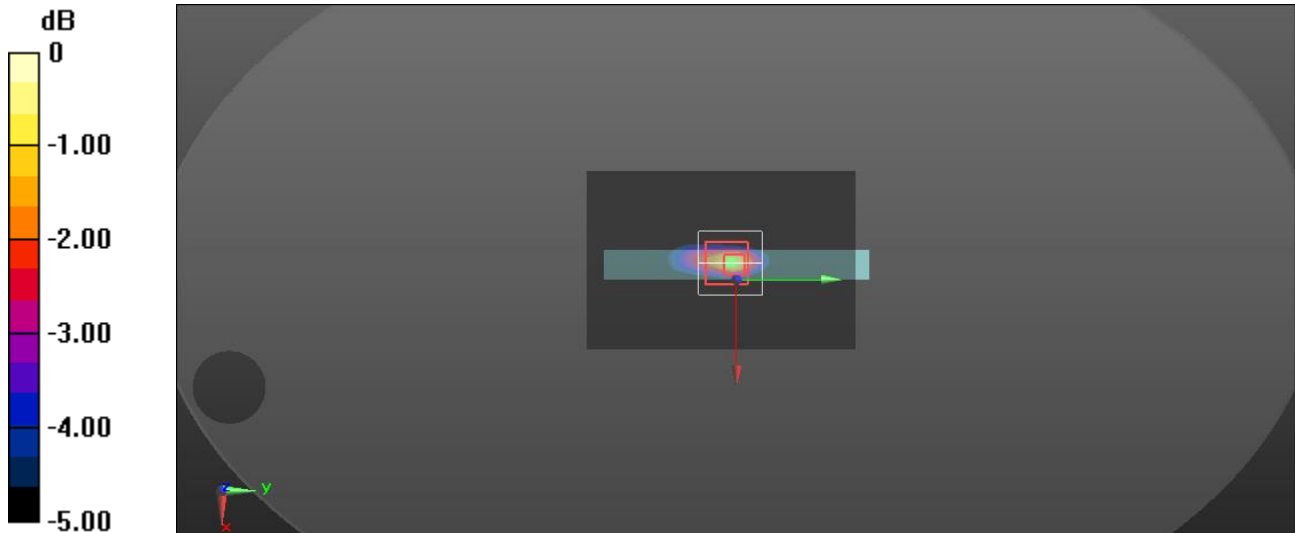

0 dB = 1.45 W/kg = 1.61 dBW/kg

LTE Band 14_Edge 4_Ch 23330_RB_1_0_0mm

Frequency: 793 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C
Medium parameters used: $f = 793 \text{ MHz}$; $\sigma = 0.928 \text{ S/m}$; $\epsilon_r = 40.12$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(9.79, 9.79, 9.79) @ 793 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 4/Ch 23330_RB_1_0_0mm/Area Scan (81x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.50 W/kg

Edge 4/Ch 23330_RB_1_0_0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 42.20 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 0.890 W/kg; SAR(10 g) = 0.405 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 38%

Maximum value of SAR (measured) = 1.55 W/kg

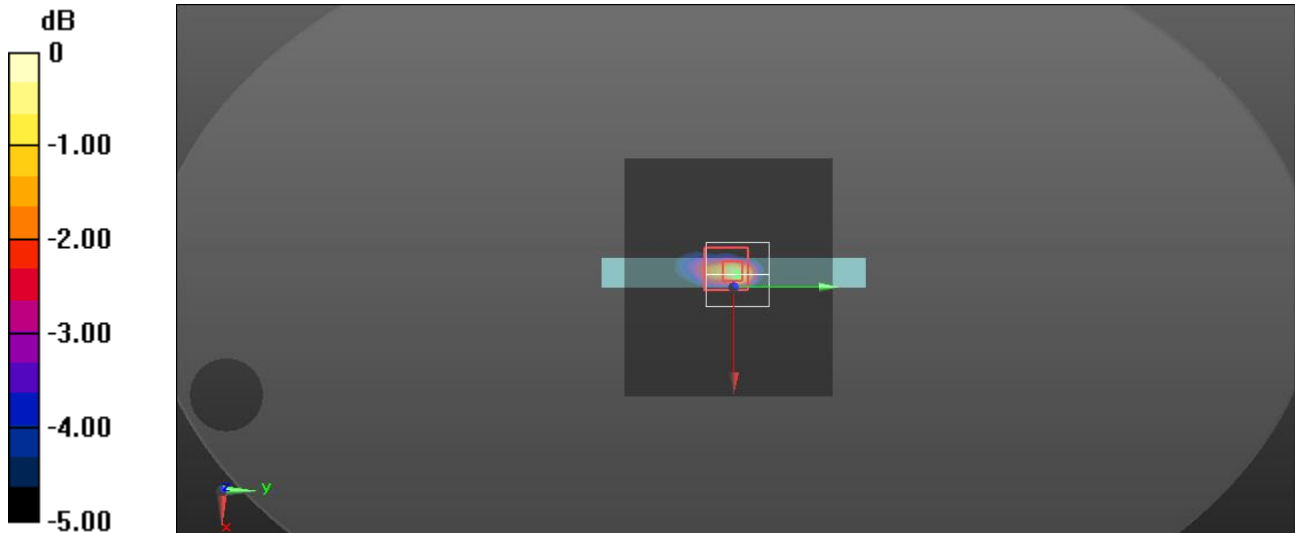

0 dB = 1.55 W/kg = 1.90 dBW/kg

LTE Band 17_Edge 4_Ch 23780_RB_1_0_0mm

Frequency: 709 MHz; Duty Cycle: 1:1.57943; Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.2°C
Medium parameters used: $f = 709$ MHz; $\sigma = 0.856$ S/m; $\epsilon_r = 42.886$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(9.79, 9.79, 9.79) @ 709 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 4/Ch 23780_RB_1_0_0mm/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.20 W/kg

Edge 4/Ch 23780_RB_1_0_0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 39.79 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.622 W/kg; SAR(10 g) = 0.286 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 34.2%

Maximum value of SAR (measured) = 1.09 W/kg

Edge 4/Ch 23780_RB_1_0_0mm/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 39.79 V/m; Power Drift = -0.13 dB



Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.769 W/kg; SAR(10 g) = 0.433 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 1.11 W/kg

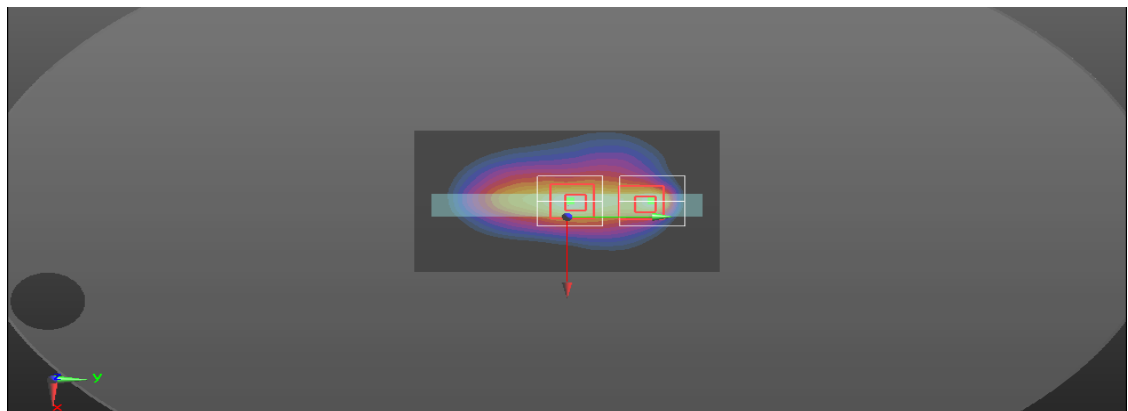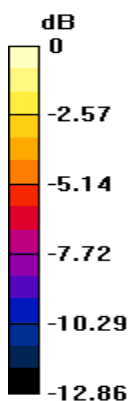

0 dB = 1.11 W/kg = 0.45 dBW/kg

LTE Band 25_Edge 3_Ch 26365_RB_1_0_0mm

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C
Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 39.24$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(8.32, 8.32, 8.32) @ 1882.5 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 3/Ch 26365_RB_1_0_0mm/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.84 W/kg

Edge 3/Ch 26365_RB_1_0_0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.60 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 2.52 W/kg

SAR(1 g) = 1.33 W/kg; SAR(10 g) = 0.715 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.5%

Maximum value of SAR (measured) = 1.97 W/kg

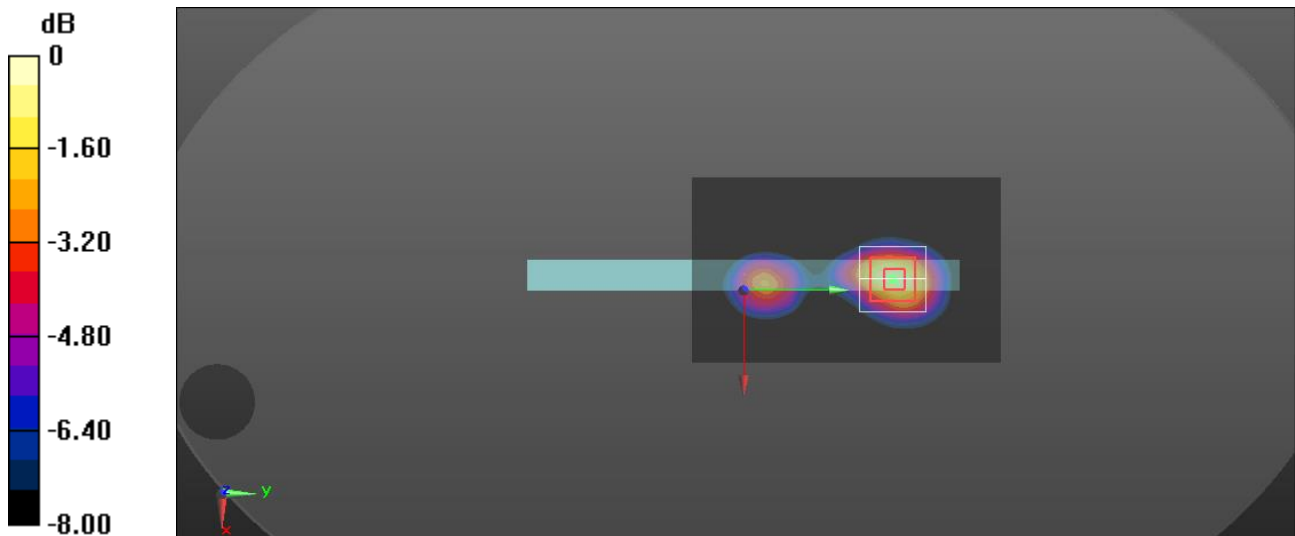

0 dB = 1.97 W/kg = 2.94 dBW/kg

LTE Band 26_Edge 4_Ch 26765_RB_1_0_0mm

Frequency: 821.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.8°C; Liquid Temperature: 22.4°C
Medium parameters used (interpolated): $f = 821.5$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.027$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(9.45, 9.45, 9.45) @ 821.5 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 4/Ch 26765_RB_1_0_0mm/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.61 W/kg

Edge 4/Ch 26765_RB_1_0_0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.82 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 0.984 W/kg; SAR(10 g) = 0.447 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 41.7%

Maximum value of SAR (measured) = 1.75 W/kg

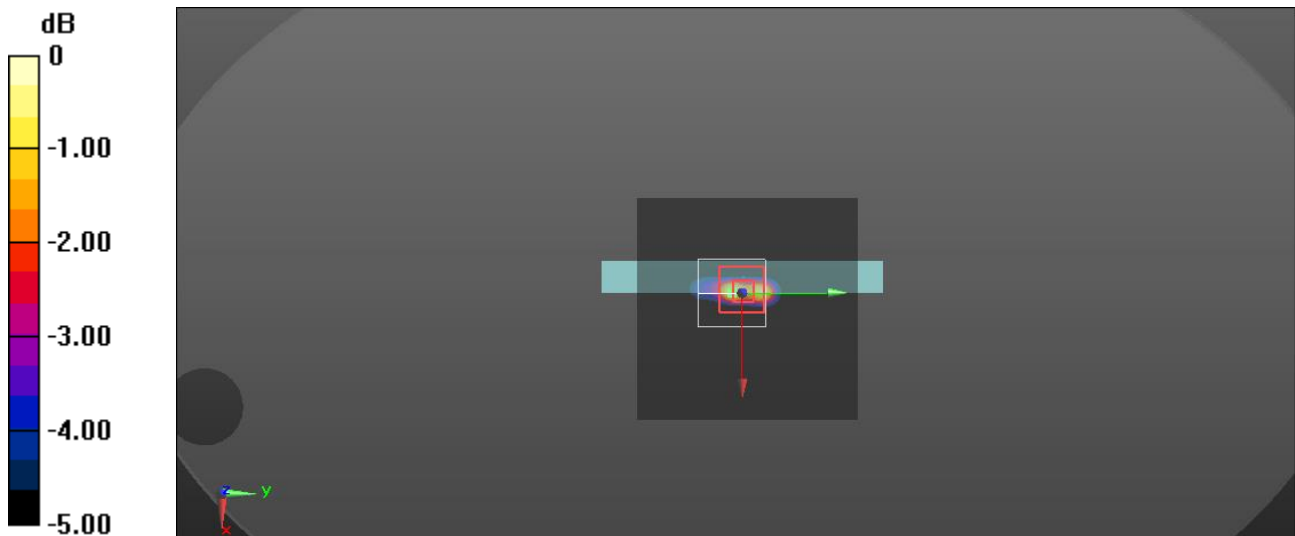

0 dB = 1.75 W/kg = 2.43 dBW/kg

LTE Band 41_Edge 4_Ch 41055_RB_1_0_3mm

Frequency: 2636.5 MHz; Duty Cycle: 1:1.57943; Room Ambient Temperature: 23.8°C; Liquid Temperature: 22.3°C
Medium parameters used (interpolated): $f = 2636.5$ MHz; $\sigma = 2.059$ S/m; $\epsilon_r = 37.334$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(7.38, 7.38, 7.38) @ 2636.5 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 4/Ch 41055_RB_1_0_3mm/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.880 W/kg

Edge 4/Ch 41055_RB_1_0_3mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.70 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.517 W/kg; SAR(10 g) = 0.209 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 41.4%

Maximum value of SAR (measured) = 0.891 W/kg

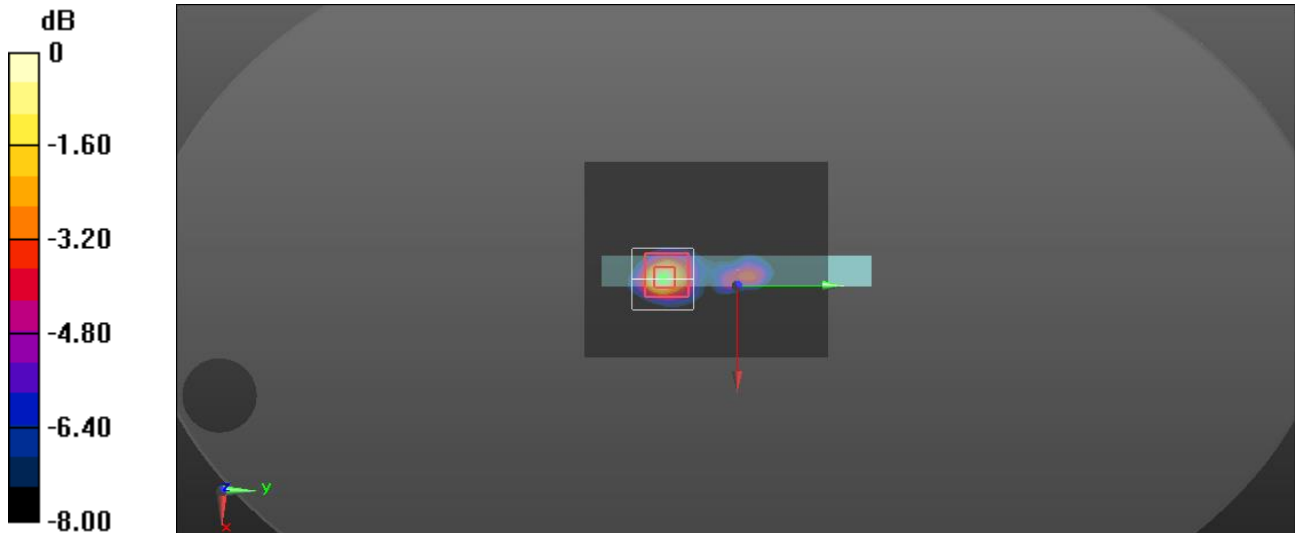

0 dB = 0.891 W/kg = -0.50 dBW/kg

LTE Band 66_Rear_Ch 132072_RB_50_24_0mm

Frequency: 1720 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.2°C; Liquid Temperature: 22.1°C
Medium parameters used: $f = 1720$ MHz; $\sigma = 1.31$ S/m; $\epsilon_r = 40.667$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(8.61, 8.61, 8.61) @ 1720 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Rear/Ch 132072_RB_50_24_0mm/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.37 W/kg

Rear/Ch 132072_RB_50_24_0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.49 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.931 W/kg; SAR(10 g) = 0.529 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 60.9%

Maximum value of SAR (measured) = 1.26 W/kg

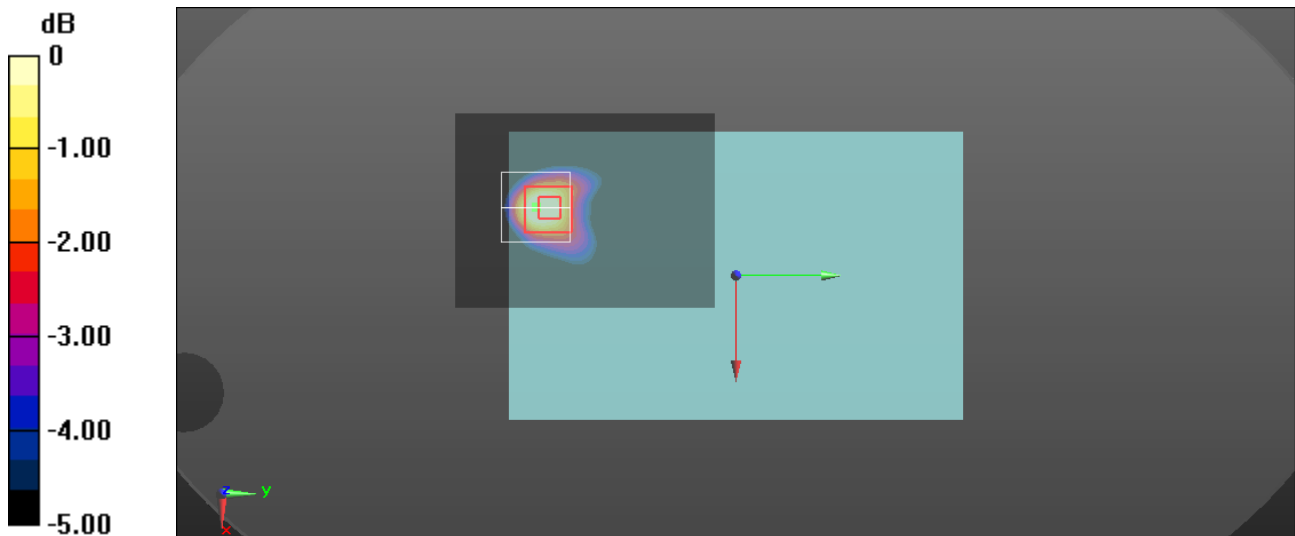

0 dB = 1.26 W/kg = 1.00 dBW/kg

LTE Band 71_Edge 4_Ch 133372_RB_1_0_0mm

Frequency: 688 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C
 Medium parameters used: $f = 688 \text{ MHz}$; $\sigma = 0.855 \text{ S/m}$; $\epsilon_r = 41.529$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(9.79, 9.79, 9.79) @ 688 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 4/Ch 133372_RB_1_0_0mm/Area Scan (61x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.66 W/kg

Edge 4/Ch 133372_RB_1_0_0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 35.08 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.41 W/kg

SAR(1 g) = 0.816 W/kg; SAR(10 g) = 0.401 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 37.1%

Maximum value of SAR (measured) = 1.51 W/kg

Edge 4/Ch 133372_RB_1_0_0mm/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 35.08 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.861 W/kg; SAR(10 g) = 0.480 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 52.6%

Maximum value of SAR (measured) = 1.32 W/kg

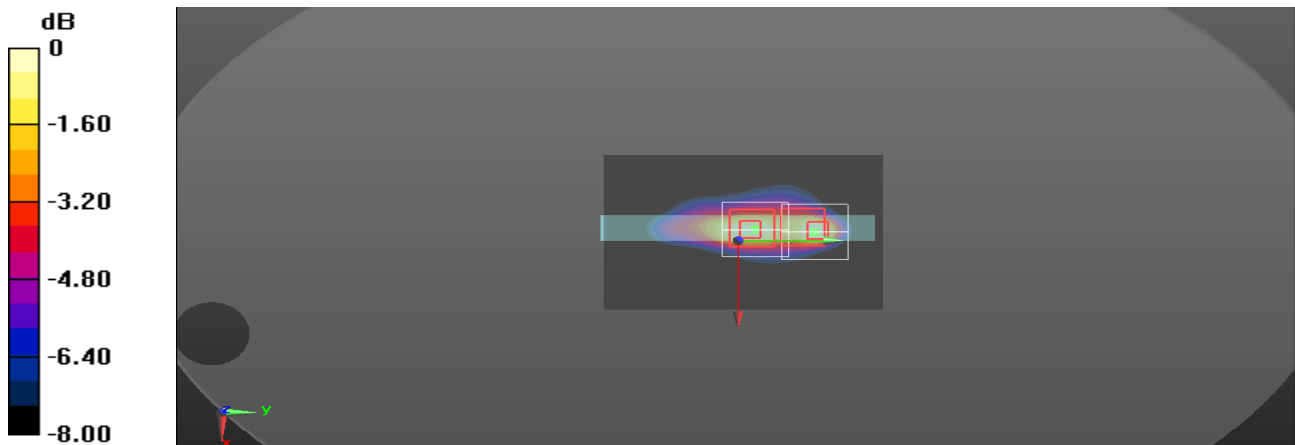

0 dB = 1.32 W/kg = 1.21 dBW/kg

WiFi 2.4GHz_Edge 1_802.11b_Ch 1_0mm

Frequency: 2412 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.4°C; Liquid Temperature: 22.3°C
Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.851$ S/m; $\epsilon_r = 39.099$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(7.35, 7.35, 7.35) @ 2412 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 1/802.11b/Area Scan (81x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.858 W/kg

Edge 1/802.11b/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.54 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.551 W/kg; SAR(10 g) = 0.262 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 0.831 W/kg

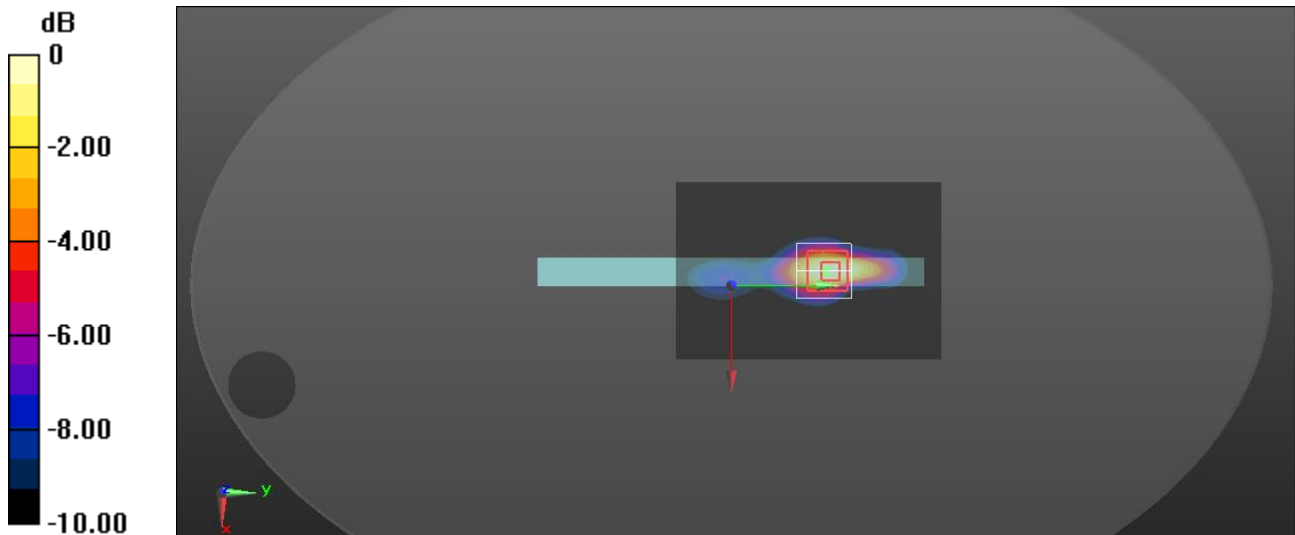

0 dB = 0.831 W/kg = -0.80 dBW/kg

WiFi 5.3GHz_Edge 1_802.11n 40_Ch 62_0mm


Frequency: 5310 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.2°C; Liquid Temperature: 22.3°C
Medium parameters used: $f = 5310 \text{ MHz}$; $\sigma = 4.787 \text{ S/m}$; $\epsilon_r = 35.107$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(5.27, 5.27, 5.27) @ 5310 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 1/802.11n 40/Area Scan (91x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
Maximum value of SAR (interpolated) = 1.07 W/kg

Edge 1/802.11n 40/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 15.15 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 2.28 W/kg
SAR(1 g) = 0.559 W/kg; SAR(10 g) = 0.160 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 56%
Maximum value of SAR (measured) = 1.15 W/kg

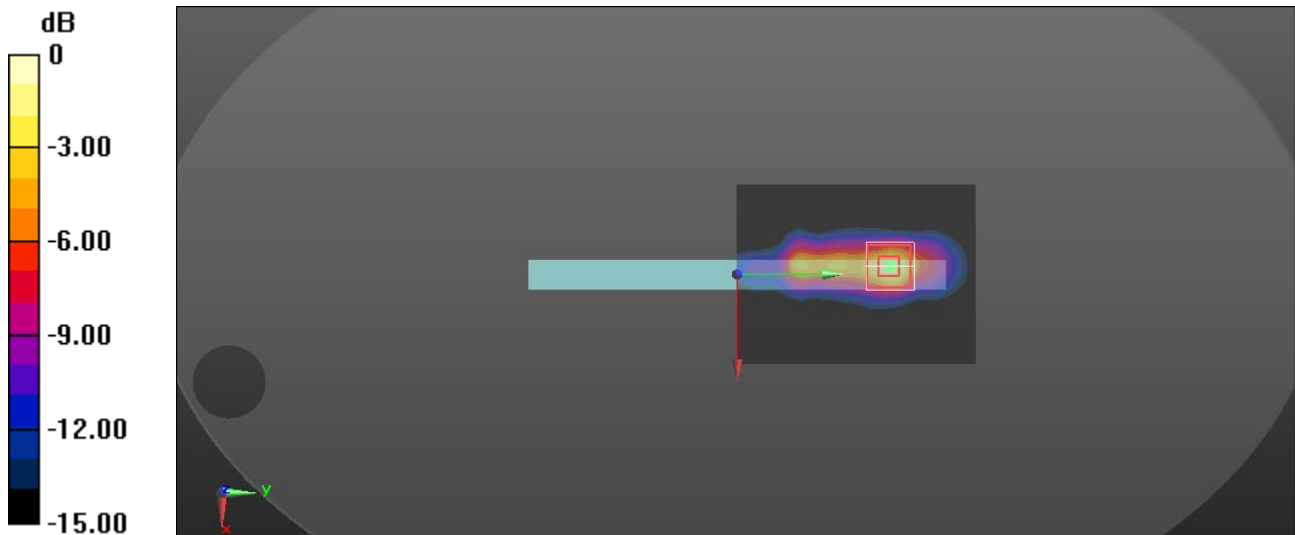

0 dB = 1.15 W/kg = 0.61 dBW/kg

WiFi 5.5GHz_Edge 1_802.11n 40_Ch 142_0mm


Frequency: 5710 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.5°C; Liquid Temperature: 22.4°C
Medium parameters used: $f = 5710 \text{ MHz}$; $\sigma = 5.225 \text{ S/m}$; $\epsilon_r = 34.398$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(5.05, 5.05, 5.05) @ 5710 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 1/802.11n 40/Area Scan (91x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
Maximum value of SAR (interpolated) = 1.38 W/kg

Edge 1/802.11n 40/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 12.34 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 2.94 W/kg
SAR(1 g) = 0.642 W/kg; SAR(10 g) = 0.172 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 52.4%
Maximum value of SAR (measured) = 1.39 W/kg

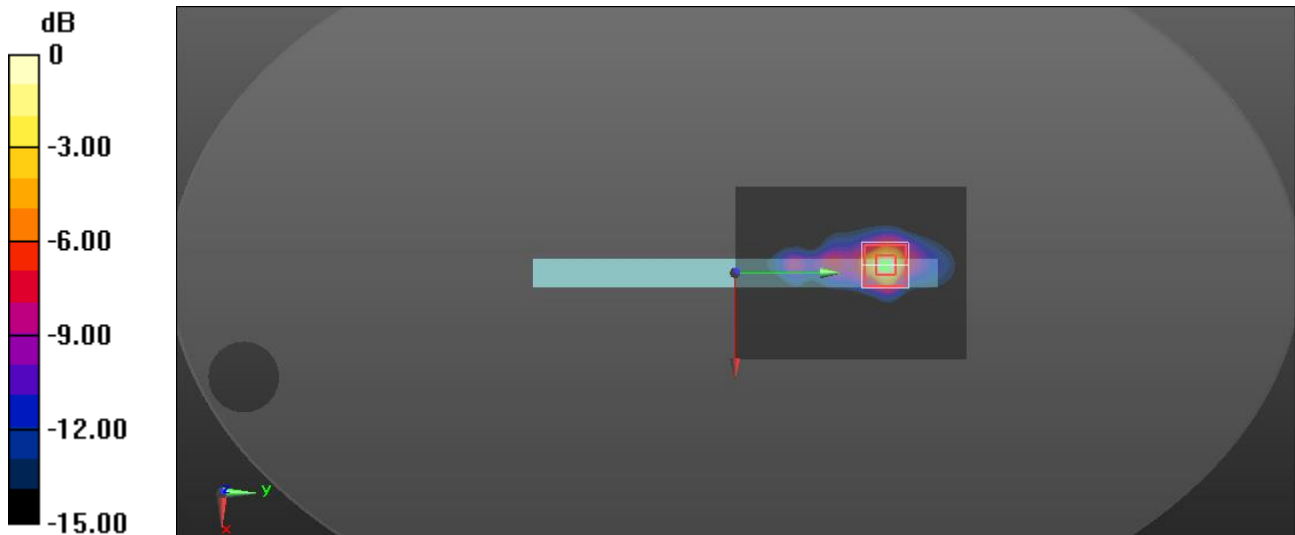

0 dB = 1.39 W/kg = 1.42 dBW/kg

WiFi 5.8GHz_Edge 1_802.11n 40_Ch 159_0mm


Frequency: 5795 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.2°C; Liquid Temperature: 22.3°C
Medium parameters used : $f = 5795$ MHz; $\sigma = 5.263$ S/m; $\epsilon_r = 34.386$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(5.05, 5.05, 5.05) @ 5795 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 1/802.11n 40/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.41 W/kg

Edge 1/802.11n 40/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 17.68 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 3.08 W/kg
SAR(1 g) = 0.656 W/kg; SAR(10 g) = 0.174 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 51.8%
Maximum value of SAR (measured) = 1.42 W/kg

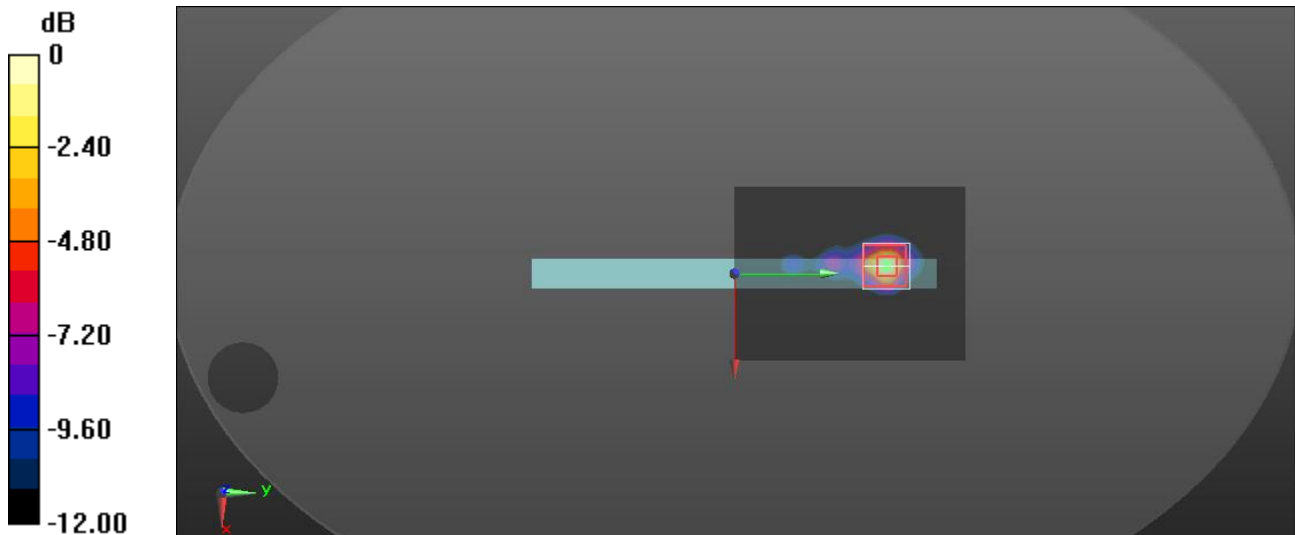

0 dB = 1.42 W/kg = 1.52 dBW/kg

Bluetooth_Rear_GFSK_1M_Ch 39_0mm

Frequency: 2441 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.4°C; Liquid Temperature: 22.3°C
Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.873$ S/m; $\epsilon_r = 39.028$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(7.35, 7.35, 7.35) @ 2441 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Rear/GFSK_1M_Ch 39_0mm/Area Scan (101x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.00521 W/kg

Rear/GFSK_1M_Ch 39_0mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 0.8910 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.00405 W/kg

SAR(1 g) = 0.000272 W/kg; SAR(10 g) = 6.67e-005 W/kg

Ratio of SAR at M2 to SAR at M1 = 48.9%

Maximum value of SAR (measured) = 0.00337 W/kg

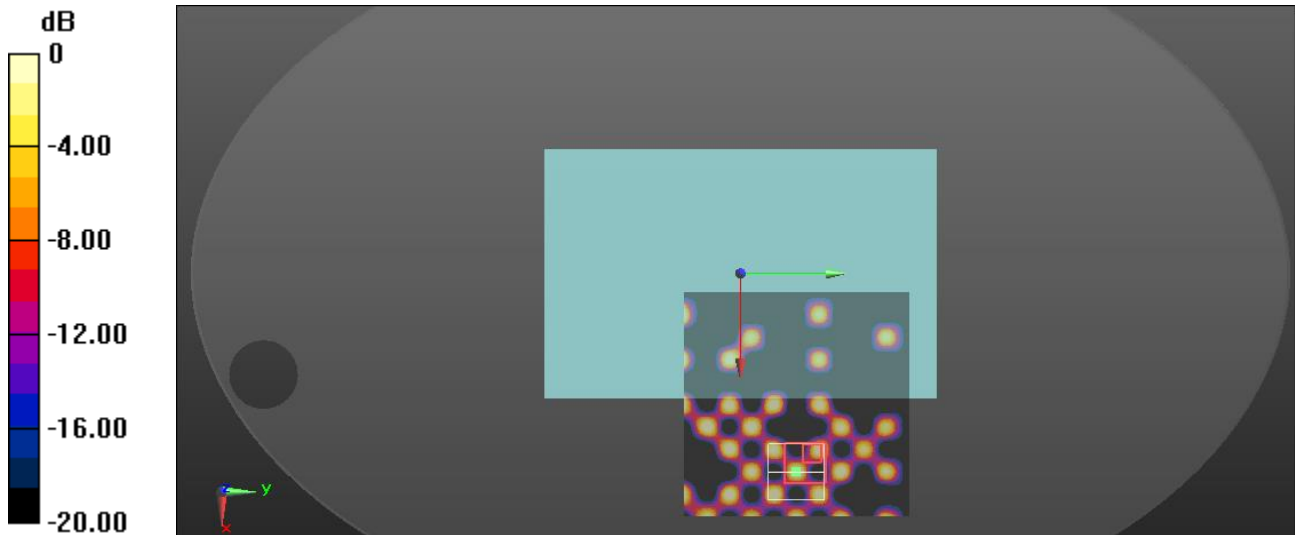

0 dB = 0.00337 W/kg = -24.72 dBW/kg

WCDMA Band V_Edge 4_Ch 4233_0mm_Repeated one


Frequency: 846.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.1°C; Liquid Temperature: 22.4°C
Medium parameters used: $f = 847$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(9.45, 9.45, 9.45) @ 846.6 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 4/Ch 4233_0mm_Repeated one/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.25 W/kg

Edge 4/Ch 4233_0mm_Repeated one/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 33.21 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 2.05 W/kg
SAR(1 g) = 0.884 W/kg; SAR(10 g) = 0.413 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 45.8%
Maximum value of SAR (measured) = 1.44 W/kg

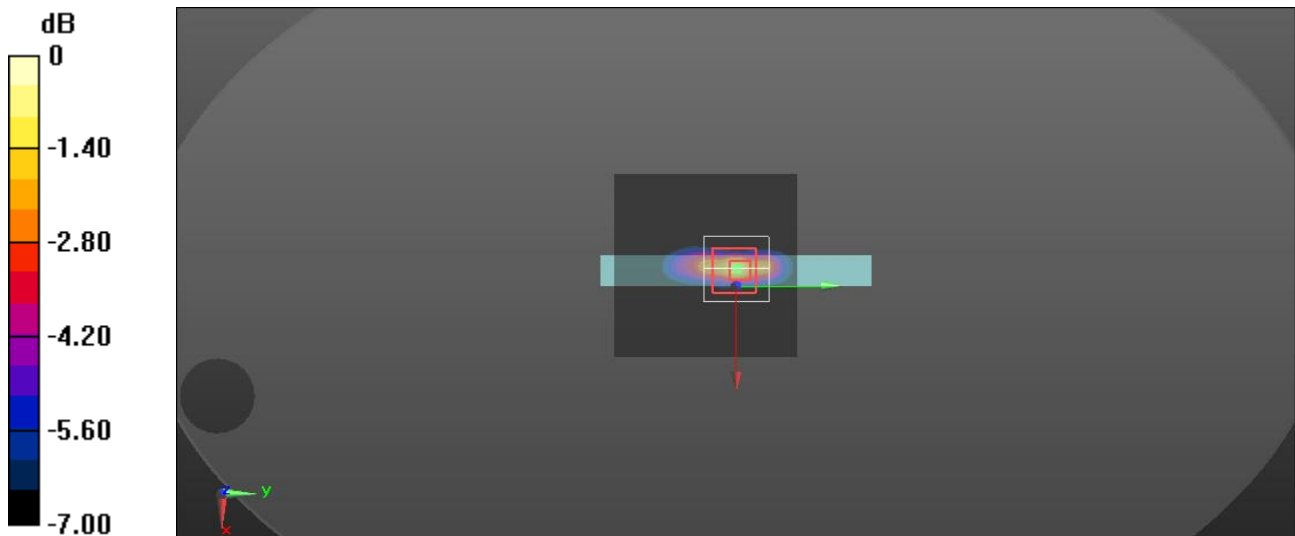

0 dB = 1.44 W/kg = 1.58 dBW/kg

LTE Band 2_Edge 3_Ch 19100_RB_1_49_0mm_Repeated one

Frequency: 1900 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.4°C
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 38.933$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(8.32, 8.32, 8.32) @ 1900 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 3/Ch 19100_RB_1_49_0mm_Repeated one/Area Scan (61x101x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.98 W/kg

Edge 3/Ch 19100_RB_1_49_0mm_Repeated one/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 36.16 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 2.67 W/kg

SAR(1 g) = 1.41 W/kg; SAR(10 g) = 0.759 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 2.09 W/kg

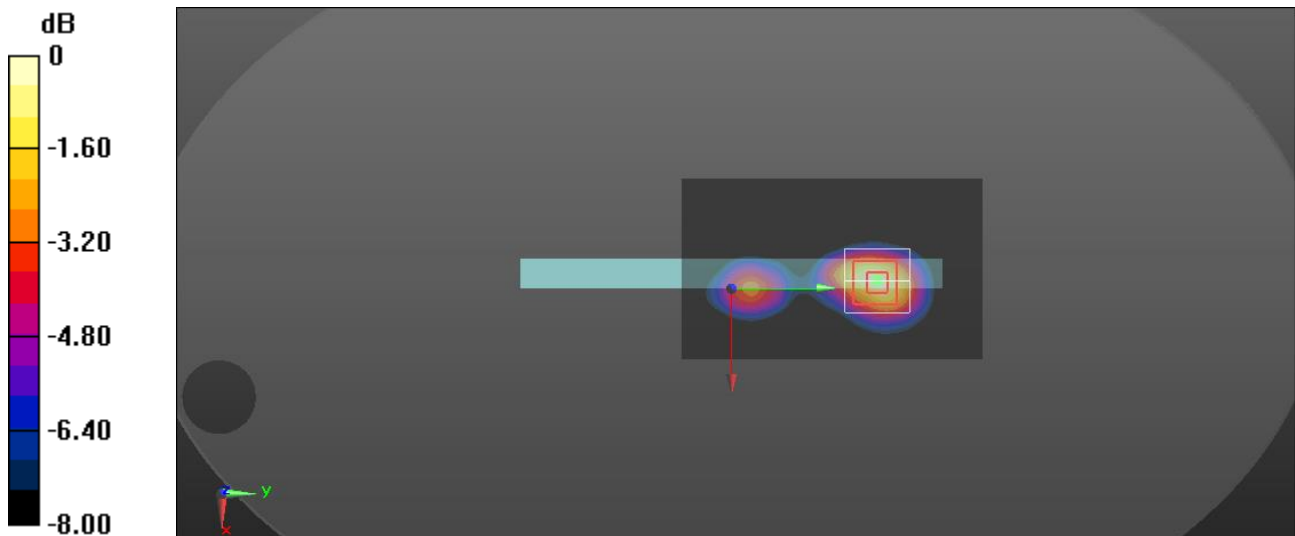

0 dB = 2.09 W/kg = 3.20 dBW/kg

LTE Band 5_Edge 4_Ch 20600_RB_1_0_0mm_Repeated one

Frequency: 844 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.1°C; Liquid Temperature: 22.4°C
Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 41.394$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(9.45, 9.45, 9.45) @ 844 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 4/Ch 20600_RB_1_0_0mm_Repeated one/Area Scan (61x101x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.45 W/kg

Edge 4/Ch 20600_RB_1_0_0mm_Repeated one/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 47.02 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 2.63 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.496 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 45.2%

Maximum value of SAR (measured) = 1.67 W/kg

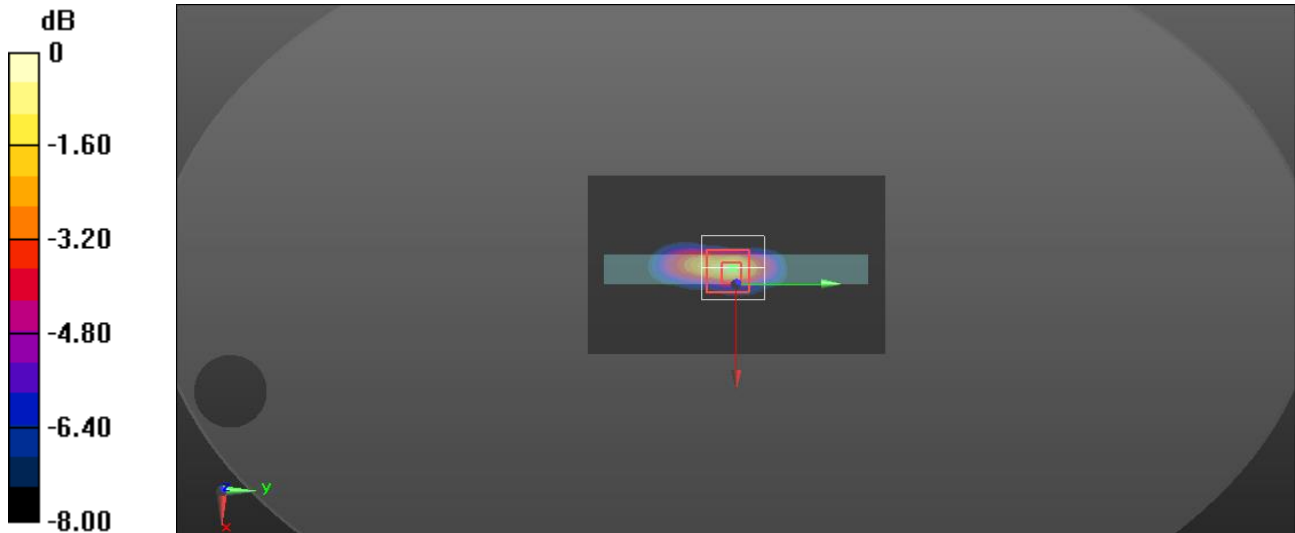

0 dB = 1.67 W/kg = 2.23 dBW/kg

LTE Band 7_Edge 4_Ch 20850_RB_1_0_3mm_Repeated one

Frequency: 2510 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.7°C; Liquid Temperature: 22.4°C
Medium parameters used: $f = 2510$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 37.496$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(7.38, 7.38, 7.38) @ 2510 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 4/Ch 20850_RB_1_0_3mm_Repeated one/Area Scan (81x111x1): Interpolated grid:

$dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.44 W/kg

Edge 4/Ch 20850_RB_1_0_3mm_Repeated one/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 14.63 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 2.63 W/kg

SAR(1 g) = 0.974 W/kg; SAR(10 g) = 0.373 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 40.8%

Maximum value of SAR (measured) = 1.66 W/kg

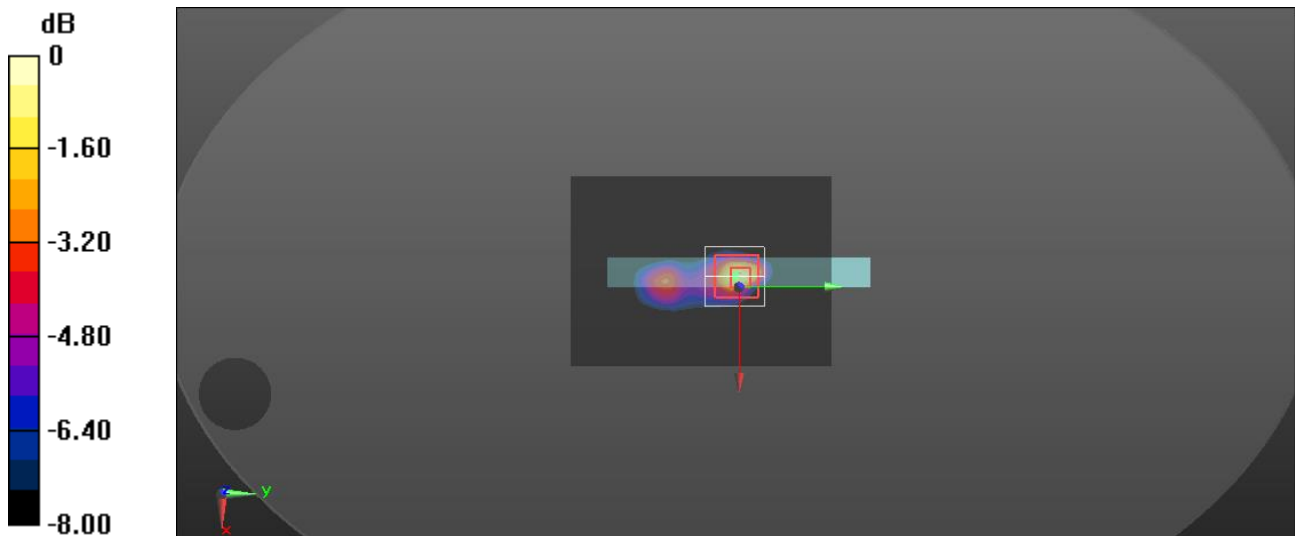

0 dB = 1.66 W/kg = 2.20 dBW/kg

LTE Band 13_Edge 4_Ch 23230_RB_1_0_0mm_Repeated one

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 22.2°C
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 41.957$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(9.79, 9.79, 9.79) @ 782 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 4/Ch 23230_RB_1_0_0mm_Repeated one/Area Scan (61x91x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.29 W/kg

Edge 4/Ch 23230_RB_1_0_0mm_Repeated one/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 40.15 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 0.860 W/kg; SAR(10 g) = 0.392 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 45.6%

Maximum value of SAR (measured) = 1.26 W/kg

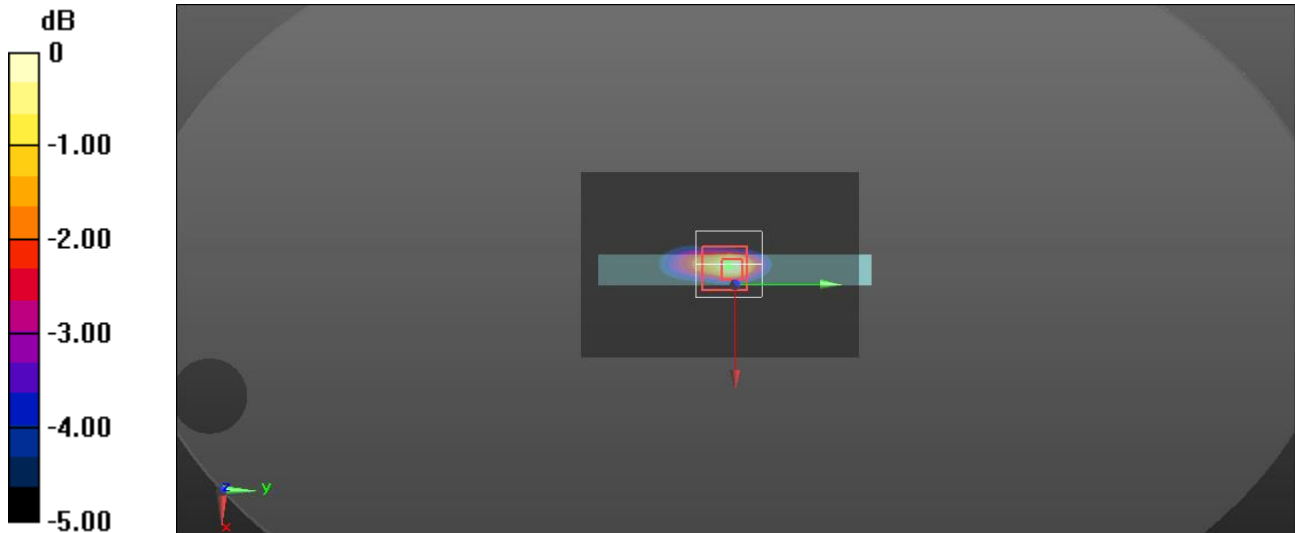

0 dB = 1.26 W/kg = 1.00 dBW/kg

LTE Band 14_Edge 4_Ch 23330_RB_1_0_0mm_Repeated one

Frequency: 793 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C
Medium parameters used: $f = 793 \text{ MHz}$; $\sigma = 0.928 \text{ S/m}$; $\epsilon_r = 40.12$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(9.79, 9.79, 9.79) @ 793 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 4/Ch 23330_RB_1_0_0mm_Repeated one/Area Scan (81x71x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.50 W/kg

Edge 4/Ch 23330_RB_1_0_0mm_Repeated one/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 41.20 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 0.888 W/kg; SAR(10 g) = 0.405 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 38.9%

Maximum value of SAR (measured) = 1.54 W/kg

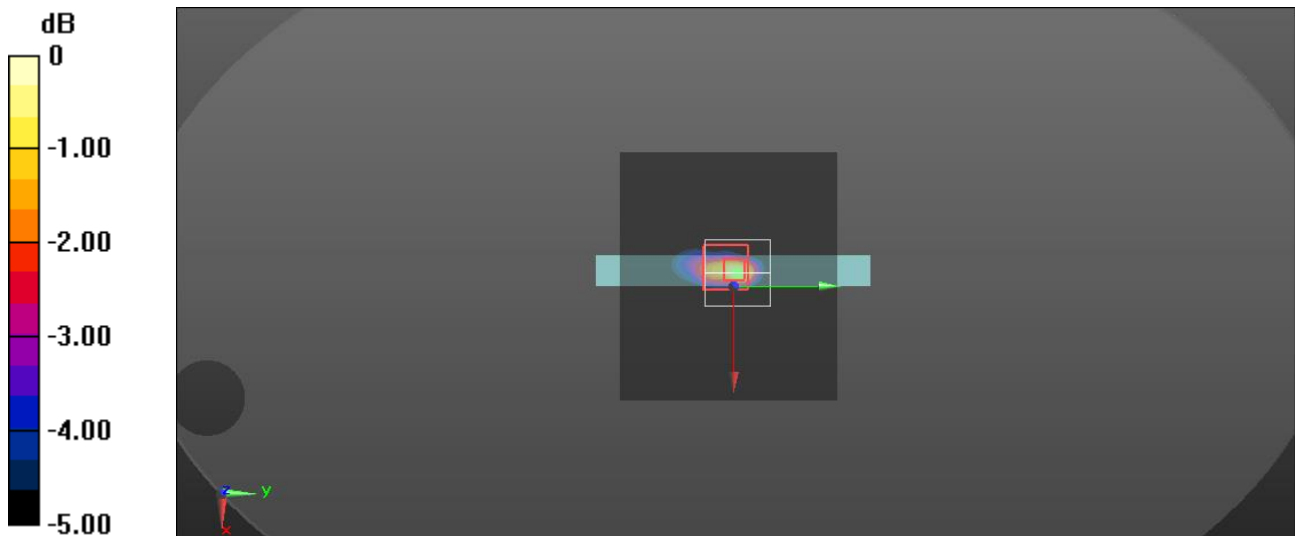

0 dB = 1.54 W/kg = 1.88 dBW/kg

LTE Band 25_Edge 3_Ch 26590_RB_1_0_0mm_Repeated one


Frequency: 1905 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C
Medium parameters used: $f = 1905$ MHz; $\sigma = 1.458$ S/m; $\epsilon_r = 39.146$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(8.32, 8.32, 8.32) @ 1905 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 3/Ch 26590_RB_1_0_0mm_Repeated one/Area Scan (61x71x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.03 W/kg

Edge 3/Ch 26590_RB_1_0_0mm_Repeated one/Zoom Scan (5x5x7)/Cube 0:
Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 27.11 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 2.66 W/kg
SAR(1 g) = 1.38 W/kg; SAR(10 g) = 0.739 W/kg
Smallest distance from peaks to all points 3 dB below = 10.7 mm
Ratio of SAR at M2 to SAR at M1 = 51.4%
Maximum value of SAR (measured) = 2.07 W/kg

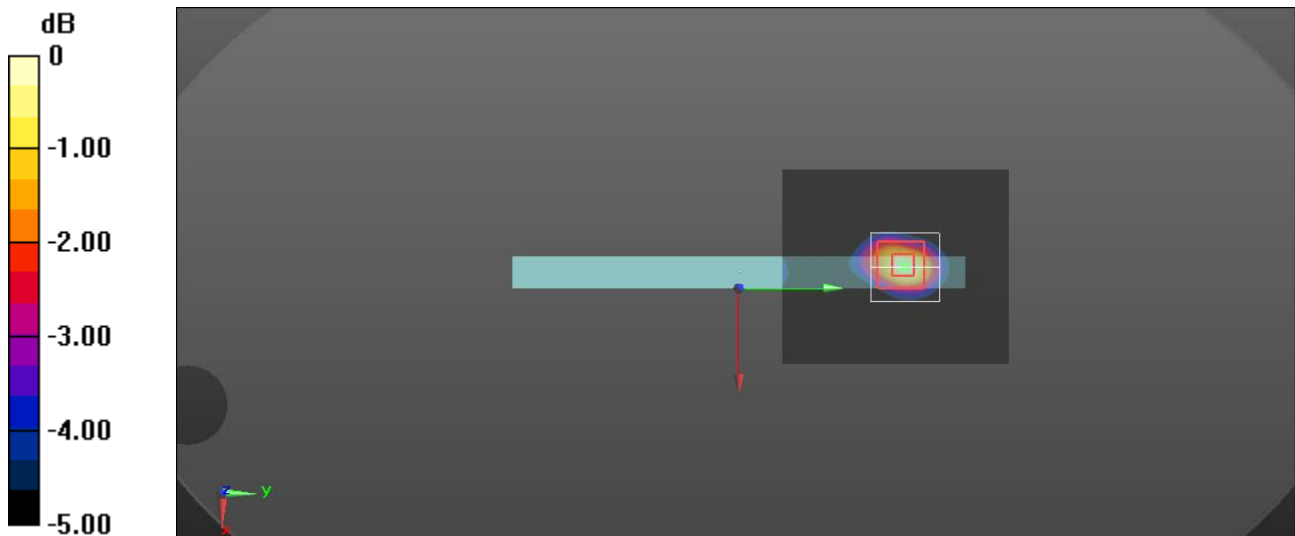

0 dB = 2.07 W/kg = 3.16 dBW/kg

LTE Band 26_Edge 4_Ch 26965_RB_1_0_0mm_Repeated one


Frequency: 841.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.8°C; Liquid Temperature: 22.4°C
Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 40.976$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(9.45, 9.45, 9.45) @ 841.5 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 4/Ch 26965_RB_1_0_0mm_Repeated one/Area Scan (71x71x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.17 W/kg

Edge 4/Ch 26965_RB_1_0_0mm_Repeated one/Zoom Scan (5x5x7)/Cube 0:
Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 40.33 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 2.10 W/kg
SAR(1 g) = 0.912 W/kg; SAR(10 g) = 0.420 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 45%
Maximum value of SAR (measured) = 1.42 W/kg

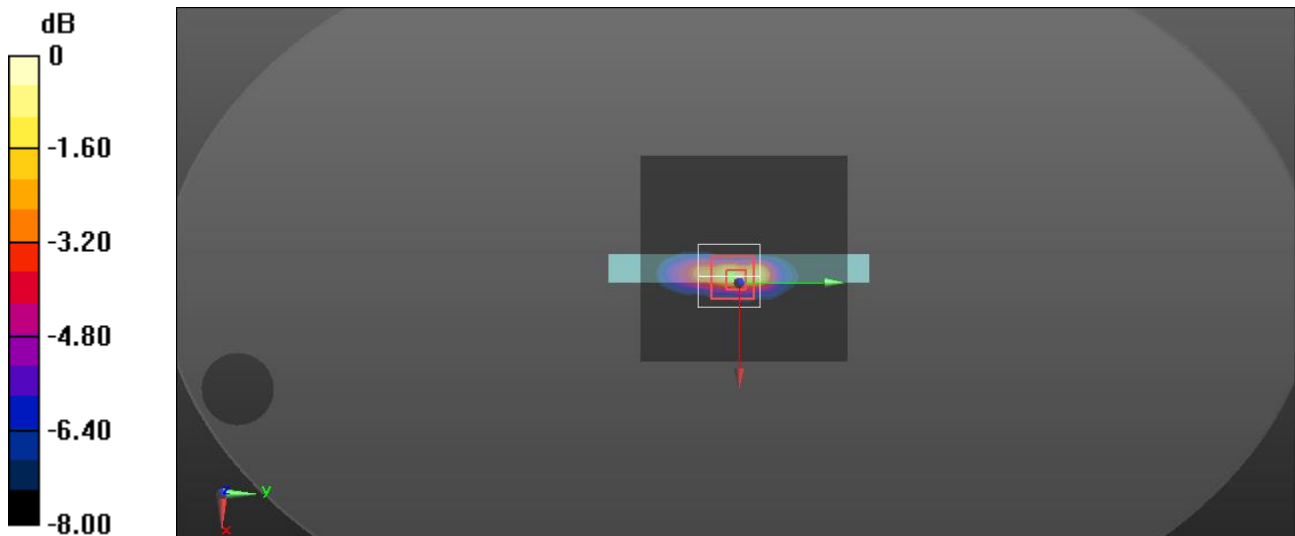

0 dB = 1.42 W/kg = 1.52 dBW/kg

LTE Band 66_Rear_Ch 132072_RB_50_0_0mm_Repeated one


Frequency: 1720 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.2°C; Liquid Temperature: 22.1°C
Medium parameters used: $f = 1720$ MHz; $\sigma = 1.31$ S/m; $\epsilon_r = 40.667$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(8.61, 8.61, 8.61) @ 1720 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Rear/Ch 132072_RB_50_0_0mm_Repeated one/Area Scan (61x81x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.37 W/kg

Rear/Ch 132072_RB_50_0_0mm_Repeated one/Zoom Scan (5x5x7)/Cube 0:
Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 31.63 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 1.59 W/kg
SAR(1 g) = 0.928 W/kg; SAR(10 g) = 0.527 W/kg
Smallest distance from peaks to all points 3 dB below = 13.7 mm
Ratio of SAR at M2 to SAR at M1 = 61%
Maximum value of SAR (measured) = 1.25 W/kg

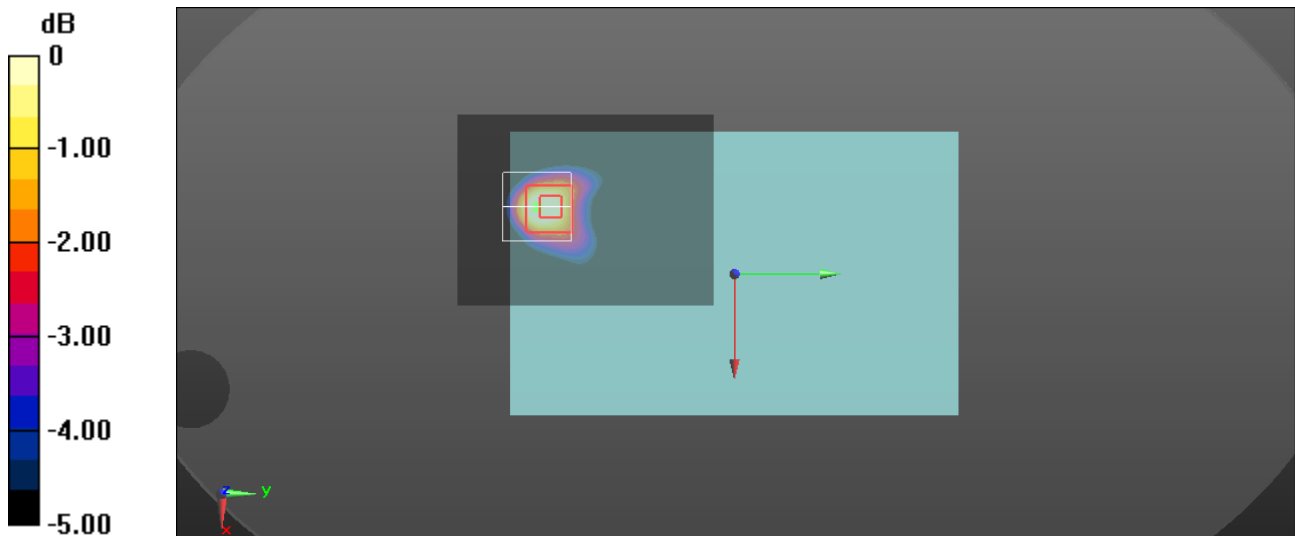

0 dB = 1.25 W/kg = 0.97 dBW/kg

LTE Band 71_Edge 4_Ch 133372_RB_1_0_0mm_Repeated one

Frequency: 688 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C
Medium parameters used: $f = 688 \text{ MHz}$; $\sigma = 0.855 \text{ S/m}$; $\epsilon_r = 41.529$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn547; Calibrated: 2023/1/24
- Probe: EX3DV4 - SN3665; ConvF(9.79, 9.79, 9.79) @ 688 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Edge 4/Ch 133372_RB_1_0_0mm_Repeated one/Area Scan (61x91x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.65 W/kg

Edge 4/Ch 133372_RB_1_0_0mm_Repeated one/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 35.34 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.43 W/kg

SAR(1 g) = 0.807 W/kg; SAR(10 g) = 0.398 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 37.1%

Maximum value of SAR (measured) = 1.49 W/kg

Edge 4/Ch 133372_RB_1_0_0mm_Repeated one/Zoom Scan (5x5x7)/Cube 1:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 35.34 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.858 W/kg; SAR(10 g) = 0.480 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 1.29 W/kg

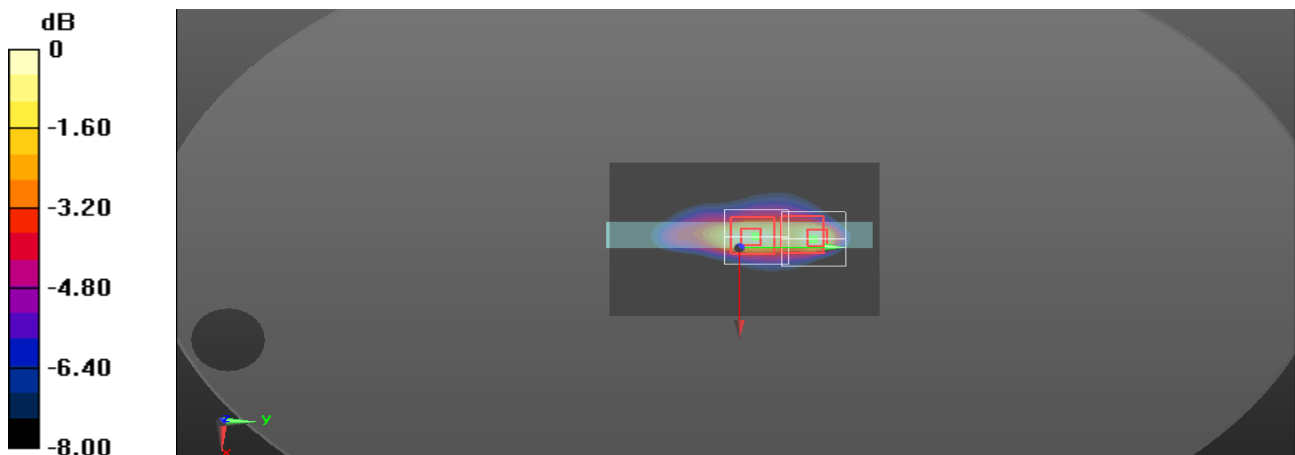

0 dB = 1.29 W/kg = 1.11 dBW/kg