



# FCC RADIO TEST REPORT

**FCC ID** : P4Q-N672A  
**Equipment** : Smart Module  
**Brand Name** : MiTAC, Mio, NAVMAN, MAGELLAN  
**Model Name** : SC600T-WF  
**Applicant** : MiTAC Digital Technology Corporation  
4F., NO. 1, R&D ROAD 2, HSINCHU SCIENCE  
PARK, HSINCHU 30076, TAIWAN, R.O.C.  
**Manufacturer** : MITAC Computer (Kunshan) Co., Ltd.  
No. 269, 2nd Avenue, District A,  
Comprehensive Free Trade Zone, 300  
Kunshan, China  
**Standard** : FCC Part 15 Subpart C §15.247

The product was received on Dec. 09, 2020 and testing was started from Dec. 25, 2020 and completed on Feb. 04, 2021. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Reviewed by: Louis Wu

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	7
1.3 Testing Location .....	7
1.4 Applicable Standards.....	7
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>8</b>
2.1 Carrier Frequency Channel .....	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system .....	10
2.5 EUT Operation Test Setup .....	10
<b>3 Test Result.....</b>	<b>11</b>
3.1 Output Power Measurement.....	11
3.2 Radiated Band Edges and Spurious Emission Measurement .....	12
3.3 AC Conducted Emission Measurement.....	16
3.4 Antenna Requirements .....	18
<b>4 List of Measuring Equipment .....</b>	<b>19</b>
<b>5 Uncertainty of Evaluation.....</b>	<b>21</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission</b>	
<b>Appendix D. Radiated Spurious Emission Plots</b>	
<b>Appendix E. Duty Cycle Plots</b>	
<b>Appendix F. Setup Photographs</b>	





## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.247(a)(1)	Number of Channels	-	See Note
-	15.247(a)(1)	Hopping Channel Separation	-	See Note
-	15.247(a)(1)	Dwell Time of Each Channel	-	See Note
-	15.247(a)(1)	20dB Bandwidth	-	See Note
-	2.1049	99% Occupied Bandwidth	-	See Note
3.1	15.247(b)(1)	Peak Output Power	Pass	-
-	15.247(d)	Conducted Band Edges	-	See Note
-	15.247(d)	Conducted Spurious Emission	-	See Note
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	Under limit 7.03 dB at 30.810 MHz
3.3	15.207	AC Conducted Emission	Pass	Under limit 16.15 dB at 0.573 MHz
3.4	15.203 & 15.247(b)	Antenna Requirement	Pass	-

**Note:** The module (Model: SC600T-WF) makes no difference after verifying output power, this report reuses test data from the module report.

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Wii Chang**

**Report Producer: Ruby Zou**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n and Wi-Fi 5GHz 802.11a/n/ac.

Product Specification subjective to this standard	
Sample 1	EUT with Host 1
Sample 2	EUT with Host 2
Antenna Type	WLAN: PIFA Antenna Bluetooth: PIFA Antenna

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	0.7 dBi

**Remark:** The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

The product was installed into Tablet (Brand Name: MiTAC, Mio, NAVMAN, MAGELLAN, Model Name: N672A) during test, and the host information was recorded in the following table.

Host Information	
Host 1	Host with SKU A
Host 2	Host with SKU B

Host Sample Information		
Functions	SKU A	SKU B
Screen	5" 720x1280 (HD), IPS, 350nits (w/ touch)	5" 720x1280 (HD), IPS, 350nits (w/ touch)
CPU	SD625 octa core 2.0GHz	SD625 octa core 2.0GHz
battery	4110mAh (hard pack)	4110mAh (hard pack)
RAM	3GB	3GB
Storage	32GB	32GB
External storage	Support	Support
WLAN Module	Support (SC600T-WF)	Support (SC600T-WF)
NFC/RFID(HF)	Support	Support
GPS	Not Support	Not Support
Barcode	Support (N6603)	Support (N3601)



Host Sample Information		
Functions	SKU D	SKU E
Screen	5" 720x1280 (HD), IPS, 350nits (w/ touch)	5" 720x1280 (HD), IPS, 350nits (w/ touch)
CPU	SD625 octa core 2.0GHz	SD625 octa core 2.0GHz
battery	4110mAh (hard pack),	4110mAh (hard pack),
RAM	2GB	2GB
Storage	16GB	16GB
External storage	Support	Support
WLAN Module	Support (SC600T-WF)	Support (SC600T-WF)
NFC/RFID(HF)	Support	Support
GPS	Not Support	Not Support
Barcode	Support(N6603)	Support(N3601)

Host Sample Information	
Functions	SKU F
Screen	5" 720x1280 (HD), IPS, 350nits (w/ touch)
CPU	SD625 octa core 2.0GHz
battery	4110mAh (hard pack),
RAM	2GB
Storage	16GB
External storage	Support
WLAN Module	Support (SC600T-WF)
NFC/RFID(HF)	Support
GPS	Not Support
Barcode	Not Support



## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.3 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b> TH05-HY, CO05-HY, 03CH07-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190

## 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-





## 2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Radiated Test Cases	<b>Bluetooth BR 1Mbps GFSK</b>
	Mode 1: CH00_2402 MHz
	Mode 2: CH39_2441 MHz
	Mode 3: CH78_2480 MHz
<b>AC Conducted Emission</b>	Mode 1 :WLAN (2.4GHz) Link + Bluetooth Link + H-Pattern + Battery + U Cable (Charging from Adapter) + Earphone for Sample 1
<b>Remark:</b> For radiated test cases, the worst mode data rate 1Mbps was reported only since the highest RF output power in the preliminary tests. The conducted spurious emissions and conducted band edge measurement for other data rates were not worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission.	

### 2.3 Connection Diagram of Test System



### 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY700A2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

### 2.5 EUT Operation Test Setup

The RF test items, utility “QRCT Ver.3.0.297.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

### **3 Test Result**

#### **3.1 Output Power Measurement**

##### **3.1.1 Limit of Output Power**

The maximum peak conducted output power of the intentional radiator shall not exceed the following:  
For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.


##### **3.1.2 Measuring Instruments**

See list of measuring equipment of this test report.

##### **3.1.3 Test Procedures**

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
1. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power with cable loss and record the results in the test report.
4. Measure and record the results in the test report.

##### **3.1.4 Test Setup**

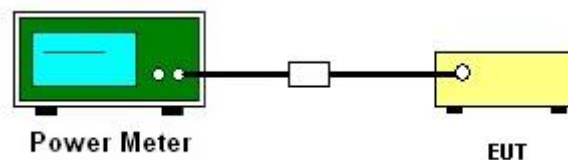

##### **3.1.5 Test Result of Peak Output Power**

Please refer to Appendix A.

##### **3.1.6 Test Result of Average Output Power (Reporting Only)**

Please refer to Appendix A.



### 3.2 Radiated Band Edges and Spurious Emission Measurement

#### 3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


**3.2.3 Test Procedures**

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1 \text{ GHz}$ , RBW=1MHz for  $f > 1\text{GHz}$  ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (5.78dB) derived from  $20 \log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.2.4 Test Setup


For radiated test below 30MHz

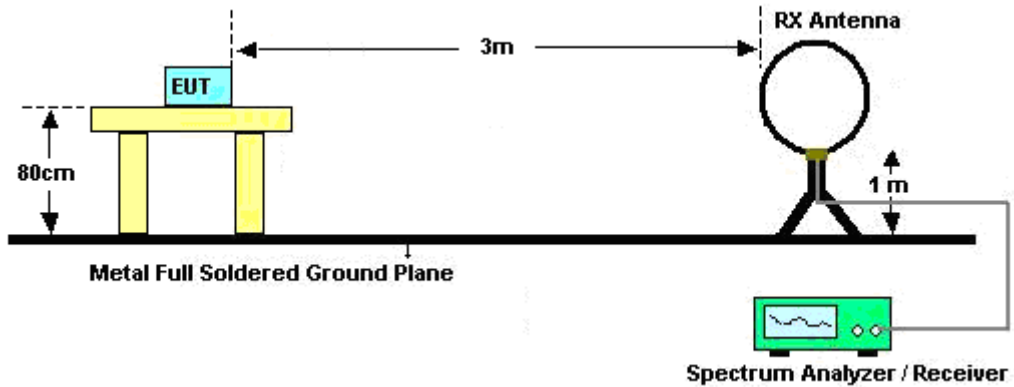


For radiated test from 30MHz to 1GHz

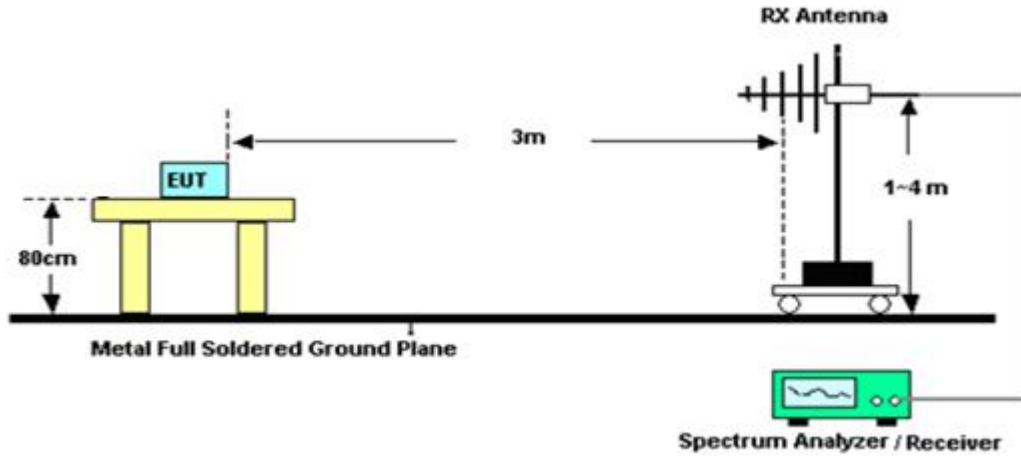

For radiated test from 1GHz to 18GHz

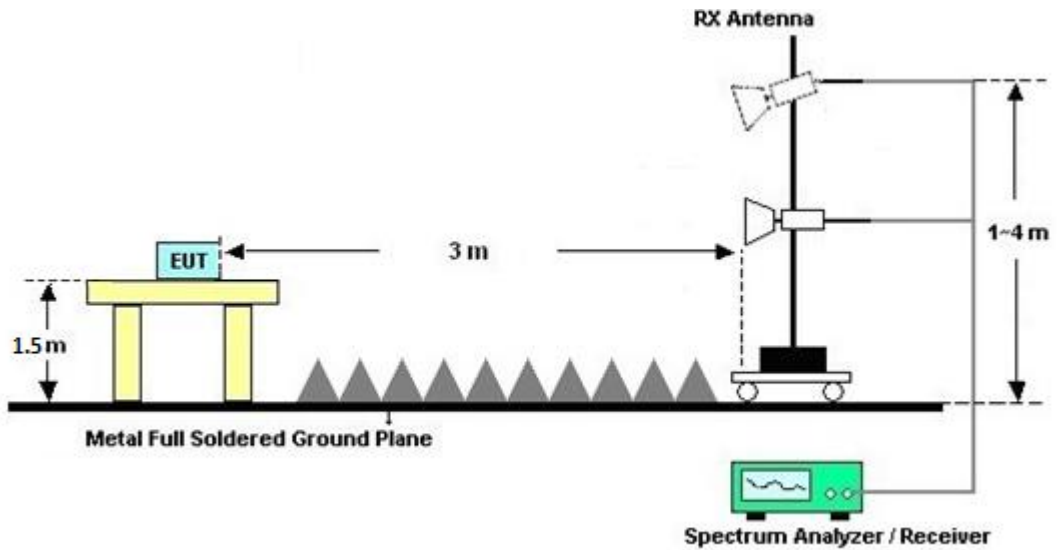

For radiated test above 18GHz

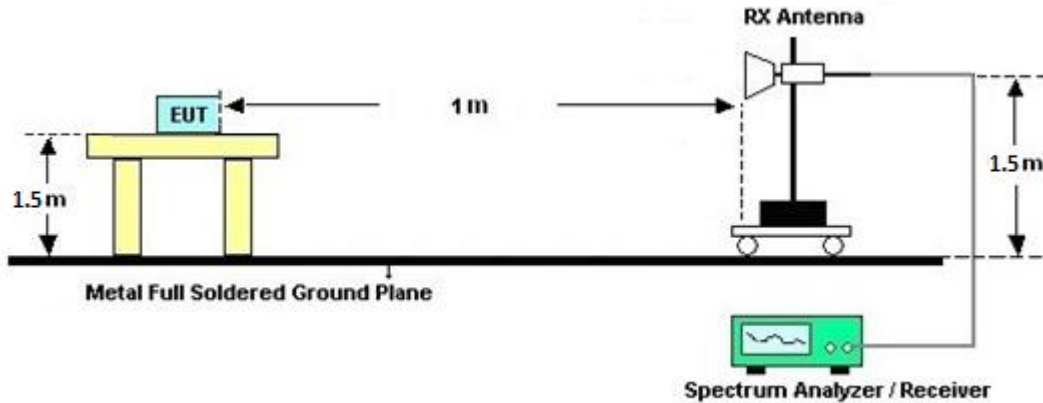

### 3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

### 3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.2.7 Duty Cycle

Please refer to Appendix E.

### 3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix C and D.



### 3.3 AC Conducted Emission Measurement

#### 3.3.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.3.2 Measuring Instruments


See list of measuring equipment of this test report.

#### 3.3.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.



### 3.3.4 Test Setup

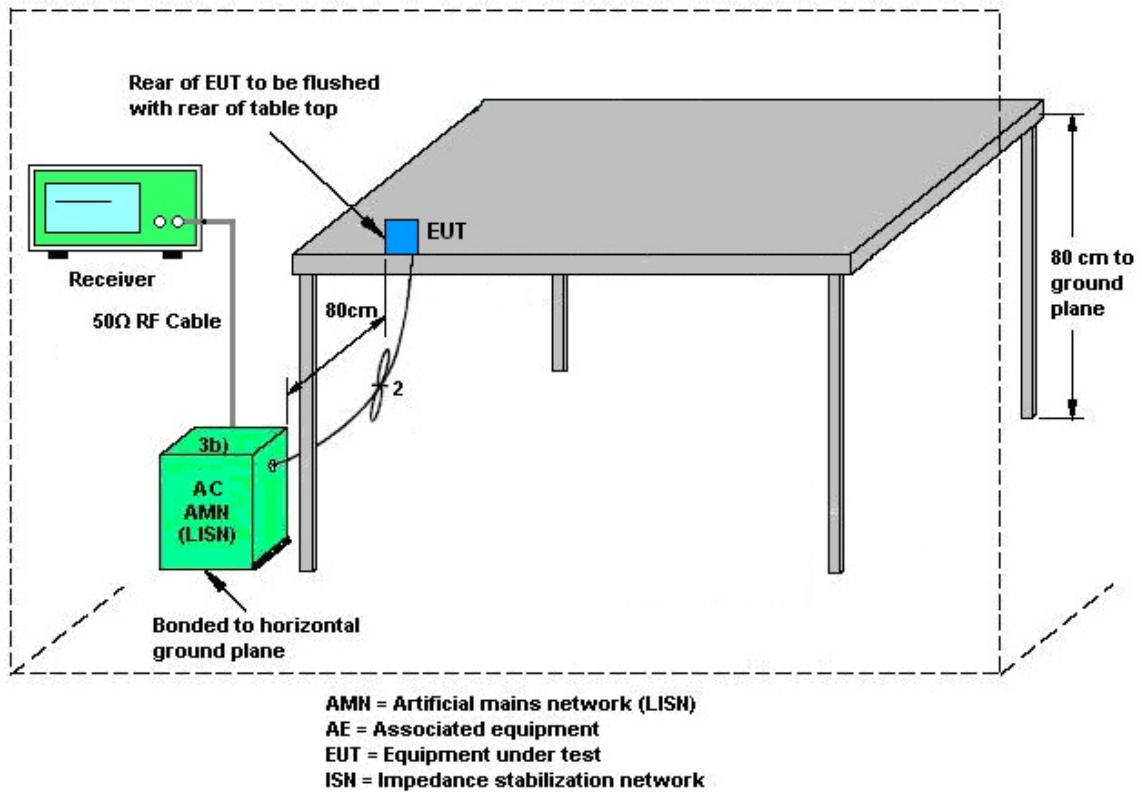

### 3.3.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.4 Antenna Requirements**

### **3.4.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.4.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.4.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Jan. 06, 2021~ Feb. 04, 2021	Jan. 03, 2022	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D0 1N-06	35419 & 03	30MHz~1GHz	Apr. 29, 2020	Jan. 06, 2021~ Feb. 04, 2021	Apr. 28, 2021	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 01, 2020	Jan. 06, 2021~ Feb. 04, 2021	Nov. 30, 2021	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91702 51	18GHz~40GHz	Dec. 02, 2020	Jan. 06, 2021~ Feb. 04, 2021	Dec. 01, 2021	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A(MX E)	MY5329005 3	20Hz~26.5GHz	May 21, 2020	Jan. 06, 2021~ Feb. 04, 2021	May 20, 2021	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY5235027 6	3Hz~44GHz	Jun. 09, 2020	Jan. 06, 2021~ Feb. 04, 2021	Jun. 08, 2021	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	May 19, 2020	Jan. 06, 2021~ Feb. 04, 2021	May 18, 2021	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-001 01800-30-10 P	1590075	1GHz~18GHz	Apr. 23, 2020	Jan. 06, 2021~ Feb. 04, 2021	Apr. 22, 2021	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A0236 2	1GHz~26.5GHz	Oct. 31, 2020	Jan. 06, 2021~ Feb. 04, 2021	Oct. 30, 2021	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18GHz~40GHz	Jul. 31, 2020	Jan. 06, 2021~ Feb. 04, 2021	Jul. 30, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2,8 01606/2	18GHz~40GHz	Feb. 25, 2020	Jan. 06, 2021~ Feb. 04, 2021	Feb. 24, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971/4, MY28655/4	9kHz~30MHz	Feb. 25, 2020	Jan. 06, 2021~ Feb. 04, 2021	Feb. 24, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	30MHz~1GHz	Feb. 25, 2020	Jan. 06, 2021~ Feb. 04, 2021	Feb. 24, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	1GHz~18GHz	Feb. 25, 2020	Jan. 06, 2021~ Feb. 04, 2021	Feb. 24, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	N/A	Jan. 06, 2021~ Feb. 04, 2021	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Jan. 06, 2021~ Feb. 04, 2021	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jan. 06, 2021~ Feb. 04, 2021	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB249 5	N/A	N/A	Jan. 06, 2021~ Feb. 04, 2021	N/A	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	N/A	N/A	N/A	Jan. 06, 2021~ Feb. 04, 2021	N/A	Radiation (03CH07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 02, 2020	Dec. 30, 2020	Mar. 01, 2021	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Aug. 12, 2020	Dec. 30, 2020	Aug. 11, 2021	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz ~ 40GHz	Jul. 22, 2020	Dec. 30, 2020	Jul. 21, 2021	Conducted (TH05-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2020	Dec. 30, 2020	Mar. 16, 2021	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Dec. 25, 2020	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 11, 2020	Dec. 25, 2020	Sep. 10, 2021	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 18, 2020	Dec. 25, 2020	Nov. 17, 2021	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 16, 2020	Dec. 25, 2020	Nov. 15, 2021	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Dec. 25, 2020	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2020	Dec. 25, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 02, 2020	Dec. 25, 2020	Jan. 01, 2021	Conduction (CO05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3
---	-----

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.7
---	-----

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.3
---	-----

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0
---	-----

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Jacob Yu	Temperature:	22.6	°C
Test Date:	2020/12/30	Relative Humidity:	56.3	%

**TEST RESULTS DATA****Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	<b>8.30</b>	20.97	Pass
	39	1	6.30	20.97	Pass
	78	1	6.85	20.97	Pass
2DH3	0	1	<b>7.92</b>	20.97	Pass
	39	1	5.91	20.97	Pass
	78	1	6.55	20.97	Pass
3DH1	0	1	<b>8.18</b>	20.97	Pass
	39	1	6.15	20.97	Pass
	78	1	6.65	20.97	Pass

**TEST RESULTS DATA****Average Power Table*****(Reporting Only)***

DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	<b>7.79</b>	5.14
	39	1	5.92	5.14
	78	1	6.49	5.14
2DH1	0	1	<b>5.74</b>	5.14
	39	1	3.93	5.14
	78	1	4.49	5.14
3DH1	0	1	<b>5.77</b>	5.14
	39	1	3.98	5.14
	78	1	4.54	5.14




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Tom Lee	Temperature :	23~26°C
		Relative Humidity :	40~50%

# EUT Information

Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

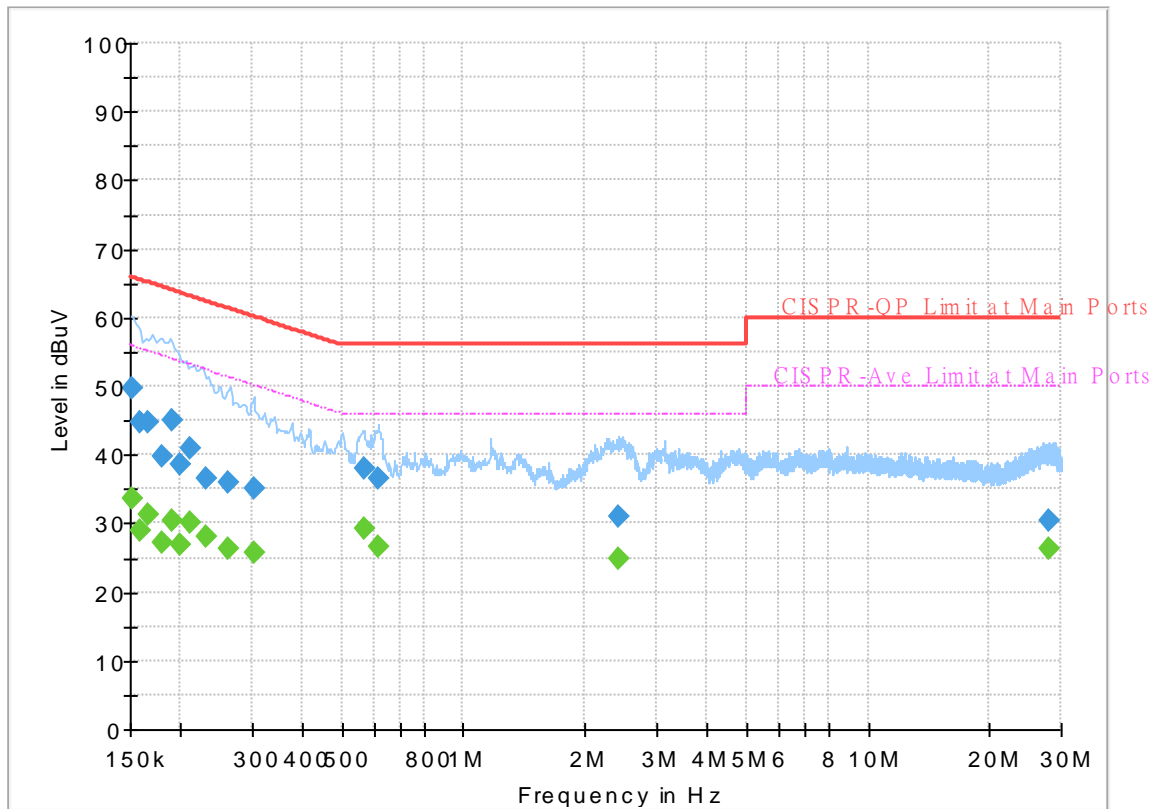

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	33.75	55.88	22.13	L1	OFF	19.6
0.152250	49.69	---	65.88	16.19	L1	OFF	19.6
0.159000	---	28.85	55.52	26.67	L1	OFF	19.6
0.159000	44.66	---	65.52	20.86	L1	OFF	19.6
0.166920	---	31.17	55.11	23.94	L1	OFF	19.6
0.166920	44.71	---	65.11	20.40	L1	OFF	19.6
0.178980	---	27.17	54.53	27.36	L1	OFF	19.6
0.178980	39.78	---	64.53	24.75	L1	OFF	19.6
0.190590	---	30.27	54.01	23.74	L1	OFF	19.6
0.190590	45.05	---	64.01	18.96	L1	OFF	19.6
0.199680	---	27.02	53.62	26.60	L1	OFF	19.6
0.199680	38.70	---	63.62	24.92	L1	OFF	19.6
0.210750	---	30.19	53.18	22.99	L1	OFF	19.5
0.210750	41.05	---	63.18	22.13	L1	OFF	19.5
0.231000	---	28.21	52.41	24.20	L1	OFF	19.5
0.231000	36.48	---	62.41	25.93	L1	OFF	19.5
0.262230	---	26.24	51.36	25.12	L1	OFF	19.5
0.262230	35.82	---	61.36	25.54	L1	OFF	19.5
0.303000	---	25.62	50.16	24.54	L1	OFF	19.5
0.303000	35.07	---	60.16	25.09	L1	OFF	19.5
0.567150	---	29.25	46.00	16.75	L1	OFF	19.6




<b>0.567150</b>	<b>38.04</b>	<b>---</b>	<b>56.00</b>	<b>17.96</b>	<b>L1</b>	<b>OFF</b>	<b>19.6</b>
<b>0.618000</b>	<b>---</b>	<b>26.50</b>	<b>46.00</b>	<b>19.50</b>	<b>L1</b>	<b>OFF</b>	<b>19.6</b>
<b>0.618000</b>	<b>36.53</b>	<b>---</b>	<b>56.00</b>	<b>19.47</b>	<b>L1</b>	<b>OFF</b>	<b>19.6</b>
<b>2.409000</b>	<b>---</b>	<b>24.93</b>	<b>46.00</b>	<b>21.07</b>	<b>L1</b>	<b>OFF</b>	<b>19.7</b>
<b>2.409000</b>	<b>31.02</b>	<b>---</b>	<b>56.00</b>	<b>24.98</b>	<b>L1</b>	<b>OFF</b>	<b>19.7</b>
<b>27.868200</b>	<b>---</b>	<b>26.40</b>	<b>50.00</b>	<b>23.60</b>	<b>L1</b>	<b>OFF</b>	<b>20.5</b>
<b>27.868200</b>	<b>30.42</b>	<b>---</b>	<b>60.00</b>	<b>29.58</b>	<b>L1</b>	<b>OFF</b>	<b>20.5</b>

# EUT Information

Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

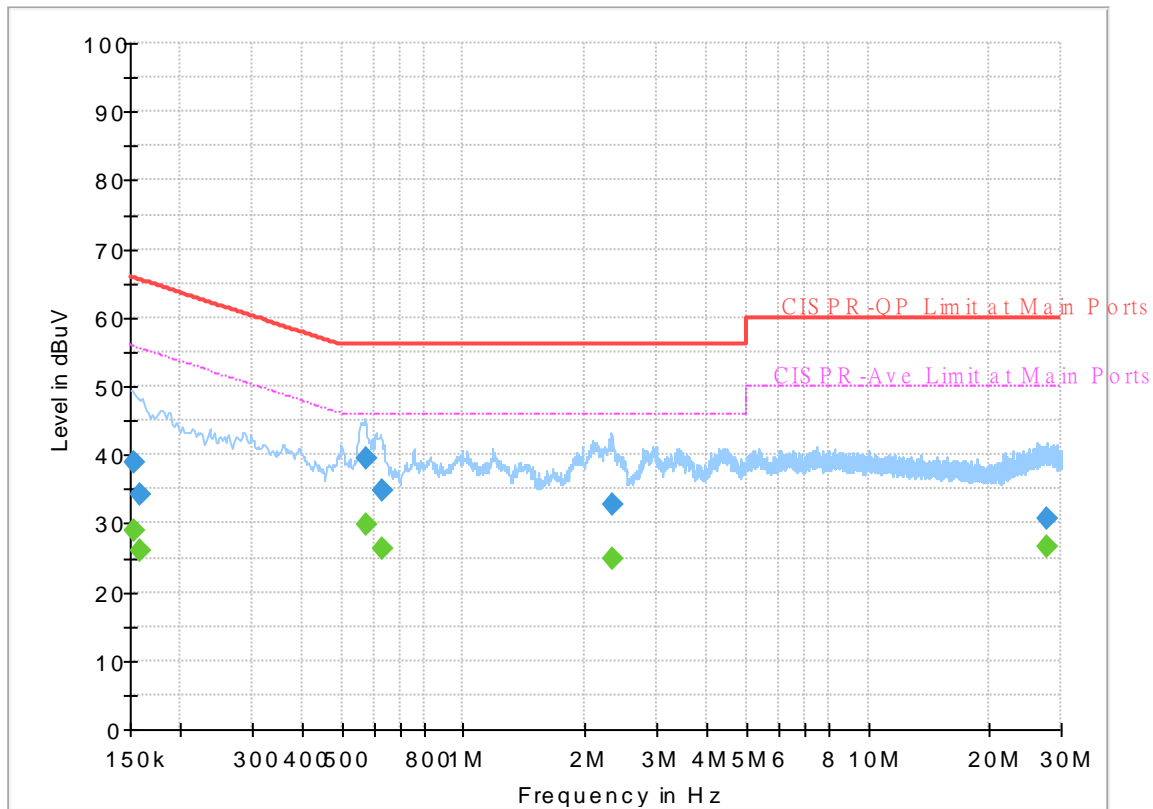

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152768	---	28.95	55.85	26.90	N	OFF	19.6
0.152768	38.87	---	65.85	26.98	N	OFF	19.6
0.159270	---	26.04	55.50	29.46	N	OFF	19.6
0.159270	34.08	---	65.50	31.42	N	OFF	19.6
0.572820	---	29.85	46.00	16.15	N	OFF	19.6
0.572820	39.61	---	56.00	16.39	N	OFF	19.6
0.627000	---	26.31	46.00	19.69	N	OFF	19.6
0.627000	34.85	---	56.00	21.15	N	OFF	19.6
2.328000	---	24.96	46.00	21.04	N	OFF	19.7
2.328000	32.68	---	56.00	23.32	N	OFF	19.7
27.640050	---	26.53	50.00	23.47	N	OFF	20.6
27.640050	30.59	---	60.00	29.41	N	OFF	20.6



### Appendix C. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	20~24°C
		Relative Humidity :	53~59%

<Sample 1>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BT CH 39 2441MHz		2384.2	43.67	-30.33	74	39.24	31.87	7.97	35.41	292	330	P	H
		2384.2	18.88	-35.12	54							A	H
	*	2441	98.69	-	-	93.87	32.2	8.06	35.44	292	330	P	H
	*	2441	73.9	-	-							A	H
		2497.34	44.84	-29.16	74	39.56	32.6	8.14	35.46	292	330	P	H
		2497.34	20.05	-33.95	54							A	H
		2328.06	45.96	-28.04	74	41.71	31.77	7.87	35.39	296	19	P	V
		2328.06	21.17	-32.83	54							A	V
	*	2441	98.02	-	-	93.2	32.2	8.06	35.44	296	19	P	V
	*	2441	73.23	-	-							A	V
		2486.84	43.94	-30.06	74	38.79	32.47	8.13	35.45	296	19	P	V
		2486.84	19.15	-34.85	54							A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)

Table with 14 columns: BT, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Includes data for BT CH 39 2441MHz and a Remark section.



Emission above 18GHz

2.4GHz BT (SHF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BT SHF		21752	35.63	-38.37	74	51.34	38.45	5.89	60.05	100	0	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			24958	35.38	-38.62	74	47	38.96	6.97	57.55	100	0	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BT LF		30	22.83	-17.17	40	27.55	24.32	0.97	30.01	-	-	P	H	
		133.68	26.83	-16.67	43.5	37.21	17.5	2.08	29.96	-	-	P	H	
		157.44	26.53	-16.97	43.5	37.44	16.74	2.3	29.95	-	-	P	H	
		737.5	30.34	-15.66	46	27.64	27.47	4.82	29.59	-	-	P	H	
		850.9	31.18	-14.82	46	26.46	28.74	5.2	29.22	-	-	P	H	
		946.8	33.69	-12.31	46	26.82	29.97	5.62	28.72	100	0	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			30	29.6	-10.4	40	34.32	24.32	0.97	30.01	100	0	P	V
			51.33	24.52	-15.48	40	39.46	13.74	1.31	29.99	-	-	P	V
			164.19	26.05	-17.45	43.5	37.53	16.09	2.37	29.94	-	-	P	V
			743.8	30.09	-15.91	46	27.09	27.73	4.84	29.57	-	-	P	V
			865.6	31.56	-14.44	46	26.54	28.87	5.3	29.15	-	-	P	V
			950.3	32.96	-13.04	46	25.77	30.26	5.63	28.7	-	-	P	V
													V	
												V		
												V		
												V		
												V		
												V		
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



<Sample 2>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT CH 39 2441MHz		2373.28	43.56	-30.44	74	39.15	31.87	7.95	35.41	341	76	P	H
		2373.28	18.8	-35.2	54	-	-	-	-	-	-	A	H
	*	2441	99.91	-	-	95.09	32.2	8.06	35.44	341	76	P	H
	*	2441	75.15	-	-	-	-	-	-	-	-	A	H
		2488.66	44.31	-29.69	74	39.03	32.6	8.13	35.45	341	76	P	H
		2488.66	19.55	-34.45	54	-	-	-	-	-	-	A	H
		2334.22	43.23	-30.77	74	38.97	31.77	7.88	35.39	340	360	P	V
		2334.22	18.47	-35.53	54	-	-	-	-	-	-	A	V
	*	2441	99.42	-	-	94.6	32.2	8.06	35.44	340	360	P	V
	*	2441	74.66	-	-	-	-	-	-	-	-	A	V
		2496.43	44.02	-29.98	74	38.74	32.6	8.14	35.46	340	360	P	V
		2496.43	19.26	-34.74	54	-	-	-	-	-	-	A	V

<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.
---------------	---



2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)

Table with 14 columns: BT, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for BT CH 39 2441MHz and a Remark section.





Emission above 18GHz

2.4GHz BT (SHF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BT SHF		21024	36.12	-37.88	74	52.48	38.1	5.64	60.1	100	0	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			24818	35.44	-38.56	74	47.39	38.85	6.91	57.71	100	0	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BT LF		105.87	28.76	-14.74	43.5	40.28	16.57	1.88	29.97	-	-	P	H	
		160.68	29.82	-13.68	43.5	40.98	16.46	2.33	29.95	-	-	P	H	
		189.3	28.33	-15.17	43.5	40.93	14.79	2.54	29.93	-	-	P	H	
		339.2	31.24	-14.76	46	37.84	19.99	3.3	29.89	-	-	P	H	
		399.4	28.68	-17.32	46	33.07	21.79	3.7	29.88	-	-	P	H	
		957.3	34.52	-11.48	46	27.06	30.47	5.65	28.66	100	0	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
			30.81	32.97	-7.03	40	37.88	24.12	0.98	30.01	100	0	P	V
			32.97	32.95	-7.05	40	38.78	23.16	1.02	30.01	-	-	P	V
			39.72	27.39	-12.61	40	36.85	19.4	1.14	30	-	-	P	V
			340.6	29.23	-16.77	46	35.79	20.02	3.31	29.89	-	-	P	V
			900.6	32.82	-13.18	46	27.46	28.82	5.52	28.98	-	-	P	V
			950.3	33.85	-12.15	46	26.66	30.26	5.63	28.7	-	-	P	V
													V	
													V	
												V		
												V		
												V		
												V		
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	20~24°C
		Relative Humidity :	53~59%



<Sample 1>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH39 2441MHz		
	Horizontal	Fundamental
Peak	<p>Date: 2021-02-03</p> <p>Site : 03CH07-HY  Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL  : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto  Detector : Peak</p>	<p>Date: 2021-02-03</p> <p>Site : 03CH07-HY  Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL  : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto  Detector : Peak</p>
Peak	<p>Date: 2021-02-03</p> <p>Site : 03CH07-HY  Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL  : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto  Detector : Peak</p>	Left blank





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH39 2441MHz		
	Vertical	Fundamental
Peak	<p>Date: 2021-02-03</p> <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF ANT_00075962 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak</p>	<p>Date: 2021-02-03</p> <p>Site : 03CH07-HY            Condition : PEAK_74 3m HF ANT_00075962 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak</p>
Peak	<p>Date: 2021-02-03</p> <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF ANT_00075962 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak</p>	Left blank



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

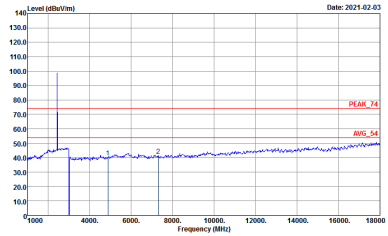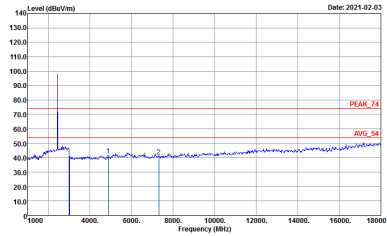BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BT CH39 2441MHz		
Horizontal		Vertical
Peak Avg.	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak</p>







Emission above 18GHz  
2.4GHz BT (SHF)

<b>BT</b>	<b>2.4GHz 2400~2483.5MHz</b>	
	<b>BT SHF</b>	
	<b>Horizontal</b>	<b>Vertical</b>
<b>QP / Peak</b>	<p>Site : 03CH07-HY Condition : PEAK_74 1m SHF-EHF_5170251 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH07-HY Condition : PEAK_74 1m SHF-EHF_5170251 VERTICAL Detector : Peak</p>



Emission below 1GHz

2.4GHz BT (LF)

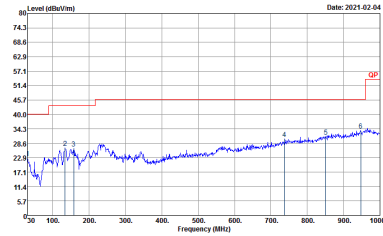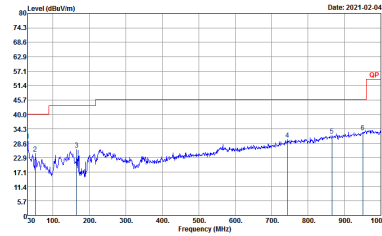BT	2.4GHz 2400~2483.5MHz	
BT LF		
Horizontal		Vertical
QP / Peak	 <p>Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6) HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6) VERTICAL Detector : Peak</p>



<Sample 2>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH39 2441MHz		
	Horizontal	Fundamental
Peak	<p>Date: 2021-02-03</p> <p>Site : 03CH02-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWF:Auto Detector : Peak</p>	<p>Date: 2021-02-03</p> <p>Site : 03CH02-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWF:Auto Detector : Peak</p>
Peak	<p>Date: 2021-02-03</p> <p>Site : 03CH02-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWF:Auto Detector : Peak</p>	Left blank





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT CH39 2441MHz		
	Vertical	Fundamental
Peak	<p>Date: 2021-02-03</p> <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWF:Auto            Detector : Peak</p>	<p>Date: 2021-02-03</p> <p>Site : 03CH07-HY            Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWF:Auto            Detector : Peak</p>
Peak	<p>Date: 2021-02-03</p> <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWF:Auto            Detector : Peak</p>	Left blank



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

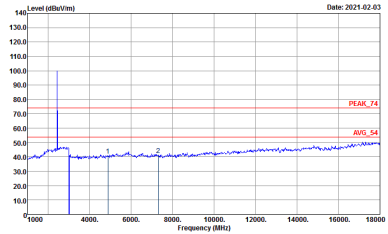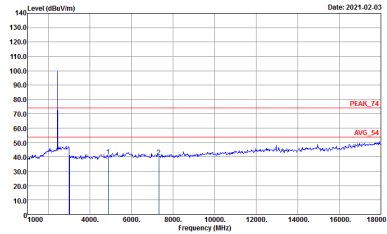BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BT CH39 2441MHz		
Horizontal		Vertical
Peak Avg.	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak</p>




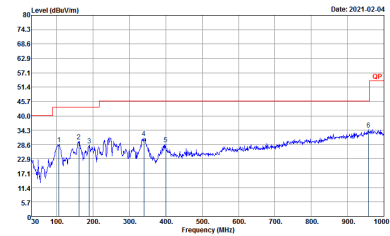
Emission above 18GHz
2.4GHz BT (SHF)

Table with 2 columns: BT (2.4GHz 2400~2483.5MHz) and BT SHF. The BT SHF column is split into Horizontal and Vertical. Each contains a graph of Level (dBm/1m) vs Frequency (MHz) with peak and average values indicated. Includes site and condition details for both graphs.

QP / Peak

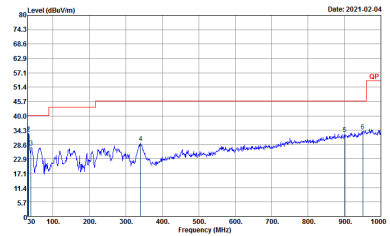


Emission below 1GHz  
2.4GHz BT (LF)

BT	2.4GHz 2400~2483.5MHz	
	BT LF	
	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH07-HY Condition : QP 3m (LF-ANT-35415(6)) HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : QP 3m (LF-ANT-35415(6)) VERTICAL Detector : Peak</p>



# Appendix E. Duty Cycle Plots

<Sample 1>

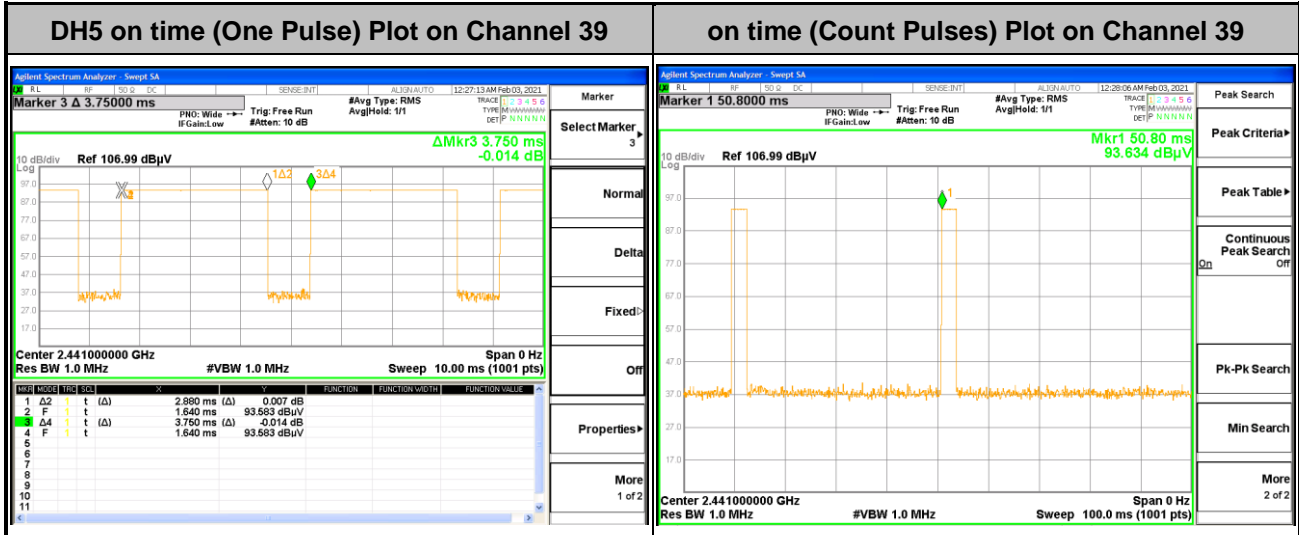

**Note:**

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. **DH5** has the highest duty cycle worst case and is reported.

### Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100 \text{ ms} / 57.6 \text{ ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$


Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100 \text{ ms}) = -24.79 \text{ dB}$$





<Sample 2>

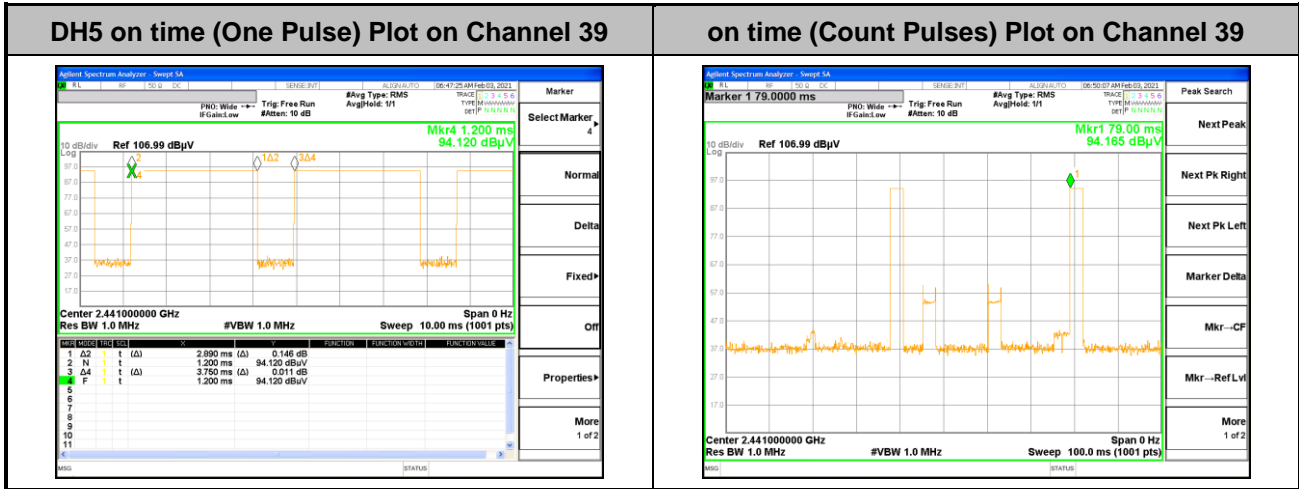

Note:

1. Worst case Duty cycle = on time/100 milliseconds = 2 \* 2.89 / 100 = 5.78 %
2. Worst case Duty cycle correction factor = 20\*log(Duty cycle) = -24.79 dB
3. DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.89 \text{ ms} \times 20 \text{ channels} = 57.8 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. [100 ms / 57.8 ms] = 2 hops

Thus, the maximum possible ON time:

$$2.89 \text{ ms} \times 2 = 5.78 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.78 \text{ ms}/100 \text{ ms}) = -24.79 \text{ dB}$$