

# FCC SAR TEST REPORT

FCC ID : P4Q-N672B  
Equipment : LTE Module  
Brand Name : MiTAC, Mio, NAVMAN, MAGELLAN  
Model Name : SC600T-NA  
Applicant : MiTAC Digital Technology Corporation  
4F., NO. 1, R&D ROAD 2, HSINCHU SCIENCE  
PARK, HSINCHU 30076, TAIWAN, R.O.C.  
Manufacturer : MITAC Computer (Kunshan) Co., Ltd.  
No. 269, 2nd Avenue, District A,  
Comprehensive Free Trade Zone, 300  
Kunshan, China  
Standard : FCC 47 CFR Part 2 (2.1093)

The product was installed into Tablet (Brand Name: MiTAC, Mio, NAVMAN, MAGELLAN, Model Name: N672B) during test.

The product was received on Dec. 27, 2020 and testing was started from Dec. 28, 2020 and completed on Feb. 23, 2021. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

  
Approved by: Cona Huang / Deputy Manager



**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance ..... 4
2. Guidance Applied..... 4
3. Equipment Under Test (EUT) Information..... 5
3.1 General Information ..... 5
3.2 General LTE SAR Test and Reporting Considerations ..... 7
4. RF Exposure Limits.....10
4.1 Uncontrolled Environment.....10
4.2 Controlled Environment.....10
5. Specific Absorption Rate (SAR).....11
5.1 Introduction .....11
5.2 SAR Definition.....11
6. System Description and Setup .....12
6.1 Test Site Location.....12
6.2 E-Field Probe .....13
6.3 Data Acquisition Electronics (DAE) .....13
6.4 Phantom.....14
6.5 Device Holder.....15
7. Measurement Procedures .....16
7.1 Spatial Peak SAR Evaluation.....16
7.2 Power Reference Measurement.....17
7.3 Area Scan .....17
7.4 Zoom Scan.....18
7.5 Volume Scan Procedures.....18
7.6 Power Drift Monitoring.....18
8. Test Equipment List.....19
9. System Verification .....20
9.1 Tissue Verification .....20
9.2 System Performance Check Results.....21
10. RF Exposure Positions .....22
10.1 Ear and handset reference point .....22
10.2 Definition of the cheek position .....23
10.3 Definition of the tilt position .....24
10.4 Body Worn Accessory .....25
10.5 Product Specific Exposure .....25
10.6 Wireless Router.....25
11. UMTS/CDMA/LTE Output Power (Unit: dBm).....26
12. WiFi Output Power (Unit: dBm).....51
13. Bluetooth Exclusions Applied .....54
14. Antenna Location .....55
15. SAR Test Results .....56
15.1 Head SAR .....58
15.2 Hotspot SAR .....61
15.3 Body Worn Accessory SAR.....64
15.4 Product Specific SAR.....66
16. Simultaneous Transmission Analysis.....67
16.1 Head Exposure Conditions .....68
16.2 Hotspot Exposure Conditions.....69
16.3 Body-Worn Accessory Exposure Conditions .....71
16.4 Product Specific Exposure Conditions .....71
17. Uncertainty Assessment .....72
18. References.....72
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos



### History of this test report

Report No.	Version	Description	Issued Date
FA0D1806	01	Initial issue of report	Mar. 04, 2021



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for MiTAC Digital Technology Corporation, LTE Module, SC600T-NA, are as follows.

Table with columns: Equipment Class, Frequency Band, Head (Separation 0mm), Body-worn (Separation 10mm), Hotspot (Separation 10mm), Product Specific (Separation 0mm), Highest Simultaneous Transmission 1g SAR (W/kg). Rows include Licensed (WCDMA II, IV, V, LTE Bands 7, 12/17, 13, 14, 2/25, 5/26, 41, 4/66, 71), DTS (2.4GHz WLAN), and NII (5GHz WLAN).

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No.TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Paula Chen

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013
FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
FCC KDB 865664 D02 SAR Reporting v01r02
FCC KDB 447498 D01 General RF Exposure Guidance v06
FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
FCC KDB 941225 D01 3G SAR Procedures v03r01
FCC KDB 941225 D05 SAR for LTE Devices v02r05
FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
FCC KDB 941225 D06 Hotspot Mode SAR v02r01
FCC KDB 941225 D07 UMPC Mini Tablet v01r02



### 3. Equipment Under Test (EUT) Information

#### 3.1 General Information

Product Feature & Specification	
Equipment Name	LTE Module
Brand Name	MiTAC, Mio, NAVMAN,MAGELLAN
Model Name	SC600T-NA
FCC ID	P4Q-N672B
Integrated WWAN + WLAN Module	Brand Name: Quectel Model Name: SC600T-WF
Wireless Technology and Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz WLAN U-NII 1: 5150 MHz ~ 5250 MHz WLAN U-NII 2: 5250 MHz ~ 5350 MHz WLAN U-NII 3: 5470 MHz ~ 5725 MHz WLAN U-NII 4: 5725 MHz ~ 5825 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
Mode	RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA LTE: QPSK, 16QAM WLAN: 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC:ASK
EUT Stage	Production Unit
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>This device has four SKU, the difference RAM/storage in SKU C/D and does not affect the test. Therefore, RF exposure evaluation selects SKU A as the main tested, SKU B will spot check worst case found in SKU A.</li> <li>This device WLAN 2.4GHz / 5.2GHz / 5.8GHz supports Hotspot operation and support tethering applications.</li> </ol>	

Host Information	
Equipment Name	Tablet
Brand Name	MiTAC, Mio, NAVMAN,MAGELLAN
Model Name	N672B



Functions	SKU A	SKU B	SKU C	SKU D
Screen:	5" 720x1280 (HD), IPS, 350nits (w/ touch)	5" 720x1280 (HD), IPS, 350nits (w/ touch)	5" 720x1280 (HD), IPS, 350nits (w/ touch)	5" 720x1280 (HD), IPS, 350nits (w/ touch)
CPU:	SD625 octa core 2.0GHz	SD625 octa core 2.0GHz	SD625 octa core 2.0GHz	SD625 octa core 2.0GHz
battery:	4110mAh (hard pack),	4110mAh (hard pack),	4110mAh (hard pack),	4110mAh (hard pack),
RAM:	3GB	3GB	2GB	2GB
Storage:	32GB	32GB	16GB	16GB
External storage:	Support	Support	Support	Support
WWAN + WLAN Module	Support (SC600T-NA)	Support (SC600T-NA)	Support (SC600T-NA)	Support (SC600T-NA)
NFC/RFID(HF)	Support	Support	Support	Support
GPS	Support	Support	Support	Support
Barcode	Support(N6603)	Support(N3601)	Support(N6603)	Support(N3601)



3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																										
FCC ID	P4Q-N672B																																																																									
Equipment Name	LTE Module																																																																									
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz																																																																									
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz																																																																									
uplink modulations used	QPSK / 16QAM																																																																									
LTE Voice / Data requirements	Data only																																																																									
LTE MPR permanently built-in by design	<p align="center"><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N<sub>RB</sub>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>												Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)																																																																			
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																				
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																			
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																			
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																			
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																			
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																			
256 QAM	≥ 1						≤ 5																																																																			
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																									
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																									
<b>Transmission (H, M, L) channel numbers and frequencies in each LTE band</b>																																																																										
LTE Band 2																																																																										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz																																																															
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																																														
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860																																																														
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880																																																														
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900																																																														
LTE Band 4																																																																										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz																																																															
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																																														
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720																																																														
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5																																																														
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745																																																														



LTE Band 5												
Bandwidth 1.4 MHz			Bandwidth 3 MHz			Bandwidth 5 MHz			Bandwidth 10 MHz			
Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		
L	20407	824.7	20415	825.5		20425	826.5		20450	829		
M	20525	836.5	20525	836.5		20525	836.5		20525	836.5		
H	20643	848.3	20635	847.5		20625	846.5		20600	844		
LTE Band 7												
Bandwidth 5 MHz			Bandwidth 10 MHz			Bandwidth 15 MHz			Bandwidth 20 MHz			
Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		
L	20775	2502.5	20800	2505		20825	2507.5		20850	2510		
M	21100	2535	21100	2535		21100	2535		21100	2535		
H	21425	2567.5	21400	2565		21375	2562.5		21350	2560		
LTE Band 12												
Bandwidth 1.4 MHz			Bandwidth 3 MHz			Bandwidth 5 MHz			Bandwidth 10 MHz			
Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		
L	23017	699.7	23025	700.5		23035	701.5		23060	704		
M	23095	707.5	23095	707.5		23095	707.5		23095	707.5		
H	23173	715.3	23165	714.5		23155	713.5		23130	711		
LTE Band 13												
Bandwidth 5 MHz						Bandwidth 10 MHz						
Channel #			Freq.(MHz)			Channel #			Freq.(MHz)			
L	23205		779.5			23230			782			
M	23230		782									
H	23255		784.5									
LTE Band 14												
Bandwidth 5 MHz						Bandwidth 10 MHz						
Channel #			Channel #			Channel #			Freq.(MHz)			
L	23305		790.5			23330			793			
M	23330		793									
H	23355		795.5									
LTE Band 17												
Bandwidth 5 MHz						Bandwidth 10 MHz						
Channel #			Freq.(MHz)			Channel #			Freq. (MHz)			
L	23755		706.5			23780			709			
M	23790		710			23790			710			
H	23825		713.5			23800			711			
LTE Band 25												
Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 26												
Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz				
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		





LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770
LTE Band 71												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	133147	665.5	133172	668	133197	670.5	133222	673				
M	133297	680.5	133297	680.5	133297	680.5	133297	680.5				
H	133447	695.5	133422	693	133397	690.5	133372	688				



**4. RF Exposure Limits**

**4.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**4.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **5. Specific Absorption Rate (SAR)**

### **5.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **5.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 6. System Description and Setup

The DASYS system used for performing compliance tests consists of the following items:

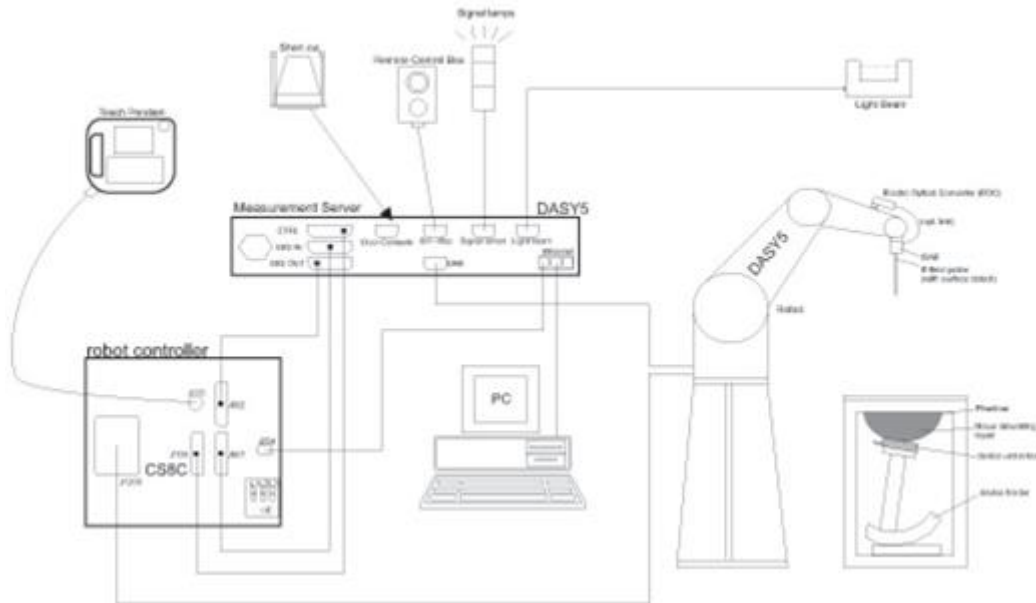

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASYS software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### 6.1 Test Site Location


The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 0007) and the FCC designation No.TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory			
Test Site Location	TW1190 No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, CHINESE TAIPEI		TW0007 No. 58, Aly. 75, Ln. 564, Wehnuia 3rd, Rd., Guishan Dist., Taoyuan City, CHINESE TAIPEI	
	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY
Test Site No.	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY
	SAR06-HY	SAR10-HY		


**6.2 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<ES3DV3 Probe>**

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)	
<b>Directivity</b>	$\pm 0.2$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g – >100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	


**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)	
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g – >100 mW/g Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**6.3 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

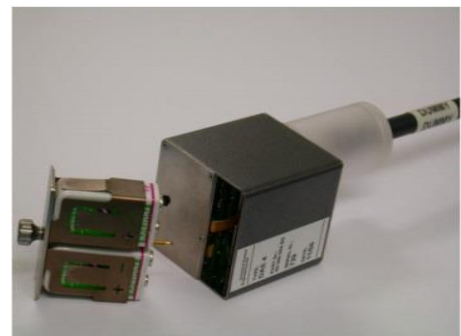

**Fig 5.1 Photo of DAE**


**6.4 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **6.5 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## **7. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **7.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



**7.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**7.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

**7.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**7.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**7.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



### 8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit <sup>(2)</sup>	D750V3	1107	Mar. 08, 2019	Mar. 06, 2021
SPEAG	835MHz System Validation Kit <sup>(2)</sup>	D835V2	4d167	Nov. 25, 2019	Nov. 23, 2021
SPEAG	1750MHz System Validation Kit <sup>(2)</sup>	D1750V2	1112	Mar. 07, 2019	Mar. 05, 2021
SPEAG	1900MHz System Validation Kit <sup>(2)</sup>	D1900V2	5d041	Sep. 11, 2018	Sep. 08, 2021
SPEAG	2450MHz System Validation Kit <sup>(2)</sup>	D2450V2	929	Nov. 21, 2019	Nov. 19, 2021
SPEAG	2600MHz System Validation Kit <sup>(2)</sup>	D2600V2	1008	Aug. 31, 2018	Aug. 28, 2021
SPEAG	5GHz System Validation Kit <sup>(2)</sup>	D5GHzV2	1006	Sep. 27, 2018	Sep. 24, 2021
SPEAG	Data Acquisition Electronics	DAE4	853	Jul. 23, 2020	Jul. 22, 2021
SPEAG	Data Acquisition Electronics	DAE4	915	Jun. 22, 2020	Jun. 21, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 24, 2020	Jul. 23, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	7346	May. 20, 2020	May. 19, 2021
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 10, 2020	Nov. 09, 2021
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 10, 2020	Nov. 09, 2021
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Nov. 10, 2020	Nov. 09, 2021
Keysight	Wireless Communication Test Set	E5515C	MY50267236	Mar. 18, 2020	Mar. 17, 2021
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 11, 2020	Nov. 10, 2021
Keysight	ENA Network Analyzer	E5071C	MY46101588	Jun. 10, 2020	Jun. 09, 2021
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 16, 2020	Sep. 15, 2021
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Nov. 06, 2020	Nov. 05, 2021
Anritsu	Power Meter	ML2495A	1419002	Aug. 19, 2020	Aug. 18, 2021
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2020	Aug. 17, 2021
Anritsu	Power Meter	ML2495A	1804003	Oct. 21, 2020	Oct. 20, 2021
Anritsu	Power Sensor	MA2411B	1726150	Oct. 21, 2020	Oct. 20, 2021
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 30, 2020	Jun. 29, 2021
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Mar. 12, 2020	Mar. 11, 2021
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 21, 2020	Oct. 20, 2021
Mini-Circuits	Power Amplifier	ZVE-8G+	479102029	Aug. 26, 2020	Aug. 25, 2021
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005-3	N/A	Note 1	

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

## **9. System Verification**

### **9.1 Tissue Verification**

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

#### **<Tissue Dielectric Parameter Check Results>**


Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε <sub>r</sub> )	Conductivity Target (σ)	Permittivity Target (ε <sub>r</sub> )	Delta (σ) (%)	Delta (ε <sub>r</sub> ) (%)	Limit (%)	Date
750	22.4	0.889	42.299	0.89	41.90	-0.11	0.95	±5	2021/2/19
750	22.4	0.907	41.206	0.89	41.90	1.91	-1.66	±5	2021/2/21
835	22.1	0.926	42.880	0.90	41.50	2.89	3.33	±5	2020/12/28
835	22.4	0.896	41.030	0.90	41.50	-0.44	-1.13	±5	2021/2/18
1750	22.2	1.379	40.409	1.37	40.10	0.66	0.77	±5	2020/12/29
1750	22.4	1.367	40.169	1.37	40.10	-0.22	0.17	±5	2021/2/17
1900	22.2	1.457	38.861	1.40	40.00	4.07	-2.85	±5	2020/12/29
1900	22.4	1.444	39.916	1.40	40.00	3.14	-0.21	±5	2021/2/17
2450	22.4	1.804	39.140	1.80	39.20	0.22	-0.15	±5	2021/2/22
2600	22.3	2.009	39.399	1.96	39.00	2.50	1.02	±5	2020/12/30
2600	22.4	1.994	38.757	1.96	39.00	1.73	-0.62	±5	2021/2/20
5250	22.4	4.668	35.952	4.71	35.95	-0.89	0.01	±5	2021/2/22
5600	22.4	4.934	35.463	5.07	35.50	-2.68	-0.10	±5	2021/2/23
5750	22.4	5.095	35.231	5.22	35.35	-2.39	-0.34	±5	2021/2/23

**9.2 System Performance Check Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2021/2/19	750	250	D750V3-1107	EX3DV4 - SN7306	DAE4 Sn915	2.10	8.32	8.4	0.96
2021/2/21	750	250	D750V3-1107	EX3DV4 - SN7306	DAE4 Sn915	2.26	8.32	9.04	8.65
2020/12/28	835	250	D835V2-4d167	EX3DV4 - SN7346	DAE4 Sn853	2.49	9.55	9.96	4.29
2021/2/18	835	250	D835V2-4d167	EX3DV4 - SN7306	DAE4 Sn915	2.55	9.55	10.2	6.81
2020/12/29	1750	250	D1750V2-1112	EX3DV4 - SN7346	DAE4 Sn853	8.94	36.70	35.76	-2.56
2021/2/17	1750	250	D1750V2-1112	EX3DV4 - SN7306	DAE4 Sn915	9.16	36.70	36.64	-0.16
2020/12/29	1900	250	D1900V2-5d041	EX3DV4 - SN7346	DAE4 Sn853	9.71	40.20	38.84	-3.38
2021/2/17	1900	250	D1900V2-5d041	EX3DV4 - SN7306	DAE4 Sn915	10.60	40.20	42.4	5.47
2021/2/22	2450	250	D2450V2-929	EX3DV4 - SN7306	DAE4 Sn915	12.90	53.10	51.6	-2.82
2020/12/30	2600	250	D2600V2-1008	EX3DV4 - SN7346	DAE4 Sn853	14.80	56.40	59.2	4.96
2021/2/20	2600	250	D2600V2-1008	EX3DV4 - SN7306	DAE4 Sn915	14.20	56.40	56.8	0.71
2021/2/22	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7306	DAE4 Sn915	7.80	80.70	78	-3.35
2021/2/23	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7306	DAE4 Sn915	8.53	83.30	85.3	2.40
2021/2/23	5750	100	D5GHzV2-1006-5750	EX3DV4 - SN7306	DAE4 Sn915	8.10	80.40	81	0.75

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2021/2/22	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7306	DAE4 Sn915	2.23	23.20	22.3	-3.88
2021/2/23	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7306	DAE4 Sn915	2.36	23.80	23.6	-0.84

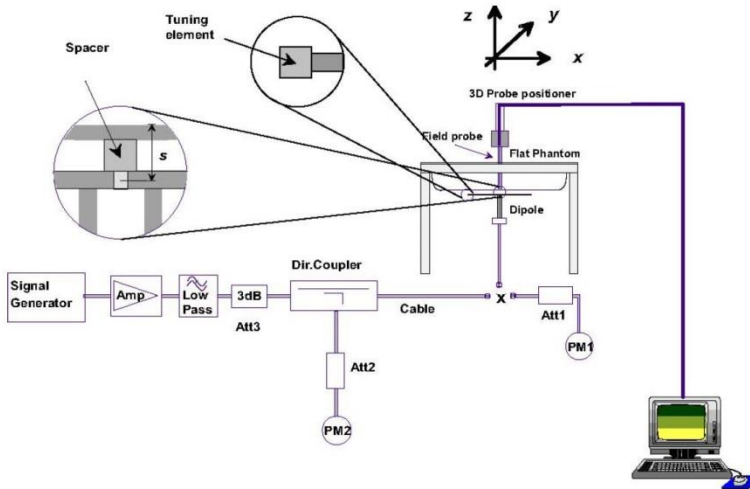

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**

## 10. RF Exposure Positions

### 10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

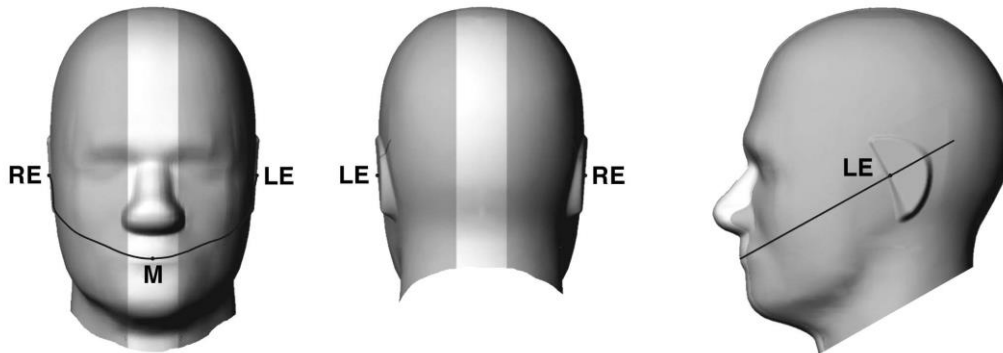


Fig 9.1.1 Front, back, and side views of SAM twin phantom



Fig 9.1.2 Close-up side view of phantom showing the ear region.


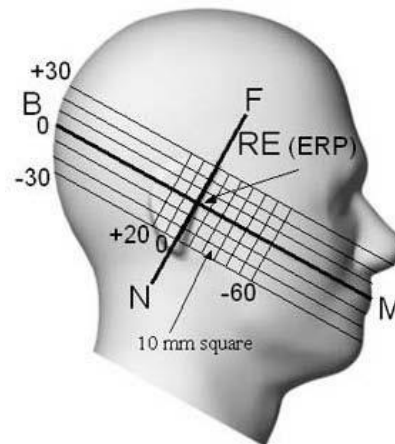



Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

**10.2 Definition of the cheek position**


1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

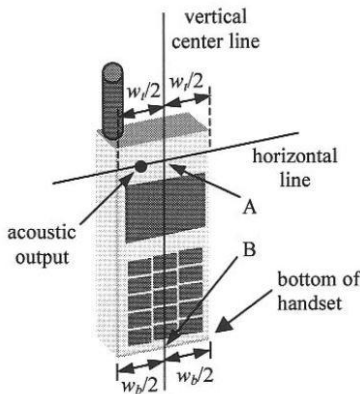

**Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”**

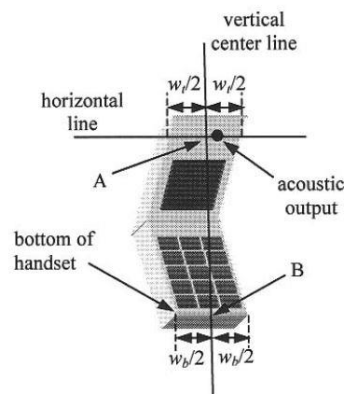


**Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”**

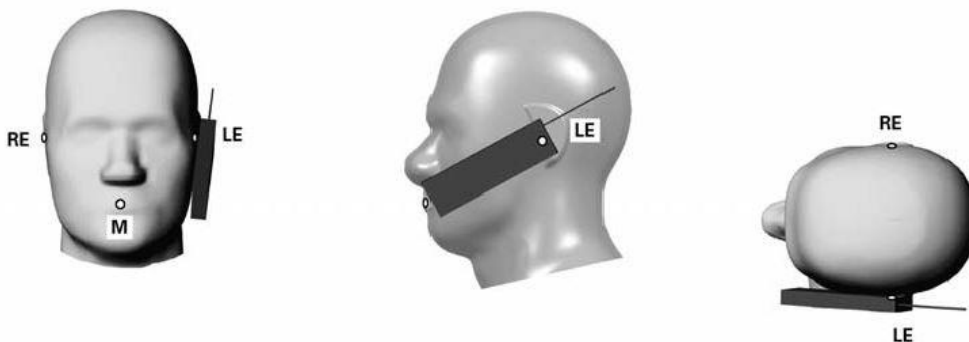

**Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.**

**10.3 Definition of the tilt position**

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

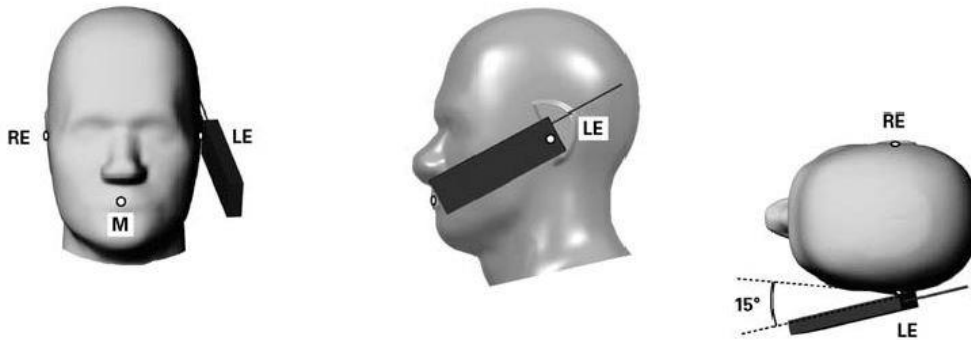


**Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.**



**10.4 Body Worn Accessory**

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

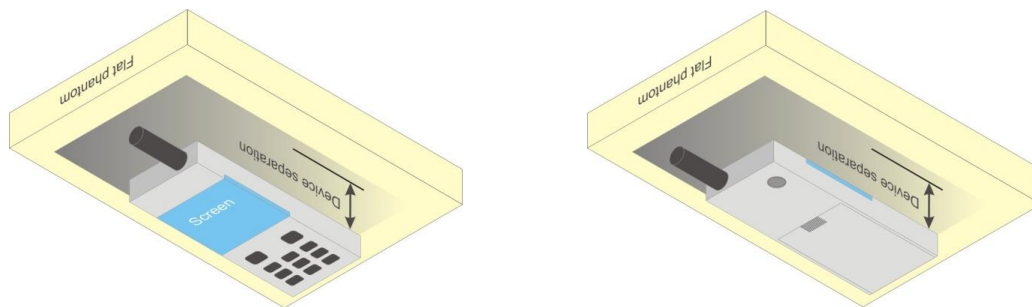

**Fig 9.4 Body Worn Position**

**10.5 Product Specific Exposure**

For smart phones with a display diagonal dimension  $> 15.0 \text{ cm}$  or an overall diagonal dimension  $> 16.0 \text{ cm}$  that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25 \text{ mm}$  from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2 \text{ W/kg}$ .

**10.6 Wireless Router**

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

## 11. UMTS/CDMA/LTE Output Power (Unit: dBm)

### <WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

### HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

### Setup Configuration

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (Note 4) (Note 5)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{hs} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

**Setup Configuration**

**DC-HSDPA 3GPP release 8 Setup Configuration:**


- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

**C.8.1.12 Fixed Reference Channel Definition H-Set 12**

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

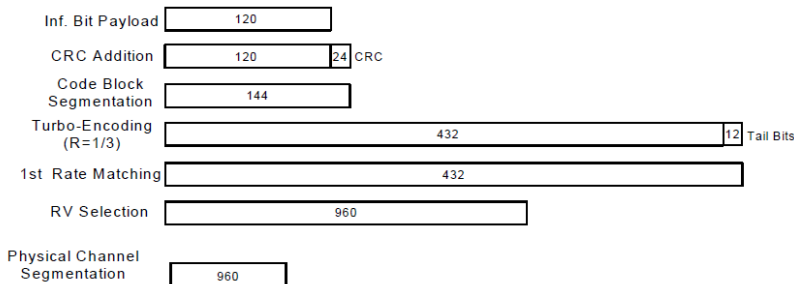

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

**Setup Configuration**



**<WCDMA Conducted Power>**

**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	AMR 12.2Kbps	20.74	20.75	21.10	22.50	21.17	21.44	21.47	23.00	21.84	21.87	21.75	23.00
3GPP Rel 99	RMC 12.2Kbps	21.10	21.15	21.22	22.50	21.33	21.54	21.46	23.00	22.39	22.40	22.41	23.00
3GPP Rel 6	HSDPA Subtest-1	19.85	20.13	20.15	21.50	20.34	20.61	20.56	22.00	21.44	21.42	21.52	22.00
3GPP Rel 6	HSDPA Subtest-2	19.84	20.08	20.14	21.50	20.40	20.61	20.59	22.00	21.36	21.40	21.46	22.00
3GPP Rel 6	HSDPA Subtest-3	19.35	19.58	19.65	21.00	19.88	20.14	20.09	21.50	20.87	20.88	21.00	21.50
3GPP Rel 6	HSDPA Subtest-4	19.32	19.59	19.65	21.00	19.88	20.11	20.06	21.50	20.88	20.94	21.02	21.50
3GPP Rel 8	DC-HSDPA Subtest-1	20.10	20.35	20.79	22.00	20.29	20.84	20.89	22.00	20.92	21.15	20.98	22.00
3GPP Rel 8	DC-HSDPA Subtest-2	20.29	20.41	20.70	22.00	20.71	20.88	20.88	22.00	21.04	21.13	20.91	22.00
3GPP Rel 8	DC-HSDPA Subtest-3	19.74	19.90	20.14	21.50	20.15	20.34	20.41	21.50	20.60	20.68	20.52	21.50
3GPP Rel 8	DC-HSDPA Subtest-4	19.83	19.90	20.22	21.50	20.22	20.27	20.45	21.50	20.60	20.64	20.47	21.50
3GPP Rel 6	HSUPA Subtest-1	19.85	20.07	20.16	21.50	20.39	20.63	20.56	22.00	21.33	21.48	21.55	22.00
3GPP Rel 6	HSUPA Subtest-2	17.85	18.06	18.18	19.50	18.37	18.61	18.54	20.00	19.34	19.45	19.54	20.00
3GPP Rel 6	HSUPA Subtest-3	18.86	19.06	19.13	20.50	19.41	19.64	19.56	21.00	20.36	20.42	20.50	21.00
3GPP Rel 6	HSUPA Subtest-4	17.84	18.08	18.16	19.50	18.37	18.60	18.56	20.00	19.42	19.41	19.55	20.00
3GPP Rel 6	HSUPA Subtest-5	19.90	20.10	20.20	21.50	20.40	20.60	20.60	22.00	21.30	21.40	21.50	22.00

**<LTE Conducted Power>****General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B12/B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 2/4/5/17 SAR test was covered by Band 25/66/26/12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. the maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion
  - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	21.16	21.07	21.37	22	0
20	QPSK	1	49	20.93	20.78	21.03		
20	QPSK	1	99	21.04	21.19	21.16		
20	QPSK	50	0	19.98	20.00	20.10	21	1
20	QPSK	50	24	19.88	19.92	20.19		
20	QPSK	50	50	19.83	20.06	20.39		
20	QPSK	100	0	19.85	20.07	20.47	21	1
20	16QAM	1	0	20.49	20.33	20.70		
20	16QAM	1	49	20.32	20.24	20.48		
20	16QAM	1	99	20.36	20.28	20.35	20	2
20	16QAM	50	0	18.92	19.05	19.14		
20	16QAM	50	24	18.86	18.88	19.27		
20	16QAM	50	50	18.89	19.02	19.42	20	2
20	16QAM	100	0	18.97	18.91	19.25		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	21.11	20.98	21.33	22	0
15	QPSK	1	37	20.92	20.75	21.03		
15	QPSK	1	74	21.00	21.18	21.16		
15	QPSK	36	0	19.89	20.00	20.08	21	1
15	QPSK	36	20	19.80	19.84	20.10		
15	QPSK	36	39	19.78	19.99	20.30		
15	QPSK	75	0	19.80	19.97	20.43	21	1
15	16QAM	1	0	20.40	20.33	20.61		
15	16QAM	1	37	20.29	20.20	20.40		
15	16QAM	1	74	20.34	20.26	20.33	20	2
15	16QAM	36	0	18.86	18.96	19.04		
15	16QAM	36	20	18.77	18.88	19.25		
15	16QAM	36	39	18.80	18.98	19.33	20	2
15	16QAM	75	0	18.95	18.81	19.20		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	21.16	21.06	21.37	22	0
10	QPSK	1	25	20.93	20.68	20.94		
10	QPSK	1	49	20.95	21.11	21.11		
10	QPSK	25	0	19.89	20.00	20.02	21	1
10	QPSK	25	12	19.85	19.85	20.09		
10	QPSK	25	25	19.83	19.96	20.29		
10	QPSK	50	0	19.78	20.01	20.46	21	1
10	16QAM	1	0	20.45	20.31	20.70		
10	16QAM	1	25	20.26	20.14	20.39		
10	16QAM	1	49	20.27	20.24	20.26	20	2
10	16QAM	25	0	18.87	19.00	19.04		
10	16QAM	25	12	18.84	18.84	19.18		
10	16QAM	25	25	18.84	18.93	19.42	20	2
10	16QAM	50	0	18.90	18.82	19.20		
Channel				18625	18900	19175		
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	21.07	21.06	21.34	22	0
5	QPSK	1	12	20.91	20.77	21.00		
5	QPSK	1	24	21.01	21.09	21.07		
5	QPSK	12	0	19.91	19.98	20.04	21	1
5	QPSK	12	7	19.78	19.91	20.19		
5	QPSK	12	13	19.75	19.96	20.35		
5	QPSK	25	0	19.83	20.03	20.47	21	1
5	16QAM	1	0	20.45	20.33	20.61		
5	16QAM	1	12	20.25	20.21	20.40		



**FCC SAR TEST REPORT**

**Report No. : FA0D1806**

5	16QAM	1	24	20.33	20.28	20.33		
5	16QAM	12	0	18.86	19.01	19.08	20	2
5	16QAM	12	7	18.76	18.87	19.18		
5	16QAM	12	13	18.85	19.02	19.32		
5	16QAM	25	0	18.91	18.89	19.24		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	21.16	20.97	21.34	22	0
3	QPSK	1	8	20.88	20.68	20.93		
3	QPSK	1	14	21.01	21.15	21.13		
3	QPSK	8	0	19.91	19.96	20.00	21	1
3	QPSK	8	4	19.78	19.87	20.09		
3	QPSK	8	7	19.79	20.00	20.29		
3	QPSK	15	0	19.76	19.98	20.43		
3	16QAM	1	0	20.43	20.33	20.66	21	1
3	16QAM	1	8	20.30	20.15	20.47		
3	16QAM	1	14	20.30	20.26	20.27		
3	16QAM	8	0	18.83	18.96	19.09	20	2
3	16QAM	8	4	18.79	18.81	19.20		
3	16QAM	8	7	18.83	18.92	19.40		
3	16QAM	15	0	18.93	18.90	19.16		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	21.10	20.95	21.31	22	0
1.4	QPSK	1	3	20.80	20.67	20.90		
1.4	QPSK	1	5	20.93	21.05	21.13		
1.4	QPSK	3	0	21.06	20.91	21.26		
1.4	QPSK	3	1	20.87	20.68	20.88		
1.4	QPSK	3	3	20.91	21.10	21.06	21	1
1.4	QPSK	6	0	19.70	19.92	20.38	21	1
1.4	16QAM	1	0	20.38	20.25	20.63		
1.4	16QAM	1	3	20.26	20.11	20.42		
1.4	16QAM	1	5	20.29	20.16	20.19		
1.4	16QAM	3	0	20.36	20.29	20.65		
1.4	16QAM	3	1	20.29	20.06	20.43		
1.4	16QAM	3	3	20.25	20.24	20.19		
1.4	16QAM	6	0	18.85	18.88	19.15	20	2





<LTE Band 4>

Channel	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)			
20050	20175	20300						
Frequency (MHz)	1720	1732.5	1745					
20	QPSK	1	0	21.60	21.39	21.45	22	0
20	QPSK	1	49	21.57	21.47	21.47		
20	QPSK	1	99	21.40	21.16	21.35		
20	QPSK	50	0	20.43	20.37	20.47	21	1
20	QPSK	50	24	20.42	20.45	20.47		
20	QPSK	50	50	20.31	20.34	20.32		
20	QPSK	100	0	20.30	20.58	20.44	21	1
20	16QAM	1	0	20.71	20.74	20.73		
20	16QAM	1	49	20.88	20.78	20.73		
20	16QAM	1	99	20.85	20.30	20.54	20	2
20	16QAM	50	0	19.39	19.33	19.47		
20	16QAM	50	24	19.32	19.44	19.43		
20	16QAM	50	50	19.32	19.37	19.30	20	2
20	16QAM	100	0	19.45	19.41	19.29		
20025	20175	20325						
Frequency (MHz)	1717.5	1732.5	1747.5					
15	QPSK	1	0	21.53	21.31	21.44	22	0
15	QPSK	1	37	21.52	21.44	21.37		
15	QPSK	1	74	21.31	21.16	21.32		
15	QPSK	36	0	20.33	20.34	20.44	21	1
15	QPSK	36	20	20.35	20.35	20.43		
15	QPSK	36	39	20.27	20.28	20.32		
15	QPSK	75	0	20.29	20.56	20.43	21	1
15	16QAM	1	0	20.63	20.71	20.73		
15	16QAM	1	37	20.87	20.71	20.71		
15	16QAM	1	74	20.84	20.20	20.51	20	2
15	16QAM	36	0	19.29	19.25	19.46		
15	16QAM	36	20	19.27	19.38	19.33		
15	16QAM	36	39	19.31	19.30	19.27	20	2
15	16QAM	75	0	19.45	19.40	19.22		
20000	20175	20350						
Frequency (MHz)	1715	1732.5	1750					
10	QPSK	1	0	21.55	21.34	21.36	22	0
10	QPSK	1	25	21.48	21.43	21.46		
10	QPSK	1	49	21.32	21.14	21.29		
10	QPSK	25	0	20.36	20.31	20.45	21	1
10	QPSK	25	12	20.32	20.39	20.44		
10	QPSK	25	25	20.24	20.25	20.22		
10	QPSK	50	0	20.26	20.51	20.43	21	1
10	16QAM	1	0	20.70	20.65	20.69		
10	16QAM	1	25	20.87	20.68	20.73		
10	16QAM	1	49	20.75	20.28	20.52	20	2
10	16QAM	25	0	19.39	19.31	19.40		
10	16QAM	25	12	19.25	19.38	19.40		
10	16QAM	25	25	19.25	19.37	19.26	20	2
10	16QAM	50	0	19.41	19.32	19.24		
19975	20175	20375						
Frequency (MHz)	1712.5	1732.5	1752.5					
5	QPSK	1	0	21.54	21.33	21.43	22	0
5	QPSK	1	12	21.52	21.41	21.37		
5	QPSK	1	24	21.36	21.16	21.26		
5	QPSK	12	0	20.39	20.36	20.38	21	1
5	QPSK	12	7	20.37	20.41	20.45		
5	QPSK	12	13	20.28	20.29	20.27		
5	QPSK	25	0	20.24	20.53	20.43	21	1
5	16QAM	1	0	20.69	20.66	20.64		
5	16QAM	1	12	20.87	20.73	20.65		



**FCC SAR TEST REPORT**

**Report No. : FA0D1806**

5	16QAM	1	24	20.78	20.26	20.51		
5	16QAM	12	0	19.35	19.29	19.39	20	2
5	16QAM	12	7	19.27	19.42	19.40		
5	16QAM	12	13	19.26	19.35	19.26		
5	16QAM	25	0	19.39	19.37	19.29		
Channel				19965	20175	20385		
Frequency (MHz)				1711.5	1732.5	1753.5	Tune-up limit (dBm)	MPR (dB)
3	QPSK	1	0	21.51	21.32	21.44	22	0
3	QPSK	1	8	21.50	21.38	21.37		
3	QPSK	1	14	21.40	21.11	21.29		
3	QPSK	8	0	20.39	20.28	20.44	21	1
3	QPSK	8	4	20.40	20.43	20.43		
3	QPSK	8	7	20.26	20.24	20.22		
3	QPSK	15	0	20.29	20.56	20.39		
3	16QAM	1	0	20.67	20.71	20.65		
3	16QAM	1	8	20.82	20.76	20.68	21	1
3	16QAM	1	14	20.78	20.22	20.44		
3	16QAM	8	0	19.35	19.27	19.44	20	2
3	16QAM	8	4	19.32	19.34	19.41		
3	16QAM	8	7	19.29	19.34	19.28		
3	16QAM	15	0	19.40	19.37	19.24		
Channel				19957	20175	20393		
Frequency (MHz)				1710.7	1732.5	1754.3	Tune-up limit (dBm)	MPR (dB)
1.4	QPSK	1	0	21.45	21.32	21.34	22	0
1.4	QPSK	1	3	21.50	21.37	21.32		
1.4	QPSK	1	5	21.30	21.05	21.26		
1.4	QPSK	3	0	21.46	21.26	21.39		
1.4	QPSK	3	1	21.40	21.31	21.32		
1.4	QPSK	3	3	21.30	21.06	21.29		
1.4	QPSK	6	0	20.20	20.50	20.29	21	1
1.4	16QAM	1	0	20.57	20.66	20.59	21	1
1.4	16QAM	1	3	20.78	20.75	20.65		
1.4	16QAM	1	5	20.71	20.18	20.34		
1.4	16QAM	3	0	20.62	20.69	20.61		
1.4	16QAM	3	1	20.74	20.75	20.67		
1.4	16QAM	3	3	20.76	20.17	20.38		
1.4	16QAM	6	0	19.32	19.37	19.15		



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.35	22.74	23.26		
10	QPSK	1	25	22.28	22.52	22.97	23.5	0
10	QPSK	1	49	22.68	22.77	23.22		
10	QPSK	25	0	21.26	21.66	21.75		
10	QPSK	25	12	21.33	21.60	21.81	22.5	1
10	QPSK	25	25	21.35	21.69	21.95		
10	QPSK	50	0	21.30	21.67	21.83		
10	16QAM	1	0	21.55	21.86	22.19	22.5	1
10	16QAM	1	25	21.68	21.63	22.33		
10	16QAM	1	49	21.91	21.14	22.26		
10	16QAM	25	0	20.26	20.64	20.77	21.5	2
10	16QAM	25	12	20.35	20.56	20.84		
10	16QAM	25	25	20.38	20.66	20.86		
10	16QAM	50	0	20.35	20.66	20.93		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5	23.5	0
5	QPSK	1	0	22.26	22.64	23.20		
5	QPSK	1	12	22.21	22.46	22.95		
5	QPSK	1	24	22.62	22.73	23.12	22.5	1
5	QPSK	12	0	21.21	21.56	21.75		
5	QPSK	12	7	21.25	21.55	21.81		
5	QPSK	12	13	21.34	21.66	21.95	22.5	1
5	QPSK	25	0	21.29	21.65	21.82		
5	16QAM	1	0	21.52	21.82	22.19		
5	16QAM	1	12	21.62	21.58	22.26	22.5	1
5	16QAM	1	24	21.88	21.13	22.16		
5	16QAM	12	0	20.16	20.61	20.73		
5	16QAM	12	7	20.35	20.46	20.75	21.5	2
5	16QAM	12	13	20.31	20.59	20.77		
5	16QAM	25	0	20.26	20.57	20.87		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5	23.5	0
3	QPSK	1	0	22.25	22.67	23.19		
3	QPSK	1	8	22.19	22.48	22.95		
3	QPSK	1	14	22.66	22.77	23.20	22.5	1
3	QPSK	8	0	21.26	21.62	21.69		
3	QPSK	8	4	21.25	21.56	21.73		
3	QPSK	8	7	21.33	21.60	21.93	22.5	1
3	QPSK	15	0	21.29	21.64	21.81		
3	16QAM	1	0	21.51	21.79	22.13		
3	16QAM	1	8	21.63	21.53	22.30	22.5	1
3	16QAM	1	14	21.86	21.13	22.22		
3	16QAM	8	0	20.23	20.64	20.73		
3	16QAM	8	4	20.25	20.48	20.76	21.5	2
3	16QAM	8	7	20.33	20.58	20.78		
3	16QAM	15	0	20.30	20.64	20.87		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3	23.5	0
1.4	QPSK	1	0	22.21	22.67	23.15		
1.4	QPSK	1	3	22.18	22.45	22.90		
1.4	QPSK	1	5	22.63	22.74	23.13	22.5	1
1.4	QPSK	3	0	22.19	22.63	23.13		
1.4	QPSK	3	1	22.11	22.42	22.91		
1.4	QPSK	3	3	22.64	22.68	23.11	22.5	1
1.4	QPSK	6	0	21.22	21.56	21.75		
1.4	16QAM	1	0	21.51	21.74	22.12		
1.4	16QAM	1	3	21.55	21.52	22.26		



1.4	16QAM	1	5	21.76	21.08	22.15		
1.4	16QAM	3	0	21.45	21.77	22.11		
1.4	16QAM	3	1	21.56	21.48	22.20		
1.4	16QAM	3	3	21.77	21.05	22.14		
1.4	16QAM	6	0	20.25	20.64	20.80		
							21.5	2

**<LTE Band 7>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	21.40	21.06	20.91	22.5	0
20	QPSK	1	49	20.92	20.87	20.84		
20	QPSK	1	99	21.31	20.94	21.12		
20	QPSK	50	0	20.29	19.99	19.96	21.5	1
20	QPSK	50	24	20.34	19.97	20.00		
20	QPSK	50	50	20.37	20.01	20.03		
20	QPSK	100	0	20.47	19.97	19.95	21.5	1
20	16QAM	1	0	20.49	20.32	20.24		
20	16QAM	1	49	19.95	20.19	20.20		
20	16QAM	1	99	20.50	20.20	20.38	20.5	2
20	16QAM	50	0	19.36	18.96	18.98		
20	16QAM	50	24	19.33	18.99	18.98		
20	16QAM	50	50	19.37	18.98	19.06	20.5	2
20	16QAM	100	0	19.34	19.03	18.94		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	21.34	21.02	20.90	22.5	0
15	QPSK	1	37	20.84	20.82	20.84		
15	QPSK	1	74	21.24	20.92	21.11		
15	QPSK	36	0	20.19	19.97	19.92	21.5	1
15	QPSK	36	20	20.32	19.95	19.93		
15	QPSK	36	39	20.28	19.93	19.95		
15	QPSK	75	0	20.47	19.92	19.91	21.5	1
15	16QAM	1	0	20.48	20.29	20.16		
15	16QAM	1	37	19.93	20.09	20.14		
15	16QAM	1	74	20.48	20.17	20.37	20.5	2
15	16QAM	36	0	19.26	18.86	18.95		
15	16QAM	36	20	19.27	18.91	18.96		
15	16QAM	36	39	19.33	18.91	18.99	20.5	2
15	16QAM	75	0	19.30	19.02	18.93		
Channel				20800	21100	21400		
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	21.30	21.03	20.88	22.5	0
10	QPSK	1	25	20.82	20.84	20.80		
10	QPSK	1	49	21.29	20.87	21.12		
10	QPSK	25	0	20.25	19.95	19.86	21.5	1
10	QPSK	25	12	20.32	19.95	19.91		
10	QPSK	25	25	20.33	19.97	19.95		
10	QPSK	50	0	20.44	19.96	19.86	21.5	1
10	16QAM	1	0	20.41	20.27	20.23		
10	16QAM	1	25	19.85	20.14	20.18		
10	16QAM	1	49	20.45	20.19	20.38	20.5	2
10	16QAM	25	0	19.36	18.87	18.92		
10	16QAM	25	12	19.29	18.99	18.97		
10	16QAM	25	25	19.30	18.95	19.06	20.5	2
10	16QAM	25	25	19.30	18.95	19.06		
10	16QAM	50	0	19.26	18.94	18.85		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	21.35	20.99	20.87	22.5	0



5	QPSK	1	12	20.87	20.85	20.75	21.5	1
5	QPSK	1	24	21.29	20.90	21.08		
5	QPSK	12	0	20.24	19.93	19.93		
5	QPSK	12	7	20.24	19.90	19.90		
5	QPSK	12	13	20.29	19.92	19.94		
5	QPSK	25	0	20.47	19.90	19.90		
5	16QAM	1	0	20.47	20.25	20.17	21.5	1
5	16QAM	1	12	19.95	20.09	20.19		
5	16QAM	1	24	20.43	20.20	20.37		
5	16QAM	12	0	19.27	18.95	18.89	20.5	2
5	16QAM	12	7	19.32	18.91	18.88		
5	16QAM	12	13	19.29	18.89	18.98		
5	16QAM	12	0	19.31	18.99	18.87		
5	16QAM	25	0	19.31	18.99	18.87		

<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130	23	0
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.35	22.34	22.24	23	0
10	QPSK	1	25	22.09	22.16	22.21		
10	QPSK	1	49	22.30	22.28	22.22		
10	QPSK	25	0	21.33	21.27	21.36	22	1
10	QPSK	25	12	21.36	21.37	21.35		
10	QPSK	25	25	21.33	21.36	21.34		
10	QPSK	50	0	21.46	21.37	21.24		
10	16QAM	1	0	21.61	21.71	21.88	22	1
10	16QAM	1	25	21.60	21.46	21.52		
10	16QAM	1	49	21.76	21.62	21.71		
10	16QAM	25	0	20.30	20.34	20.33	21	2
10	16QAM	25	12	20.39	20.43	20.24		
10	16QAM	25	25	20.34	20.37	20.30		
10	16QAM	50	0	20.36	20.30	20.31		
Channel				23035	23095	23155	23	0
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.38	22.32	22.42	23	0
5	QPSK	1	12	22.09	22.06	22.13		
5	QPSK	1	24	22.29	22.37	22.22		
5	QPSK	12	0	21.33	21.18	21.36	22	1
5	QPSK	12	7	21.28	21.24	21.22		
5	QPSK	12	13	21.33	21.34	21.26		
5	QPSK	25	0	21.38	21.28	21.22		
5	16QAM	1	0	21.55	21.69	21.83	22	1
5	16QAM	1	12	21.52	21.39	21.46		
5	16QAM	1	24	21.69	21.58	21.62		
5	16QAM	12	0	20.29	20.29	20.27	21	2
5	16QAM	12	7	20.34	20.35	20.19		
5	16QAM	12	13	20.25	20.33	20.26		
5	16QAM	25	0	20.28	20.29	20.26		
5	16QAM	25	0	20.28	20.29	20.26		
Channel				23025	23095	23165	23	0
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.38	22.32	22.44	23	0
3	QPSK	1	8	22.01	22.11	22.15		
3	QPSK	1	14	22.34	22.28	22.26		
3	QPSK	8	0	21.30	21.17	21.35	22	1
3	QPSK	8	4	21.27	21.30	21.22		
3	QPSK	8	7	21.29	21.35	21.32		
3	QPSK	15	0	21.38	21.34	21.17		
3	16QAM	1	0	21.51	21.69	21.88	22	1
3	16QAM	1	8	21.53	21.44	21.45		



3	16QAM	1	14	21.75	21.57	21.65		
3	16QAM	8	0	20.29	20.29	20.26	21	2
3	16QAM	8	4	20.37	20.34	20.22		
3	16QAM	8	7	20.34	20.33	20.25		
3	16QAM	15	0	20.32	20.30	20.28		
Channel				23017	23095	23173		
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.38	22.32	22.42	23	0
1.4	QPSK	1	3	21.98	22.02	22.14		
1.4	QPSK	1	5	22.32	22.23	22.19		
1.4	QPSK	3	0	22.29	22.27	22.42		
1.4	QPSK	3	1	21.93	22.07	22.15		
1.4	QPSK	3	3	22.30	22.24	22.19		
1.4	QPSK	6	0	21.29	21.24	21.12	22	1
1.4	16QAM	1	0	21.46	21.68	21.80	22	1
1.4	16QAM	1	3	21.48	21.43	21.38		
1.4	16QAM	1	5	21.70	21.47	21.64		
1.4	16QAM	3	0	21.50	21.64	21.86		
1.4	16QAM	3	1	21.45	21.42	21.37		
1.4	16QAM	3	3	21.72	21.55	21.58		
1.4	16QAM	6	0	20.25	20.26	20.22	21	2

<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		22.40		23	0
10	QPSK	1	25		22.12			
10	QPSK	1	49		22.30			
10	QPSK	25	0		21.35		22	1
10	QPSK	25	12		21.34			
10	QPSK	25	25		21.24			
10	QPSK	50	0		21.27			
10	16QAM	1	0		21.58			
10	16QAM	1	25		21.35		22	1
10	16QAM	1	49		21.62			
10	16QAM	25	0		20.17			
10	16QAM	25	12		20.30		21	2
10	16QAM	25	25		20.29			
10	16QAM	50	0		20.36			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0		22.34		23	0
5	QPSK	1	12		22.09			
5	QPSK	1	24		22.22			
5	QPSK	12	0		21.24		22	1
5	QPSK	12	7		21.27			
5	QPSK	12	13		21.19			
5	QPSK	25	0		21.24			
5	16QAM	1	0		21.54			
5	16QAM	1	12		21.30		22	1
5	16QAM	1	24		21.55			
5	16QAM	12	0		20.17			
5	16QAM	12	7		20.29		21	2
5	16QAM	12	13		20.27			
5	16QAM	25	0		20.28			



<LTE Band 14>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23330				
Frequency (MHz)				793				
10	QPSK	1	0	22.41			23	0
10	QPSK	1	25	22.23				
10	QPSK	1	49	22.37				
10	QPSK	25	0	21.32			22	1
10	QPSK	25	12	21.28				
10	QPSK	25	25	21.30				
10	QPSK	50	0	21.18				
10	16QAM	1	0	21.89			22	1
10	16QAM	1	25	21.61				
10	16QAM	1	49	21.60				
10	16QAM	25	0	20.33			21	2
10	16QAM	25	12	20.14				
10	16QAM	25	25	20.26				
10	16QAM	50	0	20.25				
Channel				23305	23330	23355	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				790.5	793	795.5		
5	QPSK	1	0	22.39			23	0
5	QPSK	1	12	22.16				
5	QPSK	1	24	22.30				
5	QPSK	12	0	21.32			22	1
5	QPSK	12	7	21.26				
5	QPSK	12	13	21.32				
5	QPSK	25	0	21.14				
5	16QAM	1	0	21.80			22	1
5	16QAM	1	12	21.61				
5	16QAM	1	24	21.51				
5	16QAM	12	0	20.32			21	2
5	16QAM	12	7	20.12				
5	16QAM	12	13	20.23				
5	16QAM	25	0	20.23				



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.43	22.36	22.29	23	0
10	QPSK	1	25	22.18	22.17	22.22		
10	QPSK	1	49	22.37	22.39	22.39		
10	QPSK	25	0	21.21	21.23	21.21	22	1
10	QPSK	25	12	21.24	21.21	21.18		
10	QPSK	25	25	21.21	21.21	21.22		
10	16QAM	50	0	21.17	21.13	21.15	22	1
10	16QAM	1	0	21.85	21.80	21.73		
10	16QAM	1	25	21.54	21.56	21.41		
10	16QAM	1	49	21.73	21.71	21.76	21	2
10	16QAM	25	0	20.19	20.23	20.18		
10	16QAM	25	12	20.23	20.14	20.16		
10	16QAM	25	25	20.18	20.19	20.27	21	2
10	16QAM	50	0	20.36	20.33	20.27		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.34	22.29	22.28	23	0
5	QPSK	1	12	22.13	22.09	22.13		
5	QPSK	1	24	22.33	22.38	22.31		
5	QPSK	12	0	21.11	21.19	21.21	22	1
5	QPSK	12	7	21.23	21.18	21.08		
5	QPSK	12	13	21.12	21.18	21.14		
5	QPSK	25	0	21.14	21.07	21.09	22	1
5	16QAM	1	0	21.84	21.72	21.69		
5	16QAM	1	12	21.50	21.56	21.40		
5	16QAM	1	24	21.68	21.66	21.71	21	2
5	16QAM	12	0	20.13	20.19	20.12		
5	16QAM	12	7	20.18	20.04	20.15		
5	16QAM	12	13	20.11	20.16	20.20	21	2
5	16QAM	12	7	20.18	20.04	20.15		
5	16QAM	12	13	20.11	20.16	20.20		
5	16QAM	25	0	20.35	20.27	20.17		

<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	20.88	20.86	21.40	22	0
20	QPSK	1	49	20.79	20.72	20.97		
20	QPSK	1	99	20.58	20.71	21.20		
20	QPSK	50	0	19.86	19.90	20.34	21	1
20	QPSK	50	24	19.78	20.00	20.39		
20	QPSK	50	50	19.82	19.96	20.42		
20	QPSK	100	0	19.74	20.02	20.56	21	1
20	16QAM	1	0	20.20	20.14	20.70		
20	16QAM	1	49	20.22	20.22	20.33		
20	16QAM	1	99	20.01	19.99	20.47	20	2
20	16QAM	50	0	18.81	18.96	19.35		
20	16QAM	50	24	18.81	19.04	19.41		
20	16QAM	50	50	18.83	19.01	19.40	20	2
20	16QAM	100	0	19.00	18.85	19.31		
Channel				26115	26340	26615		
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	20.85	20.82	21.39	22	0
15	QPSK	1	37	20.72	20.66	20.91		





**FCC SAR TEST REPORT**

**Report No. : FA0D1806**

15	QPSK	1	74	20.56	20.69	21.16		
15	QPSK	36	0	19.80	19.86	20.28	21	1
15	QPSK	36	20	19.68	19.98	20.36		
15	QPSK	36	39	19.80	19.93	20.34		
15	QPSK	75	0	19.69	19.92	20.53	21	1
15	16QAM	1	0	20.13	20.11	20.67		
15	16QAM	1	37	20.21	20.21	20.29		
15	16QAM	1	74	20.00	19.95	20.47	20	2
15	16QAM	36	0	18.71	18.91	19.27		
15	16QAM	36	20	18.79	18.99	19.38		
15	16QAM	36	39	18.74	19.01	19.33	20	2
15	16QAM	75	0	18.96	18.76	19.25		
Channel				26090	26340	26640		
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	20.78	20.79	21.37	22	0
10	QPSK	1	25	20.79	20.68	20.95		
10	QPSK	1	49	20.51	20.71	21.18		
10	QPSK	25	0	19.83	19.85	20.33	21	1
10	QPSK	25	12	19.74	20.00	20.31		
10	QPSK	25	25	19.82	19.94	20.40		
10	QPSK	50	0	19.67	19.99	20.56	21	1
10	16QAM	1	0	20.15	20.12	20.68		
10	16QAM	1	25	20.14	20.14	20.25		
10	16QAM	1	49	19.97	19.93	20.39	21	1
10	16QAM	25	0	18.76	18.90	19.34		
10	16QAM	25	12	18.78	18.96	19.36		
10	16QAM	25	25	18.80	19.01	19.34	20	2
10	16QAM	50	0	18.94	18.76	19.24		
Channel				26065	26340	26665		
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	20.87	20.86	21.33	22	0
5	QPSK	1	12	20.79	20.65	20.94		
5	QPSK	1	24	20.50	20.63	21.16		
5	QPSK	12	0	19.80	19.88	20.31	21	1
5	QPSK	12	7	19.73	19.99	20.37		
5	QPSK	12	13	19.74	19.91	20.36		
5	QPSK	25	0	19.69	19.94	20.47	21	1
5	16QAM	1	0	20.10	20.11	20.68		
5	16QAM	1	12	20.20	20.14	20.26		
5	16QAM	1	24	19.99	19.92	20.37	21	1
5	16QAM	12	0	18.72	18.89	19.29		
5	16QAM	12	7	18.73	18.99	19.32		
5	16QAM	12	13	18.81	18.98	19.40	20	2
5	16QAM	25	0	18.92	18.83	19.23		
Channel				26055	26340	26675		
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	20.86	20.81	21.34	22	0
3	QPSK	1	8	20.69	20.70	20.88		
3	QPSK	1	14	20.50	20.64	21.15		
3	QPSK	8	0	19.85	19.88	20.29	21	1
3	QPSK	8	4	19.70	19.90	20.36		
3	QPSK	8	7	19.72	19.94	20.42		
3	QPSK	15	0	19.68	19.97	20.52	21	1
3	16QAM	1	0	20.11	20.14	20.69		
3	16QAM	1	8	20.15	20.16	20.27		
3	16QAM	1	14	19.98	19.98	20.46	21	1
3	16QAM	8	0	18.72	18.86	19.30		
3	16QAM	8	4	18.74	18.97	19.41		
3	16QAM	8	7	18.77	19.00	19.38	20	2
3	16QAM	15	0	18.91	18.75	19.27		
Channel				26047	26340	26683		
Frequency (MHz)				1850.7	1880	1914.3		



1.4	QPSK	1	0	20.78	20.75	21.26	22	0
1.4	QPSK	1	3	20.69	20.69	20.88		
1.4	QPSK	1	5	20.43	20.62	21.09		
1.4	QPSK	3	0	20.78	20.77	21.26		
1.4	QPSK	3	1	20.69	20.67	20.81		
1.4	QPSK	3	3	20.42	20.60	21.14		
1.4	QPSK	6	0	19.68	19.97	20.46	21	1
1.4	16QAM	1	0	20.04	20.12	20.59	21	1
1.4	16QAM	1	3	20.15	20.14	20.27		
1.4	16QAM	1	5	19.96	19.91	20.46		
1.4	16QAM	3	0	20.05	20.09	20.64		
1.4	16QAM	3	1	20.07	20.08	20.17		
1.4	16QAM	3	3	19.90	19.96	20.39		
1.4	16QAM	6	0	18.90	18.70	19.23	20	2

**<LTE Band 26>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965	23.5	0
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	22.60	22.73	23.19	23.5	0
15	QPSK	1	37	22.03	22.52	22.67		
15	QPSK	1	74	22.49	22.66	23.09		
15	QPSK	36	0	21.49	21.77	22.01	22.5	1
15	QPSK	36	20	21.24	21.63	21.76		
15	QPSK	36	39	21.22	21.51	21.67		
15	QPSK	75	0	21.33	21.60	21.87		
15	16QAM	1	0	21.49	21.79	22.06	22.5	1
15	16QAM	1	37	21.19	22.20	21.88		
15	16QAM	1	74	21.85	22.08	22.18		
15	16QAM	36	0	20.48	20.76	20.99	21.5	2
15	16QAM	36	20	20.23	20.51	20.73		
15	16QAM	36	39	20.22	20.51	20.62		
15	16QAM	75	0	20.41	20.65	20.85		
Channel				26740	26865	26990	23.5	0
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	22.35	22.56	23.18	23.5	0
10	QPSK	1	25	22.00	22.42	22.61		
10	QPSK	1	49	22.66	22.66	23.02		
10	QPSK	25	0	21.45	21.70	21.99	22.5	1
10	QPSK	25	12	21.14	21.57	21.75		
10	QPSK	25	25	21.18	21.45	21.57		
10	QPSK	50	0	21.29	21.50	21.80		
10	16QAM	1	0	21.45	21.69	22.03	22.5	1
10	16QAM	1	25	21.15	22.20	21.88		
10	16QAM	1	49	21.84	22.02	22.16		
10	16QAM	25	0	20.40	20.71	20.93	21.5	2
10	16QAM	25	12	20.21	20.51	20.63		
10	16QAM	25	25	20.19	20.45	20.53		
10	16QAM	50	0	20.32	20.60	20.76		
Channel				26715	26865	27015	23.5	0
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	22.32	22.57	23.18	23.5	0
5	QPSK	1	12	21.98	22.47	22.67		
5	QPSK	1	24	22.68	22.72	23.00		
5	QPSK	12	0	21.43	21.76	21.93	22.5	1
5	QPSK	12	7	21.22	21.60	21.74		
5	QPSK	12	13	21.19	21.43	21.57		
5	QPSK	25	0	21.27	21.50	21.85		
5	16QAM	1	0	21.45	21.77	21.97	22.5	1



5	16QAM	1	12	21.11	22.19	21.82	21.5	2
5	16QAM	1	24	21.78	22.08	22.11		
5	16QAM	12	0	20.42	20.74	20.91		
5	16QAM	12	7	20.14	20.49	20.69		
5	16QAM	12	13	20.15	20.48	20.52		
5	16QAM	25	0	20.37	20.62	20.79		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	22.31	22.61	23.11	23.5	0
3	QPSK	1	8	21.98	22.45	22.60		
3	QPSK	1	14	22.64	22.67	23.09		
3	QPSK	8	0	21.43	21.72	21.97	22.5	1
3	QPSK	8	4	21.20	21.60	21.67		
3	QPSK	8	7	21.12	21.43	21.65		
3	QPSK	15	0	21.28	21.60	21.83		
3	16QAM	1	0	21.44	21.77	22.02		
3	16QAM	1	8	21.17	22.11	21.79	22.5	1
3	16QAM	1	14	21.85	22.07	22.11		
3	16QAM	8	0	20.39	20.74	20.90	21.5	2
3	16QAM	8	4	20.13	20.50	20.69		
3	16QAM	8	7	20.15	20.41	20.54		
3	16QAM	15	0	20.32	20.65	20.81		
Channel				26697	26865	27033		
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	22.24	22.58	23.02	23.5	0
1.4	QPSK	1	3	21.94	22.44	22.57		
1.4	QPSK	1	5	22.63	22.58	23.04		
1.4	QPSK	3	0	22.22	22.58	23.06		
1.4	QPSK	3	1	21.92	22.44	22.52		
1.4	QPSK	3	3	22.61	22.60	23.01		
1.4	QPSK	6	0	21.27	21.58	21.76	22.5	1
1.4	16QAM	1	0	21.42	21.69	21.98	22.5	1
1.4	16QAM	1	3	21.16	22.06	21.73		
1.4	16QAM	1	5	21.83	21.99	22.07		
1.4	16QAM	3	0	21.37	21.75	21.94		
1.4	16QAM	3	1	21.15	22.06	21.76		
1.4	16QAM	3	3	21.79	22.00	22.01		
1.4	16QAM	6	0	20.32	20.58	20.81	21.5	2

<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	21.60	21.15	21.06	22	0
20	QPSK	1	49	21.25	21.31	21.10		
20	QPSK	1	99	21.56	21.53	20.68		
20	QPSK	50	0	20.13	20.16	20.08	21	1
20	QPSK	50	24	20.12	20.16	20.13		
20	QPSK	50	50	20.23	20.17	20.15		
20	QPSK	100	0	20.26	20.21	20.35		
20	16QAM	1	0	20.27	20.43	20.36	21	1
20	16QAM	1	49	20.36	20.44	20.30		
20	16QAM	1	99	20.84	20.76	19.86		
20	16QAM	50	0	19.01	19.21	19.07	20	2
20	16QAM	50	24	19.08	19.27	19.18		
20	16QAM	50	50	19.22	19.18	19.15		
20	16QAM	100	0	19.28	19.20	19.13		
Channel				132047	132322	132597		



**FCC SAR TEST REPORT**

**Report No. : FA0D1806**

Frequency (MHz)				1717.5	1745	1772.5	(dBm)	(dB)
15	QPSK	1	0	21.54	21.13	21.00	22	0
15	QPSK	1	37	21.16	21.24	21.00		
15	QPSK	1	74	21.46	21.53	20.67		
15	QPSK	36	0	20.08	20.12	20.07	21	1
15	QPSK	36	20	20.08	20.25	20.04		
15	QPSK	36	39	20.23	20.13	19.97		
15	QPSK	75	0	20.08	20.25	20.35	21	1
15	16QAM	1	0	20.18	20.37	20.29		
15	16QAM	1	37	20.36	20.44	20.24		
15	16QAM	1	74	20.79	20.71	19.82	20	2
15	16QAM	36	0	18.92	19.19	19.02		
15	16QAM	36	20	19.04	19.25	19.18		
15	16QAM	36	39	19.13	19.13	19.09	20	2
15	16QAM	75	0	19.28	19.13	19.03		
Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	21.51	21.13	21.00	22	0
10	QPSK	1	25	21.25	21.27	21.09		
10	QPSK	1	49	21.51	21.51	20.62		
10	QPSK	25	0	20.03	20.11	20.08	21	1
10	QPSK	25	12	20.07	20.22	20.07		
10	QPSK	25	25	20.19	20.16	20.04		
10	QPSK	50	0	20.06	20.27	20.28	21	1
10	16QAM	1	0	20.25	20.40	20.36		
10	16QAM	1	25	20.28	20.38	20.25		
10	16QAM	1	49	20.80	20.70	19.77	20	2
10	16QAM	25	0	18.91	19.16	19.02		
10	16QAM	25	12	19.02	19.24	19.09		
10	16QAM	25	25	19.14	19.11	19.09	20	2
10	16QAM	50	0	19.28	19.19	19.12		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	21.59	21.15	21.03	22	0
5	QPSK	1	12	21.17	21.29	21.00		
5	QPSK	1	24	21.51	21.51	20.63		
5	QPSK	12	0	20.12	20.06	20.08	21	1
5	QPSK	12	7	20.10	20.20	20.05		
5	QPSK	12	13	20.15	20.15	20.03		
5	QPSK	25	0	20.11	20.23	20.26	21	1
5	16QAM	1	0	20.25	20.39	20.30		
5	16QAM	1	12	20.35	20.44	20.22		
5	16QAM	1	24	20.83	20.69	19.85	20	2
5	16QAM	12	0	18.96	19.13	18.98		
5	16QAM	12	7	19.02	19.26	19.15		
5	16QAM	12	13	19.19	19.11	19.12	20	2
5	16QAM	25	0	19.21	19.20	19.06		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	21.53	21.07	20.98	22	0
3	QPSK	1	8	21.18	21.24	21.00		
3	QPSK	1	14	21.52	21.47	20.66		
3	QPSK	8	0	20.11	20.16	19.99	21	1
3	QPSK	8	4	20.03	20.21	20.05		
3	QPSK	8	7	20.18	20.14	19.96		
3	QPSK	15	0	20.10	20.29	20.31	21	1



3	16QAM	1	0	20.22	20.42	20.32	21	1
3	16QAM	1	8	20.26	20.34	20.26		
3	16QAM	1	14	20.81	20.71	19.83		
3	16QAM	8	0	18.95	19.19	19.05	20	2
3	16QAM	8	4	19.00	19.22	19.11		
3	16QAM	8	7	19.19	19.16	19.05		
3	16QAM	15	0	19.18	19.20	19.05		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	21.53	20.99	20.95	22	0
1.4	QPSK	1	3	21.13	21.22	20.93		
1.4	QPSK	1	5	21.52	21.39	20.57		
1.4	QPSK	3	0	21.52	21.05	20.95		
1.4	QPSK	3	1	21.14	21.15	21.00		
1.4	QPSK	3	3	21.48	21.45	20.56		
1.4	QPSK	6	0	20.04	20.29	20.25	21	1
1.4	16QAM	1	0	20.12	20.36	20.24	21	1
1.4	16QAM	1	3	20.16	20.32	20.21		
1.4	16QAM	1	5	20.72	20.63	19.73		
1.4	16QAM	3	0	20.18	20.34	20.28		
1.4	16QAM	3	1	20.20	20.33	20.18		
1.4	16QAM	3	3	20.81	20.66	19.80		
1.4	16QAM	6	0	19.08	19.16	18.97	20	2

<LTE Band 71>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				133222	133322	133372	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				673	683	688		
20	QPSK	1	0	22.51	22.72	22.68	23	0
20	QPSK	1	49	22.18	22.25	22.35		
20	QPSK	1	99	22.63	22.59	22.53		
20	QPSK	50	0	21.49	21.54	21.52	22	1
20	QPSK	50	24	21.52	21.46	21.42		
20	QPSK	50	50	21.53	21.58	21.54		
20	QPSK	100	0	21.62	21.56	21.53		
20	16QAM	1	0	22.05	22.01	22.09	22	1
20	16QAM	1	49	21.73	21.83	21.81		
20	16QAM	1	99	21.91	21.91	21.89		
20	16QAM	50	0	20.59	20.53	20.69	21	2
20	16QAM	50	24	20.48	20.57	20.46		
20	16QAM	50	50	20.50	20.55	20.43		
20	16QAM	100	0	20.63	20.59	20.51		
Channel				133197	133297	133397	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				670.5	680.5	690.5		
15	QPSK	1	0	22.46	22.64	22.61	23	0
15	QPSK	1	37	22.11	22.21	22.27		
15	QPSK	1	74	22.58	22.58	22.44		
15	QPSK	36	0	21.49	21.47	21.53	22	1
15	QPSK	36	20	21.49	21.43	21.41		
15	QPSK	36	39	21.47	21.56	21.42		
15	QPSK	75	0	21.53	21.56	21.50		
15	16QAM	1	0	21.98	21.99	22.04	22	1
15	16QAM	1	37	21.70	21.83	21.74		




15	16QAM	1	74	21.88	21.90	21.83		
15	16QAM	36	0	20.53	20.44	20.66	21	2
15	16QAM	36	20	20.47	20.47	20.40		
15	16QAM	36	39	20.50	20.54	20.37		
15	16QAM	75	0	20.60	20.52	20.49		
Channel				133172	133272	133422		
Frequency (MHz)				668	678	693		
10	QPSK	1	0	22.47	22.63	22.71	23	0
10	QPSK	1	25	22.18	22.18	22.28		
10	QPSK	1	49	22.60	22.53	22.45		
10	QPSK	25	0	21.45	21.52	21.56	22	1
10	QPSK	25	12	21.44	21.46	21.32		
10	QPSK	25	25	21.47	21.50	21.38		
10	QPSK	50	0	21.52	21.54	21.46		
10	16QAM	1	0	22.00	21.97	22.09	22	1
10	16QAM	1	25	21.65	21.83	21.80		
10	16QAM	1	49	21.89	21.89	21.84		
10	16QAM	25	0	20.51	20.53	20.62	21	2
10	16QAM	25	12	20.45	20.49	20.40		
10	16QAM	25	25	20.45	20.49	20.42		
10	16QAM	50	0	20.57	20.53	20.44		
Channel				133147	133247	133447	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				665.5	675.5	695.5		
5	QPSK	1	0	22.46	22.62	22.63	23	0
5	QPSK	1	12	22.11	22.25	22.25		
5	QPSK	1	24	22.57	22.57	22.44		
5	QPSK	12	0	21.48	21.45	21.57	22	1
5	QPSK	12	7	21.43	21.42	21.42		
5	QPSK	12	13	21.44	21.54	21.35		
5	QPSK	25	0	21.60	21.48	21.52		
5	16QAM	1	0	22.03	21.97	22.08	22	1
5	16QAM	1	12	21.68	21.75	21.78		
5	16QAM	1	24	21.86	21.84	21.86		
5	16QAM	12	0	20.57	20.52	20.66	21	2
5	16QAM	12	7	20.42	20.57	20.43		
5	16QAM	12	13	20.50	20.51	20.39		
5	16QAM	25	0	20.55	20.57	20.46		

**<TDD LTE SAR Measurement>**

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

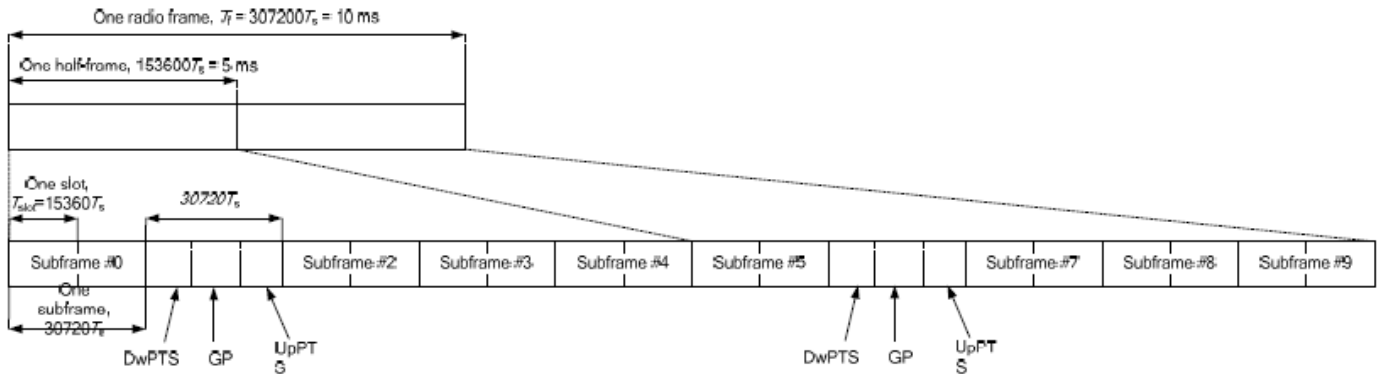

**Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).**

**Table 4.2-2: Uplink-downlink configurations.**

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

**Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).**

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink				
	DwPTS	UpPTS		DwPTS	UpPTS			
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$		
1	$19760 \cdot T_s$			$20480 \cdot T_s$				
2	$21952 \cdot T_s$			$23040 \cdot T_s$				
3	$24144 \cdot T_s$			$25600 \cdot T_s$				
4	$26336 \cdot T_s$			$7680 \cdot T_s$				
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$				
7	$21952 \cdot T_s$			$12800 \cdot T_s$				
8	$24144 \cdot T_s$			-			-	-
9	$13168 \cdot T_s$			-			-	-

<b>Special subframe (30720·T<sub>s</sub>): Normal cyclic prefix in downlink (UpPTS)</b>			
	<b>Special subframe configuration</b>	<b>Normal cyclic prefix in uplink</b>	<b>Extended cyclic prefix in uplink</b>
<b>Uplink duty factor in one special subframe</b>	<b>0~4</b>	7.13%	8.33%
	<b>5~9</b>	14.3%	16.7%

<b>Special subframe(30720·T<sub>s</sub>): Extended cyclic prefix in downlink (UpPTS)</b>			
	<b>Special subframe configuration</b>	<b>Normal cyclic prefix in uplink</b>	<b>Extended cyclic prefix in uplink</b>
<b>Uplink duty factor in one special subframe</b>	<b>0~3</b>	7.13%	8.33%
	<b>4~7</b>	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.





<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)		
Channel				39750	40185	40620	41055	41490				
Frequency (MHz)				2506	2549.5	2593	2636.5	2680				
20	QPSK	1	0	20.90	20.75	20.68	21.02	20.80	21.5	0		
20	QPSK	1	49	20.82	20.74	20.66	20.96	20.76				
20	QPSK	1	99	20.42	20.17	20.53	20.59	20.49				
20	QPSK	50	0	19.95	19.70	19.82	20.05	20.00	20.5	1		
20	QPSK	50	24	19.99	19.77	19.96	20.20	20.19				
20	QPSK	50	50	19.76	19.60	19.94	20.04	19.99				
20	QPSK	100	0	19.89	19.72	19.88	20.01	20.06	20.5	1		
20	16QAM	1	0	19.86	19.72	19.65	19.81	19.41				
20	16QAM	1	49	19.94	19.74	19.90	20.05	20.11				
20	16QAM	1	99	19.63	19.15	19.58	19.58	19.48	19.5	2		
20	16QAM	50	0	18.97	18.75	18.81	19.04	19.09				
20	16QAM	50	24	19.00	18.87	18.98	19.11	19.24				
20	16QAM	50	50	18.82	18.69	18.96	19.09	19.09	19.5	2		
20	16QAM	100	0	18.85	18.71	18.90	19.02	19.13				
Channel				39725	40173	40620	41068	41515			Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5				
15	QPSK	1	0	20.90	20.67	20.58	20.98	20.34				
15	QPSK	1	37	20.82	20.73	20.75	20.92	20.90	21.5	0		
15	QPSK	1	74	20.38	20.16	20.50	20.52	20.44				
15	QPSK	36	0	19.93	19.62	19.74	20.01	19.92				
15	QPSK	36	20	19.99	19.67	19.92	20.08	20.15	20.5	1		
15	QPSK	36	39	19.74	19.57	19.88	20.02	19.97				
15	QPSK	75	0	19.82	19.71	19.84	19.98	20.00				
15	16QAM	1	0	19.86	19.70	19.62	19.73	19.40	20.5	1		
15	16QAM	1	37	19.94	19.66	19.90	19.98	20.03				
15	16QAM	1	74	19.59	19.05	19.53	19.51	19.44				
15	16QAM	36	0	18.93	18.66	18.73	18.96	19.01	19.5	2		
15	16QAM	36	20	18.90	18.80	18.95	19.07	19.15				
15	16QAM	36	39	18.72	18.68	18.96	19.07	19.03				
15	16QAM	75	0	18.75	18.62	18.88	19.02	19.07	19.5	2		
Channel				39700	40160	40620	41080	41540			Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685				
10	QPSK	1	0	20.84	20.58	20.50	21.01	20.36				
10	QPSK	1	25	20.79	20.64	20.75	20.91	20.92	21.5	0		
10	QPSK	1	49	20.36	20.08	20.45	20.59	20.44				
10	QPSK	25	0	19.92	19.60	19.81	20.04	19.90				
10	QPSK	25	12	19.93	19.73	19.94	20.06	20.19	20.5	1		
10	QPSK	25	25	19.67	19.58	19.91	20.02	19.93				
10	QPSK	50	0	19.88	19.70	19.84	19.99	20.02				
10	16QAM	1	0	19.83	19.71	19.59	19.77	19.36	20.5	1		
10	16QAM	1	25	19.91	19.69	19.84	19.95	20.07				
10	16QAM	1	49	19.54	19.05	19.50	19.50	19.44				
10	16QAM	25	0	18.94	18.73	18.74	19.04	19.04	19.5	2		
10	16QAM	25	12	19.00	18.85	18.91	19.09	19.24				
10	16QAM	25	25	18.80	18.59	18.89	19.04	19.03				
10	16QAM	50	0	18.82	18.61	18.84	18.92	19.10	19.5	2		
Channel				39675	40148	40620	41093	41565			Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5				
5	QPSK	1	0	20.81	20.59	20.51	20.94	20.33				
5	QPSK	1	12	20.74	20.71	20.75	20.94	20.96	21.5	0		
5	QPSK	1	24	20.33	20.16	20.50	20.54	20.43				
5	QPSK	12	0	19.92	19.66	19.75	20.04	19.94				
5	QPSK	12	7	19.94	19.69	19.90	20.05	20.10	20.5	1		
5	QPSK	12	13	19.68	19.60	19.84	20.02	19.91				
5	QPSK	25	0	19.84	19.66	19.88	20.01	20.01				
5	16QAM	1	0	19.85	19.68	19.62	19.76	19.38	20.5	1		
5	16QAM	1	12	19.87	19.71	19.87	19.98	20.06				



**FCC SAR TEST REPORT**

**Report No. : FA0D1806**

5	16QAM	1	24	19.56	19.09	19.58	19.53	19.47		
5	16QAM	12	0	18.90	18.67	18.75	18.97	19.00	19.5	2
5	16QAM	12	7	18.92	18.80	18.95	19.01	19.23		
5	16QAM	12	13	18.76	18.62	18.96	19.09	18.99		
5	16QAM	25	0	18.77	18.66	18.81	18.96	19.06		

## **12. WiFi Output Power (Unit: dBm)**

**General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. 18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	14.67	15.00	99.38
		6	2437	13.66	14.00	
		11	2462	13.92	14.00	
	802.11g 6Mbps	1	2412	13.55	14.00	95.04
		6	2437	12.52	13.00	
		11	2462	12.37	13.00	
	802.11n-HT20 MCS0	1	2412	13.50	14.00	94.65
		6	2437	12.50	13.00	
		11	2462	12.61	13.00	
	802.11n-HT40 MCS0	3	2422	12.61	13.00	90.53
		6	2437	12.36	13.00	
		9	2452	11.89	12.00	



5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	13.20	13.50	95.15
		40	5200	13.00	13.50	
		44	5220	12.90	13.50	
		48	5240	12.80	13.50	
	802.11n-HT20 MCS0	36	5180	12.90	13.50	95.39
		40	5200	13.00	13.50	
		44	5220	12.70	13.50	
		48	5240	12.80	13.50	
	802.11n-HT40 MCS0	38	5190	13.00	13.50	90.25
46		5230	13.00	13.50		
802.11ac-VHT20 MCS0	36	5180	12.80	13.50	94.93	
	40	5200	13.00	13.50		
	44	5220	12.60	13.50		
	48	5240	12.70	13.50		
802.11ac-VHT40 MCS0	38	5190	12.90	13.50	90.52	
	46	5230	12.90	13.50		
802.11ac-VHT80 MCS0	42	5210	12.30	12.50	90.22	

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	13.10	13.50	95.15
		56	5280	13.10	13.50	
		60	5300	13.00	13.50	
		64	5320	13.00	13.50	
	802.11n-HT20 MCS0	52	5260	12.70	13.50	95.39
		56	5280	12.60	13.50	
		60	5300	12.70	13.50	
	802.11n-HT40 MCS0	54	5270	13.00	13.50	90.25
		62	5310	13.10	13.50	
	802.11ac-VHT20 MCS0	52	5260	12.60	13.50	94.93
		56	5280	12.50	13.50	
		60	5300	12.60	13.50	
		64	5320	12.70	13.50	
	802.11ac-VHT40 MCS0	54	5270	12.90	13.50	90.52
		62	5310	13.00	13.50	
802.11ac-VHT80 MCS0	58	5290	12.20	13.00	90.22	



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	12.20	12.50	95.15
		116	5580	11.60	12.50	
		124	5620	11.60	12.50	
		132	5660	11.60	12.50	
		140	5700	11.90	12.50	
	802.11n-HT20 MCS0	100	5500	12.00	12.50	95.39
		116	5580	11.90	12.50	
		124	5620	11.60	12.50	
		132	5660	11.80	12.50	
140		5700	11.70	12.50		
802.11n-HT40 MCS0	102	5510	12.60	13.00	90.25	
	110	5550	12.40	13.00		
	126	5630	12.10	13.00		
	134	5670	11.70	13.00		
802.11ac-VHT20 MCS0	100	5500	11.90	12.50	94.93	
	116	5580	11.80	12.50		
	124	5620	11.50	12.50		
	132	5660	11.80	12.50		
	140	5700	11.60	12.50		
802.11ac-VHT40 MCS0	102	5510	12.50	13.00	90.52	
	110	5550	12.30	13.00		
	126	5630	12.20	13.00		
	134	5670	11.60	13.00		
802.11ac-VHT80 MCS0	106	5530	11.30	12.50	90.22	
	122	5610	11.40	12.50		

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	12.00	12.50	95.15
		157	5785	11.70	12.50	
		165	5825	11.50	12.50	
	802.11n-HT20 MCS0	149	5745	11.70	12.50	95.39
		157	5785	11.80	12.50	
		165	5825	11.50	12.50	
	802.11n-HT40 MCS0	151	5755	12.00	12.50	90.25
		159	5795	12.00	12.50	
	802.11ac-VHT20 MCS0	149	5745	11.50	12.50	94.93
157		5785	11.60	12.50		
165		5825	11.40	12.50		
802.11ac-VHT40 MCS0	151	5755	11.90	12.50	90.52	
	159	5795	11.70	12.50		
802.11ac-VHT80 MCS0	155	5775	11.10	11.50	90.22	



### 13. Bluetooth Exclusions Applied

Mode Band	Max Average power(dBm)	
	BR/EDR	LE
2.4GHz Bluetooth	9	3.0

**Note:**

- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:  


$$[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [\sqrt{f(GHz)}] \leq 3.0$$
for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
  - f(GHz) is the RF channel transmit frequency in GHz
  - Power and distance are rounded to the nearest mW and mm before calculation
  - The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
9	5	2.48	2.5

**Note:**

Per KDB 447498 D01v06, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 2.5 which is ≤ 3, SAR testing is not required.

14. Antenna Location

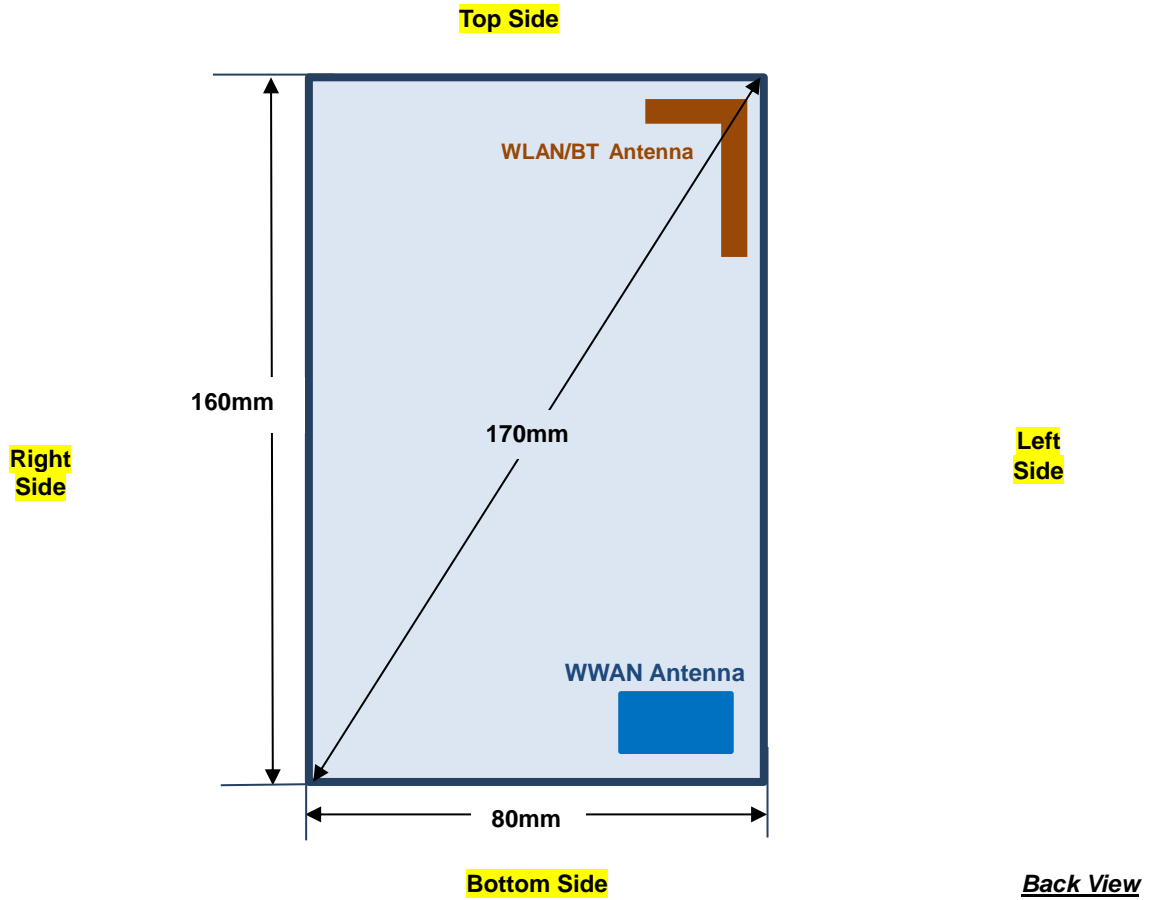

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	NO	Yes	NO	Yes
BT&WLAN	Yes	Yes	Yes	NO	NO	Yes

**General Note:**

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge



## 15. SAR Test Results

### General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
  - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, SAR testing with a headset connected to the handset is not required.
5. For 5.3GHz / 5.5GHz WLAN product specific SAR is necessary too, due to an overall diagonal dimension is  $> 16$ cm.

### UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq 1/4$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than  $1/4$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.



**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B12/B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 2/4/5/17 SAR test was covered by Band 25/66/26/12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. The maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion.
  - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



15.1 Head SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	SKU	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	SKU A	9538	1907.6	21.22	22.50	1.343	0.02	0.115	0.154
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	SKU A	9538	1907.6	21.22	22.50	1.343	0.08	0.123	0.165
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	SKU A	9538	1907.6	21.22	22.50	1.343	-0.06	0.248	0.333
01	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	SKU A	9262	1852.4	21.10	22.50	1.380	-0.04	0.294	0.406
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	SKU A	9400	1880	21.15	22.50	1.365	0.01	0.250	0.341
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	SKU A	9538	1907.6	21.22	22.50	1.343	-0.14	0.104	0.140
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	SKU B	9262	1852.4	21.10	22.50	1.380	0.05	0.288	0.398
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	SKU A	1413	1732.6	21.54	23.00	1.400	0.06	0.154	0.216
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	SKU A	1413	1732.6	21.54	23.00	1.400	-0.01	0.079	0.111
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	SKU A	1413	1732.6	21.54	23.00	1.400	-0.09	0.320	0.448
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	SKU A	1312	1712.4	21.33	23.00	1.469	-0.08	0.236	0.347
02	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	SKU A	1513	1752.6	21.46	23.00	1.426	-0.11	0.331	0.472
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	SKU A	1413	1732.6	21.54	23.00	1.400	0.05	0.108	0.151
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	SKU B	1513	1752.6	21.46	23.00	1.426	0.1	0.302	0.431
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	SKU A	4233	846.6	22.41	23.00	1.146	0.08	0.052	0.060
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	SKU A	4233	846.6	22.41	23.00	1.146	-0.14	0.001	0.001
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	SKU A	4233	846.6	22.41	23.00	1.146	-0.19	0.049	0.056
03	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	SKU A	4132	826.4	22.39	23.00	1.151	0.03	0.065	0.075
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	SKU A	4182	836.4	22.40	23.00	1.148	0.04	0.052	0.060
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	SKU A	4233	846.6	22.41	23.00	1.146	0.08	0.001	0.001
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	SKU B	4132	826.4	22.39	23.00	1.151	0.14	0.061	0.070



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	SKU	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	SKU A	20850	2510	21.40	22.50	1.288	-0.01	0.130	0.167
	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	SKU A	21100	2535	21.06	22.50	1.393	0.16	0.158	0.220
04	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	SKU A	21350	2560	20.91	22.50	1.442	-0.12	0.182	0.262
	LTE Band 7	20M	QPSK	50	50	Right Cheek	0mm	SKU A	20850	2510	20.37	21.50	1.297	0.17	0.101	0.131
	LTE Band 7	20M	QPSK	1	0	Right Tilted	0mm	SKU A	20850	2510	21.40	22.50	1.288	-0.03	0.073	0.094
	LTE Band 7	20M	QPSK	50	50	Right Tilted	0mm	SKU A	20850	2510	20.37	21.50	1.297	-0.11	0.057	0.074
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	SKU A	20850	2510	21.40	22.50	1.288	0.07	0.092	0.119
	LTE Band 7	20M	QPSK	50	50	Left Cheek	0mm	SKU A	20850	2510	20.37	21.50	1.297	0.14	0.072	0.093
	LTE Band 7	20M	QPSK	1	0	Left Tilted	0mm	SKU A	20850	2510	21.40	22.50	1.288	0.15	0.089	0.115
	LTE Band 7	20M	QPSK	50	50	Left Tilted	0mm	SKU A	20850	2510	20.37	21.50	1.297	-0.16	0.070	0.091
	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	SKU B	21350	2560	20.91	22.50	1.442	-0.11	0.167	0.241
	LTE Band 12	10M	QPSK	1	0	Right Cheek	0mm	SKU A	23095	707.5	22.34	23.00	1.164	-0.09	0.117	0.136
	LTE Band 12	10M	QPSK	25	12	Right Cheek	0mm	SKU A	23095	707.5	21.37	22.00	1.156	-0.14	0.093	0.108
	LTE Band 12	10M	QPSK	1	0	Right Tilted	0mm	SKU A	23095	707.5	22.34	23.00	1.164	0.16	0.088	0.102
	LTE Band 12	10M	QPSK	25	12	Right Tilted	0mm	SKU A	23095	707.5	21.37	22.00	1.156	0.07	0.070	0.081
05	LTE Band 12	10M	QPSK	1	0	Left Cheek	0mm	SKU A	23095	707.5	22.34	23.00	1.164	0.05	0.185	0.215
	LTE Band 12	10M	QPSK	25	12	Left Cheek	0mm	SKU A	23095	707.5	21.37	22.00	1.156	-0.17	0.148	0.171
	LTE Band 12	10M	QPSK	1	0	Left Tilted	0mm	SKU A	23095	707.5	22.34	23.00	1.164	-0.09	0.114	0.133
	LTE Band 12	10M	QPSK	25	12	Left Tilted	0mm	SKU A	23095	707.5	21.37	22.00	1.156	-0.19	0.092	0.106
	LTE Band 12	10M	QPSK	1	0	Left Cheek	0mm	SKU B	23095	707.5	22.34	23.00	1.164	0.18	0.162	0.189
	LTE Band 13	10M	QPSK	1	0	Right Cheek	0mm	SKU A	23230	782	22.40	23.00	1.148	-0.11	0.082	0.094
	LTE Band 13	10M	QPSK	25	0	Right Cheek	0mm	SKU A	23230	782	21.35	22.00	1.161	-0.18	0.064	0.074
	LTE Band 13	10M	QPSK	1	0	Right Tilted	0mm	SKU A	23230	782	22.40	23.00	1.148	-0.03	0.061	0.070
	LTE Band 13	10M	QPSK	25	0	Right Tilted	0mm	SKU A	23230	782	21.35	22.00	1.161	-0.1	0.047	0.055
06	LTE Band 13	10M	QPSK	1	0	Left Cheek	0mm	SKU A	23230	782	22.40	23.00	1.148	-0.12	0.102	0.117
	LTE Band 13	10M	QPSK	25	0	Left Cheek	0mm	SKU A	23230	782	21.35	22.00	1.161	0.02	0.080	0.093
	LTE Band 13	10M	QPSK	1	0	Left Tilted	0mm	SKU A	23230	782	22.40	23.00	1.148	0.05	0.076	0.087
	LTE Band 13	10M	QPSK	25	0	Left Tilted	0mm	SKU A	23230	782	21.35	22.00	1.161	0.04	0.058	0.067
	LTE Band 13	10M	QPSK	1	0	Left Cheek	0mm	SKU B	23230	782	22.40	23.00	1.148	0.07	0.098	0.113
	LTE Band 14	10M	QPSK	1	0	Right Cheek	0mm	SKU A	23330	793	22.41	23.00	1.146	-0.17	0.074	0.085
	LTE Band 14	10M	QPSK	25	0	Right Cheek	0mm	SKU A	23330	793	21.32	22.00	1.169	-0.06	0.057	0.067
	LTE Band 14	10M	QPSK	1	0	Right Tilted	0mm	SKU A	23330	793	22.41	23.00	1.146	0.04	0.054	0.062
	LTE Band 14	10M	QPSK	25	0	Right Tilted	0mm	SKU A	23330	793	21.32	22.00	1.169	0.09	0.042	0.049
07	LTE Band 14	10M	QPSK	1	0	Left Cheek	0mm	SKU A	23330	793	22.41	23.00	1.146	-0.06	0.111	0.127
	LTE Band 14	10M	QPSK	25	0	Left Cheek	0mm	SKU A	23330	793	21.32	22.00	1.169	-0.03	0.087	0.102
	LTE Band 14	10M	QPSK	1	0	Left Tilted	0mm	SKU A	23330	793	22.41	23.00	1.146	0.12	0.077	0.088
	LTE Band 14	10M	QPSK	25	0	Left Tilted	0mm	SKU A	23330	793	21.32	22.00	1.169	0.07	0.061	0.071
	LTE Band 14	10M	QPSK	1	0	Left Cheek	0mm	SKU B	23330	793	22.41	23.00	1.146	0.04	0.104	0.119
	LTE Band 25	20M	QPSK	1	0	Right Cheek	0mm	SKU A	26590	1905	21.40	22.00	1.148	0.05	0.127	0.146
	LTE Band 25	20M	QPSK	50	50	Right Cheek	0mm	SKU A	26590	1905	20.42	21.00	1.143	0.03	0.113	0.129
	LTE Band 25	20M	QPSK	1	0	Right Tilted	0mm	SKU A	26590	1905	21.40	22.00	1.148	-0.18	0.124	0.142
	LTE Band 25	20M	QPSK	50	50	Right Tilted	0mm	SKU A	26590	1905	20.42	21.00	1.143	0.04	0.093	0.106
08	LTE Band 25	20M	QPSK	1	0	Left Cheek	0mm	SKU A	26590	1905	21.40	22.00	1.148	-0.08	0.284	0.326
	LTE Band 25	20M	QPSK	1	0	Left Cheek	0mm	SKU A	26140	1860	20.88	22.00	1.294	-0.07	0.245	0.317
	LTE Band 25	20M	QPSK	1	0	Left Cheek	0mm	SKU A	26340	1880	20.86	22.00	1.300	0.05	0.248	0.322
	LTE Band 25	20M	QPSK	50	50	Left Cheek	0mm	SKU A	26590	1905	20.42	21.00	1.143	-0.06	0.261	0.298
	LTE Band 25	20M	QPSK	1	0	Left Tilted	0mm	SKU A	26590	1905	21.40	22.00	1.148	0.02	0.102	0.117
	LTE Band 25	20M	QPSK	50	50	Left Tilted	0mm	SKU A	26590	1905	20.42	21.00	1.143	-0.04	0.076	0.087
	LTE Band 25	20M	QPSK	1	0	Left Cheek	0mm	SKU B	26590	1905	21.40	22.00	1.148	-0.14	0.263	0.302



# FCC SAR TEST REPORT

Report No. : FA0D1806

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	SKU	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26	15M	QPSK	1	0	Right Cheek	0mm	SKU A	26865	831.5	22.73	23.50	1.194	-0.01	0.069	0.082
	LTE Band 26	15M	QPSK	36	0	Right Cheek	0mm	SKU A	26865	831.5	21.77	22.50	1.183	0.12	0.055	0.065
	LTE Band 26	15M	QPSK	1	0	Right Tilted	0mm	SKU A	26865	831.5	22.73	23.50	1.194	0.06	0.001	0.001
	LTE Band 26	15M	QPSK	36	0	Right Tilted	0mm	SKU A	26865	831.5	21.77	22.50	1.183	-0.17	0.001	0.001
09	LTE Band 26	15M	QPSK	1	0	Left Cheek	0mm	SKU A	26865	831.5	22.73	23.50	1.194	-0.19	0.081	0.097
	LTE Band 26	15M	QPSK	36	0	Left Cheek	0mm	SKU A	26865	831.5	21.77	22.50	1.183	-0.12	0.065	0.077
	LTE Band 26	15M	QPSK	1	0	Left Tilted	0mm	SKU A	26865	831.5	22.73	23.50	1.194	-0.13	0.001	0.001
	LTE Band 26	15M	QPSK	36	0	Left Tilted	0mm	SKU A	26865	831.5	21.77	22.50	1.183	0.09	0.001	0.001
	LTE Band 26	15M	QPSK	1	0	Left Cheek	0mm	SKU B	26865	831.5	22.73	23.50	1.194	0.15	0.077	0.092
	LTE Band 66	20M	QPSK	1	0	Right Cheek	0mm	SKU A	132072	1720	21.60	22.00	1.096	0.04	0.122	0.134
	LTE Band 66	20M	QPSK	50	50	Right Cheek	0mm	SKU A	132072	1720	20.23	21.00	1.194	0.13	0.091	0.109
	LTE Band 66	20M	QPSK	1	0	Right Tilted	0mm	SKU A	132072	1720	21.60	22.00	1.096	0.08	0.075	0.082
	LTE Band 66	20M	QPSK	50	50	Right Tilted	0mm	SKU A	132072	1720	20.23	21.00	1.194	-0.02	0.060	0.072
	LTE Band 66	20M	QPSK	1	0	Left Cheek	0mm	SKU A	132072	1720	21.60	22.00	1.096	0.09	0.222	0.243
	LTE Band 66	20M	QPSK	1	0	Left Cheek	0mm	SKU A	132322	1745	21.15	22.00	1.216	-0.04	0.225	0.274
10	LTE Band 66	20M	QPSK	1	0	Left Cheek	0mm	SKU A	132572	1770	21.06	22.00	1.242	-0.17	0.236	0.293
	LTE Band 66	20M	QPSK	50	50	Left Cheek	0mm	SKU A	132072	1720	20.23	21.00	1.194	0.06	0.199	0.238
	LTE Band 66	20M	QPSK	1	0	Left Tilted	0mm	SKU A	132072	1720	21.60	22.00	1.096	-0.11	0.084	0.092
	LTE Band 66	20M	QPSK	50	50	Left Tilted	0mm	SKU A	132072	1720	20.23	21.00	1.194	-0.02	0.070	0.084
	LTE Band 66	20M	QPSK	1	0	Left Cheek	0mm	SKU B	132572	1770	21.06	22.00	1.242	0.13	0.219	0.272
	LTE Band 71	20M	QPSK	1	0	Right Cheek	0mm	SKU A	133322	683	22.72	23.00	1.067	0.17	0.179	0.191
	LTE Band 71	20M	QPSK	50	50	Right Cheek	0mm	SKU A	133322	683	21.58	22.00	1.102	-0.11	0.135	0.149
	LTE Band 71	20M	QPSK	1	0	Right Tilted	0mm	SKU A	133322	683	22.72	23.00	1.067	0.12	0.118	0.126
	LTE Band 71	20M	QPSK	50	50	Right Tilted	0mm	SKU A	133322	683	21.58	22.00	1.102	0.13	0.090	0.099
11	LTE Band 71	20M	QPSK	1	0	Left Cheek	0mm	SKU A	133322	683	22.72	23.00	1.067	-0.01	0.282	0.301
	LTE Band 71	20M	QPSK	50	50	Left Cheek	0mm	SKU A	133322	683	21.58	22.00	1.102	0.06	0.213	0.235
	LTE Band 71	20M	QPSK	1	0	Left Tilted	0mm	SKU A	133322	683	22.72	23.00	1.067	0.14	0.172	0.183
	LTE Band 71	20M	QPSK	50	50	Left Tilted	0mm	SKU A	133322	683	21.58	22.00	1.102	-0.15	0.126	0.139
	LTE Band 71	20M	QPSK	1	0	Left Cheek	0mm	SKU B	133322	683	22.72	23.00	1.067	0.04	0.265	0.283

## <TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	SKU	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Right Cheek	0mm	SKU A	41055	2636.5	21.02	21.50	1.117	62.9	1.006	0.11	0.114	0.128
	LTE Band 41	20M	QPSK	1	0	Right Cheek	0mm	SKU A	39750	2506	20.90	21.50	1.148	62.9	1.006	0.11	0.083	0.096
	LTE Band 41	20M	QPSK	1	0	Right Cheek	0mm	SKU A	40185	2549.5	20.75	21.50	1.189	62.9	1.006	-0.07	0.098	0.117
12	LTE Band 41	20M	QPSK	1	0	Right Cheek	0mm	SKU A	40620	2593	20.68	21.50	1.208	62.9	1.006	-0.17	0.111	0.135
	LTE Band 41	20M	QPSK	1	0	Right Cheek	0mm	SKU A	41490	2680	20.80	21.50	1.175	62.9	1.006	0.11	0.110	0.130
	LTE Band 41	20M	QPSK	50	24	Right Cheek	0mm	SKU A	41055	2636.5	20.20	20.50	1.072	62.9	1.006	0.09	0.096	0.103
	LTE Band 41	20M	QPSK	1	0	Right Tilted	0mm	SKU A	41055	2636.5	21.02	21.50	1.117	62.9	1.006	-0.07	0.041	0.046
	LTE Band 41	20M	QPSK	50	24	Right Tilted	0mm	SKU A	41055	2636.5	20.20	20.50	1.072	62.9	1.006	0.15	0.034	0.037
	LTE Band 41	20M	QPSK	1	0	Left Cheek	0mm	SKU A	41055	2636.5	21.02	21.50	1.117	62.9	1.006	0.11	0.055	0.062
	LTE Band 41	20M	QPSK	50	24	Left Cheek	0mm	SKU A	41055	2636.5	20.20	20.50	1.072	62.9	1.006	0.08	0.046	0.050
	LTE Band 41	20M	QPSK	1	0	Left Tilted	0mm	SKU A	41055	2636.5	21.02	21.50	1.117	62.9	1.006	-0.04	0.058	0.065
	LTE Band 41	20M	QPSK	50	24	Left Tilted	0mm	SKU A	41055	2636.5	20.20	20.50	1.072	62.9	1.006	-0.04	0.049	0.053
	LTE Band 41	20M	QPSK	1	0	Right Cheek	0mm	SKU B	40620	2593	20.68	21.50	1.208	62.9	1.006	0.15	0.105	0.128



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	SKU	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
13	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	SKU A	1	2412	14.67	15.00	1.079	99.38	1.006	-0.09	0.032	0.035
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	SKU A	1	2412	14.67	15.00	1.079	99.38	1.006	0.05	0.003	0.003
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	SKU A	1	2412	14.67	15.00	1.079	99.38	1.006	0.01	0.018	0.020
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	SKU A	1	2412	14.67	15.00	1.079	99.38	1.006	-0.04	0.002	0.002
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	SKU B	1	2412	14.67	15.00	1.079	99.38	1.006	-0.18	0.029	0.031
14	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	SKU A	62	5310	13.10	13.50	1.096	90.25	1.108	0.09	0.023	0.028
	WLAN5GHz	802.11n-HT40 MCS0	Right Tilted	0mm	SKU A	62	5310	13.10	13.50	1.096	90.25	1.108	-0.17	0.008	0.009
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	SKU A	62	5310	13.10	13.50	1.096	90.25	1.108	-0.02	0.019	0.023
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	SKU A	62	5310	13.10	13.50	1.096	90.25	1.108	0.17	0.006	0.008
	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	SKU B	62	5310	13.10	13.50	1.096	90.25	1.108	0.03	0.021	0.026
15	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	SKU A	102	5510	12.60	13.00	1.096	90.25	1.108	0.14	0.025	0.030
	WLAN5GHz	802.11n-HT40 MCS0	Right Tilted	0mm	SKU A	102	5510	12.60	13.00	1.096	90.25	1.108	-0.19	0.018	0.022
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	SKU A	102	5510	12.60	13.00	1.096	90.25	1.108	0.1	0.024	0.029
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	SKU A	102	5510	12.60	13.00	1.096	90.25	1.108	-0.14	0.016	0.019
	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	SKU B	102	5510	12.60	13.00	1.096	90.25	1.108	-0.06	0.023	0.028
16	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	SKU A	151	5755	12.00	12.50	1.122	90.25	1.108	0.18	0.012	0.015
	WLAN5GHz	802.11n-HT40 MCS0	Right Tilted	0mm	SKU A	151	5755	12.00	12.50	1.122	90.25	1.108	-0.13	0.008	0.010
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	SKU A	151	5755	12.00	12.50	1.122	90.25	1.108	0.11	0.011	0.014
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	SKU A	151	5755	12.00	12.50	1.122	90.25	1.108	-0.1	0.006	0.007
	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	SKU B	151	5755	12.00	12.50	1.122	90.25	1.108	0.12	0.009	0.011

15.2 Hotspot SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	SKU	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	SKU A	9538	1907.6	21.22	22.50	1.343	0.07	0.211	0.283
	WCDMA II	RMC 12.2Kbps	Back	10mm	SKU A	9538	1907.6	21.22	22.50	1.343	-0.03	0.455	0.611
17	WCDMA II	RMC 12.2Kbps	Back	10mm	SKU A	9262	1852.4	21.10	22.50	1.380	-0.05	0.561	0.774
	WCDMA II	RMC 12.2Kbps	Back	10mm	SKU A	9400	1880	21.15	22.50	1.365	0.04	0.490	0.669
	WCDMA II	RMC 12.2Kbps	Left Side	10mm	SKU A	9538	1907.6	21.22	22.50	1.343	-0.09	0.176	0.236
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	SKU A	9538	1907.6	21.22	22.50	1.343	-0.18	0.254	0.341
	WCDMA II	RMC 12.2Kbps	Back	10mm	SKU B	9262	1852.4	21.10	22.50	1.380	-0.15	0.536	0.740
	WCDMA IV	RMC 12.2Kbps	Front	10mm	SKU A	1413	1732.6	21.54	23.00	1.400	0.18	0.432	0.605
	WCDMA IV	RMC 12.2Kbps	Back	10mm	SKU A	1413	1732.6	21.54	23.00	1.400	-0.15	0.443	0.620
	WCDMA IV	RMC 12.2Kbps	Back	10mm	SKU A	1312	1712.4	21.33	23.00	1.469	0.03	0.337	0.495
18	WCDMA IV	RMC 12.2Kbps	Back	10mm	SKU A	1513	1752.6	21.46	23.00	1.426	-0.03	0.495	0.706
	WCDMA IV	RMC 12.2Kbps	Left Side	10mm	SKU A	1413	1732.6	21.54	23.00	1.400	-0.17	0.227	0.318
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	SKU A	1413	1732.6	21.54	23.00	1.400	-0.13	0.254	0.355
	WCDMA IV	RMC 12.2Kbps	Back	10mm	SKU B	1513	1752.6	21.46	23.00	1.426	-0.1	0.461	0.657
	WCDMA V	RMC 12.2Kbps	Front	10mm	SKU A	4233	846.6	22.41	23.00	1.146	0.19	0.061	0.070
19	WCDMA V	RMC 12.2Kbps	Back	10mm	SKU A	4233	846.6	22.41	23.00	1.146	-0.05	0.142	0.163
	WCDMA V	RMC 12.2Kbps	Back	10mm	SKU A	4132	826.4	22.39	23.00	1.151	-0.19	0.076	0.087
	WCDMA V	RMC 12.2Kbps	Back	10mm	SKU A	4182	836.4	22.40	23.00	1.148	-0.15	0.081	0.093
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	SKU A	4233	846.6	22.41	23.00	1.146	-0.05	0.056	0.064
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	SKU A	4233	846.6	22.41	23.00	1.146	-0.16	0.049	0.056
	WCDMA V	RMC 12.2Kbps	Back	10mm	SKU B	4233	846.6	22.41	23.00	1.146	-0.13	0.118	0.135



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	SKU	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Front	10mm	SKU A	20850	2510	21.40	22.50	1.288	0.04	0.194	0.250
	LTE Band 7	20M	QPSK	50	50	Front	10mm	SKU A	20850	2510	20.37	21.50	1.297	0.01	0.168	0.218
	LTE Band 7	20M	QPSK	1	0	Back	10mm	SKU A	20850	2510	21.40	22.50	1.288	-0.19	0.550	0.709
20	LTE Band 7	20M	QPSK	1	0	Back	10mm	SKU A	21100	2535	21.06	22.50	1.393	-0.03	0.555	0.773
	LTE Band 7	20M	QPSK	1	0	Back	10mm	SKU A	21350	2560	20.91	22.50	1.442	-0.03	0.504	0.727
	LTE Band 7	20M	QPSK	50	50	Back	10mm	SKU A	20850	2510	20.37	21.50	1.297	0.04	0.489	0.634
	LTE Band 7	20M	QPSK	1	0	Left Side	10mm	SKU A	20850	2510	21.40	22.50	1.288	-0.17	0.080	0.103
	LTE Band 7	20M	QPSK	50	50	Left Side	10mm	SKU A	20850	2510	20.37	21.50	1.297	0.08	0.061	0.079
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10mm	SKU A	20850	2510	21.40	22.50	1.288	-0.08	0.300	0.386
	LTE Band 7	20M	QPSK	50	50	Bottom Side	10mm	SKU A	20850	2510	20.37	21.50	1.297	-0.09	0.241	0.313
	LTE Band 7	20M	QPSK	1	0	Back	10mm	SKU B	21100	2535	21.06	22.50	1.393	-0.16	0.537	0.748
	LTE Band 12	10M	QPSK	1	0	Front	10mm	SKU A	23095	707.5	22.34	23.00	1.164	0.03	0.095	0.111
	LTE Band 12	10M	QPSK	25	12	Front	10mm	SKU A	23095	707.5	21.37	22.00	1.156	0.09	0.078	0.090
21	LTE Band 12	10M	QPSK	1	0	Back	10mm	SKU A	23095	707.5	22.34	23.00	1.164	-0.12	0.242	0.282
	LTE Band 12	10M	QPSK	25	12	Back	10mm	SKU A	23095	707.5	21.37	22.00	1.156	-0.14	0.193	0.223
	LTE Band 12	10M	QPSK	1	0	Left Side	10mm	SKU A	23095	707.5	22.34	23.00	1.164	0.03	0.082	0.095
	LTE Band 12	10M	QPSK	25	12	Left Side	10mm	SKU A	23095	707.5	21.37	22.00	1.156	0.04	0.071	0.082
	LTE Band 12	10M	QPSK	1	0	Bottom Side	10mm	SKU A	23095	707.5	22.34	23.00	1.164	0.12	0.067	0.078
	LTE Band 12	10M	QPSK	25	12	Bottom Side	10mm	SKU A	23095	707.5	21.37	22.00	1.156	0.01	0.060	0.069
	LTE Band 12	10M	QPSK	1	0	Back	10mm	SKU B	23095	707.5	22.34	23.00	1.164	0.02	0.231	0.269
	LTE Band 13	10M	QPSK	1	0	Front	10mm	SKU A	23230	782	22.40	23.00	1.148	-0.14	0.069	0.079
	LTE Band 13	10M	QPSK	25	0	Front	10mm	SKU A	23230	782	21.35	22.00	1.161	0.05	0.059	0.069
22	LTE Band 13	10M	QPSK	1	0	Back	10mm	SKU A	23230	782	22.40	23.00	1.148	-0.01	0.140	0.161
	LTE Band 13	10M	QPSK	25	0	Back	10mm	SKU A	23230	782	21.35	22.00	1.161	0.16	0.093	0.108
	LTE Band 13	10M	QPSK	1	0	Left Side	10mm	SKU A	23230	782	22.40	23.00	1.148	0.08	0.071	0.082
	LTE Band 13	10M	QPSK	25	0	Left Side	10mm	SKU A	23230	782	21.35	22.00	1.161	0.01	0.048	0.056
	LTE Band 13	10M	QPSK	1	0	Bottom Side	10mm	SKU A	23230	782	22.40	23.00	1.148	-0.07	0.043	0.049
	LTE Band 13	10M	QPSK	25	0	Bottom Side	10mm	SKU A	23230	782	21.35	22.00	1.161	0.05	0.037	0.043
	LTE Band 13	10M	QPSK	1	0	Back	10mm	SKU B	23230	782	22.40	23.00	1.148	0.17	0.121	0.139
	LTE Band 14	10M	QPSK	1	0	Front	10mm	SKU A	23330	793	22.41	23.00	1.146	-0.01	0.067	0.077
	LTE Band 14	10M	QPSK	25	0	Front	10mm	SKU A	23330	793	21.32	22.00	1.169	0.09	0.054	0.063
23	LTE Band 14	10M	QPSK	1	0	Back	10mm	SKU A	23330	793	22.41	23.00	1.146	-0.01	0.137	0.157
	LTE Band 14	10M	QPSK	25	0	Back	10mm	SKU A	23330	793	21.32	22.00	1.169	-0.17	0.081	0.095
	LTE Band 14	10M	QPSK	1	0	Left Side	10mm	SKU A	23330	793	22.41	23.00	1.146	0.1	0.068	0.078
	LTE Band 14	10M	QPSK	25	0	Left Side	10mm	SKU A	23330	793	21.32	22.00	1.169	-0.08	0.055	0.064
	LTE Band 14	10M	QPSK	1	0	Bottom Side	10mm	SKU A	23330	793	22.41	23.00	1.146	-0.09	0.009	0.010
	LTE Band 14	10M	QPSK	25	0	Bottom Side	10mm	SKU A	23330	793	21.32	22.00	1.169	0.02	0.007	0.008
	LTE Band 14	10M	QPSK	1	0	Back	10mm	SKU B	23330	793	22.41	23.00	1.146	-0.12	0.111	0.127
	LTE Band 25	20M	QPSK	1	0	Front	10mm	SKU A	26590	1905	21.40	22.00	1.148	0.09	0.229	0.263
	LTE Band 25	20M	QPSK	50	50	Front	10mm	SKU A	26590	1905	20.42	21.00	1.143	0.03	0.189	0.216
	LTE Band 25	20M	QPSK	1	0	Back	10mm	SKU A	26590	1905	21.40	22.00	1.148	-0.05	0.507	0.582
	LTE Band 25	20M	QPSK	1	0	Back	10mm	SKU A	26140	1860	20.88	22.00	1.294	-0.02	0.450	0.582
24	LTE Band 25	20M	QPSK	1	0	Back	10mm	SKU A	26340	1880	20.86	22.00	1.300	0.01	0.457	0.594
	LTE Band 25	20M	QPSK	50	50	Back	10mm	SKU A	26590	1905	20.42	21.00	1.143	0.05	0.412	0.471
	LTE Band 25	20M	QPSK	1	0	Left Side	10mm	SKU A	26590	1905	21.40	22.00	1.148	0.13	0.211	0.242
	LTE Band 25	20M	QPSK	50	50	Left Side	10mm	SKU A	26590	1905	20.42	21.00	1.143	0.04	0.178	0.203
	LTE Band 25	20M	QPSK	1	0	Bottom Side	10mm	SKU A	26590	1905	21.40	22.00	1.148	0.17	0.239	0.274
	LTE Band 25	20M	QPSK	50	50	Bottom Side	10mm	SKU A	26590	1905	20.42	21.00	1.143	0.03	0.203	0.232
	LTE Band 25	20M	QPSK	1	0	Back	10mm	SKU B	26340	1880	20.86	22.00	1.300	0.01	0.421	0.547



# FCC SAR TEST REPORT

Report No. : FA0D1806

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	SKU	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26	15M	QPSK	1	0	Front	10mm	SKU A	26865	831.5	22.73	23.50	1.194	0.14	0.066	0.079
	LTE Band 26	15M	QPSK	36	0	Front	10mm	SKU A	26865	831.5	21.77	22.50	1.183	0.06	0.050	0.059
25	LTE Band 26	15M	QPSK	1	0	Back	10mm	SKU A	26865	831.5	22.73	23.50	1.194	-0.08	0.086	0.103
	LTE Band 26	15M	QPSK	36	0	Back	10mm	SKU A	26865	831.5	21.77	22.50	1.183	-0.06	0.072	0.085
	LTE Band 26	15M	QPSK	1	0	Left Side	10mm	SKU A	26865	831.5	23.19	23.50	1.074	0.16	0.039	0.042
	LTE Band 26	15M	QPSK	36	0	Left Side	10mm	SKU A	26865	831.5	21.77	22.50	1.183	0.04	0.030	0.035
	LTE Band 26	15M	QPSK	1	0	Bottom Side	10mm	SKU A	26865	831.5	23.19	23.50	1.074	-0.18	0.002	0.002
	LTE Band 26	15M	QPSK	36	0	Bottom Side	10mm	SKU A	26865	831.5	21.77	22.50	1.183	0.04	0.001	0.001
	LTE Band 26	15M	QPSK	1	0	Back	10mm	SKU B	26865	831.5	22.73	23.50	1.194	0.17	0.078	0.093
	LTE Band 66	20M	QPSK	1	0	Front	10mm	SKU A	132072	1720	21.60	22.00	1.096	0.1	0.278	0.305
	LTE Band 66	20M	QPSK	50	50	Front	10mm	SKU A	132072	1720	20.23	21.00	1.194	0.03	0.213	0.254
	LTE Band 66	20M	QPSK	1	0	Back	10mm	SKU A	132072	1720	21.60	22.00	1.096	0.04	0.410	0.450
	LTE Band 66	20M	QPSK	1	0	Back	10mm	SKU A	132322	1745	21.15	22.00	1.216	-0.01	0.495	0.602
26	LTE Band 66	20M	QPSK	1	0	Back	10mm	SKU A	132572	1770	21.06	22.00	1.242	0.08	0.492	0.611
	LTE Band 66	20M	QPSK	50	50	Back	10mm	SKU A	132072	1720	20.23	21.00	1.194	0.12	0.367	0.438
	LTE Band 66	20M	QPSK	1	0	Left Side	10mm	SKU A	132072	1720	21.60	22.00	1.096	0.12	0.213	0.234
	LTE Band 66	20M	QPSK	50	50	Left Side	10mm	SKU A	132072	1720	20.23	21.00	1.194	0.05	0.166	0.198
	LTE Band 66	20M	QPSK	1	0	Bottom Side	10mm	SKU A	132072	1720	21.60	22.00	1.096	-0.1	0.168	0.184
	LTE Band 66	20M	QPSK	50	50	Bottom Side	10mm	SKU A	132072	1720	20.23	21.00	1.194	-0.09	0.128	0.153
	LTE Band 66	20M	QPSK	1	0	Back	10mm	SKU B	132572	1770	21.06	22.00	1.242	-0.05	0.474	0.589
	LTE Band 71	20M	QPSK	1	0	Front	10mm	SKU A	133322	683	22.72	23.00	1.067	-0.14	0.275	0.293
	LTE Band 71	20M	QPSK	50	50	Front	10mm	SKU A	133322	683	21.58	22.00	1.102	0.04	0.222	0.245
27	LTE Band 71	20M	QPSK	1	0	Back	10mm	SKU A	133322	683	22.72	23.00	1.067	-0.05	0.385	0.411
	LTE Band 71	20M	QPSK	50	50	Back	10mm	SKU A	133322	683	21.58	22.00	1.102	-0.04	0.286	0.315
	LTE Band 71	20M	QPSK	1	0	Left Side	10mm	SKU A	133322	683	22.72	23.00	1.067	-0.18	0.157	0.167
	LTE Band 71	20M	QPSK	50	50	Left Side	10mm	SKU A	133322	683	21.58	22.00	1.102	0.08	0.124	0.137
	LTE Band 71	20M	QPSK	1	0	Bottom Side	10mm	SKU A	133322	683	22.72	23.00	1.067	-0.19	0.136	0.145
	LTE Band 71	20M	QPSK	50	50	Bottom Side	10mm	SKU A	133322	683	21.58	22.00	1.102	0.05	0.103	0.113
	LTE Band 71	20M	QPSK	1	0	Back	10mm	SKU B	133322	683	22.72	23.00	1.067	0.09	0.367	0.391

## <TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	SKU	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	10mm	SKU A	41055	2636.5	21.02	21.50	1.117	62.9	1.006	0.17	0.178	0.200
	LTE Band 41	20M	QPSK	50	24	Front	10mm	SKU A	41055	2636.5	20.20	20.50	1.072	62.9	1.006	-0.15	0.147	0.158
	LTE Band 41	20M	QPSK	1	0	Back	10mm	SKU A	41055	2636.5	21.02	21.50	1.117	62.9	1.006	0	0.374	0.420
	LTE Band 41	20M	QPSK	1	0	Back	10mm	SKU A	39750	2506	20.90	21.50	1.148	62.9	1.006	0.02	0.264	0.305
	LTE Band 41	20M	QPSK	1	0	Back	10mm	SKU A	40185	2549.5	20.75	21.50	1.189	62.9	1.006	-0.04	0.281	0.336
	LTE Band 41	20M	QPSK	1	0	Back	10mm	SKU A	40620	2593	20.68	21.50	1.208	62.9	1.006	0.01	0.358	0.435
28	LTE Band 41	20M	QPSK	1	0	Back	10mm	SKU A	41490	2680	20.80	21.50	1.175	62.9	1.006	-0.12	0.390	0.461
	LTE Band 41	20M	QPSK	50	24	Back	10mm	SKU A	41055	2636.5	20.20	20.50	1.072	62.9	1.006	-0.08	0.341	0.368
	LTE Band 41	20M	QPSK	1	0	Left Side	10mm	SKU A	41055	2636.5	21.02	21.50	1.117	62.9	1.006	0.15	0.038	0.043
	LTE Band 41	20M	QPSK	50	24	Left Side	10mm	SKU A	41055	2636.5	20.20	20.50	1.072	62.9	1.006	0.17	0.032	0.034
	LTE Band 41	20M	QPSK	1	0	Bottom Side	10mm	SKU A	41055	2636.5	21.02	21.50	1.117	62.9	1.006	0.07	0.254	0.285
	LTE Band 41	20M	QPSK	50	24	Bottom Side	10mm	SKU A	41055	2636.5	20.20	20.50	1.072	62.9	1.006	0.07	0.210	0.226
	LTE Band 41	20M	QPSK	1	0	Back	10mm	SKU B	41490	2680	20.80	21.50	1.175	62.9	1.006	-0.14	0.367	0.434



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	SKU	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	SKU A	1	2412	14.67	15.00	1.079	99.38	1.006	0.08	0.001	0.001
29	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	SKU A	1	2412	14.67	15.00	1.079	99.38	1.006	-0.12	0.053	0.058
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	SKU A	1	2412	14.67	15.00	1.079	99.38	1.006	-0.04	0.035	0.038
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	SKU A	1	2412	14.67	15.00	1.079	99.38	1.006	0.01	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	SKU B	1	2412	14.67	15.00	1.079	99.38	1.006	0.05	0.048	0.052
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	SKU A	46	5230	13.00	13.50	1.122	90.25	1.108	-0.15	0.036	0.045
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	SKU A	46	5230	13.00	13.50	1.122	90.25	1.108	0.11	0.045	0.056
30	WLAN5GHz	802.11n-HT40 MCS0	Left Side	10mm	SKU A	46	5230	13.00	13.50	1.122	90.25	1.108	-0.15	0.062	0.077
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	10mm	SKU A	46	5230	13.00	13.50	1.122	90.25	1.108	0.11	0.038	0.047
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	10mm	SKU B	46	5230	13.00	13.50	1.122	90.25	1.108	-0.02	0.055	0.068
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	SKU A	151	5755	12.00	12.50	1.122	90.25	1.108	-0.06	0.019	0.024
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	SKU A	151	5755	12.00	12.50	1.122	90.25	1.108	-0.18	0.032	0.040
31	WLAN5GHz	802.11n-HT40 MCS0	Left Side	10mm	SKU A	151	5755	12.00	12.50	1.122	90.25	1.108	-0.13	0.041	0.051
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	10mm	SKU A	151	5755	12.00	12.50	1.122	90.25	1.108	0.17	0.016	0.020
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	10mm	SKU B	151	5755	12.00	12.50	1.122	90.25	1.108	0.07	0.037	0.046

15.3 Body Worn Accessory SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	SKU	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	SKU A	9538	1907.6	21.22	22.50	1.343	0.07	0.211	0.283
	WCDMA II	RMC 12.2Kbps	Back	10mm	SKU A	9538	1907.6	21.22	22.50	1.343	-0.03	0.455	0.611
32	WCDMA II	RMC 12.2Kbps	Back	10mm	SKU A	9262	1852.4	21.10	22.50	1.380	-0.05	0.561	0.774
	WCDMA II	RMC 12.2Kbps	Back	10mm	SKU A	9400	1880	21.15	22.50	1.365	0.04	0.490	0.669
	WCDMA II	RMC 12.2Kbps	Back	10mm	SKU B	9262	1852.4	21.10	22.50	1.380	-0.15	0.536	0.740
	WCDMA IV	RMC 12.2Kbps	Front	10mm	SKU A	1413	1732.6	21.54	23.00	1.400	0.18	0.432	0.605
	WCDMA IV	RMC 12.2Kbps	Back	10mm	SKU A	1413	1732.6	21.54	23.00	1.400	-0.15	0.443	0.620
	WCDMA IV	RMC 12.2Kbps	Back	10mm	SKU A	1312	1712.4	21.33	23.00	1.469	0.03	0.337	0.495
33	WCDMA IV	RMC 12.2Kbps	Back	10mm	SKU A	1513	1752.6	21.46	23.00	1.426	-0.03	0.495	0.706
	WCDMA IV	RMC 12.2Kbps	Back	10mm	SKU B	1513	1752.6	21.46	23.00	1.426	-0.1	0.461	0.657
	WCDMA V	RMC 12.2Kbps	Front	10mm	SKU A	4233	846.6	22.41	23.00	1.146	0.19	0.061	0.070
34	WCDMA V	RMC 12.2Kbps	Back	10mm	SKU A	4233	846.6	22.41	23.00	1.146	-0.05	0.142	0.163
	WCDMA V	RMC 12.2Kbps	Back	10mm	SKU A	4132	826.4	22.39	23.00	1.151	-0.19	0.076	0.087
	WCDMA V	RMC 12.2Kbps	Back	10mm	SKU A	4182	836.4	22.40	23.00	1.148	-0.15	0.081	0.093
	WCDMA V	RMC 12.2Kbps	Back	10mm	SKU B	4233	846.6	22.41	23.00	1.146	-0.13	0.118	0.135





<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	SKU	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Front	10mm	SKU A	20850	2510	21.40	22.50	1.288	0.04	0.194	0.250
	LTE Band 7	20M	QPSK	50	50	Front	10mm	SKU A	20850	2510	20.37	21.50	1.297	0.01	0.168	0.218
	LTE Band 7	20M	QPSK	1	0	Back	10mm	SKU A	20850	2510	21.40	22.50	1.288	-0.19	0.550	0.709
35	LTE Band 7	20M	QPSK	1	0	Back	10mm	SKU A	21100	2535	21.06	22.50	1.393	-0.03	0.555	0.773
	LTE Band 7	20M	QPSK	1	0	Back	10mm	SKU A	21350	2560	20.91	22.50	1.442	-0.03	0.504	0.727
	LTE Band 7	20M	QPSK	50	50	Back	10mm	SKU A	20850	2510	20.37	21.50	1.297	0.04	0.489	0.634
	LTE Band 7	20M	QPSK	1	0	Back	10mm	SKU B	21100	2535	21.06	22.50	1.393	-0.16	0.537	0.748
	LTE Band 12	10M	QPSK	1	0	Front	10mm	SKU A	23095	707.5	22.34	23.00	1.164	0.03	0.095	0.111
	LTE Band 12	10M	QPSK	25	12	Front	10mm	SKU A	23095	707.5	21.37	22.00	1.156	0.09	0.078	0.090
36	LTE Band 12	10M	QPSK	1	0	Back	10mm	SKU A	23095	707.5	22.34	23.00	1.164	-0.12	0.242	0.282
	LTE Band 12	10M	QPSK	25	12	Back	10mm	SKU A	23095	707.5	21.37	22.00	1.156	-0.14	0.193	0.223
	LTE Band 12	10M	QPSK	1	0	Back	10mm	SKU B	23095	707.5	22.34	23.00	1.164	0.02	0.231	0.269
	LTE Band 13	10M	QPSK	1	0	Front	10mm	SKU A	23230	782	22.40	23.00	1.148	-0.14	0.069	0.079
	LTE Band 13	10M	QPSK	25	0	Front	10mm	SKU A	23230	782	21.35	22.00	1.161	0.05	0.059	0.069
37	LTE Band 13	10M	QPSK	1	0	Back	10mm	SKU A	23230	782	22.40	23.00	1.148	-0.01	0.140	0.161
	LTE Band 13	10M	QPSK	25	0	Back	10mm	SKU A	23230	782	21.35	22.00	1.161	0.16	0.093	0.108
	LTE Band 13	10M	QPSK	1	0	Back	10mm	SKU B	23230	782	22.40	23.00	1.148	0.17	0.121	0.139
	LTE Band 14	10M	QPSK	1	0	Front	10mm	SKU A	23330	793	22.41	23.00	1.146	-0.01	0.067	0.077
	LTE Band 14	10M	QPSK	25	0	Front	10mm	SKU A	23330	793	21.32	22.00	1.169	0.09	0.054	0.063
38	LTE Band 14	10M	QPSK	1	0	Back	10mm	SKU A	23330	793	22.41	23.00	1.146	-0.01	0.137	0.157
	LTE Band 14	10M	QPSK	25	0	Back	10mm	SKU A	23330	793	21.32	22.00	1.169	-0.17	0.081	0.095
	LTE Band 14	10M	QPSK	1	0	Back	10mm	SKU B	23330	793	22.41	23.00	1.146	-0.12	0.111	0.127
	LTE Band 25	20M	QPSK	1	0	Front	10mm	SKU A	26590	1905	21.40	22.00	1.148	0.09	0.229	0.263
	LTE Band 25	20M	QPSK	50	50	Front	10mm	SKU A	26590	1905	20.42	21.00	1.143	0.03	0.189	0.216
	LTE Band 25	20M	QPSK	1	0	Back	10mm	SKU A	26590	1905	21.40	22.00	1.148	-0.05	0.507	0.582
	LTE Band 25	20M	QPSK	1	0	Back	10mm	SKU A	26140	1860	20.88	22.00	1.294	-0.02	0.450	0.582
39	LTE Band 25	20M	QPSK	1	0	Back	10mm	SKU A	26340	1880	20.86	22.00	1.300	0.01	0.457	0.594
	LTE Band 25	20M	QPSK	50	50	Back	10mm	SKU A	26590	1905	20.42	21.00	1.143	0.05	0.412	0.471
	LTE Band 25	20M	QPSK	1	0	Back	10mm	SKU B	26340	1880	20.86	22.00	1.300	0.01	0.421	0.547
	LTE Band 26	15M	QPSK	1	0	Front	10mm	SKU A	26865	831.5	22.73	23.50	1.194	0.14	0.066	0.079
	LTE Band 26	15M	QPSK	36	0	Front	10mm	SKU A	26865	831.5	21.77	22.50	1.183	0.06	0.050	0.059
40	LTE Band 26	15M	QPSK	1	0	Back	10mm	SKU A	26865	831.5	22.73	23.50	1.194	-0.08	0.086	0.103
	LTE Band 26	15M	QPSK	36	0	Back	10mm	SKU A	26865	831.5	21.77	22.50	1.183	-0.06	0.072	0.085
	LTE Band 26	15M	QPSK	1	0	Back	10mm	SKU B	26865	831.5	22.73	23.50	1.194	0.17	0.078	0.093
	LTE Band 66	20M	QPSK	1	0	Front	10mm	SKU A	132072	1720	21.60	22.00	1.096	0.1	0.278	0.305
	LTE Band 66	20M	QPSK	50	50	Front	10mm	SKU A	132072	1720	20.23	21.00	1.194	0.03	0.213	0.254
	LTE Band 66	20M	QPSK	1	0	Back	10mm	SKU A	132072	1720	21.60	22.00	1.096	0.04	0.410	0.450
	LTE Band 66	20M	QPSK	1	0	Back	10mm	SKU A	132322	1745	21.15	22.00	1.216	-0.01	0.495	0.602
41	LTE Band 66	20M	QPSK	1	0	Back	10mm	SKU A	132572	1770	21.06	22.00	1.242	0.08	0.492	0.611
	LTE Band 66	20M	QPSK	50	50	Back	10mm	SKU A	132072	1720	20.23	21.00	1.194	0.12	0.367	0.438
	LTE Band 66	20M	QPSK	1	0	Back	10mm	SKU B	132572	1770	21.06	22.00	1.242	-0.05	0.474	0.589
	LTE Band 71	20M	QPSK	1	0	Front	10mm	SKU A	133322	683	22.72	23.00	1.067	-0.14	0.275	0.293
	LTE Band 71	20M	QPSK	50	50	Front	10mm	SKU A	133322	683	21.58	22.00	1.102	0.04	0.222	0.245
42	LTE Band 71	20M	QPSK	1	0	Back	10mm	SKU A	133322	683	22.72	23.00	1.067	-0.05	0.385	0.411
	LTE Band 71	20M	QPSK	50	50	Back	10mm	SKU A	133322	683	21.58	22.00	1.102	-0.04	0.286	0.315
	LTE Band 71	20M	QPSK	1	0	Back	10mm	SKU B	133322	683	22.72	23.00	1.067	0.09	0.367	0.391



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	SKU	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	10mm	SKU A	41055	2636.5	21.02	21.50	1.117	62.9	1.006	0.17	0.178	0.200
	LTE Band 41	20M	QPSK	50	24	Front	10mm	SKU A	41055	2636.5	20.20	20.50	1.072	62.9	1.006	-0.15	0.147	0.158
	LTE Band 41	20M	QPSK	1	0	Back	10mm	SKU A	41055	2636.5	21.02	21.50	1.117	62.9	1.006	0	0.374	0.420
	LTE Band 41	20M	QPSK	1	0	Back	10mm	SKU A	39750	2506	20.90	21.50	1.148	62.9	1.006	0.02	0.264	0.305
	LTE Band 41	20M	QPSK	1	0	Back	10mm	SKU A	40185	2549.5	20.75	21.50	1.189	62.9	1.006	-0.04	0.281	0.336
	LTE Band 41	20M	QPSK	1	0	Back	10mm	SKU A	40620	2593	20.68	21.50	1.208	62.9	1.006	0.01	0.358	0.435
43	LTE Band 41	20M	QPSK	1	0	Back	10mm	SKU A	41490	2680	20.80	21.50	1.175	62.9	1.006	-0.12	0.390	0.461
	LTE Band 41	20M	QPSK	50	24	Back	10mm	SKU A	41055	2636.5	20.20	20.50	1.072	62.9	1.006	-0.08	0.341	0.368
	LTE Band 41	20M	QPSK	1	0	Back	10mm	SKU B	41490	2680	20.80	21.50	1.175	62.9	1.006	-0.14	0.367	0.434

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	SKU	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	SKU A	1	2412	14.67	15.00	1.079	99.38	1.006	0.08	0.001	0.001
44	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	SKU A	1	2412	14.67	15.00	1.079	99.38	1.006	-0.12	0.053	0.058
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	SKU B	1	2412	14.67	15.00	1.079	99.38	1.006	0.05	0.048	0.052
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	SKU A	62	5310	13.10	13.50	1.096	90.25	1.108	0.11	0.026	0.032
45	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	SKU A	62	5310	13.10	13.50	1.096	90.25	1.108	-0.04	0.041	0.050
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	SKU B	62	5310	13.10	13.50	1.096	90.25	1.108	-0.13	0.035	0.043
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	SKU A	102	5510	12.60	13.00	1.096	90.25	1.108	-0.13	0.021	0.026
46	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	SKU A	102	5510	12.60	13.00	1.096	90.25	1.108	-0.01	0.026	0.032
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	SKU B	102	5510	12.60	13.00	1.096	90.25	1.108	-0.1	0.024	0.029
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	SKU A	151	5755	12.00	12.50	1.122	90.25	1.108	0	0.008	0.010
47	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	SKU A	151	5755	12.00	12.50	1.122	90.25	1.108	0.15	0.015	0.019
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	SKU B	151	5755	12.00	12.50	1.122	90.25	1.108	-0.03	0.012	0.015

15.4 Product Specific SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	SKU	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	SKU A	62	5310	13.10	13.50	1.096	90.25	1.108	-0.08	0.020	0.024
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SKU A	62	5310	13.10	13.50	1.096	90.25	1.108	-0.04	0.035	0.043
48	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	SKU A	62	5310	13.10	13.50	1.096	90.25	1.108	-0.13	0.049	0.060
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	SKU A	62	5310	13.10	13.50	1.096	90.25	1.108	-0.09	0.022	0.027
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	SKU B	62	5310	13.10	13.50	1.096	90.25	1.108	-0.18	0.039	0.047
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	SKU A	102	5510	12.60	13.00	1.096	90.25	1.108	-0.08	0.023	0.028
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	SKU A	102	5510	12.60	13.00	1.096	90.25	1.108	0.02	0.028	0.034
49	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	SKU A	102	5510	12.60	13.00	1.096	90.25	1.108	-0.14	0.047	0.057
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	SKU A	102	5510	12.60	13.00	1.096	90.25	1.108	0.08	0.020	0.024
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	SKU B	102	5510	12.60	13.00	1.096	90.25	1.108	-0.04	0.035	0.043

## **16. Simultaneous Transmission Analysis**

NO.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product Specific
1.	WWAN + 2.4GHz WLAN+ Bluetooth	Yes	Yes	Yes	Yes
2.	WWAN + 5GHz WLAN+ Bluetooth	Yes	Yes	Yes	Yes
3.	WWAN + 2.4GHz WLAN+ 5GHz WLAN	Yes	Yes	Yes	Yes

**General Note:**

1. This device WLAN 2.4GHz / 5.2GHz / 5.8GHz supports Hotspot operation and support tethering applications.
2. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
3. The Scaled SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
5. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
  - i)  $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
  - ii) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
  - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	Head	Hotspot	Body worn
	Test separation	0 mm	10 mm	10 mm
9dBm	Estimated SAR (W/kg)	0.333 W/kg	0.167 W/kg	0.167 W/kg



**16.1 Head Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	1+2+4 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	1+2+3 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)			
WCDMA II	Right Cheek	0.154	0.035	0.030	0.333	<b>0.522</b>	<b>0.517</b>	<b>0.219</b>
	Right Tilted	0.165	0.003	0.022	0.333	<b>0.501</b>	<b>0.520</b>	<b>0.190</b>
	Left Cheek	0.406	0.020	0.029	0.333	<b>0.759</b>	<b>0.768</b>	<b>0.455</b>
	Left Tilted	0.140	0.002	0.019	0.333	<b>0.475</b>	<b>0.492</b>	<b>0.161</b>
WCDMA IV	Right Cheek	0.216	0.035	0.030	0.333	<b>0.584</b>	<b>0.579</b>	<b>0.281</b>
	Right Tilted	0.111	0.003	0.022	0.333	<b>0.447</b>	<b>0.466</b>	<b>0.136</b>
	Left Cheek	0.472	0.020	0.029	0.333	<b>0.825</b>	<b>0.834</b>	<b>0.521</b>
	Left Tilted	0.151	0.002	0.019	0.333	<b>0.486</b>	<b>0.503</b>	<b>0.172</b>
WCDMA V	Right Cheek	0.060	0.035	0.030	0.333	<b>0.428</b>	<b>0.423</b>	<b>0.125</b>
	Right Tilted	0.001	0.003	0.022	0.333	<b>0.337</b>	<b>0.356</b>	<b>0.026</b>
	Left Cheek	0.075	0.020	0.029	0.333	<b>0.428</b>	<b>0.437</b>	<b>0.124</b>
	Left Tilted	0.001	0.002	0.019	0.333	<b>0.336</b>	<b>0.353</b>	<b>0.022</b>
LTE Band 7	Right Cheek	0.262	0.035	0.030	0.333	<b>0.630</b>	<b>0.625</b>	<b>0.327</b>
	Right Tilted	0.094	0.003	0.022	0.333	<b>0.430</b>	<b>0.449</b>	<b>0.119</b>
	Left Cheek	0.119	0.020	0.029	0.333	<b>0.472</b>	<b>0.481</b>	<b>0.168</b>
	Left Tilted	0.115	0.002	0.019	0.333	<b>0.450</b>	<b>0.467</b>	<b>0.136</b>
LTE Band 12	Right Cheek	0.136	0.035	0.030	0.333	<b>0.504</b>	<b>0.499</b>	<b>0.201</b>
	Right Tilted	0.102	0.003	0.022	0.333	<b>0.438</b>	<b>0.457</b>	<b>0.127</b>
	Left Cheek	0.215	0.020	0.029	0.333	<b>0.568</b>	<b>0.577</b>	<b>0.264</b>
	Left Tilted	0.133	0.002	0.019	0.333	<b>0.468</b>	<b>0.485</b>	<b>0.154</b>
LTE Band 13	Right Cheek	0.094	0.035	0.030	0.333	<b>0.462</b>	<b>0.457</b>	<b>0.159</b>
	Right Tilted	0.070	0.003	0.022	0.333	<b>0.406</b>	<b>0.425</b>	<b>0.095</b>
	Left Cheek	0.117	0.020	0.029	0.333	<b>0.470</b>	<b>0.479</b>	<b>0.166</b>
	Left Tilted	0.087	0.002	0.019	0.333	<b>0.422</b>	<b>0.439</b>	<b>0.108</b>
LTE Band 14	Right Cheek	0.085	0.035	0.030	0.333	<b>0.453</b>	<b>0.448</b>	<b>0.150</b>
	Right Tilted	0.062	0.003	0.022	0.333	<b>0.398</b>	<b>0.417</b>	<b>0.087</b>
	Left Cheek	0.127	0.020	0.029	0.333	<b>0.480</b>	<b>0.489</b>	<b>0.176</b>
	Left Tilted	0.088	0.002	0.019	0.333	<b>0.423</b>	<b>0.440</b>	<b>0.109</b>
LTE Band 25	Right Cheek	0.146	0.035	0.030	0.333	<b>0.514</b>	<b>0.509</b>	<b>0.211</b>
	Right Tilted	0.142	0.003	0.022	0.333	<b>0.478</b>	<b>0.497</b>	<b>0.167</b>
	Left Cheek	0.326	0.020	0.029	0.333	<b>0.679</b>	<b>0.688</b>	<b>0.375</b>
	Left Tilted	0.117	0.002	0.019	0.333	<b>0.452</b>	<b>0.469</b>	<b>0.138</b>
LTE Band 26	Right Cheek	0.082	0.035	0.030	0.333	<b>0.450</b>	<b>0.445</b>	<b>0.147</b>
	Right Tilted	0.001	0.003	0.022	0.333	<b>0.337</b>	<b>0.356</b>	<b>0.026</b>
	Left Cheek	0.097	0.020	0.029	0.333	<b>0.450</b>	<b>0.459</b>	<b>0.146</b>
	Left Tilted	0.001	0.002	0.019	0.333	<b>0.336</b>	<b>0.353</b>	<b>0.022</b>
LTE Band 41	Right Cheek	0.135	0.035	0.030	0.333	<b>0.503</b>	<b>0.498</b>	<b>0.200</b>
	Right Tilted	0.046	0.003	0.022	0.333	<b>0.382</b>	<b>0.401</b>	<b>0.071</b>
	Left Cheek	0.062	0.020	0.029	0.333	<b>0.415</b>	<b>0.424</b>	<b>0.111</b>
	Left Tilted	0.065	0.002	0.019	0.333	<b>0.400</b>	<b>0.417</b>	<b>0.086</b>
LTE Band 66	Right Cheek	0.134	0.035	0.030	0.333	<b>0.502</b>	<b>0.497</b>	<b>0.199</b>
	Right Tilted	0.082	0.003	0.022	0.333	<b>0.418</b>	<b>0.437</b>	<b>0.107</b>
	Left Cheek	0.293	0.020	0.029	0.333	<b>0.646</b>	<b>0.655</b>	<b>0.342</b>
	Left Tilted	0.092	0.002	0.019	0.333	<b>0.427</b>	<b>0.444</b>	<b>0.113</b>
LTE Band 71	Right Cheek	0.191	0.035	0.030	0.333	<b>0.559</b>	<b>0.554</b>	<b>0.256</b>
	Right Tilted	0.126	0.003	0.022	0.333	<b>0.462</b>	<b>0.481</b>	<b>0.151</b>
	Left Cheek	0.301	0.020	0.029	0.333	<b>0.654</b>	<b>0.663</b>	<b>0.350</b>
	Left Tilted	0.183	0.002	0.019	0.333	<b>0.518</b>	<b>0.535</b>	<b>0.204</b>

**16.2 Hotspot Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	1+2+4 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	1+2+3 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth Estimated 1g SAR (W/kg)			
WCDMA II	Front	0.283	0.001	0.045	0.167	0.451	0.495	0.329
	Back	0.774	0.058	0.056	0.167	0.999	0.997	0.888
	Left side	0.236	0.038	0.077	0.167	0.441	0.480	0.351
	Right side					0.000	0.000	0.000
	Top side		0.001	0.047	0.167	0.168	0.214	0.048
	Bottom side	0.341				0.341	0.341	0.341
WCDMA IV	Front	0.605	0.001	0.045	0.167	0.773	0.817	0.651
	Back	0.706	0.058	0.056	0.167	0.931	0.929	0.820
	Left side	0.318	0.038	0.077	0.167	0.523	0.562	0.433
	Right side					0.000	0.000	0.000
	Top side		0.001	0.047	0.167	0.168	0.214	0.048
	Bottom side	0.355				0.355	0.355	0.355
WCDMA V	Front	0.070	0.001	0.045	0.167	0.238	0.282	0.116
	Back	0.163	0.058	0.056	0.167	0.388	0.386	0.277
	Left side	0.064	0.038	0.077	0.167	0.269	0.308	0.179
	Right side					0.000	0.000	0.000
	Top side		0.001	0.047	0.167	0.168	0.214	0.048
	Bottom side	0.056				0.056	0.056	0.056
LTE Band 7	Front	0.250	0.001	0.045	0.167	0.418	0.462	0.296
	Back	0.773	0.058	0.056	0.167	0.998	0.996	0.887
	Left side	0.103	0.038	0.077	0.167	0.308	0.347	0.218
	Right side					0.000	0.000	0.000
	Top side		0.001	0.047	0.167	0.168	0.214	0.048
	Bottom side	0.386				0.386	0.386	0.386
LTE Band 12	Front	0.111	0.001	0.045	0.167	0.279	0.323	0.157
	Back	0.282	0.058	0.056	0.167	0.507	0.505	0.396
	Left side	0.095	0.038	0.077	0.167	0.300	0.339	0.210
	Right side					0.000	0.000	0.000
	Top side		0.001	0.047	0.167	0.168	0.214	0.048
	Bottom side	0.078				0.078	0.078	0.078
LTE Band 13	Front	0.079	0.001	0.045	0.167	0.247	0.291	0.125
	Back	0.161	0.058	0.056	0.167	0.386	0.384	0.275
	Left side	0.082	0.038	0.077	0.167	0.287	0.326	0.197
	Right side					0.000	0.000	0.000
	Top side		0.001	0.047	0.167	0.168	0.214	0.048
	Bottom side	0.049				0.049	0.049	0.049
LTE Band 14	Front	0.077	0.001	0.045	0.167	0.245	0.289	0.123
	Back	0.157	0.058	0.056	0.167	0.382	0.380	0.271
	Left side	0.078	0.038	0.077	0.167	0.283	0.322	0.193
	Right side					0.000	0.000	0.000
	Top side		0.001	0.047	0.167	0.168	0.214	0.048
	Bottom side	0.010				0.010	0.010	0.010
LTE Band 25	Front	0.263	0.001	0.045	0.167	0.431	0.475	0.309
	Back	0.594	0.058	0.056	0.167	0.819	0.817	0.708
	Left side	0.242	0.038	0.077	0.167	0.447	0.486	0.357
	Right side					0.000	0.000	0.000
	Top side		0.001	0.047	0.167	0.168	0.214	0.048
	Bottom side	0.274				0.274	0.274	0.274
LTE Band 26	Front	0.079	0.001	0.045	0.167	0.247	0.291	0.125
	Back	0.103	0.058	0.056	0.167	0.328	0.326	0.217
	Left side	0.042	0.038	0.077	0.167	0.247	0.286	0.157



	Right side					<b>0.000</b>	<b>0.000</b>	<b>0.000</b>
	Top side		0.001	0.047	0.167	<b>0.168</b>	<b>0.214</b>	<b>0.048</b>
	Bottom side	0.002				<b>0.002</b>	<b>0.002</b>	<b>0.002</b>
LTE Band 41	Front	0.200	0.001	0.045	0.167	<b>0.368</b>	<b>0.412</b>	<b>0.246</b>
	Back	0.461	0.058	0.056	0.167	<b>0.686</b>	<b>0.684</b>	<b>0.575</b>
	Left side	0.043	0.038	0.077	0.167	<b>0.248</b>	<b>0.287</b>	<b>0.158</b>
	Right side					<b>0.000</b>	<b>0.000</b>	<b>0.000</b>
	Top side		0.001	0.047	0.167	<b>0.168</b>	<b>0.214</b>	<b>0.048</b>
	Bottom side	0.285				<b>0.285</b>	<b>0.285</b>	<b>0.285</b>
LTE Band 66	Front	0.305	0.001	0.045	0.167	<b>0.473</b>	<b>0.517</b>	<b>0.351</b>
	Back	0.611	0.058	0.056	0.167	<b>0.836</b>	<b>0.834</b>	<b>0.725</b>
	Left side	0.234	0.038	0.077	0.167	<b>0.439</b>	<b>0.478</b>	<b>0.349</b>
	Right side					<b>0.000</b>	<b>0.000</b>	<b>0.000</b>
	Top side		0.001	0.047	0.167	<b>0.168</b>	<b>0.214</b>	<b>0.048</b>
	Bottom side	0.184				<b>0.184</b>	<b>0.184</b>	<b>0.184</b>
LTE Band 71	Front	0.293	0.001	0.045	0.167	<b>0.461</b>	<b>0.505</b>	<b>0.339</b>
	Back	0.411	0.058	0.056	0.167	<b>0.636</b>	<b>0.634</b>	<b>0.525</b>
	Left side	0.167	0.038	0.077	0.167	<b>0.372</b>	<b>0.411</b>	<b>0.282</b>
	Right side					<b>0.000</b>	<b>0.000</b>	<b>0.000</b>
	Top side		0.001	0.047	0.167	<b>0.168</b>	<b>0.214</b>	<b>0.048</b>
	Bottom side	0.145				<b>0.145</b>	<b>0.145</b>	<b>0.145</b>



**16.3 Body-Worn Accessory Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	1+2+4 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	1+2+3 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)			
WCDMA II	Front	0.283	0.001	0.032	0.167	0.451	0.482	0.316
	Back	0.774	0.058	0.050	0.167	0.999	0.991	0.882
WCDMA IV	Front	0.605	0.001	0.032	0.167	0.773	0.804	0.638
	Back	0.706	0.058	0.050	0.167	0.931	0.923	0.814
WCDMA V	Front	0.070	0.001	0.032	0.167	0.238	0.269	0.103
	Back	0.163	0.058	0.050	0.167	0.388	0.380	0.271
LTE Band 7	Front	0.250	0.001	0.032	0.167	0.418	0.449	0.283
	Back	0.773	0.058	0.050	0.167	0.998	0.990	0.881
LTE Band 12	Front	0.111	0.001	0.032	0.167	0.279	0.310	0.144
	Back	0.282	0.058	0.050	0.167	0.507	0.499	0.390
LTE Band 13	Front	0.079	0.001	0.032	0.167	0.247	0.278	0.112
	Back	0.161	0.058	0.050	0.167	0.386	0.378	0.269
LTE Band 14	Front	0.077	0.001	0.032	0.167	0.245	0.276	0.110
	Back	0.157	0.058	0.050	0.167	0.382	0.374	0.265
LTE Band 25	Front	0.263	0.001	0.032	0.167	0.431	0.462	0.296
	Back	0.594	0.058	0.050	0.167	0.819	0.811	0.702
LTE Band 26	Front	0.079	0.001	0.032	0.167	0.247	0.278	0.112
	Back	0.103	0.058	0.050	0.167	0.328	0.320	0.211
LTE Band 41	Front	0.200	0.001	0.032	0.167	0.368	0.399	0.233
	Back	0.461	0.058	0.050	0.167	0.686	0.678	0.569
LTE Band 66	Front	0.305	0.001	0.032	0.167	0.473	0.504	0.338
	Back	0.611	0.058	0.050	0.167	0.836	0.828	0.719
LTE Band 71	Front	0.293	0.001	0.032	0.167	0.461	0.492	0.326
	Back	0.411	0.058	0.050	0.167	0.636	0.628	0.519

**16.4 Product Specific Exposure Conditions**

Exposure Position	1	2	3	4	1+2+4 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	1+2+3 Summed 1g SAR (W/kg)
	WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
Front			0.028		0.000	0.028	0.028
Back			0.043		0.000	0.043	0.043
Left side			0.060		0.000	0.060	0.060
Right side					0.000	0.000	0.000
Top side			0.027		0.000	0.027	0.027
Bottom side					0.000	0.000	0.000

**Test Engineer :** Bevis Chang, Randy Lin, Carter Jhuang and Jimmy Lu



## **17. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

### Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## **18. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 941225 D07 v01r02, " SAR Evaluation Procedures for UMPC Mini-Tablet Devices", Oct 2015.
- [13] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [14] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.