

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT



Applicant: Product Name:	Mitac Digital Technology Corporation 4F., No. 1, R&D Road 2, Hsinchu Science Park, Hsinchu 30076, Taiwan, R.O.C. Gemini SE
Brand Name:	MITAC, Mio, NAVMAN, MAGELLAN
Model No.:	N693
Model Difference:	N/A
Report Number:	ER/2021/40099
FCC ID	P4Q-N693B
Issue Date:	Jun.09,2021
Date of Test:	Apr. 29,2021 ~ May 14,2021
Date of EUT Received:	Apr. 29,2021

Approved By

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Central RF Lab The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT comply with FCC rule part §15.225.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Revision History					
Report Number Revision Description Issue Date Revised By					
ER/2021/40099	Rev.00	Original	Jun.09,2021	Viola Su	

Note:

1、 Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.

SGS Taiwan Ltd.	No.134,Wu Kung Road, New Taipei	Industrial Park, Wuku District, New Taipe	ei City, Taiwan/新北市五股區新北產業園區五工路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.sgs.com.tw
			Member of SGS Group



Table of Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	10
6	CONDUCTED EMISSIONS TEST	.11
7	RADIATED EMISSION TEST	13
8	FREQUENCY STABILITY	26
9	EMISSION BANDWIDTH MEASUREMENT	29
10	ANTENNA REQUIREMENT	32



GENERAL INFORMATION 1

1.1 **Product Description**

Product Name:	Gemini SE
Brand Name:	MITAC, Mio, NAVMAN, MAGELLAN
Model No.:	N693
Model Difference:	N/A
Hardware Version:	N/A
Firmware Version:	N/A
EUT Series No.:	H1314E0013
Power Supply:	13V dc from car battery
ECU cable	Brand: MioEYE ; Model No.: 422N66400022
8M USB HUB cable for rear cam	Brand: MioEYE ; Model No.: 422N66400024
MiVue A50	Brand: MioEYE; Model No.: 5413N5480012
Main cable entry	Brand: MioEYE; Model No.: 422N66400011
Signal Cable	Brand: MioEYE; Model No.: 422N66400014
Main Cable	Brand: MioEYE; Model No.: 422N6640009

1.2 **RF** specification

Radio Technology:	NFC
Operating Frequency	13.56MHz
Transmit Power	< 123dBuV/m at 3m.
Number of Channels	1
Antenna Type	Loop Antenna
Modulation Type	BPSK



1.3 Test Methodology

FCC Part 15, Subpart C §15.225 ANSI C63.10:2013.

1.4 Test Facility

Laboratory	Test Site Address	Test Site Name	FCC Designation number	IC CAB identifier
		SAC 1		
		SAC 3		
		Conduction 1		
	No.134, Wu Kung Road, New Taipei	Conducted 1		
	Industrial Park, Wuku District, New	Conducted 2	TW0027	
	Taipei City, Taiwan.	Conducted 3		
		Conducted 4	-	TW3702
		Conducted 5		
		Conducted 6		
SGS Taiwan Ltd.	No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333	Conduction A	TW0028	
Central RF Lab. (TAF code 3702)		SAC C		
(1AF COUP 5702)		SAC D		
		SAC G		
		Conducted A		
		Conducted B		
		Conducted C		
		Conducted D		
		Conducted E]	
		Conducted F		
		Conducted G]	

1.5 Special Accessories

There is no other accessory attached. This is the worst case condition.


1.6 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

開かっ方方式の子の上報告命未確認う構成と実体的見具 「同時社業和自民」で同時社業報告のような日本語の子語の子語のないないない。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





SYSTEM TEST CONFIGURATION 2

2.1 **EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 **EUT Exercise**

The Transmitter was operated in the normal operating mode. The Tx frequency was fixed which was for the purpose of the measurements.

2.3 **Test Procedure**

2.3.1 **Conducted Emissions**

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 **Radiated Emissions**

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max, emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz 2.3.3

Radiated emission below 30MHz is measured in a 9m*9m*6m semi-anechoic chamber. the measurements correspond to those obtained at an open-field test site. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

t (886-2) 2299-3279



2.4 **Configuration of Tested System** Fig. 2-1 Conducted Setup

Fig. 2-2 Radiated Setup

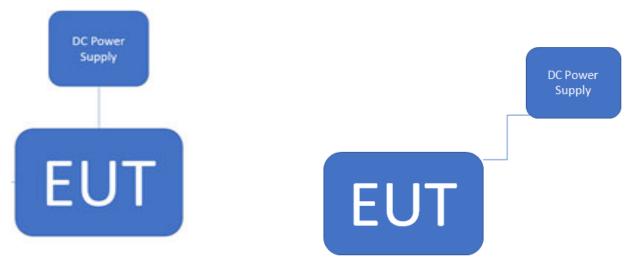


Table 2-1 Equipment Used in Tested System

ltem	Equipment	Mfr/Brand	Model/Type No.	Series No.
1	DC Power Supply	Agilent	E3640A	MY52410006

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



SUMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result
§15.207	AC Power Line Conducted Emission	N/A
§15.225 (a)-(d)	Radiated Emission	Compliant
§15.209	Radiated Emission Limits, general requirement	Compliant
§15.225 (e)	Frequency Stability	Compliant
§2.1049 §15.215 (c)	Emission Bandwidth	Compliant
§15.203	Antenna Requirement	Compliant

SGS Taiwan Ltd.	No.134, Wu Kung Road, New Ta	aipei Industrial Park, Wuku District, New Taipei Ci	ty, Taiwan/新北市五股區新北產業園區五工路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.sgs.com.tw
			Member of SGS Group



4 DESCRIPTION OF TEST MODES

4.1 The Worst Test Modes and Channel Details

- 1. The EUT stay in continuous transmission mode.
- 2. The frequency 13.56 MHz is the default channel to test, where it is the only manipulative channel as this application supports.
- 3. Only one configuration is supported/applicable as follows.

r						
RADIATED EMISSION TEST						
MODE	MODE AVAILABLE TESTED N CHANNEL CHANNEL N					
NFC	1	1	BPSK			
FREQUENCY STABILITY						
MODE	MODE AVAILABLE TESTED MODULA					
NFC	1	1	BPSK			
	20dB BANDWIDTH					
MODE	AVAILABLE TESTED MODUL					
NFC	1	1	BPSK			

The field strength of radiation emission was measured as EUT three orthogonal plans, E1 / E2 / H, are positioned to pre-scan the emission generating the highest one. The worst E1 position is tested, and recorded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

開かっ方方式の子の上報告命未確認う構成と(株面具員) 「同時社業価値保護(新聞の)」 本語合本語中な可当面面「「・「「日の)(接後) This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



5 MEASUREMENT UNCERTAINTY

Test Items	Unc	ertainty	,
AC Power Line Conducted Emission	+/-	2.34	dB
Frequency Stability	+/-	1.53	Hz
Emission Bandwidth	+/-	1.53	Hz
Temperature	+/-	0.4	°C
Humidity	+/-	3.5	%
DC / AC Power Source	+/-	1	%

Radiated Spurious Emission Measurement Uncertainty				
Delevization: Martinel	+/-	2.64	dB	9kHz~30MHz
	+/-	4.93	dB	30MHz - 1000MHz
Polarization: Vertical	+/-	4.81	dB	1GHz - 18GHz
	+/-	4.52	dB	18GHz - 40GHz
Polarization: Horizontal	+/-	2.64	dB	9kHz~30MHz
	+/-	4.45	dB	30MHz - 1000MHz
	+/-	4.81	dB	1GHz - 18GHz
	+/-	4.52	dB	18GHz - 40GHz

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Sees Taiwan Life. A log 24 We Kung Read. New Taiwai Idout Deark Werkup Taiwai City. Taiwan/EriteTa



CONDUCTED EMISSIONS TEST 6

6.1 Standard Applicable

According to §15.207 and frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits dB(uV)	
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note		

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.


6.2 Measurement Equipment Used:

N/A

6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

6.4 Test SET-UP (Block Diagram of Configuration)

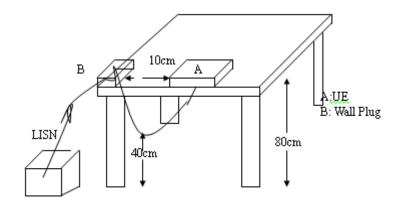

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

開かっ方方式のサイル取合われて調整が構成して使い時度していたいでは、 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of liability, and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.	No.134,Wu Kung Road, New Taipei	Industrial Park, Wuku District, New Taipei	City, Taiwan/新北市五股區新北產業園區五工路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.sgs.com.tw
			Member of SGS Group



6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6 Measurement Result

N/A; Powered from 13V dc car battery.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解決另有說明,此報告結果僅對測試乙樣品頁實,同時比樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




7 RADIATED EMISSION TEST

7.1 Measurement Procedure


- 1. Configure the EUT according to ANSI C63.10.
- 2. The EUT was placed on a turn table which is 0.8m above ground plane and been measured in the frequency range between 0.009MHz to 30MHz and 30MHz to 1GHz.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all default test channel measured were complete.

7.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

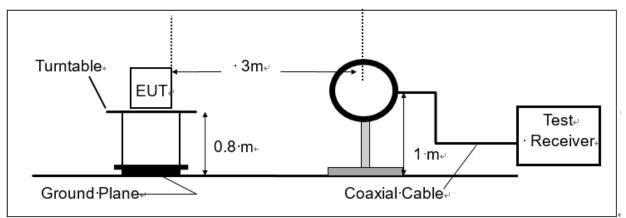

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

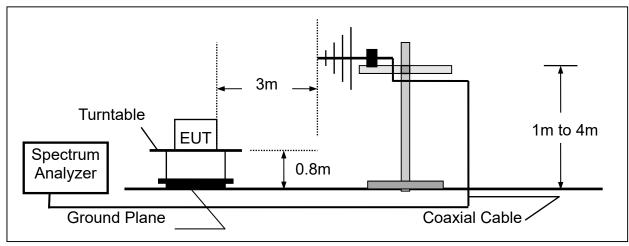

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.	No.134,Wu Kung Road, New Taipei Ir	ndustrial Park, Wuku District, New Taipe	ei City, Taiwan/新北市五股區新北產業園區五工路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.sgs.com.tw
			Member of SGS Group



7.3 Measurement Equipment Used:

Radiated Emission Test Site: SAC 1					
EQUIPMENT TYPE	MFR/BRAND	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Bi-log Antenna	TESEO	CBL 6112D	35242 & AT- N0555	01/13/2021	01/12/2022
Loop Antenna	ETS.LINDGR EN	6502	148045	10/19/2020	10/18/2021
Spectrum Analyzer	Agilent	E4446A	MY51100003	10/29/2020	10/28/2021
DC Power Supply	Agilent	E3640A	MY52410006	12/17/2020	12/16/2021
EMI Test Receiver	R&S	ESCI7	100759	07/13/2020	07/12/2021
Pre-Amplifier	HP	8447D	2944A07676	12/16/2020	12/15/2021
Coaxial Cable	Huber Suhner	succoflex 102	MY2622/2	12/16/2020	12/15/2021
Coaxial Cable	Huber Suhner	succoflex 104A	800086/4a	12/16/2020	12/15/2021
Coaxial Cable	Huber Suhner	EMC 104-SM-SM-2000	160123	12/16/2020	12/15/2021

7.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

W	/here	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
		RA = Reading Amplitude	AG = Amplifier Gain
		AF = Antenna Factor	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

開始子が月前の子の上報告命未識到海峡と使物目見 「回時可能者間に常用的の人物に不同される」を知られる。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No.: ER/2021/40099 Page: 15 of 32



7.5 Field Strength of Fundamental Emission

7.5.1 Applicable standard

Rules and specifiactions	CFR 47 Part 15 section 15.225(a)-(d)		225(a)-(d)
Frequency of Emission (MHz)	Field Strength (µV/m)at 30m	Field Strength (dBµV/m)at 30m	Field Strength (dBµV/m)at 3m
1.705~13.110	30	29.5	69.5
13.110~13.410	106	40.5	80.5
13.410~13.553	334	50.5	90.47
13.553~13.567	15848	84	124
13.567~13.710	334	50.5	90.47
13.710~14.010	106	40.5	80.5
14.010~30.00	30	29.5	69.5



7.5.2 Distance Extrapolation Factor

30m to 3m

Distance extrapolation = 40 *log (30/3) = 40 dB Limit is re-adjusted in terms of limit taken in 3m = 20 *log (15848 uV/m) + 40 = 124.00dBuV/m

30m to 10m

Distance extrapolation = 40 *log (30/10) = 19.08 dB Limit is re-adjusted in terms of limit taken in 3m = 20 *log (15848 uV/m) + 19.08 = 103.08dBuV/m

10m to 3m

Distance extrapolation = 40 *log (10/3) = 20.92 dB Limit is re-adjusted in terms of limit taken in 3m = 20 *log (15848 uV/m) + 20.92 = 104.92dBuV/m

Note:


- 1. Emission level in dBuV/m=20 log (µV/m)
- 2. Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 3. The lower limit shall apply at the transition frequencies.
- 4. KDB 414788 D01 OATS and 3m semi-anechoic chamber Justification: Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. OATS and 3m SAC chamber testing had been performed and 3m SAC measured test result is the worst case test result.

Actual FS(dBµV/m) = Spectrum. Reading level(dBµV) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






7.5.3 lt

Main

3 Field Strength of Fundamental Emission Measurement	Result
--	--------

mann			
Report Number	:ER/2021/40099	Test Site	:SAC I Chamber
Operation Mode	:NFC	Test Date	:2021-05-04
Test Frequency	:13.56 MHz	Temp./Humi.	:25.3/63
Test Mode	:Main	Antenna Pol.	:VERTICAL
EUT Pol	:E1 Plane	Engineer	:GN Lin

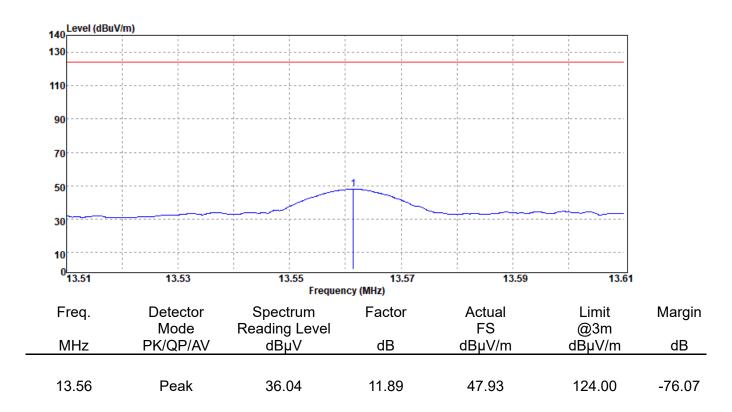


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解決另有說明,此報告結果僅對測試乙樣品頁實,同時比樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report Number	:ER/2021/40099	Test Site	:SAC I Chamber
Operation Mode	:NFC	Test Date	:2021-05-04
Test Frequency	:13.56 MHz	Temp./Humi.	:25.3/63
Test Mode	:Main	Antenna Pol.	:HORIZONTAL
EUT Pol	:E1 Plane	Engineer	:GN Lin

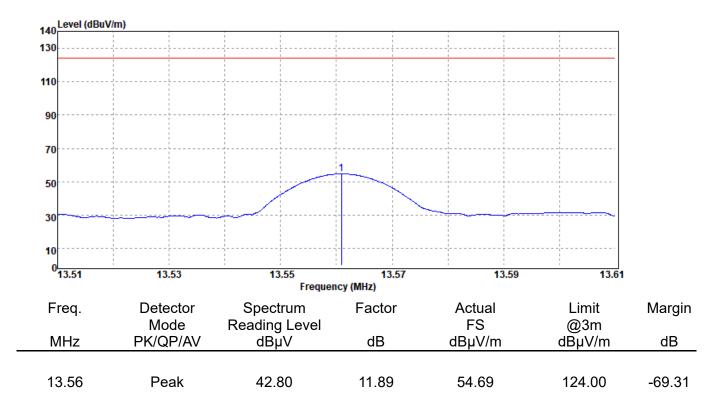

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2021/40099 Page: 19 of 32

Mask

Report Number	:EF
Operation Mode	:NF
Test Frequency	:13
Test Mode	:Ma
EUT Pol	:E1

13.78


Peak

R/2021/40099 FC 3.56 MHz ask 1 Plane

Test Site	:SAC I Chamber
Test Date	:2021-05-04
Temp./Humi.	:25.3/63
Antenna Pol.	:VERTICAL
Engineer	:GN Lin

80.50

-45.07

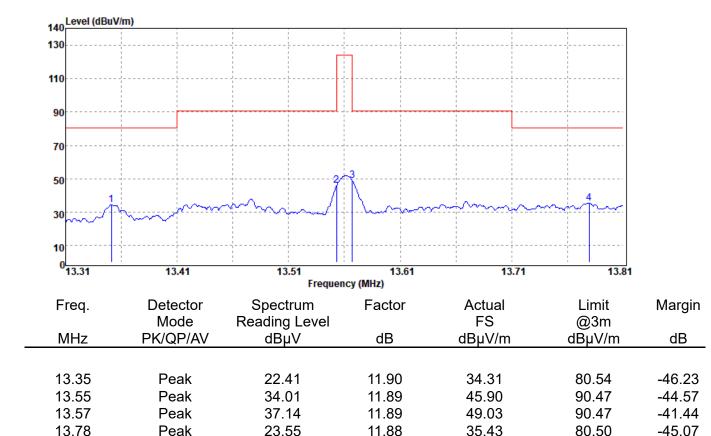

11.88

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


23.55

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

		oei Industrial Park, Wuku District, New Taipei	City, Taiwan/新北市五股區新北產業園區五工路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.sgs.com.tw
			Member of SGS Group



Report Number	:ER/2021/40099	Test Site	:SAC I Chamber
Operation Mode	:NFC	Test Date	:2021-05-04
Test Frequency	:13.56 MHz	Temp./Humi.	:25.3/63
Test Mode	:Mask	Antenna Pol.	:HORIZONTAL
EUT Pol	:E1 Plane	Engineer	:GN Lin

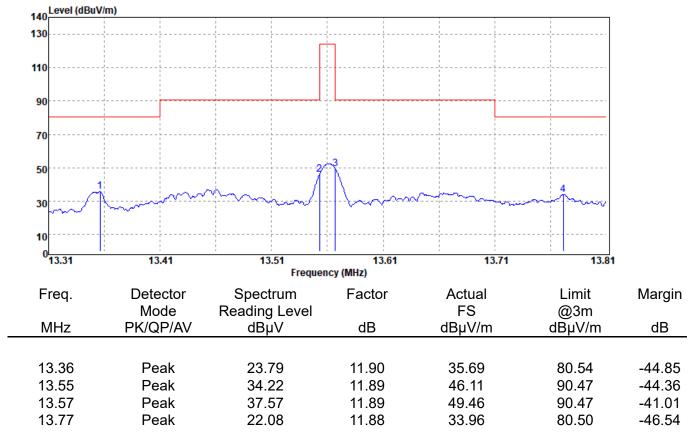

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.6 Radiated Spurious Emission Measurement

7.6.1 Standard Applicable

The field strength of any emissions appearing outside of the 13.110-14.010 MHz shall not exceed the general radiated emission limits in section 15.209 as below.

Frequency (MHz)	Field strength (μV/m)	Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. Emission level in $dB\mu V/m=20 \log (\mu V/m)$
- 2. Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 3. 20*log(30uV/m) + 40dB = 69.54 dBuV/m
- 4. The lower limit shall apply at the transition frequencies.
- 5. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement.
- 6. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of §15.205.
- 7. The general radiated emission limits in §15.209 apply for the spurious emission generate from UE, except for the fundamental emission where the respective section specifies otherwise.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

開きたう方式のプリル取合きたますが周辺した後の世界 からしました。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCS Statuses 1 the transaction Read Neuro Plant Bork Whyther District Neuro Terme City, Taiwang 1 the transaction Read Neuro Plant Bork Whyther Terme City, Taiwang 1 the transaction Read Neuro Plant Bork Whyther Terme City, Taiwang 1 the transaction Read Neuro Plant Bork Whyther Terme City, Taiwang 1 the transaction Read Neuro Plant Bork Whyther Terme City, Taiwang 1 the transaction Read Neuro Plant Bork Whyther Terme City, Taiwang 1 the transaction Read Neuro Plant Bork Whyther Read Neuro Plant Bork Whyther Terme City, Taiwang 1 the transaction Read Neuro Plant Bork Whyther Terme City, Taiwang 1 the transaction Read Neuro Plant Bork Whyther Terme City, Taiwang 1 the transaction Read Neuro Plant Bork Whyther Terme City, Taiwang 1 the transaction Read Neuro Plant Bork Whyther Read Neuro Plant Bork Whyther Read Neuro Plant Bork Whyther Read Neuro Plant Bord Neuro Plant Bork Whyther Read



23.88


27.12

Peak

Peak

7.6.2 Radiated Spurious Emission Measurement Result

Report Number	:ER/2021/40099	Test Site	:SAC I Chamber
Operation Mode	:NFC	Test Date	:2021-05-04
Test Frequency	:13.56 MHz	Temp./Humi.	:25.3/63
Test Mode	:TX	Antenna Pol.	:VERTICAL
EUT Pol	:E1 Plane	Engineer	:GN Lin

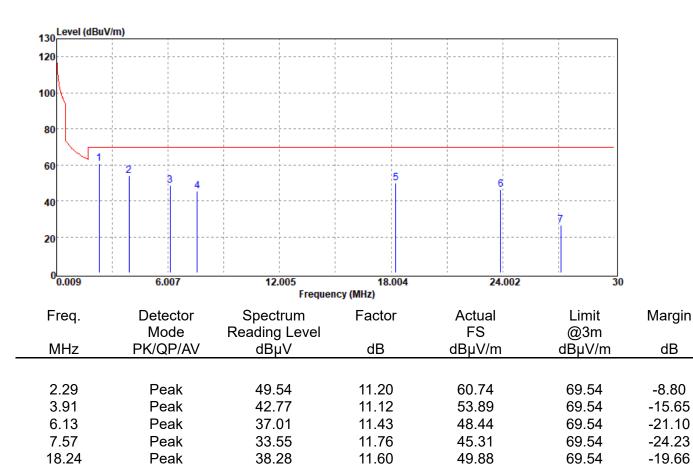

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

35.76

16.59

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

SGS Taiwan Ltd.	No.134,Wu Kung Road, New Taipei	Industrial Park, Wuku District, New Taip	ei City, Taiwan/新北市五股區新北產業園區五工路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.sgs.com.tw
			Member of SGS Group

10.52

9.81

46.28

26.40

69.54


69.54

-23.26

-43.14



Report Number	:ER/2021/40099	Test Site	:SAC I Chamber
Operation Mode	:NFC	Test Date	:2021-05-04
Test Frequency	:13.56 MHz	Temp./Humi.	:25.3/63
Test Mode	:TX	Antenna Pol.	:HORIZONTAL
EUT Pol	:E1 Plane	Engineer	:GN Lin

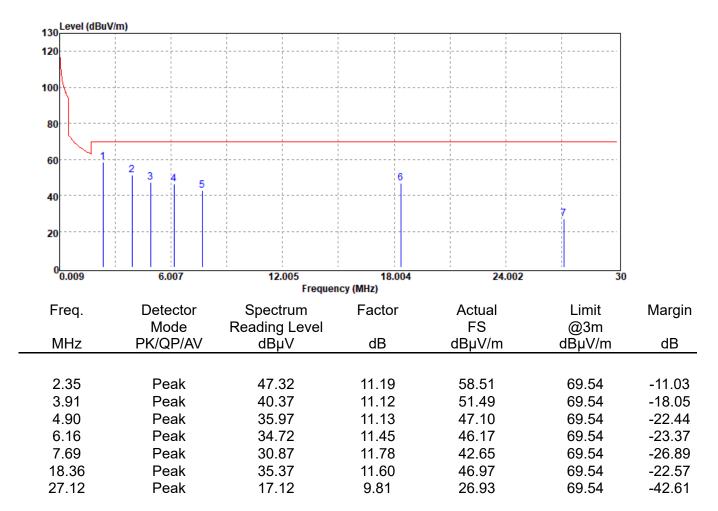


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document context parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report Number	:ER/2021/40099	Test Site	:SAC I Chamber
Operation Mode	:NFC	Test Date	:2021-05-05
Test Frequency	:13.56 MHz	Temp./Humi.	:25.3/63
Test Mode	:TX	Antenna Pol.	:VERTICAL
EUT Pol	:E1 Plane	Engineer	:GN Lin

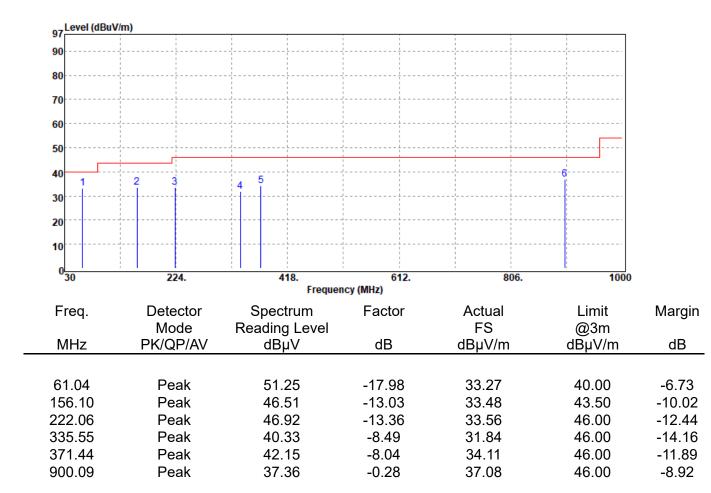


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to its General Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report Number	:ER/2021/40099	Test Site	:SAC I Chamber
Operation Mode	:NFC	Test Date	:2021-05-04
Test Frequency	:13.56 MHz	Temp./Humi.	:25.3/63
Test Mode	:TX	Antenna Pol.	:HORIZONTAL
EUT Pol	:E1 Plane	Engineer	:GN Lin

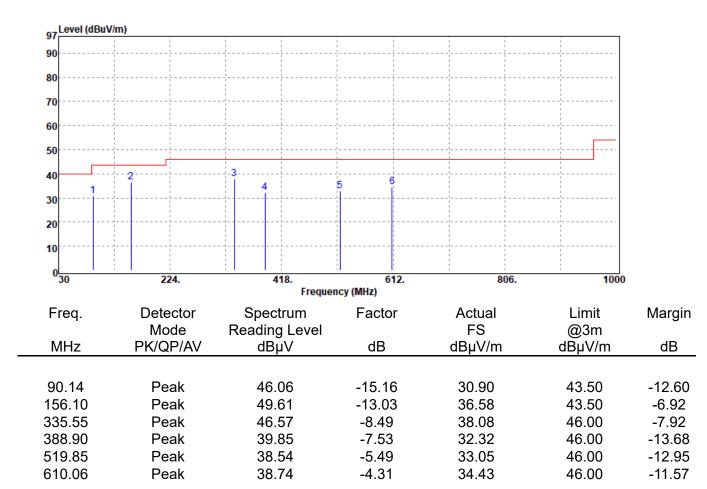

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



8 FREQUENCY STABILITY


8.1 Applicable Standard

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

8.2 Measurement Procedure

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Set EUT as normal operation
- 3. Set SPA Center Frequency = fundamental frequency, RBW, VBW= 10kHz, Span =100kHz.
- 4. Set SPA Max hold. Mark peak.

8.3 Test SET-UP (Block Diagram of Configuration)

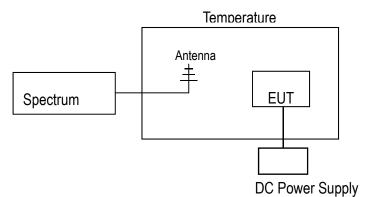

8.4 Measurement Equipment Used:

Conducted Emission Test Site: Conducted 2							
EQUIPMENT TYPE MFR/BRAND MODEL SERIAL LAST CAL. CAL DUE							
Loop Antenna	ETS.LINDGREN	6502	148045	10/19/2020	10/18/2021		
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY60240503	12/11/2020	12/10/2021		
DC Power Supply	Agilent	E3640A	MY52410006	12/17/2020	12/16/2021		
DC Block	Mini-Circuits	BLK-18-S+	1	12/16/2020	12/15/2021		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



8.5 **Measurement Results**

Startup

A. Temperature Variation					
Power Supply	Environment	Frequency			
Vdc	Temperature (°∁)	(MHz)	Delta (KHz)	Limit (KHz)	
13	-20	13.5600083	-0.01300	+/- 1.356	
13	-10	13.5600079	-0.01260	+/- 1.356	
13	0	13.5599929	0.00240	+/- 1.356	
13	10	13.5600006	-0.00530	+/- 1.356	
13	20	13.5599953	0.00000	+/- 1.356	
13	30	13.5599958	-0.00050	+/- 1.356	
13	40	13.5599945	0.00080	+/- 1.356	
13	50	13.5599958	-0.00050	+/- 1.356	
B. Supply Voltage Variation					

Power Supply	Environment	Frequency		
Vdc	Temperature (°∁)	(MHz)	Delta (KHz)	Limit (KHz)
14.95	20	13.5599945	0.00080	+/- 1.356
13	20	13.5599953	0.00000	+/- 1.356
11.05	20	13.5600057	-0.01040	+/- 1.356

2 minutes

A. Temperature Variation					
Power Supply	Environment	Frequency			
Vdc	Temperature (℃)	(MHz)	Delta (KHz)	Limit (KHz)	
13	-20	13.560002	0.00340	+/- 1.356	
13	-10	13.5599933	0.01210	+/- 1.356	
13	0	13.5600026	0.00280	+/- 1.356	
13	10	13.5599906	0.01480	+/- 1.356	
13	20	13.5600054	0.00000	+/- 1.356	
13	30	13.5600051	0.00030	+/- 1.356	
13	40	13.5600066	-0.00120	+/- 1.356	
13	50	13.5599933	0.01210	+/- 1.356	
B. Supply Voltage	e Variation				
Power Supply	Environment	Frequency			
Vdc	Temperature (℃)	(MHz)	Delta (KHz)	Limit (KHz)	
14.95	20	13.559995	0.01040	+/- 1.356	
13	20	13.5600054	0.00000	+/- 1.356	

20

11.05

13.5599923

0.01310

+/- 1.356

SGS Taiwan Ltd.	No.134,Wu Kung Road, New Taip	ei Industrial Park, Wuku District, New Taipei	i City, Taiwan/新北市五股區新北產業園區五工路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.sgs.com.tw
			Member of SGS Group



5 minutes					
A. Temperature	Variation				
Power Supply	Environment	Frequency			
Vdc	Temperature	(MHz)	Delta (KHz)	Limit (KHz)	
VuC	(°C)	(10172)			
13	-20	13.5600024	-0.00530	+/- 1.356	
13	-10	13.5600077	-0.01060	+/- 1.356	
13	0	13.5600003	-0.00320	+/- 1.356	
13	10	13.5599907	0.00640	+/- 1.356	
13	20	13.5599971	0.00000	+/- 1.356	
13	30	13.5599966	0.00050	+/- 1.356	
13	40	13.5600066	-0.00950	+/- 1.356	
13	50	13.56001	-0.01290	+/- 1.356	
B. Supply Voltage	e Variation				
Power Supply	Environment	Frequency			
Vdc	Temperature	(MHz)	Delta (KHz)	Limit (KHz)	
	(°C)	(1011 12)			
14.95	20	13.5600071	-0.01000	+/- 1.356	
13	20	13.5599971	0.00000	+/- 1.356	
11.05	20	13.5600031	-0.00600	+/- 1.356	

10 minutes

A. Temperature Variation					
Power Supply	Environment	Frequency			
Vda	Temperature		Delta (KHz)	Limit (KHz)	
Vdc	(°C)	(MHz)			
13	-20	13.560003	-0.00810	+/- 1.356	
13	-10	13.5600016	-0.00670	+/- 1.356	
13	0	13.5600084	-0.01350	+/- 1.356	
13	10	13.560007	-0.01210	+/- 1.356	
13	20	13.5599949	0.00000	+/- 1.356	
13	30	13.5600019	-0.00700	+/- 1.356	
13	40	13.5599951	-0.00020	+/- 1.356	
13	50	13.560007	-0.01210	+/- 1.356	
B. Supply Voltage Variation					

B. Supply Voltage Variation

Power Supply	Environment	Frequency			
Vda	Temperature		Delta (KHz)	Limit (KHz)	
Vdc	(°C)	(MHz)			
14.95	20	13.5599997	-0.00480	+/- 1.356	
13	20	13.5599949	0.00000	+/- 1.356	
11.05	20	13.559994	0.00090	+/- 1.356	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is divised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for exercising all their rights and obligations under the transaction documents. In is document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134. Wu Kung Road. New Tainei Industrial Park. Wuku District. New Tainei City Taiwan/新士產要問 医新士素 and Sole

Report No.: ER/2021/40099 Page: 29 of 32



EMISSION BANDWIDTH MEASUREMENT 9

9.1 **Applicable Standard:**

The 20 dB bandwidth shall be specified in operating frequency band.

9.2 Limit:

None

9.3 Test Set-up

Refer to section 8.3 in this report

9.4 Measurement Equipment Used:

Refer to section 8.4 in this report

9.5 Measurement Procedure

- 1. Placed the EUT on the testing table.
- 2. Set the EUT under transmission condition continuously at specific channel frequency.
- 3. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
- 4. Measured the spectrum width with power higher than 20dB below carrier.

9.6 Measurement Result

FCC			
20dB BW (kHz)	Opration range	Frequency (MHz)	Limit (MHz)
2.709	Low	13.56000	>13.11
	High	13.56230	<14.01


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to its General Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Bandwidth

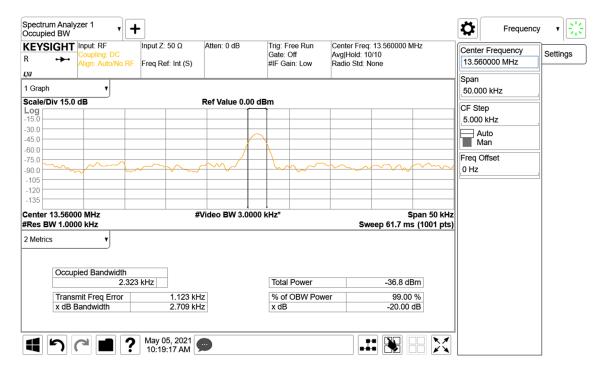


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解決另有說明,此報告結果僅對測試乙樣品頁貢,同時比樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Operation range low

Spectrum Analyzer 1 V Dccupied BW				Frequency	· · · 崇
Coupling: DC	ut Z: 50 Ω Atten: 0 dB eq Ref: Int (S)	Trig: Free Run Gate: Off #IF Gain: Low	Center Freq: 13.560000 MHz Avg Hold: 10/10 Radio Std: None	Center Frequency 13.560000 MHz	Settings
I Graph v			Mkr1 13.560000 MHz	Span 50.000 kHz	
Scale/Div 15.0 dB	Ref Value 0.00 dE	Bm	-51.120 dBm	CF Step]
og [5.0				5.000 kHz	
30.0	1			Auto	
60.0				Man	
5.0		han	m	Freq Offset 0 Hz	
105					
120					
enter 13.56000 MHz	#Video BW 3.0000	↓ kHz*	Span 50 kHz		
Res BW 1.0000 kHz			Sweep 61.7 ms (1001 pts)		
Occupied Bandwidth 2.323 kH; Transmit Freq Error x dB Bandwidth	2 1.123 kHz 2.709 kHz lay 05, 2021 0:19:37 AM	Total Power % of OBW Power x dB	-36.8 dBm er 99.00 % -20.00 dB		
Deration range	High			Frequency	· • •
Coupling: DC	ut Z: 50 Ω Atten: 0 dB eq Ref: Int (S)	Trig: Free Run Gate: Off #IF Gain: Low	Center Freq: 13.560000 MHz Avg Hold: 10/10 Radio Std: None	Center Frequency 13.560000 MHz	Settings
Graph v	I	1	Mkr1 13.562300 MHz	Span 50.000 kHz	
cale/Div 15.0 dB	Ref Value 0.00 dE	Bm	-52.135 dBm		

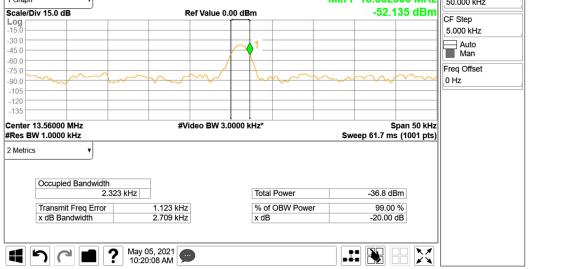

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解決另有說明,此報告結果僅對測試乙樣品頁貢,同時比樣品僅保留90天。本報告未經本公司書面計可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com.tw/Terms-and-Conditions</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com.tw/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.	No.134,Wu Kung Road, New Taipei I	ndustrial Park, Wuku District, New Taip	ei City, Taiwan/新北市五股區新北產業園區五工路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.sgs.com.tw
			Member of SGS Group



10 ANTENNA REQUIREMENT

10.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

10.2 Antenna Connected Construction:

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

SGS Taiwan Ltd.	No.134,Wu Kung Road, New Taipei I	ndustrial Park, Wuku District, New Taipe	ei City, Taiwan/新北市五股區新北產業園區五工路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.sgs.com.tw
			Member of SGS Group