

LTE Band 5_Rear_Ch 20525_RB 1_49_0mm

Frequency: 836.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 22.9°C; Liquid Temperature: 20.0°C
Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 40.078$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(9.45, 9.45, 9.45) @ 836.5 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (121x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.855 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 33.19 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.687 W/kg; SAR(10 g) = 0.420 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 61.3%

Maximum value of SAR (measured) = 0.875 W/kg

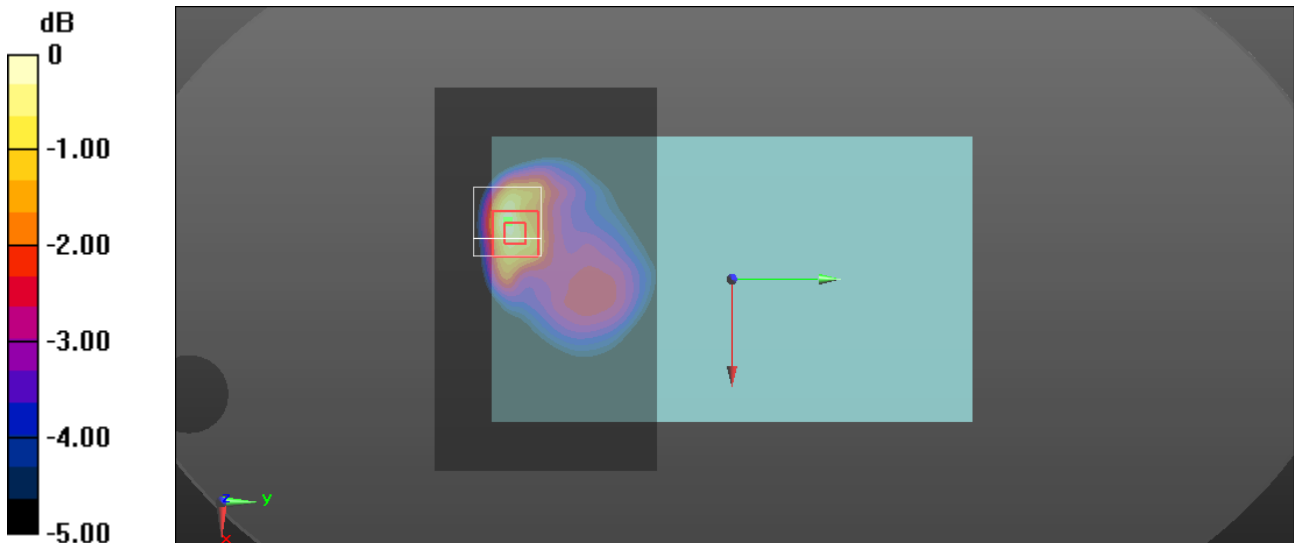

0 dB = 0.875 W/kg = -0.58 dBW/kg

LTE Band 7_Rear_Ch 21350_RB 1_0_0mm


Frequency: 2560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 20.7°C; Liquid Temperature: 20.4°C
Medium parameters used: $f = 2560$ MHz; $\sigma = 1.886$ S/m; $\epsilon_r = 38.343$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(7.38, 7.38, 7.38) @ 2560 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (151x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.333 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.257 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.456 W/kg
SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.090 W/kg
Smallest distance from peaks to all points 3 dB below = 7.3 mm
Ratio of SAR at M2 to SAR at M1 = 48.5%
Maximum value of SAR (measured) = 0.322 W/kg

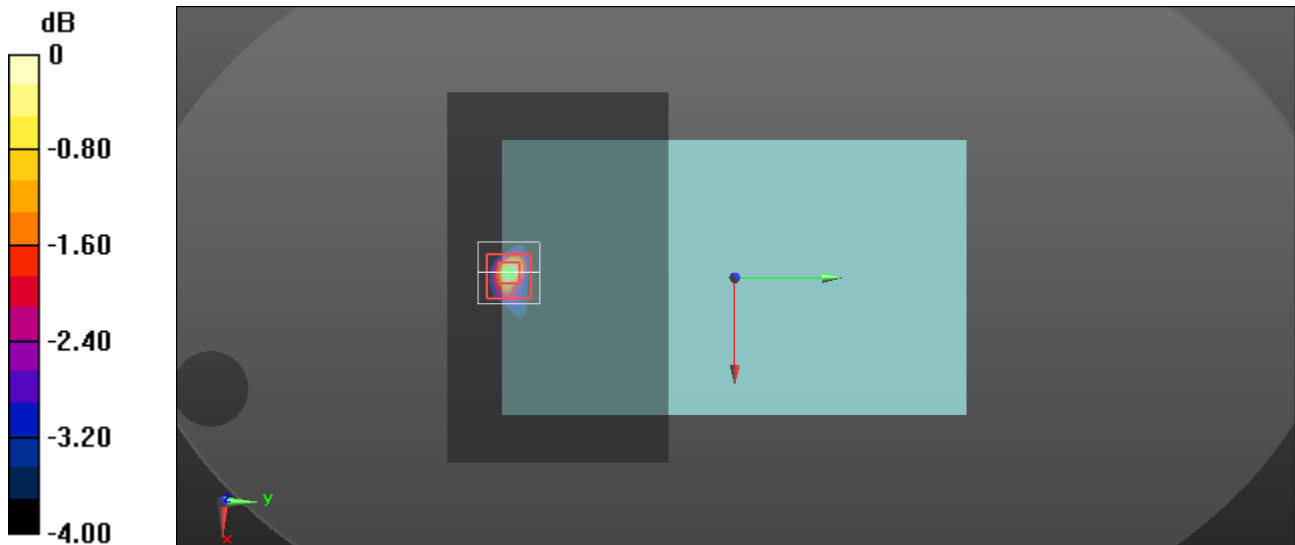

0 dB = 0.322 W/kg = -4.92 dBW/kg

LTE Band 12_Edge 4_Ch 23095_RB 1_0_0mm


Frequency: 707.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 20.2°C
Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 40.575$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(9.79, 9.79, 9.79) @ 707.5 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (51x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.25 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 41.23 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 2.22 W/kg
SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.560 W/kg
Smallest distance from peaks to all points 3 dB below = 8 mm
Ratio of SAR at M2 to SAR at M1 = 48.8%
Maximum value of SAR (measured) = 1.59 W/kg

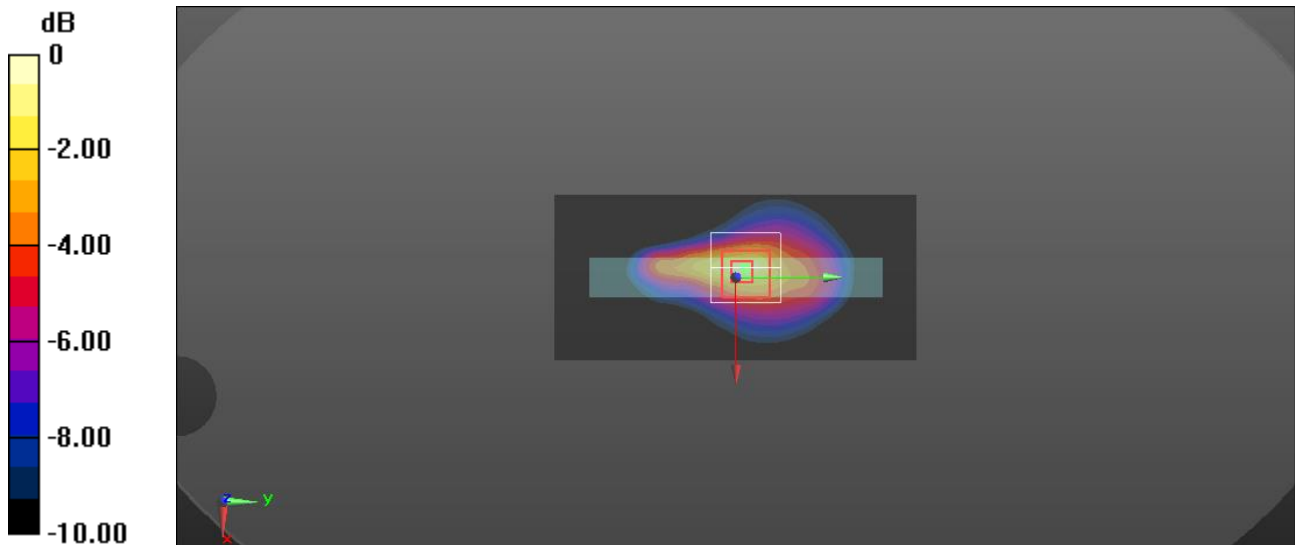

0 dB = 1.59 W/kg = 2.01 dBW/kg

LTE Band 13_Edge 4_Ch 23230_RB 1_0_0mm

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 20.2°C
Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 40.328$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(9.79, 9.79, 9.79) @ 782 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (51x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.06 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 39.24 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.946 W/kg; SAR(10 g) = 0.565 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.4%

Maximum value of SAR (measured) = 1.34 W/kg

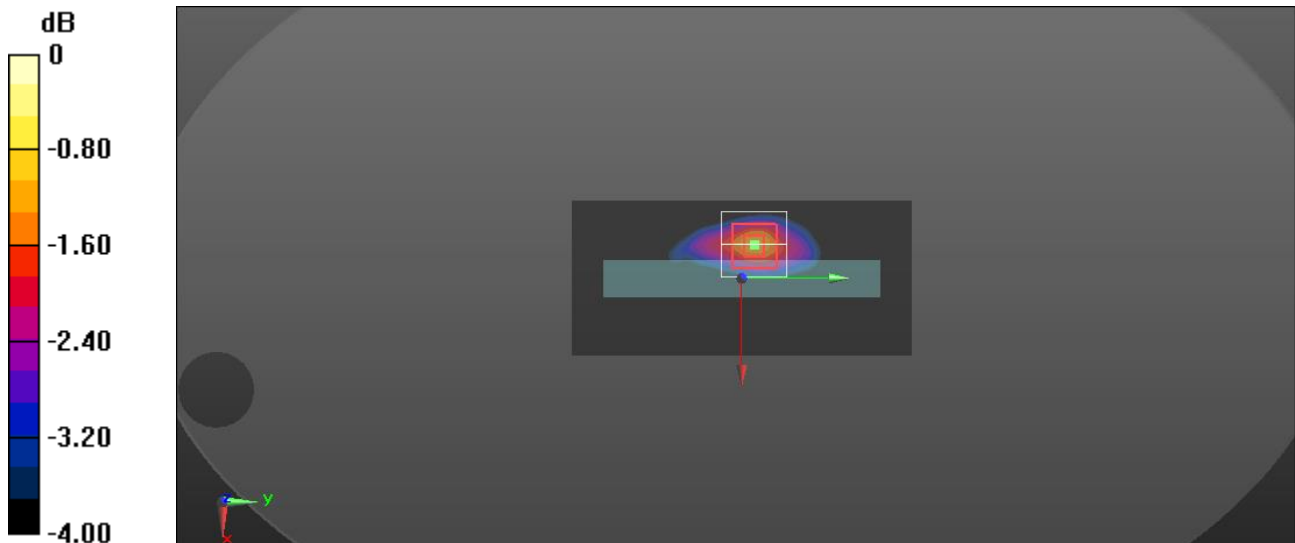

0 dB = 1.34 W/kg = 1.27 dBW/kg

LTE Band 14_Edge 4_Ch 23330_RB 1_0_0mm


Frequency: 793 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 20.2°C
Medium parameters used (interpolated): $f = 793$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 40.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(9.79, 9.79, 9.79) @ 793 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (51x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.969 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 37.50 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 1.54 W/kg
SAR(1 g) = 0.872 W/kg; SAR(10 g) = 0.518 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 57.1%
Maximum value of SAR (measured) = 1.25 W/kg

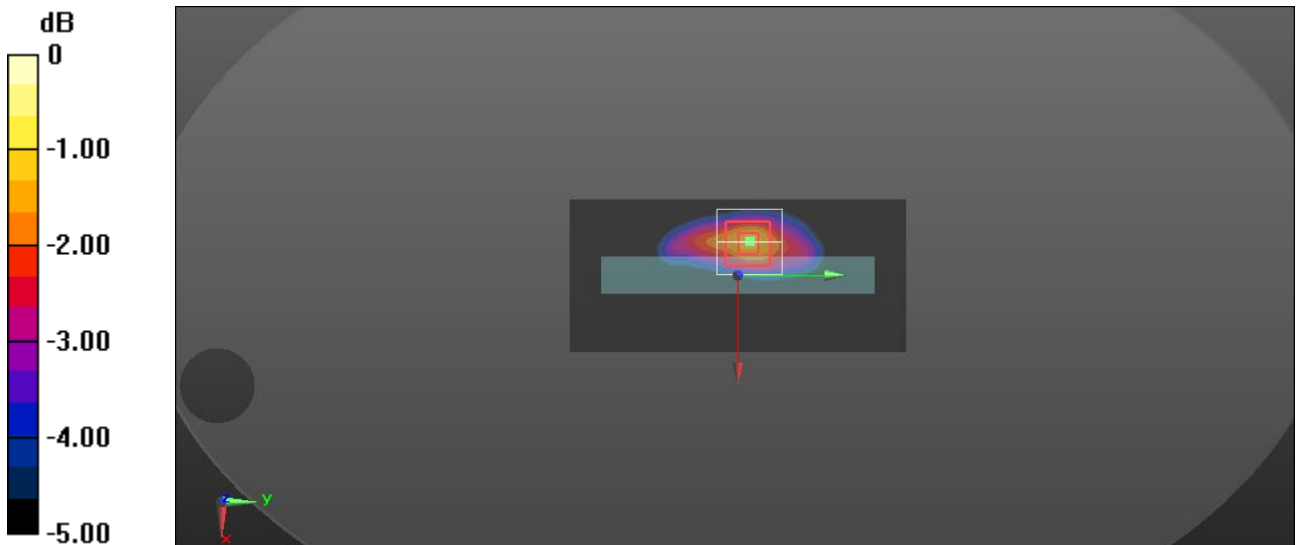

0 dB = 1.25 W/kg = 0.97 dBW/kg

LTE Band 25_Edge 4_Ch 26590_RB 1_49_14mm

Frequency: 1905 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 22.7°C; Liquid Temperature: 20.1°C
Medium parameters used: $f = 1905$ MHz; $\sigma = 1.454$ S/m; $\epsilon_r = 39.403$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(8.32, 8.32, 8.32) @ 1905 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (51x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.511 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.13 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.572 W/kg

SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.218 W/kg

Smallest distance from peaks to all points 3 dB below = 17.3 mm

Ratio of SAR at M2 to SAR at M1 = 63.8%

Maximum value of SAR (measured) = 0.474 W/kg

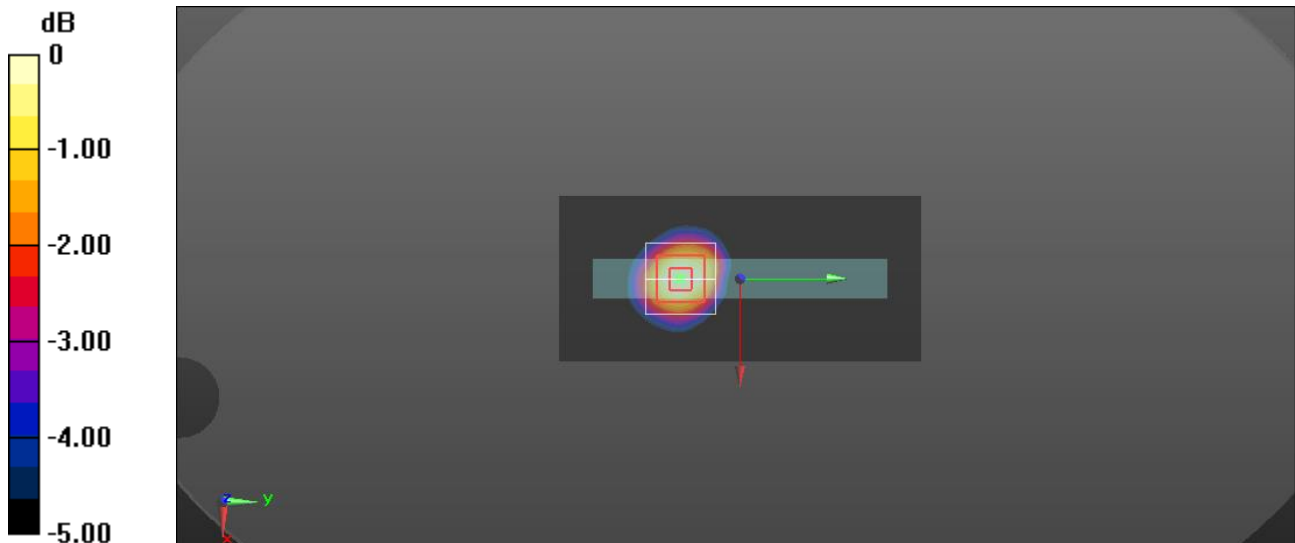

0 dB = 0.474 W/kg = -3.24 dBW/kg

LTE Band 26_Rear_Ch 26965_RB 1_74_0mm


Frequency: 841.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 22.9°C; Liquid Temperature: 20.0°C
Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 40.076$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(9.45, 9.45, 9.45) @ 841.5 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (121x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.807 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 31.69 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.992 W/kg
SAR(1 g) = 0.634 W/kg; SAR(10 g) = 0.393 W/kg
Smallest distance from peaks to all points 3 dB below = 13.2 mm
Ratio of SAR at M2 to SAR at M1 = 66.1%
Maximum value of SAR (measured) = 0.807 W/kg

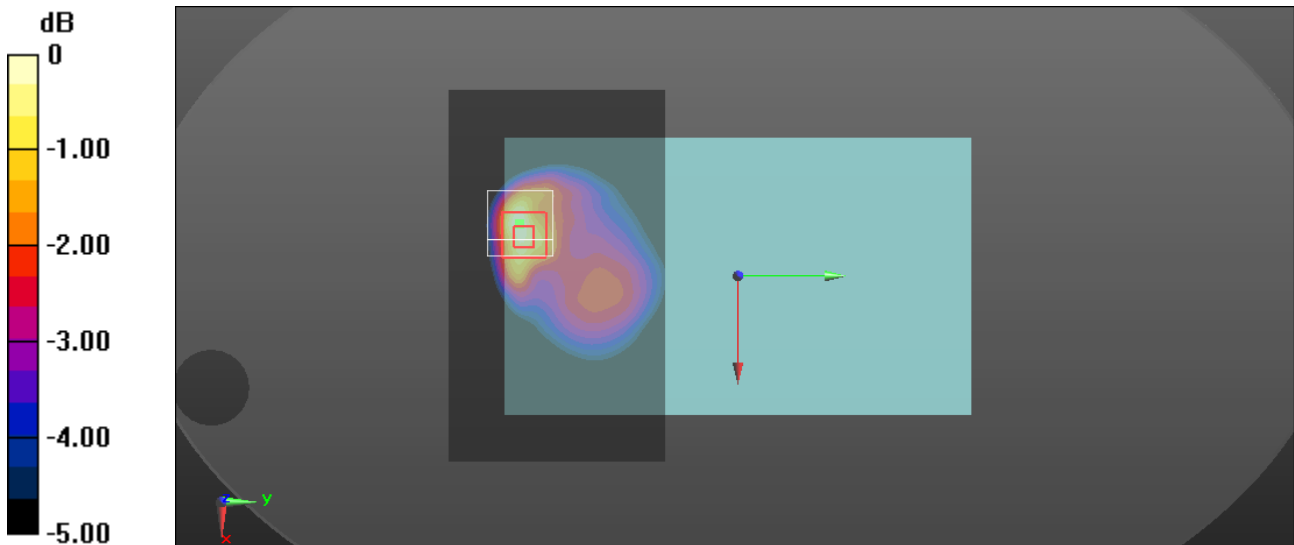

0 dB = 0.807 W/kg = -0.93 dBW/kg

LTE Band 41_Edge 3_Ch 41055_RB 1_49_0mm


Frequency: 2636.5 MHz; Duty Cycle: 1:1.57943; Room Ambient Temperature: 20.7°C; Liquid Temperature: 20.4°C
Medium parameters used (interpolated): $f = 2636.5$ MHz; $\sigma = 1.948$ S/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(7.38, 7.38, 7.38) @ 2636.5 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (71x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.671 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 13.69 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.969 W/kg
SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.173 W/kg
Smallest distance from peaks to all points 3 dB below = 5.8 mm
Ratio of SAR at M2 to SAR at M1 = 47.9%
Maximum value of SAR (measured) = 0.661 W/kg

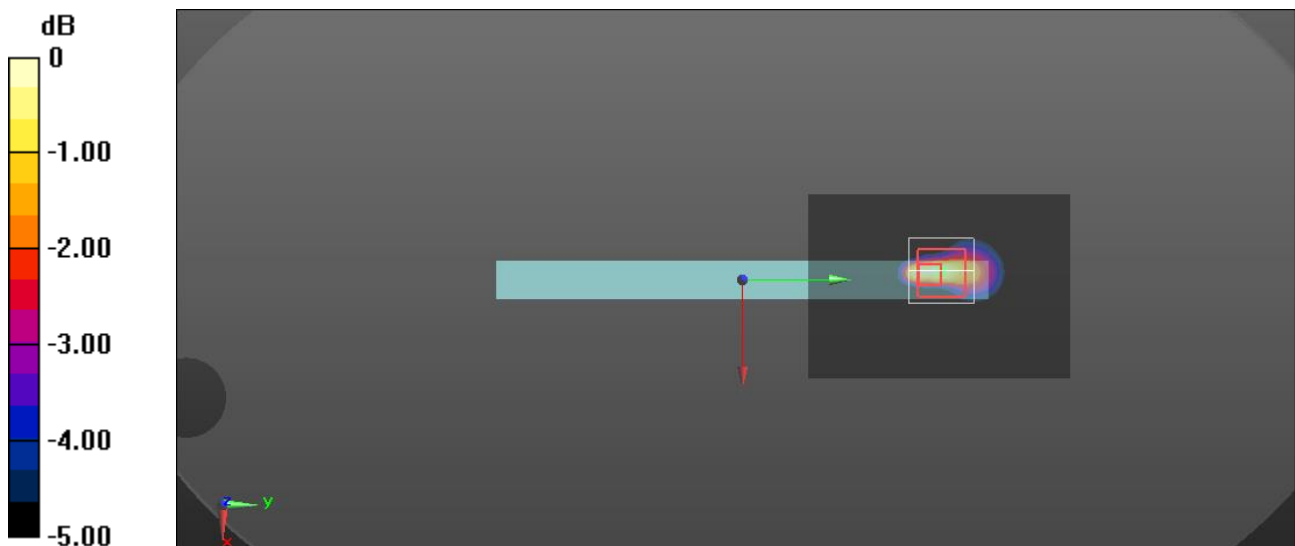

0 dB = 0.661 W/kg = -1.80 dBW/kg

LTE Band 66_Edge 4_Ch 132072_RB 1_99_14mm

Frequency: 1720 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 20.8°C; Liquid Temperature: 19.8°C
Medium parameters used: $f = 1720$ MHz; $\sigma = 1.294$ S/m; $\epsilon_r = 40.458$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(8.61, 8.61, 8.61) @ 1720 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.67 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.91 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.712 W/kg

Smallest distance from peaks to all points 3 dB below = 15.3 mm

Ratio of SAR at M2 to SAR at M1 = 62.7%

Maximum value of SAR (measured) = 1.59 W/kg

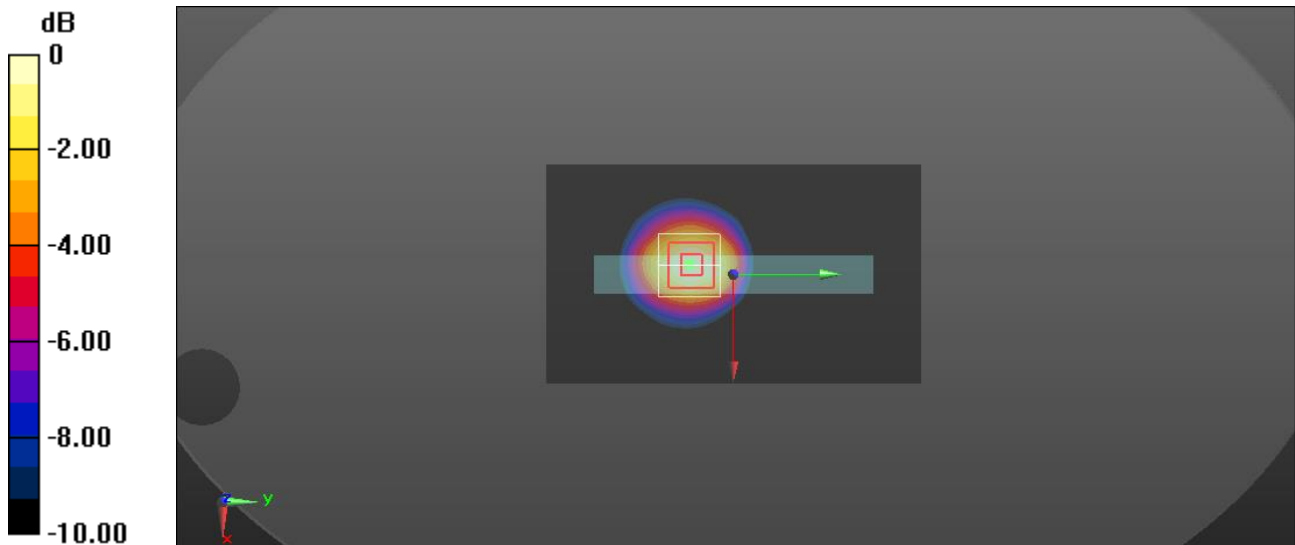

0 dB = 1.59 W/kg = 2.01 dBW/kg

LTE Band 71_Edge 4_Ch 133297_RB 50_0_0mm

Frequency: 680.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 20.2°C
Medium parameters used (interpolated): $f = 680.5$ MHz; $\sigma = 0.868$ S/m; $\epsilon_r = 40.602$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(9.79, 9.79, 9.79) @ 680.5 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (51x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.515 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.28 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.258 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 44.1%

Maximum value of SAR (measured) = 0.802 W/kg

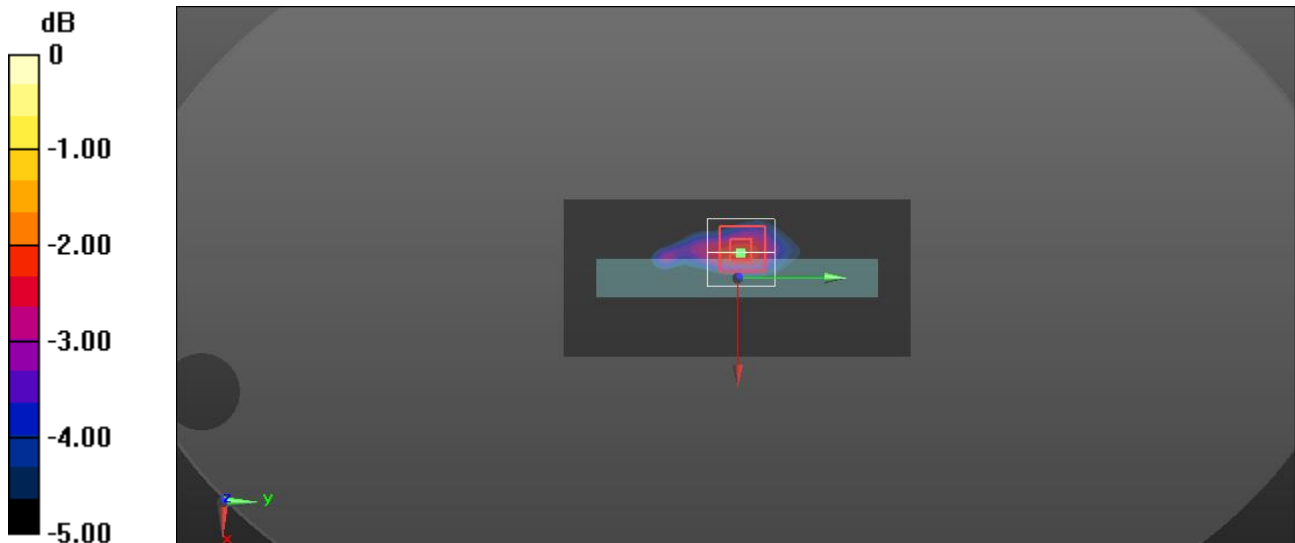

0 dB = 0.802 W/kg = -0.96 dBW/kg

WiFi 2.4GHz_Edge 1_802.11b_Ch 6_0mm


Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.6°C; Liquid Temperature: 20.7°C
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.738$ S/m; $\epsilon_r = 39.438$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(7.35, 7.35, 7.35) @ 2437 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.848 W/kg

Edge 1/Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 22.98 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 1.59 W/kg
SAR(1 g) = 0.623 W/kg; SAR(10 g) = 0.279 W/kg
Smallest distance from peaks to all points 3 dB below = 6 mm
Ratio of SAR at M2 to SAR at M1 = 39.9%
Maximum value of SAR (measured) = 1.08 W/kg

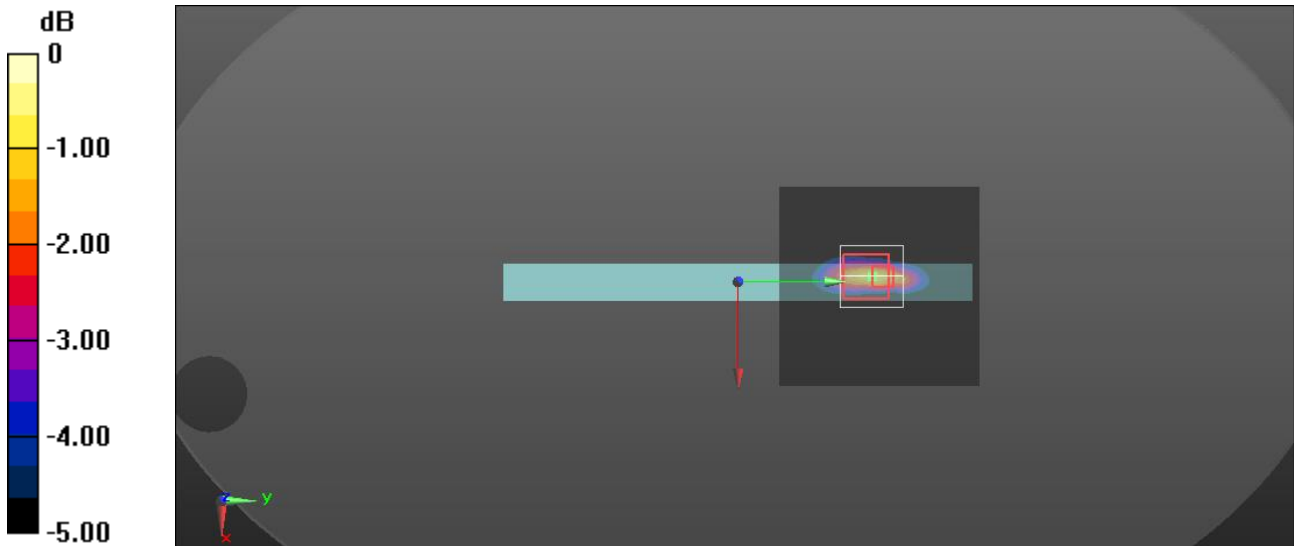

0 dB = 1.08 W/kg = 0.33 dBW/kg

WiFi 5.3GHz_Edge 1_802.11a_Ch 52_0mm


Frequency: 5260 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.3°C; Liquid Temperature: 20.9°C
Medium parameters used: $f = 5260$ MHz; $\sigma = 4.673$ S/m; $\epsilon_r = 35.265$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(5.27, 5.27, 5.27) @ 5260 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.42 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 14.31 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 2.76 W/kg
SAR(1 g) = 0.724 W/kg; SAR(10 g) = 0.237 W/kg
Smallest distance from peaks to all points 3 dB below = 6.8 mm
Ratio of SAR at M2 to SAR at M1 = 56.6%
Maximum value of SAR (measured) = 1.42 W/kg

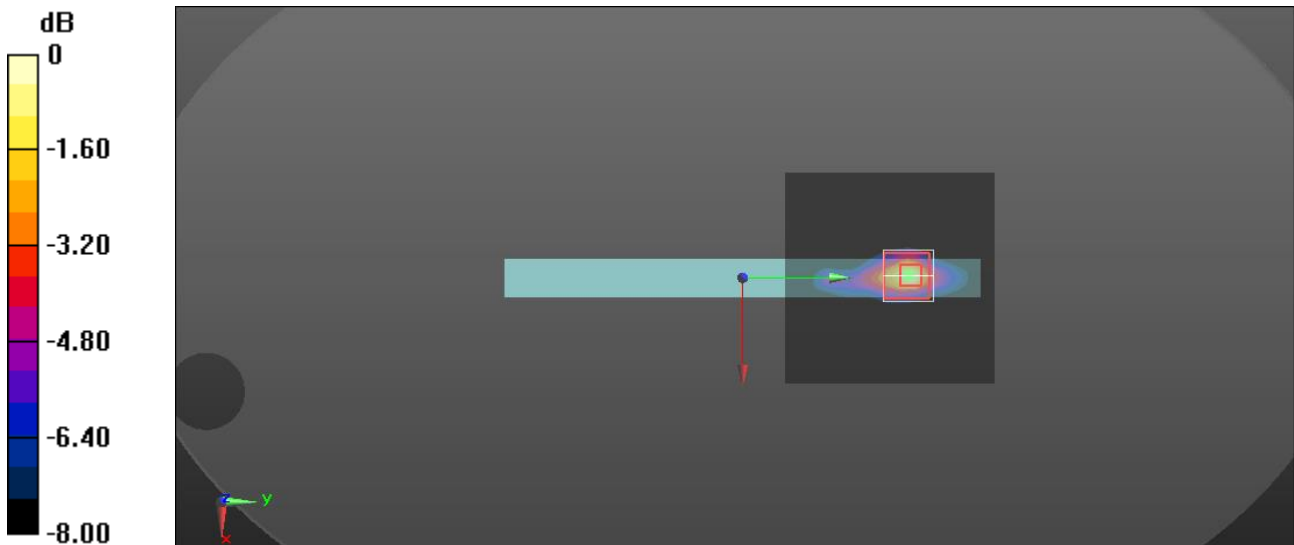

0 dB = 1.42 W/kg = 1.52 dBW/kg

WiFi 5.5GHz_Edge 1_802.11a_Ch 100_0mm


Frequency: 5500 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.0°C; Liquid Temperature: 20.8°C
Medium parameters used: $f = 5500$ MHz; $\sigma = 4.984$ S/m; $\epsilon_r = 34.971$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(4.97, 4.97, 4.97) @ 5500 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.772 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 11.47 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 1.68 W/kg
SAR(1 g) = 0.431 W/kg; SAR(10 g) = 0.150 W/kg
Smallest distance from peaks to all points 3 dB below = 7.9 mm
Ratio of SAR at M2 to SAR at M1 = 54.4%
Maximum value of SAR (measured) = 0.848 W/kg

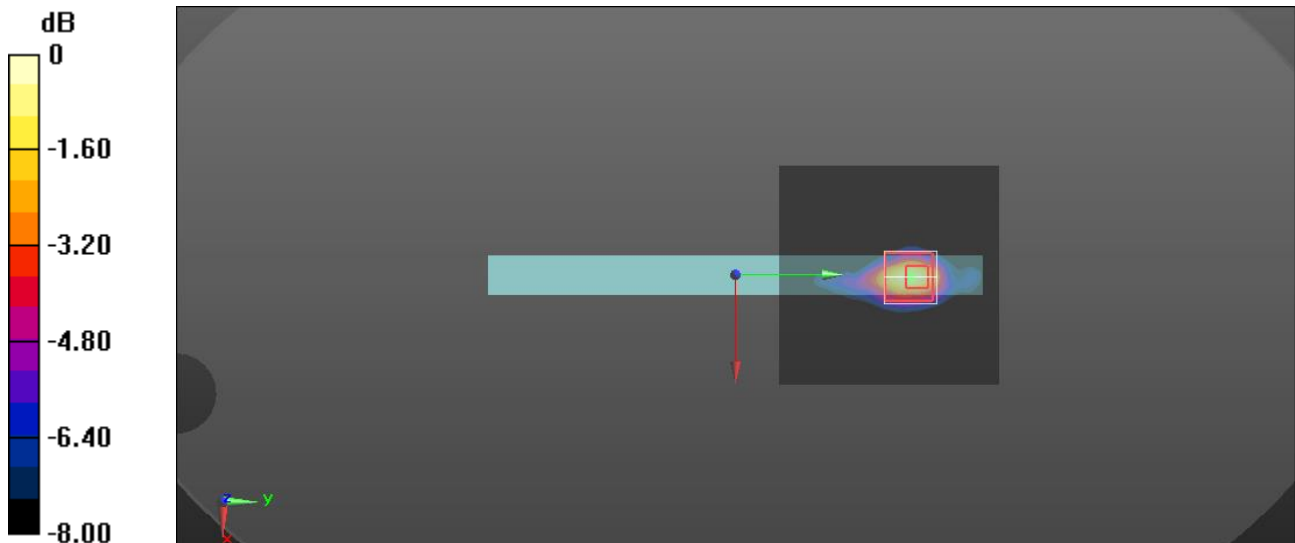

0 dB = 0.848 W/kg = -0.72 dBW/kg

WiFi 5.8GHz_Edge 1_802.11a_Ch 149_0mm


Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.3°C; Liquid Temperature: 20.9°C
Medium parameters used (interpolated): $f = 5745 \text{ MHz}$; $\sigma = 5.203 \text{ S/m}$; $\epsilon_r = 34.371$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(5.05, 5.05, 5.05) @ 5745 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (101x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
Maximum value of SAR (interpolated) = 0.957 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 10.21 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 2.03 W/kg
SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.162 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 54.8%
Maximum value of SAR (measured) = 1.01 W/kg

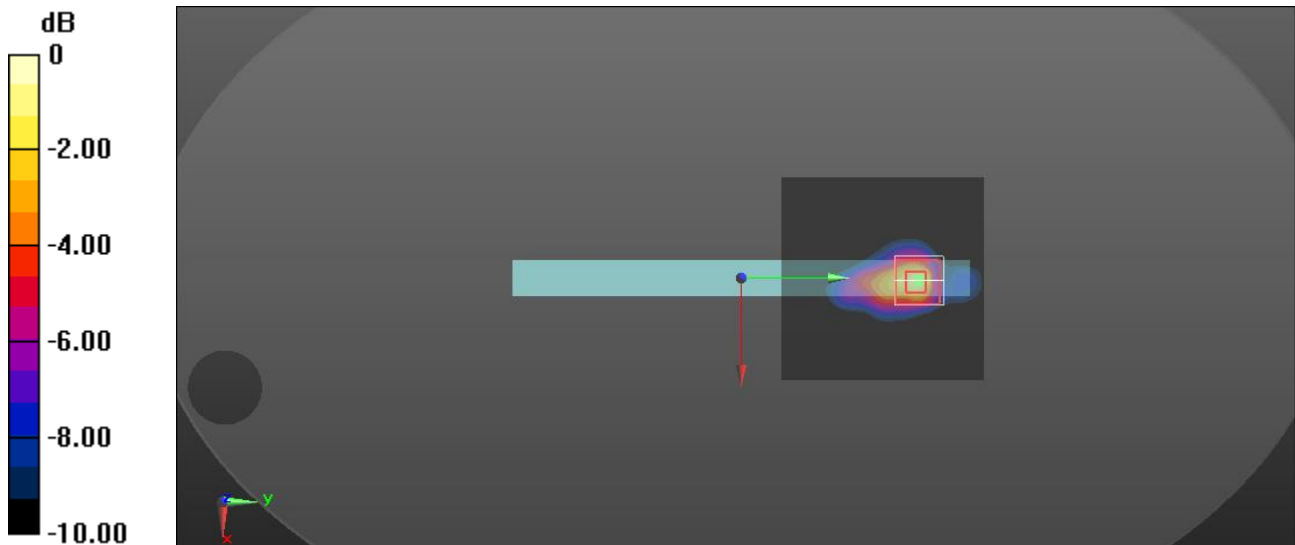

0 dB = 1.01 W/kg = 0.04 dBW/kg

Bluetooth_Edge 1_GFSK_1M_Ch 0_0mm


Frequency: 2402 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.6°C; Liquid Temperature: 20.7°C
Medium parameters used: $f = 2402$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 40.109$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(7.35, 7.35, 7.35) @ 2402 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0249 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.858 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.0460 W/kg
SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.011 W/kg
Ratio of SAR at M2 to SAR at M1 = 49.2%
Maximum value of SAR (measured) = 0.0303 W/kg

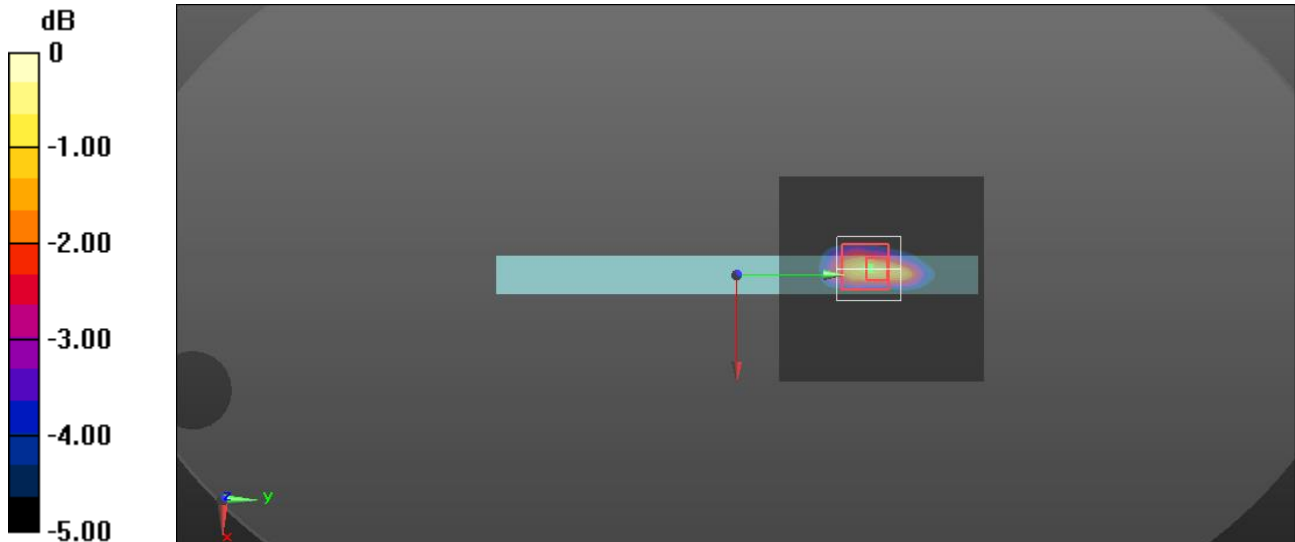

0 dB = 0.0303 W/kg = -15.19 dBW/kg

LTE Band 12_Edge 4_Ch 23095_RB 1_0_0mm_Repeated one_

Frequency: 707.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 20.2°C
Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 40.575$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(9.79, 9.79, 9.79) @ 707.5 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (51x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.20 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 38.09 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.557 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 48.4%

Maximum value of SAR (measured) = 1.63 W/kg

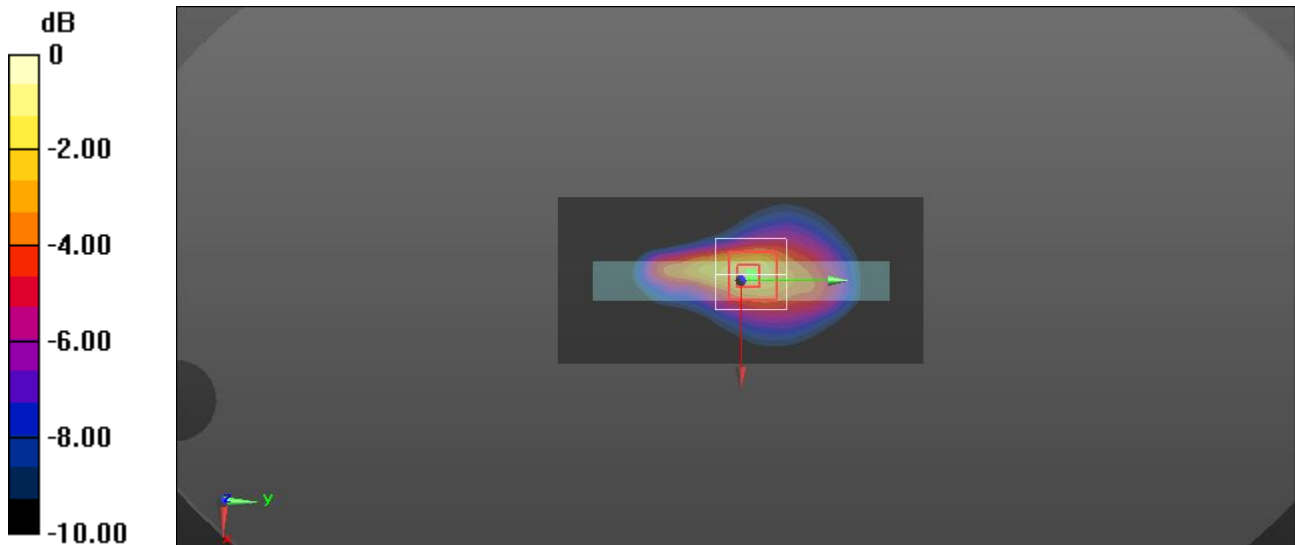

0 dB = 1.63 W/kg = 2.12 dBW/kg

LTE Band 13_Edge 4_Ch 23230_RB 1_0_0mm_Repeated one


Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 20.2°C
Medium parameters used (interpolated): $f = 782 \text{ MHz}$; $\sigma = 0.901 \text{ S/m}$; $\epsilon_r = 40.328$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(9.79, 9.79, 9.79) @ 782 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (51x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.18 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 39.97 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 1.77 W/kg
SAR(1 g) = 0.956 W/kg; SAR(10 g) = 0.555 W/kg
Smallest distance from peaks to all points 3 dB below = 11.2 mm
Ratio of SAR at M2 to SAR at M1 = 55.4%
Maximum value of SAR (measured) = 1.38 W/kg

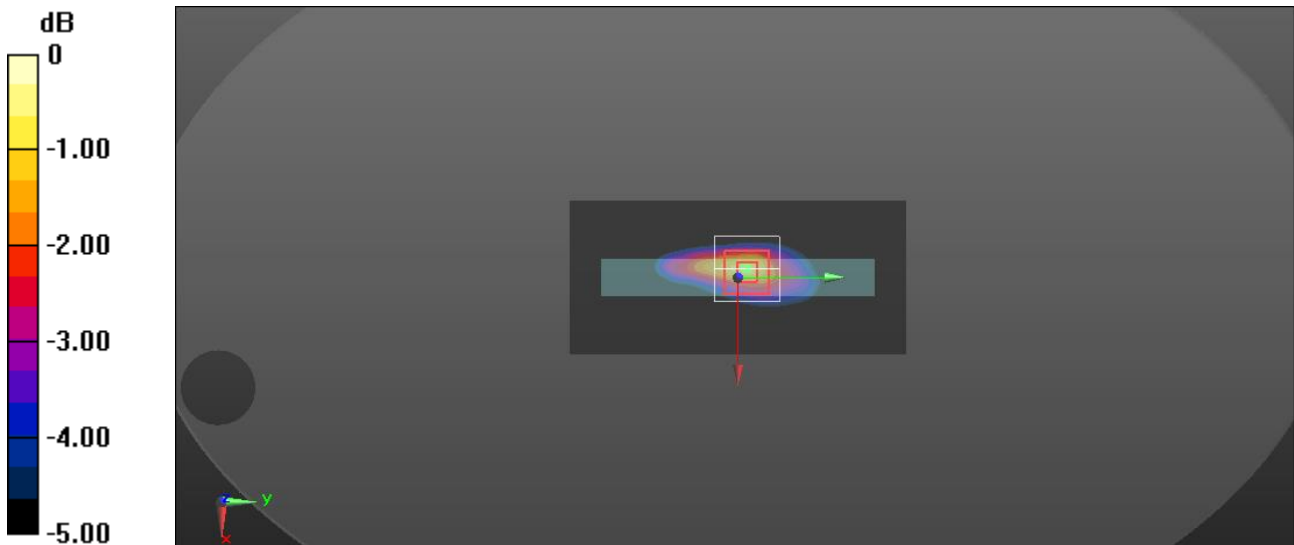

0 dB = 1.38 W/kg = 1.40 dBW/kg

LTE Band 14_Edge 4_Ch 23330_RB 1_0_0mm_Repeated one


Frequency: 793 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.2°C; Liquid Temperature: 20.3°C
Medium parameters used (interpolated): $f = 793$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 40.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(9.79, 9.79, 9.79) @ 793 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (51x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.12 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 37.07 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 1.66 W/kg
SAR(1 g) = 0.891 W/kg; SAR(10 g) = 0.513 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 54.9%
Maximum value of SAR (measured) = 1.29 W/kg

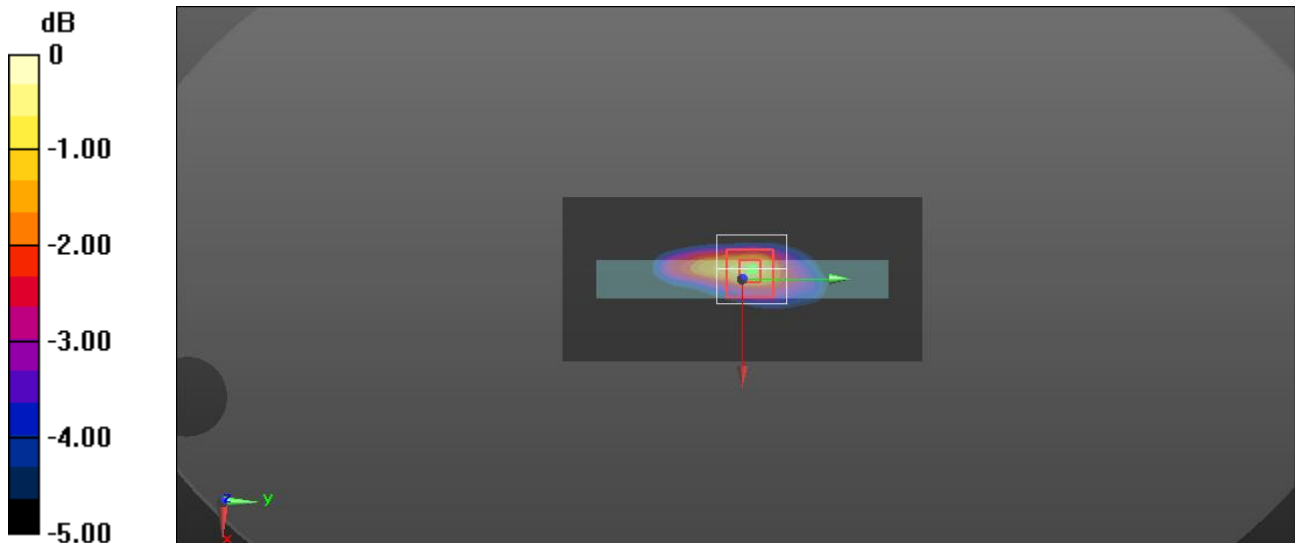

0 dB = 1.29 W/kg = 1.11 dBW/kg

LTE Band 66_Edge 4_Ch 132072_RB 1_99_14mm_Repeated one

Frequency: 1720 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.3°C; Liquid Temperature: 19.9°C
Medium parameters used: $f = 1720$ MHz; $\sigma = 1.294$ S/m; $\epsilon_r = 40.458$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn856; Calibrated: 2023/4/26
- Probe: EX3DV4 - SN3665; ConvF(8.61, 8.61, 8.61) @ 1720 MHz; Calibrated: 2023/8/18
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.69 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.46 V/m; Power Drift = -0.11 dB



Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 1.24 W/kg; SAR(10 g) = 0.753 W/kg

Smallest distance from peaks to all points 3 dB below = 16.2 mm

Ratio of SAR at M2 to SAR at M1 = 64.8%

Maximum value of SAR (measured) = 1.61 W/kg

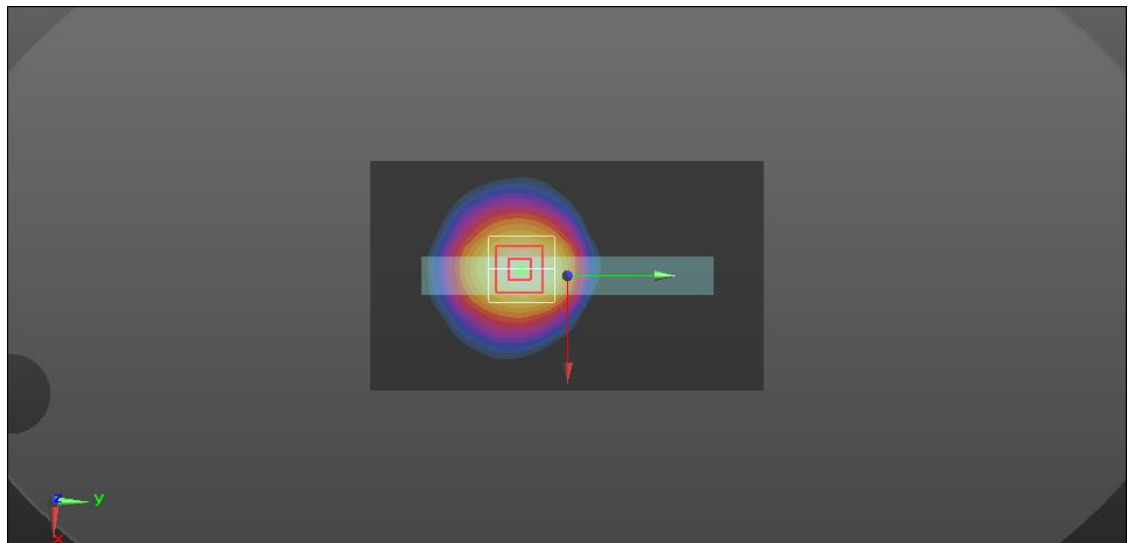

0 dB = 1.61 W/kg = 2.07 dBW/kg