

# FCC TEST REPORT

Test Report No. : DST-RR-16-F001

Applicant : **Samsung SDS Co., Ltd**  
707-19, Youksam 2-dong, Kangnam-gu, Seoul 135-918, Korea  
(123, Olympic-ro 35-gil, Songpa-gu, Seoul, Korea, 05510)

Manufacturer : **Samsung SDS Co., Ltd**  
707-19, Youksam 2-dong, Kangnam-gu, Seoul 135-918, Korea  
(123, Olympic-ro 35-gil, Songpa-gu, Seoul, Korea, 05510)

FCC ID : P4YSAM-CRM-13A

Product name : Uni-Pay

Model name : **SAM-CRM-13a**

Add model name : -

Standard applied : ANSI C63.10:2013 and ANSI C63.4:2014

Rule parts : FCC CFR 47, Part 15, Subpart C-15.225

Equipment Class : DXX - Part 15 Low Power Communication Device Transmitter

Date of receipt : March 9, 2016

Test Period : March 10, 2016 ~ March 16, 2016

Date of issue : March 24, 2016

Test Result : PASS  FAIL

**Tested by :**   
Jung-tae Kim / testing Engineer

**Reviewed by:**   
Chang-youl, Kim / Chief Engineer

## DSTech Co.

\*This report only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory.

## Revision History

Issue Report No.	Issued Date	Revisions	Effect Section
DST-RR-16-F001	March 24, 2016	Initial Release	All

## TABLE OF CONTENTS

<b>1</b>	<b>Basic Description of EUT</b> .....	<b>4</b>
<b>2</b>	<b>Facilities and accreditations</b> .....	<b>5</b>
<b>3</b>	<b>Summary of test results</b> .....	<b>6</b>
	3.1 Standards & results .....	6
	3.2 Uncertainty .....	6
<b>4</b>	<b>Description of Test System</b> .....	<b>7</b>
	4.1. Test configuration (arrangement of EUT) .....	7
	4.2. Type of Peripheral Equipment Used: .....	7
	4.3. Type of Cables Used: .....	7
<b>5</b>	<b>Test and measurements</b> .....	<b>8</b>
	5.1. Antenna requirement .....	8
	5.2. Radiated emissions .....	9
	5.3. 20 dB Bandwidth .....	16
	5.4. Frequency tolerance of carrier signal .....	17
	5.5. AC power line Conducted emissions .....	19

## 1 Basic Description of EUT

### 1.1 Basic Description of EUT

Product name:	Uni-Pay
Model name:	SAM-CRM-13a
Serial No:	Proto Type
Transmit Frequency:	13.56 MHz
Number of Channels:	1
Type of Modulation	ASK
Local Oscillator or X-Tal	32.768 kHz, 12 MHz, 13.56 MHz, 27.12 MHz
Power source	DC 12 V
Test SW Version	DualCard V 2.6

### 1.2 Antenna Description

Type of Antenna	Internal PCB loop antenna
Length	123 × 118.2 mm, 4-turns

Note : The above EUT information was declared by the manufacturer.

## 2 Facilities and accreditations

### 2.1 Address

#### DSTech Co.

Test Site Location : 80, Jeil-ri, Yangji-myun, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
 TEL : 82-31-336-1798, FAX : 82-31-336-3451

### 2.2 Certificated

FCC Site Registration No.: 325242  
 VCCI Site Registration No.: R-3420, C-3794  
 IC Site Registration No.: 9147A-1

### 2.3 List of test and measurement instruments

Equipment Type	Model	Manufacture	Serial No	Next Cal. Date	Cal time	Use
EMI TEST RECEIVER	ESCI	R&S	100049	2016.07.29	1 year	<input checked="" type="checkbox"/>
Spectrum Analyzer	FSP	R&S	100785	2016.07.29	1 year	<input checked="" type="checkbox"/>
Pre-amplifier	8447D	H.P	2727A06183	2016.07.30	1 year	<input checked="" type="checkbox"/>
ARTIFICIAL MAIN NETWORK	MN425B	ANRITSU	M05519	2016.07.30	1 year	<input checked="" type="checkbox"/>
2-LINE V-NETWORK	ESH3-Z5	R&S	100193	2016.07.30	1 year	<input checked="" type="checkbox"/>
Loop Antenna	AL-130	COM-POWER	121010	2016.06.05	1 year	<input checked="" type="checkbox"/>
TRILOG Broadband Antenna	VULB9168	Schwarzbeck	600	2017.01.16	1 year	<input checked="" type="checkbox"/>
Digital Thermo-Hygrometer	PC-5000TRH-II	SATO	15042254-1	2016.04.27	1 year	<input checked="" type="checkbox"/>
Temperature / Humidity Chamber	DS-150SP(T)	DAEWON SCIENCE	150417-01	2016.11.20	1 year	<input checked="" type="checkbox"/>
Antenna Mast	EAM 4.0	DAEIL EMC	N/A	N/A	N/A	<input checked="" type="checkbox"/>
Antenna Turntable Controller	EMRT2015	HD	N/A	N/A	N/A	<input checked="" type="checkbox"/>

### 3 Summary of test results

#### 3.1 Standards & results

Requirement	CFR 47 Section	Result
Antenna Requirement	15.203	Meets the requirements
Radiated Emissions Field Strength within the band 13.553-13.567 MHz	15.225(a)	Meets the requirements
Field Strength within the bands 13.410-13.553 MHz and 13.567-13.710 MHz 13.110-13.410 MHz and 13.710-14.010 MHz	15.225(b) & (c)	Meets the requirements
Radiated Harmonics and Spurious Emissions Outside of the 13.110 – 14.010 MHz	15.225(d) 15.209(a)	Meets the requirements
Frequency Tolerance of Carrier Signal	15.225(e)	Meets the requirements
AC power line Conducted emissions	15.207(a)	Meets the requirements

Note: -

#### 3.2 Uncertainty

Measurement Item	Combined Standard Uncertainty $U_c$	Expanded Uncertainty $U = k \times U_c (k = 2)$
Conducted RF power	$\pm 1.520$ dB	$\pm 3.04$ dB
Radiated disturbance	$\pm 2.529$ dB	$\pm 5.08$ dB
Conducted disturbance	$\pm 1.950$ dB	$\pm 3.90$ dB

## 4 Description of Test System

### 4.1. Test configuration (arrangement of EUT)

The EUT was transmitting RF signals continuously while the RS-232 cable was connected to PC.

Test software used: DualCard.exe, Ver2.6 (Card Reader Test Program)

### 4.2. Type of Peripheral Equipment Used:

#	Equipment	Manufacturer	Model No.	Serial No.
1	AC Adapter	Dee Van Electronic(Long Chuan) Co., Ltd.	DSA-42D-12 1	120350
2	RFID card	N/A	N/A	N/A
3	Note PC	LENOVO	20095	WB05800041

### 4.3. Type of Cables Used:

The following support units or accessories were used to form a representative test configuration during the tests.

#	Start		End		Cable	
	Name	I/O port	Name	I/O port	length (m)	shielded (Y/N)
1	EUT	DC Input	AC Adapter	DC Output	1.5	N
2	EUT	RS-232	Note PC	USB	1.1	N (core)
3	Note PC	AC Input	AC Mains	AC Mains	0.9	N
4	RFID card	-	-	-	-	-

Note: 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.  
 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 5 Test and measurements

### 5.1. Antenna requirement

#### 5.1.1 Regulation

FCC section 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of Part 15C. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31 (d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

#### 5.1.2 Result:

**PASS**

The EUT has an integral PCB loop antenna, and meets the requirements of this section.



## 5.2. Radiated emissions

### 5.2.1 Regulation

#### FCC 47CFR15 – 15.225

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Frequency (MHz)	Field strength limit (μV/m) @ 30 m	Field strength limit (dBμV/m) @ 30 m	Field strength limit (dBμV/m) @ 3 m
13.110 – 13.410	106	40.5	80.5
13.410 – 13.553	334	50.5	90.5
13.553 – 13.567	15,848	84.0	124.0
13.567 – 13.710	334	50.5	90.5
13.710 – 14.010	106	40.5	80.5

#### FCC 47CFR15 – 15.209

- (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength limit (μV/m)	Field strength limit (dBμV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F (kHz) = 266.7 – 4.9	48.5 – 13.8	300
0.490 – 1.705	24000/F (kHz) = 49.0 – 14.1	33.8 – 23.0	30
1.705 – 30.0	30	29.5	30
30 – 88	100	40.0	3
88 – 216	150	43.5	3
216 – 960	200	46.0	3
Above 960	500	54.0	3

\* The emission limits shown in the above table are based on measurement instrumentation employing a CISPR quasi-peak detector. For the frequency bands 9 – 90 kHz, 110 – 490 kHz and above 1000 MHz, the radiated emission limits are based on measurements employing an average detector.

\* The lower limit shall apply at the transition frequencies.

## 5.2.2 Measurement Procedure

### Radiated Emissions Test, 9 kHz to 30 MHz (Magnetic Field Test)

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions at a distance of 1 meter or 3 meters according to Section 15.31(f)(2).
2. The EUT was placed on the top of the 0.8-meter height, 1 × 1.5 meter non-metallic table.
3. Emissions from the EUT are maximized by adjusting the orientation of the Loop antenna and rotating the EUT on the turntable. Manipulating the system cables also maximizes EUT emissions if applicable.
4. To obtain the final measurement data, each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

### Radiated Emissions Test, above 30 MHz

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters.
2. The EUT was placed on the top of the 0.8-meter height, 1 × 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.
3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 30 to 1000 MHz using the broadband antenna.
4. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.
5. The EUT is situated in three orthogonal planes (if appropriate)

## 5.2.3 Calculation of the field strength limits below 30 MHz

1. No special calculation for obtaining the field strength in dB $\mu$ V/m is necessary, because the EMI receiver and the active loop antenna operate as a system, where the reading gives directly the field strength result (dB $\mu$ V/m). The antenna factors and cable losses are already taken into consideration.
2. For test distance other than what is specified, but fulfilling the requirements of section 15.31 (f) (2) the field strength is calculated by adding additionally an extrapolation factor of 40dB/decade (inverse linear distance for field strength measurements).
3. All following emission measurements were performed using the test receiver's average, peak, and quasi-peak detector function with specified bandwidth.
4. The basic equation is as follows;

$$FS = RA + DF$$

Where

FS = Field strength in dB $\mu$ V/m

RA = Receiver Amplitude in dB $\mu$ V/m

DF = Distance Extrapolation Factor in dB


Where  $DF = 40\log(D_{TEST} / D_{SPEC})$  where  $D_{TEST}$  = Test Distance and  $D_{SPEC}$  = Specified Distance

$DF = 40\log(3m/300m) = -80$  dB, for frequency band: 0.009 to 0.490 MHz


$DF = 40\log(3m/30m) = -40$  dB, for frequency band: 0.490 to 30 MHz

### 5.2.4 Test setup

#### - 9 kHz to 30 MHz Emissions

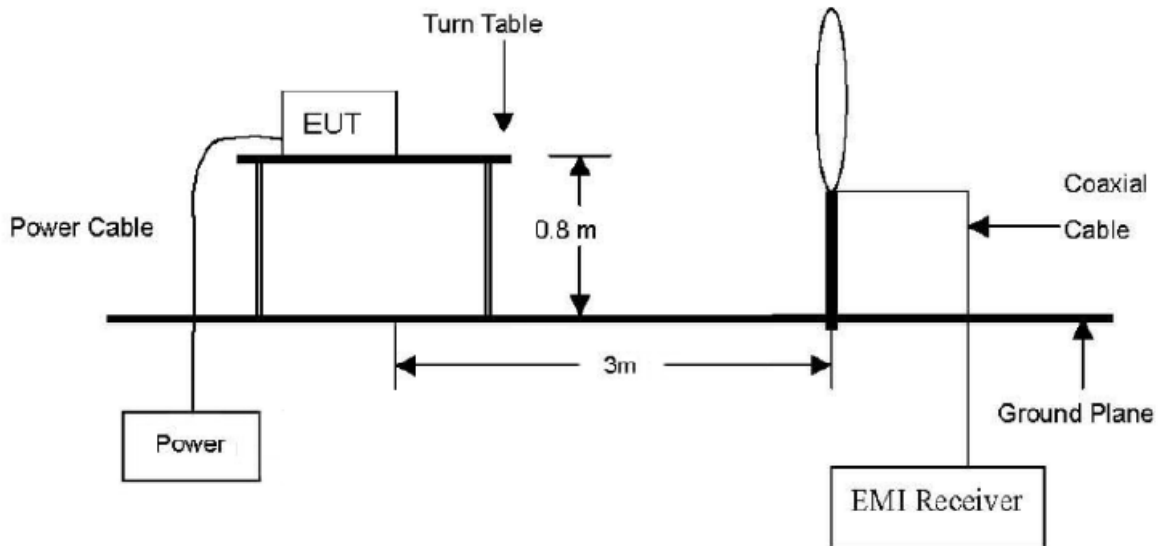

#### - 30 MHz to 1000 MHz Emissions

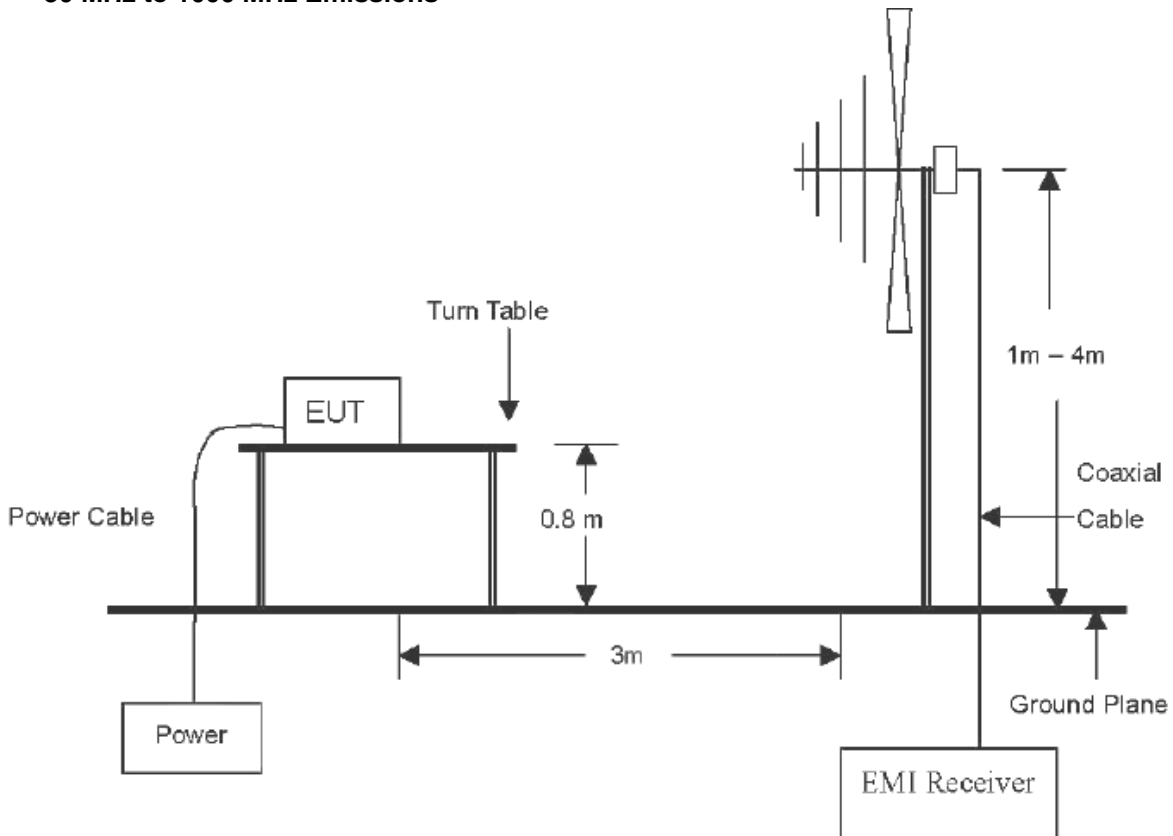

### 5.2.4 Test Results:

### PASS

#### (RFID card type A)

Frequency [MHz]	RBW [kHz]	Reading [dB( $\mu$ V/m)]	Cable Loss [dB]	Actual [dB( $\mu$ V/m)]	Limit (at 3m) [dB( $\mu$ V/m)]	Margin [dB]
<b>Emissions Quasi-peak DATA under 15.225(a), (b)&amp;(c)</b>						
13.560 0	9	60.12	0.5	60.62	124.0	63.38
13.346 7	9	---	0.5	---	80.5	---
13.465 5	9	---	0.5	---	90.5	---
13.665 3	9	---	0.5	---	90.5	---
13.771 5	9	---	0.5	---	80.5	---
<b>Emissions Quasi-peak DATA under 15.225(d), 15.209</b>						
27.12	9	40.53	0.5	41.03	69.5	28.47

#### (RFID card type B)

Frequency [MHz]	RBW [kHz]	Reading [dB( $\mu$ V/m)]	Cable Loss [dB]	Actual [dB( $\mu$ V/m)]	Limit (at 3m) [dB( $\mu$ V/m)]	Margin [dB]
<b>Emissions Quasi-peak DATA under 15.225(a), (b)&amp;(c)</b>						
13.560 0	9	67.30	0.5	67.80	124.0	56.2
13.505 0	9	---	0.5	---	90.5	---
13.613 1	9	---	0.5	---	90.5	---
<b>Emissions Quasi-peak DATA under 15.225(d), 15.209</b>						
27.12	9	---	0.5	---	69.5	---

Actual (dB $\mu$ V/m) = Reading + Cable Loss


Margin (dB) = Limit – Actual

NOTE: These test results were measured at the 3 m distance.

Remark: "----" means the emission level was too low to be measured or in the noise floor.

**(RFID card type A)**

Frequency (MHz)	RBW [kHz]	Actual [dB(μV)/m]	Antenna height (cm)	Pol	Table Angle (Deg)	Corr. (dB)	Margin (dB)	Limits [dB(μV)/m]
81.40	100	31.2	100	V	125	-15.1	8.8	40.0
190.50	100	36.1	345	H	221	-8.3	7.4	43.5
190.50	100	37.5	130	V	0	-8.3	6.0	43.5
217.21	100	36.4	100	H	355	-6.8	9.6	46.0
217.21	100	36.2	100	V	345	-6.8	9.8	46.0
271.53	100	38.3	100	H	0	-3.7	7.7	46.0
650.79	100	36.7	150	V	0	-2.6	9.3	46.0
759.43	100	37.9	250	H	350	-0.8	8.1	46.0

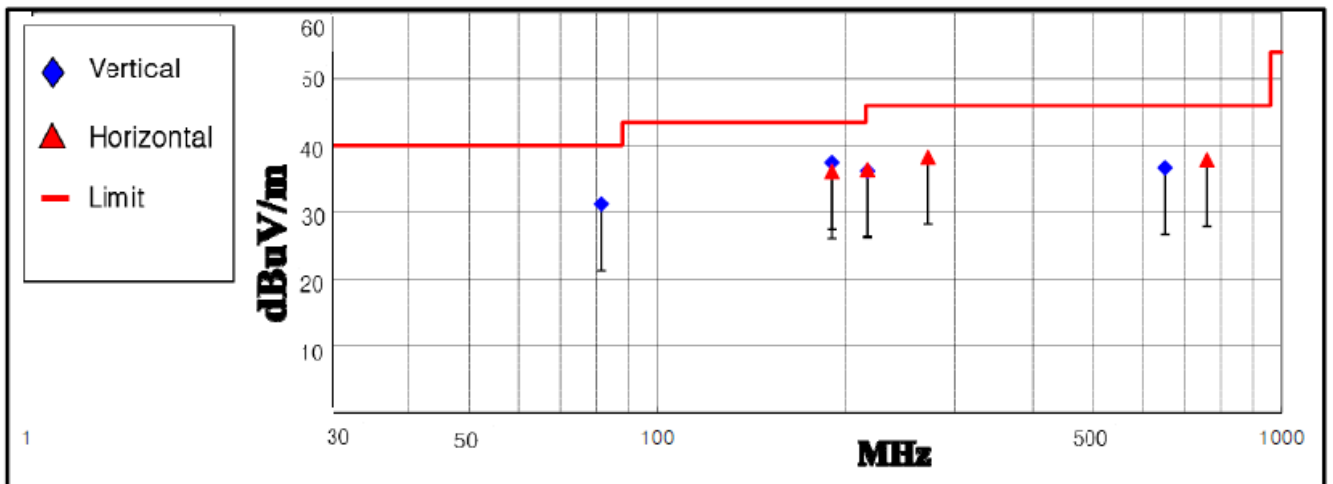


- 1. H: Horizontal polarization, V: Vertical polarization
- 2. Actual = Reading + Corr. (Amp + Antenna factor + Cable loss)
- 3. Margin value = Limit – Actual

NOTE: 1. All emissions not reported were more than 20 dB below the specified limit or in the noise floor.  
 2. These test results measured at the 3 m distance.

**(RFID card type B)**

Frequency (MHz)	RBW [kHz]	Quasi-Peak [dB(μV)/m]	Antenna height (cm)	Pol	Table Angle (Deg)	Corr. (dB)	Margin (dB)	Limits [dB(μV)/m]
40.67	100	30.0	400	H	0	-13.4	10.0	40.0
40.67	100	36.3	100	V	222	-13.4	3.7	40.0
81.41	100	31.4	120	V	355	-15.1	8.6	40.0
190.05	100	33.9	100	V	345	-8.4	9.6	43.5
217.21	100	36.9	130	H	0	-6.8	9.1	46.0
217.21	100	37.2	190	V	355	-6.8	8.8	46.0
271.53	100	39.1	100	H	0	-3.7	6.9	46.0
271.53	100	37.2	200	V	189	-3.7	8.8	46.0
285.11	100	41.1	100	H	34	-3.0	4.9	46.0
297.72	100	39.7	100	H	0	-2.3	6.3	46.0

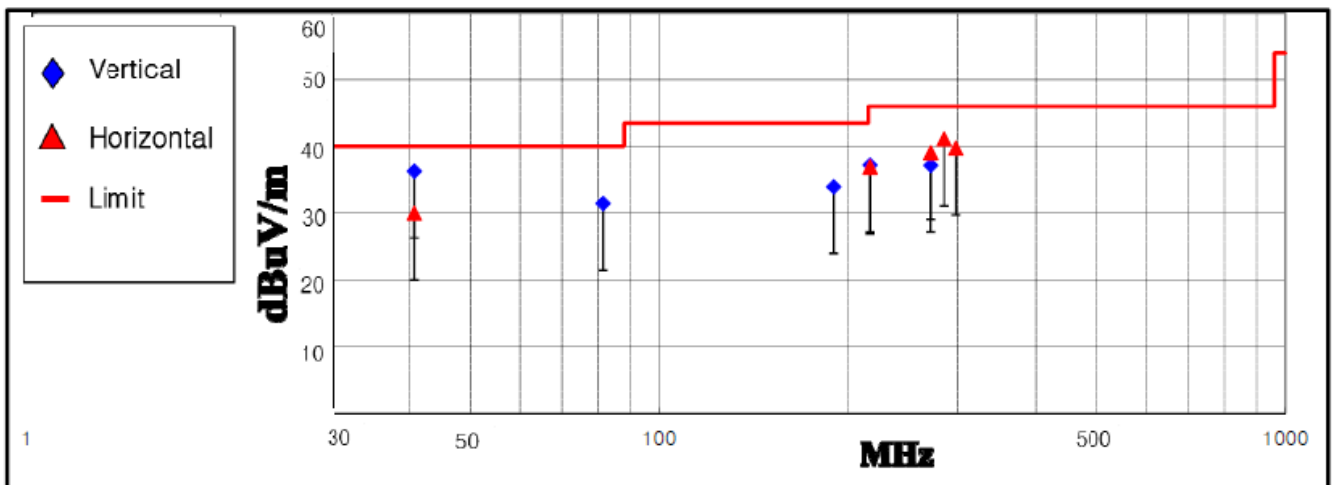


1. H: Horizontal polarization, V: Vertical polarization
2. Actual = Reading + Corr. (Amp - Antenna factor + Cable loss)
3. Margin value = Actual


NOTE: 1. All emissions not reported were more than 20 dB below the specified limit or in the noise floor.  
 2. These test results measured at the 3 m distance.

**Plot of the Band edge** (Preliminary measurement in the anechoic chamber at 3 m distance to find out the frequencies, at which the spurious emissions occur, with the peak detector function)

**(RFID card type A)**

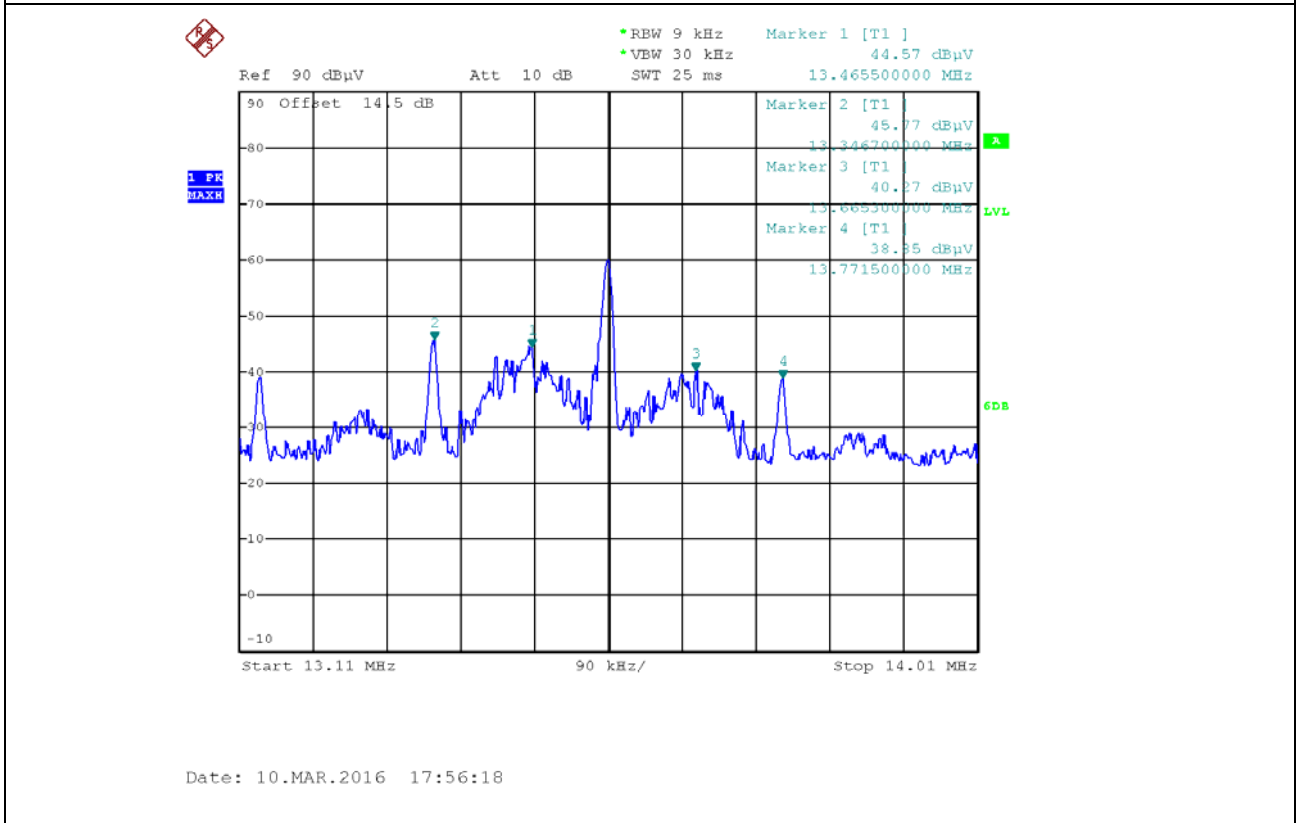

**(RFID card type B)**

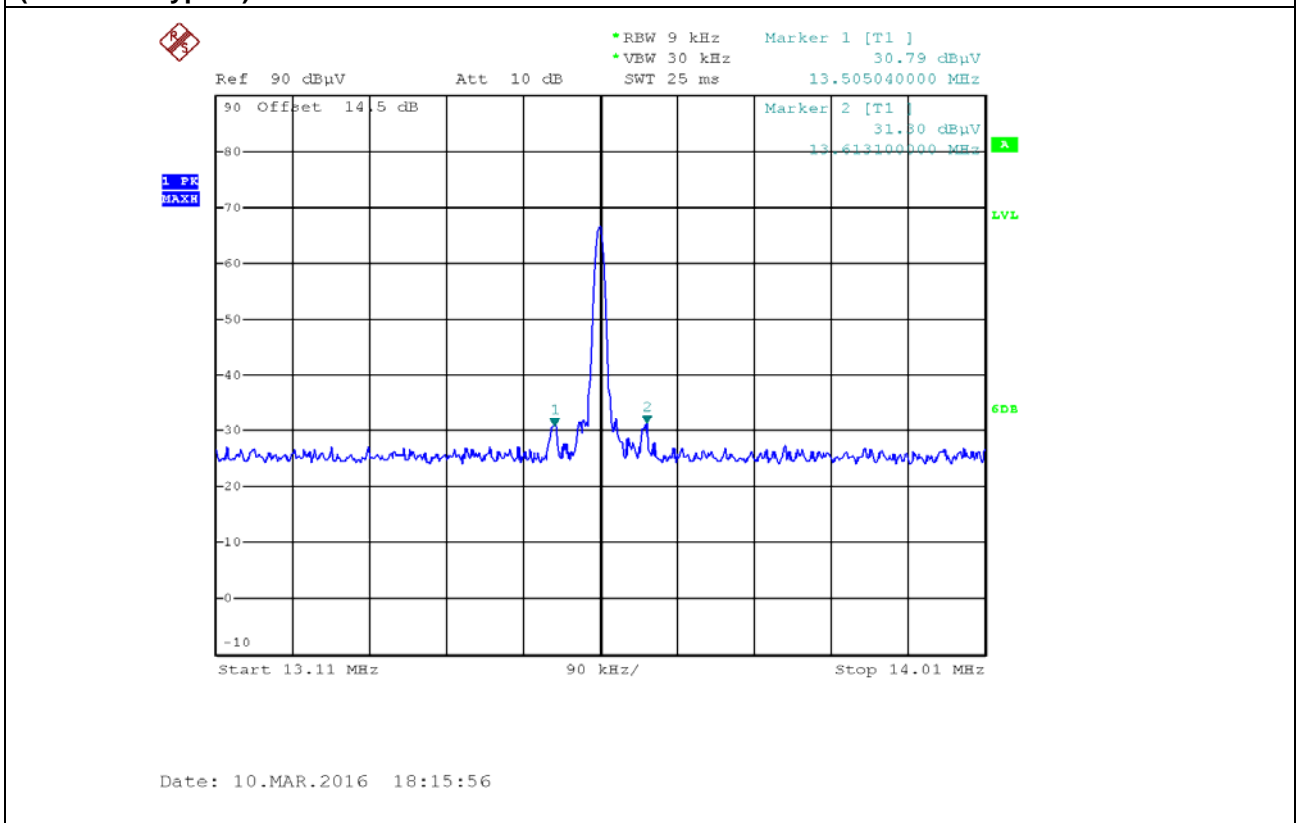

### 5.3. 20 dB Bandwidth


#### 5.3.1 Regulation

FCC 47CFR15 – 15.225(e)


Test setup: The EUT was connected to a spectrum analyzer.

Test procedure: The 20 dB bandwidth was measured by using a spectrum analyzer.

#### 5.3.2 Test setup

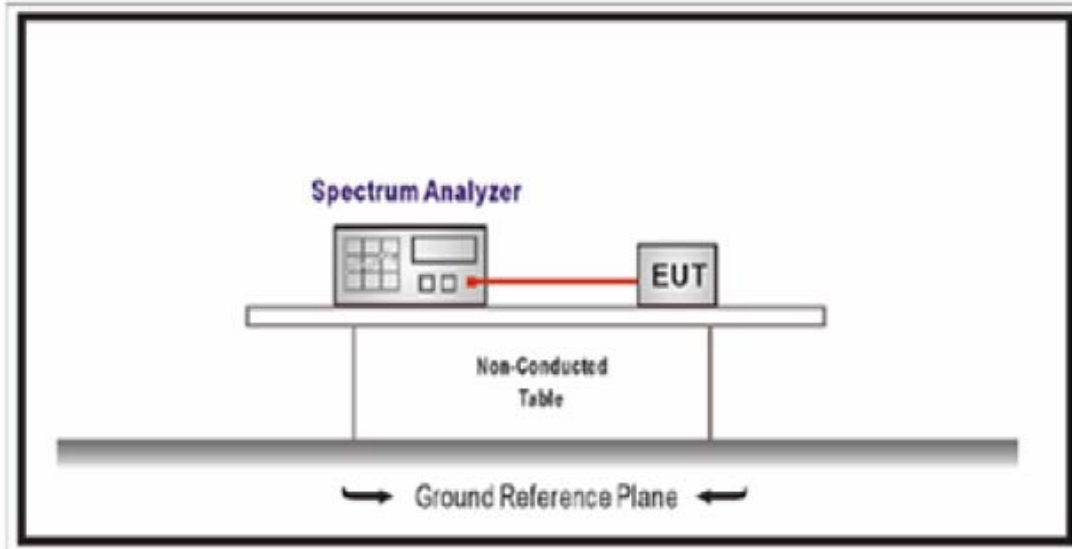

#### 5.3.3 Test Results: PASS

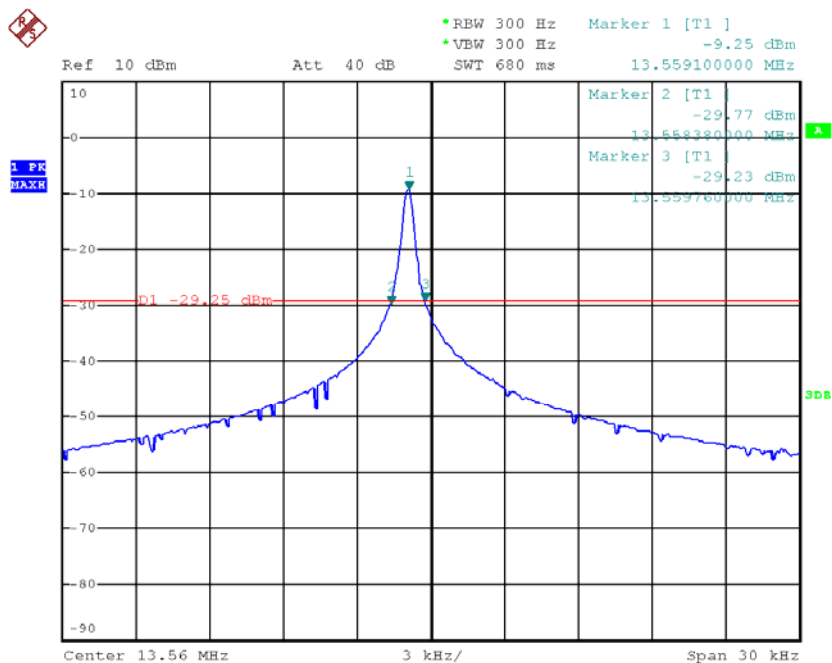

Date: 10.MAR.2016 18:35:44



## 5.4. Frequency tolerance of carrier signal

### 5.4.1 Regulation


#### FCC 47CFR15 – 15.225(e)

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery-operated equipment, the equipment tests shall be performed using a new battery.

### 5.4.2 Measurement Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The transmission time was measured with the spectrum analyzer using RBW=1 kHz, VBW=1 kHz.
3. Set the temperature of chamber to -20 . Allow sufficient time °C (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the highest temperature 50°C is measured, record all measured frequencies on each temperature step.

### 5.4.2 Test setup

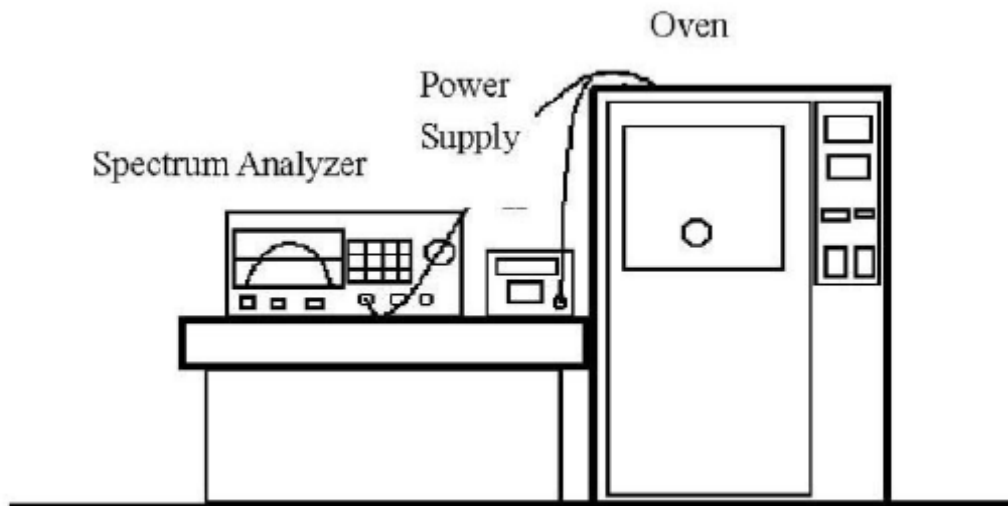

**5.4.3 Test Results:**
**PASS**
**Table 5: Frequency Tolerance**

Reference Frequency: 13.5600MHz, LIMIT: within $\pm 1$ 356 Hz									
Environment Temperature [°C]	Power Supplied [V <sub>AC</sub> ]	Carrier Frequency Measured with Time Elapsed							
		STARUP		2 minutes		5 minutes		10 minutes	
		[MHZ]	Err [Hz]	[MHZ]	Err [Hz]	[MHZ]	Err [Hz]	[MHZ]	Err [Hz]
+50	120	13.559191	809	13.559192	808	13.559192	808	13.559194	806
+40	120	13.559117	883	13.559118	882	13.559118	882	13.559180	820
+30	120	13.559115	885	13.559116	884	13.559116	884	13.559117	883
+20	120	13.559110	890	13.559111	889	13.559111	889	13.559112	888
+10	120	13.559105	895	13.559105	895	13.559105	895	13.559103	897
0	120	13.559100	900	13.559100	900	13.559098	902	13.559097	903
-10	120	13.559095	905	13.559094	906	13.559094	906	13.559093	907
-20	120	13.559093	907	13.559095	905	13.559095	905	13.559094	906

Reference Frequency: 13.5600MHz, LIMIT: within $\pm 1$ 356 Hz									
Power Supplied [V <sub>AC</sub> ]	Carrier Frequency Measured with Time Elapsed								
	STARUP		2 minutes		5 minutes		10 minutes		
	[MHZ]	Err [Hz]	[MHZ]	Err [Hz]	[MHZ]	Err [Hz]	[MHZ]	Err [Hz]	
85 %	13.559115	885	13.559115	885	13.559116	884	13.559117	883	
100 %	13.559110	890	13.559111	889	13.559111	889	13.559112	888	
115 %	13.559118	882	13.559118	882	13.559118	882	13.559120	880	

**Err [Hz] = Measured carrier frequency (MHz) - Reference Frequency (13.56 MHz)**

## 5.5. AC power line Conducted emissions

### 5.5.1 Regulation

FCC 47CFR15 – 15.207(a)

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50μH/50Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

\* Decreases with the logarithm of the frequency.

### 5.5.2 Test Procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50Ω/50μH LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASI-PEAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

**5.5.3 Test Results: PASS**

**(RFID card type A – Neutral Line)**

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15000	28.7	12.7	10.0	38.7	22.7	66.0	56.0	27.3	33.3	N(PK)
2	0.48205	33.2	24.9	10.0	43.2	34.9	56.3	46.3	13.1	11.4	N(PK)
3	0.62260	17.0	10.7	10.0	27.0	20.7	56.0	46.0	29.0	25.3	N(PK)
4	1.16945	20.2	10.8	10.0	30.2	20.8	56.0	46.0	25.8	25.2	N(PK)
5	13.55910	43.7	36.1	10.5	54.2	46.6	60.0	50.0	5.8	3.4	N(PK)

**(RFID card type A - Live Line)**

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15000	13.6	4.0	10.0	23.6	14.0	66.0	56.0	42.4	42.0	L(PK)
2	0.48330	32.5	27.9	10.0	42.5	37.9	56.3	46.3	13.8	8.4	L(PK)
3	0.74550	12.1	2.2	10.0	22.1	12.2	56.0	46.0	33.9	33.8	L(PK)
4	1.08785	13.1	8.3	10.0	23.1	18.3	56.0	46.0	32.9	27.7	L(PK)
5	13.55905	40.6	35.2	10.5	51.1	45.7	60.0	50.0	8.9	4.3	L(PK)

**(RFID card type B - Neutral Line)**


NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15000	33.9	9.2	10.0	43.9	19.2	66.0	56.0	22.1	36.8	N(PK)
2	0.46150	33.3	29.0	10.0	43.3	39.0	56.7	46.7	13.4	7.7	N(PK)
3	0.48115	33.4	24.9	10.0	43.4	34.9	56.3	46.3	12.9	11.4	N(PK)
4	1.08280	21.5	11.6	10.0	31.5	21.6	56.0	46.0	24.5	24.4	N(PK)
5	13.55910	40.6	33.7	10.5	51.1	44.2	60.0	50.0	8.9	5.8	N(PK)

**(RFID card type B - Live Line)**


NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15000	37.6	-2.5	10.0	47.6	7.5	66.0	56.0	18.4	48.5	L(PK)
2	0.36750	19.0	11.1	10.0	29.0	21.1	58.6	48.6	29.6	27.5	L(PK)
3	0.48235	25.8	22.4	10.0	35.8	32.4	56.3	46.3	20.5	13.9	L(PK)
4	0.90500	11.9	6.6	10.0	21.9	16.6	56.0	46.0	34.1	29.4	L(PK)
5	13.55910	41.7	36.6	10.5	52.2	47.1	60.0	50.0	7.8	2.9	L(PK)

### Plot of the Conducted Emissions - RFID tag (A type)

#### Neutral Line

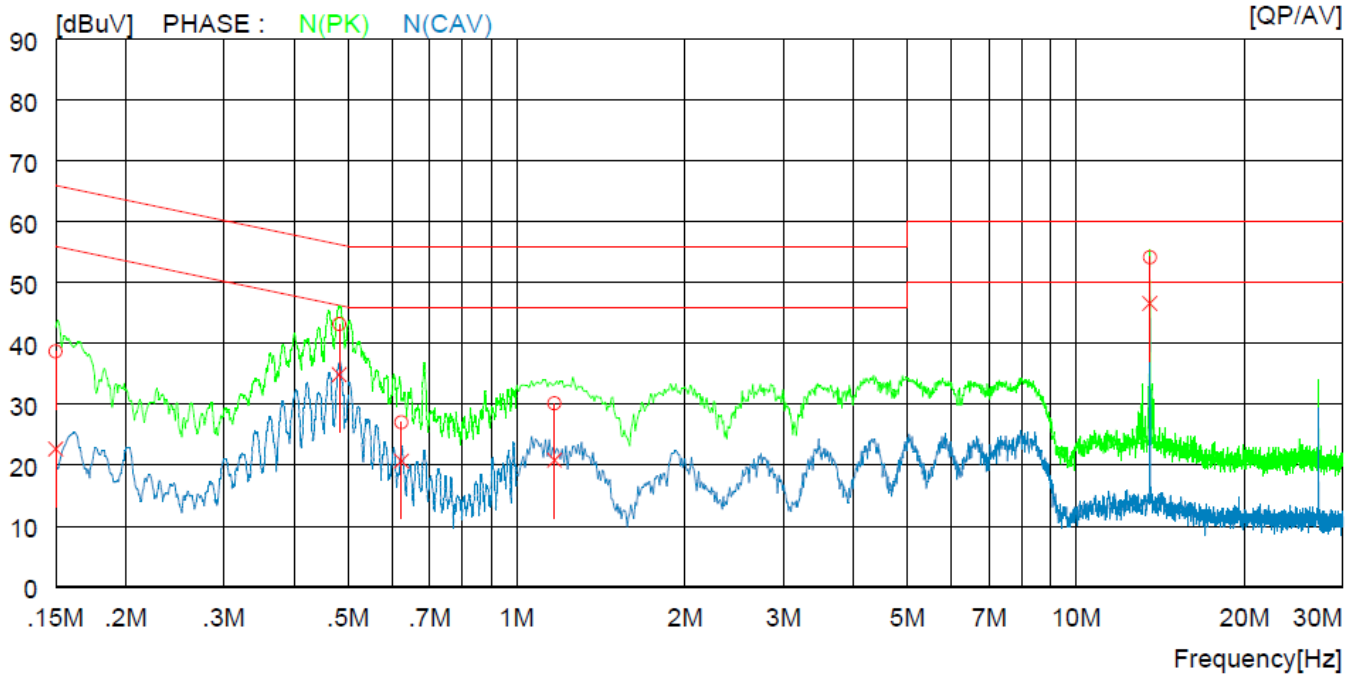


#### Live Line

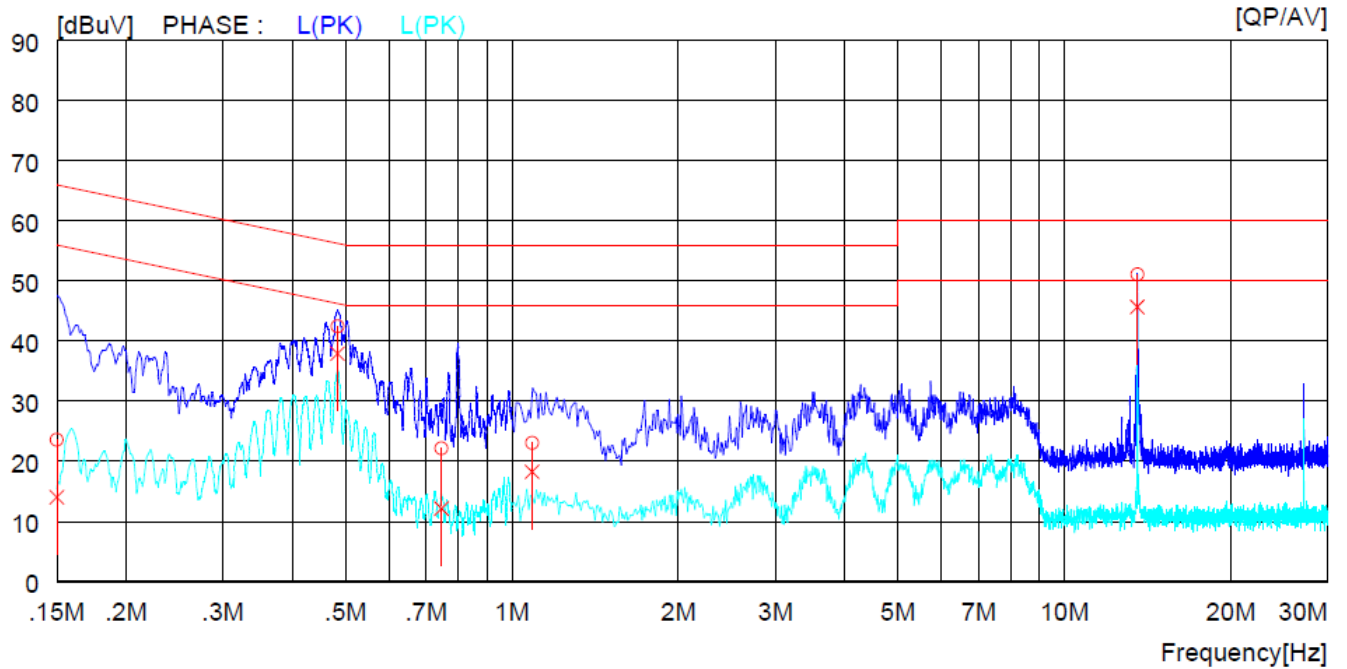

### Plot of the Conducted Emissions - RFID tag (B type)

#### Neutral Line

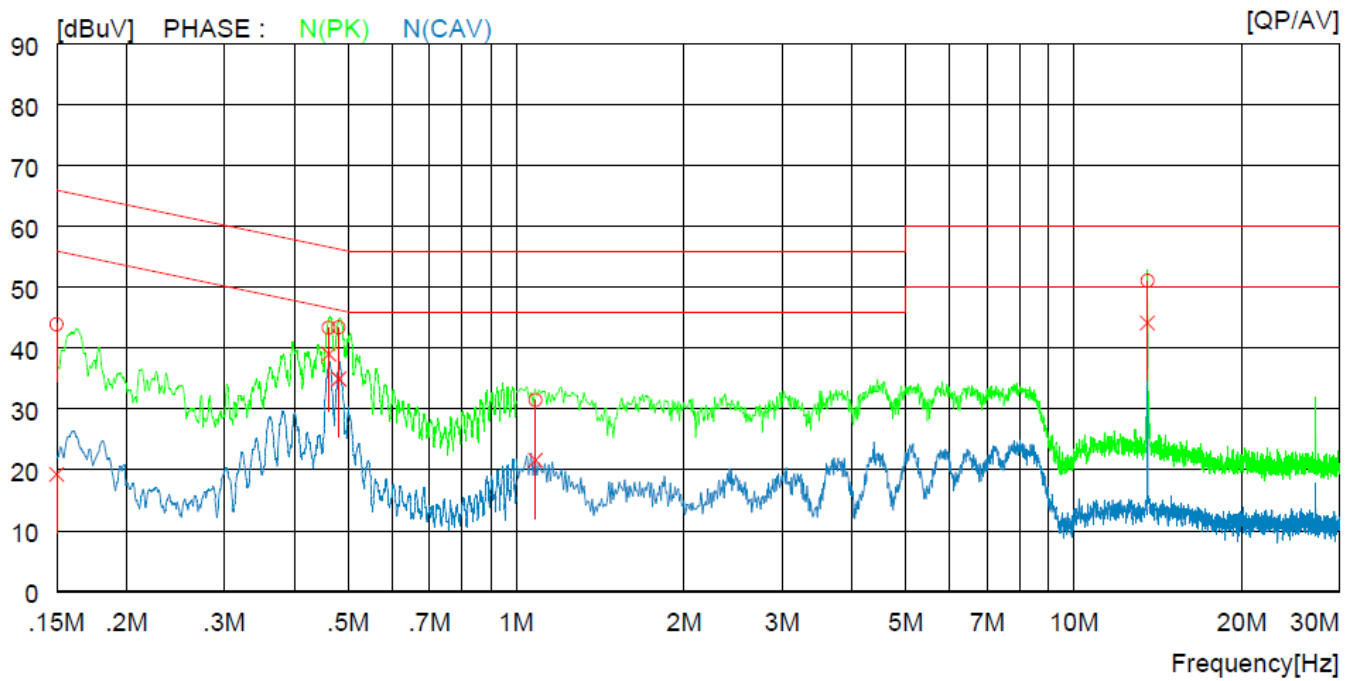

#### Live Line

