



MEASUREMENT REPORT

FCC PART 15.247 WLAN 802.11b/g/n/ax

Report No.: S20231030848502

Issue Date: 12-14-2023

Applicant: Shanghai MXCHIP Information Technology Co., Ltd
Address: 9th Floor, Building B, Lane 2145, Jinsha Jiang Road, Putuo District, Shanghai
FCC ID: P53-EMC6069
Product: 2.4GHz Wi-Fi/BLE Module
Model No.: EMC6069-P
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (15.247)
Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v05r02
Result: Pass
Receipt date: Nov. 01, 2023
Test Date: Nov. 13~ Dec. 01, 2023

Guangze Ding

Compiled By

(Guangze Ding)
Senior Test Engineer

Approved By

Line Chen
(Line Chen)
Engineer Manager



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of Fanguang Inspection & Testing Co., Ltd. Wuxi Branch

The test report must not be used by the client to claim product certifications, approval, or endorsement by NVLAP, NIST or any agency of U.S. Government.

Revision History

Report No.	Version	Description	Issue Date
S20231030848502	Rev. 01	/	12-14-2023

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope	6
1.2. Fangguang Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description	7
2.2. Product Specification Subjective to this Report	7
2.3. Operation Frequency / Channel List	7
2.4. Description of Available Antennas	8
2.5. Device Capabilities	9
2.6. Description of Test Software	10
2.7. Test Mode	19
2.8. Test Configuration	19
2.9. EMI Suppression Device(s)/Modifications	19
2.10. Labeling Requirements	19
3. DESCRIPTION OF TEST	20
3.1. Evaluation Procedure	20
3.2. AC Line Conducted Emissions	20
3.3. Radiated Emissions	21
4. ANTENNA REQUIREMENTS	22
5. TEST EQUIPMENT CALIBRATION DATE	23
6. MEASUREMENT UNCERTAINTY	24
7. TEST RESULT	25
7.1. Summary	25
7.2. 6dB Bandwidth Measurement	27
7.2.1. Test Limit	27
7.2.2. Test Procedure used	27
7.2.3. Test Setting	27
7.2.4. Test Setup	27
7.2.5. Test Result	28
7.3. Output Power Measurement	29
7.3.1. Test Limit	47

7.3.2.	Test Procedure Used	47
7.3.3.	Test Setting	47
7.3.4.	Test Setup	48
7.3.5.	Test Result	49
7.4.	Power Spectral Density Measurement	52
7.4.1.	Test Limit	62
7.4.2.	Test Procedure Used	62
7.4.3.	Test Setting	62
7.4.4.	Test Setup	63
7.4.5.	Test Result	64
7.5.	Conducted Band Edge and Out-of-Band Emissions	65
7.5.1.	Test Limit	75
7.5.2.	Test Procedure Used	75
7.5.3.	Test Setting	75
7.5.4.	Test Setup	75
7.5.5.	Test Result	76
7.6.	Radiated Spurious Emission Measurement	78
7.6.1.	Test Limit	111
7.6.2.	Test Procedure Used	111
7.6.3.	Test Setting	111
7.6.4.	Test Setup	113
7.6.5.	Test Result	115
7.7.	Restricted Band Edge Measurement	121
7.7.1.	Test Limit	121
7.7.2.	Test Procedure Used	122
7.7.3.	Test Setting	122
7.7.4.	Test Setup	123
7.7.5.	Test Result	124
7.8.	AC Conducted Emissions Measurement	126
7.8.1.	Test Limit	138
7.8.2.	Test Setup	138
7.8.3.	Test Result	138
8.	CONCLUSION	139

§2.1033 General Information

Applicant:	Shanghai MXCHIP Information Technology Co., Ltd
Applicant Address:	9th Floor, Building B, Lane 2145, Jinshajiang Road, Putuo District, Shanghai
Manufacturer:	Shanghai MXCHIP Information Technology Co., Ltd
Manufacturer Address:	9th Floor, Building B, Lane 2145, Jinshajiang Road, Putuo District, Shanghai
Factory:	Chengdu Xuguang Technology Co., Ltd
Factory Address:	No. 86, Section 2, Gongyuan Road, Longquanyi, Chengdu, Sichuan
Test Site:	Fanguang Inspection & Testing Co., Ltd.
LAB ID:	CN5037
Test Site Address:	G9 Building, China Sensor Network International Innovation Park No.200, Linghu Avenue Wuxi, Jiangsu 214000 China
FCC Rule Part(s):	Part 15 Subpart C (15.247)
FCC ID:	P53-EMC6069
Test Device Serial No.:	S/N:80F8930185C3 <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
FCC Classification:	Digital Transmission System (DTS)

1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2. Fanguang Test Location

These measurement tests were performed at the Fanguang Inspection and testing Co.,LTD located at 200 Linghu Avenue, Xinwu District, Wuxi City. The detailed description of the measurement facility was found to be in compliance with the requirements of ANSI C63.4-2014.

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	2.4GHz Wi-Fi/BLE Module
Model Name:	EMC6069-P
Trade Mark:	MXCHIP
Input Voltage Range:	DC 3.3V
Wi-Fi Specification:	802.11b/g/n20/n40/ax20/ax40

2.2. Product Specification Subjective to this Report

Frequency Range:	802.11b/g/n20/ax20: 2412 ~ 2462MHz 802.11n40/ax40:2422 ~ 2452MHz
Channel Number:	802.11b/g/n20/ax20: 11 802.11n40/ax40:7
Type of Modulation:	802.11b: DSSS 802.11g/n/ax: OFDM
Data Rate:	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: MCS0~MCS7 802.11ax: MCS0~MCS11
Antenna Type:	PCB antenna
Antenna Gain:	2dBi

2.3. Operation Frequency / Channel List

802.11b/g/n20/ax20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n40/ax40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

2.4. Description of Available Antennas

Antenna	Frequency Band (MHz)	Product Number	Tx Paths	Antenna
PCB antenna	2400 ~ 2500	/	1	Ant 1

Antenna	Frequency Band (MHz)	Tx Paths	Per Chain Max Antenna Gain (dBi)	Beam Forming Directional Gain (dBi)	CDD Directional Gain (dBi)
			Ant 1		
PCB antenna	2400 ~ 2500	1	2.0	NA	NA

Note:

Unequal Antenna gains, with equal transmit powers. For Antenna gains given by G_1, G_2, \dots, G_N dBi transmit signals are correlated, then

- Directional gain = $10 \cdot \log\left[\frac{(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2}{N_{ANT}}\right]$ dBi [Note the “20”s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

2.5. Device Capabilities

This device contains the following capabilities:


2.4GHz WLAN (DTS)

Note: 2.4GHz WLAN (DTS) operation is possible in 20MHz channel bandwidths. The maximum achievable duty cycle was determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles:

Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2412	8.38	8.47	98.94
		2437	8.39	8.48	98.94
		2462	8.39	8.48	98.94
11G	Ant1	2412	1.40	1.41	99.29
		2437	1.39	1.41	98.58
		2462	1.40	1.41	99.29
11N20SISO	Ant1	2412	0.16	0.17	94.12
		2437	0.16	0.17	94.12
		2462	1.30	1.32	98.48
11N40SISO	Ant1	2422	0.65	0.66	98.48
		2437	0.64	0.66	96.97
		2452	1.30	1.31	99.24
11AX20SISO	Ant1	2412	1.07	1.12	95.54
		2437	1.07	1.12	95.54
		2462	1.07	1.12	95.54
11AX40SISO	Ant1	2422	0.65	0.66	98.48
		2437	0.65	0.66	98.48
		2452	0.65	0.66	98.48

Test Graphs

11B_Ant1_2412

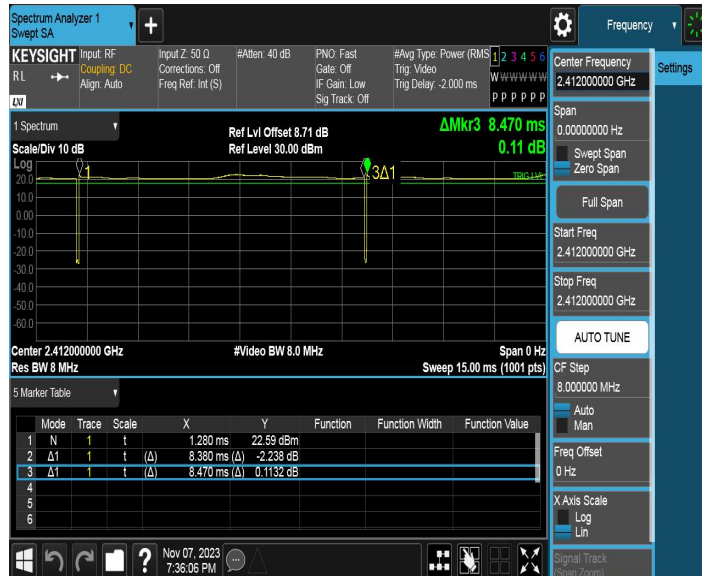


11B_Ant1_2437



11B_Ant1_2462




11G_Ant1_2412

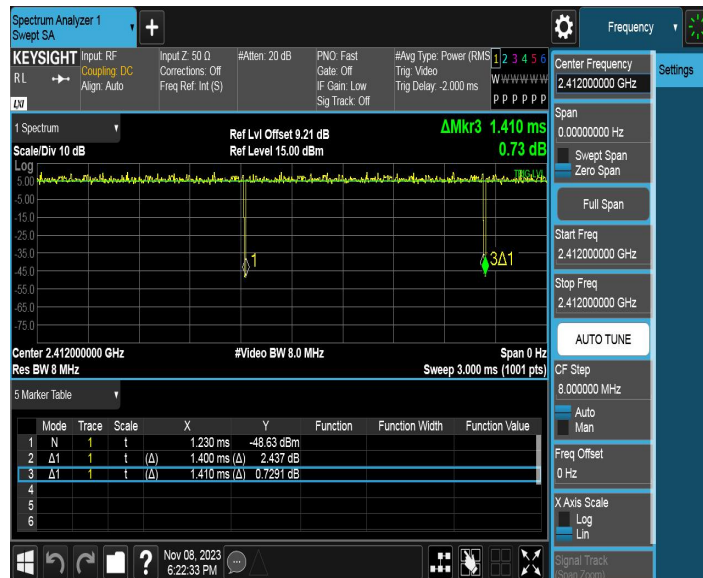


11G_Ant1_2437



11G_Ant1_2462

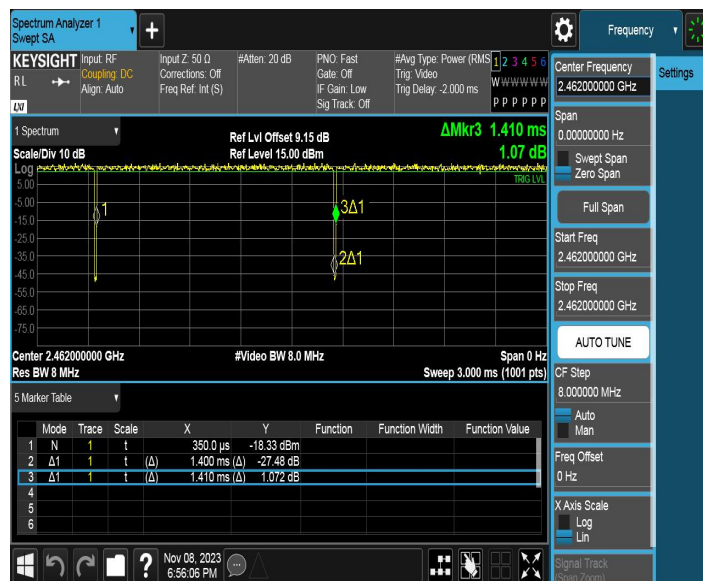


11N20SISO_Ant1_2412

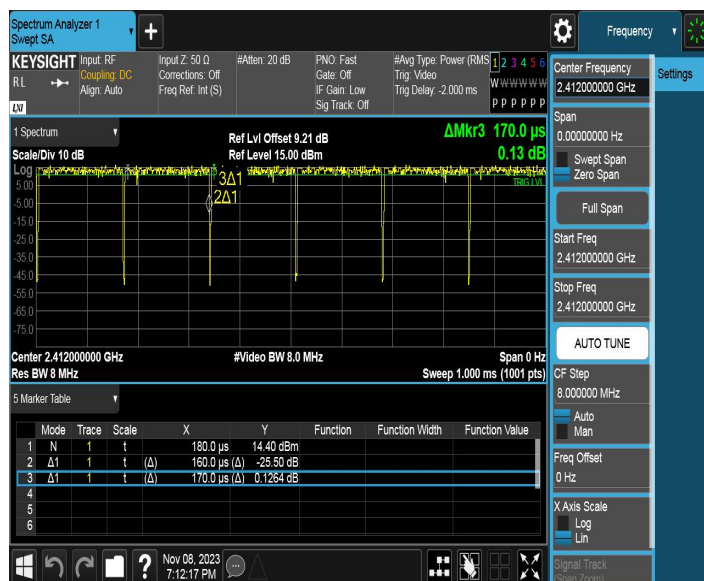


11N20SISO_Ant1_2437




11N20SISO_Ant1_2462

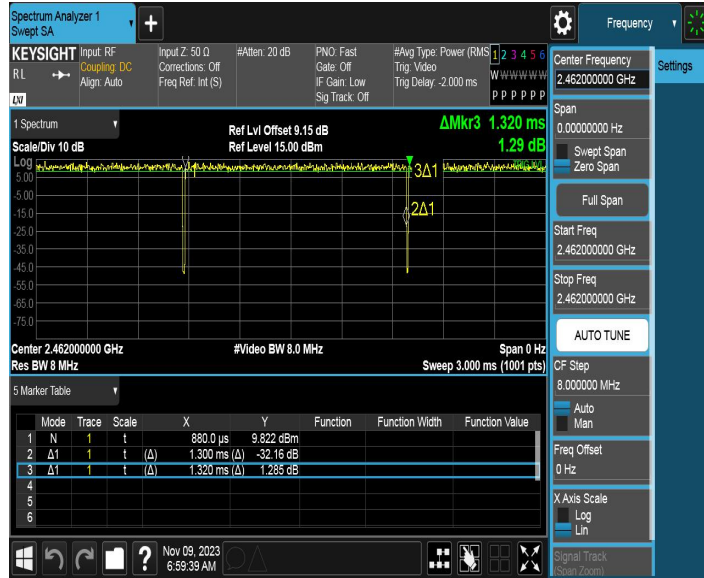


11N40SISO_Ant1_2422

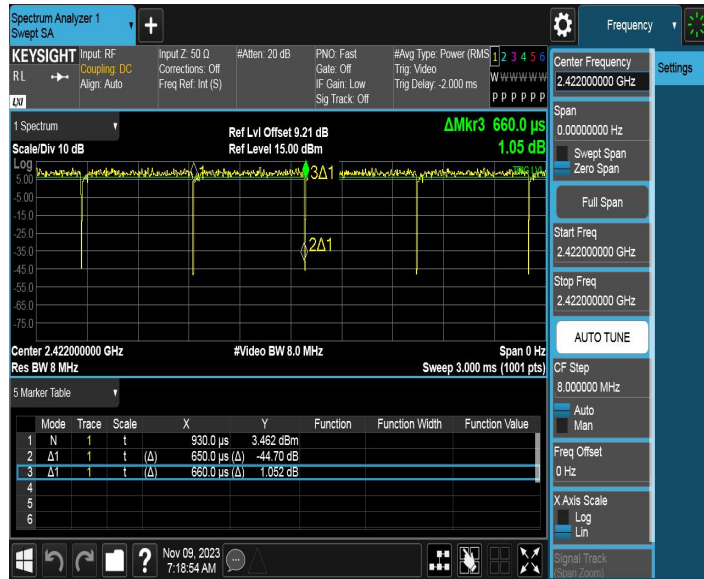

11N40SISO_Ant1_2437

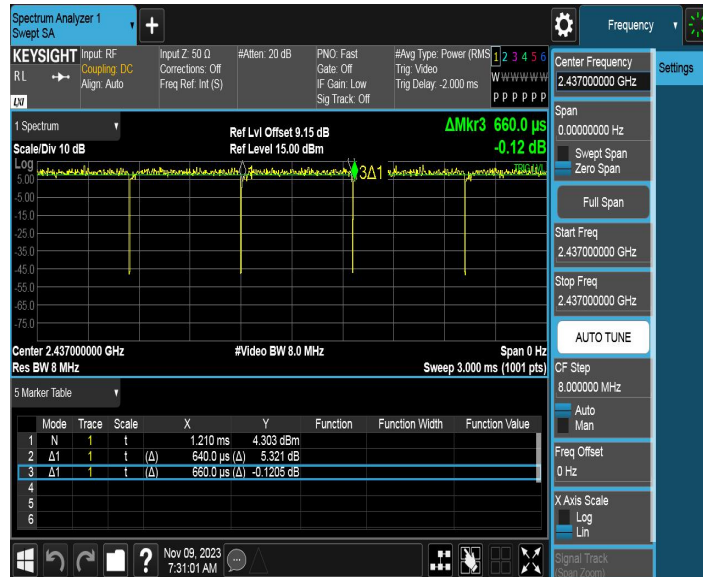


11N40SISO_Ant1_2452

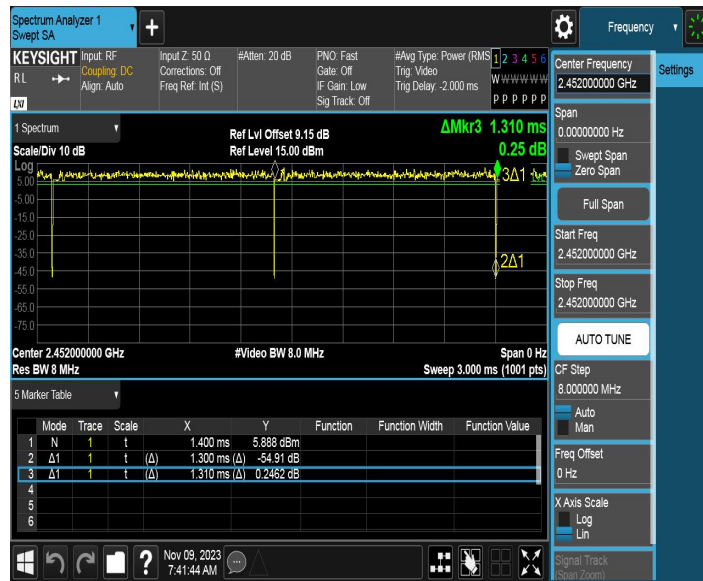

11AX20SISO_Ant1_2412




11AX20SISO_Ant1_2437

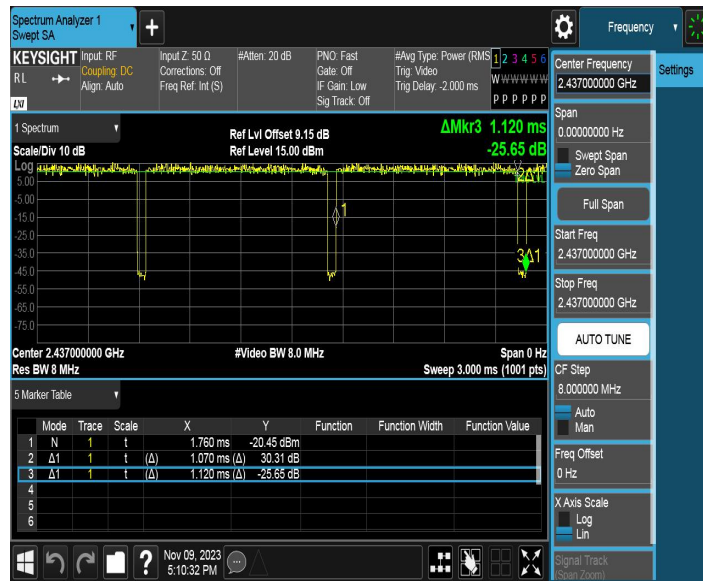


11AX20SISO_Ant1_2462




11AX40SISO_Ant1_2422

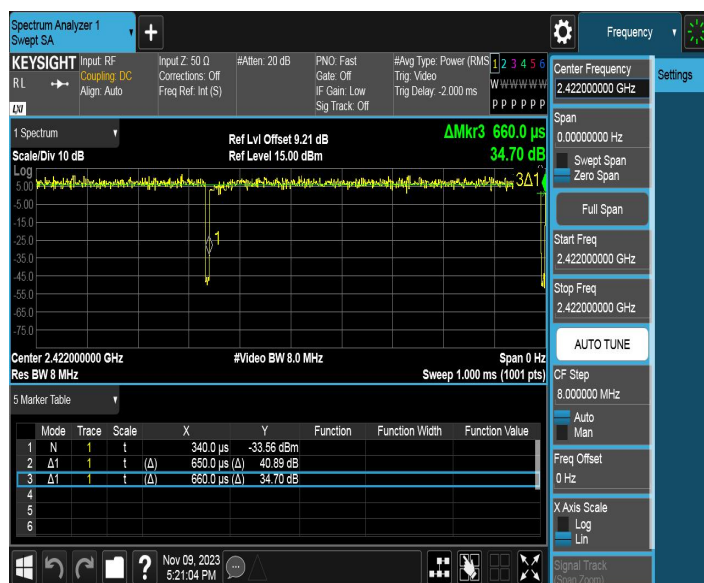

11AX40SISO_Ant1_2437

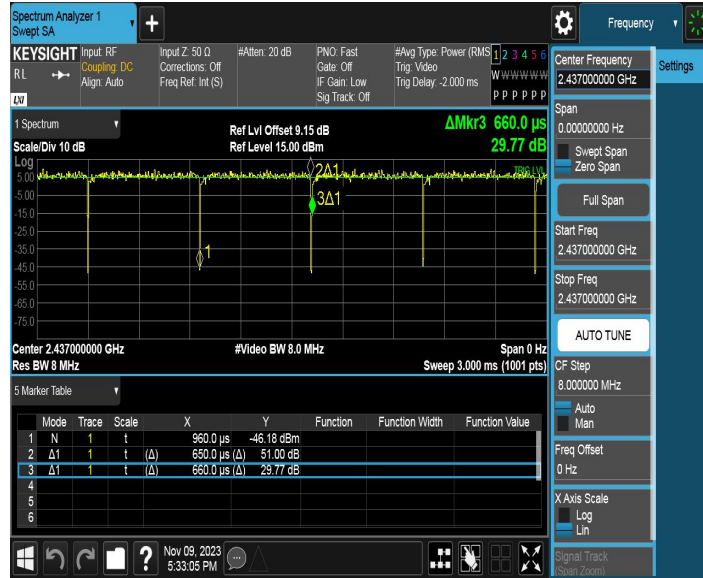

11AX40SISO_Ant1_2452

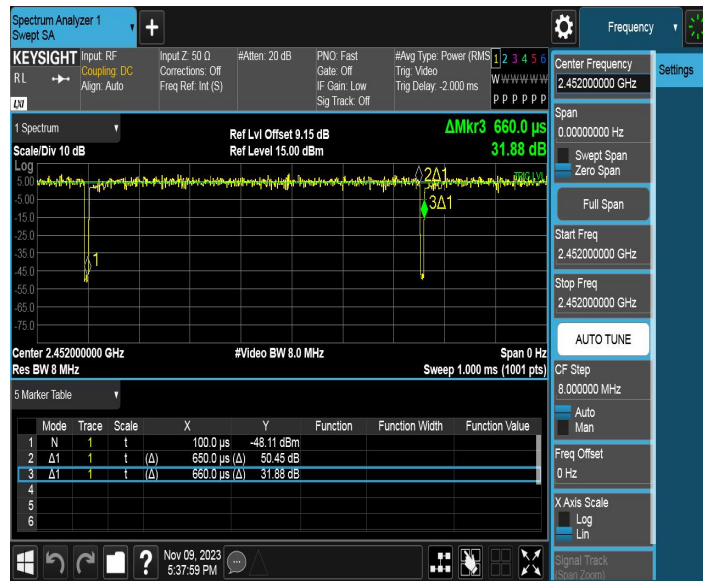

2.6. Description of Test Software

The test utility software used during testing was “Wifi_Test_Tool”, Power Parameter Value:

Test Mode	ANT1
B	29
G	60
N20	60
N40	60
AX20	60
AX40	60

2.7. Test Mode

Test Mode	Mode 1: Transmit by 802.11b
	Mode 2: Transmit by 802.11g
	Mode 3: Transmit by 802.11n20
	Mode 4: Transmit by 802.11n40
	Mode 5: Transmit by 802.11ax20
	Mode 6: Transmit by 802.11ax40

2.8. Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v05r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. The turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-25GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- Use a unique coupling to the intentional radiator.

5. TEST EQUIPMENT CALIBRATION DATE

Radiated Emission

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Loop Antenna	Schwarzbeck	FMZB 1519B	FWXGJC-2018-015	3 year	2024/08/13
Bi-Log Antenna	R&S	HL562E	FWXGJC-2016-267-06	1 year	2024/03/10
Broadband Horn Antenna	R&S	HF907	FWXGJC-2016-267-07	1 year	2024/03/02
Broadband Horn Antenna	Schwarzbeck	BBHA9170	FWXGJC-2018-016	3 year	2024/06/04
EMI Receiver	R&S	ESR26	FWXGJC-2016-267-01	1 year	2024/11/05
Pre-Amplifier	R&S	SCU-18D	FWXGJC-2016-267-05	1 year	2024/11/05
Pre-Amplifier	R&S	EMC184055 SE	FWXGJC-2018-018	3 year	2025/04/13
Thermohygrometer	Yuhuaze	HTC-1	FWXDA-2016-386	1 year	2024/11/21
Anechoic Chamber	Aimuke	EMCCT-3	FWXGJC-2016-270	3 year	2025/06/07

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Keysight	N9010B	FWXGJC-2018-010	1 year	2024/03/13
RF Control Unit	Toncend	JS0806-2	FWXGJC-2018-013	1 year	2024/05/14
Thermohygrometer	Yuhuaze	HTC-1	FWXDA-2016-385	1 year	2024/03/21

Test Software	Manufacturer	Version	Asset No.	Function
EMI Test Software	Toncend	V2.5.2.4	FWXWA-2018-004	Emission Test
RF Test Software	Toncend	3.3.10	/	/

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.05dB
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 30MHz-1GHz: 3.06dB 1GHz-12.75GHz: 4.13dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 30MHz-1GHz: 1.00 dB 1GHz-26.5GHz: 1.30 dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.60dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.80dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.20MHz

7. TEST RESULT

7.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.203	Antenna Requirement	/	/	Pass	Section 4
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 30\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Band Edge	$\geq 20\text{dBc}$		Pass	Section 7.5
15.247(d)	Out-of-Band Emissions	$\geq 20\text{dBc}$		Pass	Section 7.5
15.205	Restricted Bands	Emissions in restricted bands must meet the radiated limits detailed in 15.205		Pass	Section 7.7
15.209	General Field Strength Limits (Radiated Emission Limits)	Radiated Emission must meet the radiated limits detailed in 15.209 (RSS GEN [8.9])	Radiated	Pass	Section 7.6
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	AC Line Conducted	NA	Section 7.8

Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum permissible 6dB bandwidth is 500 kHz.

7.2.2. Test Procedure used


ANSI C63.10-2013 Section 11.8.2 Option 1

KDB 558074 D01 v05r02 – Section 8.2

7.2.3. Test Setting

1. Set RBW = 100 kHz
2. VBW $\geq 3 \times$ RBW
3. Detector = peak
4. Trace mode = max hold
5. Sweep = auto couple
6. Allow the trace was allowed to stabilize
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.2.4. Test Setup

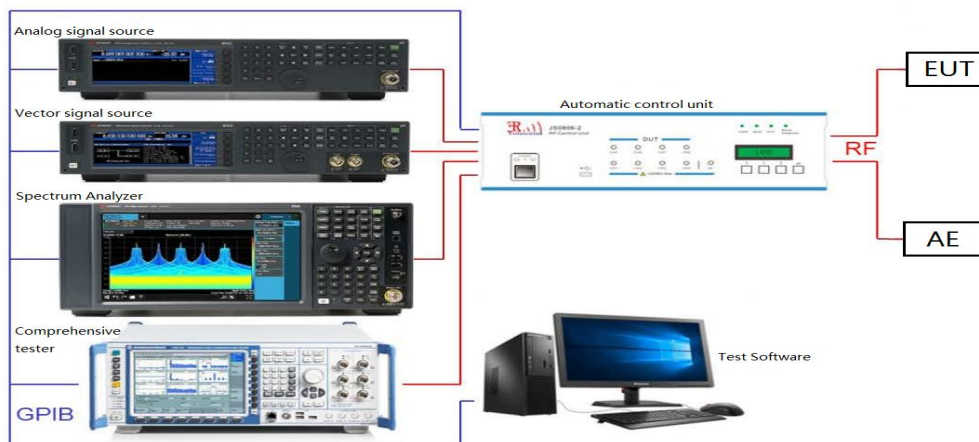

7.2.5. Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	99%BW	Verdict
11B	Ant1	2412	9.080	2407.480	2416.560	≥ 0.5	15.044	PASS
		2437	9.080	2432.480	2441.560	≥ 0.5	14.795	PASS
		2462	9.080	2457.480	2466.560	≥ 0.5	14.570	PASS
11G	Ant1	2412	15.120	2404.440	2419.560	≥ 0.5	16.610	PASS
		2437	15.120	2429.440	2444.560	≥ 0.5	16.270	PASS
		2462	15.120	2454.440	2469.560	≥ 0.5	16.263	PASS
11N20SISO	Ant1	2412	15.120	2404.440	2419.560	≥ 0.5	17.306	PASS
		2437	15.120	2429.440	2444.560	≥ 0.5	17.297	PASS
		2462	15.120	2454.440	2469.560	≥ 0.5	17.289	PASS
11N40SISO	Ant1	2422	35.040	2404.480	2439.520	≥ 0.5	36.134	PASS
		2437	33.760	2420.760	2454.520	≥ 0.5	35.925	PASS
		2452	35.040	2434.480	2469.520	≥ 0.5	36.034	PASS
11AX20SISO	Ant1	2412	15.120	2404.440	2419.560	≥ 0.5	18.150	PASS
		2437	15.120	2429.440	2444.560	≥ 0.5	18.205	PASS
		2462	15.120	2454.440	2469.560	≥ 0.5	18.200	PASS
11AX40SISO	Ant1	2422	35.040	2404.480	2439.520	≥ 0.5	36.095	PASS
		2437	35.040	2419.480	2454.520	≥ 0.5	36.046	PASS
		2452	35.040	2434.480	2469.520	≥ 0.5	35.990	PASS

Test Graphs of 6dB Bandwidth

11B_Ant1_2412



11B_Ant1_2437



11B_Ant1_2462



11G_Ant1_2412



11G_Ant1_2437



11G_Ant1_2462



11N20SISO_Ant1_2412



11N20SISO_Ant1_2437



11N20SISO_Ant1_2462



11N40SISO_Ant1_2422



11N40SISO_Ant1_2437



11N40SISO_Ant1_2452



11AX20SISO_Ant1_2412



11AX20SISO_Ant1_2437



11AX20SISO_Ant1_2462