

Application for FCC Certificate
On Behalf of
Shanghai Kuohan Electronic Co., Ltd.

Electronic Energy Saving Lamp

Model No.: KFE-S11W
KFE-S15W
KEF-S20W
KFE-S24W
KFE-C24W

FCC ID : P58KFEKHSM

Prepared For : Shanghai Kuohan Electronic Co., Ltd.
No.5 Weijie Road, Qiao Long Chun, Sun Qiao Town,
Pu Dong Shanghai, China

Prepared By : Audix Technology (Shanghai) Co., Ltd.
3F 34Bldg 680 Guiping Rd,
Caohejing Hi-Tech Park,
Shanghai, China 200233

Tel: +86-21-64955500
Fax: +86-21-64955491

Report No. : ACI-F01102
Date of Test : Dec 05 - 07, 2001
Date of Report : Dec 12, 2001

TABLE OF CONTENTS

	Page
1 GENERAL INFORMATION.....	4
1.1 Description of Equipment Under Test.....	4
1.2 Description of Test Facility.....	5
1.3 Measurement Uncertainty.....	5
2 AC POWERLINE CONDUCTED EMISSION TEST	6
2.1 Test Equipment.....	6
2.2 Block Diagram of Test Setup.....	6
2.3 Conducted Emission Limits.....	6
2.4 Test Configuration.....	7
2.5 Operating Condition of EUT.....	7
2.6 Test Procedures.....	7
2.7 Test Results.....	8
3 FIELD STRENGTH TEST	13
3.1 Test Equipment.....	13
3.2 Block Diagram of Test Setup.....	13
3.3 Test Configuration.....	13
3.4 Operating Condition of EUT.....	13
3.5 Test Procedure.....	14
3.6 Test Result.....	14

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test

Description : Electronic Energy Saving Lamp

Type of EUT : Production Pre-product Pro-type

Model Number : KFE-S11W
KFE-S15W
KEF-S20W
KFE-S24W
KFE-C24W
KFE-S24W and KFE-C24W only have different appearance.

Applicant : Shanghai Kuohan Electronic Co., Ltd.
No.5 Weijie Road, Qiao Nong Village Sun Qiao Town,
Pu Dong Shanghai, China

Manufacturer : The Shanghai SanMin Electronic Plant
No.100 Qing Yun Road, Pudong, Shanghai, China

M/N	Apparent Power (VA)	Real Power (W)
KFE-S11W	20.8	10.9
KFE-S15W	26.1	14.1
KFE-S20W	32.7	19.2
KFE-S24W	42.7	23.2
KFE-C24W	38.7	22.0

1.2 Description of Test Facility

Site Description : Sept. 17, 1998 file on
(Semi-Anechoic Chamber) Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046, USA

Name of Firm : Audix Technology (Shanghai) Co., Ltd.

Site Location : 3 F 34 Bldg 680 Guiping Rd,
Caohejing Hi-Tech Park,
Shanghai, China 200233

NVLAP Lab Code : 200371-0

1.3 Measurement Uncertainty

Conducted Emission Uncertainty : $U = \pm 2.66$ dB


2 AC POWERLINE CONDUCTED EMISSION TEST

2.1 Test Equipment

The following test equipment are used during the powerline conducted emission test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	844077/020	Apr 24, 2001	1 Year
2.	Line Impedance Stabilization Network (LISN)	Kyoritsu	KNW-407	8-1280-5	May 08, 2001	1 Year

2.2 Block Diagram of Test Setup

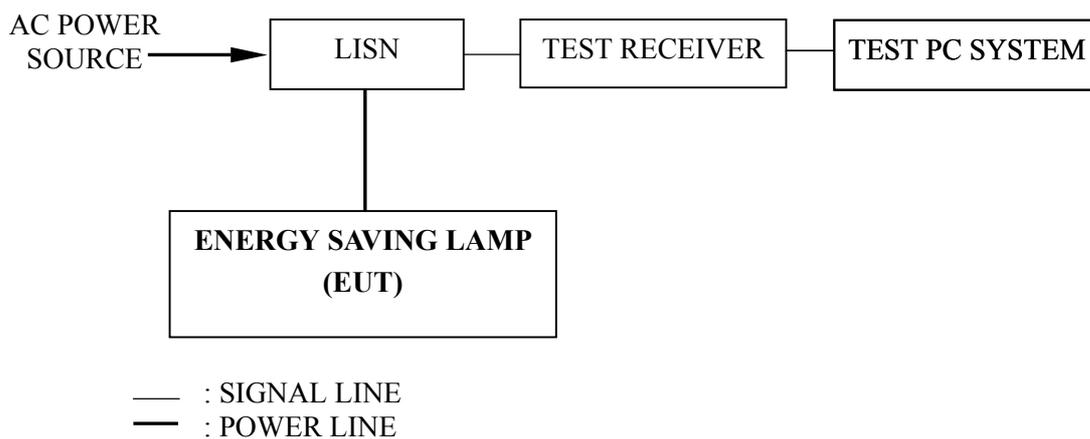

2.3 Conducted Emission Limits

Frequency (MHz)	Maximum RF Line Voltage	
	(μ V)	dB(μ V)
0.45 ~ 2.51	250	48
2.51 ~ 3	3000	70
3 ~ 30	250	48

NOTE 1 – RF Line Voltage dB(μ V) = 20 log RF Line Voltage (μ V)
 NOTE 2 – The tighter limits shall apply at the boundary between two frequency ranges

2.4 Test Configuration

The EUT (listed in Sec.1.1) was installed as shown on Sec.2.2 to meet FCC requirement and operating in a manner which tends to maximize its emission level in a normal application.

2.5 Operating Condition of EUT

The EUT was connected to the power mains through a Line Impedance Stabilization Network (LISN). This provided a 50 ohm coupling impedance for the measuring equipment.

Both sides of AC line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed or manipulated according to MP-5/1986 during conducted emission test.

The IF bandwidth of Test Receiver ESHS10 was set at 10 kHz.

The frequency range from 450 kHz to 30 MHz was checked.

The test mode (ON) was done on conducted emission test and the test results of the highest emissions are listed in Sec.2.7.

2.6 Test Procedures

- 2.6.1 Setup the EUT as shown in Sec.2.2.
- 2.6.2 Turn on the power of all equipment.
- 2.6.3 The EUT will be operated normally.

2.7 Test Results

< PASS >

The frequency and amplitude of the highest AC powerline conducted emissions relative to the limit is reported. All emissions not reported below are too low against the prescribed limits.

EUT : Electronic Energy Saving Lamp Temperature : 23°C

Model No. : KFE-S11W Humidity : 56%

Test Mode : ON Date of Test : Dec 05, 2001

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(μV)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.475	0.06	37.68	37.74	48.00	10.26
	0.530	0.05	38.47	38.52	48.00	9.48
	0.581	0.05	34.12	34.17	48.00	13.83
	0.714	0.03	30.34	30.37	48.00	17.63
	1.110	0.05	31.15	31.20	48.00	16.80
	1.197	0.05	31.31	31.36	48.00	16.64
VB	0.477	0.09	40.37	40.46	48.00	7.54
	0.530	0.09	40.11	40.42	48.00	7.80
	0.584	0.09	37.75	37.84	48.00	10.16
	0.946	0.08	33.62	33.70	48.00	14.30
	0.987	0.08	33.79	33.87	48.00	14.13
	1.110	0.08	33.05	33.13	48.00	14.87

NOTE 1 – Emission Level = Meter Reading + Factor

NOTE 2 – Factor = Insertion Loss + Cable Loss

NOTE 3 – All reading are Quasi-Peak Values.

NOTE 4 – The worst emission is detected at 0.477 MHz with corrected signal level of 40.46 dB(μV) (limit is 48.00 dB(μV)), when the VB of the EUT is connected to LISN.

TEST ENGINEER: ADA ZOU

EUT : Electronic Energy Saving Lamp Temperature : 23°C

Model No. : KFE-S15W Humidity : 56%

Test Mode : ON Date of Test : Dec 05, 2001

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading DB(μ V)	Emission Level dB(μ V)	Limits dB(μ V)	Margin (dB)
VA	0.452	0.07	42.02	42.09	48.00	5.91
	0.510	0.06	40.27	40.33	48.00	7.67
	0.567	0.05	38.67	38.72	48.00	9.28
	0.622	0.04	36.10	36.14	48.00	11.86
	0.679	0.03	34.13	34.16	48.00	13.84
	1.275	0.05	31.71	31.76	48.00	16.24
VB	0.454	0.10	43.38	43.48	48.00	4.52
	0.510	0.09	41.71	41.80	48.00	6.20
	0.567	0.09	40.80	40.89	48.00	7.11
	0.627	0.08	38.44	38.52	48.00	9.48
	0.685	0.08	36.91	36.99	48.00	11.01
	0.979	0.08	33.60	33.68	48.00	14.32
<p>NOTE 1 – Emission Level = Meter Reading + Factor NOTE 2 – Factor = Insertion Loss + Cable Loss NOTE 3 – All reading are Quasi-Peak Values. NOTE 4 – The worst emission is detected at 0.454 MHz with corrected signal level of 43.48 dB(μV) (limit is 48.00 dB(μV)), when the VB of the EUT is connected to LISN.</p>						

TEST ENGINEER: Ada Zou
(ADA ZOU)

EUT : Electronic Energy Saving Lamp Temperature : 23°C

Model No. : KFE-S20W Humidity : 56%

Test Mode : ON Date of Test : Dec 05, 2001

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(μ V)	Emission Level dB(μ V)	Limits dB(μ V)	Margin (dB)
VA	0.454	0.07	44.47	44.54	48.00	3.46
	0.513	0.06	42.56	42.62	48.00	5.38
	0.579	0.05	40.92	40.97	48.00	7.03
	0.702	0.03	35.15	35.18	48.00	12.82
	0.966	0.05	33.16	33.21	48.00	14.79
	1.073	0.05	32.86	32.91	48.00	15.09
VB	0.452	0.10	44.00	44.10	48.00	3.90
	0.489	0.09	41.87	41.96	48.00	6.04
	0.562	0.09	42.58	42.67	48.00	5.33
	0.685	0.08	37.39	37.47	48.00	10.53
	0.995	0.08	33.53	33.61	48.00	14.39
	1.280	0.09	33.36	33.45	48.00	14.55
<p>NOTE 1 – Emission Level = Meter Reading + Factor NOTE 2 – Factor = Insertion Loss + Cable Loss NOTE 3 – All reading are Quasi-Peak Values. NOTE 4 – The worst emission is detected at 0.454 MHz with corrected signal level of 44.54 dB(μV) (limit is 48.00 dB(μV)), when the VA of the EUT is connected to LISN.</p>						

TEST ENGINEER: Ada Zou
(ADA ZOU)

EUT : Electronic Energy Saving Lamp Temperature : 23°C

Model No. : KFE-S24W Humidity : 56%

Test Mode : ON Date of Test : Dec 05, 2001

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(μ V)	Emission Level dB(μ V)	Limits dB(μ V)	Margin (dB)
VA	0.475	0.06	43.05	43.11	48.00	4.89
	0.609	0.04	39.82	39.86	48.00	8.14
	0.679	0.03	35.87	35.90	48.00	12.10
	0.919	0.05	36.42	36.47	48.00	11.53
	1.025	0.05	36.23	36.28	48.00	11.72
	1.153	0.05	35.12	35.17	48.00	12.83
VB	0.487	0.09	43.57	43.66	48.00	4.34
	0.627	0.08	39.82	39.90	48.00	8.10
	0.814	0.08	34.49	34.57	48.00	13.43
	0.950	0.08	36.04	36.12	48.00	11.88
	1.064	0.08	34.93	35.01	48.00	12.99
	1.202	0.09	33.67	33.76	48.00	14.24
<p>NOTE 1 – Emission Level = Meter Reading + Factor NOTE 2 – Factor = Insertion Loss + Cable Loss NOTE 3 – All reading are Quasi-Peak Values. NOTE 4 – The worst emission is detected at 0.487 MHz with corrected signal level of 43.66 dB(μV) (limit is 48.00 dB(μV)), when the VB of the EUT is connected to LISN.</p>						

TEST ENGINEER: Ada Zou
(ADA ZOU)

EUT : Electronic Energy Saving Lamp Temperature : 23°C

Model No. : KFE-C24W Humidity : 56%

Test Mode : ON Date of Test : Dec 07, 2001

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(μ V)	Emission Level dB(μ V)	Limits dB(μ V)	Margin (dB)
VA	0.454	0.07	42.50	42.57	48.00	5.43
	0.519	0.06	45.33	45.39	48.00	2.61
	0.584	0.05	42.14	42.19	48.00	5.81
	0.657	0.04	42.23	42.27	48.00	5.73
	0.723	0.03	41.04	41.07	48.00	6.93
	0.793	0.04	40.00	40.04	48.00	7.96
VB	0.515	0.09	45.60	45.69	48.00	2.31
	0.548	0.09	43.38	43.47	48.00	4.53
	0.648	0.08	44.65	44.73	48.00	3.27
	0.720	0.08	42.94	43.02	48.00	4.98
	0.783	0.08	42.73	42.81	48.00	5.19
	0.856	0.08	43.26	43.34	48.00	4.66
<p>NOTE 1 – Emission Level = Meter Reading + Factor</p> <p>NOTE 2 – Factor = Insertion Loss + Cable Loss</p> <p>NOTE 3 – All reading are Quasi-Peak Values.</p> <p>NOTE 4 – The worst emission is detected at 0.515 MHz with corrected signal level of 45.69 dB(μV) (limit is 48.00 dB(μV)), when the VB of the EUT is connected to LISN.</p> <p>NOTE 5 – At the frequency 0.515 MHz, 0.519MHz the measured result is below the specification limit by a margin less than the measurement uncertainty, it is not therefore possible to determine compliance at a level of confidence of 95%. However, the measured result indicates a higher probability that the product tested complies with the specification limit.</p>						

TEST ENGINEER: Ada Zou
(ADA ZOU)


3 FIELD STRENGTH TEST

3.1 Test Equipment

The following test equipment are used during the field strength test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Loop Antenna	Laplace	RF300	5001	Oct 25, 2001	1/2 Year
2.	Test Receiver	Rohde & Schwarz	ESHS10	844077/020	Apr 24, 2001	1 Year

3.2 Block Diagram of Test Setup

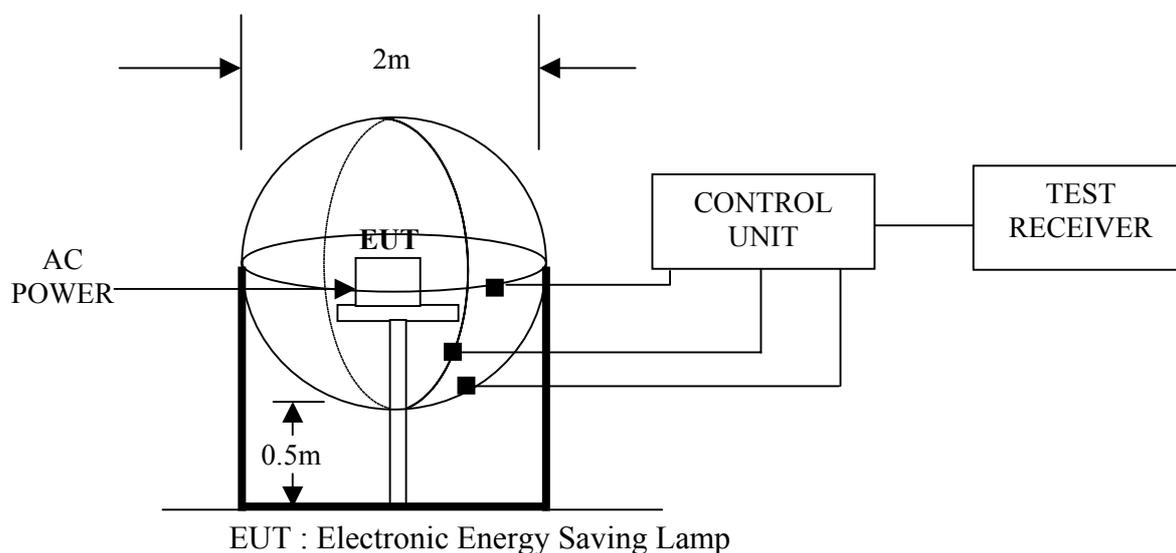

3.3 Test Configuration

The configuration of the EUT is same as those used in conducted emission test.

Refer to Sec.2.4.

3.4 Operating Condition of EUT

Same as conducted emission test which is listed in Sec.2.5, except the test setup replaced by Sec.3.2.

3.5 Test Procedure

The EUT was placed on a wooden table, which is in the center of the loop antenna. The loop antenna is 0.5 meters above the ground. Each side had one sensor. The three sensors were through the control unit to connect the Test receiver, which receiving the emission and find out the maximum emission of each side of the loop antenna.

The IF bandwidth of R&S Test Receiver ESHS10 was set at 200 Hz from 9kHz to 150kHz and 10kHz from 150 kHz to 30 MHz.

The frequency range from 9 kHz to 30 MHz was checked.

The test mode (ON) was done on field strength test and all the test results are listed in Sec.3.6.

3.6 Test Result

< **PASS** >


Refer to the following pages.



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@8848.net

Data#: 52 File#: D:\EMIVM\TEST\K\kuohan.EMI Date: 2001-12-05 Time: 17:40:01

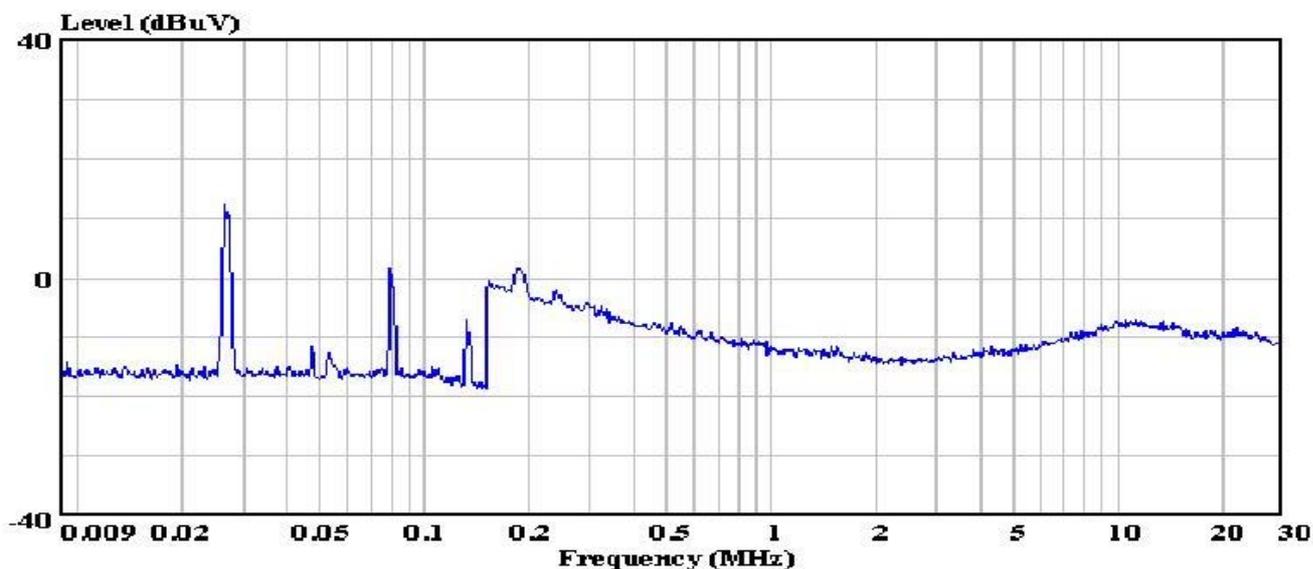


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000145
Applicant : Shanghai Kuohan Electronic Co., Ltd.
EUT : Electronic Energy Saving Lamp
M/N : KFE-S11W
S/N : E120511
Power Supply : 120V/60Hz
Ambient : 23°C 56%RH
Test line : A
Test Mode : on
Test Engineer: Ada



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@8848.net

Data#: 49 File#: D:\EMIVM\TEST\K\kuohan.EMI Date: 2001-12-05 Time: 17:33:22

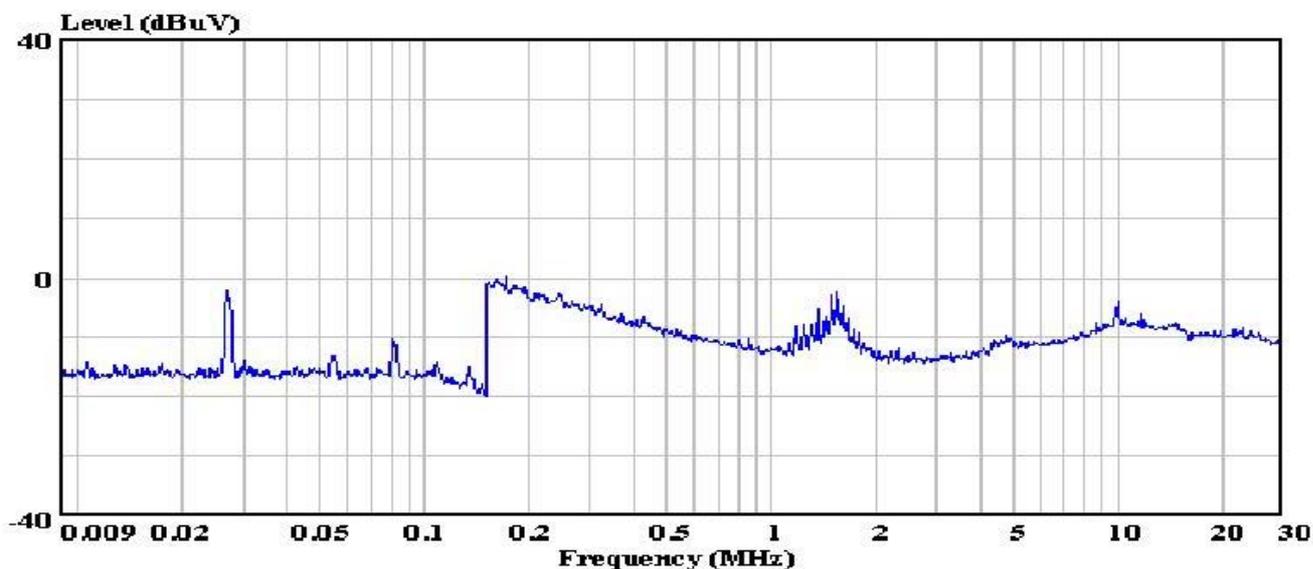


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000145
Applicant : Shanghai Kuohan Electronic Co., Ltd.
EUT : Electronic Energy Saving Lamp
M/N : KFE-S11W
S/N : E120511
Power Supply : 120V/60Hz
Ambient : 23°C 56%RH
Test line : B
Test Mode : on
Test Engineer: Ada



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@8848.net

Data#: 46 File#: D:\EMIVM\TEST\K\kuohan.EMI Date: 2001-12-05 Time: 17:28:20

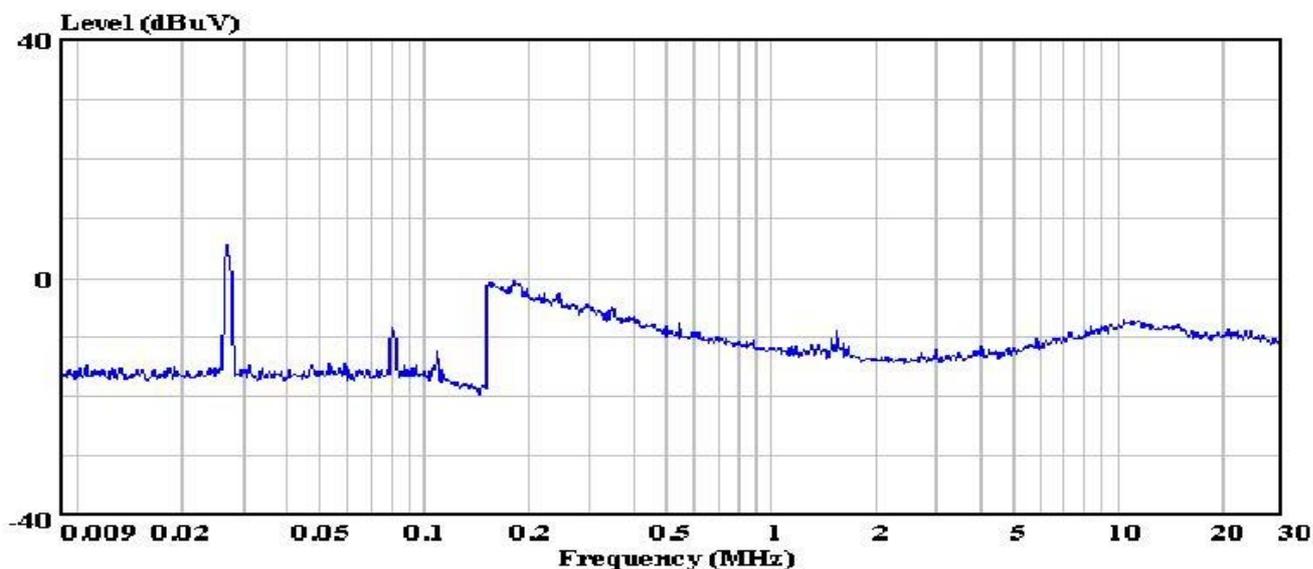


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000145
Applicant : Shanghai Kuohan Electronic Co., Ltd.
EUT : Electronic Energy Saving Lamp
M/N : KFE-S11W
S/N : E120511
Power Supply : 120V/60Hz
Ambient : 23°C 56%RH
Test line : C
Test Mode : on
Test Engineer: Ada



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@8848.net

Data#: 37 File#: D:\EMIVM\TEST\K\kuohan.EMI Date: 2001-12-05 Time: 16:48:09

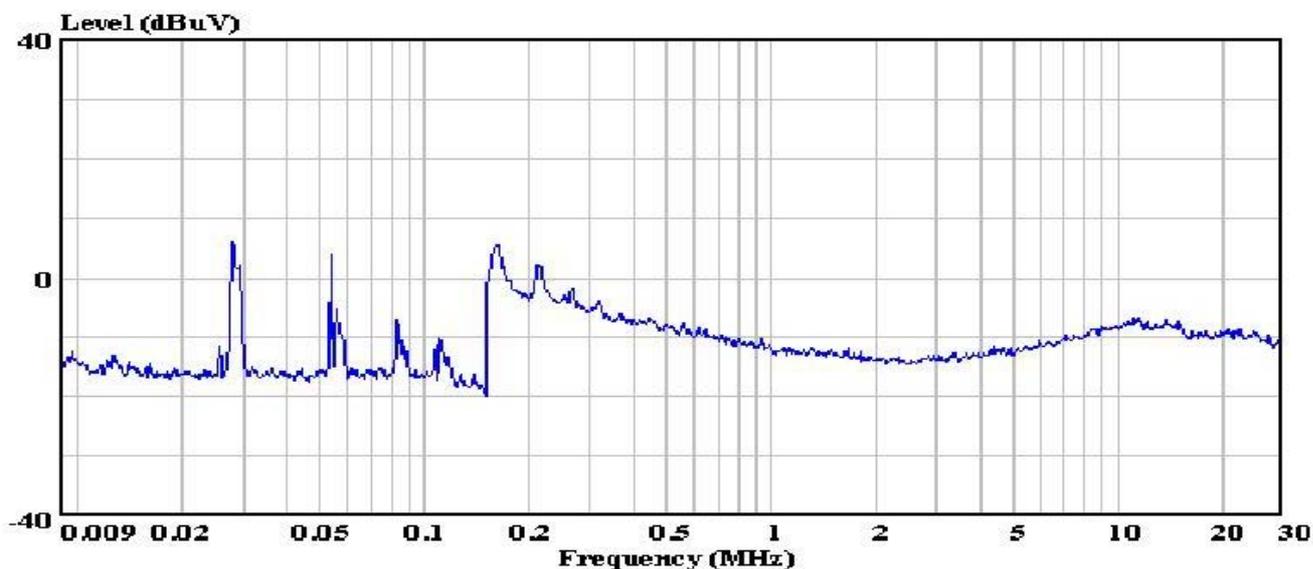


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000145
Applicant : Shanghai Kuohan Electronic Co., Ltd.
EUT : Electronic Energy Saving Lamp
M/N : KFE-S15W
S/N : E120515
Power Supply : 120V/60Hz
Ambient : 23°C 56%RH
Test line : A
Test Mode : on
Test Engineer: Ada



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@88848.net

Data#: 40 File#: D:\EMIVM\TEST\K\kuohan.EMI Date: 2001-12-05 Time: 17:15:01

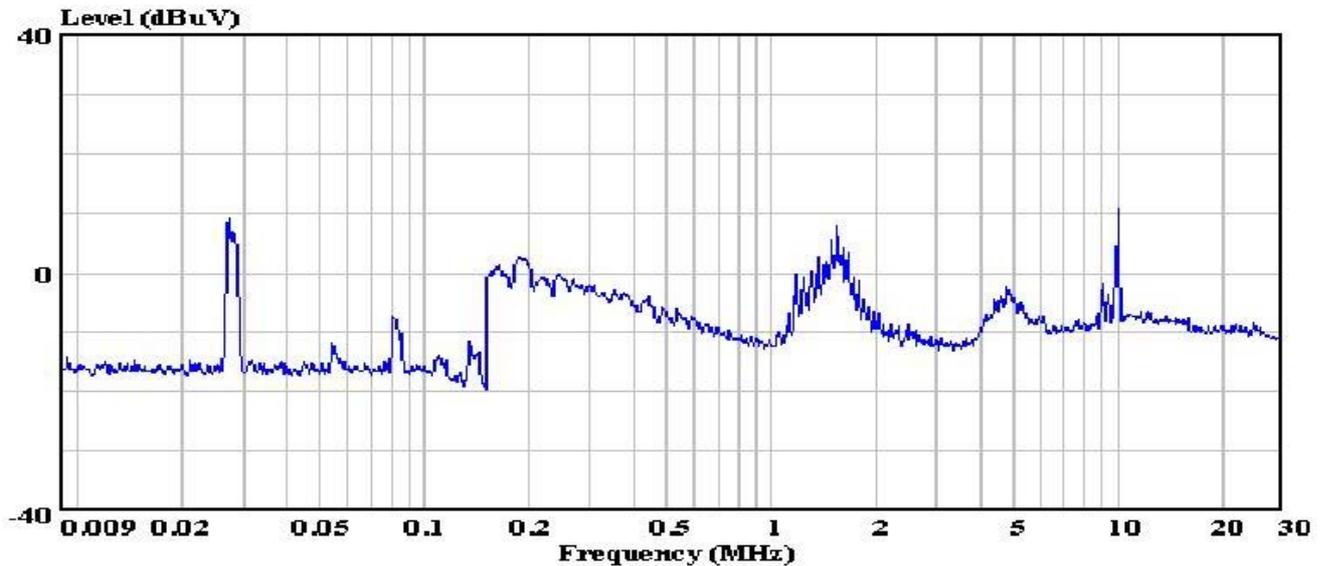


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000145
Applicant : Shanghai Kuohan Electronic Co., Ltd.
EUT : Electronic Energy Saving Lamp
M/N : KFE-S15W
S/N : E120515
Power Supply : 120V/60Hz
Ambient : 23°C 56%RH
Test line : B
Test Mode : on
Test Engineer: Ada



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@8848.net

Data#: 43 File#: D:\EMIVM\TEST\K\kuohan.EMI Date: 2001-12-05 Time: 17:22:56

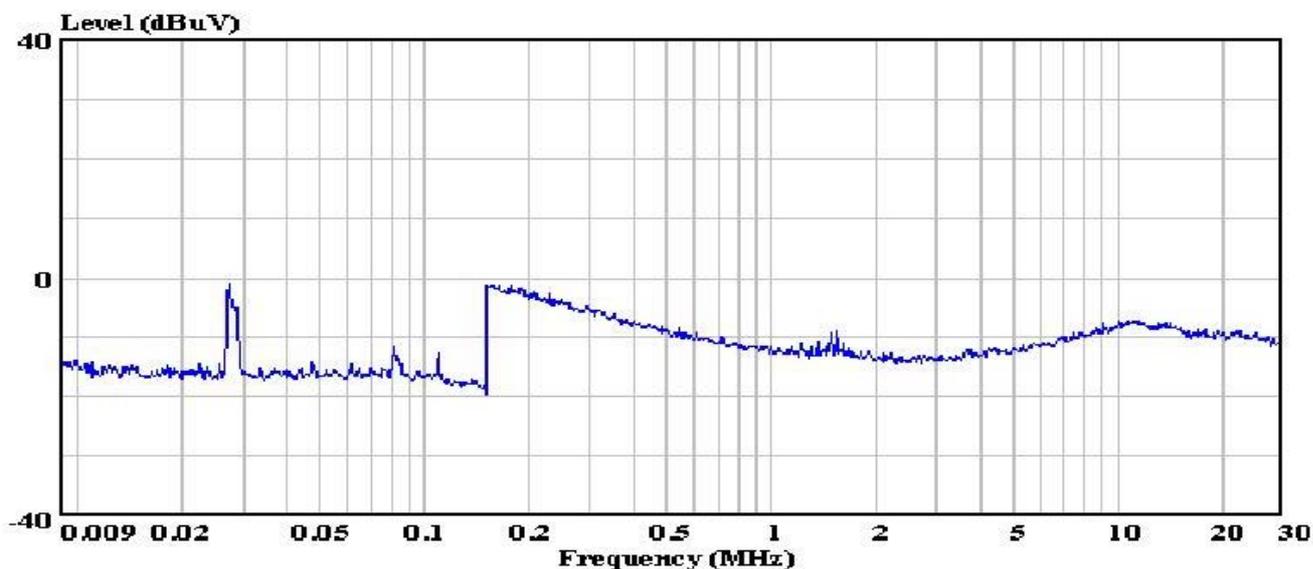


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000145
Applicant : Shanghai Kuohan Electronic Co., Ltd.
EUT : Electronic Energy Saving Lamp
M/N : KFE-S15W
S/N : E120515
Power Supply : 120V/60Hz
Ambient : 23°C 56%RH
Test line : C
Test Mode : on
Test Engineer: Ada



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@8848.net

Data#: 34 File#: D:\EMIVM\TEST\K\kuohan.EMI Date: 2001-12-05 Time: 16:39:26

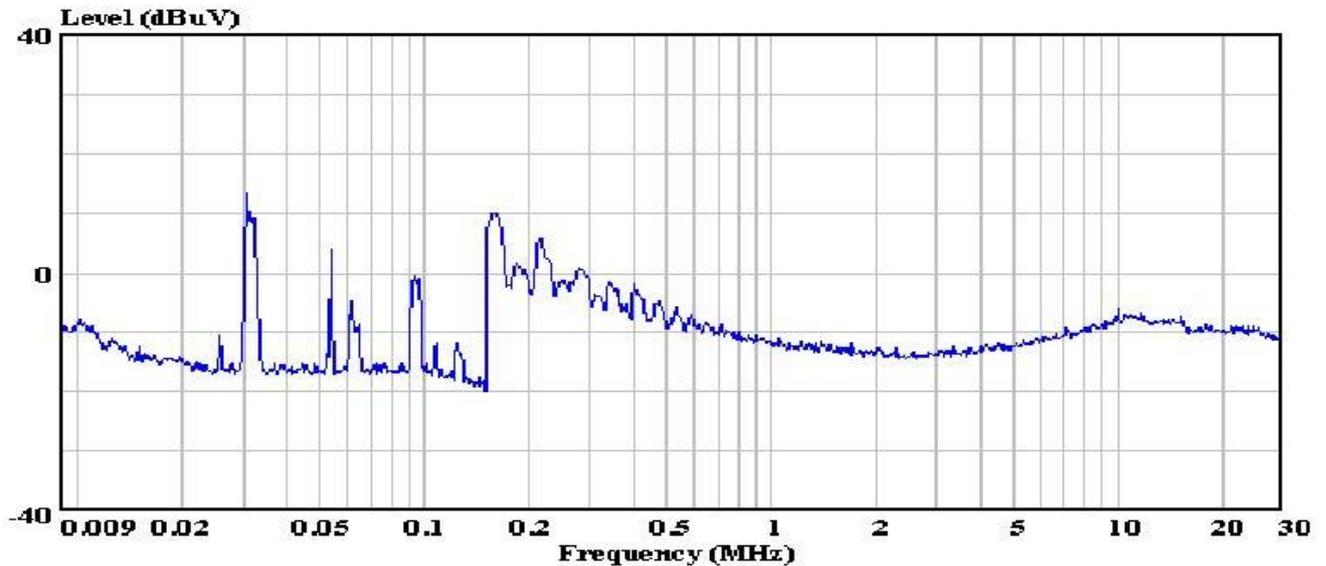


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000145
Applicant : Shanghai Kuohan Electronic Co., Ltd.
EUT : Electronic Energy Saving Lamp
M/N : KFE-S20W
S/N : E120520
Power Supply : 120V/60Hz
Ambient : 23°C 56%RH
Test line : A
Test Mode : on
Test Engineer: Ada



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@8848.net

Data#: 31 File#: D:\EMIVM\TEST\K\kuohan.EMI Date: 2001-12-05 Time: 16:34:57

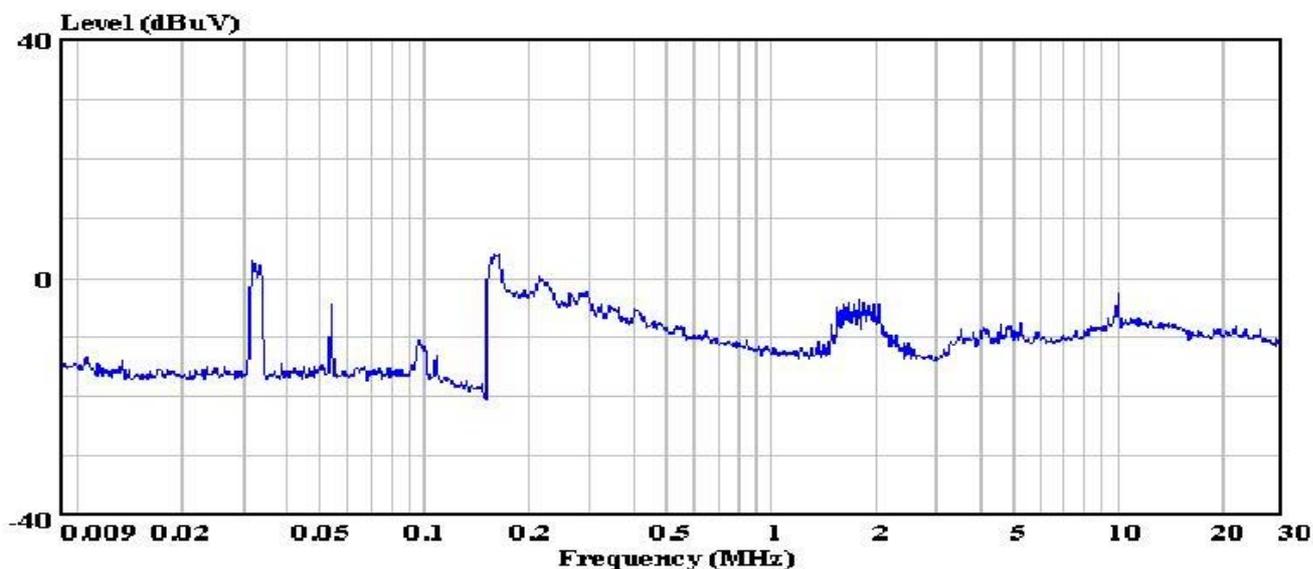


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000145
Applicant : Shanghai Kuohan Electronic Co., Ltd.
EUT : Electronic Energy Saving Lamp
M/N : KFE-S20W
S/N : E120520
Power Supply : 120V/60Hz
Ambient : 23°C 56%RH
Test line : B
Test Mode : on
Test Engineer: Ada



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@8848.net

Data#: 28 File#: D:\EMIVM\TEST\K\kuohan.EMI Date: 2001-12-05 Time: 16:30:09

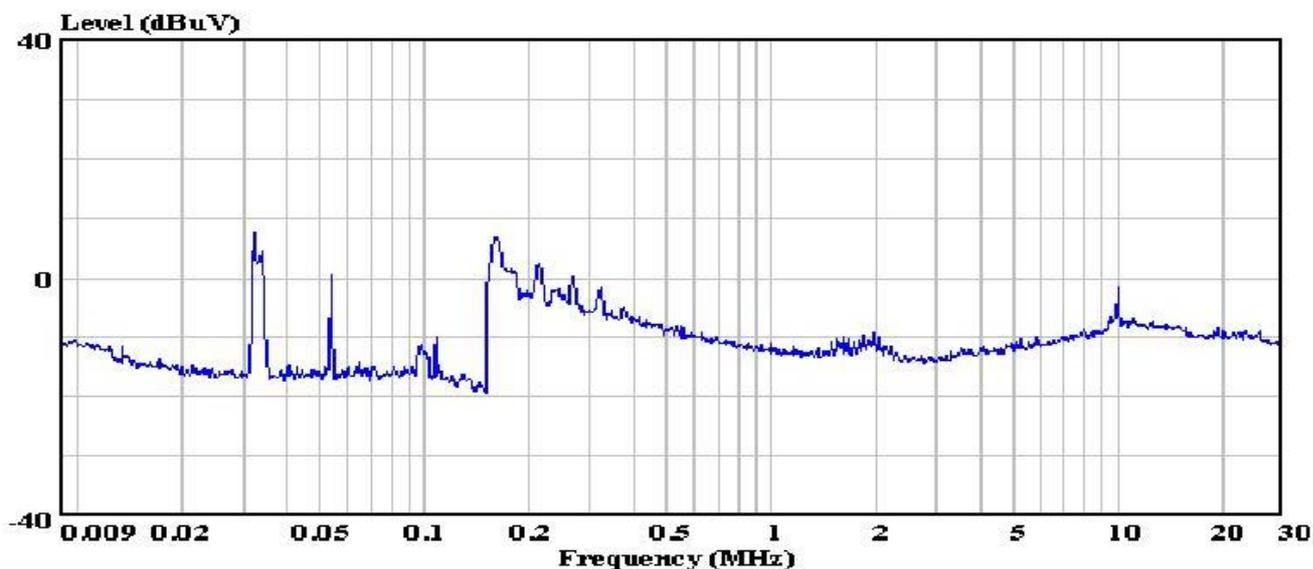


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000145
Applicant : Shanghai Kuohan Electronic Co., Ltd.
EUT : Electronic Energy Saving Lamp
M/N : KFE-S20W
S/N : E120520
Power Supply : 120V/60Hz
Ambient : 23°C 56%RH
Test line : C
Test Mode : on
Test Engineer: Ada



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@8848.net

Data#: 19 File#: D:\EMIVM\TEST\K\kuohan.EMI Date: 2001-12-05 Time: 16:03:16

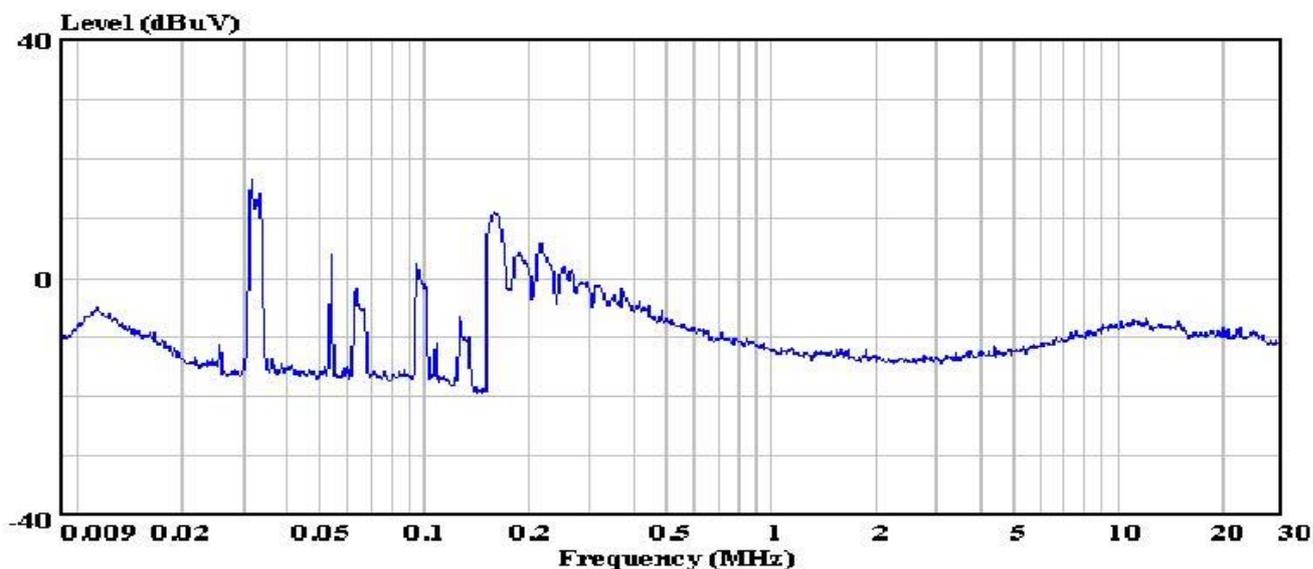


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000145
Applicant : Shanghai Kuohan Electronic Co., Ltd.
EUT : Electronic Energy Saving Lamp
M/N : KFE-S24W
S/N : E120524
Power Supply : 120V/60Hz
Ambient : 23°C 56%RH
Test line : A
Test Mode : on
Test Engineer: Ada



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@8848.net

Data#: 22 File#: D:\EMIVM\TEST\K\kuohan.EMI Date: 2001-12-05 Time: 16:16:36

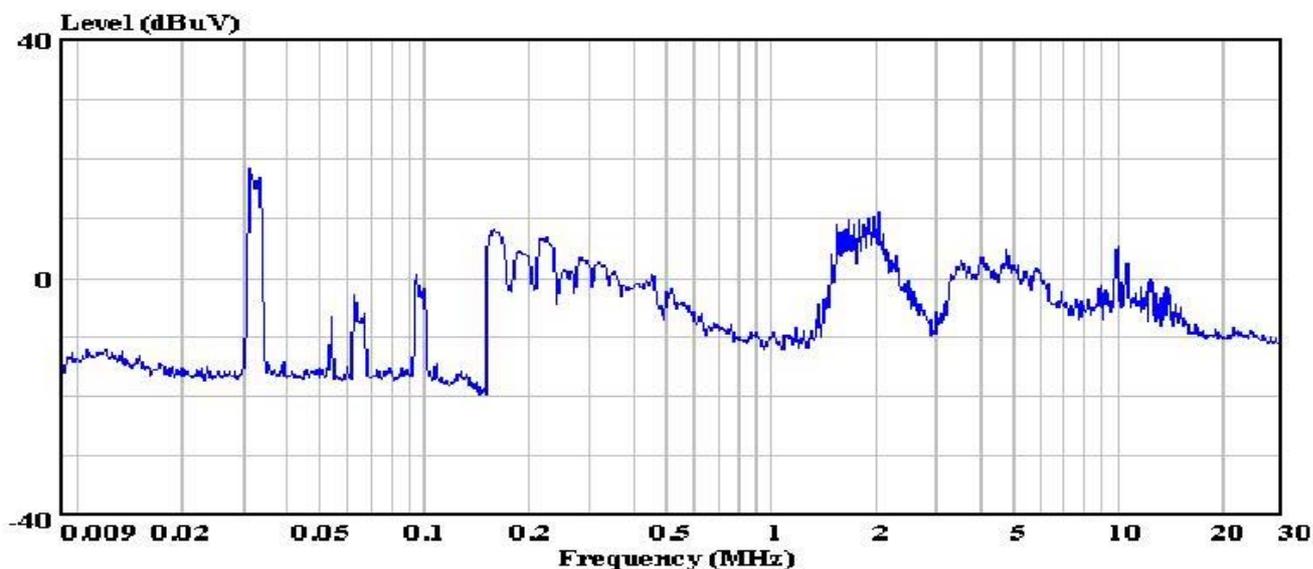


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000145
Applicant : Shanghai Kuohan Electronic Co., Ltd.
EUT : Electronic Energy Saving Lamp
M/N : KFE-S24W
S/N : E120524
Power Supply : 120V/60Hz
Ambient : 23°C 56%RH
Test line : B
Test Mode : on
Test Engineer: Ada



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@8848.net

Data#: 25 File#: D:\EMIVM\TEST\K\kuohan.EMI Date: 2001-12-05 Time: 16:20:38

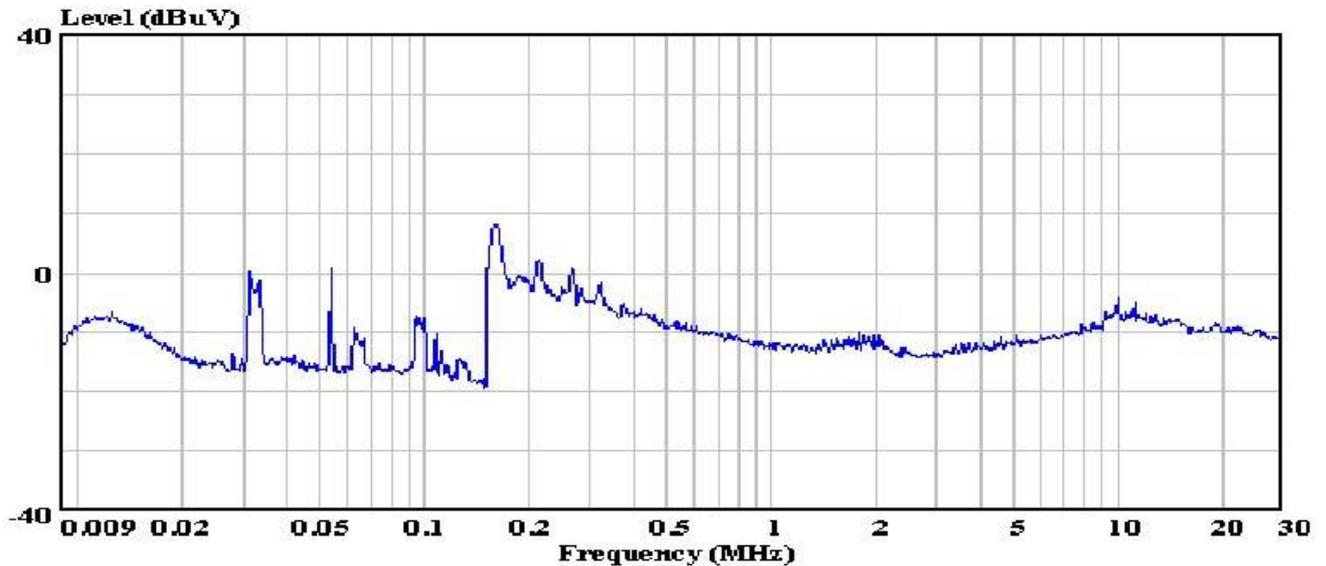


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000145
Applicant : Shanghai Kuohan Electronic Co., Ltd.
EUT : Electronic Energy Saving Lamp
M/N : KFE-S24W
S/N : E120524
Power Supply : 120V/60Hz
Ambient : 23°C 56%RH
Test line : C
Test Mode : on
Test Engineer: Ada



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@8848.net

Data#: 59 File#: D:\EMIVM\TEST\K\kuohan.EMI Date: 2001-12-07 Time: 09:38:06

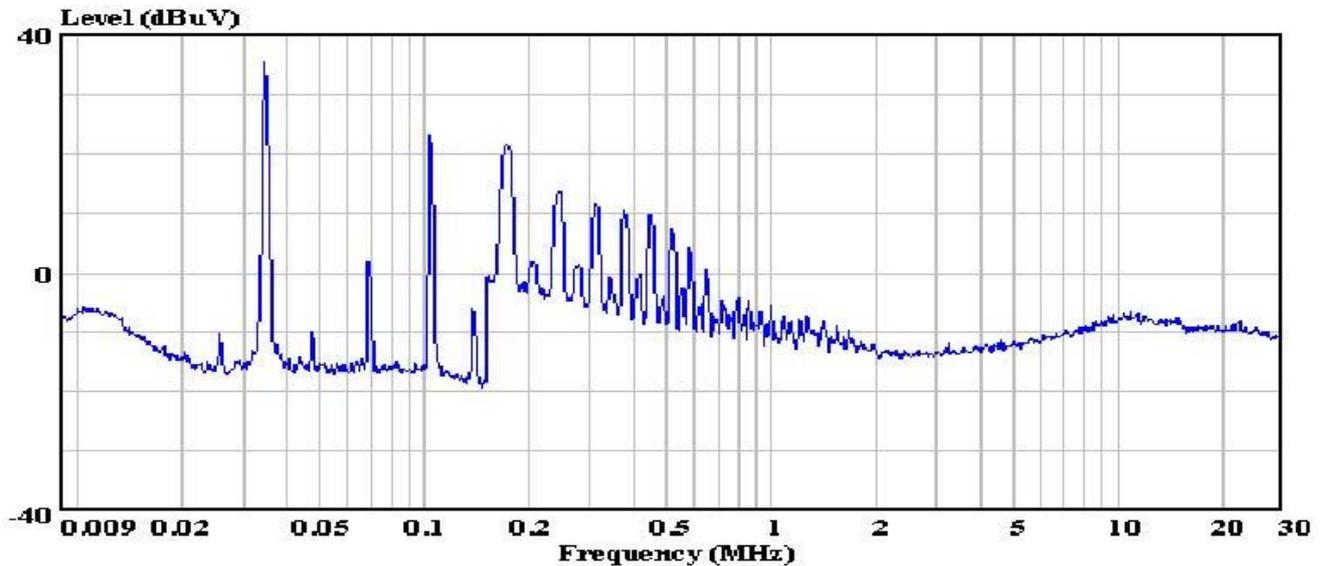


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000145
Applicant : Shanghai Kuohan Electronic Co., Ltd.
EUT : Electronic Energy Saving Lamp
M/N : KFE-C24W
S/N : E120624
Power Supply : 120V/60Hz
Ambient : 23°C 56%RH
Test line : A
Test Mode : on
Test Engineer: Ada



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@8848.net

Data#: 62 File#: D:\EMIVM\TEST\K\kuohan.EMI Date: 2001-12-07 Time: 09:43:12

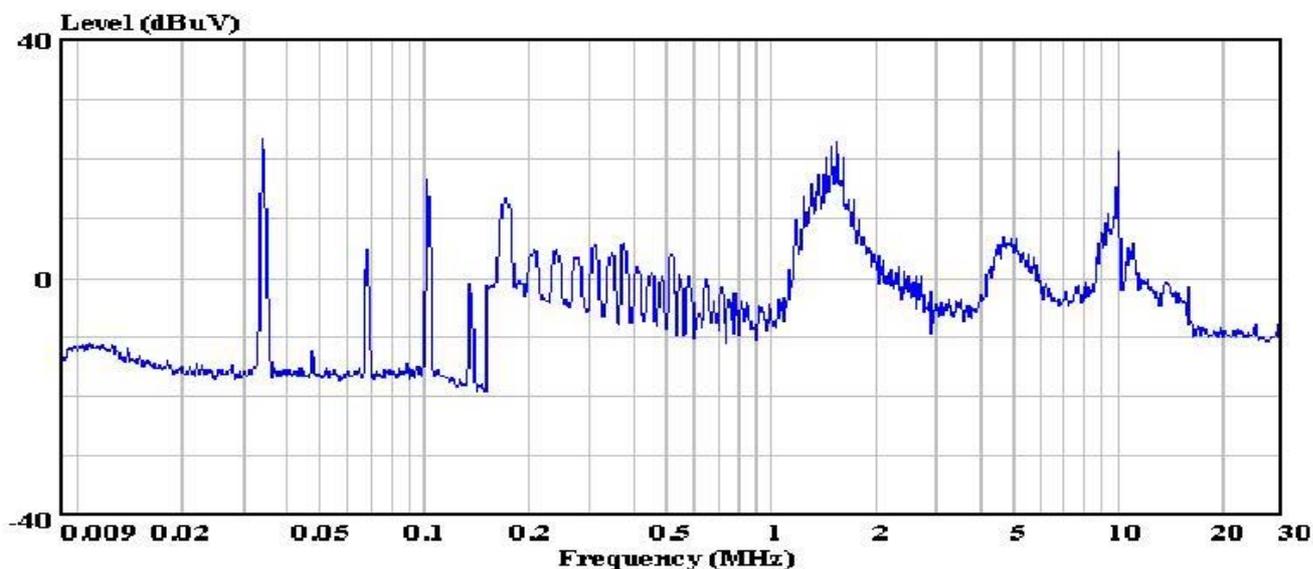


Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000145
Applicant : Shanghai Kuohan Electronic Co., Ltd.
EUT : Electronic Energy Saving Lamp
M/N : KFE-C24W
S/N : E120624
Power Supply : 120V/60Hz
Ambient : 23°C 56%RH
Test line : B
Test Mode : on
Test Engineer: Ada



Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
audixaci@8848.net

Data#: 65 File#: D:\EMIVM\TEST\K\kuohan.EMI Date: 2001-12-07 Time: 09:54:05

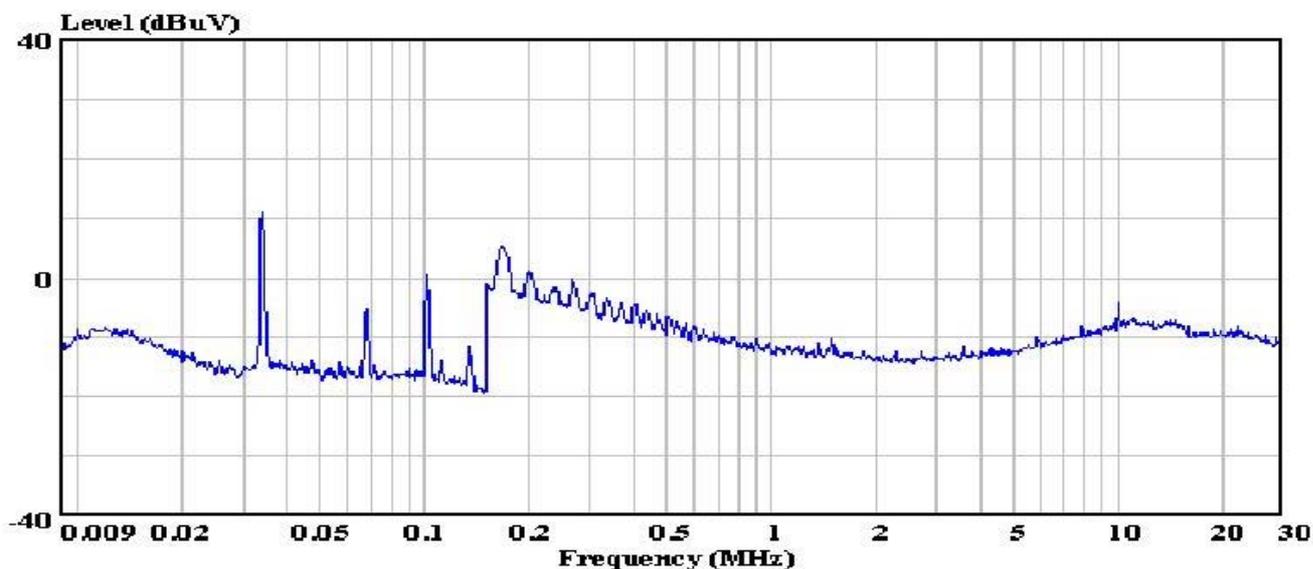

Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000145
Applicant : Shanghai Kuohan Electronic Co., Ltd.
EUT : Electronic Energy Saving Lamp
M/N : KFE-C24W
S/N : E120624
Power Supply : 120V/60Hz
Ambient : 23°C 56%RH
Test line : C
Test Mode : on
Test Engineer: Ada