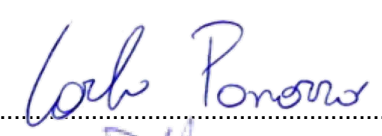



TEST REPORT

Nr. R22014001

Federal Communication Commission (FCC)

Report Reference No.	R22014001
Date of issue:	01.02.2022
Total number pages:	42
Applicant's name	Teleco Automation S.r.l.
Address	Via Calmaggione, 10/4 – 31100 Treviso (TV) – Italy
Test specification:	
Standards	FCC Rules & Regulations, Title 47:2020 Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 249
Non-standard test method	N/A
Test Report Form No.	15-249CMC
Test Report Form(s) Originator ..	CMC Centro Misure Compatibilità S.r.l.
Master TRF	2022-01
General disclaimer:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of CMC Centro Misure Compatibilità S.r.l.	
Test item description	T-MATE Bluetooth
Trademark	Teleco Automation
Manufacturer	Teleco Automation S.r.l.
Model / Type reference	TMATE916BL
FCC ID	P59TMATE916
Rating(s)	5 Vdc from USB
Report	
Tested by (name + signature)	C. Panozzo 
Approved by (name + signature)	F. Marena 

1 Summary

1	Summary.....	2
2	Reference standard	3
3	List of attachments.....	3
4	Deviation(s) from test specification.....	3
5	Testing location.....	3
6	General description of tested item and testing condition(s)	5
6.1	Photos of the test item	6
7	Verdict summary section	8
8	Test conditions.....	10
8.1	General	10
9	Test results	11
9.1	Antenna requirements	11
9.2	Conducted emission	12
9.3	Radiated emissions and spurious emission	18
9.4	Peak Output Power.....	32
9.5	20 dB bandwidth	34
9.6	Band edge	37

2 Reference standard	
FCC Rules and Regulation Title 47 part 15:2020	--
3 List of attachments	
Attachment 1: Instruments list, measurement uncertainty, judgement of compliance and quality manual references	
4 Deviation(s) from test specification	
None	
5 Testing location	
CMC Centro Misure Compatibilità S.r.l. Via della Fisica, 20 – 36016 Thiene (VI) – Italy Test site facility's FCC registration number: 182474	

<i>Revision index</i>	<i>Date</i>	<i>Change history</i>
1.0	01.02.2022	--


Testing and sampling:	
Date of receipt of test item	01.12.2021
Testing start date	28.01.2022
Testing end date	31.01.2022
Sampling procedure.....	Equipment used for testing was picked up by the manufacturer, at the end of the production process with random criterion. The results relate to the sample as it has been received.
Internal identification.....	Adhesive label with the product number P211360
General remarks:	
<p>This report shall not be reproduced, except in full, without the written approval of CMC. The test results presented in this report relate only to the object tested. "(see appended table)": refers to a table appended to the report. Throughout this report a comma is used as the decimal separator.</p>	
Possible test case verdicts:	
Test case does not apply to the test object:	N/A (Not Applicable)
Test object does meet the requirement:	P (Pass)
Test object does not meet the requirement:	F (Fail)
Test object does not performed:	N/E (Not Executed)
Definition of symbols used in this test report:	
<input checked="" type="checkbox"/> Indicates that the listed condition, standard or equipment is applicable for this report. <input type="checkbox"/> Indicates that the listed condition, standard or equipment is not applicable for this report.	

6 General description of tested item and testing condition(s)

Description	T-MATE Bluetooth						
Model Number	TMATE916BL						
FCC ID	P59TMATE916						
Serial Number	--						
Brand name	Teleco Automation						
Frequency band	902 – 928 MHz						
Nominal frequency	Fc: 916 MHz						
Test power supply		Voltage and Frequency	Reference poles				
			N	L1	L2	L3	PE
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input checked="" type="checkbox"/>	DC: 5 V from USB					<input type="checkbox"/>
Test configuration	<input checked="" type="checkbox"/>	Table top equipment					
	<input type="checkbox"/>	Floor standing equipment					
	<input type="checkbox"/>	Hand-held equipment					
Type of equipment	<input checked="" type="checkbox"/>	Transmitter unit					
	<input type="checkbox"/>	Receiver unit					
Type of station	<input type="checkbox"/>	Portable station					
	<input checked="" type="checkbox"/>	Mobile station					
Operating modes	No.	Operating mode of test item					
	1	EUT in continuous transmission at maximum power, BLE in normal operation					

6.1 Photos of the test item



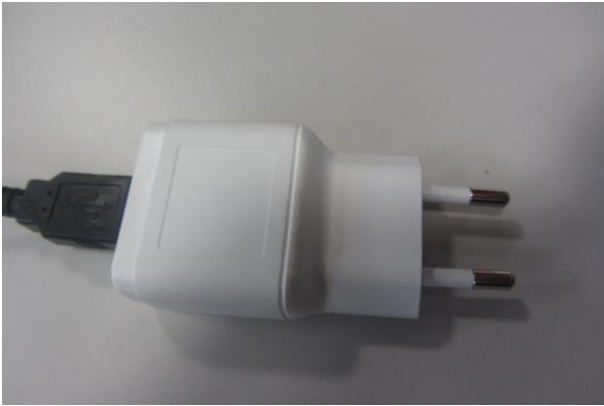

7 Verdict summary section

FCC Rules & Regulations, Title 47:2020			
Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 249			
Clause	Requirement – Test case	Basic standard	Verdict
Part 15.203	Antenna requirements	ANSI C63.10	P
Part 15.207	Conducted emissions	ANSI C63.10	P
Part 15.209	Radiated emissions and spurious emission	ANSI C63.10	P
Part 15.209 and 15.249	Peak Output Power	ANSI C63.10	P
Part 15.215	20 dB Bandwidth	ANSI C63.10	P
Part 15.249	Band edge	ANSI C63.10	P

Normative references	
Reference no.	Description
FCC Rules and Regulation Title 47 part 15:2020	--
ANSI C63.4:2014	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

8 Test conditions

8.1 General

Environmental reference conditions.....:	The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment.		
	The climatic conditions during the tests were within the following limits:		
	Temperature	Humidity	Atmospheric pressure
	15 °C – 35 °C	30 % - 60 %	800 hPa – 1060 hPa
	If explicitly required in the basic standard or applied product standard the climatic values are recorded and documented separately in this test report.		
Measurement uncertainties	Attachment 1		

9 Test results

9.1 Antenna requirements

Tested by	C. Panozzo	
Test date	28.01.2022	
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.203 and 15.204	
Test specification	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded</p>	
Antenna type.....	<input checked="" type="checkbox"/>	Integral antenna
	<input type="checkbox"/>	External antenna
Antenna gain.....	2,15 dBi	
External R.F. power amplifier	Not Present	


9.2 Conducted emission

Tested by	C. Panozzo	
Test date	31.01.2022	
Test location (stand)	Shielded chamber (CMC A001)	
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.207 ANSI C63.10 cl. 6.2	
Test set-up description	<input checked="" type="checkbox"/>	Table top equipment set-up (80 cm above the reference ground plane)
	<input type="checkbox"/>	Floor standing equipment set-up (insulating material up to 12 mm thick)
	<input type="checkbox"/>	False floor installation equipment set-up (insulating material up to 34 cm above the reference ground plane)
Supplementary Test set-up description	--	
Test method applied	<input checked="" type="checkbox"/>	Artificial mains network, 50 μ H/50 Ω LISN
	<input type="checkbox"/>	Other:

Acceptance limits

Frequency range (MHz)	$dB(\mu V)$ Quasi-peak	$dB(\mu V)$ Average
0,15 to 0,50	66 to 56	56 to 46
0,5 to 5	56	46
5 to 30	60	50

Test setup

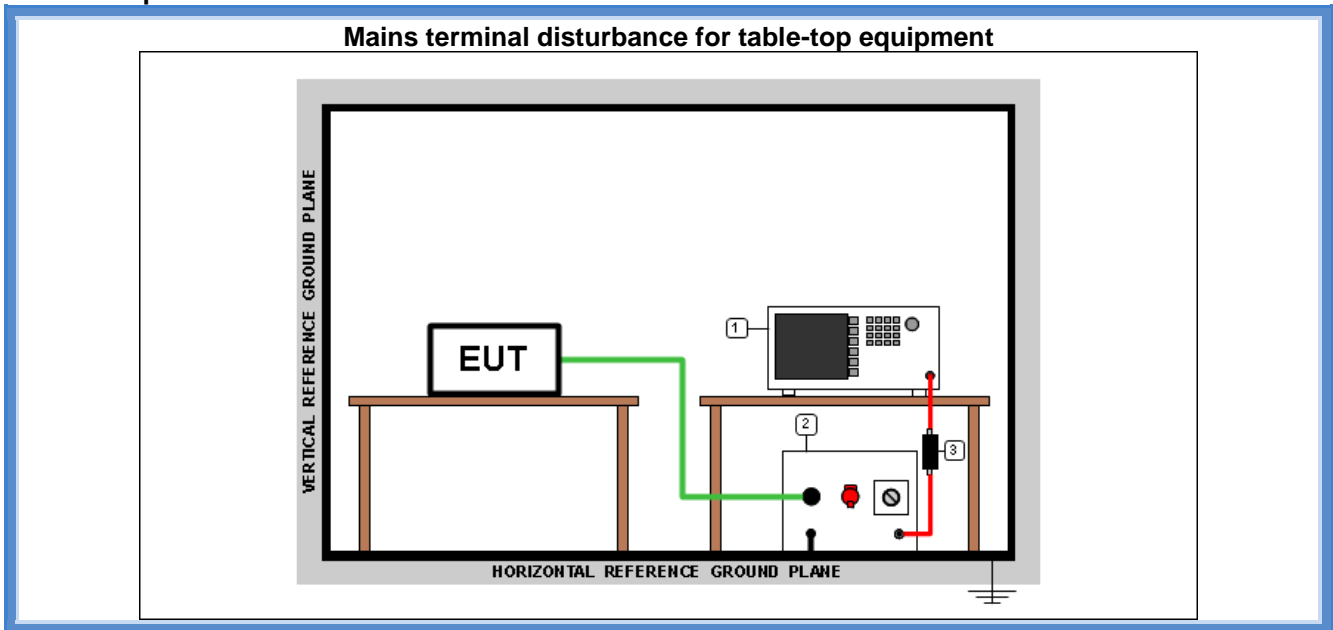

Test setup PE001_01

Nr.	Id. Number	Manufacturer	Model	Description
3	CMC S010	Rohde & Schwarz	ESH3-Z2	Pulse limiter
2	CMC S200	Schwarzbeck	NSLK 8128	V-LISN
1	CMC S206	Rohde & Schwarz	ESCI 7	EMC Receiver 9KHz-7GHz

Result

Line	Frequency Range (MHz)	Graphs	Remarks	Result
L1	0,15 – 30	G22014015	--	P
N	0,15 – 30	G22014016	--	P


Remarks: tests performed on 120 V ~ 60 Hz side of USB power unit Lenovo SC-42

Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +

AV: Average; AV [1s] (average at 1 second) values are marked with a X


Graphs

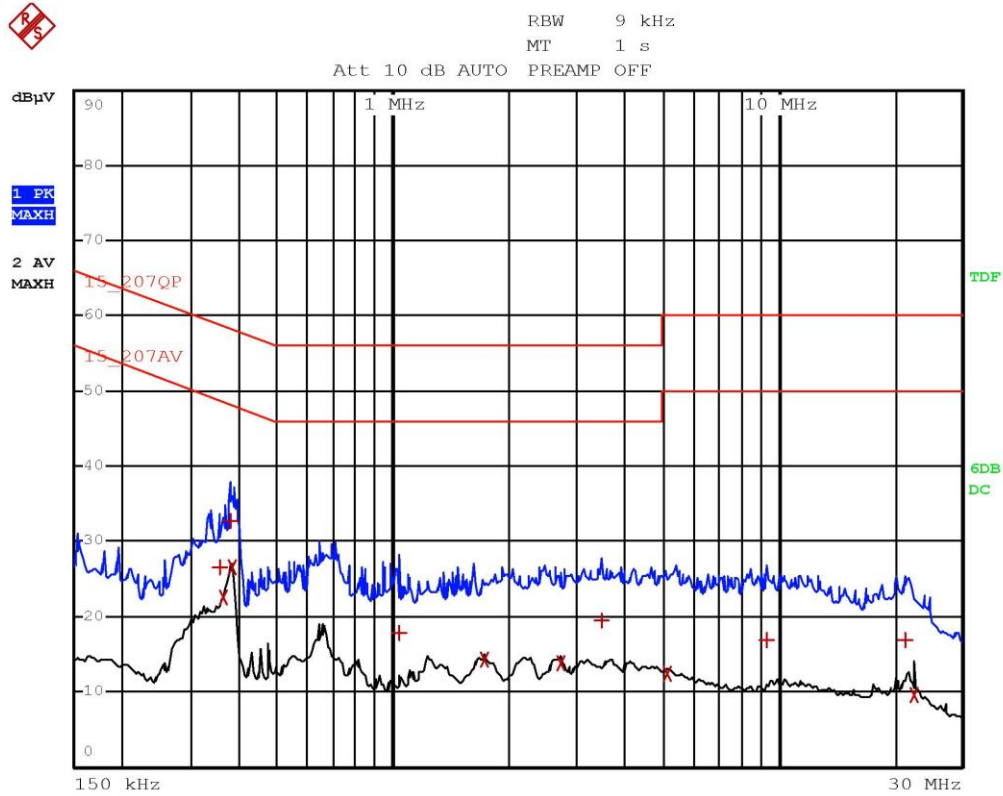

Panozzo 22014015 Line L In Funzione Radio on

EDIT PEAK LIST (Final Measurement Results)			
Trace1:	15_207QP		
Trace2:	15_207AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dB μ V	DELTA LIMIT dB
1 Quasi Peak	354 kHz	26.67	-32.19
2 Average	362 kHz	22.64	-26.04
1 Quasi Peak	378 kHz	32.66	-25.66
2 Average	382 kHz	26.53	-21.70
1 Quasi Peak	1.034 MHz	17.91	-38.08
2 Average	1.738 MHz	14.24	-31.75
2 Average	2.73 MHz	13.91	-32.08
1 Quasi Peak	3.49 MHz	19.53	-36.46
2 Average	5.178 MHz	12.29	-37.70
1 Quasi Peak	9.358 MHz	16.90	-43.09
1 Quasi Peak	21.37 MHz	16.78	-43.21
2 Average	22.526 MHz	9.68	-40.32

Panozzo 22014015 Line L In Funzione Radio on

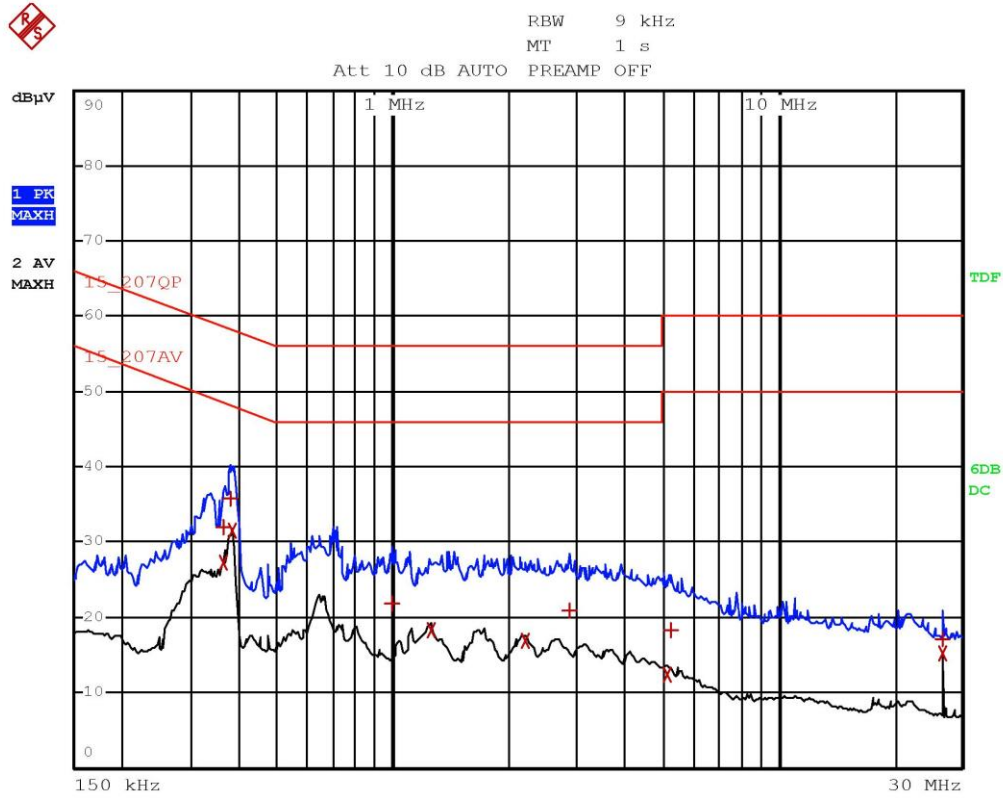

Panozzo 22014016 Line N In Funzione Radio on

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	15_207QP			
Trace2:	15_207AV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBpV	DELTA LIMIT dB	
1 Quasi Peak	362 kHz	31.90	-26.78	
2 Average	362 kHz	27.38	-21.30	
1 Quasi Peak	378 kHz	35.90	-22.41	
2 Average	382 kHz	31.49	-16.74	
1 Quasi Peak	998 kHz	21.96	-34.03	
2 Average	1.262 MHz	18.37	-27.62	
2 Average	2.21 MHz	16.90	-29.09	
1 Quasi Peak	2.894 MHz	20.92	-35.07	
2 Average	5.142 MHz	12.51	-37.48	
1 Quasi Peak	5.27 MHz	18.25	-41.74	
2 Average	26.622 MHz	15.13	-34.86	
1 Quasi Peak	26.626 MHz	17.03	-42.96	

Panozzo 22014016 Line N In Funzione Radio on

9.3 Radiated emissions and spurious emission

Tested by	C. Panozzo	
Test date	28.01.2022	
Test location (stand)	Semi-anechoic chamber (CMC A070)	
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.209 and 15.249 (a) and (d) ANSI C63.10 cl. 6.3, 6.4, 6.5 and 6.6	
Test set-up description	<input checked="" type="checkbox"/>	Table top equipment set-up (80 cm above the reference ground plane)
	<input type="checkbox"/>	Floor standing equipment set-up (insulating material up to 12 mm thick)
	<input type="checkbox"/>	False floor installation equipment set-up (insulating material up to 34 cm above the reference ground plane)
Supplementary test set-up description	--	
Test method applied	SAC with measurement distance [m]: 10	
Supplementary information.....	--	

Acceptance limits

Acceptance limits for emissions in restricted frequency bands ($f < 1000$ MHz)		
Frequency range (MHz)	Test distance (m)	Limits [dB(μ V/m)]
0,009 to 0,490	300	48,5 to 13,8
0,490 to 1,705	30	33,8 to 22,9
1,705 to 30	30	29,5
30 to 88	3	40
88 to 216	3	43,5
216 to 960	3	46,0
960 to 1000	3	54

Remarks: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz and 110–490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector. The results have been extrapolated to the specified distance using an extrapolation factor

Acceptance limits for emissions in restricted frequency bands ($f \geq 1000$ MHz)			
Frequency (MHz)	Test distance (m)	AV limits [dB(μ V/m)]	Peak limits [dB(μ V/m)]
> 1000	3	54	74

The restricted frequency bands are listed in the following table


<i>MHz</i>	<i>MHz</i>	<i>MHz</i>	<i>GHz</i>
0,090 – 0,110	16,42 – 16,423	399,9 – 410	4,5 – 5,15
0,495 – 0,505	16,69475 – 16,69525	608 – 614	5,35 – 5,46
2,1735 – 2,1905	16,80425 – 16,80475	960 – 1240	7,25 – 7,75
4,125 – 4,128	25,5 – 25,67	1300 – 1427	8,025 – 8,5
4,17725 – 4,17775	37,5 – 38,25	1435 – 1626,5	9,0 – 9,2
4,20725 – 4,20775	73 – 74,6	1645,5 – 1646,5	9,3 – 9,5
6,215 – 6,218	74,8 – 75,2	1660 – 1710	10,6 – 12,7
6,26775 – 6,26825	108 – 121,94	1718,8 – 1722,2	13,25 – 13,4
6,31175 – 6,31225	123 – 138	2200 – 2300	14,47 – 14,5
8,291 – 8,294	149,9 – 150,05	2310 – 2390	15,35 – 16,2
8,362 – 8,366	156,52475 – 156,52525	2483,5 – 2500	17,7 – 21,4
8,37625 – 8,38675	156,7 – 156,9	2690 – 2900	22,01 – 23,12
8,41425 – 8,41475	162,0125 – 167,17	3260 – 3267	23,6 – 24,0
12,29 – 12,293	167,72 – 173,2	3332 – 3339	31,2 – 31,8
12,51975 – 12,52025	240 – 285	3345,8 – 3358	36,43 – 36,5
12,57675 – 12,57725	322 – 335,4	3600 – 4400	Above 38,6
13,36 – 13,41			

Acceptance limits for emissions in non-restricted frequency bands

Field strength of harmonics: 500 $\mu\text{V/m}$ (54 dB($\mu\text{V/m}$)).


Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Test setup

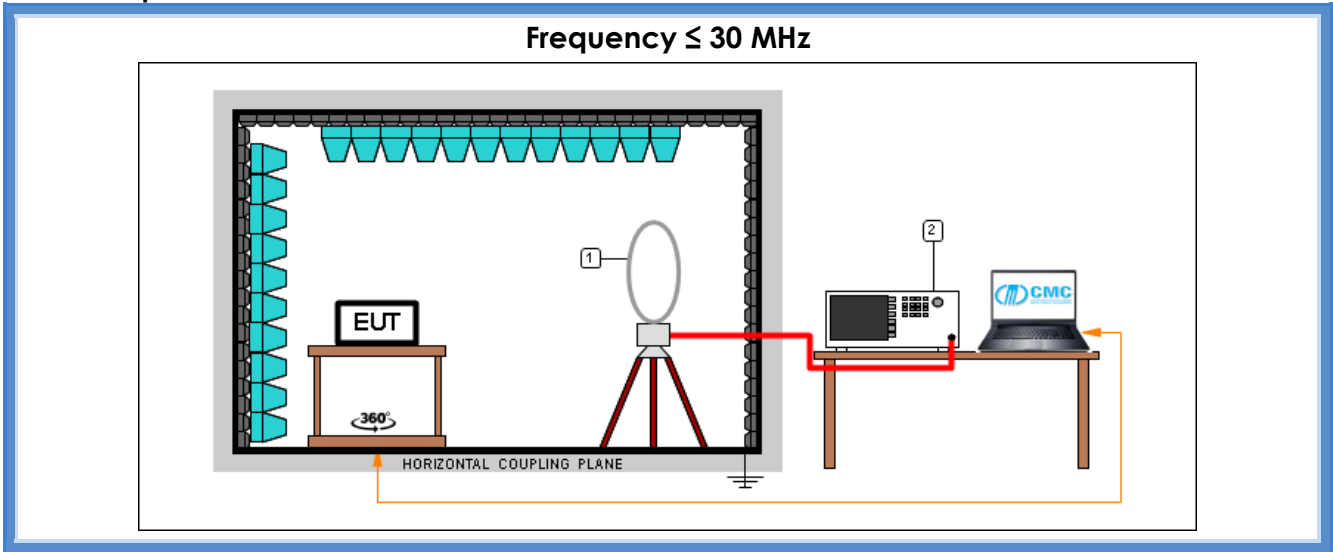

Test setup PE004_01

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
1	CMC S127	Schaffner	HLA6120	Loop Antenna 9kHz - 30MHz

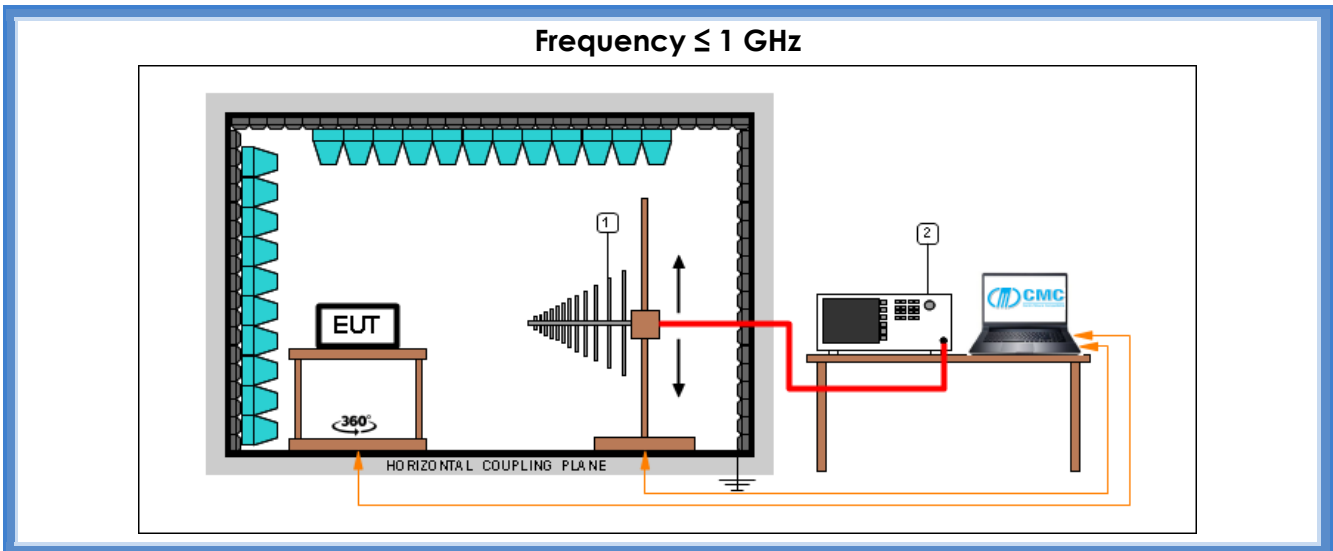


Test setup PE004_02

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
1	CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Broadband Antenna

Test setup PE004_03

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
1	CMC S287	Schwarzbeck	VUSLP 9111B	Broadband Antenna

Frequency > 1 GHz

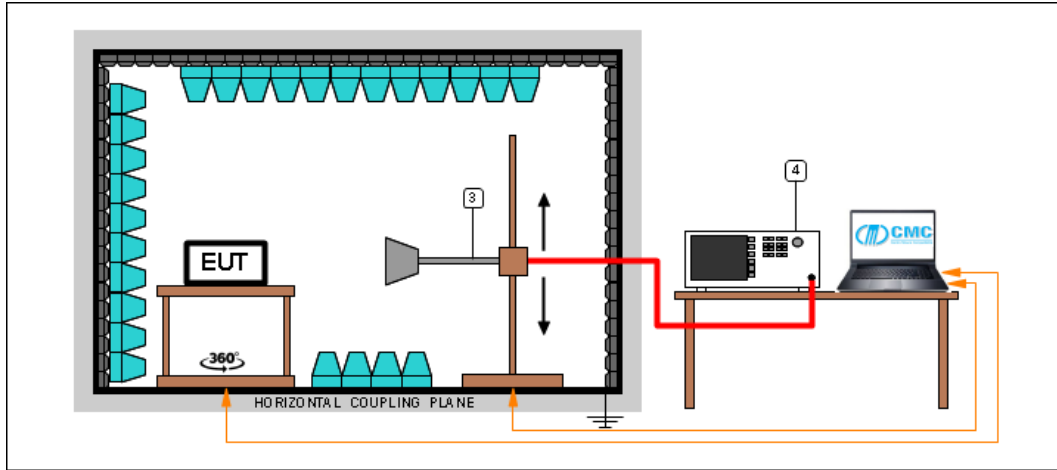

Test setup PE004_04

Nr.	Id. Number	Manufacturer	Model	Description
4	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
3	CMC S108	Emco	3115	Waveguide antenna

Test setup PE004_05

Nr.	Id. Number	Manufacturer	Model	Description
4	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
3	CMC S290	Schwarzbeck	BBHA 9170	Horn Antenna (15-40 GHz)

Result

<i>Polarization</i>	<i>Frequency Range (MHz)</i>	<i>Graphs</i>	<i>Remarks</i>	<i>Result</i>
Loop	0,009 – 30	G22014006	--	P
V	30 – 300	G22014007	--	P
H	30 – 300	G22014008	--	P
H	300 – 1000	G22014009	--	P
V	300 – 1000	G22014010	--	P
V	1000 – 3000	G22014011	--	P
H	1000 – 3000	G22014012	--	P
H	3000 – 10000	G22014013	--	P
V	3000 – 10000	G22014014	--	P


Remarks: EUT was tested in 3 orthogonal planes, graphs are related to the highest detected levels. Measurements at frequencies lower than 30 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor $40\log(\text{test distance}/10)$ based on the measuring distance provided by the standard. Measurements at frequencies higher than 30 MHz and lower than 1000 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor $20\log(\text{test distance}/10)$ based on the measuring distance provided by the standard. Peaks above the limits are caused by the nominal transmitting frequencies

Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +
AV: Average; AV [1s] (average at 1 second) values are marked with a X

Graphs

Panozzo 22014006 Loop

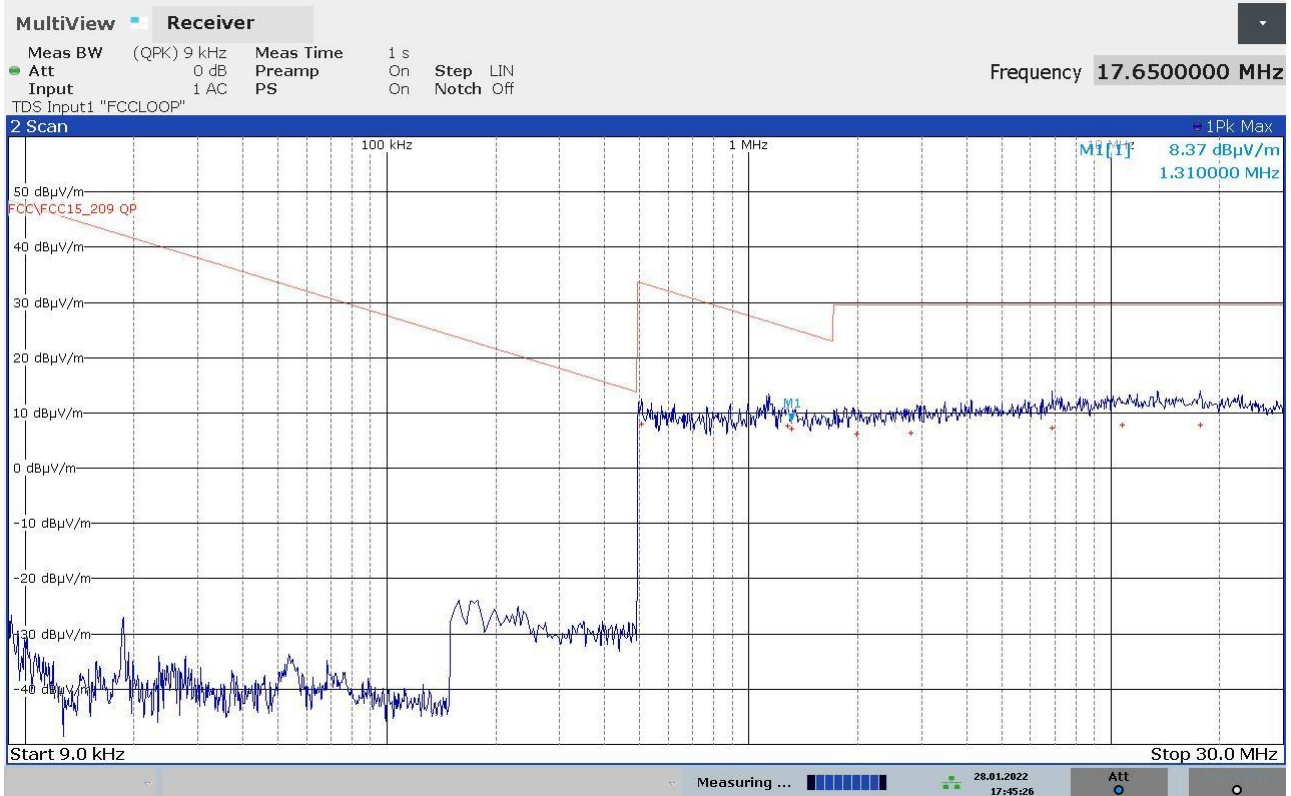


FINAL RESULT TABLE

QUASI PEAK

Freq Hz	Lev dBuV/m	Margin dB
506000	+8,05	-25,47
1282000	+7,59	-17,86
1310000	+7,08	-18,18
1982000	+6,10	-23,44
2798000	+6,30	-23,24
6886000	+7,19	-22,35
10726000	+7,79	-21,75
17650000	+7,89	-21,65

22014006_2

Panozzo 22014007 Vert

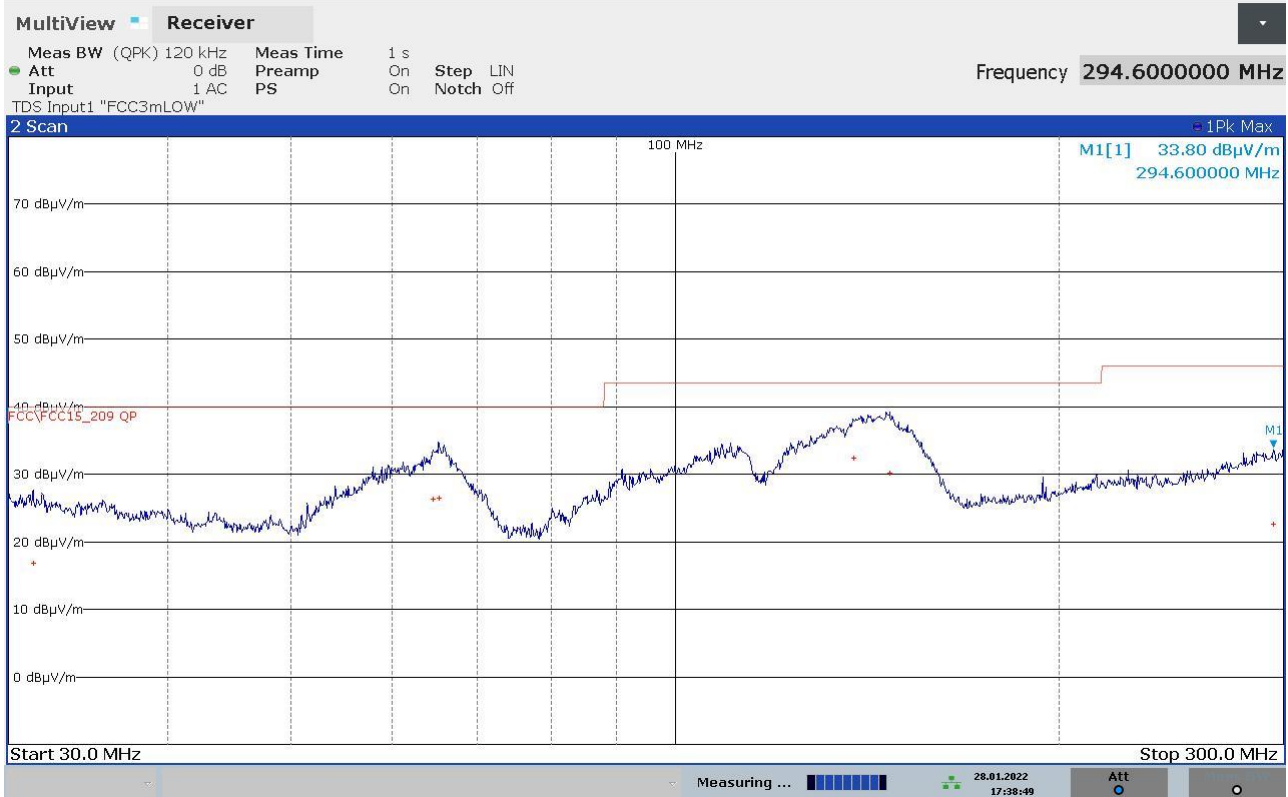


FINAL RESULT TABLE

QUASI PEAK		
Freq Hz	Lev dBuV/m	Margin dB
31360000	+16,91	-23,09
64560000	+26,30	-13,70
65240000	+26,46	-13,54
137960000	+32,34	-11,18
147320000	+30,21	-13,31
294600000	+22,69	-23,33

22014007_2

Panozzo 22014008 Horiz

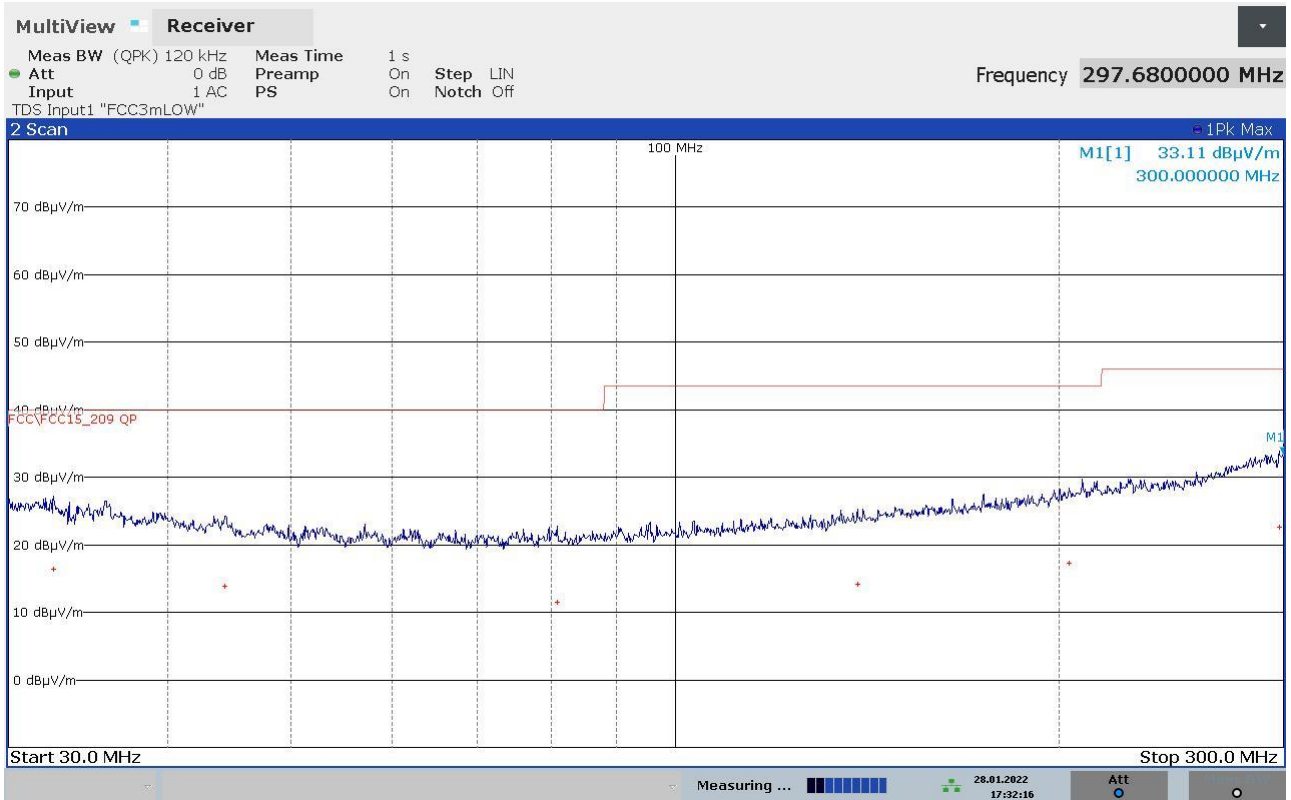


FINAL RESULT TABLE

QUASI PEAK		
Freq Hz	Lev dBuV/m	Margin dB
32520000	+16,38	-23,62
44360000	+13,80	-26,20
80800000	+11,53	-28,47
139000000	+14,11	-29,41
203680000	+17,22	-26,30
297680000	+22,68	-23,34

22014008_2

Panozzo 22014009 Horiz

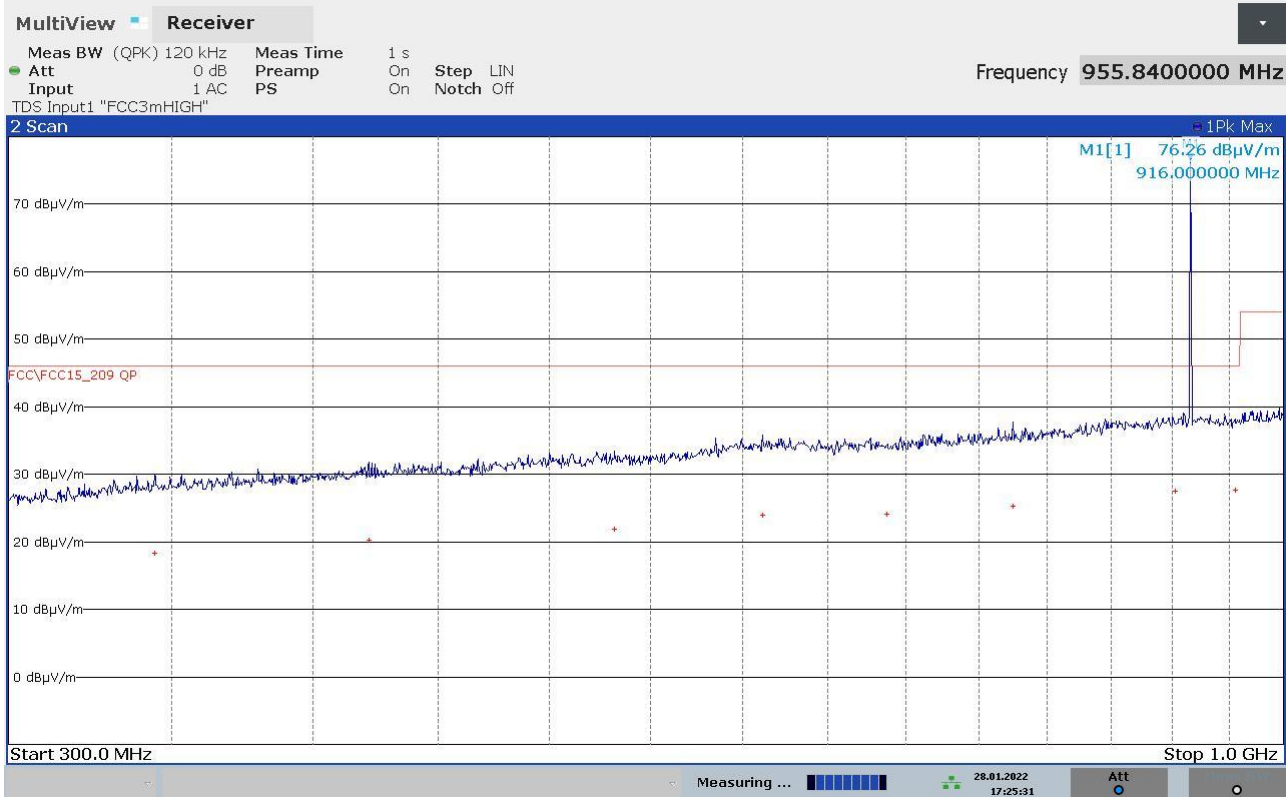


FINAL RESULT TABLE

QUASI PEAK		
Freq Hz	Lev dBuV/m	Margin dB
344560000	+18,30	-27,72
421560000	+20,28	-25,74
531520000	+21,87	-24,15
611440000	+23,99	-22,03
687360000	+24,11	-21,91
774680000	+25,33	-20,69
903280000	+27,46	-18,56
955840000	+27,65	-18,37

22014009_2

Panozzo 22014010 Vert

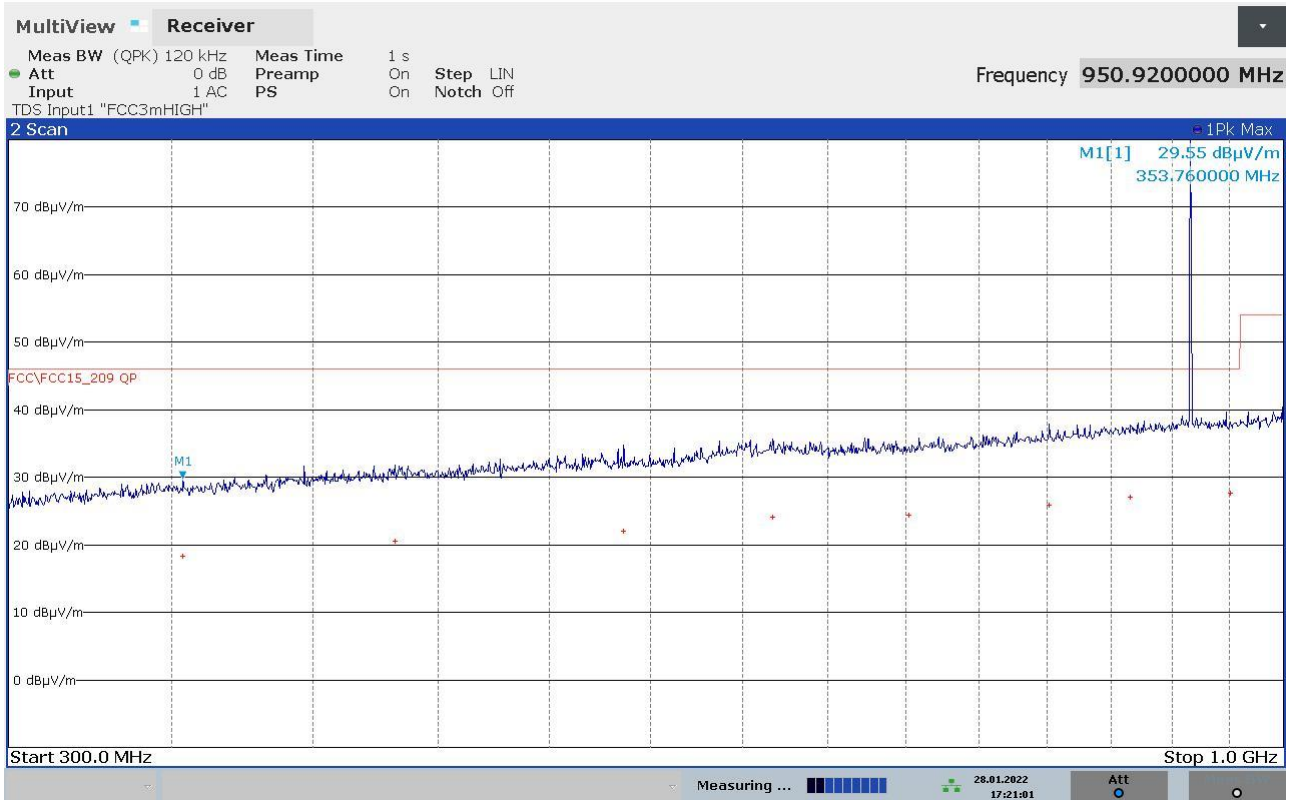


FINAL RESULT TABLE

QUASI PEAK		
Freq Hz	Lev dBuV/m	Margin dB
353760000	+18,29	-27,73
432120000	+20,55	-25,47
536360000	+22,07	-23,95
617560000	+24,06	-21,96
701960000	+24,46	-21,56
801600000	+25,94	-20,08
865320000	+27,05	-18,97
950920000	+27,67	-18,35

22014010_2

Panozzo 22014011 Vert

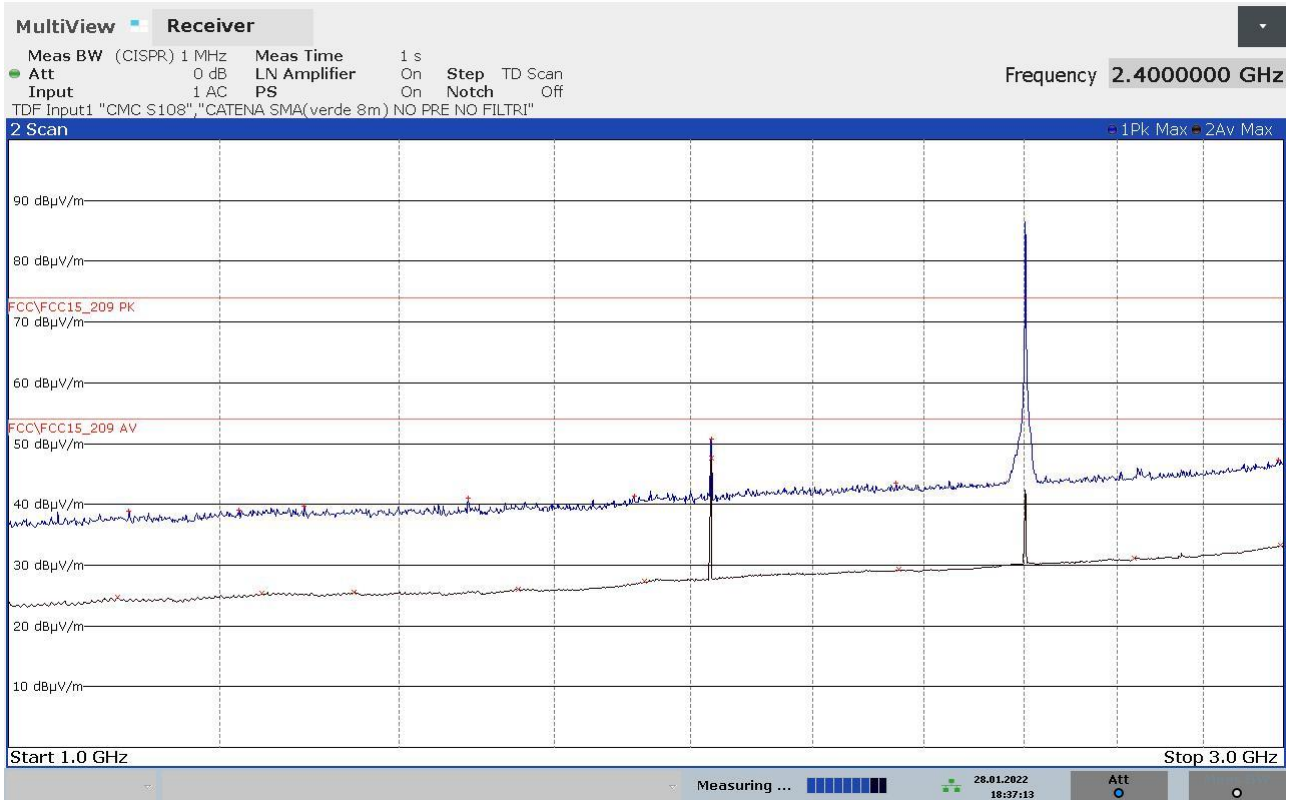


FINAL RESULT TABLE

MAX PEAK			AVERAGE		
Freq Hz	Lev dBuV/m	Margin dB	Freq Hz	Lev dBuV/m	Margin dB
1109500000	+38,82	-35,16	1098500000	+24,63	-29,35
1220000000	+39,09	-34,89	1243750000	+25,30	-28,68
1290250000	+39,73	-34,25	1346500000	+25,60	-28,38
1485750000	+41,07	-32,91	1551000000	+26,05	-27,93
1714750000	+41,29	-32,69	1730000000	+27,29	-26,69
1832000000	+50,80	-23,18	1832000000	+47,64	-6,34
2148750000	+43,44	-30,54	2153000000	+29,26	-24,72
2986250000	+47,35	-26,63	2638500000	+31,15	-22,83
			2992000000	+33,22	-20,76

22014011_2

Panozzo 22014012 Horiz

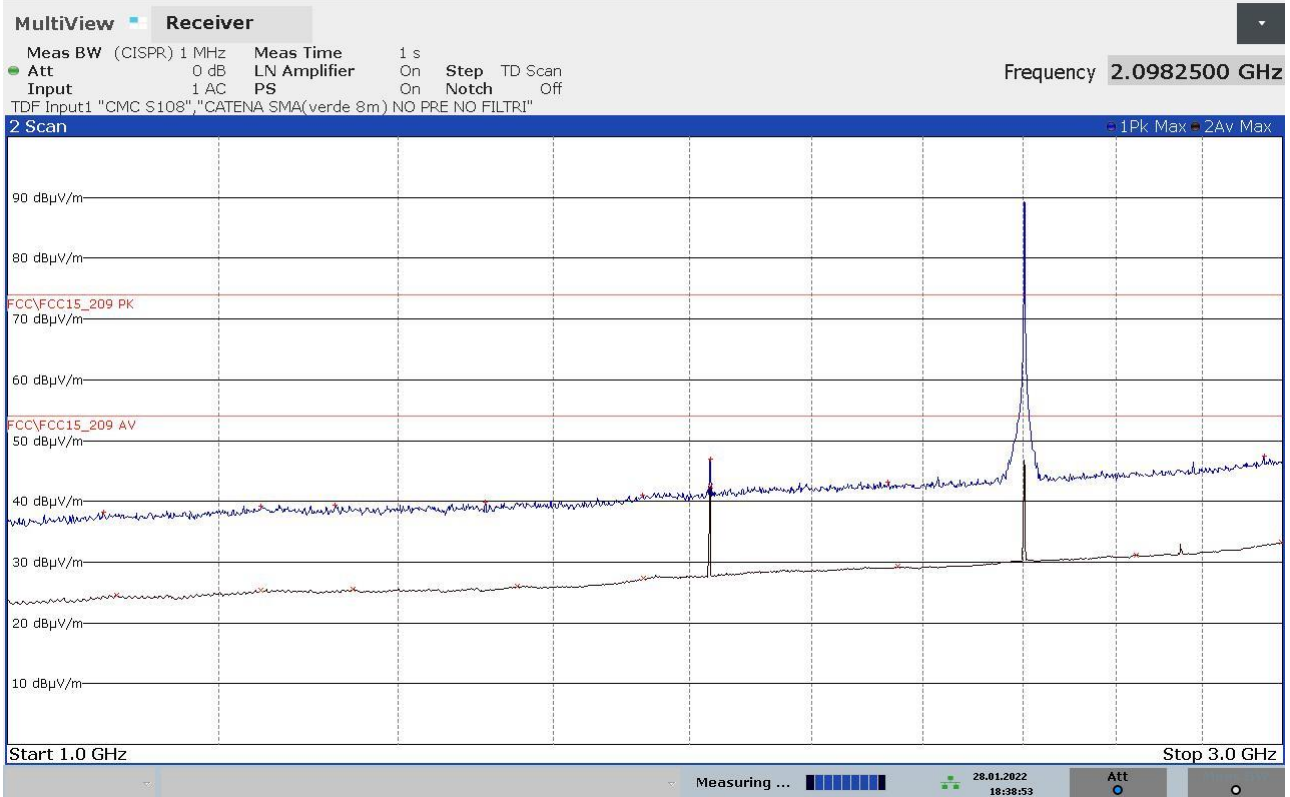


FINAL RESULT TABLE

MAX PEAK			AVERAGE		
Freq Hz	Lev dBuV/m	Margin dB	Freq Hz	Lev dBuV/m	Margin dB
1086000000	+38,21	-35,77	1098250000	+24,60	-29,38
1244500000	+39,19	-34,79	1244000000	+25,30	-28,68
1326250000	+39,37	-34,61	1346500000	+25,60	-28,38
1509250000	+39,93	-34,05	1551000000	+26,05	-27,93
1729000000	+40,96	-33,02	1729750000	+27,30	-26,68
1832000000	+46,93	-27,05	1832000000	+42,51	-11,47
2135750000	+43,21	-30,77	2153250000	+29,26	-24,72
2952750000	+47,47	-26,51	2644250000	+31,15	-22,83
			2997750000	+33,22	-20,76

22014012_2

Panozzo 22014013 Horiz

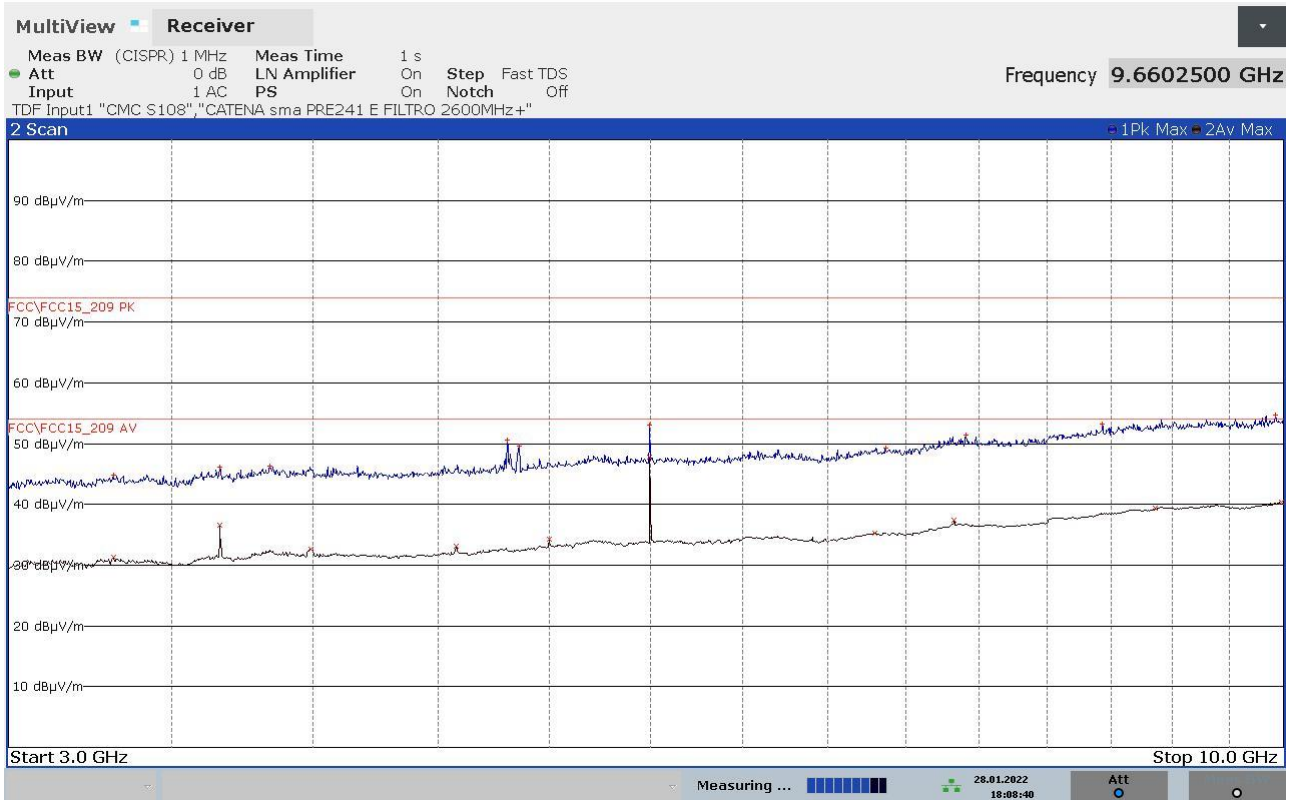


FINAL RESULT TABLE

MAX PEAK			AVERAGE		
Freq Hz	Lev dBuV/m	Margin dB	Freq Hz	Lev dBuV/m	Margin dB
3312750000	+44,86	-29,12	3311750000	+31,34	-22,64
3663750000	+46,17	-27,81	3663750000	+36,50	-17,48
3839500000	+46,27	-27,71	3991500000	+32,60	-21,38
4806000000	+50,58	-23,40	4579750000	+33,15	-20,83
4859500000	+49,57	-24,41	4999750000	+34,21	-19,77
5495750000	+53,09	-20,89	5495750000	+47,75	-6,23
6867750000	+49,32	-24,66	6798250000	+35,31	-18,67
7406750000	+51,41	-22,57	7327750000	+37,42	-16,56
8429250000	+53,18	-20,80	8860000000	+39,38	-14,60
9926500000	+54,68	-19,30	9979750000	+40,36	-13,62

22014013_2

Panozzo 22014014 Vert

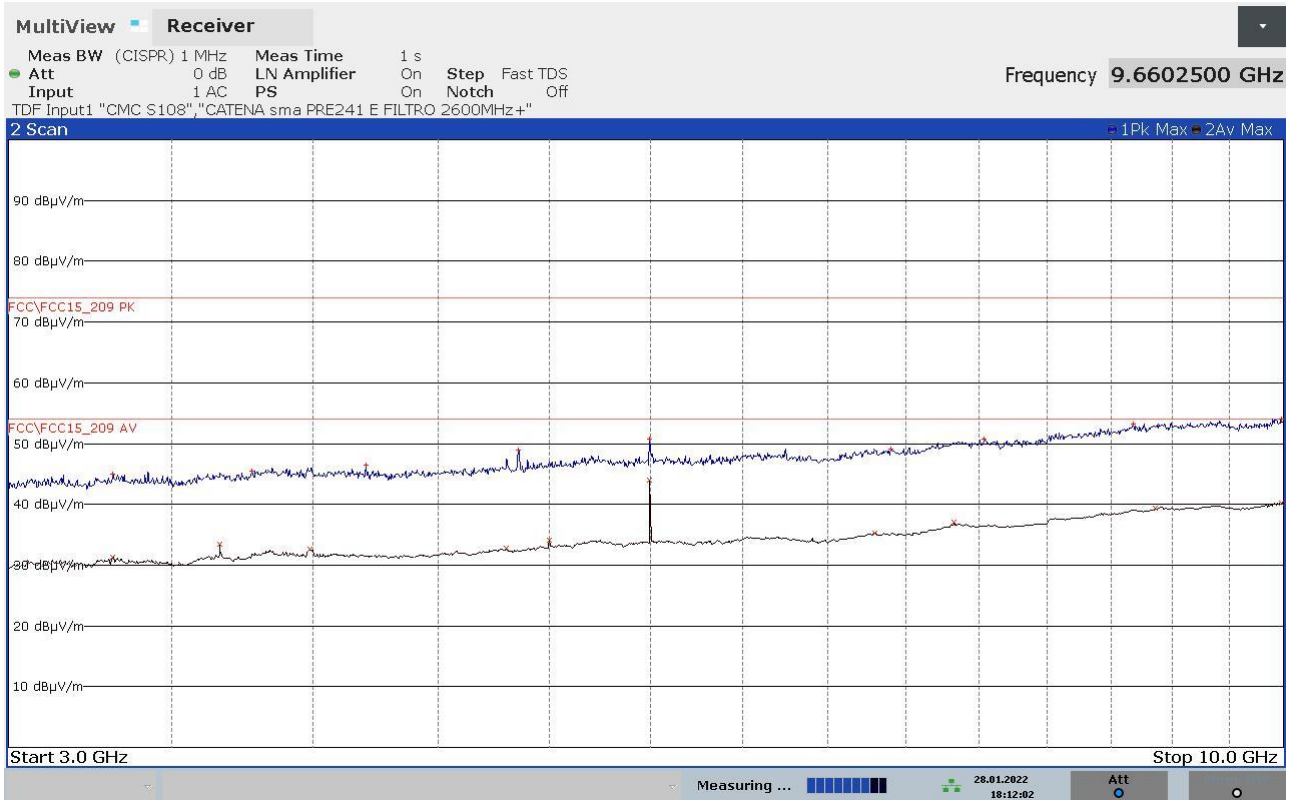

FINAL RESULT TABLE

MAX PEAK			AVERAGE		
Freq Hz	Lev dBuV/m	Margin dB	Freq Hz	Lev dBuV/m	Margin dB
3311500000	+44,95	-29,03	3311250000	+31,34	-22,64
3775250000	+45,52	-28,46	3663750000	+33,42	-20,56
4203500000	+46,43	-27,55	3989500000	+32,58	-21,40
4854500000	+48,99	-24,99	4799000000	+32,78	-21,20
4857250000	+48,94	-25,04	4999750000	+34,14	-19,84
5495750000	+50,67	-23,31	5495750000	+44,00	-9,98
6901500000	+49,12	-24,86	6798500000	+35,26	-18,72
7537250000	+50,79	-23,19	7327750000	+37,14	-16,84
8676000000	+53,19	-20,79	8860000000	+39,30	-14,68
9977750000	+54,10	-19,88	9980000000	+40,25	-13,73

22014014_2

9.4 Peak Output Power


Tested by	C. Panozzo
Test date	28.01.2022
Test location (stand)	Semi-anechoic chamber (CMC A070)
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.209 and 249
Supplementary test set-up description	EUT – antenna distance: 3 m
Supplementary information.....	--

Acceptance limits

Frequency range (MHz)	RF Power Output (mV/m)	RF Power Output dB(μ V/m)
902 – 928	50	94

Frequency range (MHz)	RF Power Output (mV/m)	RF Power Output dB(μ V/m)
2400 – 2483,5	50	94

Test setup

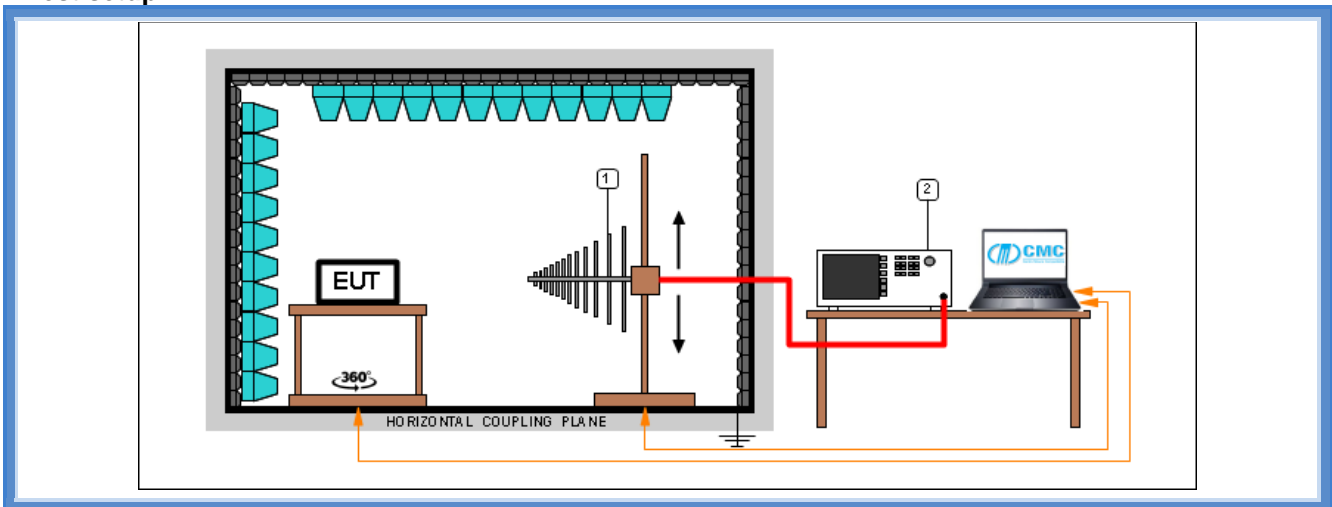

Test setup PE004_03


Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
1	CMC S287	Schwarzbeck	VUSLP 9111B	Broadband Antenna

Result

Channel (MHz)	Polarization	Graphs	Measured level (dB μ V/m)	Limit (dB μ V/m)
916,00	Worst case	G22014003	93,76	94,00

Graphs


Panozzo 22014003

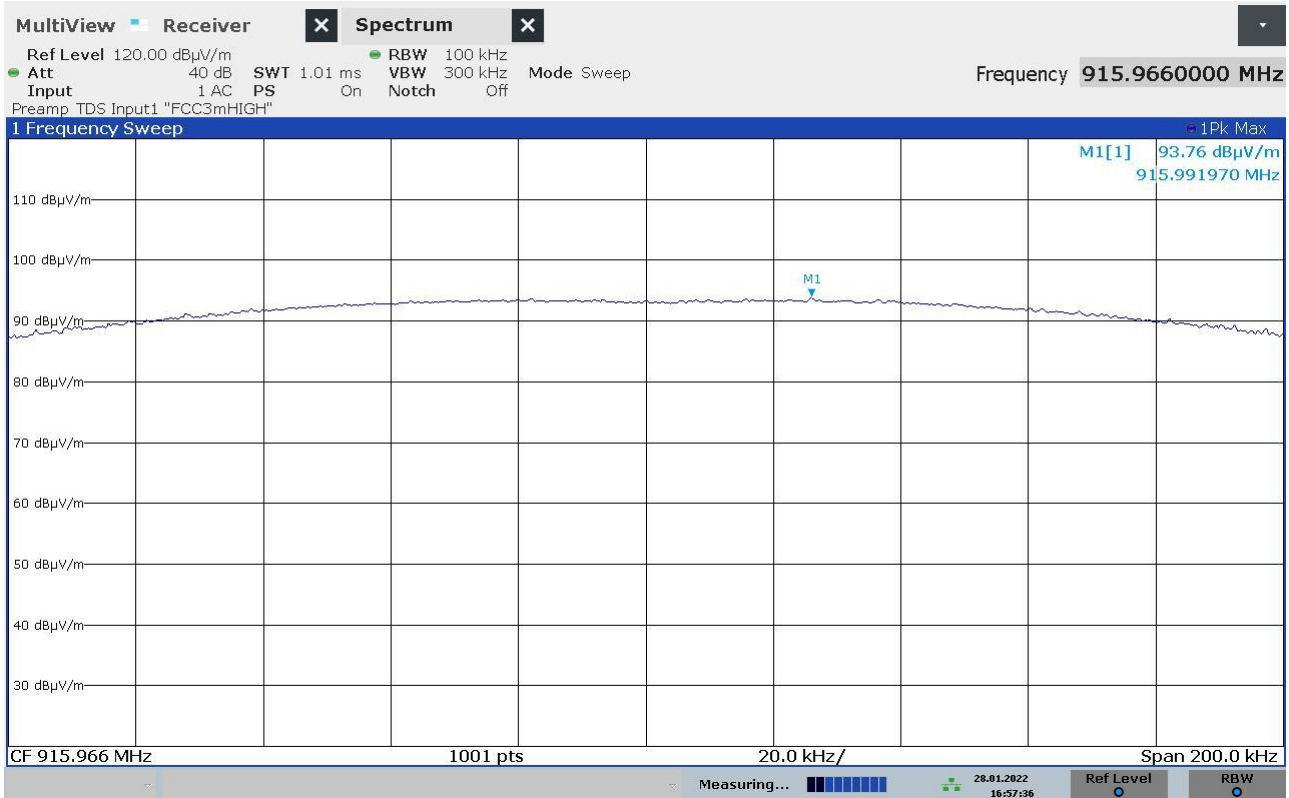

9.5 20 dB bandwidth

Tested by	C. Panozzo
Test date	28.01.2022
Test location (stand)	Semi-anechoic chamber (CMC A070)
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.215 (c) ANSI C63.10 cl. 7.8.7
Test specification	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. In the case of intentional radiators operating under the provisions of subpart E, the emission bandwidth may span across multiple contiguous frequency bands identified in that subpart. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation

Test setup

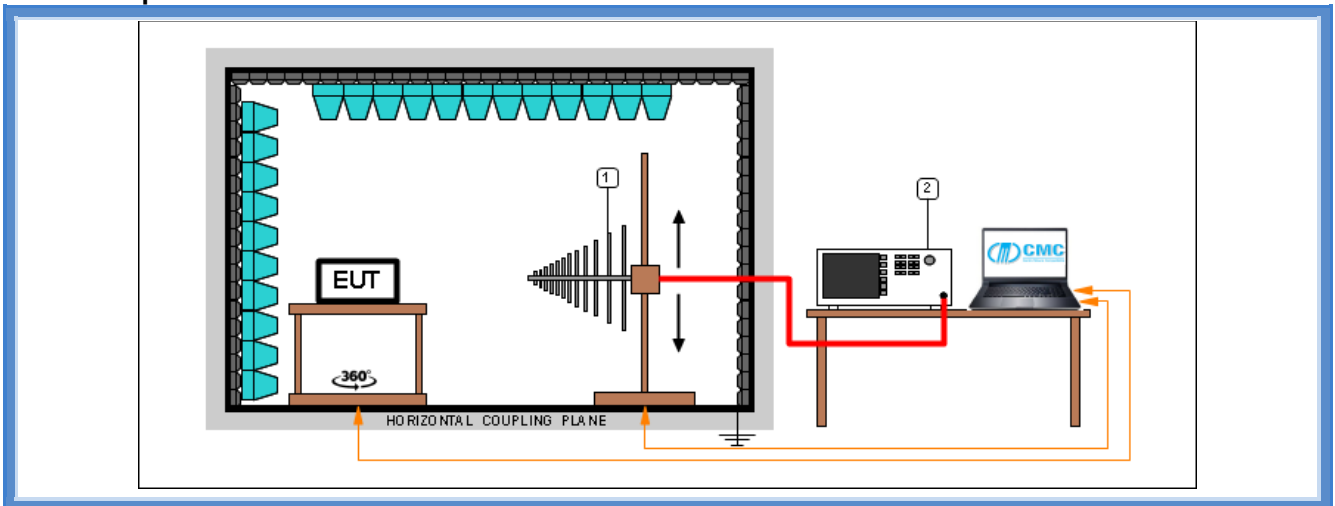

Test setup PE004_03


Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S287	Schwarzbeck	VUSLP 9111B	Broadband Antenna

Result

<i>Channel (MHz)</i>	<i>Graphs</i>	<i>20 dB bandwidth (MHz)</i>	<i>Limits (MHz)</i>	<i>Results</i>
916,00	G22014001	915,944 – 915,990	902 – 928	Complies

Graphs

Panozzo 22014001

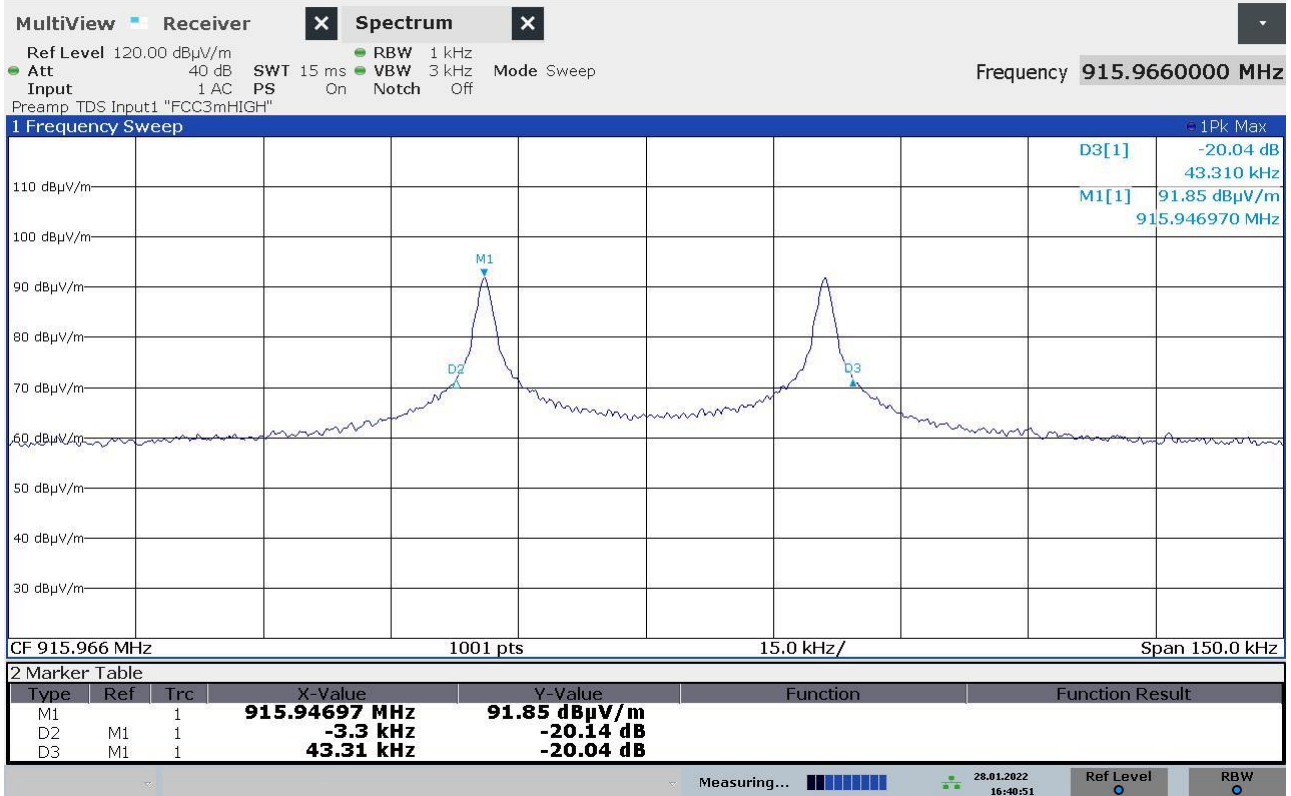


9.6 Band edge

Tested by	C. Panozzo
Test date	28.01.2022
Test location (stand)	Semi-anechoic chamber (CMC A070)
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.249 (d)
Test specification	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation
Supplementary information.....	--

Acceptance limits

Operation within the band 902 – 928 MHz

Test setup

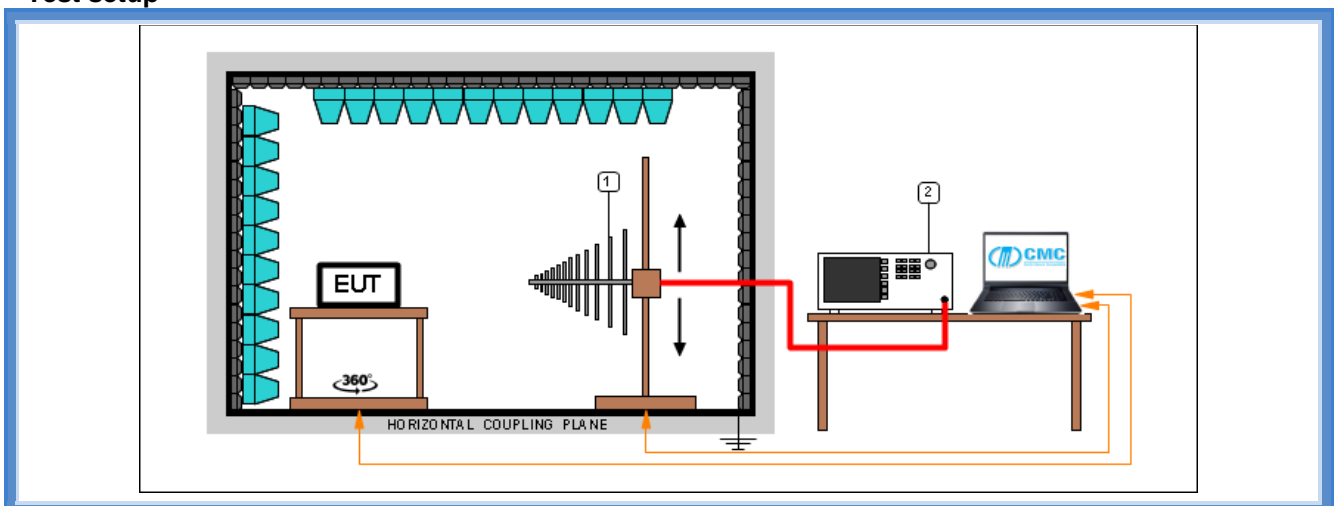

Test setup PE004_03


Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
1	CMC S287	Schwarzbeck	VUSLP 9111B	Broadband Antenna

Result


Channel (MHz)	Graph(s)	Results	
916,00	G22014005	F _L : 915,5840 MHz	Complies
916,00	G22014004	F _H : 916,3640 MHz	Complies

Graphs

Panozzo 22014004

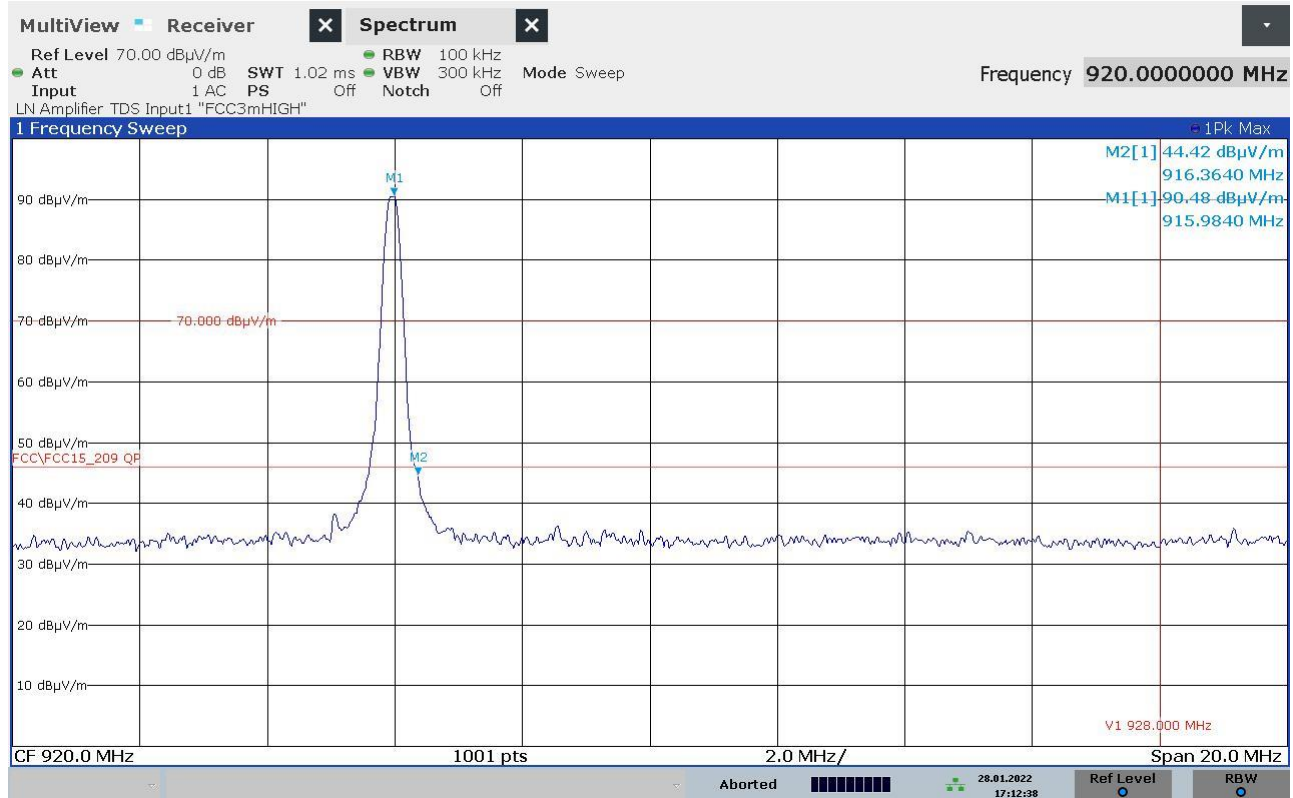

Panozzo 22014005

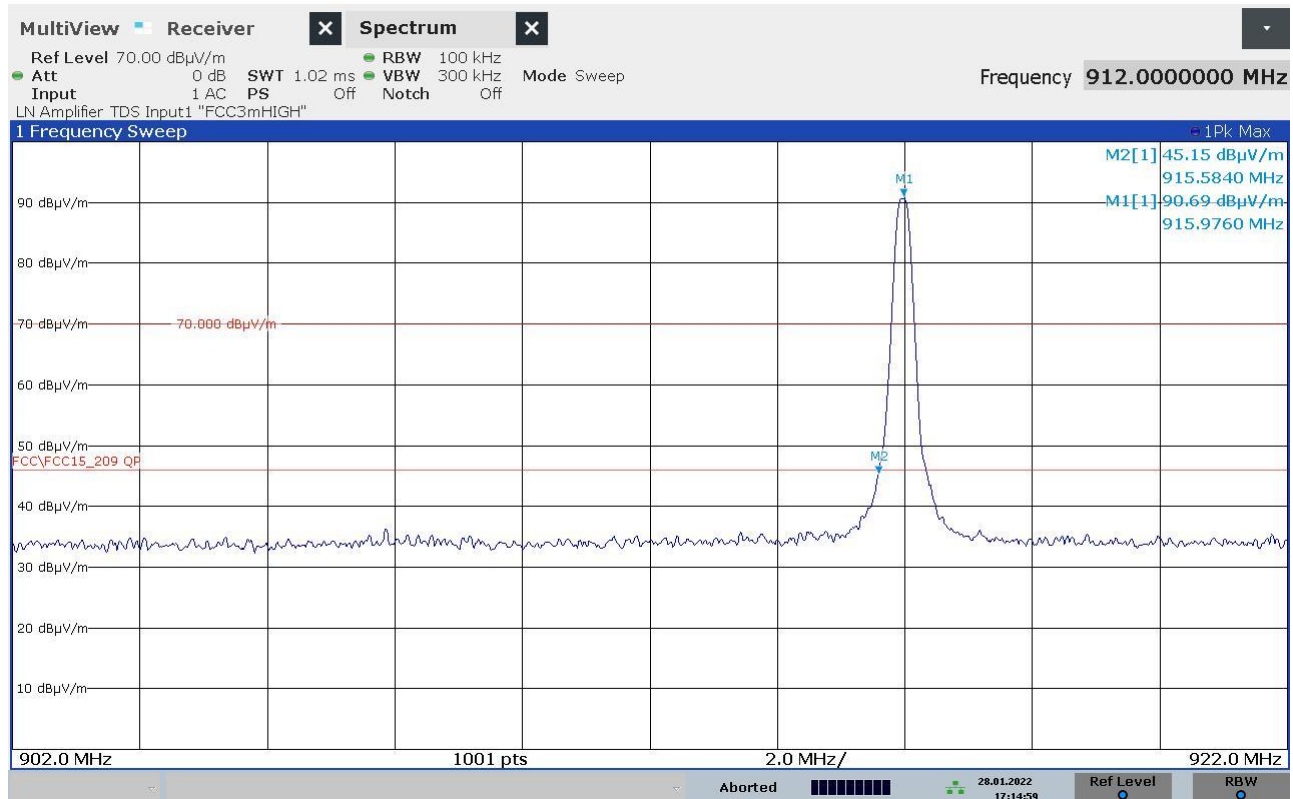

Attachment 1
Instruments list

<i>Id. number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>	<i>Serial number</i>	<i>Last calibration</i>	<i>Due date calibration</i>
CMC S010	Rohde & Schwarz	ESH3-Z2	Impulses Limiting Device	- - -	January '22	January '23
CMC S108	EMCO	3115	Horn Antenna	9811-5622	June '19	June '22
CMC S127	Schaffner	HLA6120	Loop Antenna	1191	November '18	November '23
CMC S200	Schwarzbeck	NSLK 8128	V-LISN	8128-273	January '22	January '23
CMC S206	Rohde & Schwarz	ESCI 7	EMC Receiver 9KHz-7GHz	100781	January '22	January '23
CMC S260	CMC	Wfr_N	Shielded Cable	Wfr_ant10-1	November '21	November '22
CMC S261	CMC	Wfr_N	Shielded Cable	Wfr_ant20-1	November '21	November '22
CMC S262	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix32-1	November '21	November '22
CMC S263	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix31-1	November '21	November '22
CMC S264	CMC	Wfr_N	Shielded Cable	Wfr_ext03-1	November '21	November '22
CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Biconical Antenna (30-300MHz)	831	June '19	June '22
CMC S287	Schwarzbeck	VUSLP 9111B	Log-periodic Antenna (200 MHz-3GHz)	9111B-203	June '19	June '22
CMC S288	CMC	W_sma_white	Joint Shielded Cable	W_001	November '20	November '23
CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz	104059	November '20	November '23
CMC S334	Wainwright Instruments	WHKX12-935-1000-15000-40SS	High Pass Filter 1000MHz	46	December '21	December '22
CMC S353	Rohde & Schwarz	ESW26	Emi Test Receiver 1 Hz - 26.5 GHz	101492	September '20	September '22

Attachment 1
Measurement uncertainty

<i>Test</i>	<i>Test Setup</i>	<i>Expanded uncertainty</i>	<i>Note</i>
Conducted emission CISPR 16 LISN 50uH 0,009-0,0150 MHz	PE001_01	3,4 dB	1
Conducted emission CISPR 16 LISN 50uH 0,150-30,0 MHz	PE001_01	3,0 dB	1
Conducted emission CISPR 16 Voltage Probe 0,15-30 MHz	PE001_02	2,3 dB	1
Conducted emission CISPR 16 Current Probe 0,15-30 MHz	PE001_03	2,6 dB	1
Conducted emission CISPR 16 ISN 0,15-30 MHz	PE001_04	4,7 dB	1
Clic CISPR 16 LISN 50uH 0,150-30,0 MHz	PE001_05	2,9 dB	1
Radiated Emission CDNE 30-300 MHz	PE001_06	3,3 dB	1
Disturbance Power 30-300 MHz	PE002_01	3,8 dB	1
Radiated Emission LAS 0,15-30 MHz	PE003_01	2,0 dB	1
Radiated Emission CISPR 16 Loop Ant. 0,15-30 MHz	PE004_01	4,2 dB	1
Radiated Emission CISPR 16 Bicon. Ant. 30-300 MHz	PE004_02	4,1 dB	1
Radiated Emission CISPR 16 LogP. Ant. 300-1000 MHz	PE004_03	3,9 dB	1
Radiated Emission CISPR 16 Horn Ant. 1-18 GHz	PE004_04	4,1 dB	1
Human Exposure to electromagnetic fields	PE005_01	16,7 %	1
Harmonics	PE006_01	10 mA + 2,9 %	1
Flicker	PE007_01	4,36 %	1
Radiated Immunity 80 MHz - 6 GHz	PE102_XX	2,20 dB 0,87 V/m a 3V/m	1
Conducted Immunity 0,15 - 230 MHz	PE105_XX	1,20 dB 0,44 V a 3V	1
AC Magnetic field	PE106_01	1,55 % 0,15 A/m a 10A/m	1
Pulse Magnetic field	PE107_01	6,23 % 18,7 A/m a 300A/m	1
Dumped Magnetic field	PE108_01	6,23 % 1,87 A/m a 30A/m	1
Common mode conducted immunity	PE112_01	2,16 % 0,22 V a 10V	1

Attachment 1

<i>Test</i>	<i>Test Setup</i>	<i>Expanded uncertainty</i>	<i>Note</i>
Power/Spurious 9kHz-30MHz	PR001_01	4,2 dB	1
Power/Spurious ERP 30-1000MHz d=10m	PR001_02+03	4,7 dB	1
Misura della potenza EIRP 1-18GHz d=3m	PR001_04+05	4,7 dB	1
Misura della potenza EIRP 18-40GHz d=3m	PR001_06	5,4 dB	1
Frequency error	PR002_01+02	< 1x10 ⁻⁷	1
Timing zero span (1001pts.)	PR002_01+02	0,2 % SWT	1
Modulation bandwidth	PR002_01+02	< 1x10 ⁻⁷	1
Conducted RF power and spurious emission	PR002_01+02	1,1 dB	1
Adjacent channel power	PR002_01+02	1,1 dB	1
Blocking	PR002_01+02	1,1 dB	1

<i>Test</i>	<i>Test Setup</i>	<i>Expanded uncertainty</i>	<i>Note</i>
Electrostatic discharge immunity test	PE101_0X		2
Electrical fast transients / burst immunity test	PE103_0X		2
Surge immunity test	PE104_0X		2
Short interruption immunity test	PE109_01		2
Ring Wave immunity test	PE110_01		2
Low frequency immunity test	PE111_01		2
Dumped Oscillatory immunity test	PE113_01		2
<i>Rev_21_01 date 23/02/2021</i>			

Note 1:





The expanded uncertainty reported according to the document EA-4-02 is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of p = 95%

Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor k=2

Attachment 1

Judgement of compliance

Case 1	Case 2	Case 3	Case 4
 <p>The sample complies with the requirements.</p> <p>The measurement results is within the specification limit when the measurement uncertainty is taken into account.</p>	 <p>The sample complies with the requirements.</p> <p>It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.</p>	 <p>The sample does not comply with the requirements.</p> <p>It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.</p>	 <p>The sample does not comply with the requirements.</p> <p>The measurement results is outside the specification limit when the measurement uncertainty is taken into account.</p>

In agreement with ILAC-G8:09/2019 cl.4.2.1 Guidelines on Decision Rules and Statements of Conformity

Quality manual references – Internal procedure

Internal Procedure PM001 rev. 3.1 (Quality Manual)	Measure procedure
Internal Procedure INC_M rev. 9.5 (Quality Manual)	Measurement uncertainty calculation