

# ***FCC TEST REPORT***

**FCC ID** : P5A-B108

**Applicant** : **Areson Technology Corporation**  
12F, No.111-6, Hsing-De Rd. SanChung, Taipei Hsien, Taiwan

**Equipment Under Test (EUT) :**


Product description : Wireless Mouse

Model No. : B108

**Standards** : FCC 15 Subpart C Paragraph 15.227

**Date of Test** : November 29, 2006

**Test Engineer** : Tiger Su

**Reviewed By** : 

PERPARED BY:

**Waltek Services (Shenzhen) Co., Ltd.**

8C, West Tower, Aidi Building, No.5003 Binhe Rd, Futian District, Shenzhen518045,  
Guangdong, China.

Tel: 86-755-83551033

Fax: 86-755-83552400

## 2 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 CONTENTS.....</b>	<b>2</b>
<b>3 TEST SUMMARY.....</b>	<b>5</b>
<b>4 GENERAL INFORMATION.....</b>	<b>6</b>
4.1 CLIENT INFORMATION .....	6
4.2 GENERAL DESCRIPTION OF E.U.T.....	6
4.3 DETAILS OF E.U.T. ....	6
4.4 DESCRIPTION OF SUPPORT UNITS .....	6
4.5 STANDARDS APPLICABLE FOR TESTING.....	6
4.6 TEST FACILITY.....	7
4.7 TEST LOCATION.....	7
<b>5 EQUIPMENT USED DURING TEST .....</b>	<b>8</b>
<b>6 CONDUCTED EMISSION TEST .....</b>	<b>9</b>
6.1 TEST EQUIPMENT.....	9
6.2 TEST PROCEDURE .....	9
6.3 CONDUCTED TEST SETUP .....	10
6.4 EUT OPERATING CONDITION .....	10
6.5 CONDUCTED EMISSION LIMITS .....	11
6.6 CONDUCTED EMISSION TEST RESULT.....	11
<b>7 RADIATION EMISSION TEST.....</b>	<b>12</b>
7.1 TEST EQUIPMENT.....	12
7.2 MEASUREMENT UNCERTAINTY.....	12
7.3 TEST PROCEDURE .....	12
7.4 RADIATED TEST SETUP.....	13
7.5 SPECTRUM ANALYZER SETUP.....	13
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	14
7.7 SUMMARY OF TEST RESULTS.....	14
7.8 EUT OPERATING CONDITION .....	15
7.9 RADIATED EMISSIONS LIMIT.....	15
7.10 RADIATED EMISSIONS TEST RESULT.....	16
7.11 RADIATED EMISSION TEST DATA.....	16
<b>8 OCCUPIED BANDWIDTH .....</b>	<b>17</b>
8.1 TEST PROCEDURE .....	17
<b>9 PHOTOGRAPHS OF TESTING.....</b>	<b>18</b>
9.1 RADIATION EMISSION TEST VIEW .....	18
<b>10 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS .....</b>	<b>19</b>
10.1 EUT - FRONT VIEW .....	19
10.2 EUT - BACK VIEW.....	19
10.3 PCB- FRONT VIEW .....	20

10.4 PCB- BACK VIEW.....20

**11 FCC ID LABEL.....21**

### 3 Test Summary

<b>Test</b>	<b>Test Requirement</b>	<b>Test Method</b>	<b>Class / Severity</b>	<b>Result</b>
Radiated Emission (25MHz to 1GHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	N/A

## **4 General Information**

### **4.1 Client Information**

Applicant: **Areson Technology Corporation**  
Address of Applicant: 12F, No.111-6, Hsing-De Rd. SanChung, Taipei Hsien, Taiwan  
Manufacturer: **Areson Technology Corporation**  
Address: 12F, No.111-6, Hsing-De Rd. SanChung, Taipei Hsien, Taiwan

### **4.2 General Description of E.U.T.**

Product description: Wireless Mouse  
Model No.: B108

### **4.3 Details of E.U.T.**

Power Supply: DC 3V Battery

### **4.4 Description of Support Units**

The EUT has been tested as an independent device unit.

### **4.5 Standards Applicable for Testing**

The customer requested FCC tests for a Wireless Mouse. The standards used were FCC 15 Paragraph 15.227, Paragraph 15.205, Paragraph 15.209, Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

#### **4.6 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 556682**  
SGS-CSTC Standards Technical Services Co., Ltd ShenZhen Branch EMC Lab, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, August 04, 2005.

#### **4.7 Test Location**

All Emissions tests were performed at:-

No.1 Workshop,M-10,Middle Section, Science &Technology Park, ShenZhen, China 518057.

## 5 Equipment Used during Test

Equipment	Brand Name	Model	Cal. Int Months	Last Cal. Date
<b>3m Anechoic chamber</b>				
EMC Analyzer	Agilent	E7402A	12	2006-08-30
EMI Test Receiver	R&S	ESS	12	2006-08-30
Pre Amplifier	Anritsu	MH648A	12	2006-08-30
Bilog Antenna	SCHAFFNER	CBL6111C	12	2006-08-30
Loop Antenna	R&S	6108	12	2006-08-30
AM/FM Stereo Signal Generator	Panasonic	VP-8122A	12	2006-08-30
Signal Generator	R&S	SMG	12	2006-08-30
RF Selector	TOYO	NS4901A	-	-
Turn Disc	HD	DS4150S	-	-
Antenna Mast	HD	MA2400	-	-
<b>EMI Shielded Room</b>				
Spectrum analyzer	ADVANTEST	R3261C	12	2006-08-30
EMI Test Receiver	R&S	ESS	12	2006-08-30
Pre Amplifier	Anritsu	MH648A	12	2006-08-30
LISN	Kyoritsu	KNW-403D	12	2006-08-30
Absorbing Clamp	R&S	MDS-21	12	2006-08-30
Distortion Meter	MEGURO	MAK-6578A	12	2006-08-30
AM/FM Stereo Signal Generator	Panasonic	VP-8122A	12	2006-08-30
Oscilloscope	LEADER	LS1020	12	2006-08-30
Function Generator	National	VP-7422A	12	2006-08-30
Signal Generator	R&S	SMG	12	2006-08-30
RF Selector	TOYO	NS4000	-	-
Remote Controller	TOYO	MAC	-	-

## 6 Conducted Emission Test

Product Name:	Wireless Mouse
Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:	.....
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

### 6.1 Test Equipment

Please refer to Section 5 this report.


### 6.2 Test Procedure

1. The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.
2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.



### 6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

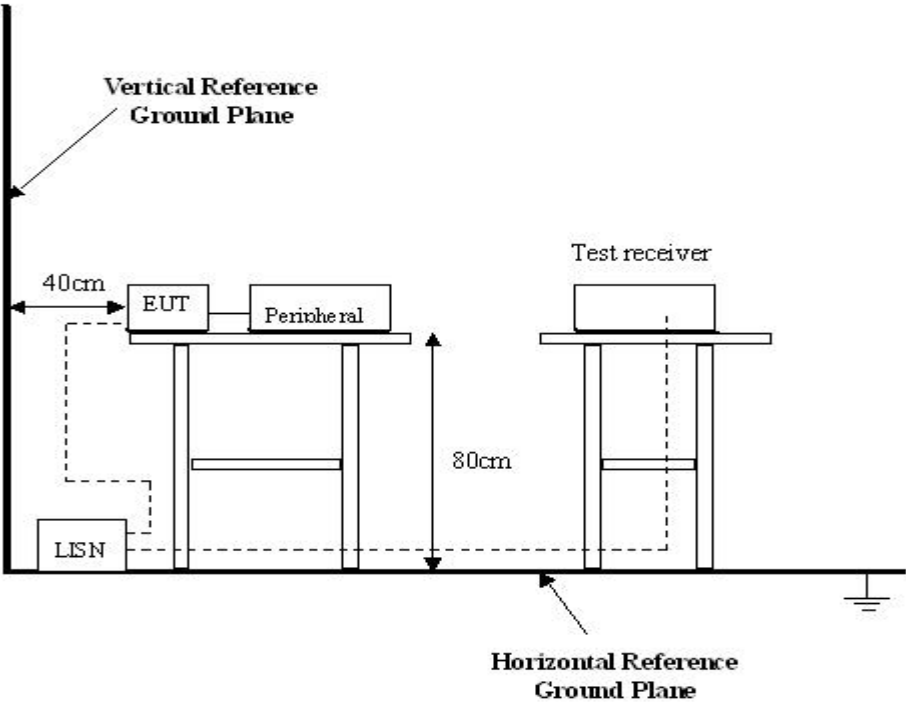

### 6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4:2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

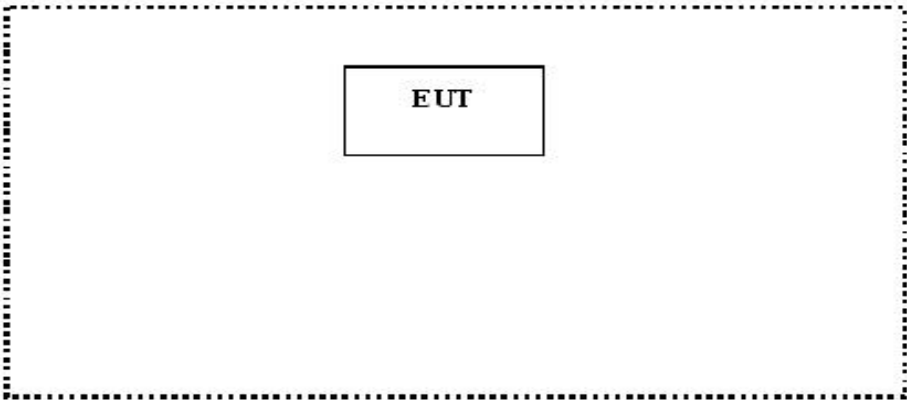

## **6.5 Conducted Emission Limits**

66-56 dB $\mu$ V/m between 0.15MHz & 0.5MHz

56 dB $\mu$ V/m between 0.5MHz & 5MHz

60 dB $\mu$ V/m between 5MHz & 30MHz

**Note:** In the above limits, the tighter limit applies at the band edges.

## **6.6 Conducted Emission Test Result**

Owing to the DC operation of EUT, this test is not performed.

## 7 Radiation Emission Test

Product Name:	Wireless Mouse
Test Requirement:	FCC Part15 Paragraph 15.227
Test Method:	Based on FCC Part15 Paragraph 15.33
Test Date:	November 29, 2006
Frequency Range:	25MHz to 1GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

### 7.1 Test Equipment

Please refer to Section 5 this report.

### 7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4:2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at SGS EMC Lab is +4.0 dB.

### 7.3 Test Procedure

1. For the radiated emissions test, since the EUT does not have a power source, there was no connection to AC outlets.
2. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
3. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB $\mu$ V of specification limits), and are distinguished with a "Qp" in the data table.
4. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

**7.4 Radiated Test Setup**

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.209, Paragraph 15.227 limits.

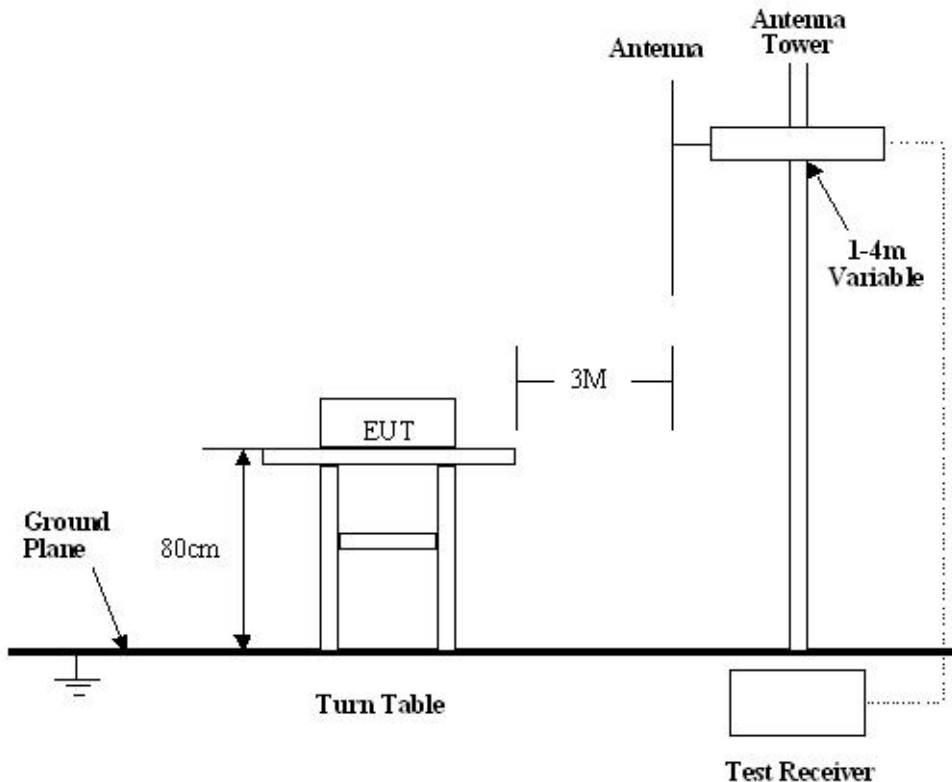

**7.5 Spectrum Analyzer Setup**

According to FCC Part15 Paragraph 15.227 Rules, the system was tested to 1000 MHz.

- Start Frequency .....25 MHz
- Stop Frequency .....1000 MHz
- Sweep Speed Auto
- IF Bandwidth .....100 kHz
- Video Bandwidth .....1 MHz
- Quasi-Peak Adapter Bandwidth .....120 kHz
- Quasi-Peak Adapter Mode.....Normal
- Resolution Bandwidth .....1MHz

## 7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB $\mu$ V means the emission is 7dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

## 7.7 Summary of Test Results

According to the data in section 7.10, the EUT complied with the FCC Part15 Paragraph 15.227 standards.

**7.8 EUT Operating Condition**

Same as section 6.4 of this report.

**7.9 Radiated Emissions Limit**

**A. FCC Part 15 subpart C Paragraph 15.227 Limit**

Fundamental Frequency(MHZ)	Field Strength of Fundamental
	dBuV/m
27.045	80

**Note:**(1) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

**B. Frequencies in restricted band are complied to limit on Paragraph 15.209**

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

**Note:** (1)  $RF\ Voltage(dBuV) = 20 \log RF\ Voltage(uV)$   
 (2) In the Above Table, the tighter limit applies at the band edges.  
 (3) Distance refers to the distance in meters between the measuring instrument antenna.

**7.10 Radiated Emissions Test Result**

Formula of conversion factors:the field strength at 3m was established by adding  
 The meter reading of the spectrum analyer (which is set to read in units of dBuV)  
 To the antenna correction factor supplied by the antenna manufacturer. The antenna  
 Correction factors are stared in terms of dB.The gain of the pressletor was accounted  
 For in the spectrum analyser meter reading.

Example:

$$\text{Freq(MHz) Meter Reading +ACF=FS}$$

$$33 \quad 20\text{dBuV}+10.36\text{dB}=30.36\text{dBuV/m @3m}$$

**7.11 Radiated Emission Test Data**

Test Item: Radiated Emission Test Data  
 Test Voltage: DC 3V Battery  
 Test Mode: TX On  
 Temperature: 24 °C  
 Humidity: 52%RH  
 Test Result: PASS

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	FCC 15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
27.045	Vertical	56.0	80.0	24.0	1.5	120
27.045	Horizontal	55.1	80.0	24.9	1.5	60
54.090	Horizontal	26.1	40.0	13.9	1.5	60
81.135	Horizontal	19.5	40.0	20.5	1.8	120
108.180	Horizontal	19.3	43.5	24.2	1.8	140
54.090	Vertical	26.0	40.0	14.0	1.5	60
81.135	Vertical	20.6	40.0	19.4	1.8	60
108.180	Vertical	18.3	43.5	25.2	1.5	180


## 8 Occupied Bandwidth

Rules of test : FCC Part15.227  
 Test Date: November 29, 2006  
 Test mode: TX On  
 Temperature: 24 °C  
 Humidity: 52%RH

### 8.1 Test Procedure

1. The field strength of any emissions which appear outside of the band shall not exceed the general radiated emission limits in section 15.209.
2. The useful radiated emission form the EUT was detected by the spectrum analyser with peak detector.



The graph as below.

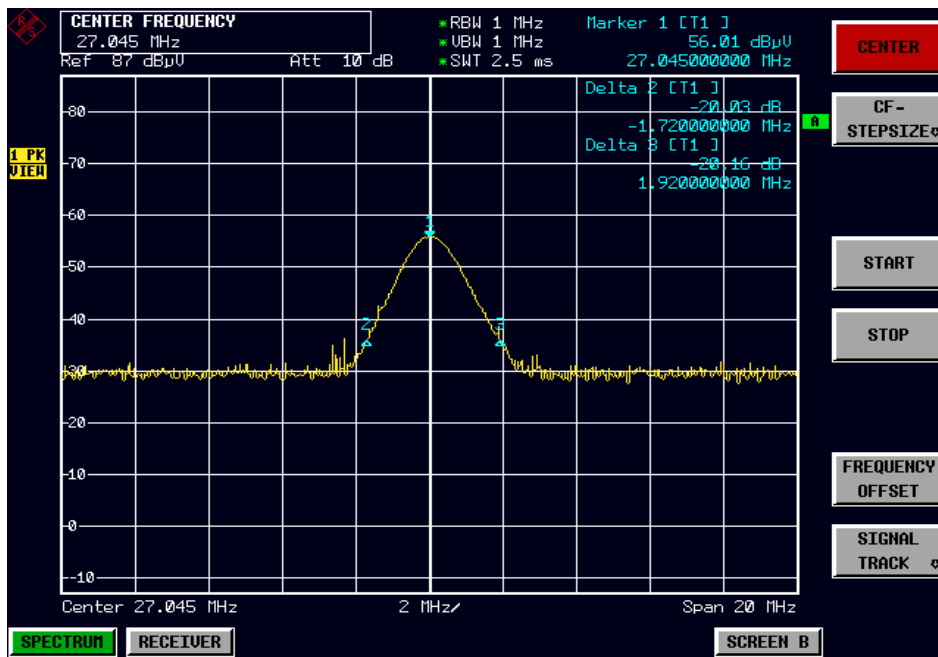



## 9 Photographs of Testing

### 9.1 Radiation Emission Test View

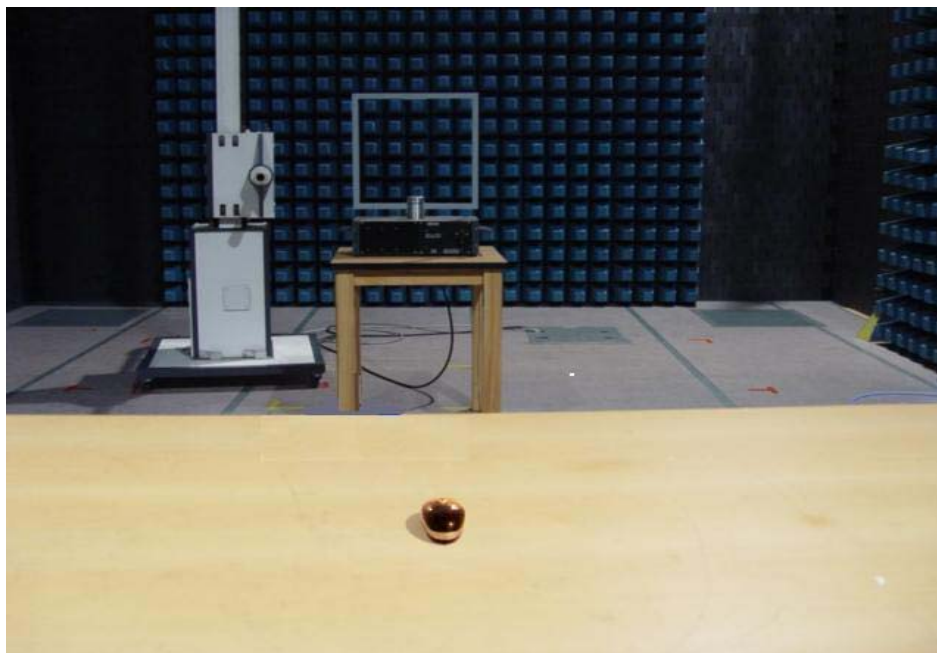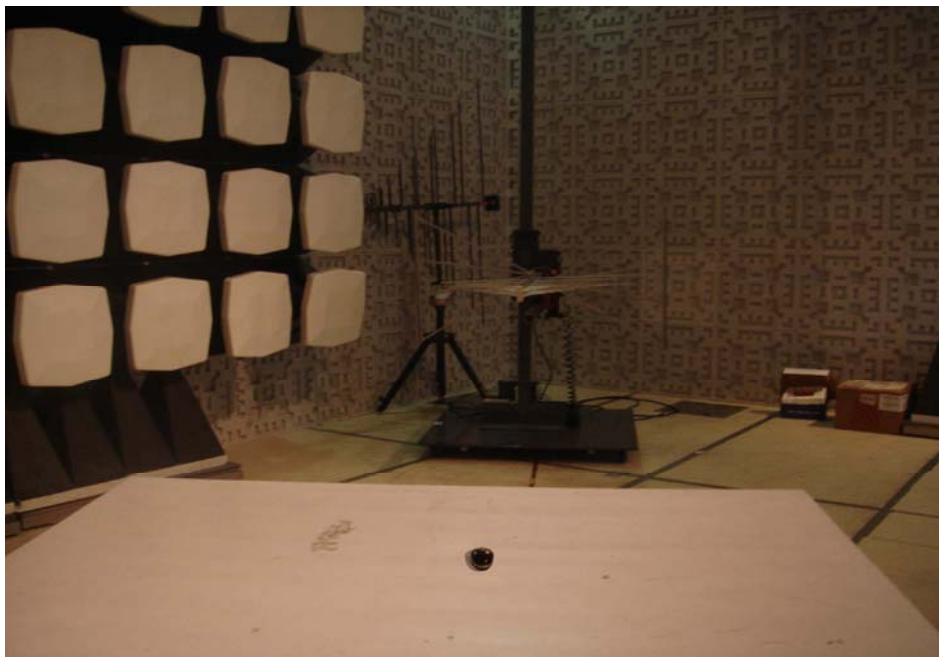

## 10 Photographs - Constructional Details


### 10.1 EUT - Front View



### 10.2 EUT - Back View



### 10.3 PCB- Front View

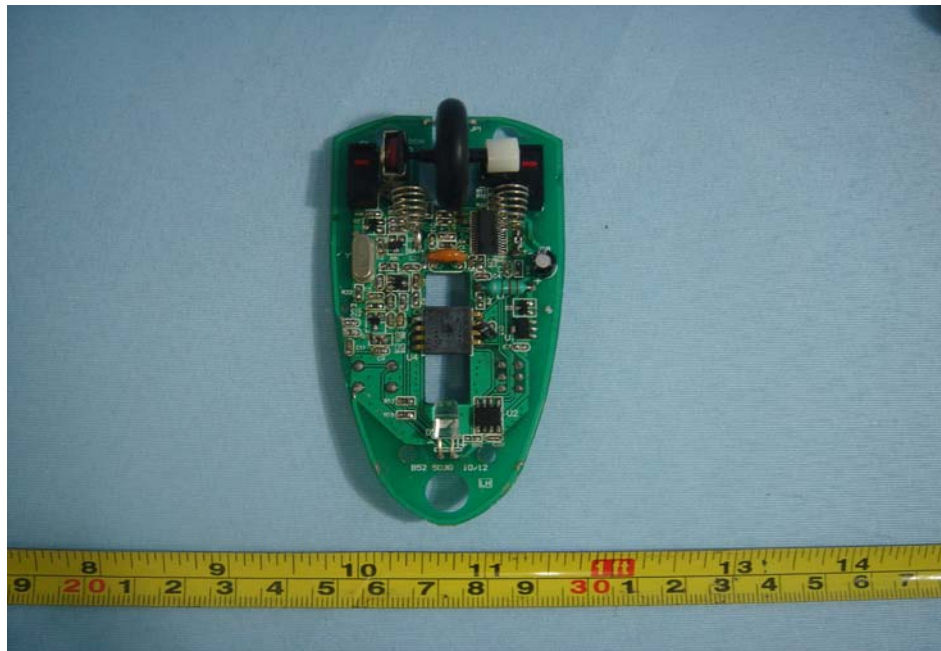

### 10.4 PCB- Back View



## 11 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT  
EUT Bottom View/proposed FCC Mark Location

