

Test Report No.50093269 002

Appendix D: Radiated Spurious Emission Data

(File: 50093269AppendixD)


Contents

Spurious Emissions, Band Edges, 2.35-2.5G	2
Spurious Emissions, TX Mode, 1-18G.....	6
Spurious Emissions, TX Mode, 18-26G.....	12
Spurious Emissions, TX Mode, 9k-1G.....	18
Spurious Emissions, RX Mode, 1-18G	22
Spurious Emissions, RX Mode, 18-26G	24
Spurious Emissions, RX Mode, 9k-1G	26


Spurious Emissions, Band Edges, 2.35-2.5G

Radiated Bandedge (GFSK)

Low Channel (Hor)

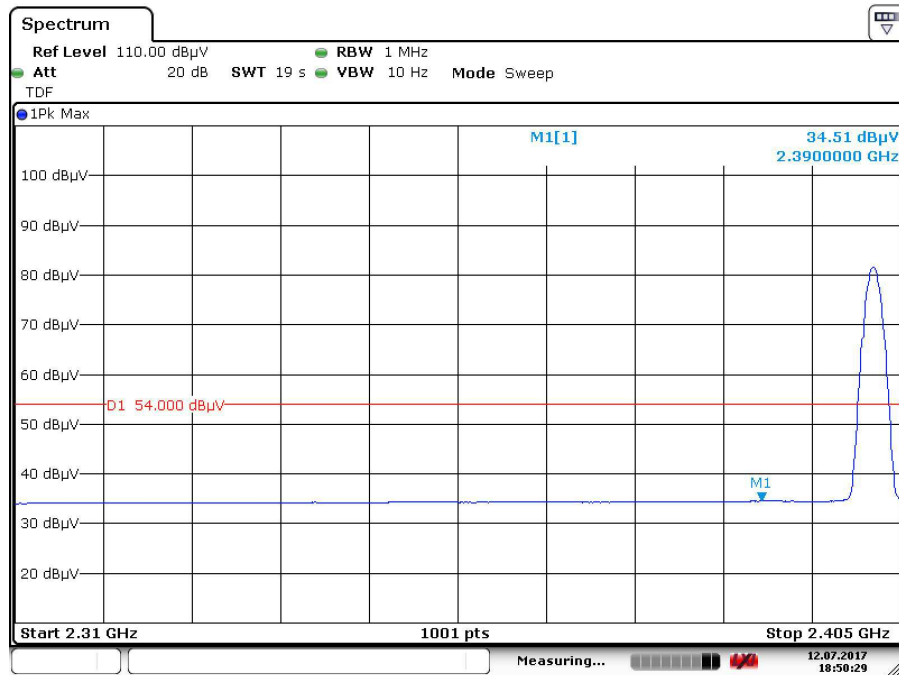


Date: 12.JUL.2017 18:50:29

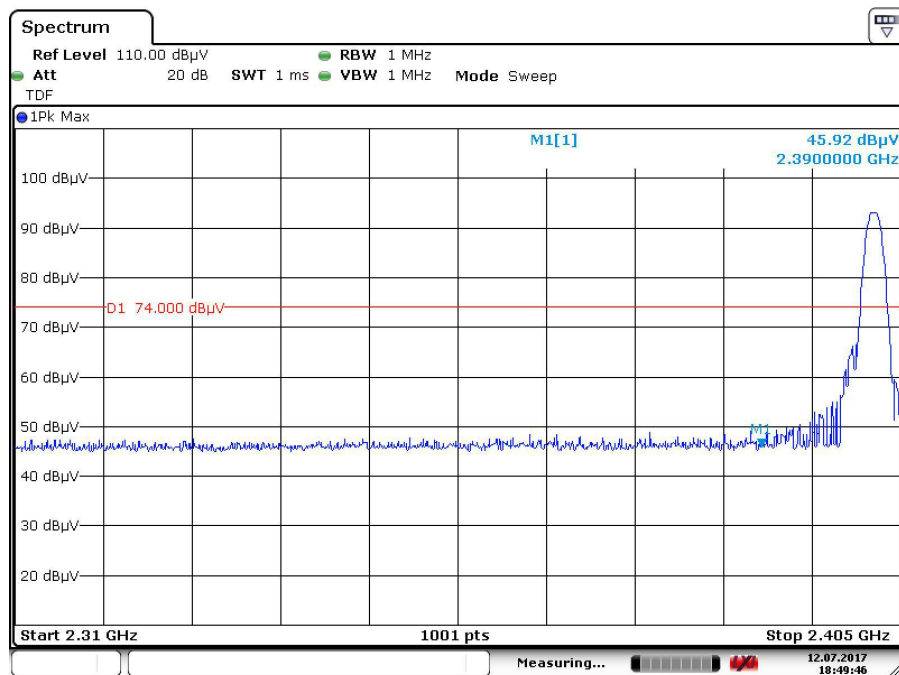


Date: 12.JUL.2017 18:49:46

Spurious Emissions, Band Edge, 2.35-2.5G

Low Channel (Ver)

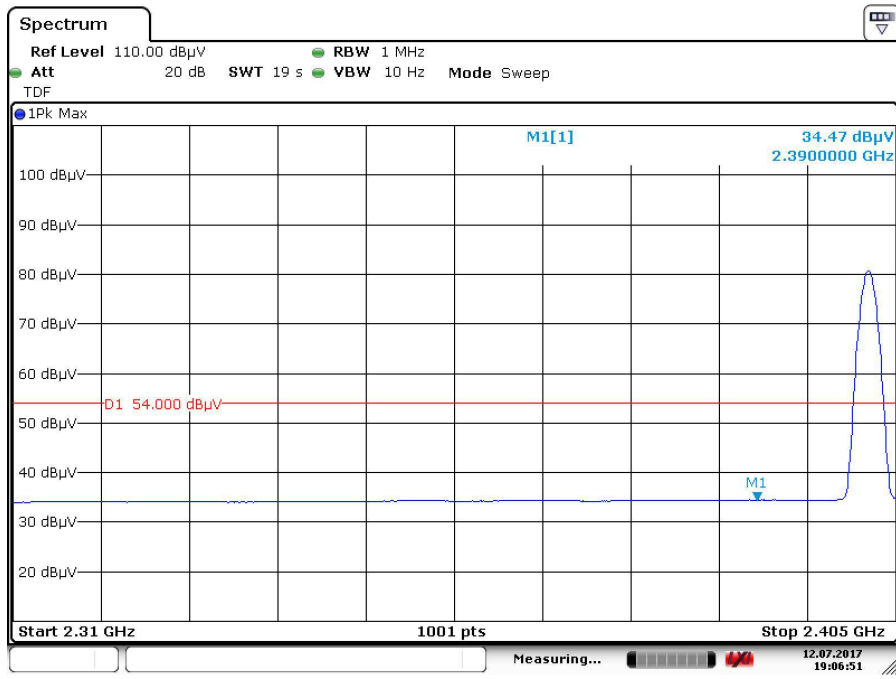

Date: 12.JUL.2017 19:06:51

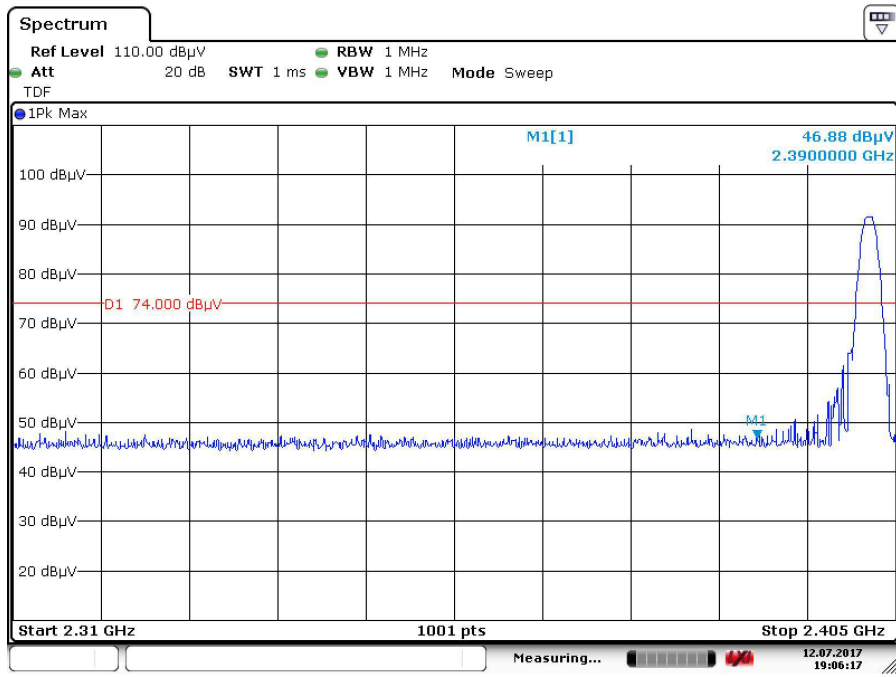


Date: 12.JUL.2017 19:06:17


Spurious Emissions, Band Edge, 2.35-2.5G

Radiated Bandedge (GFSK)

High Channel (Hor)

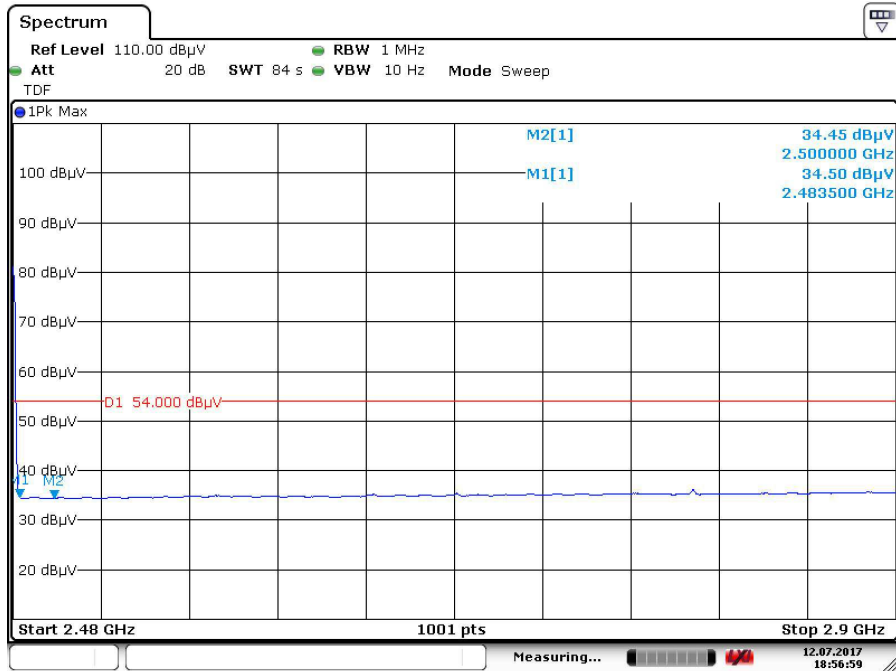



Date: 12.JUL.2017 18:56:59

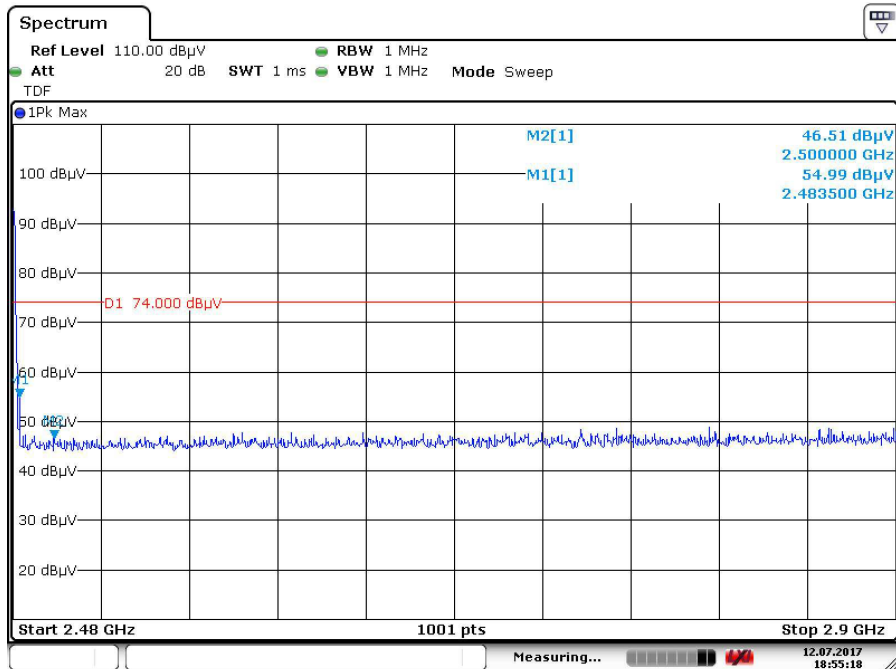

Date: 12.JUL.2017 18:55:18

Spurious Emissions, Band Edge, 2.35-2.5G

High Channel (Ver)

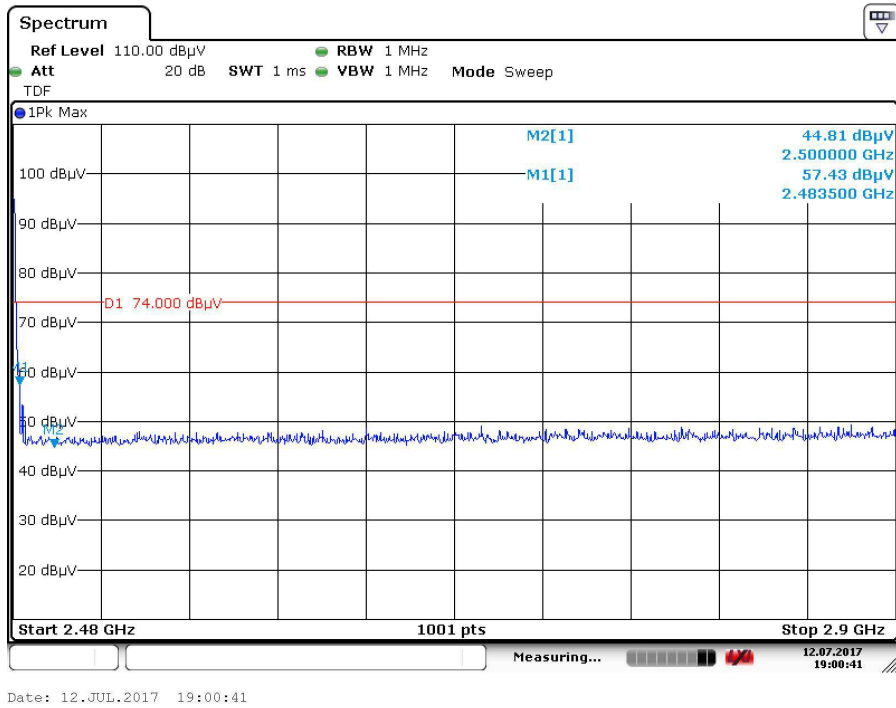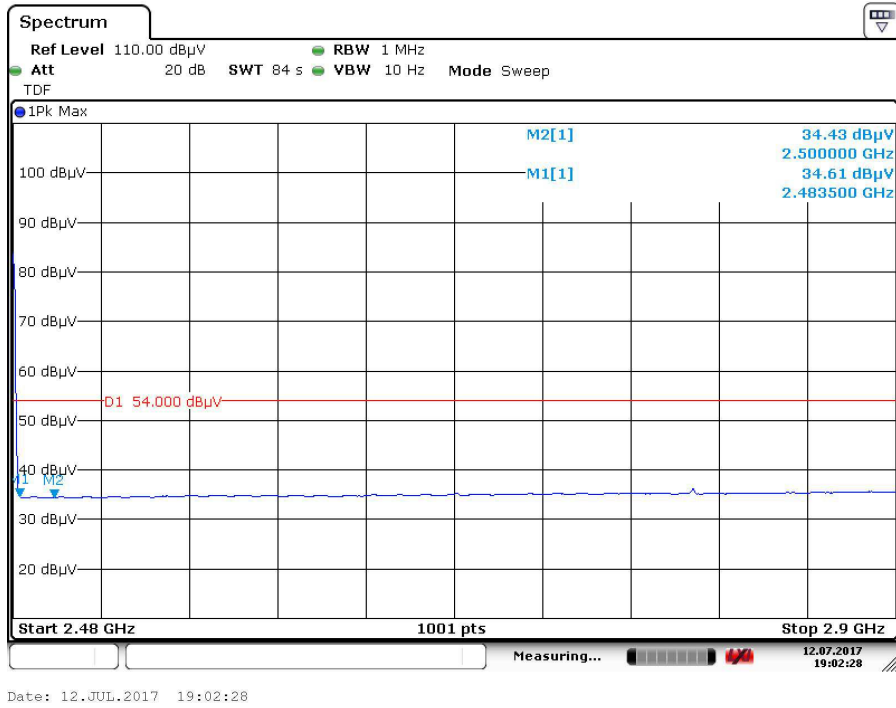


Spurious Emissions, Band Edge, 2.35-2.5G

Spurious Emissions, TX Mode, 1-18G




TÜV Rheinland Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

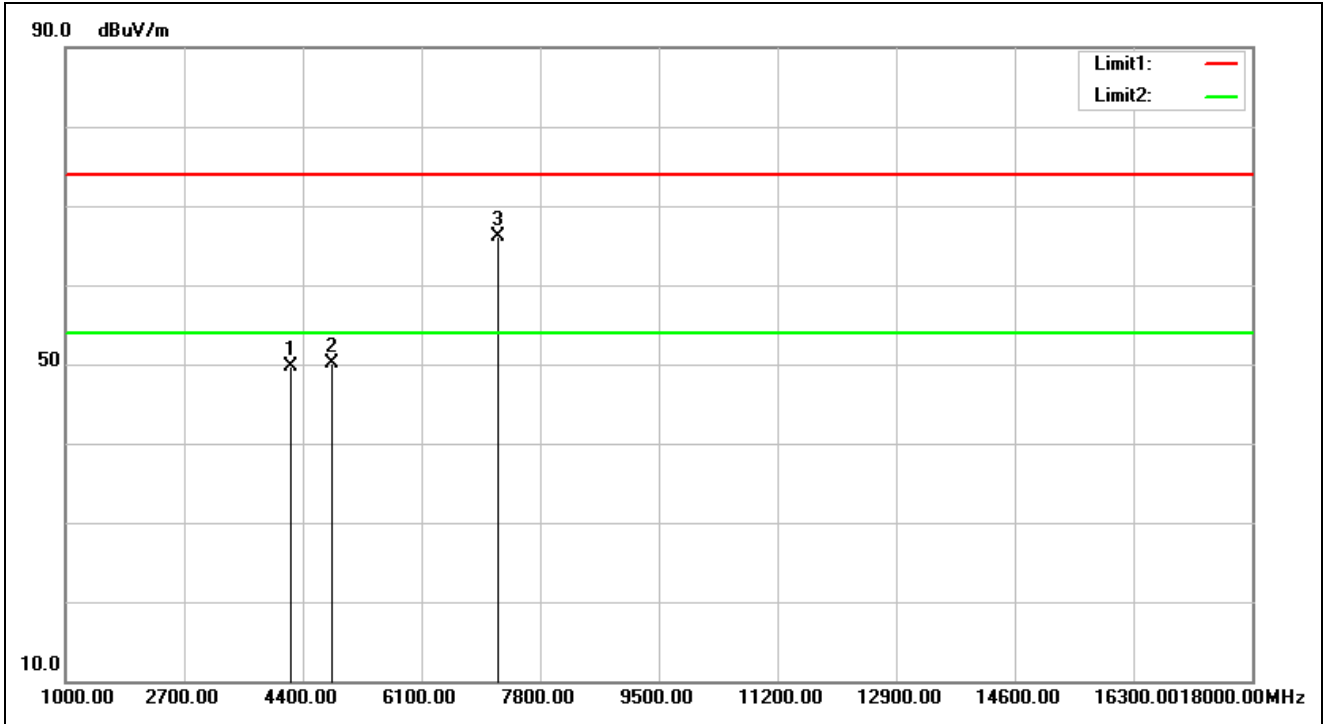

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/7/25 11:52:03
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2402-TX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4230.000	-1.71	51.39	49.68	74.00	-24.32	peak	100	280	
2	4804.000	0.43	49.58	50.01	74.00	-23.99	peak	100	0	
3	7206.000	9.11	57.06	66.17	74.00	-7.83	peak	100	66	


Remark: Average = Peak result – duty cycle factor (20dB)

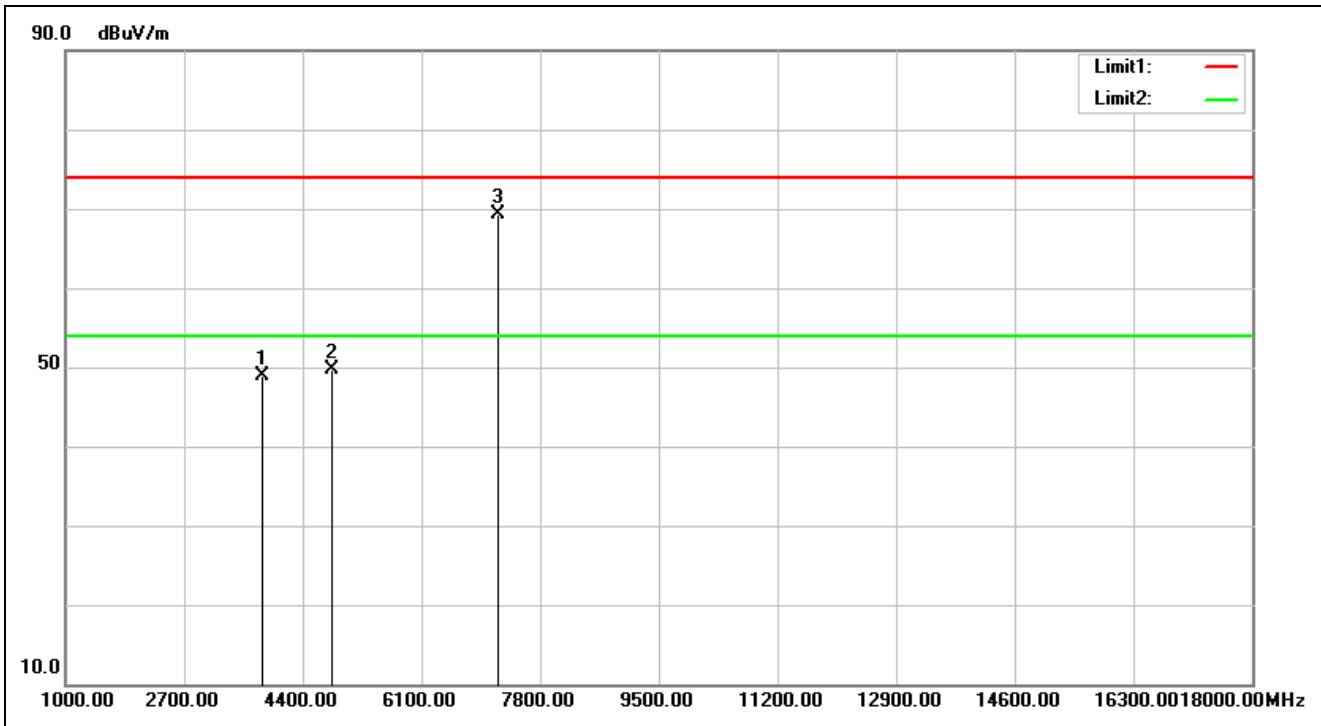

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/7/25 11:53:06
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2402-TX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3822.000	-3.01	51.83	48.82	74.00	-25.18	peak	100	209	
2	4804.000	0.43	49.29	49.72	74.00	-24.28	peak	100	0	
3	7206.000	9.11	60.26	69.37	74.00	-4.63	peak	100	59	


Remark: Average = Peak result – duty cycle factor (20dB)

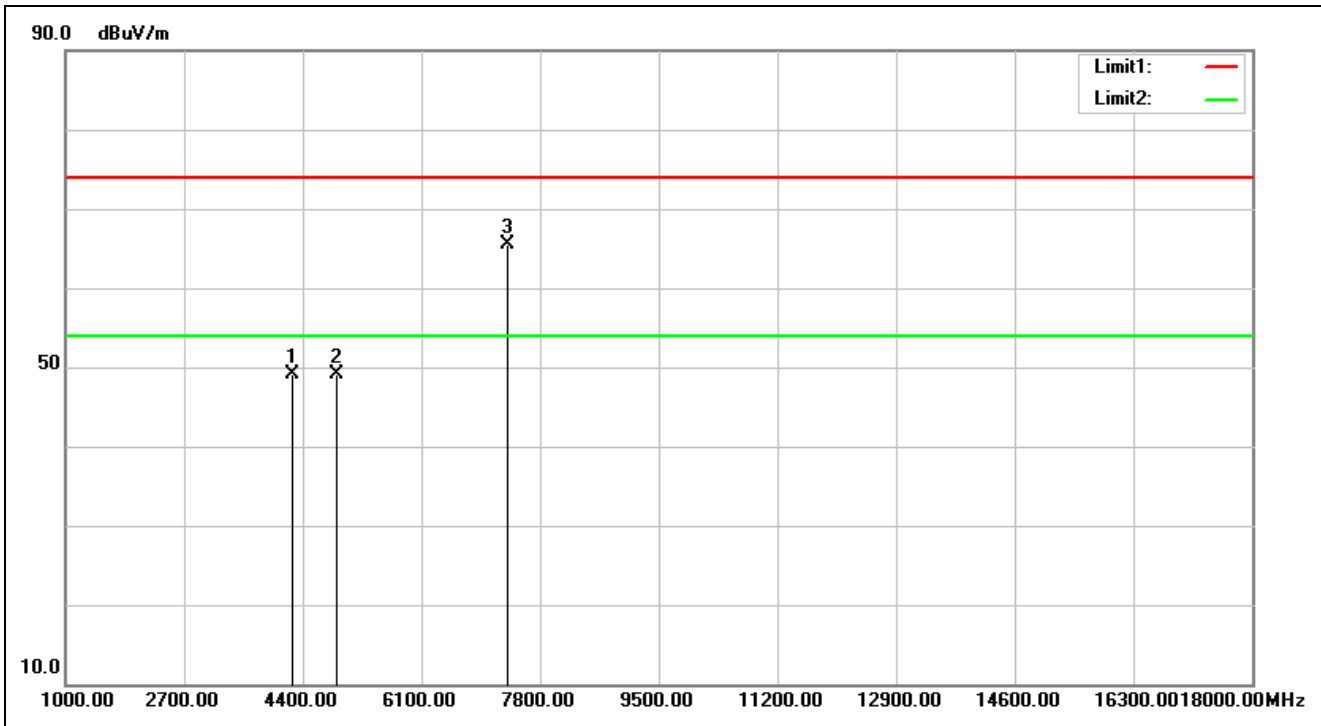

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/7/25 13:17:55
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2441-TX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4247.000	-1.63	50.67	49.04	74.00	-24.96	peak	100	78	
2	4882.000	0.67	48.39	49.06	74.00	-24.94	peak	100	0	
3	7323.000	9.45	56.06	65.51	74.00	-8.49	peak	100	53	


Remark: Average = Peak result – duty cycle factor (20dB)

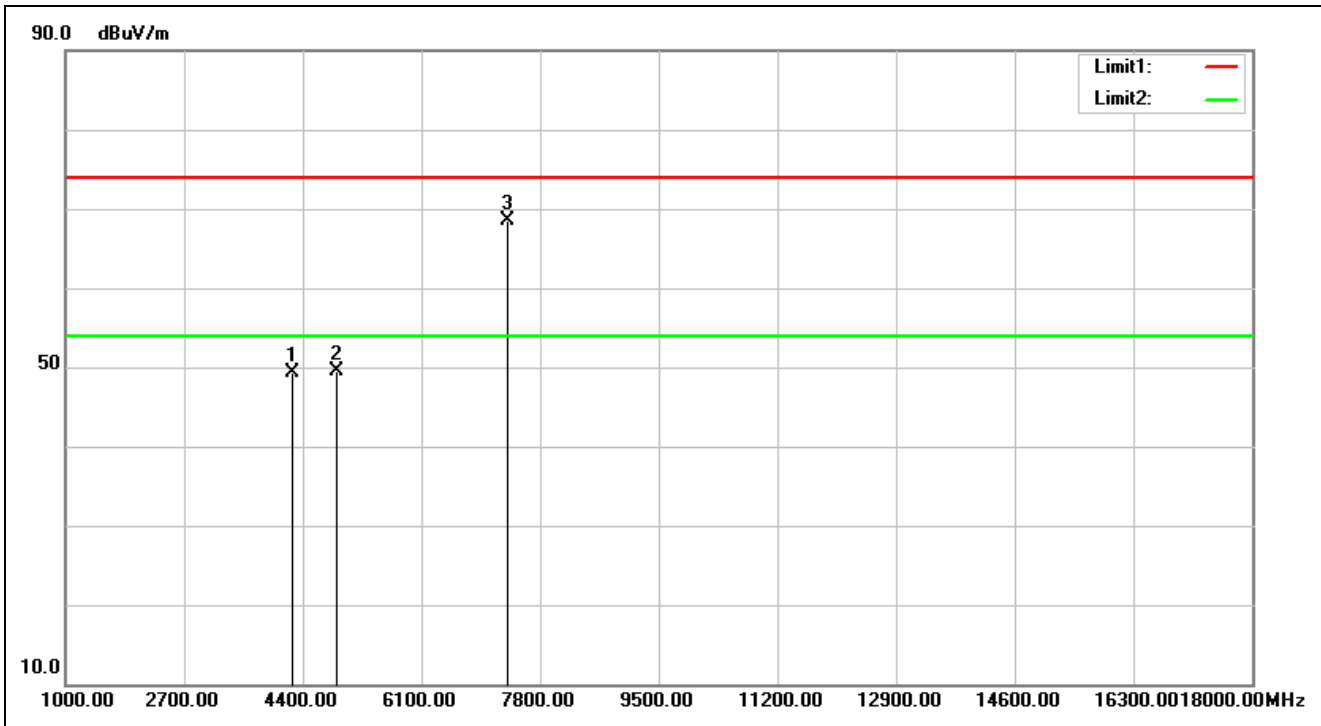

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/7/25 13:18:58
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2441-TX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4247.000	-1.63	50.87	49.24	74.00	-24.76	peak	100	348	
2	4882.000	0.67	48.82	49.49	74.00	-24.51	peak	100	0	
3	7323.000	9.45	58.97	68.42	74.00	-5.58	peak	100	52	


Remark: Average = Peak result – duty cycle factor (20dB)

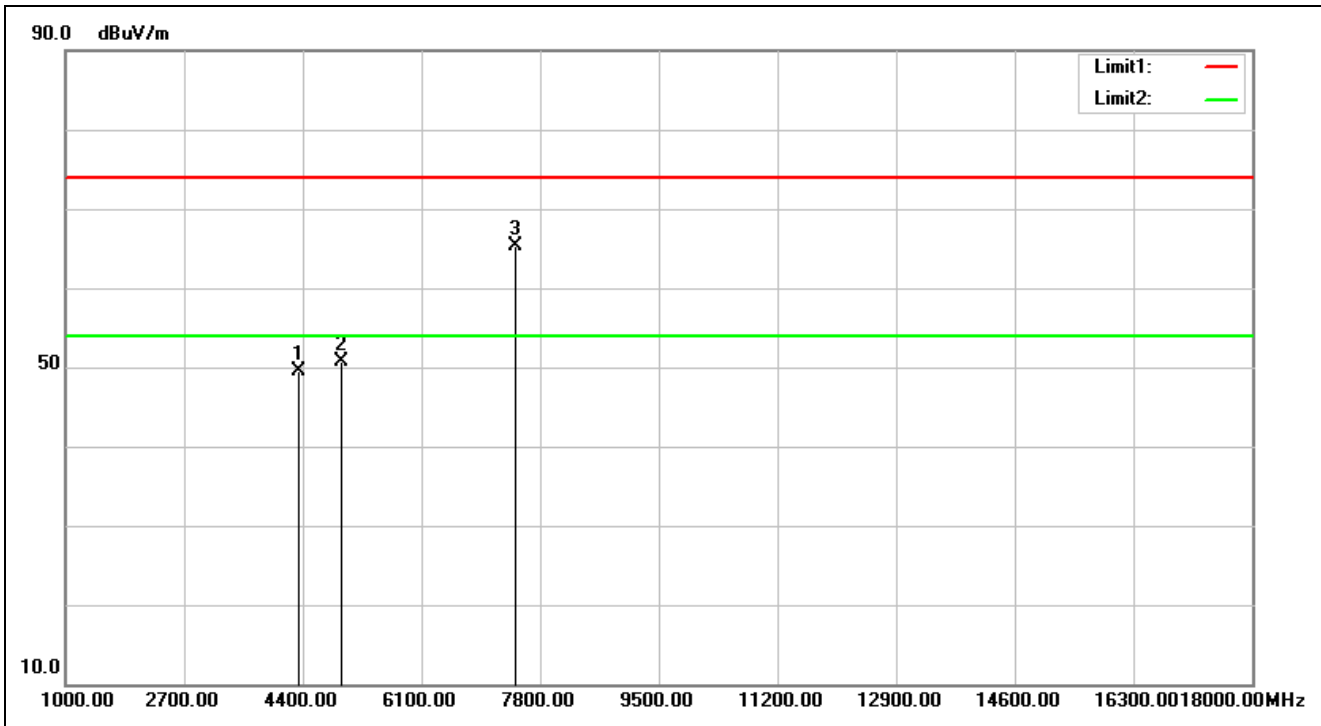

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/7/25 13:21:22
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2480-TX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4332.000	-1.24	50.77	49.53	74.00	-24.47	peak	100	192	
2	4960.000	0.90	49.82	50.72	74.00	-23.28	peak	100	0	
3	7443.000	9.79	55.50	65.29	74.00	-8.71	peak	100	175	

Remark: Average = Peak result – duty cycle factor (20dB)

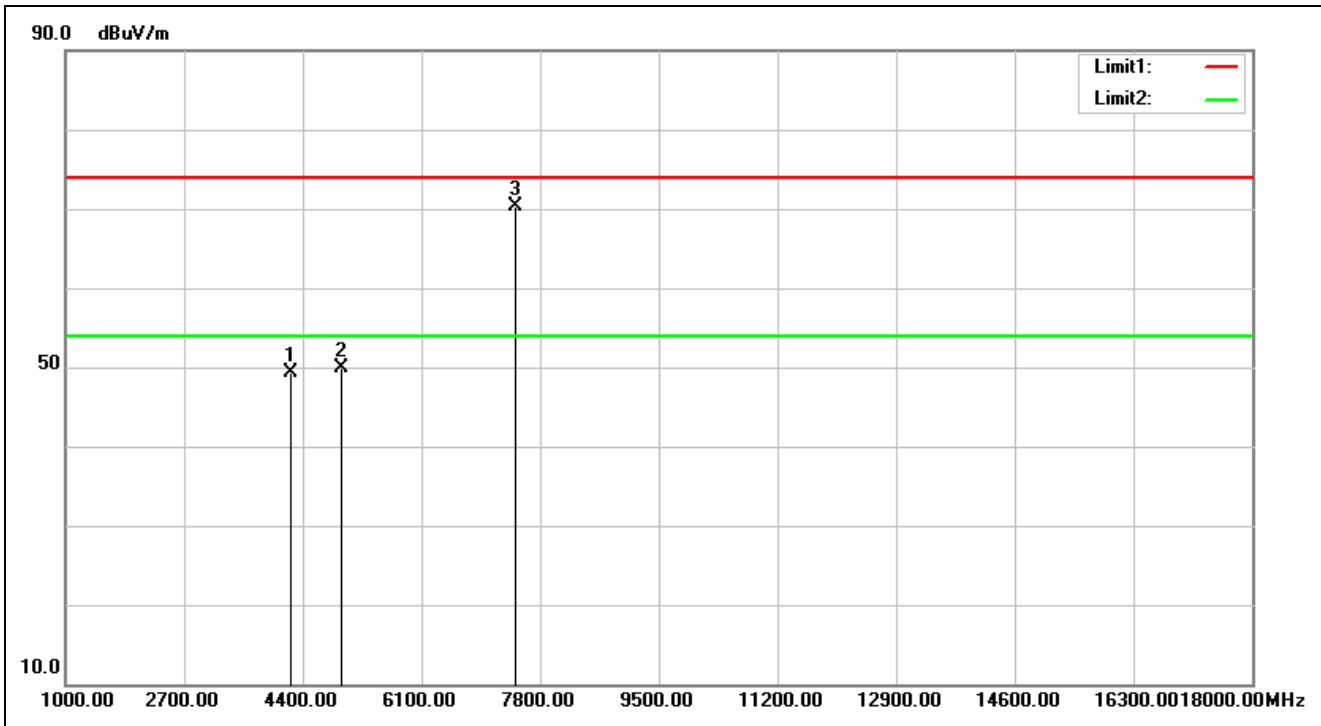

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/7/25 13:22:24
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2480-TX		
Remark:	Areson BT tool 1.03d		


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4230.000	-1.71	51.01	49.30	74.00	-24.70	peak	100	213	
2	4960.000	0.90	49.05	49.95	74.00	-24.05	peak	100	0	
3	7443.000	9.79	60.51	70.30	74.00	-3.70	peak	100	360	

Remark: Average = Peak result – duty cycle factor (20dB)

Spurious Emissions, TX Mode, 18-26G




TUV Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

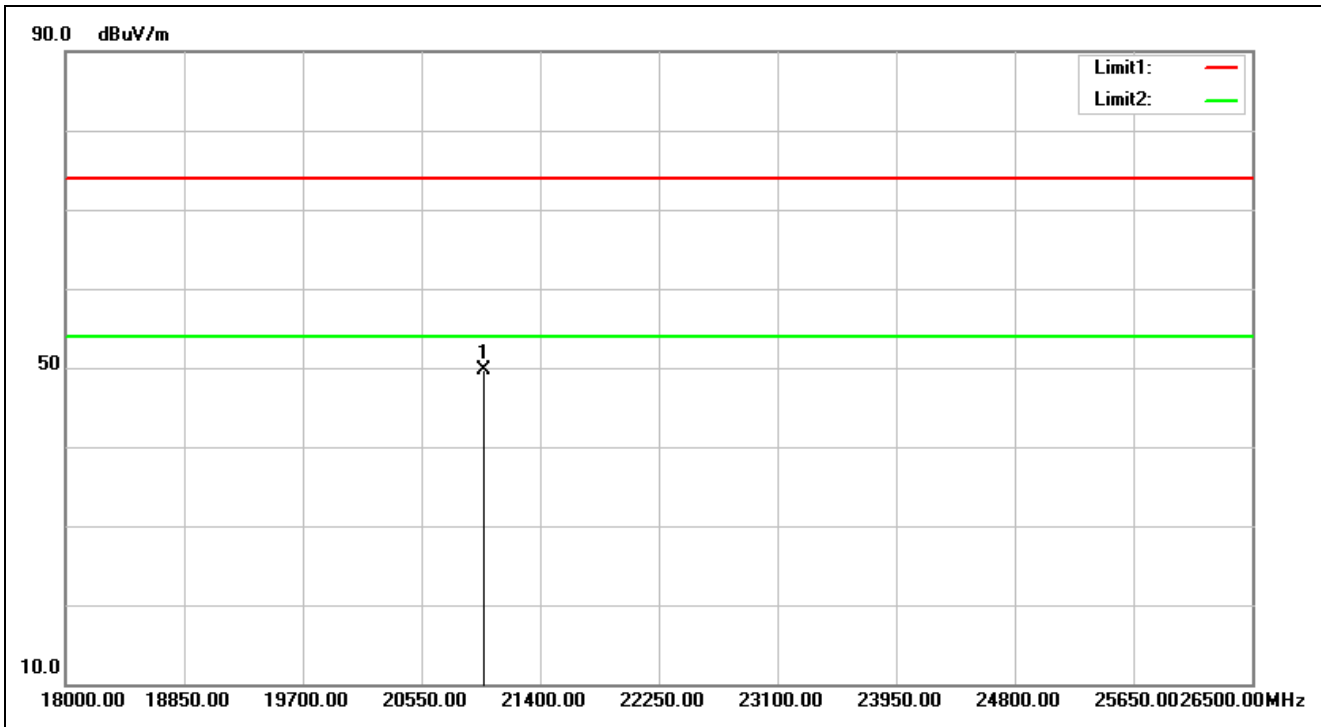

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/7/25 13:42:10
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2402-TX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20992.000	31.47	18.31	49.78	74.00	-24.22	peak	100	215	


Remark: Average = Peak result – duty cycle factor (20dB)

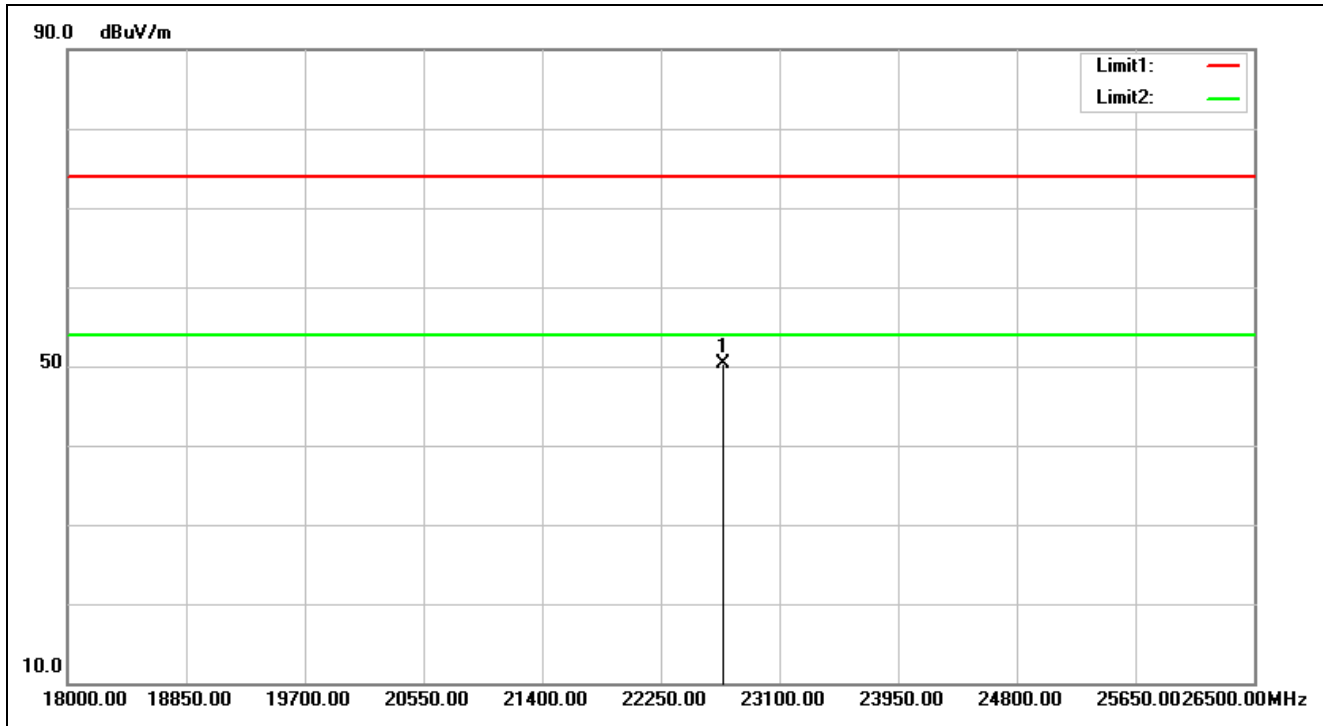

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/7/25 13:42:21
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2402-TX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22692.000	32.28	18.10	50.38	74.00	-23.62	peak	100	14	


Remark: Average = Peak result – duty cycle factor (20dB)

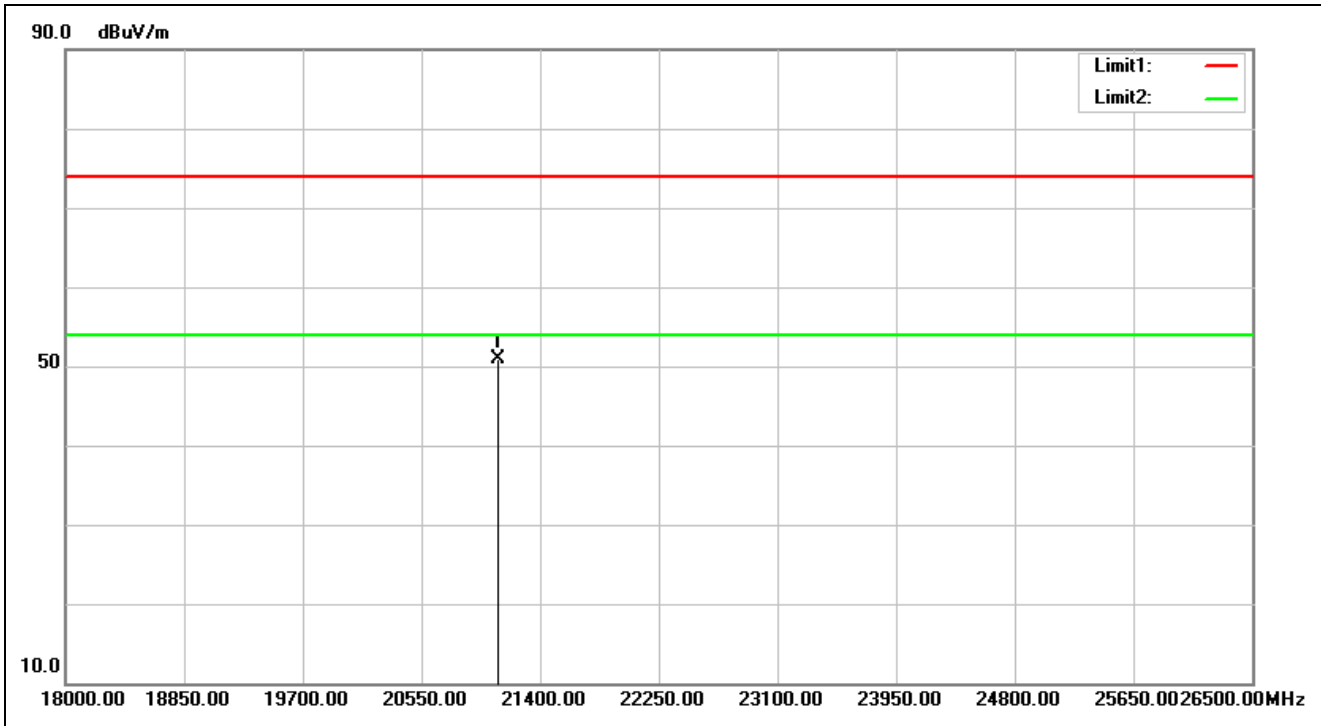

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/7/25 13:42:37
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2441-TX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21102.500	31.62	19.28	50.90	74.00	-23.10	peak			


Remark: Average = Peak result – duty cycle factor (20dB)

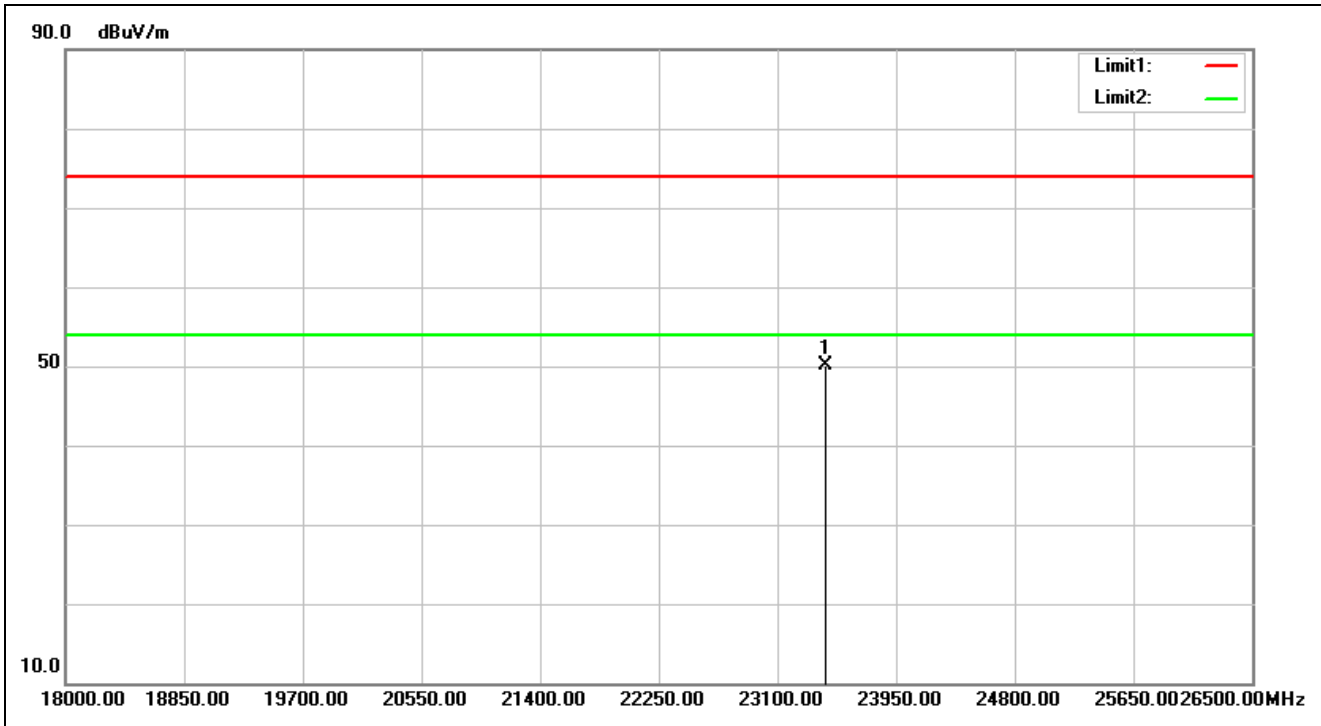

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/7/25 13:42:46
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2441-TX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23448.500	32.53	17.61	50.14	74.00	-23.86	peak			


Remark: Average = Peak result – duty cycle factor (20dB)

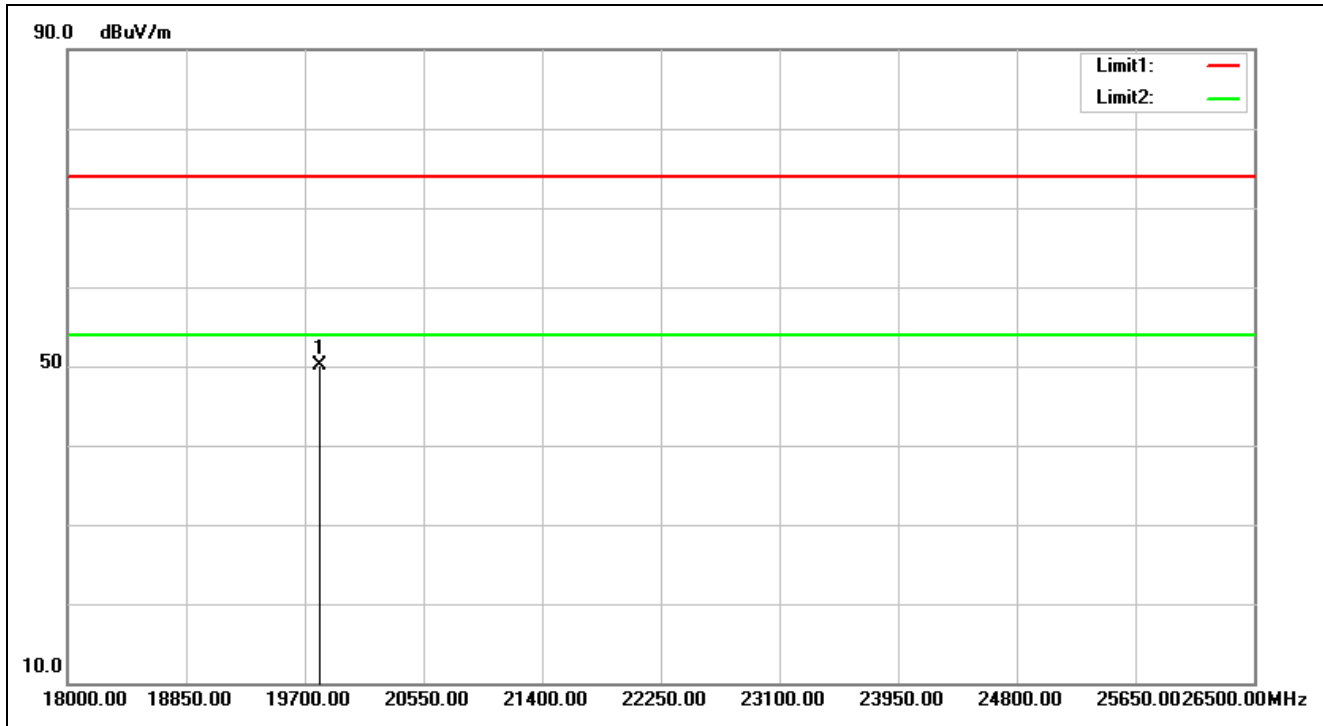

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/7/25 13:43:01
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2480-TX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	19802.000	30.51	19.54	50.05	74.00	-23.95	peak			

Remark: Average = Peak result – duty cycle factor (20dB)

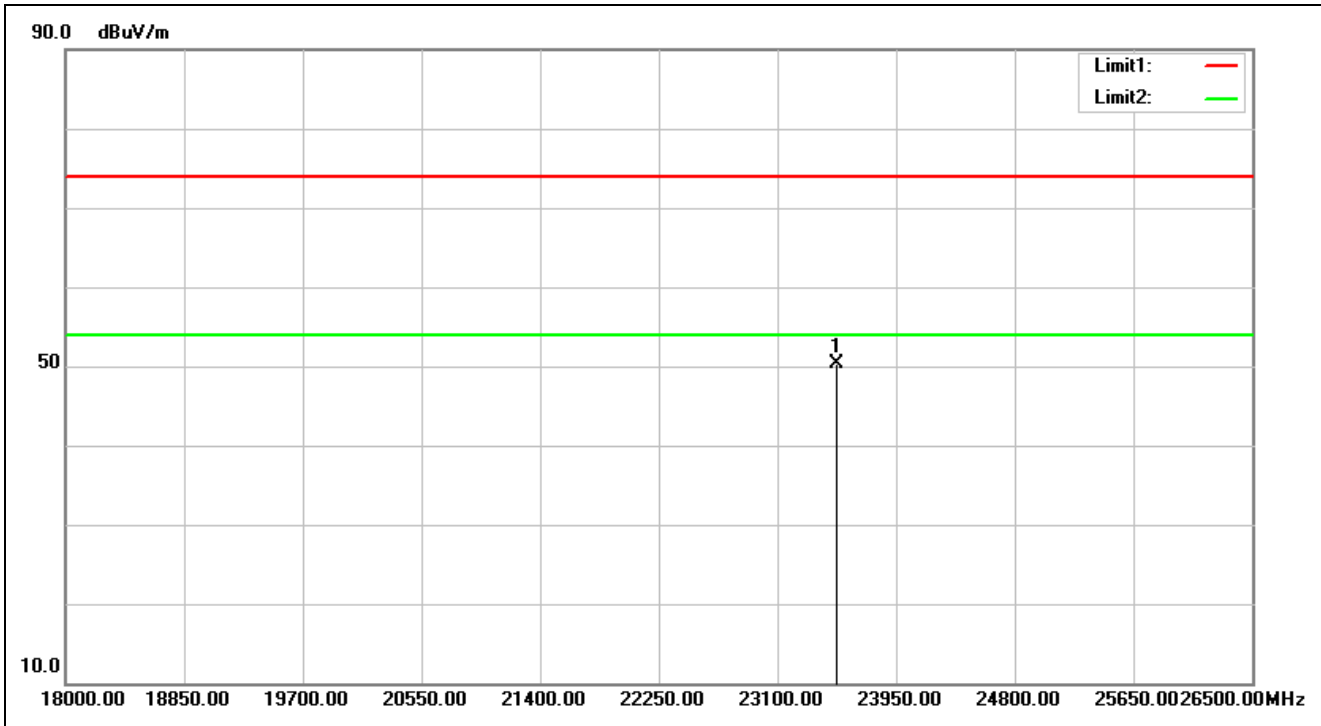

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/7/25 13:43:09
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2480-TX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23525.000	32.54	17.74	50.28	74.00	-23.72	peak			

Remark: Average = Peak result – duty cycle factor (20dB)


Spurious Emissions, TX Mode, 9k-1G



TÜV Rheinland Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

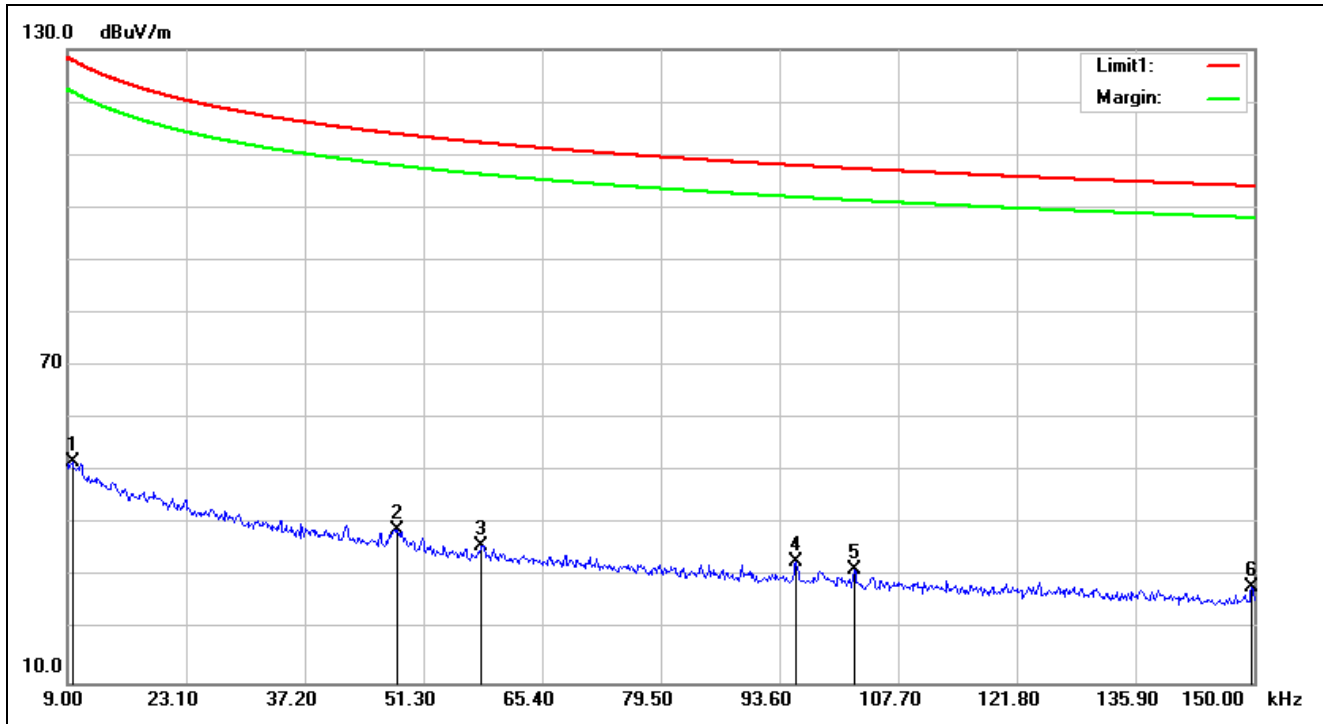

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2017/7/25 14:27:20
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2441-TX		
Remark:	Areson BT tool 1.03d		


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0095	19.73	32.03	51.76	128.03	-76.27	QP	100	328	
2	0.0481	19.50	19.46	38.96	113.95	-74.99	QP	100	248	
3	0.0582	19.38	16.72	36.10	112.30	-76.20	QP	100	224	
4	0.0955	19.16	13.73	32.89	108.00	-75.11	QP	100	357	
5	0.1024	19.13	12.34	31.47	107.39	-75.92	QP	100	275	
6	0.1497	19.08	9.22	28.30	104.09	-75.79	QP	100	338	

Spurious Emissions, TX Mode, 30M-1G

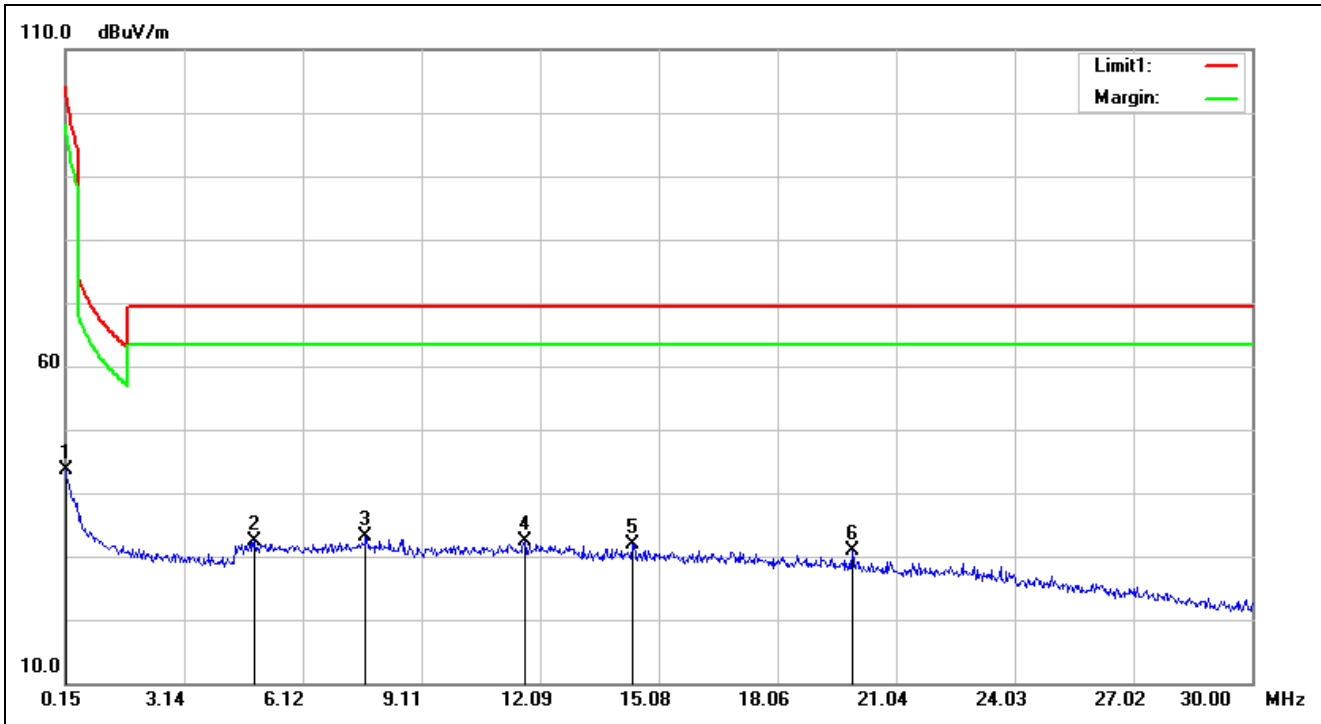


Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2017/7/25 14:30:35
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2441-TX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.1500	19.08	24.43	43.51	104.08	-60.57	QP	100	83	
2	4.8961	19.70	12.65	32.35	69.50	-37.15	QP	100	0	
3	7.7020	20.01	13.05	33.06	69.50	-36.44	QP	100	138	
4	11.7019	20.52	11.84	32.36	69.50	-37.14	QP	100	224	
5	14.4183	21.00	10.82	31.82	69.50	-37.68	QP	100	9	
6	19.9405	21.97	8.92	30.89	69.50	-38.61	QP	100	53	

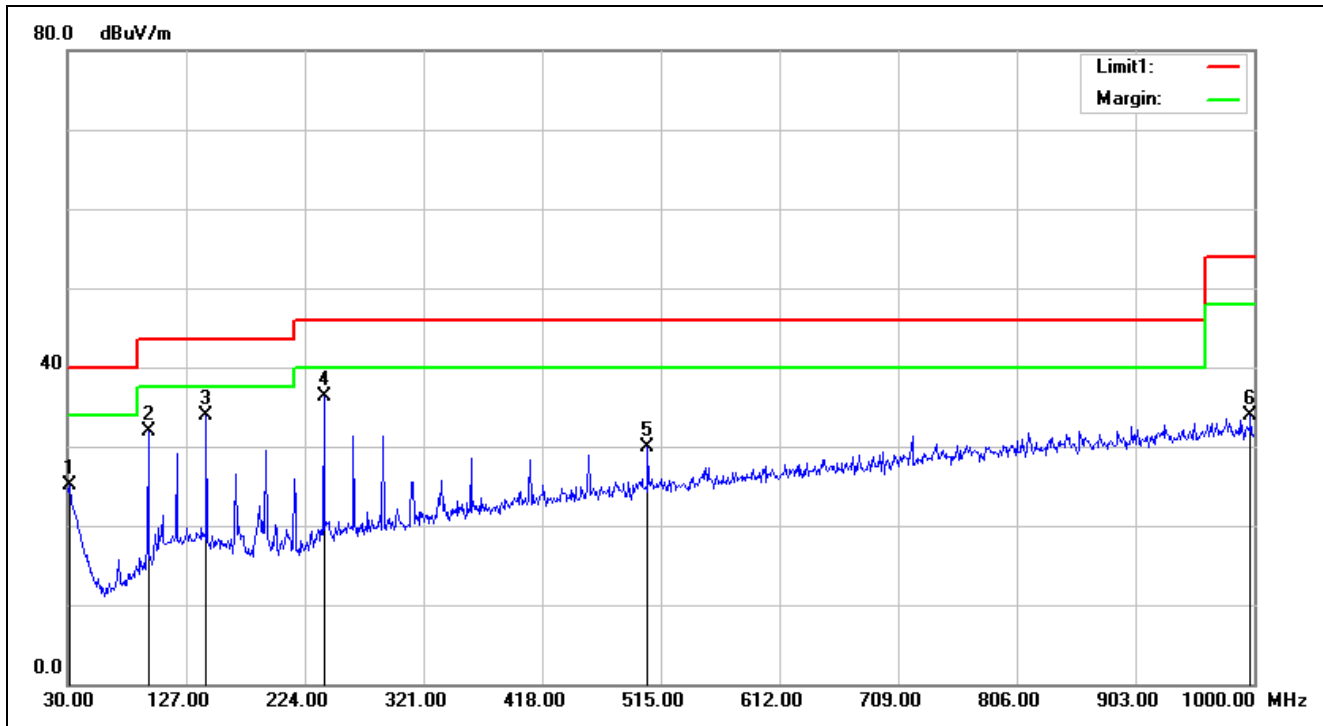

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/7/25 14:12:25
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2441-TX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31.9400	-1.19	26.38	25.19	40.00	-14.81	QP	100	340	
2	95.9599	-10.10	42.07	31.97	43.50	-11.53	QP	100	65	
3	143.4900	-7.19	41.00	33.81	43.50	-9.69	QP	100	241	
4	239.5200	-6.76	43.10	36.34	46.00	-9.66	QP	100	172	
5	504.3300	-1.25	31.24	29.99	46.00	-16.01	QP	100	147	
6	997.0900	5.77	28.17	33.94	54.00	-20.06	QP	100	212	

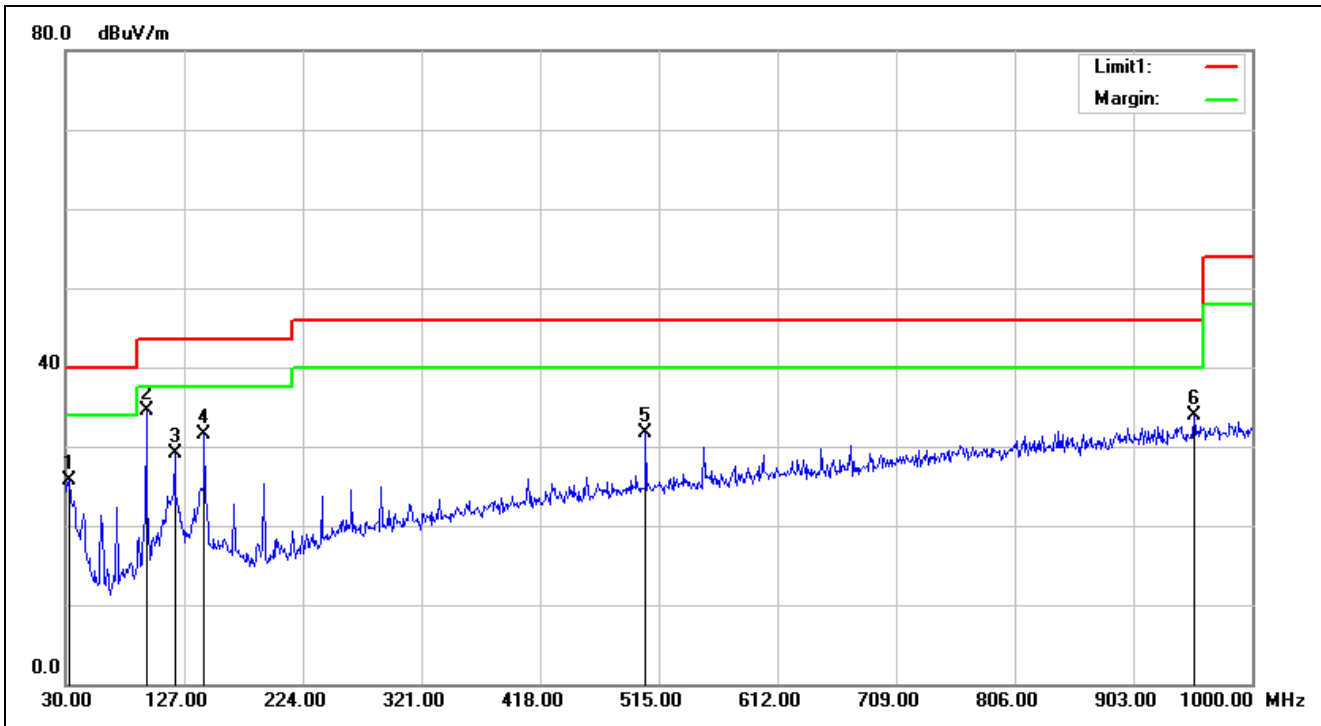


Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/7/25 14:13:29
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2441-TX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	32.9100	-1.74	27.49	25.75	40.00	-14.25	QP	100	73	
2	95.9600	-10.10	44.51	34.41	43.50	-9.09	QP	100	218	
3	119.2400	-7.46	36.55	29.09	43.50	-14.41	QP	100	180	
4	143.4900	-7.19	38.78	31.59	43.50	-11.91	QP	100	255	
5	504.3300	-1.25	32.88	31.63	46.00	-14.37	QP	100	146	
6	952.4700	5.40	28.42	33.82	46.00	-12.18	QP	100	221	

Spurious Emissions, RX Mode, 1-18G




TÜV Rheinland Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

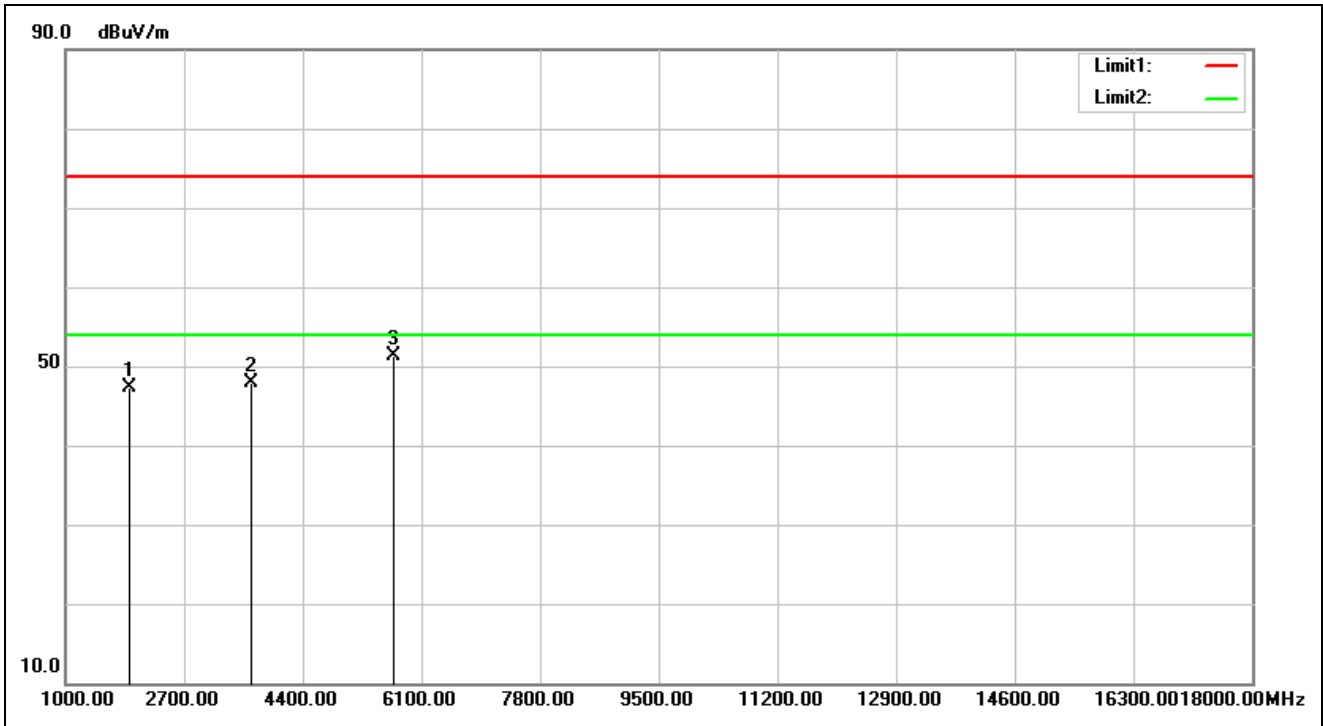

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/7/25 13:28:08
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2441-RX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1918.000	-6.63	53.90	47.27	74.00	-26.73	peak	100	111	
2	3652.000	-3.82	51.65	47.83	74.00	-26.17	peak	100	145	
3	5692.000	3.79	47.56	51.35	74.00	-22.65	peak	100	222	

Remark: Average = Peak result – duty cycle factor (20dB)

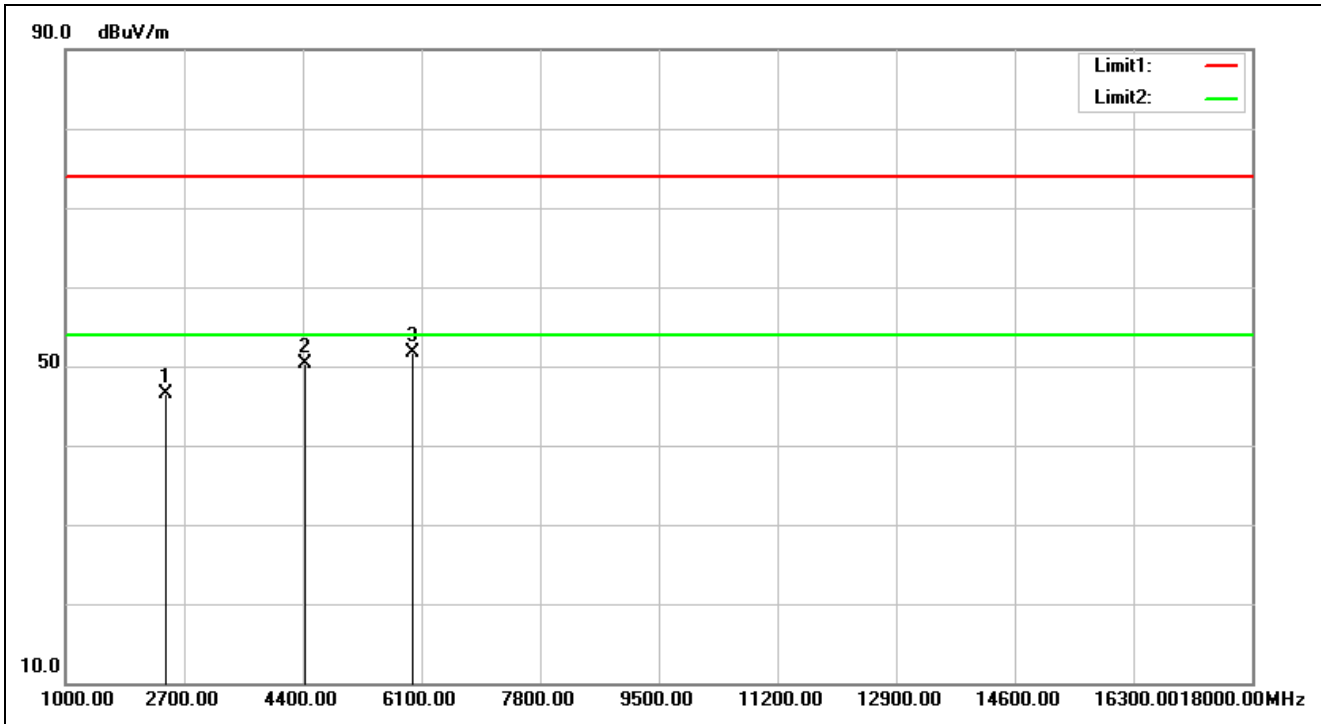

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/7/25 13:29:11
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2441-RX		
Remark:	Areson BT tool 1.03d		


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2428.000	-5.85	52.27	46.42	74.00	-27.58	peak	100	346	
2	4434.000	-1.21	51.48	50.27	74.00	-23.73	peak	100	69	
3	5964.000	5.64	45.99	51.63	74.00	-22.37	peak	100	232	

Remark: Average = Peak result – duty cycle factor (20dB)

Spurious Emissions, RX Mode, 18-26G




TÜV Rheinland Taiwan
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

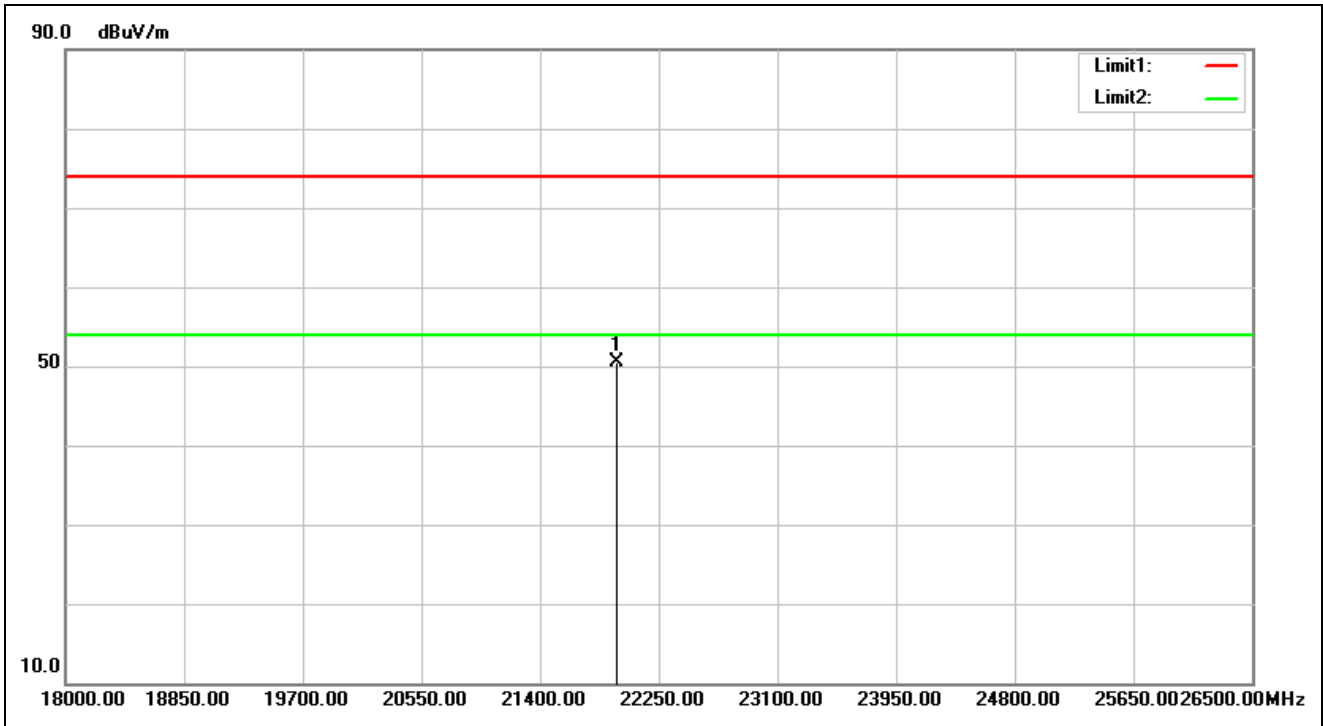

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/7/25 13:43:24
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2441-RX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21952.500	32.62	17.84	50.46	74.00	-23.54	peak	100	0	

Remark: Average = Peak result – duty cycle factor (20dB)

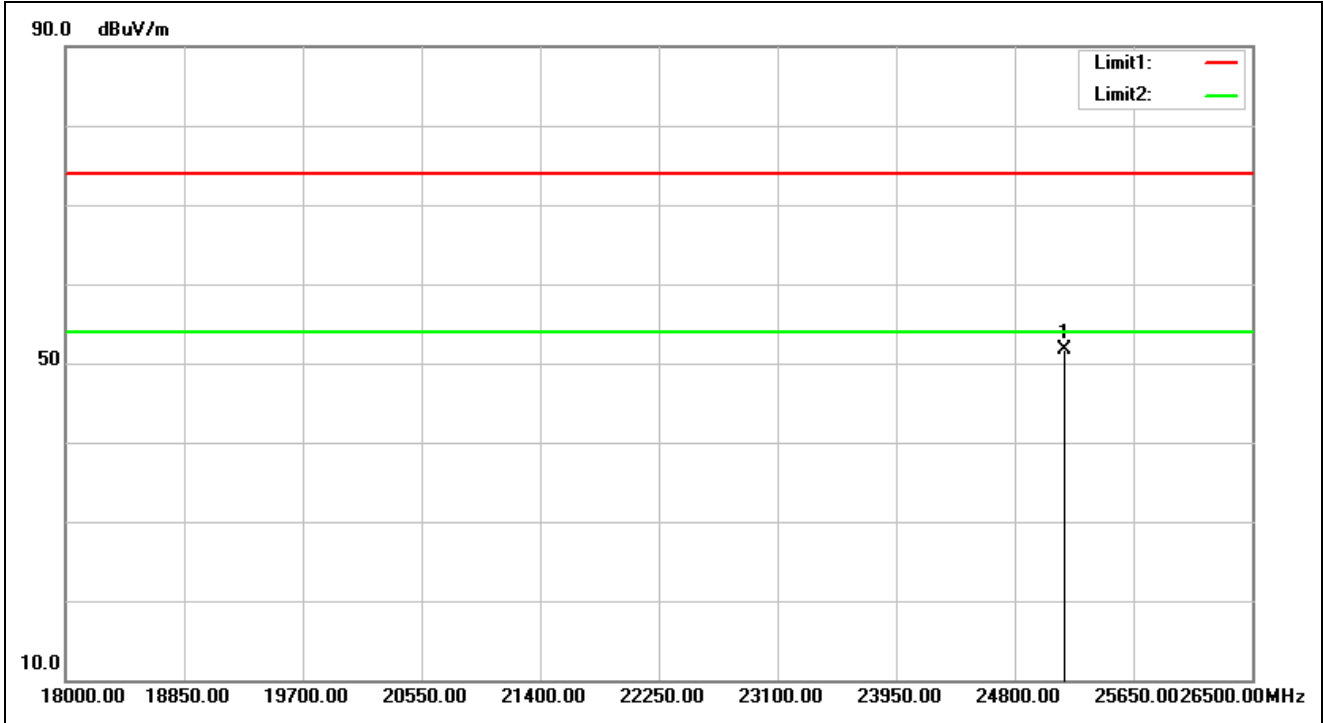

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/7/25 13:43:33
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2441-RX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	25157.000	33.74	17.96	51.70	74.00	-22.30	peak	100	0	

Remark: Average = Peak result – duty cycle factor (20dB)


Spurious Emissions, RX Mode, 9k-1G



TÜV Rheinland Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

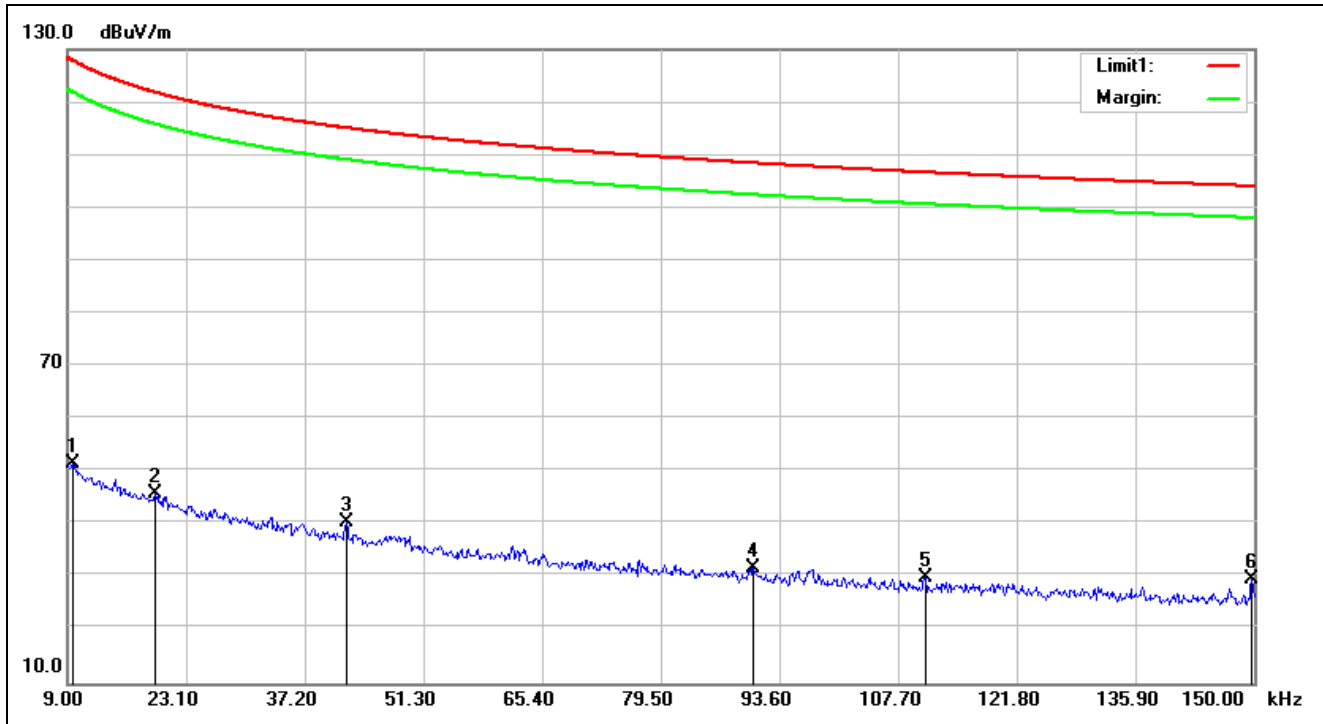

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2017/7/25 14:28:23
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2441-RX		
Remark:	Areson BT tool 1.03d		


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0096	19.77	31.85	51.62	127.94	-76.32	QP	100	107	
2	0.0194	20.02	25.74	45.76	121.83	-76.07	QP	100	338	
3	0.0421	19.71	20.61	40.32	115.11	-74.79	QP	100	19	
4	0.0904	19.19	12.58	31.77	108.47	-76.70	QP	100	101	
5	0.1109	19.12	10.76	29.88	106.70	-76.82	QP	100	205	
6	0.1497	19.08	10.60	29.68	104.09	-74.41	QP	100	237	

Spurious Emissions, RX Mode, 30M-1G

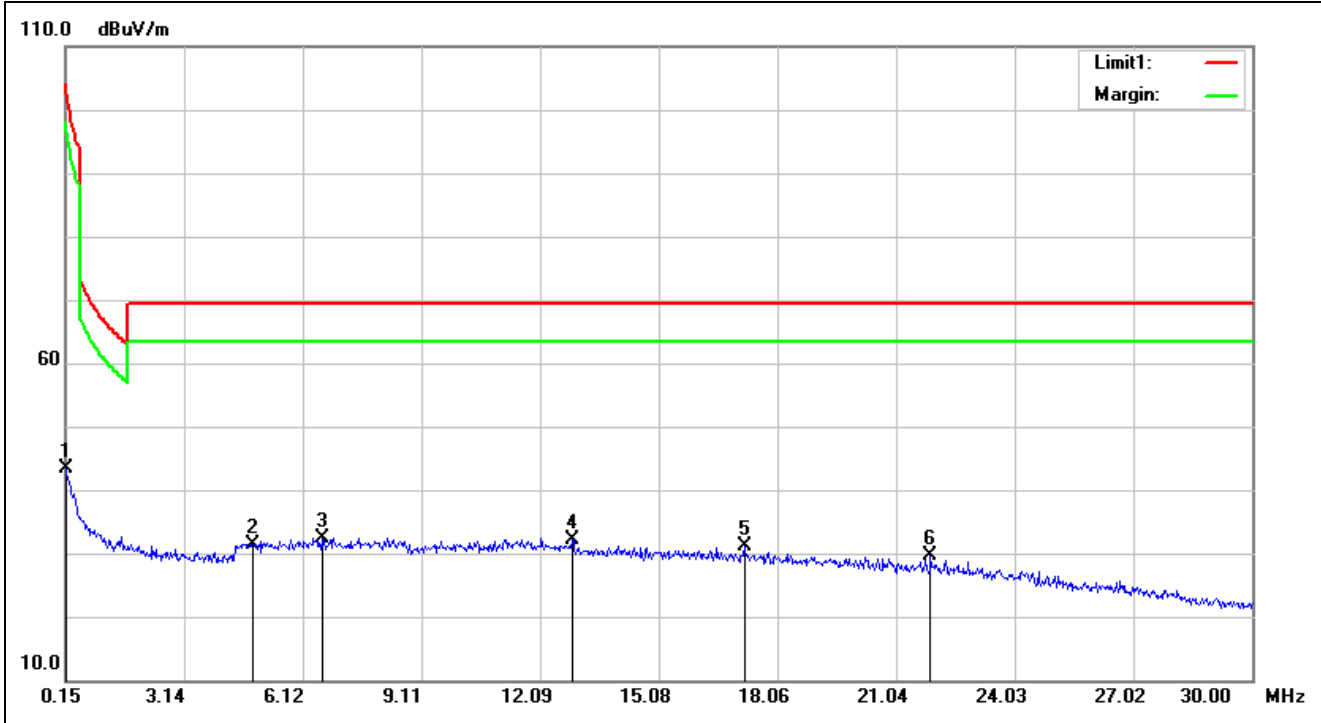


Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2017/7/25 14:31:38
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2441-RX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.1500	19.08	24.29	43.37	104.08	-60.71	QP	100	332	
2	4.8663	19.68	11.80	31.48	69.50	-38.02	QP	100	238	
3	6.5976	19.91	12.44	32.35	69.50	-37.15	QP	100	272	
4	12.8960	20.73	11.51	32.24	69.50	-37.26	QP	100	0	
5	17.2242	21.50	9.56	31.06	69.50	-38.44	QP	100	200	
6	21.9107	22.11	7.41	29.52	69.50	-39.98	QP	100	82	

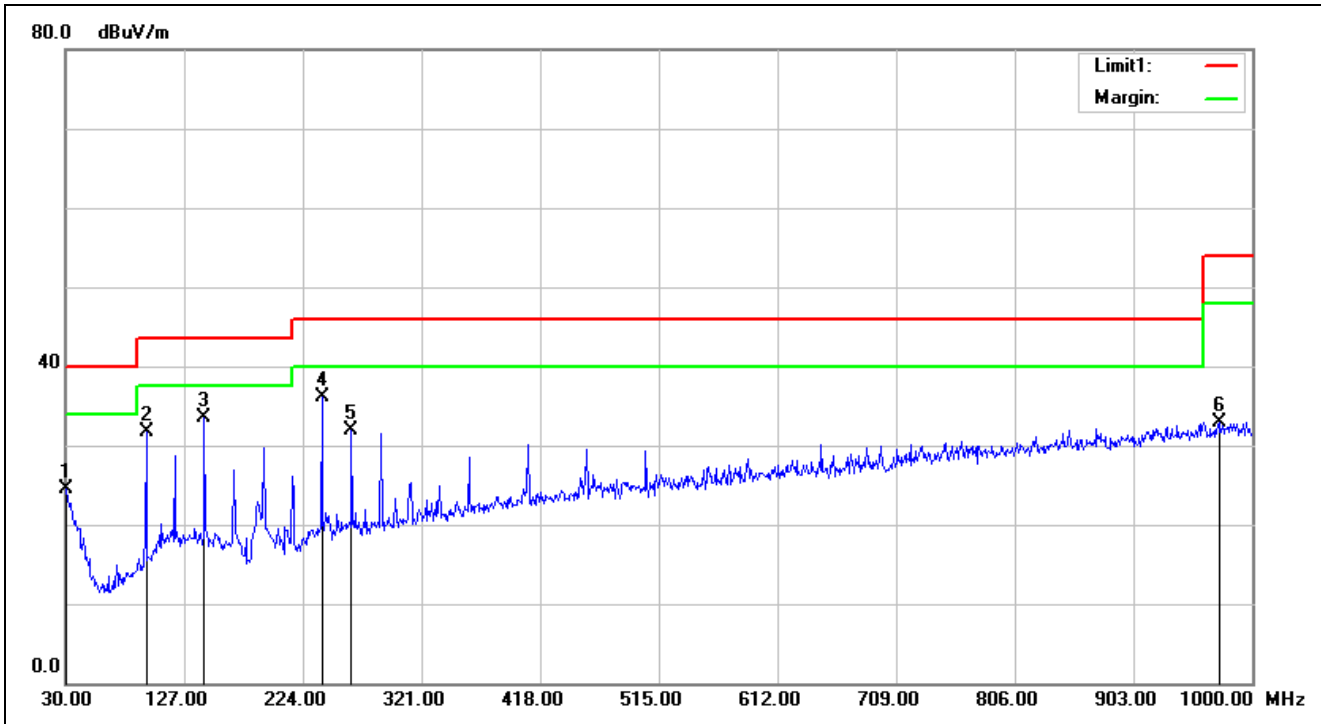

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2017/7/25 14:15:08
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2441-RX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.9700	-0.62	25.03	24.41	40.00	-15.59	QP	100	105	
2	95.9599	-10.10	41.89	31.79	43.50	-11.71	QP	100	89	
3	143.4900	-7.19	40.77	33.58	43.50	-9.92	QP	100	97	
4	239.5200	-6.76	42.87	36.11	46.00	-9.89	QP	100	172	
5	263.7700	-5.10	36.92	31.82	46.00	-14.18	QP	100	111	
6	972.8400	5.57	27.40	32.97	54.00	-21.03	QP	100	323	

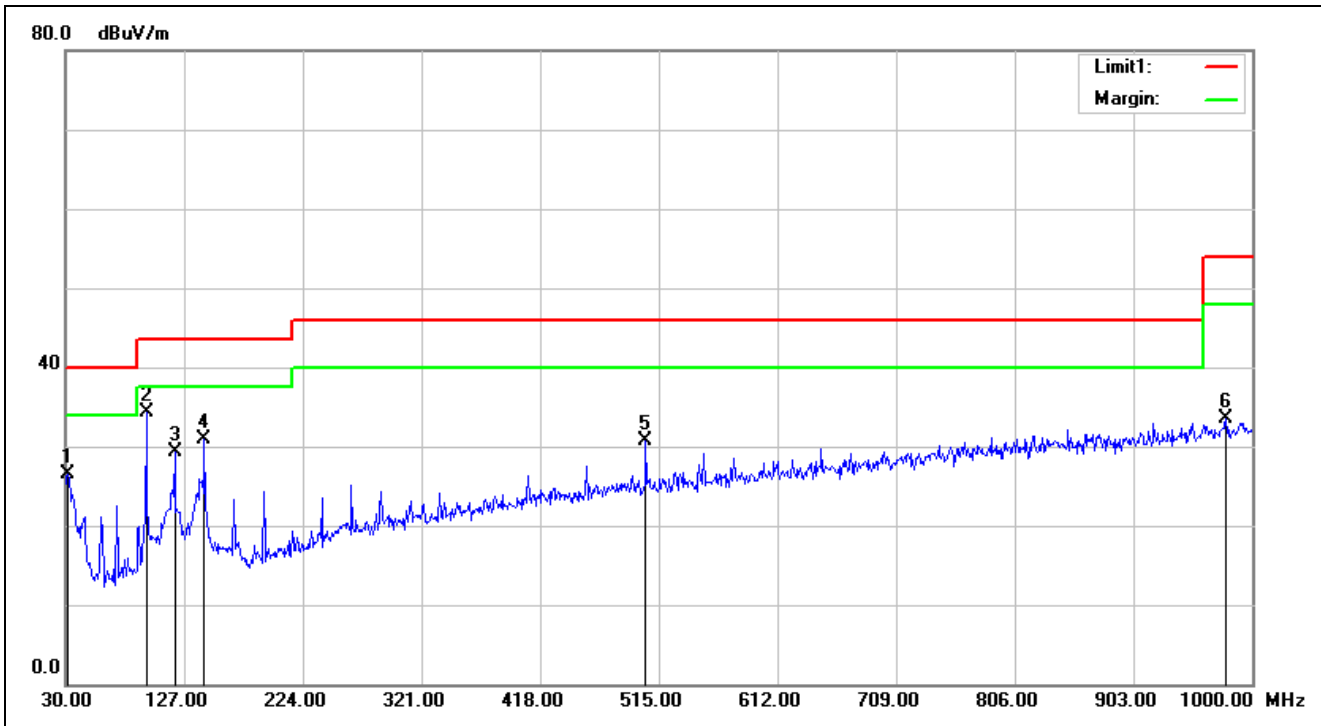

Service No.:	114066652(L087SB, MUS-TBLF134)-NCC	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2017/7/25 14:16:11
Applicant:	Areson	Test Rating:	DC 5V
Product:	BT Mouse	Temp.(°C)/Hum.(%):	22.1(°C)/54%
Model No.:	L087SB, MUS-TBLF134	Test Engineer:	George Yang
Test Mode:	1DH5-2441-RX		
Remark:	Areson BT tool 1.03d		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31.9400	-1.19	27.61	26.42	40.00	-13.58	QP	100	89	
2	95.9600	-10.10	44.49	34.39	43.50	-9.11	QP	100	219	
3	119.2400	-7.46	36.77	29.31	43.50	-14.19	QP	100	166	
4	143.4900	-7.19	38.17	30.98	43.50	-12.52	QP	100	265	
5	504.3300	-1.25	32.04	30.79	46.00	-15.21	QP	100	145	
6	978.6600	5.61	27.86	33.47	54.00	-20.53	QP	100	238	