



FCC Test Report

FCC Part 22, 24 / RSS 129,133

For the
Wireless Matrix

Model Number:
Communicator 1000C

FCC ID: P5IC1K02
IC ID: 1478A-C1K02

TEST REPORT #: EMC_WIREL_016_09001_FCC22_24_rev1
DATE: 2009-04-02



FCC listed:
A2LA accredited
IC recognized #
3462B

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: +1 (408) 586 6200 • Fax: +1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM



Table of Contents

1 ASSESSMENT3

2 ADMINISTRATIVE DATA.....4

2.1 IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT.....4

2.2 IDENTIFICATION OF THE CLIENT4

2.3 IDENTIFICATION OF THE MANUFACTURER.....4

3 EQUIPMENT UNDER TEST (EUT).....5

3.1 SPECIFICATION OF THE EQUIPMENT UNDER TEST5

3.2 IDENTIFICATION OF THE EQUIPMENT UNDER TEST (EUT)5

3.3 IDENTIFICATION OF ACCESSORY EQUIPMENT5

4 SUBJECT OF INVESTIGATION.....6

5 MEASUREMENTS.....7

5.1 RF POWER OUTPUT7

5.1.1 FCC 2.1046 Measurements required: RF power output.....7

5.1.2 Limits:7

5.1.2.1 FCC 22.913 (a) Effective radiated power limits.7

5.1.2.2 FCC 24.232 (b)(c) Power limits.7

5.1.3 Conducted Output Power Measurement procedure:.....7

5.1.4 Radiated Output Power Measurement procedure:.....8

5.1.5 ERP Results 800 MHz band:9

5.1.6 EIRP Results 1900 MHz band:.....9

5.1.7 Peak-to-average (PAR) Results 1900 MHz band.....10

5.2 SPURIOUS EMISSIONS RADIATED17

5.2.1 FCC 2.1053 Measurements required: Field strength of spurious radiation.....17

5.2.2 Limits:17

5.2.2.1 FCC 22.917 Emission limitations for cellular equipment.17

5.2.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.17

5.2.3 Radiated out of band measurement procedure:18

5.2.4 Radiated out of band emissions results on EUT:20

5.2.4.1 Test Results Transmitter Spurious Emission EVDO Cellular:.....20

5.2.4.2 Test Results Transmitter Spurious Emission EVDO PCS 1900:29

5.2.5 RECEIVER RADIATED EMISSIONS § 2.1053 / RSS-132 & 13339

5.2.5.1 Test Results Receiver Spurious Emission 30M-1GHz.....40

6 LIST OF EQUIPMENT.....43

7 REFERENCES44

8 BLOCK DIAGRAMS45

9 REVISION HISTORY.....47



1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and in compliance with the applicable criteria specified in Industry Canada rules RSS129 and RSS133.

Company	Description	Model #
Wireless Matrix	Mobile AVL Router	Communicator 1000C

Technical responsibility for area of testing:

Satya Radhakrishna
 2009-04-02 EMC & Radio (EMC Project Engineer)

Date	Section	Name	Signature
------	---------	------	-----------

This report is prepared by:

Josie Sabado
 2009-04-02 EMC & Radio (EMC Project Engineer)

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt
Responsible Project Leader:	Josie Sabado

2.2 Identification of the Client

Applicant's Name:	Wireless Matrix
Street Address:	Sunrise Technology Park 12369-B Sunrise Valley Drive
City/Zip Code	Reston / 20191
Country	USA
Contact Person:	Darryl Srucko
Phone No.	703-262-4021
e-mail:	darryl.strucko@wrx-us.com

2.3 Identification of the Manufacturer

Same as above applicant

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Marketing Name of EUT (if not same as Model No.)	Communicator 1000C
Description	Mobile AVL Router
Model No.	Communicator 1000C
FCC-ID	P5IC1K02
IC-ID (Industry Canada)	1478A-C1K02
Frequency Range:	824.7MHz – 848.31MHz for EVDO Cellular 1851.25MHz – 1908.75MHz for EVDO PCS
Type(s) of Modulation:	HPSK
Antenna Type:	Monopole antenna
Max. Output Power:	Conducted : Tests not performed by Cetecom. Radiated : see section 5.1.5 and 5.1.6. 27.29dBm (0.536W) @ Cellular 848.31MHz ERP values 23.8dBm (0.239W) @ PCS 1880MHz EIRP values

3.2 Identification of the Equipment Under Test (EUT)

EUT #	TYPE	MANF.	MODEL	SERIAL #
1	EUT	Wireless Matrix	Communicator 1000C	917-002

3.3 Identification of Accessory equipment

No accessory equipment used.

4 Subject of Investigation

All testing was performed on the EUT listed in Section 3. The EUT was maximized in the X,Y, Z positions , all data in this report shows the worst case between horizontal and vertical polarization for above 1GHz.

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS129 and RSS133.

This EUT contains an FCC approved module with the model number MC5727 and FCC ID **N7NMC5725**. This report refers only to the radiated measurements.

5 Measurements

5.1 RF Power Output

5.1.1 FCC 2.1046 Measurements required: RF power output.

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

5.1.2 Limits:

5.1.2.1 FCC 22.913 (a) Effective radiated power limits.

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

5.1.2.2 FCC 24.232 (b)(c) Power limits.

(c) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP).


(d) In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

5.1.3 Conducted Output Power Measurement procedure:

Based on TIA-603C 2004

2.2.1 Conducted Carrier Output Power Rating

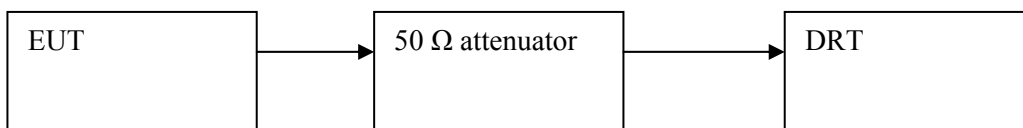


1. Connect the equipment as shown in the above diagram. A Digital Radiocommunication Tester (DRT) is used to enable the EUT to transmit and to measure the output power.
2. Adjust the settings of the DRT to set the EUT to its maximum power at the required channel.
3. Record the output power level measured by the DRT.
4. Correct the measured level for all losses in the RF path.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

5.1.4 Radiated Output Power Measurement procedure:

Based on TIA-603C 2004

2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)

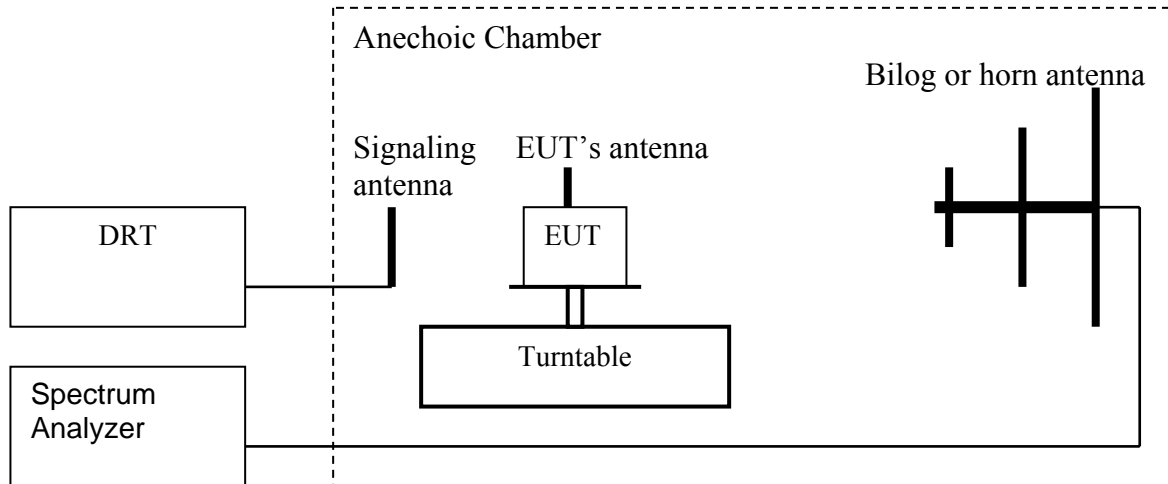

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.
 2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
 3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
 4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
 5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
 6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
 7. Determine the ERP using the following equation:

$$\mathbf{ERP\ (dBm) = LVL\ (dBm) + LOSS\ (dB)}$$
 8. Determine the EIRP using the following equation:

$$\mathbf{EIRP\ (dBm) = ERP\ (dBm) + 2.14\ (dB)}$$
 9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band. **Spectrum analyzer settings = rbw=vbw=3MHz**
- (note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4, 7 and 8 above are performed with test software.)

5.1.5 ERP Results 800 MHz band:

TPC bits	Burst Peak ERP
All 1's	≤38.45dBm (7W)

Frequency (MHz)	Effective Isotropic Radiated Power (dBm)
	EVDO Cellular
824.7	26.54 (24.4)
836.52	26.28 (24.14)
848.31	27.29 (25.15)

*Values reported are EIRP and (ERP) in parentheses.

5.1.6 EIRP Results 1900 MHz band:

TPC bits	Burst Peak EIRP
All 1's	≤33dBm (2W)

Frequency (MHz)	Effective Isotropic Radiated Power (dBm)
	EVDO PCS
1851.25	23.1
1880.0	23.8
1908.75	22.66

5.1.7 Peak-to-average (PAR) Results 1900 MHz band

Peak and average measurements are referenced from the module's test report.

Frequency (MHz)	Peak-to-average ratio
	EVDO
1850.2	4.78
1880.0	4.76
1909.8	4.31



EIRP (Cellular 800) CHANNEL 1013 §22.913(a)

EUT: Communicator (CDMA version)

Customer:: Wireless Matrix

Test Mode: CDMA EVDO 850

ANT Orientation: V

EUT Orientation: H


Test Engineer: Chris

Voltage: Car Battery

Comments:

SWEEP TABLE: "EIRP 850 CH 128 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
819.2 MHz	829.2 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

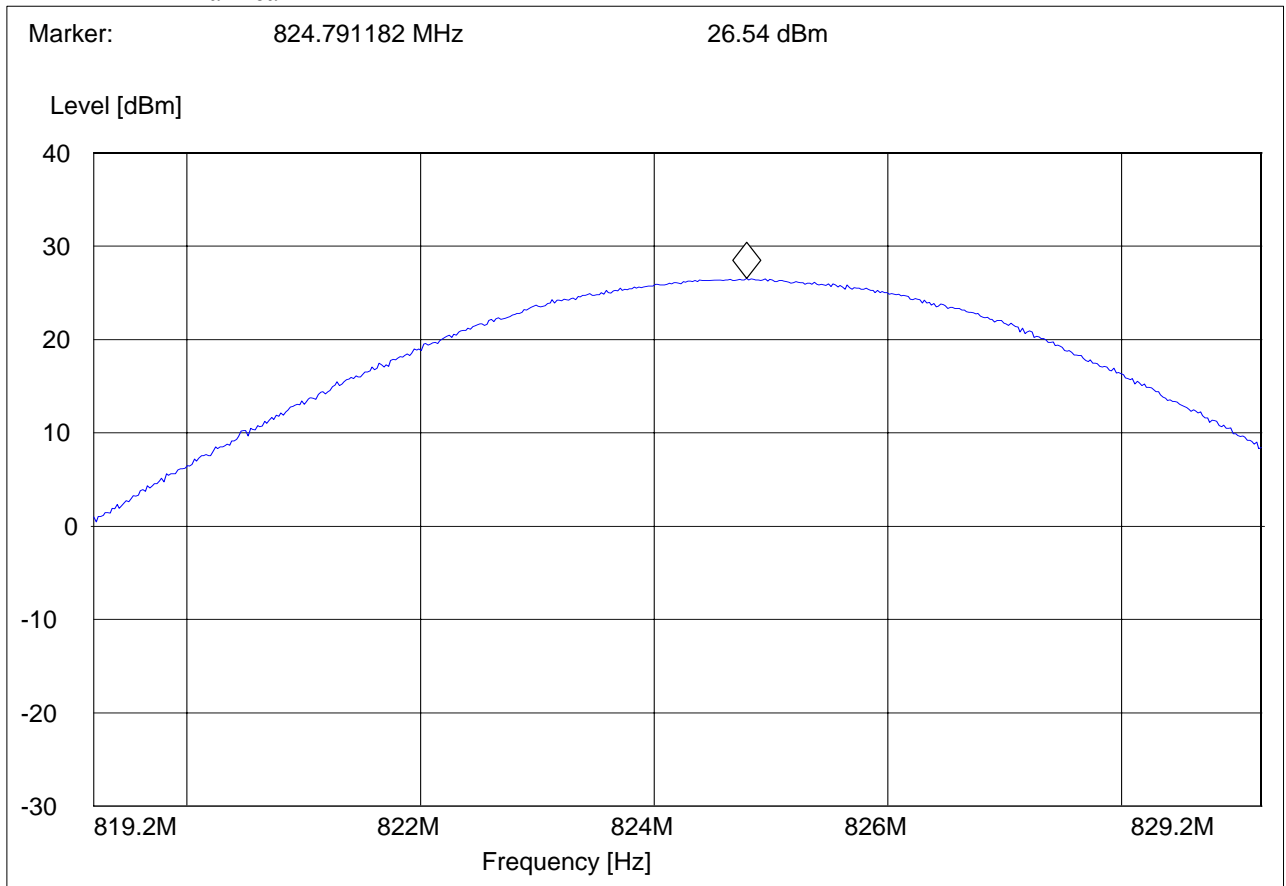



EIRP (Cellular 800) CHANNEL 384 §22.913(a)

EUT: Communicator (CDMA version)

Customer:: Wireless Matrix

Test Mode: CDMA EVDO 850

ANT Orientation: V

EUT Orientation: H


Test Engineer: Chris

Voltage: Car Battery

Comments:

SWEEP TABLE: "EIRP 850 CH 190 V"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
831.6 MHz	841.6 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

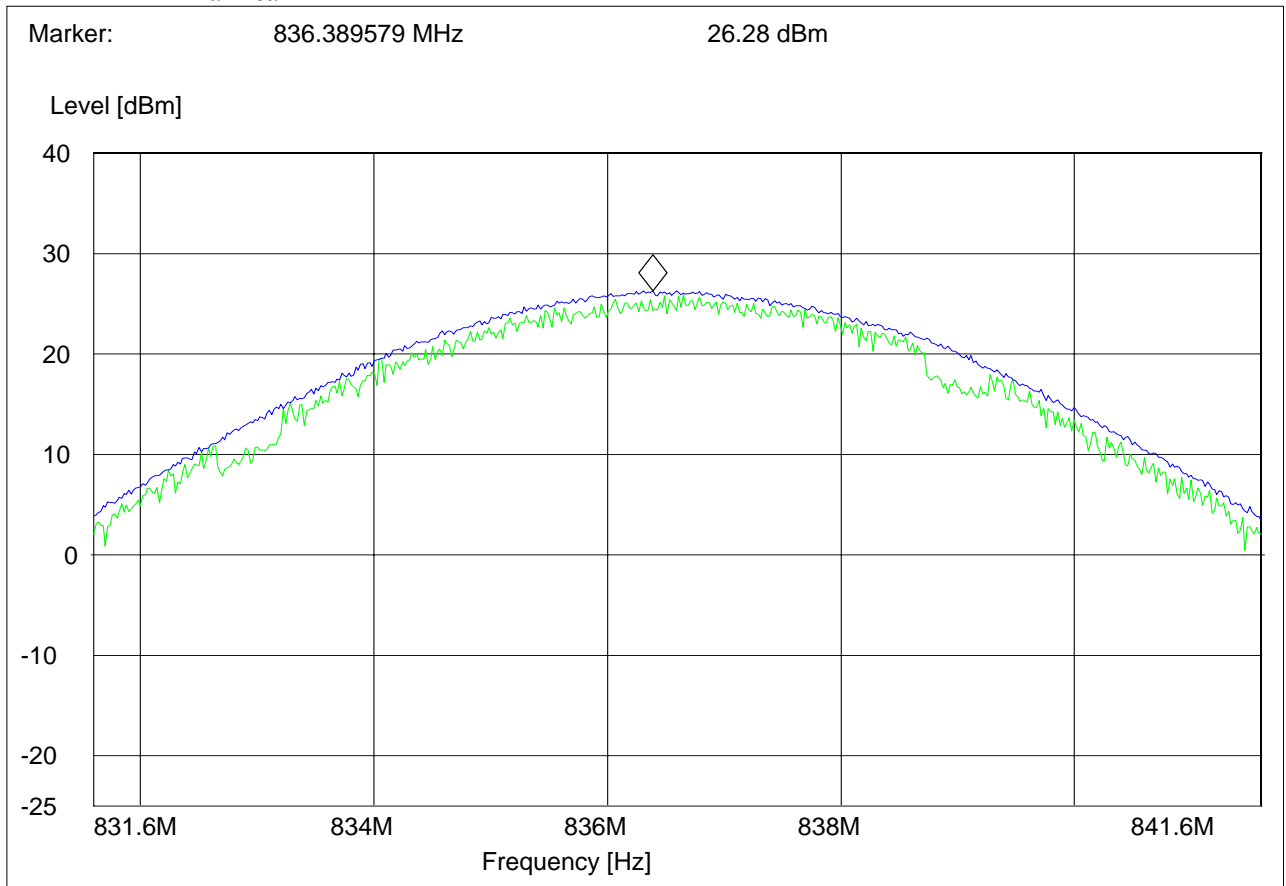



EIRP (Cellular 800) CHANNEL 777 §22.913(a)

EUT: Communicator (CDMA version)

Customer:: Wireless Matrix

Test Mode: CDMA EVDO 850

ANT Orientation: V

EUT Orientation: H


Test Engineer: Chris

Voltage: Car Battery

Comments:

SWEEP TABLE: "EIRP 850 CH 251 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
843.8 MHz	853.8 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

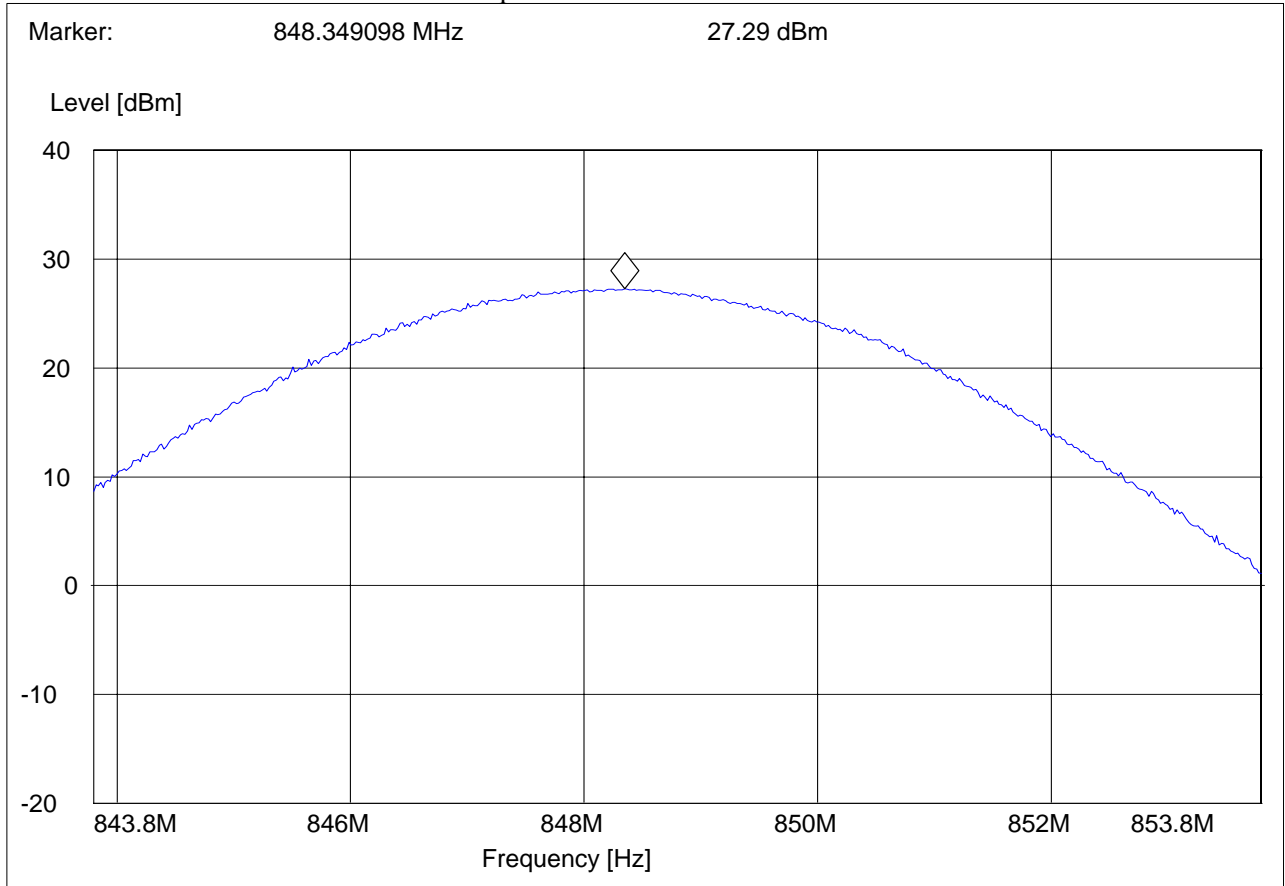



EIRP (PCS-1900) CHANNEL 25 §24.232(b)

EUT: Communicator (CDMA version)

Customer:: Wireless Matrix

Test Mode: CDMA EVDO 1900

ANT Orientation: V

EUT Orientation: H

Test Engineer: Chris

Voltage: Car Battery

Comments:


SWEEP TABLE: "EIRP 1900 CH512"

Short Description: EIRP PCS 1900 for channel-512

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

1.8 GHz 1.9 GHz MaxPeak Coupled 3 MHz DUMMY-DBM

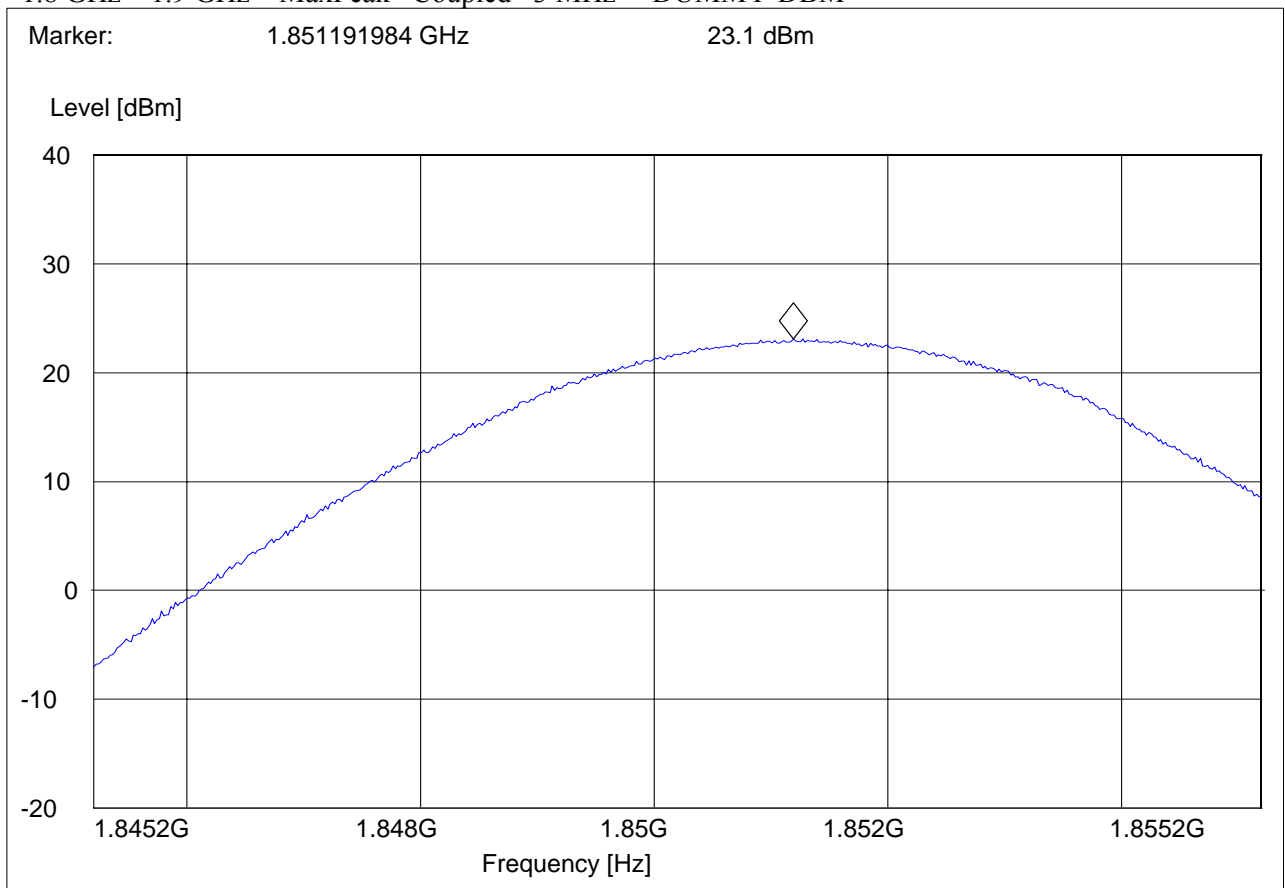



EIRP (PCS-1900) CHANNEL 600 §24.232(b)

EUT: Communicator (CDMA version)

Customer:: Wireless Matrix

Test Mode: CDMA EVDO 1900

ANT Orientation: V

EUT Orientation: H

Test Engineer: Chris

Voltage: Car Battery

Comments:


SWEEP TABLE: "EIRP 1900 CH661"

Short Description: EIRP PCS 1900 for channel-661

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

1.9 GHz 1.9 GHz MaxPeak Coupled 3 MHz DUMMY-DBM
MaxPeak

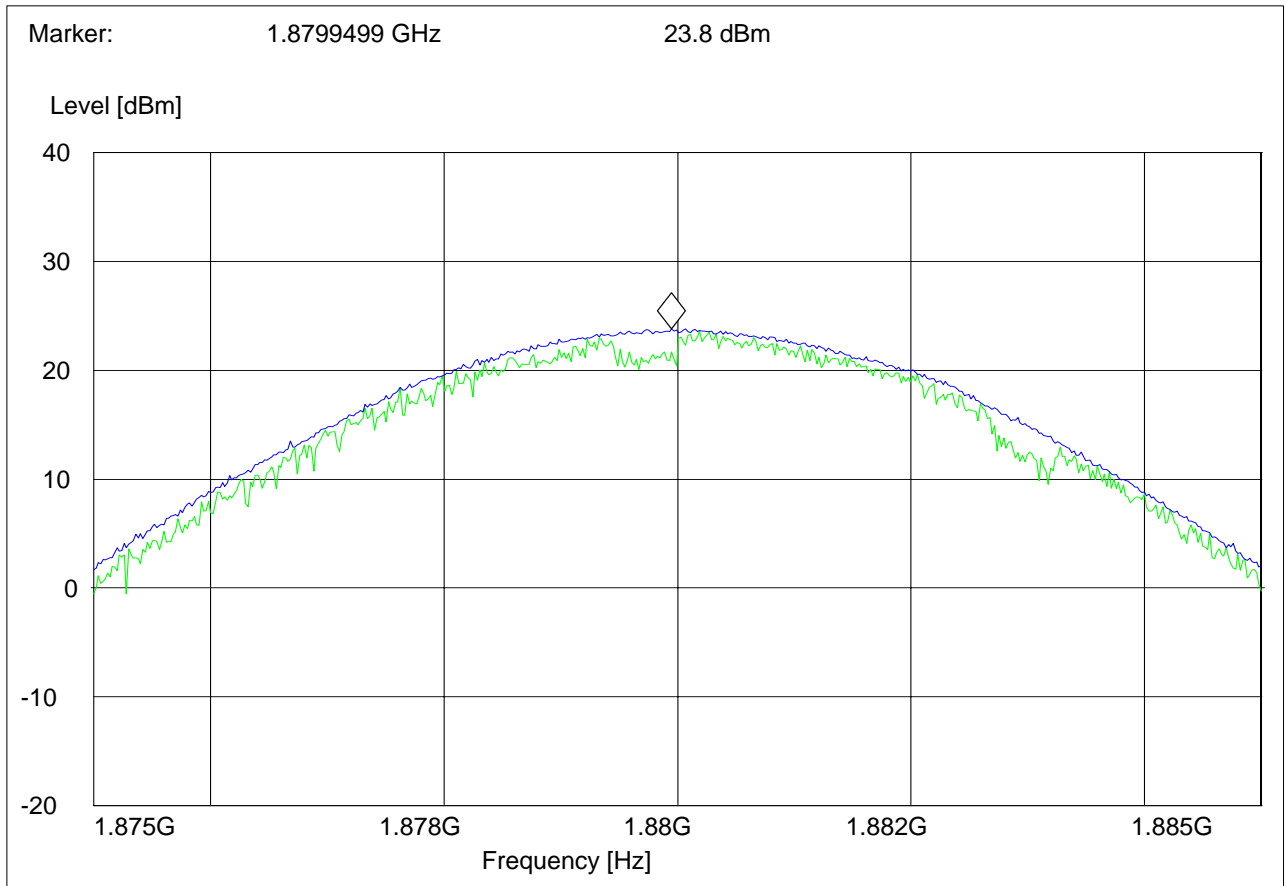



EIRP (PCS-1900) CHANNEL 1175 §24.232(b)

EUT: Communicator (CDMA version)

Customer:: Wireless Matrix

Test Mode: CDMA EVDO 1900

ANT Orientation: V

EUT Orientation: H

Test Engineer: Chris

Voltage: Car Battery

Comments:


SWEEP TABLE: "EIRP 1900 CH810"

Short Description: EIRP PCS 1900 for channel-810

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.

1.9 GHz 1.9 GHz MaxPeak Coupled 3 MHz DUMMY-DBM

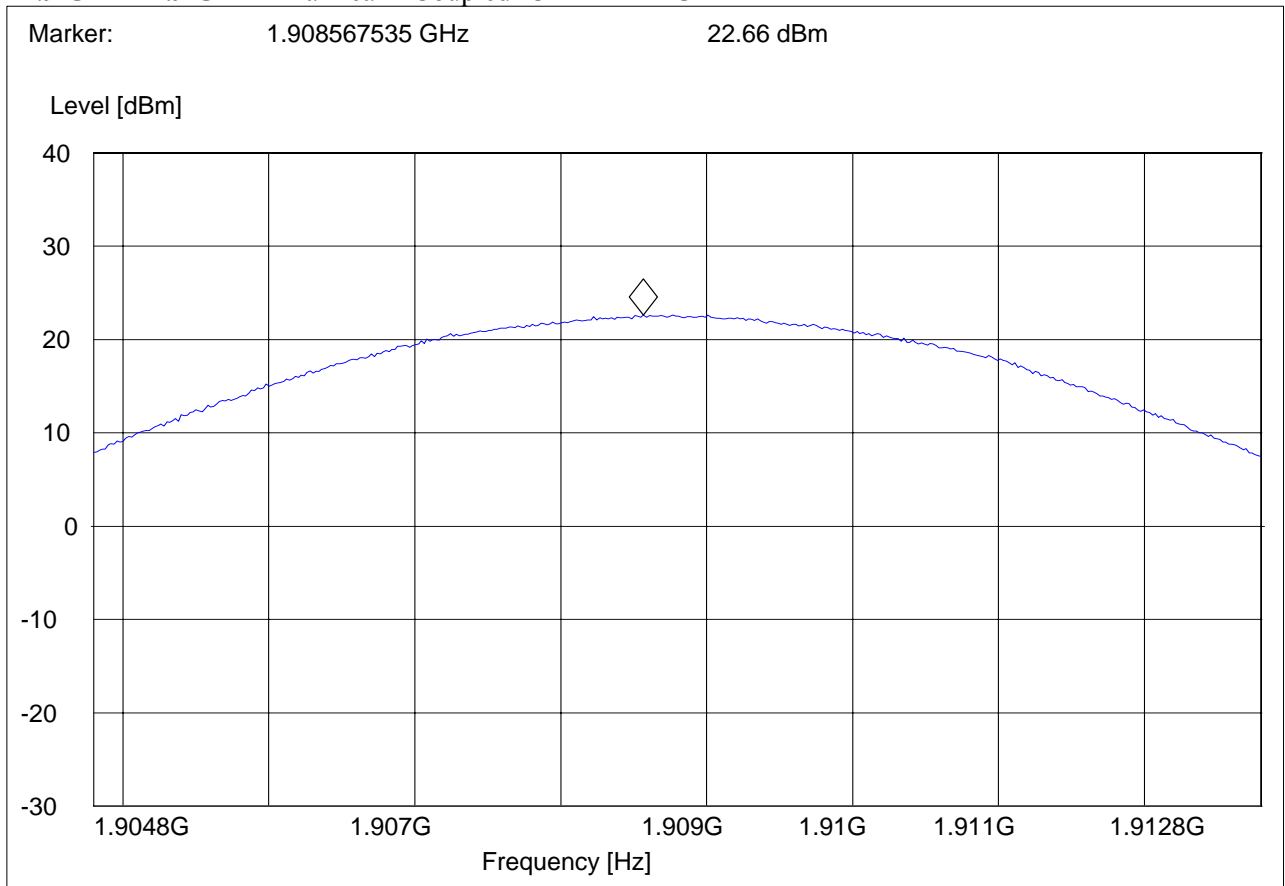

5.2 Spurious Emissions Radiated

5.2.1 FCC 2.1053 Measurements required: Field strength of spurious radiation.

- (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

5.2.2 Limits:

5.2.2.1 **FCC 22.917 Emission limitations for cellular equipment.**

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.2.2.2 **FCC 24.238 Emission limitations for Broadband PCS equipment.**

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required

measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.2.3 Radiated out of band measurement procedure:

Based on TIA-603C 2004

2.2.12 Unwanted emissions: Radiated Spurious

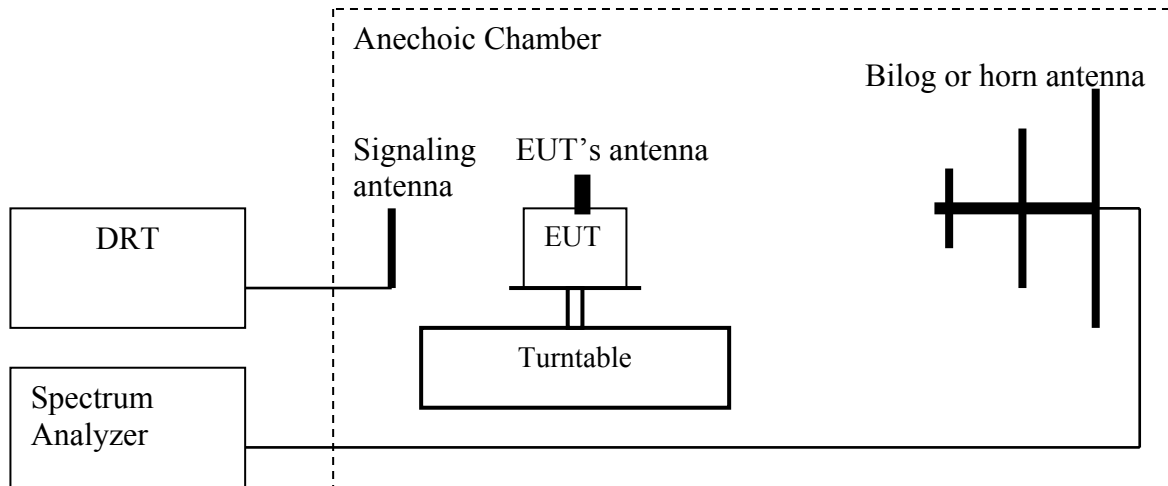

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (LVL) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (LOSS). $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$.
7. Determine the level of spurious emissions using the following equation:
Spurious (dBm) = LVL (dBm) + LOSS (dB):
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:
Spurious (dBm) = LVL (dBm) + LOSS (dB):
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

(note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

Spectrum analyzer settings:

Res B/W: 1 MHz

Vid B/W: 1 MHz

Measurement Survey:

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the EVDO Cellular 800 & EVDO PCS 1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the EVDO Cellular 800 & EVDO PCS 1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

5.2.4 Radiated out of band emissions results on EUT:

5.2.4.1 Test Results Transmitter Spurious Emission EVDO Cellular:

Harmonics	Tx ch-128 Freq. (MHz)	Level (dBm)	Tx ch-190 Freq. (MHz)	Level (dBm)	Tx ch-251 Freq. (MHz)	Level (dBm)
2	1648.4	NF	1673.2	NF	1697.6	NF
3	2472.6	NF	2509.8	NF	2546.4	NF
4	3296.8	NF	3346.4	NF	3395.2	NF
5	4121	NF	4183	NF	4244	NF
6	4945.2	NF	5019.6	NF	5092.8	NF
7	5769.4	NF	5856.2	NF	5941.6	NF
8	6593.6	NF	6692.8	NF	6790.4	NF
9	7417.8	NF	7529.4	NF	7639.2	NF
10	8242	NF	8366	NF	8488	NF
NF = NOISE FLOOR						



RADIATED SPURIOUS EMISSIONS (Cellular-800) TX: 30MHz - 1GHz

Spurious emission limit -13dBm

Antenna: vertical

Note:

1. The peak above the limit line is the carrier freq.
2. This plot is valid for low, mid & high channels (worst-case plot)

EUT: Communicator (CDMA version)

Customer:: Wireless Matrix

Test Mode: CDMA EVDO 850; Ch 777

ANT Orientation: V

EUT Orientation: H


Test Engineer: Chris

Voltage: Car Battery

Comments:

SWEEP TABLE: "FCC 24 Spur 30M-1G_V"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

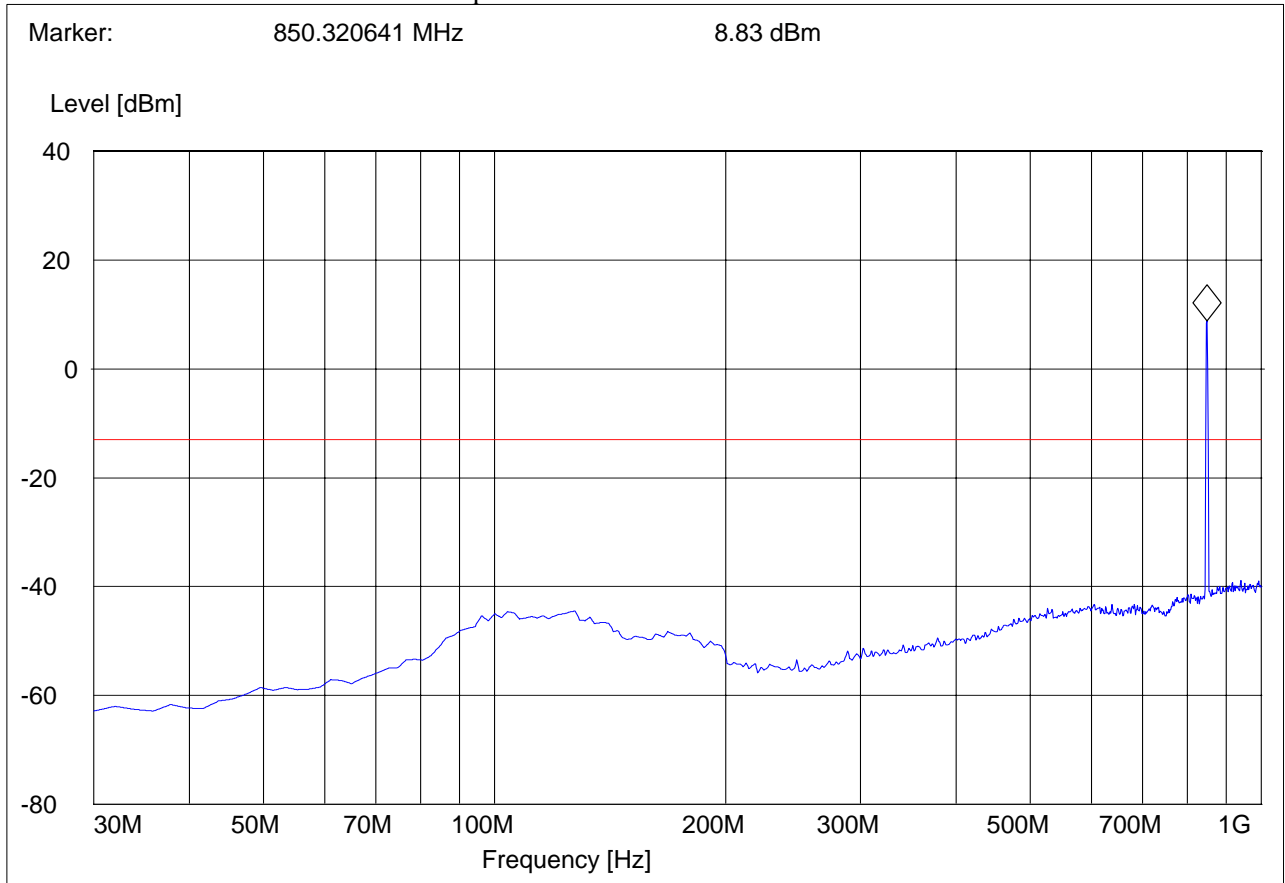



RADIATED SPURIOUS EMISSIONS (EVDO CELLULAR 800)TX: 30MHz - 1GHz

Spurious emission limit -13dBm

Antenna: horizontal

Note:

1. The peak above the limit line is the carrier freq.
2. This plot is valid for low, mid & high channels (worst-case plot)

EUT: Communicator (CDMA version)

Customer:: Wireless Matrix

Test Mode: CDMA EVDO 850; Ch 1013

ANT Orientation: H

EUT Orientation: H


Test Engineer: Chris

Voltage: Car Battery

Comments:

SWEEP TABLE: "FCC 24 Spur 30M-1G_H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	DUMMY-DBM

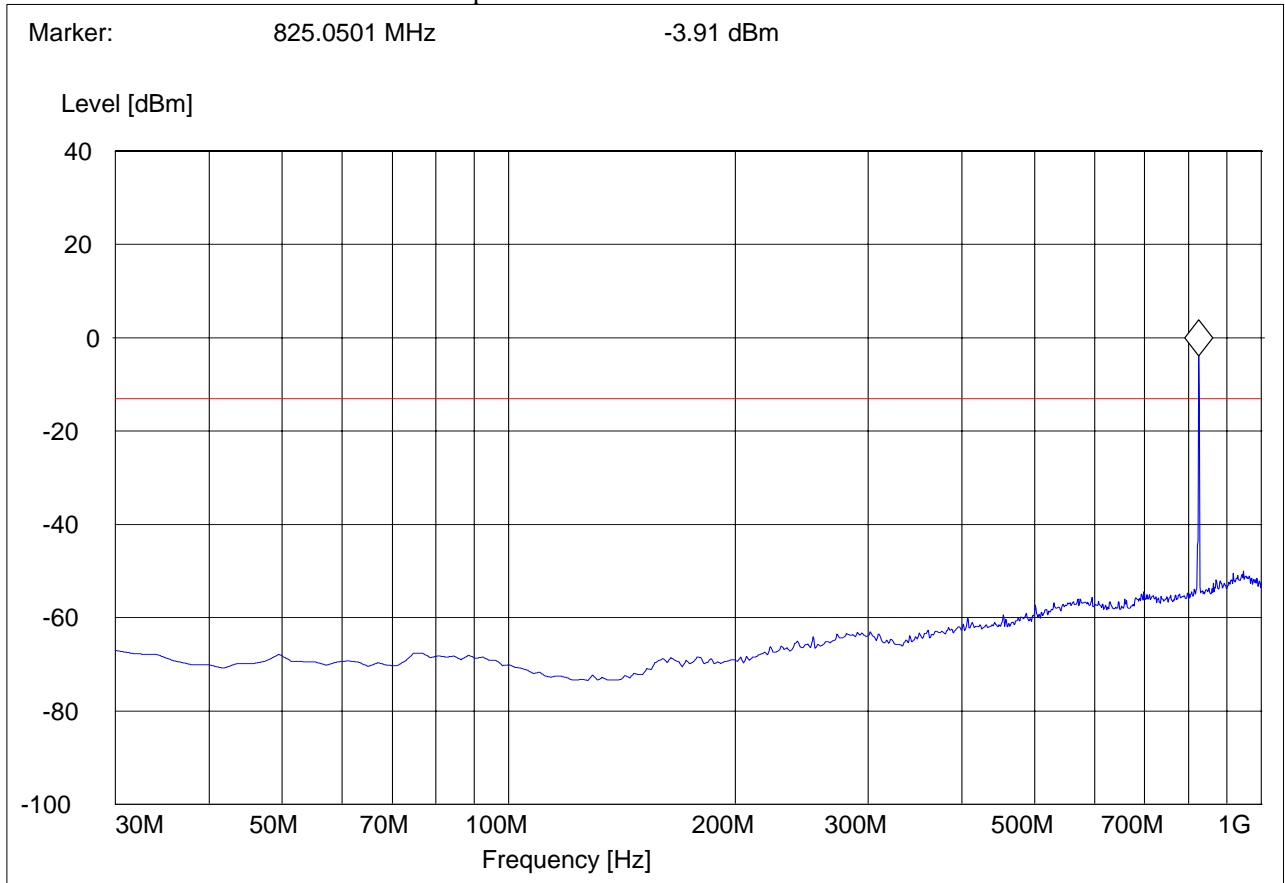




RADIATED SPURIOUS EMISSIONS (EVDO CELLULAR 800) CHANNEL 1013 Tx : 1GHz – 1.58GHz

EUT: Communicator (CDMA version)
 Customer:: Wireless Matrix
 Test Mode: CDMA EVDO 850
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: Car Battery
 Comments:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

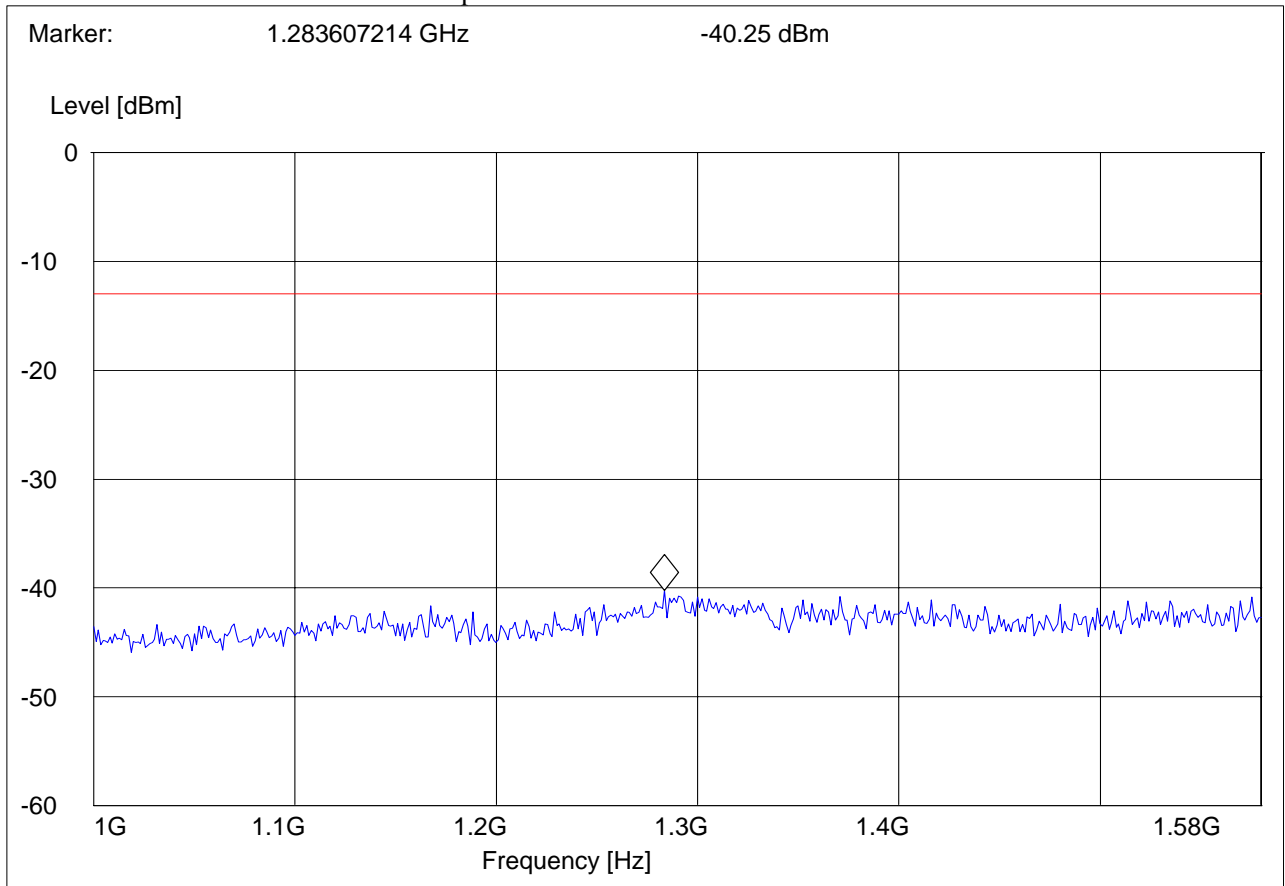




RADIATED SPURIOUS EMISSIONS (EVDO CELLULAR 800) Tx CHANNEL 1013: 1.58GHz – 9GHz

EUT: Communicator (CDMA version)
 Customer:: Wireless Matrix
 Test Mode: CDMA EVDO 850
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: Car Battery
 Comments:

SWEEP TABLE: "FCC 22Spuri 1.58-9G"

Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 1.6 GHz 9.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

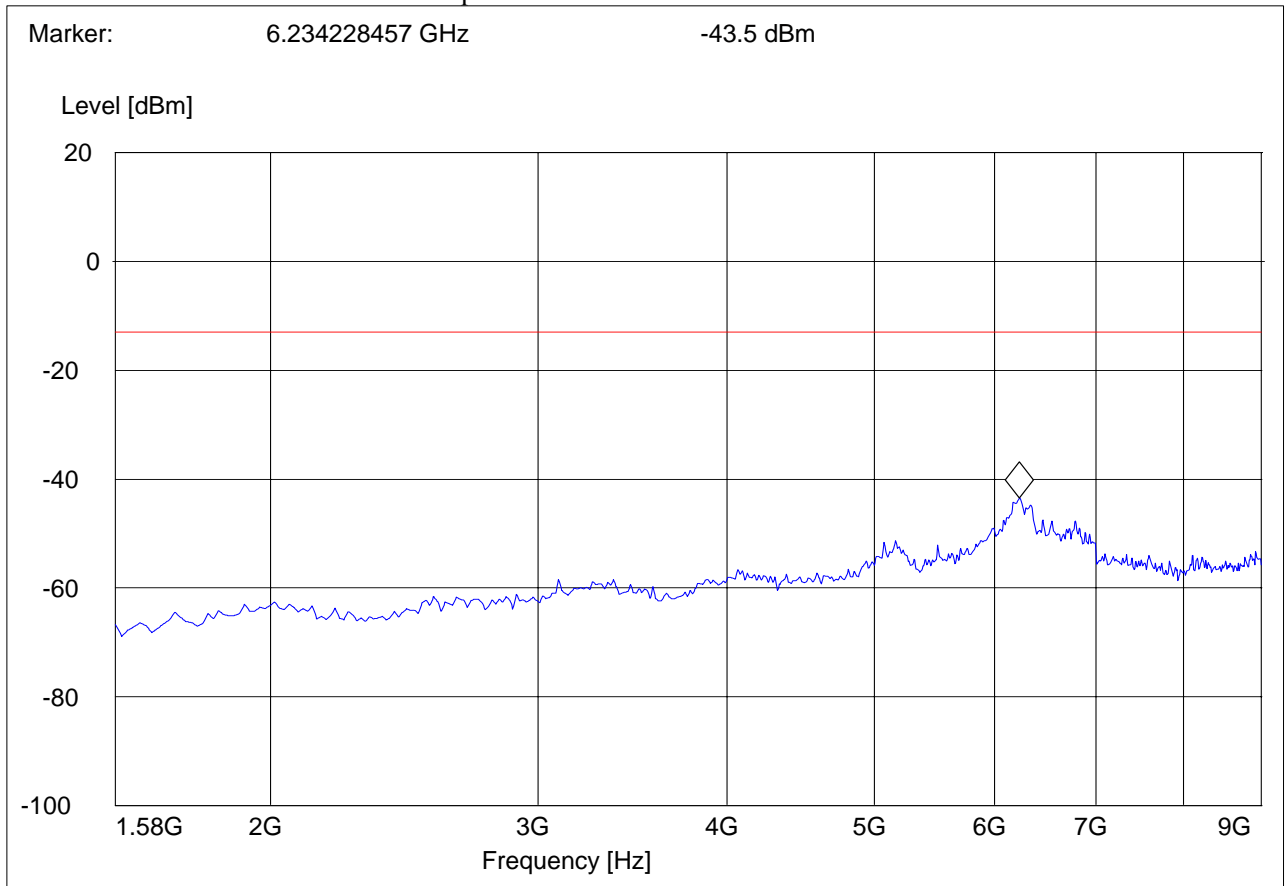




RADIATED SPURIOUS EMISSIONS (EVDO CELLULAR 800) Tx CHANNEL 384: 1GHz – 1.58GHz

EUT: Communicator (CDMA version)
 Customer:: Wireless Matrix
 Test Mode: CDMA EVDO 850
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: Car Battery
 Comments:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

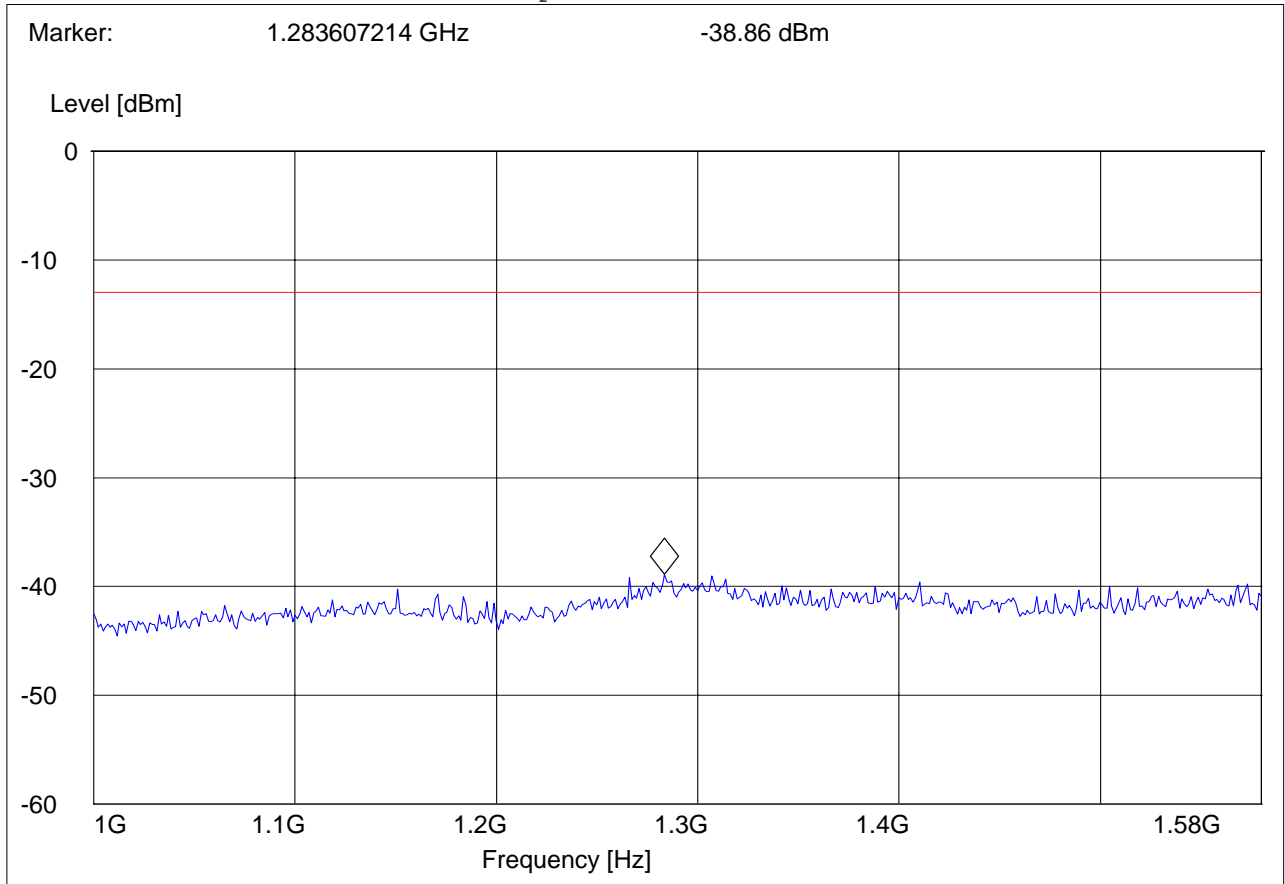




RADIATED SPURIOUS EMISSIONS (EVDO CELLULAR 800) Tx CHANNEL 384: 1.58GHz – 9 GHz

EUT: Communicator (CDMA version)
 Customer:: Wireless Matrix
 Test Mode: CDMA EVDO 850
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: Car Battery
 Comments:

SWEEP TABLE: "FCC 22Spuri 1.58-9G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.6 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

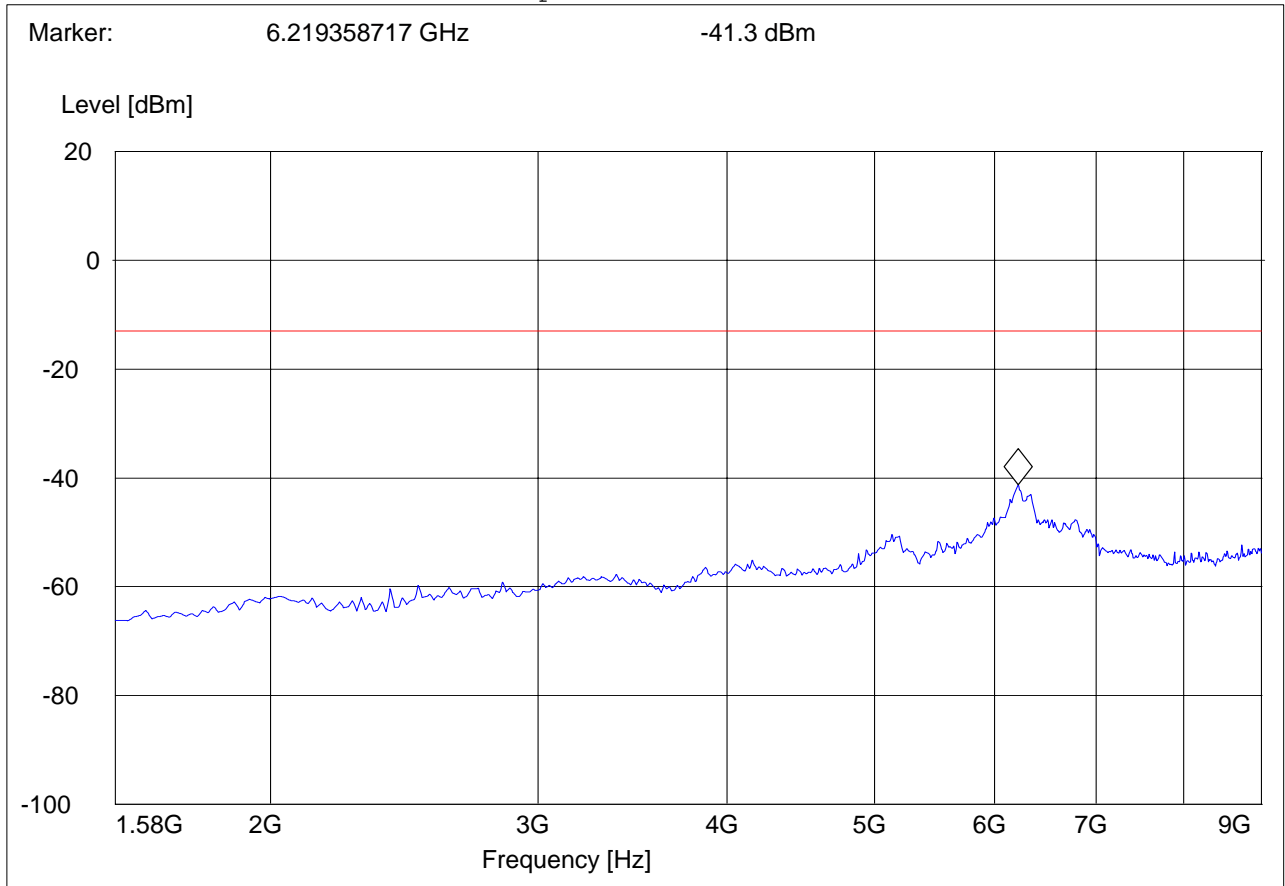


RADIATED SPURIOUS EMISSIONS (EVDO CELLULAR 800) Tx CHANNEL 777: 1GHz – 1.58GHz

EUT: Communicator (CDMA version)
 Customer:: Wireless Matrix
 Test Mode: CDMA EVDO 850
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: Car Battery
 Comments:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

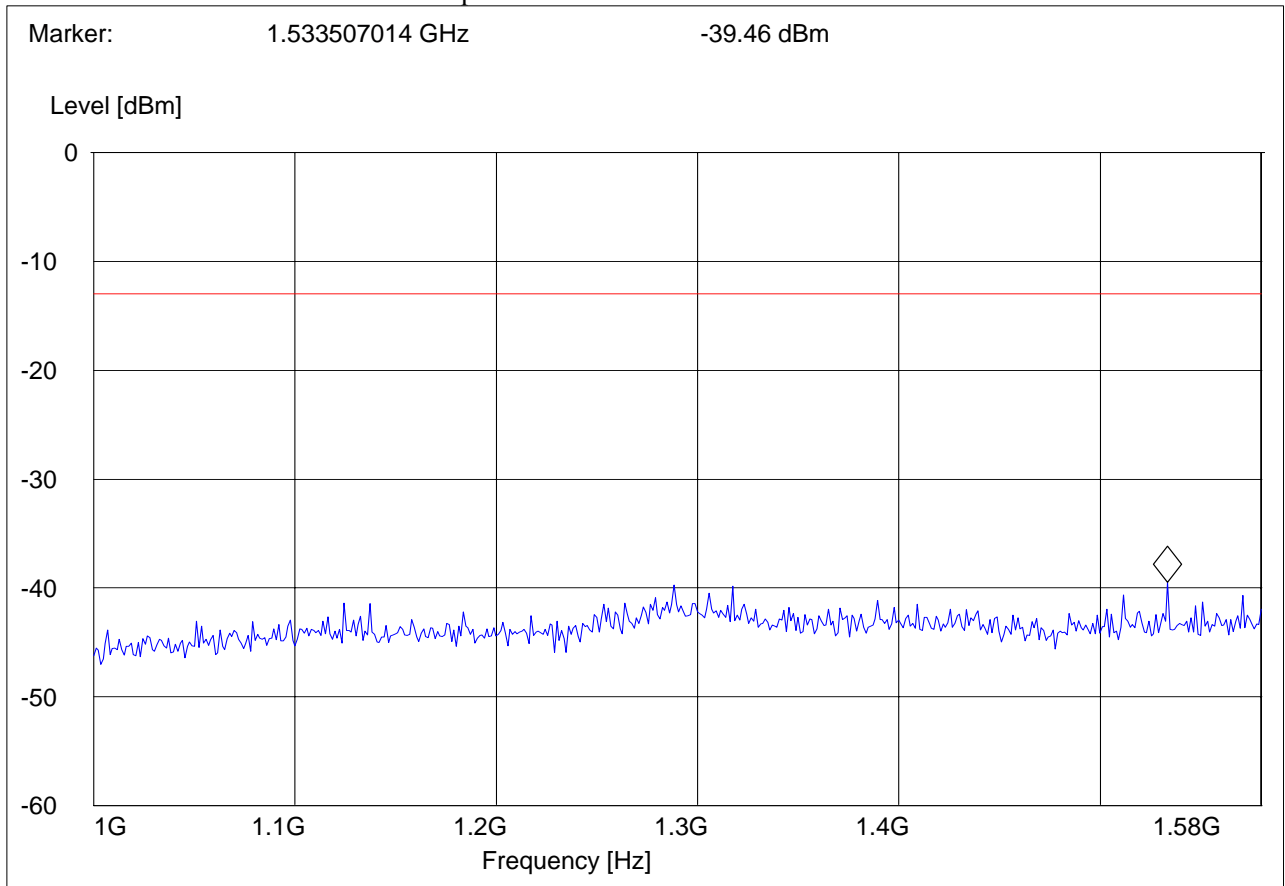


RADIATED SPURIOUS EMISSIONS (EVDO CELLULAR 800) Tx CHANNEL 777: 1.58GHz – 9GHz

EUT: Communicator (CDMA version)
 Customer:: Wireless Matrix
 Test Mode: CDMA EVDO 850
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: Car Battery
 Comments:

SWEEP TABLE: "FCC 22Spuri 1.58-9G"

Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 1.6 GHz 9.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

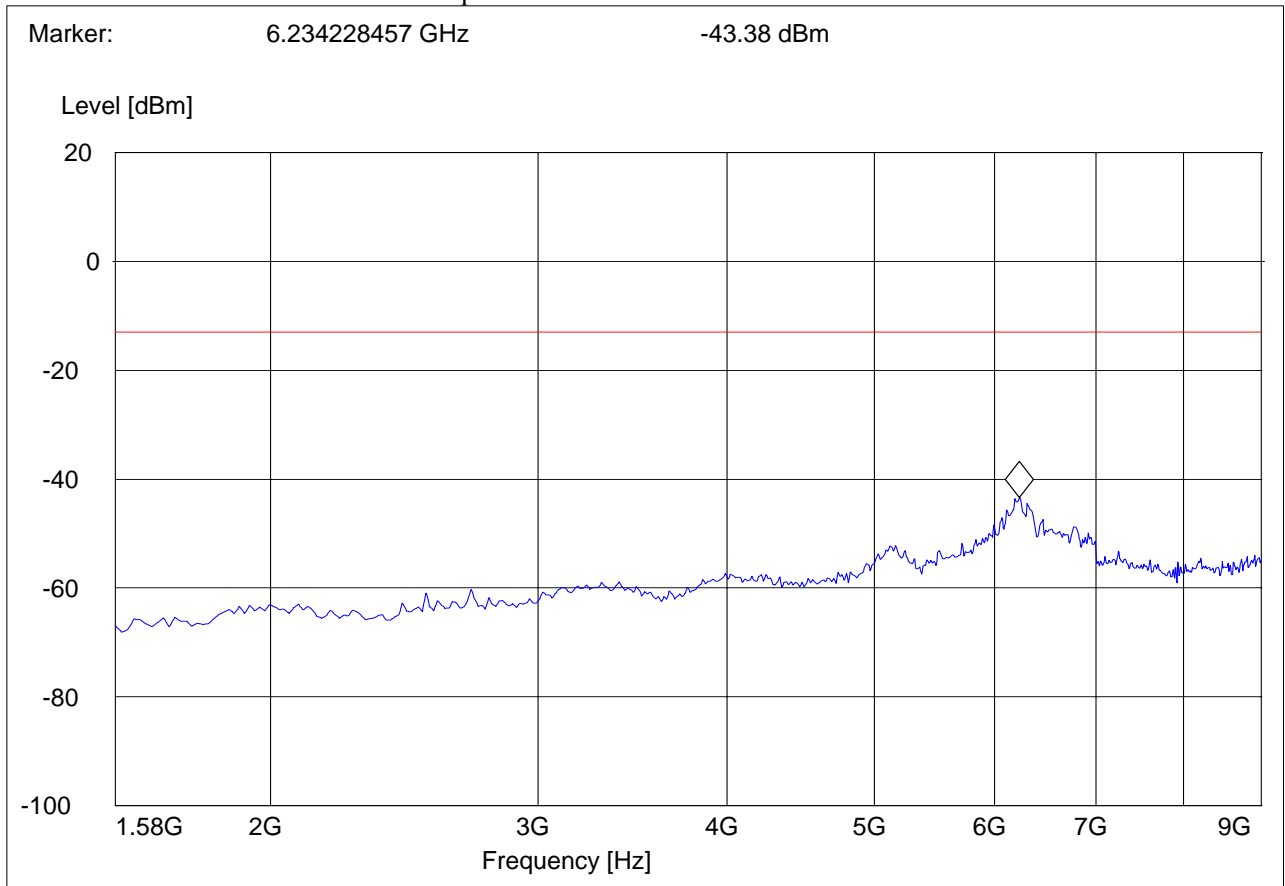

5.2.4.2 Test Results Transmitter Spurious Emission EVDO PCS 1900:

Harmonic	Tx ch-512 Freq.(MHz)	Level (dBm)	Tx ch-661 Freq. (MHz)	Level (dBm)	Tx ch-810 Freq. (MHz)	Level (dBm)
2	3700.4	NF	3760	NF	3819.6	NF
3	5550.6	NF	5640	NF	5729.4	NF
4	7400.8	NF	7520	NF	7639.2	NF
5	9251	NF	9400	NF	9549	NF
6	11101.2	NF	11280	NF	11458.8	NF
7	12951.4	NF	13160	NF	13368.6	NF
8	14801.6	NF	15040	NF	15278.4	NF
9	16651.8	NF	16920	NF	17188.2	NF
10	18502	NF	18800	NF	19098	NF
NF = NOISE FLOOR						



RADIATED SPURIOUS EMISSIONS(EVDO PCS 1900) TX: 30MHz - 1GHz

Antenna: Vertical

Note: This plot is valid for low, mid & high channels (worst-case plot)

EUT: Communicator (CDMA version)

Customer:: Wireless Matrix

Test Mode: CDMA EVDO 1900

ANT Orientation: H

EUT Orientation: H


Test Engineer: Chris

Voltage: Car Battery

Comments:

SWEEP TABLE: "FCC 24 Spur 30M-1G_V"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

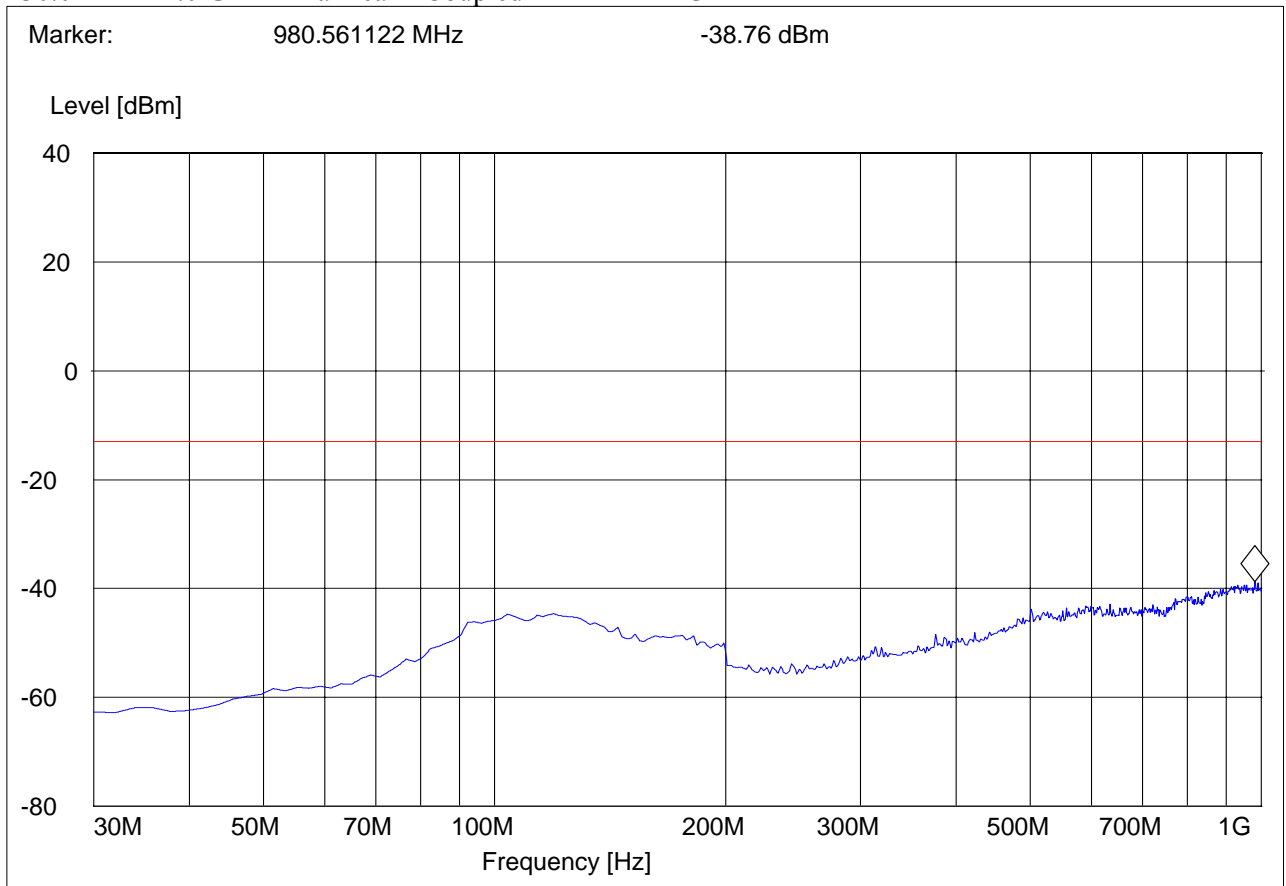



RADIATED SPURIOUS EMISSIONS(EVDO PCS 1900) TX: 30MHz - 1GHz

Antenna: Horizontal

Note: This plot is valid for low, mid & high channels (worst-case plot)

EUT: Communicator (CDMA version)

Customer:: Wireless Matrix

Test Mode: CDMA EVDO 1900

ANT Orientation: H

EUT Orientation: H


Test Engineer: Chris

Voltage: Car Battery

Comments:

SWEEP TABLE: "FCC 24 Spur 30M-1G_H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	DUMMY-DBM

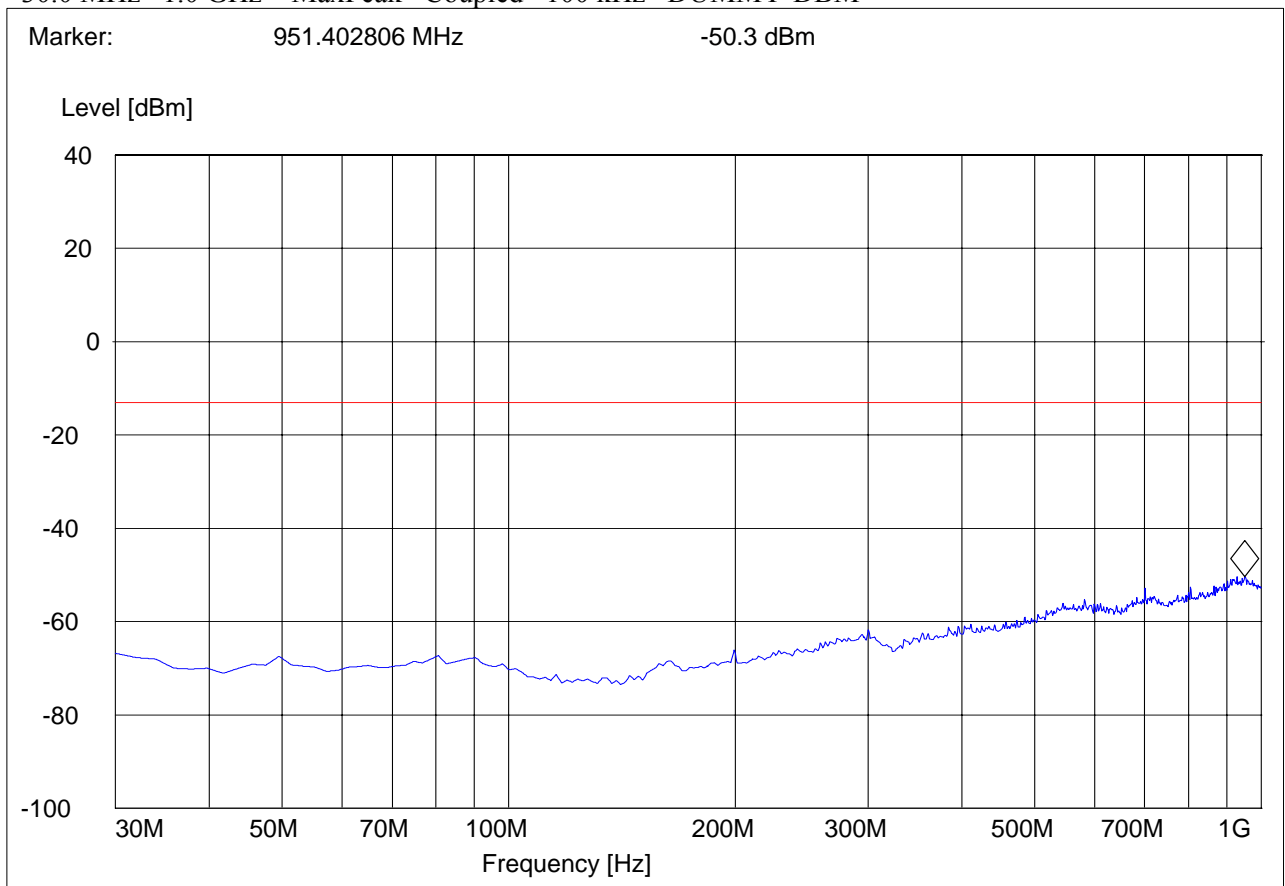




RADIATED SPURIOUS EMISSIONS(EVDO PCS 1900) Tx CHANNEL 25: 1GHz – 3GHz

Note: The peak above the limit line is the carrier freq.

EUT: Communicator (CDMA version)
 Customer:: Wireless Matrix
 Test Mode: CDMA EVDO 1900
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: Car Battery
 Comments:

SWEEP TABLE: "FCC 24Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

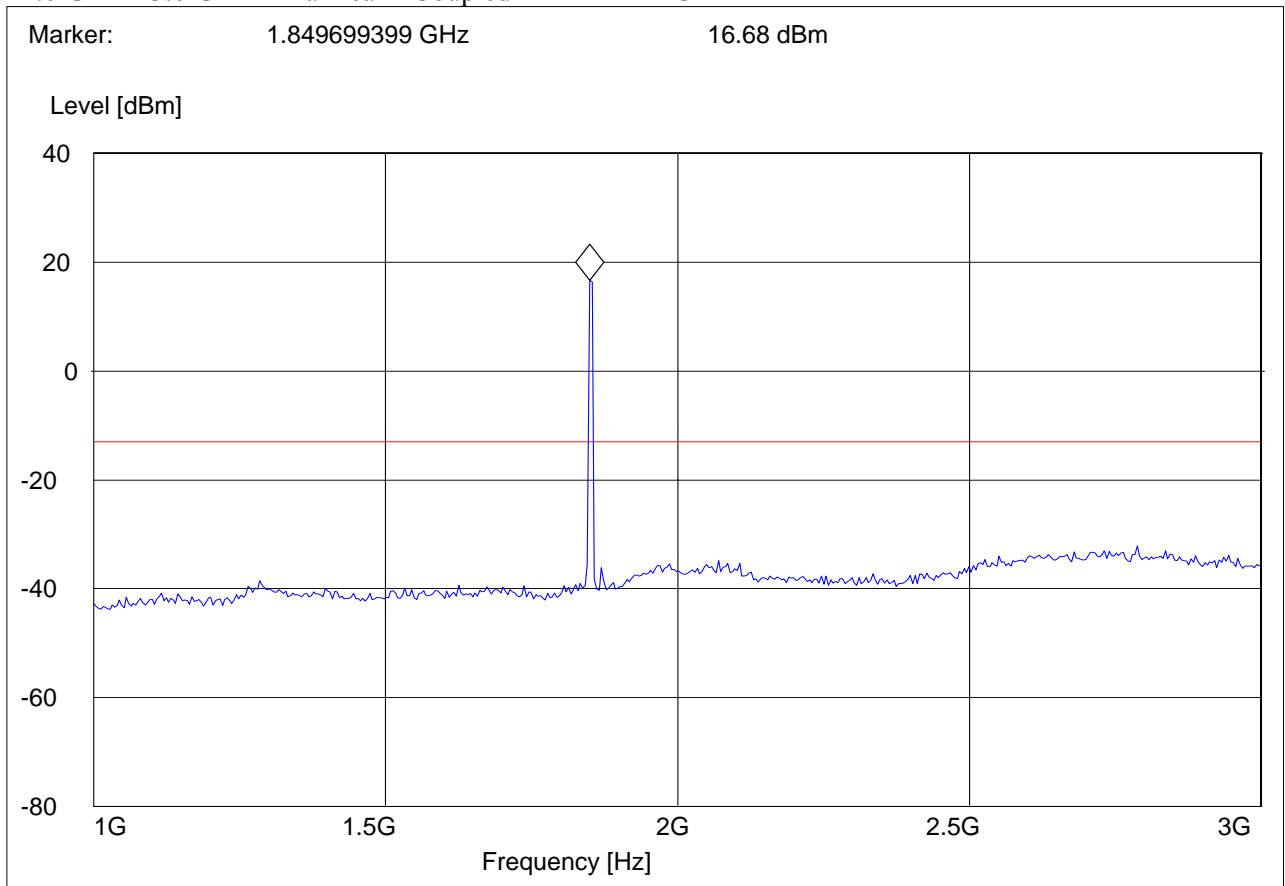


RADIATED SPURIOUS EMISSIONS(EVDO PCS 1900) Tx CHANNEL 25: 3GHz – 18GHz

EUT: Communicator (CDMA version)
 Customer:: Wireless Matrix
 Test Mode: CDMA EVDO 1900
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: Car Battery
 Comments:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 3.0 GHz 18.0 GHz MaxPeak Coupled 1 MHz DUMMY-DBM

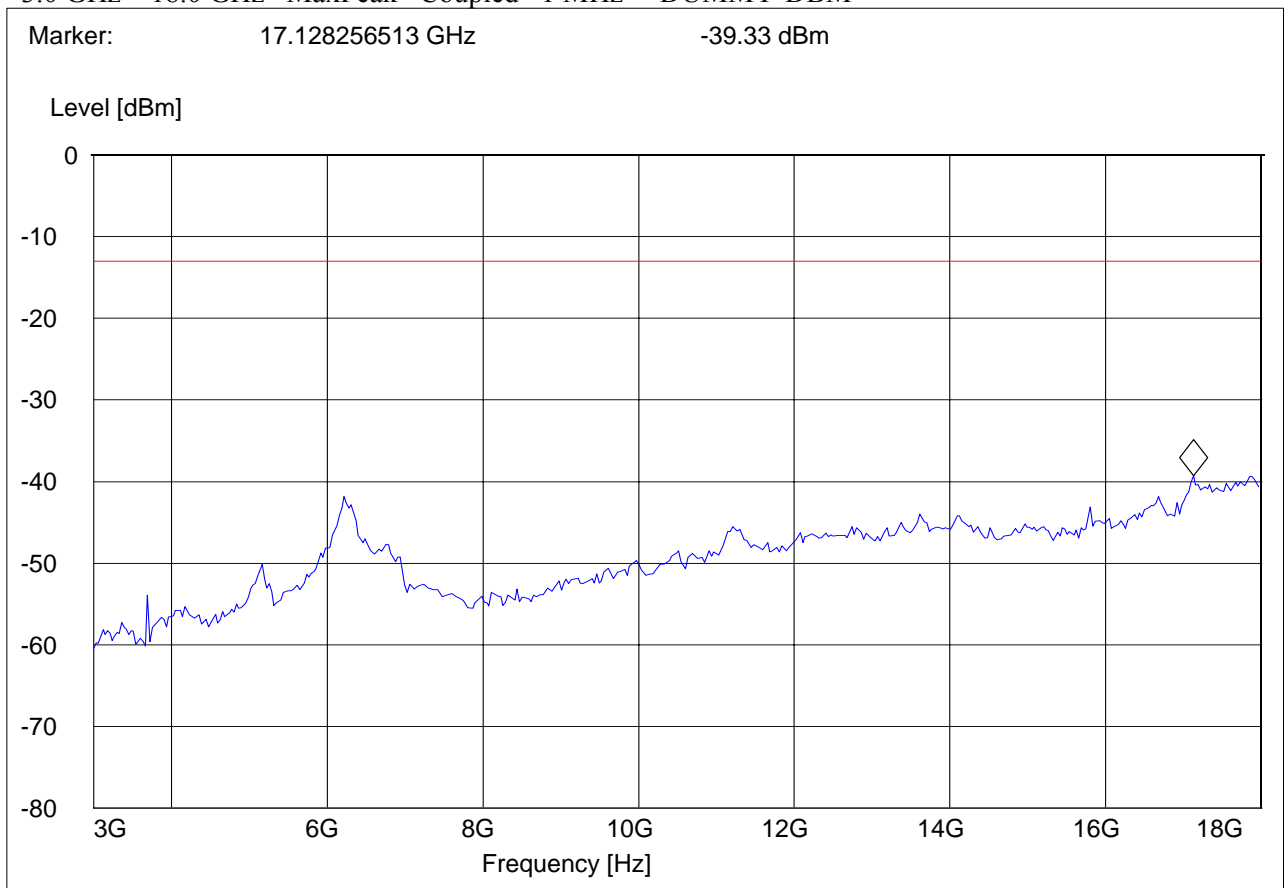




RADIATED SPURIOUS EMISSIONS(EVDO PCS 1900) Tx CHANNEL 600: 1GHz – 3GHz

Note: The peak above the limit line is the carrier freq.

EUT: Communicator (CDMA version)
 Customer:: Wireless Matrix
 Test Mode: CDMA EVDO 1900
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: Car Battery
 Comments:

SWEEP TABLE: "FCC 24Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

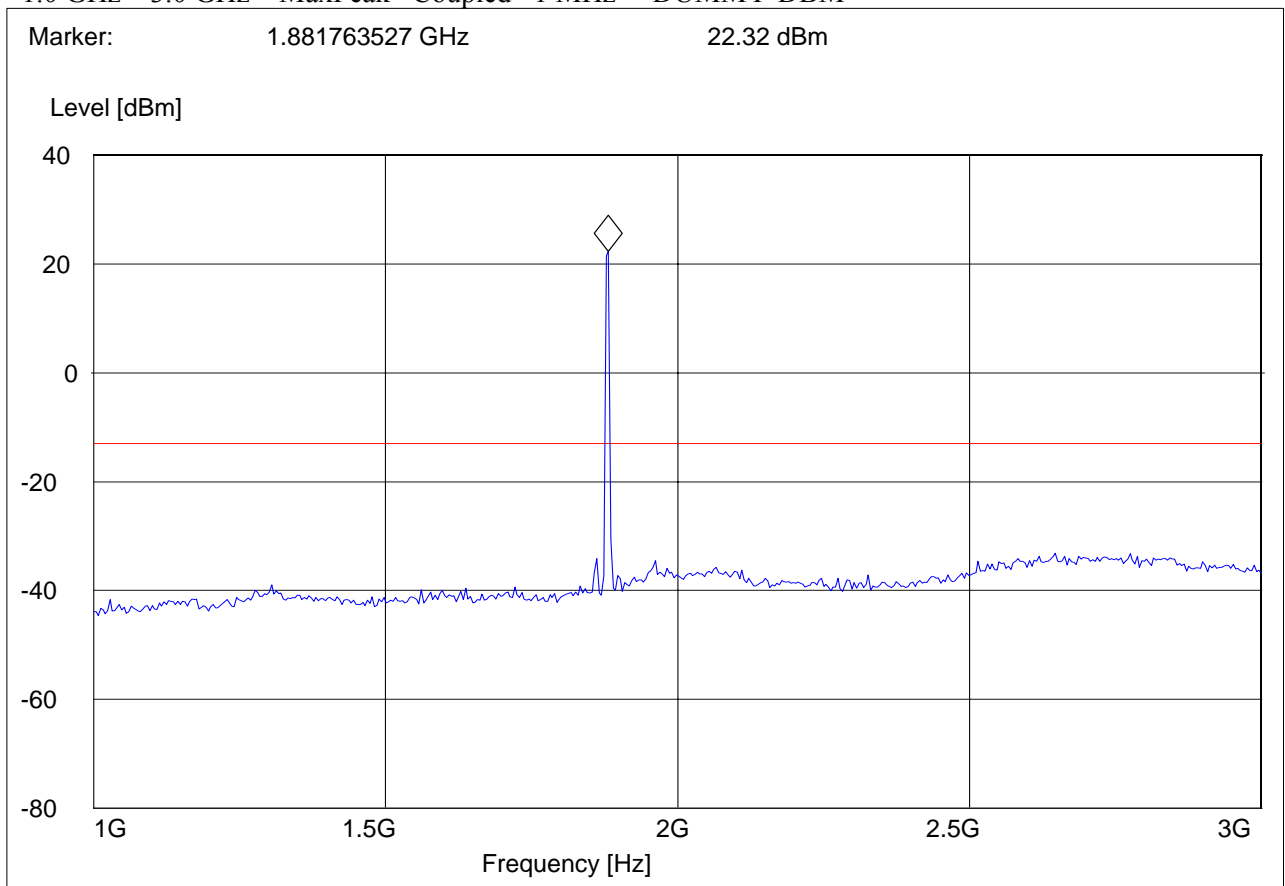


RADIATED SPURIOUS EMISSIONS(EVDO PCS 1900) Tx CHANNEL 600: 3GHz – 18GHz

EUT: Communicator (CDMA version)
 Customer:: Wireless Matrix
 Test Mode: CDMA EVDO 1900
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: Car Battery
 Comments:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

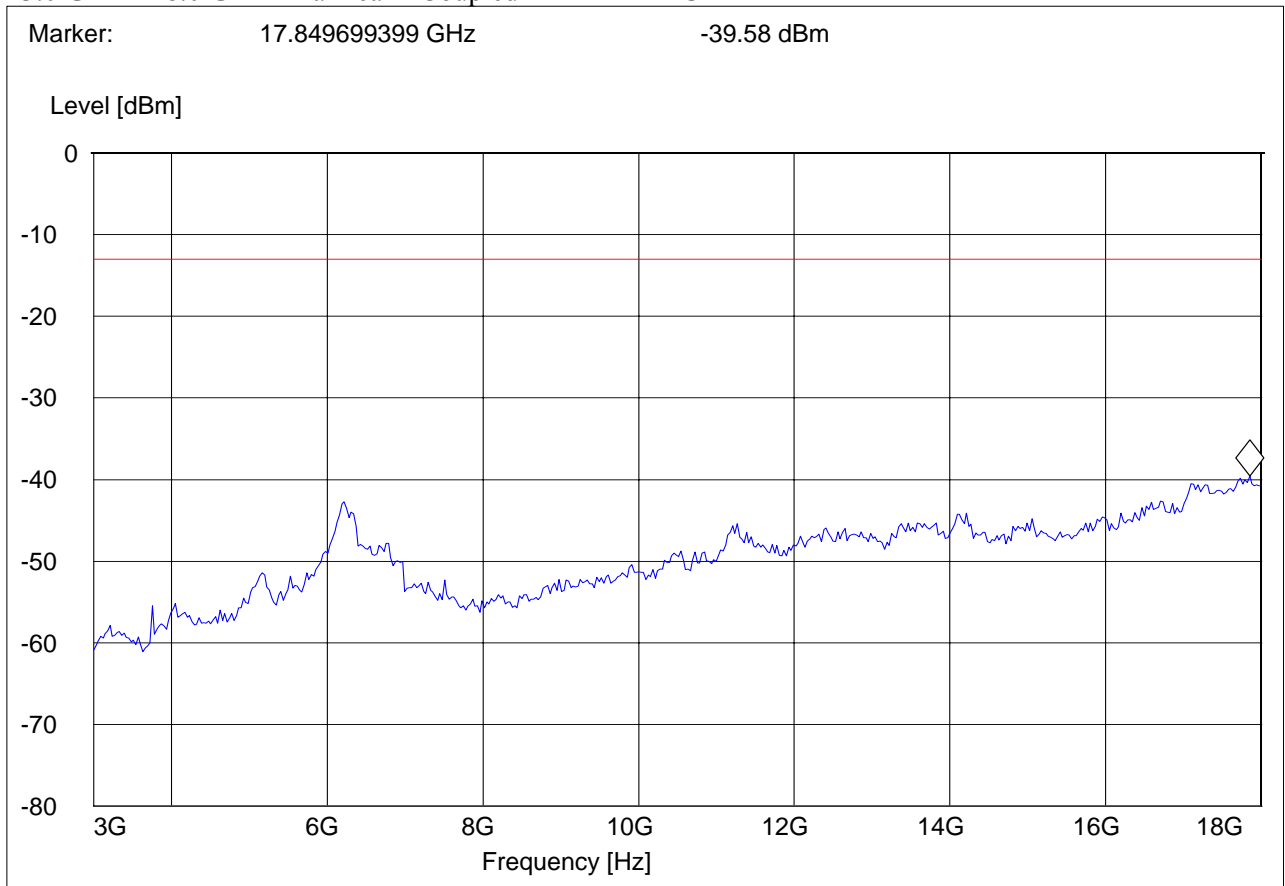


RADIATED SPURIOUS EMISSIONS(EVDO PCS 1900) Tx CHANNEL 1175: 1GHz – 3GHz

Note: The peak above the limit line is the carrier freq.

EUT: Communicator (CDMA version)
 Customer:: Wireless Matrix
 Test Mode: CDMA EVDO 1900
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: Car Battery
 Comments:

SWEEP TABLE: "FCC 24Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

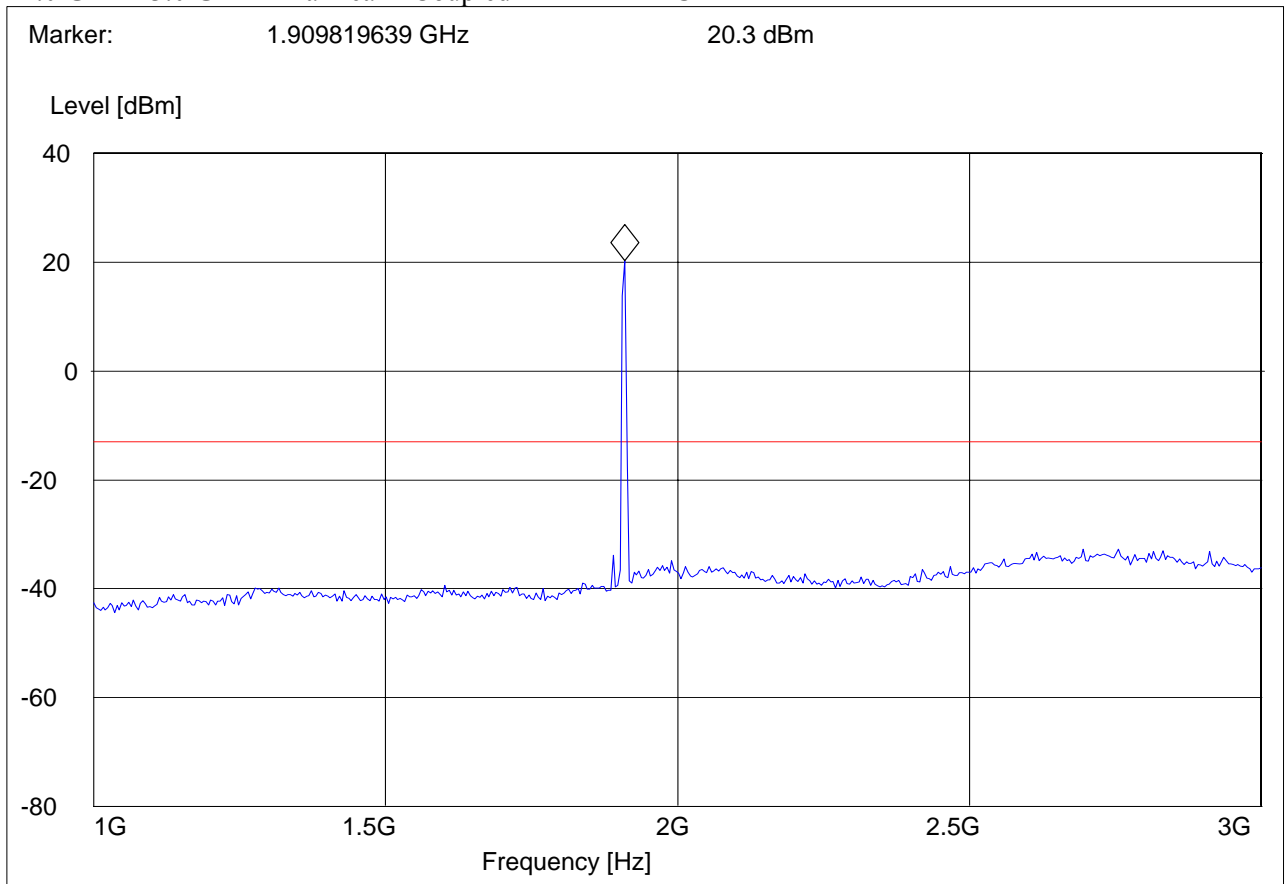




RADIATED SPURIOUS EMISSIONS(EVDO PCS 1900) Tx CHANNEL 1175: 3GHz – 18GHz

EUT: Communicator (CDMA version)
 Customer:: Wireless Matrix
 Test Mode: CDMA EVDO 1900
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: Car Battery
 Comments:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

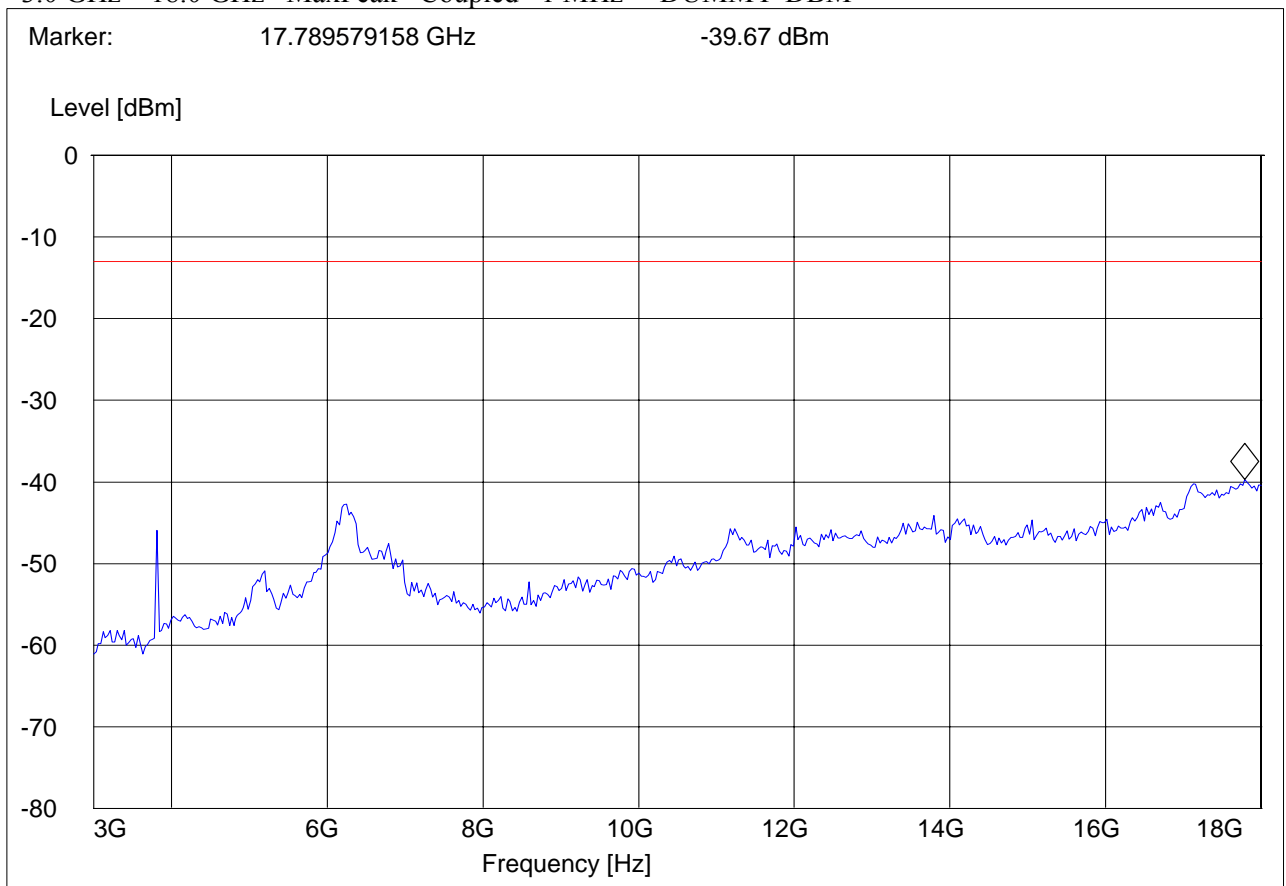




RADIATED SPURIOUS EMISSIONS(EVDO PCS 1900) 18GHz – 19.1GHz

Note: This plot is valid for low, mid, and high channels (worst-case plot)

EUT: Communicator (CDMA version)
 Customer:: Wireless Matrix
 Test Mode: CDMA EVDO 1900
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: Car Battery
 Comments:

SWEEP TABLE: "FCC 24spuri 18-19.1G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	19.1 GHz	Average	Coupled	1 MHz	DUMMY-DBM

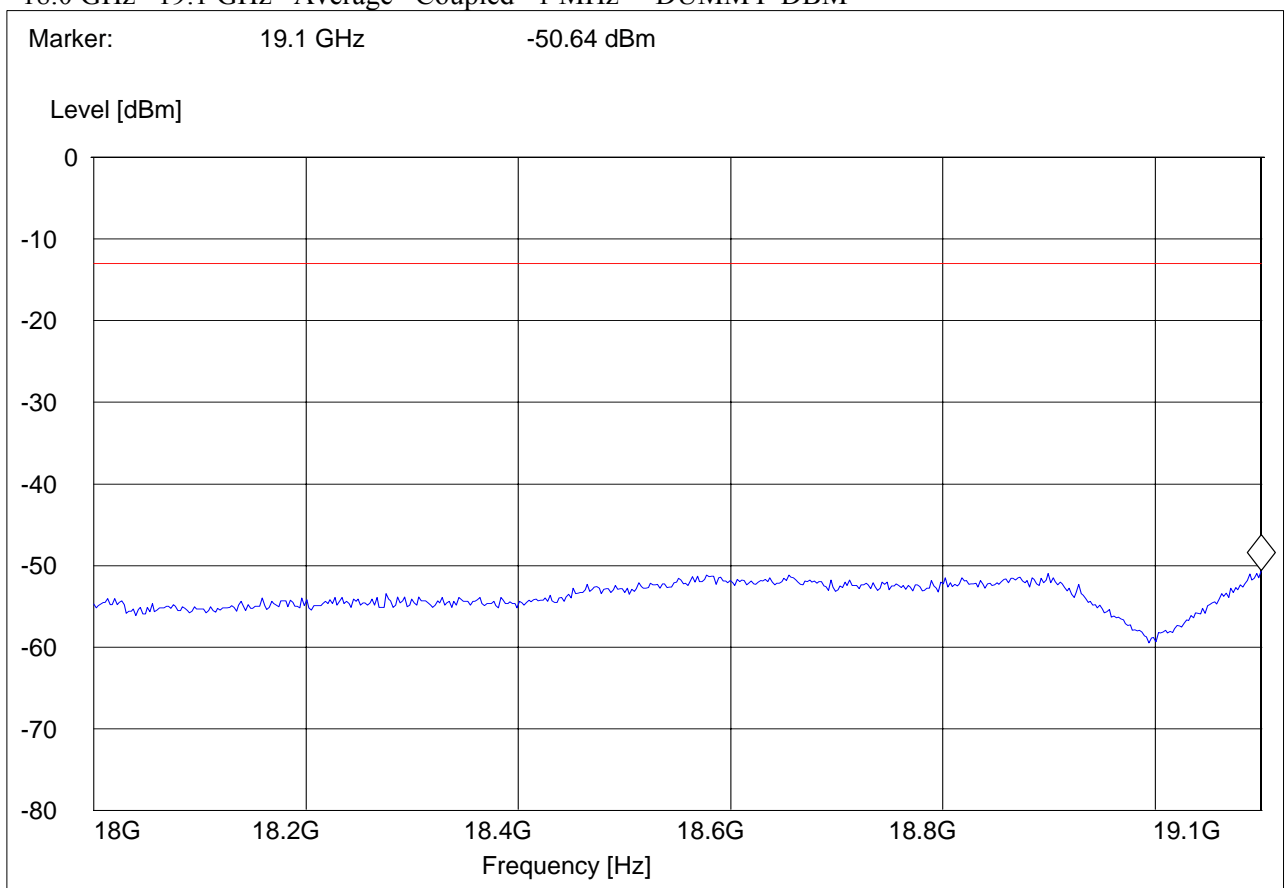

5.2.5 RECEIVER RADIATED EMISSIONS **§ 2.1053 / RSS-132 & 133**
NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 26.5GHz very short cable connections to the antenna was used to minimize the noise level.

Limits**SUBCLAUSE § RSS-133**

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

No significant emissions measurable. Plots reported here represent the worse case emissions.



5.2.5.1 Test Results Receiver Spurious Emission 30M-1GHz


Antenna: Vertical

This plot is valid for low, mid & high channels (worst-case plot)

EUT: Communicator (CDMA version)
 Customer:: Wireless Matrix
 Test Mode: CDMA EVDO 1900
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: Car Battery
 Comments:

SWEEP TABLE: "CANADA RE_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

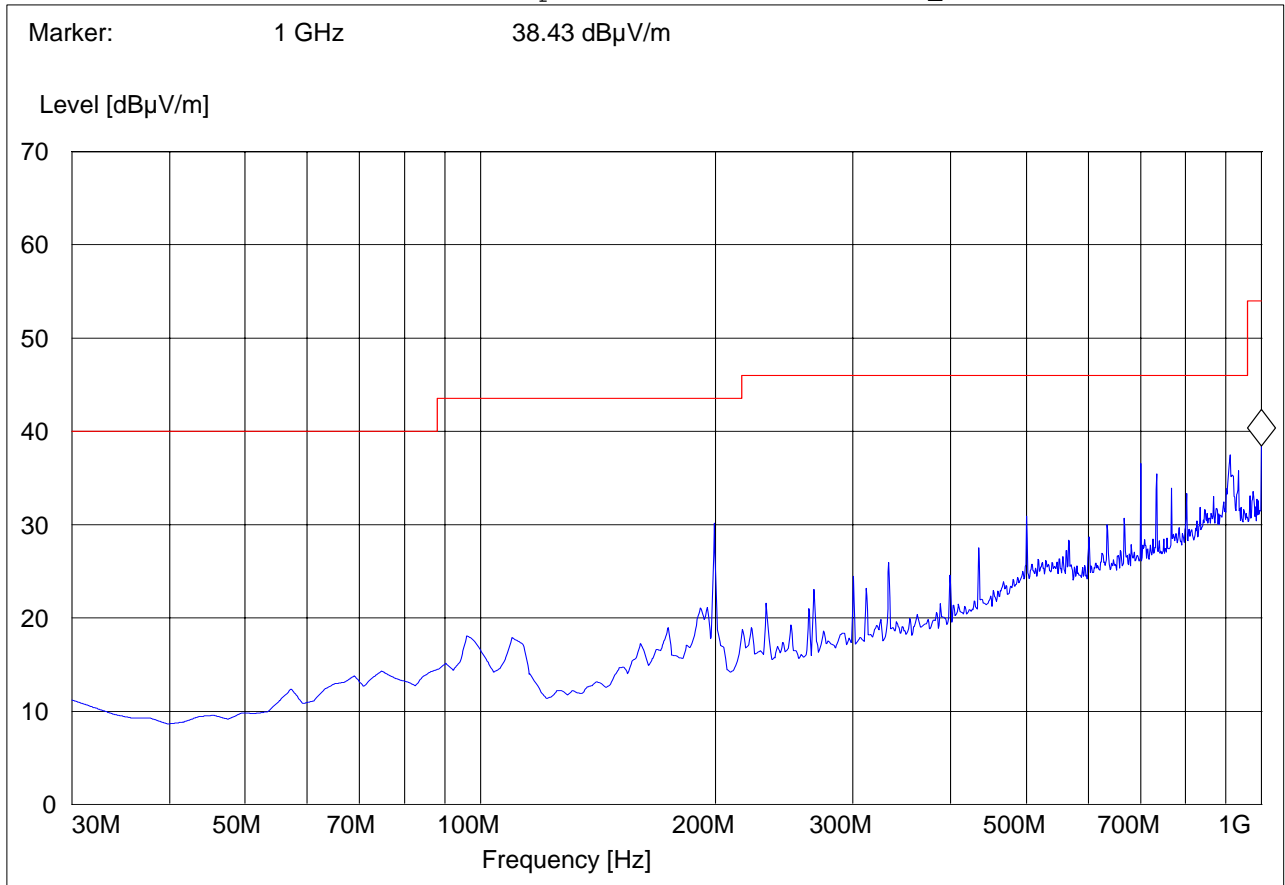



Receiver Spurious Emission IDLE: 30M-1GHz

Antenna: Horizontal

This plot is valid for low, mid & high channels (worst-case plot)

EUT: Communicator (CDMA version)

Customer:: Wireless Matrix

Test Mode: CDMA EVDO 1900

ANT Orientation: H

EUT Orientation: H


Test Engineer: Chris

Voltage: Car Battery

Comments:

SWEEP TABLE: "CANDA RE_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

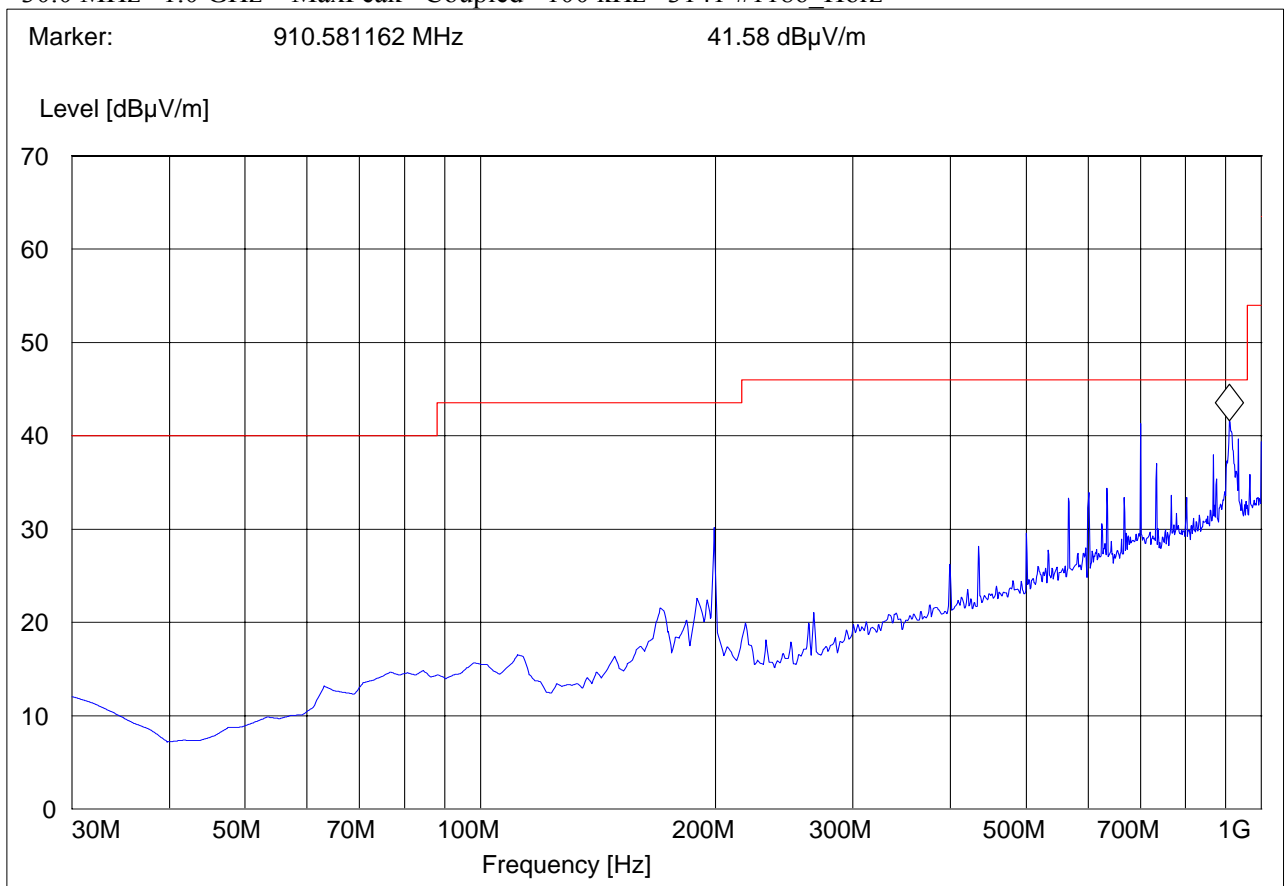



RECEIVER SPURIOUS EMISSION IDLE: 1-18GHz

This plot is valid for low, mid & high channels (worst-case plot)

EUT / Description: Communicator (CDMA version)

Customer: Wireless Matrix

Operation Mode: CDMA EVDO 850

ANT Orientation: : V

EUT Orientation:: H


Test Engineer: Chris

Voltage: Car Battery

Comments::

SWEEP TABLE: "CANADA RE_1-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn AF horz

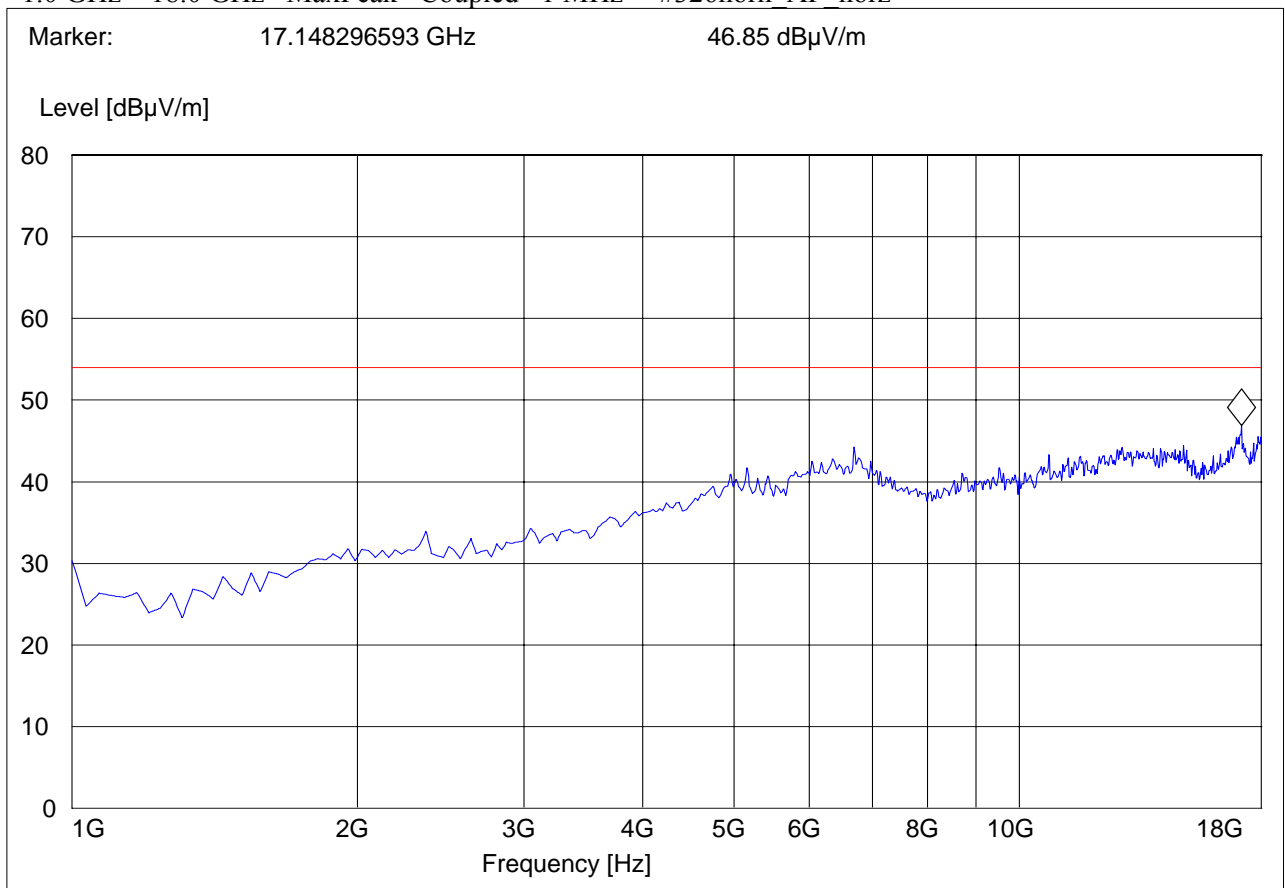

6 List of Equipment

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2009	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	May 2009	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2009	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2009	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2009	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2009	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2009	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2009	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2009	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2009	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2009	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2009	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2009	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2010	2 years

7 References

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 2--FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS October 1, 2001.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 22 PUBLIC MOBILE SERVICES October 1, 1998.


FCC Report and order 02-229 September 24, 2002.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 24 PERSONAL COMMUNICATIONS SERVICES October 1, 1998.

ANSI / TIA-603-C-2004 Land Mobile FM or PM Communications Equipment Measurement and Performance Standard November 7, 2002.


8 BLOCK DIAGRAMS

Conducted Testing

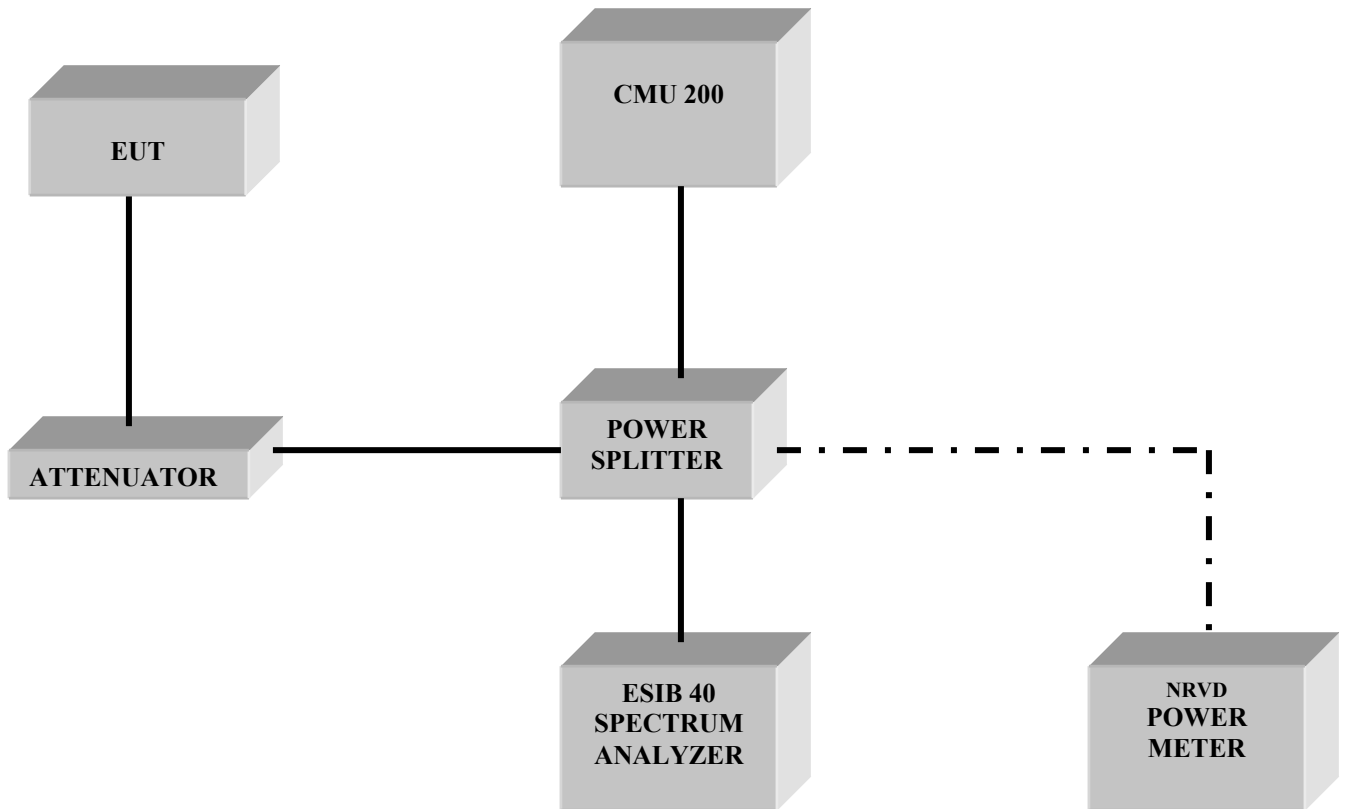

Radiated Testing

ANECHOIC CHAMBER

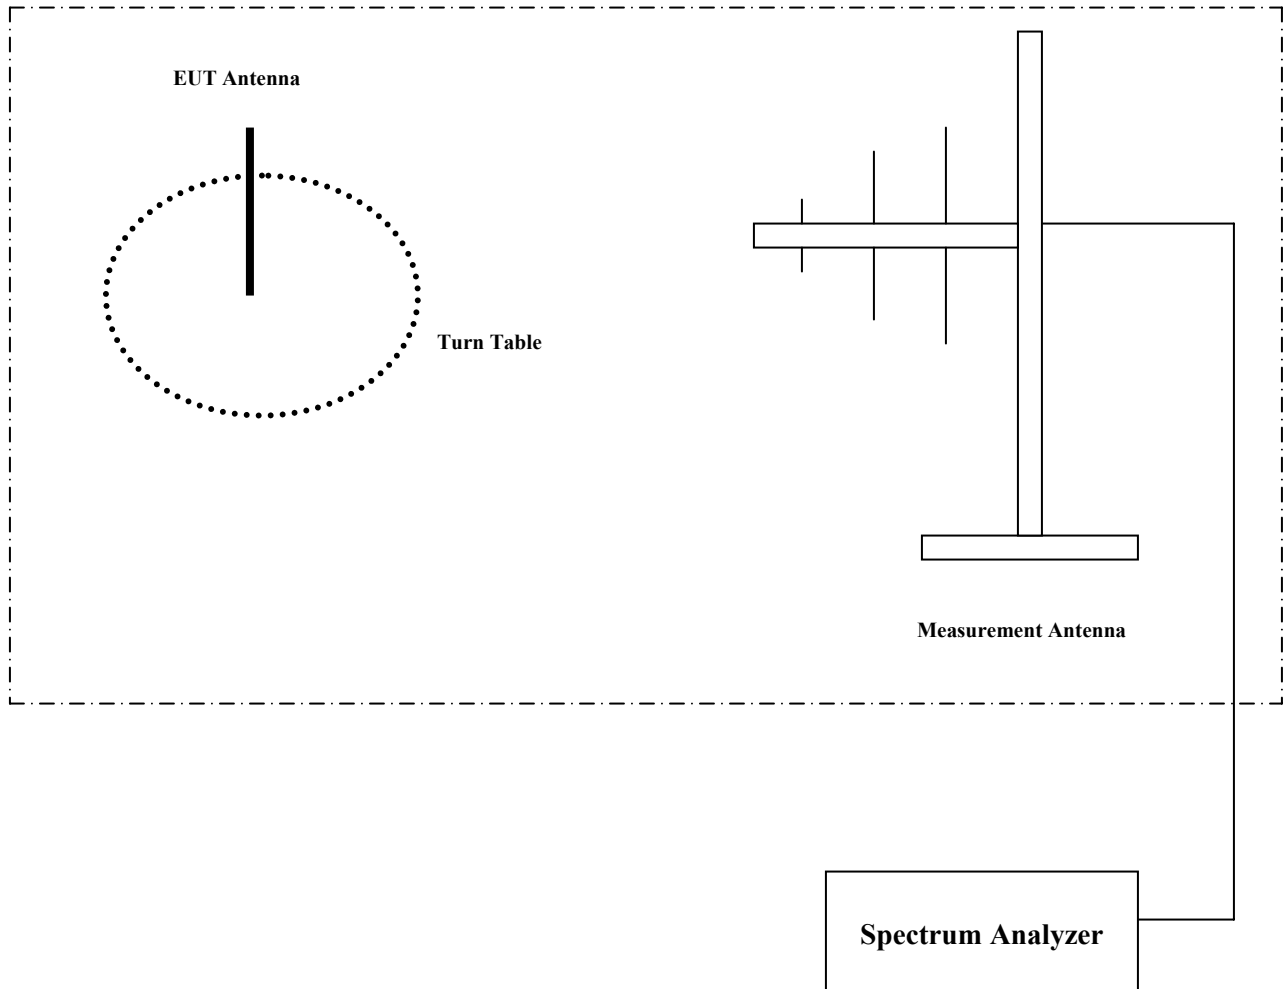

9 Revision History

Date	Report Name	Changes to report	Report prepared by
2009-03-17	EMC WIREL 016 09001 FCC22 24	Original Document	Josie Sabado
2009-04-02	EMC WIREL 016 09001 FCC22 24 rev1	Updated PAR Values	Josie Sabado