

MBS 1000-2
ANNEX-3 TO TEST REPORT# EMC_624FCC-25_2004_SAT
Modulation Test Results (FCC 2.1047)

050-801-0011 R01



Unit 1A, 3751 North Fraser Way
Burnaby, B.C. V5J 5G4
Tel: (604) 439-2444 Fax: (604) 439-2447

1 Purpose

The purpose of this test is to determine the MBS1000-2 transmitter modulating waveform.

2 Test Equipment

Following is a list of test equipment used.

- **HP Spectrum Analyzer 4396A** with frequency range from 2Hz to 1.8GHz.
S/N: 3241J00153 Calibrated by WESTCAN
Calibration Date: 21 July 2003 Calibration Due: 21 July 2004
- **AGILENT OSCILLOSCOPE 54642D**
S/N: MY42000553 Calibrated by AGILENT
Calibration Date : 04 Nov 2002 Calibration Due: 04 Nov 2004

3 Results

Two waveforms are attached, representing the modulating signal and the output of the transmitter waveform.

The modulating signal rate is 3375 symbols/sec.

The initial power burst is 7 ms long

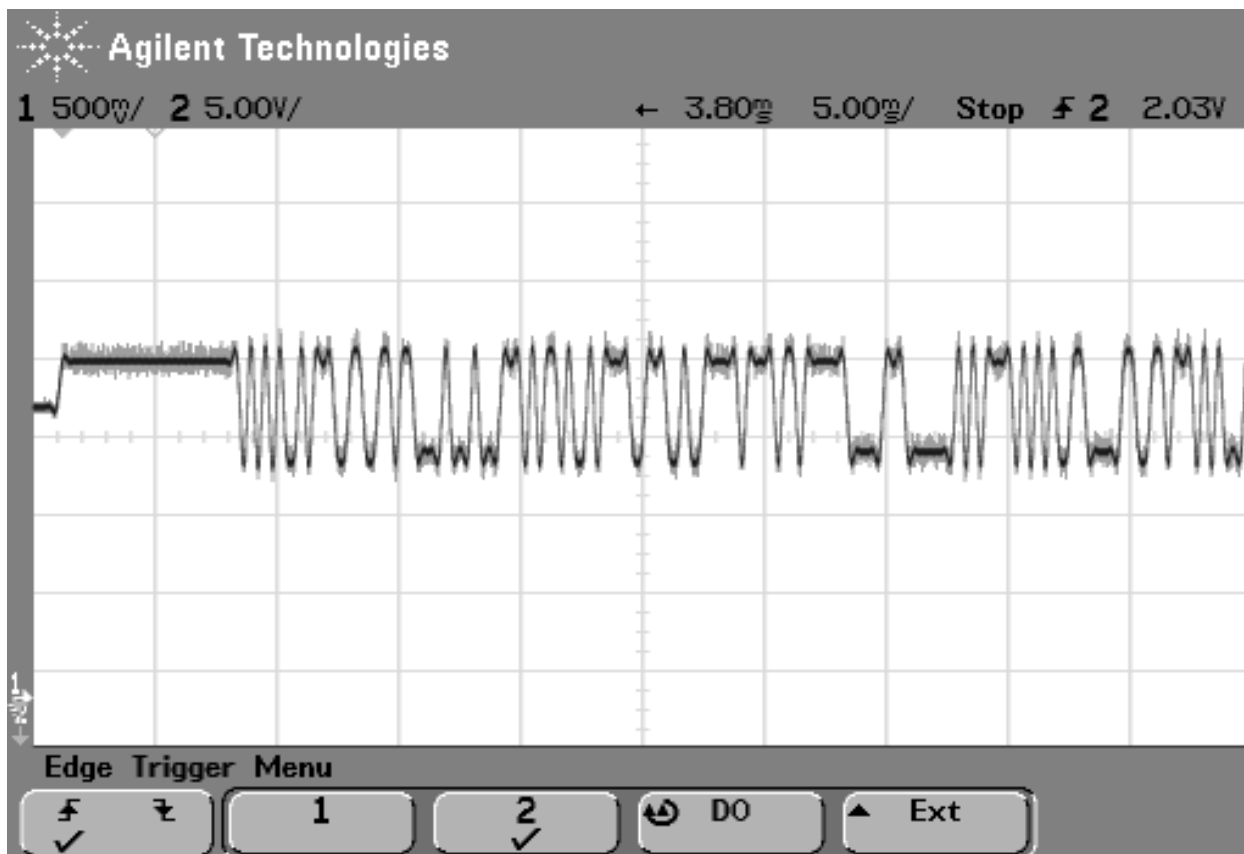


Figure 1. Modulating signal

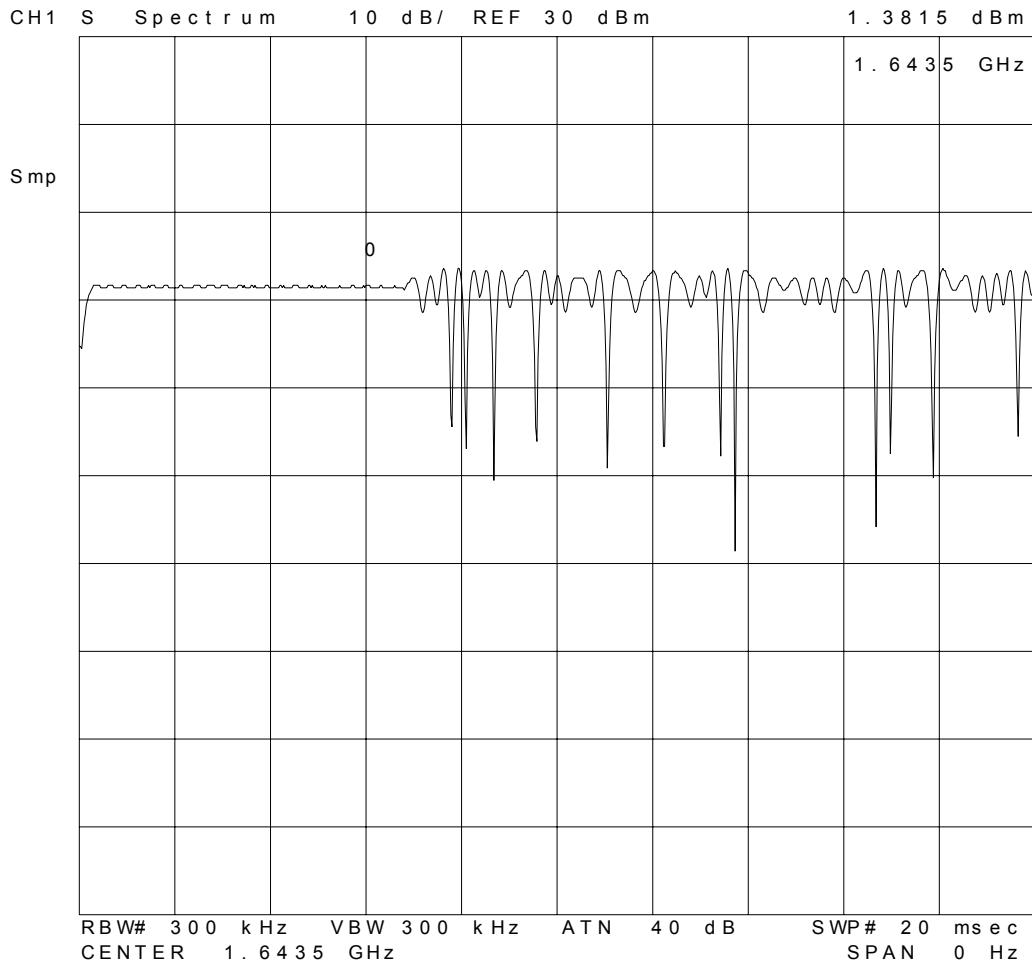


Figure 2. Output power waveform