



# FCC Test report

Test report no.: WIREL\_010\_06002\_MBS2\_LP\_G24E\_FCC-25

**FCC Part 25 / RSS 170**  
**Model: MBS2-LP EDGE**  
**FCC ID: P5IMBS2LPE**  
**IC-ID: 1478A-MBS2LPE**



FCC listed # 101450

IC recognized # 3925

## **CETECOM Inc.**

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686  
Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

**Table of Contents**

- 1 General information**
  - 1.1 Notes**
  - 1.2 Testing laboratory**
  - 1.3 Details of applicant**
  - 1.4 Application details**
  - 1.5 Test item**
  - 1.6 Test standards**
  
- 2 Technical test**
  - 2.1 Summary of test results**
  - 2.2 Test report**
  
- 1 General information**
  - 1.1 Notes**

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc.

**TEST REPORT PREPARED BY:**  
**EMC Engineer: Satya Radhakrishna**

**1.2 Testing laboratory**

**CETECOM Inc.**

411 Dixon Landing Road, Milpitas, CA-95035, USA

Phone: +1 408 586 6200 Fax: +1 408 586 6299

E-mail: [lothar.schmidt@cetecomusa.com](mailto:lothar.schmidt@cetecomusa.com)

Internet: [www.cetecom.com](http://www.cetecom.com)

**1.3 Details of applicant**

**Name** : **Wireless Matrix Corporation**  
**Street** : **12369-B Sunrise Valley Drive**  
**City / Zip Code** : **Reston, VA 20191**  
**Country** : **USA**  
**Contact** : **Darryl Strucko**  
**Telephone** : **703.262.4021**  
**Tele-fax** : **703.262.0380**  
**e-mail** : **Darrvl.strucko@wrx-us.com**

**1.4 Application details**

**Date of receipt test item** : **2004-10-04**  
**Date of test** : **2006-10-18 - 2006-11-02**

**1.5 Test item**

**Manufacturer** : **Wireless Matrix Corporation**  
**Marketing Name** : **Mobile Base Station 2 Low Profile with EDGE(MBS2-LP EDGE)**  
**Model No.** : **MBS2-LP EDGE**  
**Description** : **Satellite, EDGE, 802.11,GPS in one unit with RS-232 and Ethernet capabilities.**  
**FCC-ID** : **P5IMBS2LPE**  
**IC-ID** : **1478A-MBS2LPE**

**Additional information**

**Frequency** : **824.2MHz – 848.8MHz for GSM 850  
1850.2MHz – 1909.8MHz for PCS 1900**  
**Type of modulation** : **GFSK**  
**Number of channels** : **GSM**  
**Antenna** : **GSM:Monopole @ 6-7 dBi max, Satellite: Spiral @ 4.5 dBi max,802.11: Elevated Dipole @ 6.5 dBi max**  
**Power supply** : **13.6VDC Nominal voltage**  
**Output power** : **0.6W @ 850 MHz, 1W @ 1900 MHz**  
**Extreme temp. Tolerance** : **Lower: -20°C Upper: +70°C**

**1.6 Test standards:** **FCC Part 25 / CANADA RSS-170**

**Note:** All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

**2 Technical test**

**2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests Performed	
Final Verdict: (only "passed" if all single measurements are "passed")	<b>Passed</b>

**Technical responsibility for area of testing:**

2006-11-06 EMC & Radio

Lothar Schmidt  
(Technical Manager)



**Date**

**Section**

**Name**

**Signature**

**2.2 Test report**

**TEST REPORT**

**Test report no.: WIREL\_010\_06002\_MBS2\_LP\_G24E\_FCC-25**  
**(Model: MBS2-LP EDGE)**

---

**TEST REPORT REFERENCE**

<b>PARAMETER TO BE MEASURED</b>	<b>PARAGRAPH</b>	<b>PAGE</b>
<b>POWER OUTPUT</b>	<b>§ 25.204</b> .....	<b>7</b>
<b>FREQUENCY STABILITY</b>	<b>§ 25.202 (E)</b> .....	<b>11</b>
<b>OCCUPIED BANDWIDTH</b>	<b>§2.1049</b> .....	<b>12</b>
<b>EMISSIONS LIMITS</b>	<b>§25.202(F)</b> .....	<b>16</b>
<b>EMISSION MASK</b>	<b>§25.202 (F)</b> .....	<b>30</b>
<b>RECEIVER RADIATED EMISSIONS</b>	<b>§ 15.209</b> .....	<b>34</b>
<b>CONDUCTED SPURIOUS EMISSIONS</b>	.....	<b>38</b>
<b>CONDUCTED EMISSIONS</b>	<b>§ 15.107/207</b> .....	<b>42</b>
<b>TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS</b>	.....	<b>43</b>
<b>BLOCK DIAGRAMS</b>	.....	<b>44</b>

**ANNEX-1: FREQUENCY ACCURACY AND STABILITY TESTS**

**ANNEX-2: GLONASS BAND NOISE AND SPURIOUS TESTS**

**ANNEX-3: MODULATION TEST RESULTS**

**POWER OUTPUT**

§ 25.204

**Summary:**

During the process of testing, the EUT was controlled via HyperTerminal.

This paragraph contains peak conducted output power and EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

**Method of Measurements:**

The EUT was set up for the max. Output power with pseudo-random data modulation.

The power was measured with R&S Spectrum Analyzer ESIB 40 (peak)

These measurements were done at 3 frequencies, 1626.5 MHz, 1643.5 MHz and 1660.5 MHz (bottom, middle and top of operational frequency range)

**Conducted:**

Frequency (MHz)	Conducted Peak Power (dBm)
1626.5	34.37
1643.5	34.35
1660.5	34.05

ANALYZER SETTINGS: RBW = VBW = 1MHz

**Radiated:****EIRP Measurements**

Measured with the substitution method.

1626.5 MHz: 28.11dBm + 8.15dBi gain = 36.26 dBm EIRP

1643.5 MHz: 27.60dBm + 8.15dBi gain = 35.75 dBm EIRP

1660.5 MHz: 26.83dBm + 8.15dBi gain = 34.98 dBm EIRP


Frequency (MHz)	EIRP (dBm)
1626.5	36.26
1643.5	35.75
1660.5	34.98

ANALYZER SETTINGS: RBW = VBW = 1MHz

Conducted Peak Power

Lowest Channel: 1626.5MHz

	Ref Lvl	34.35 dBm	RBW	1 MHz	RF Att	50 dB
	44.5 dBm	1.64354008 GHz	VBW	1 MHz		
			SWT	5 ms	Unit	dBm

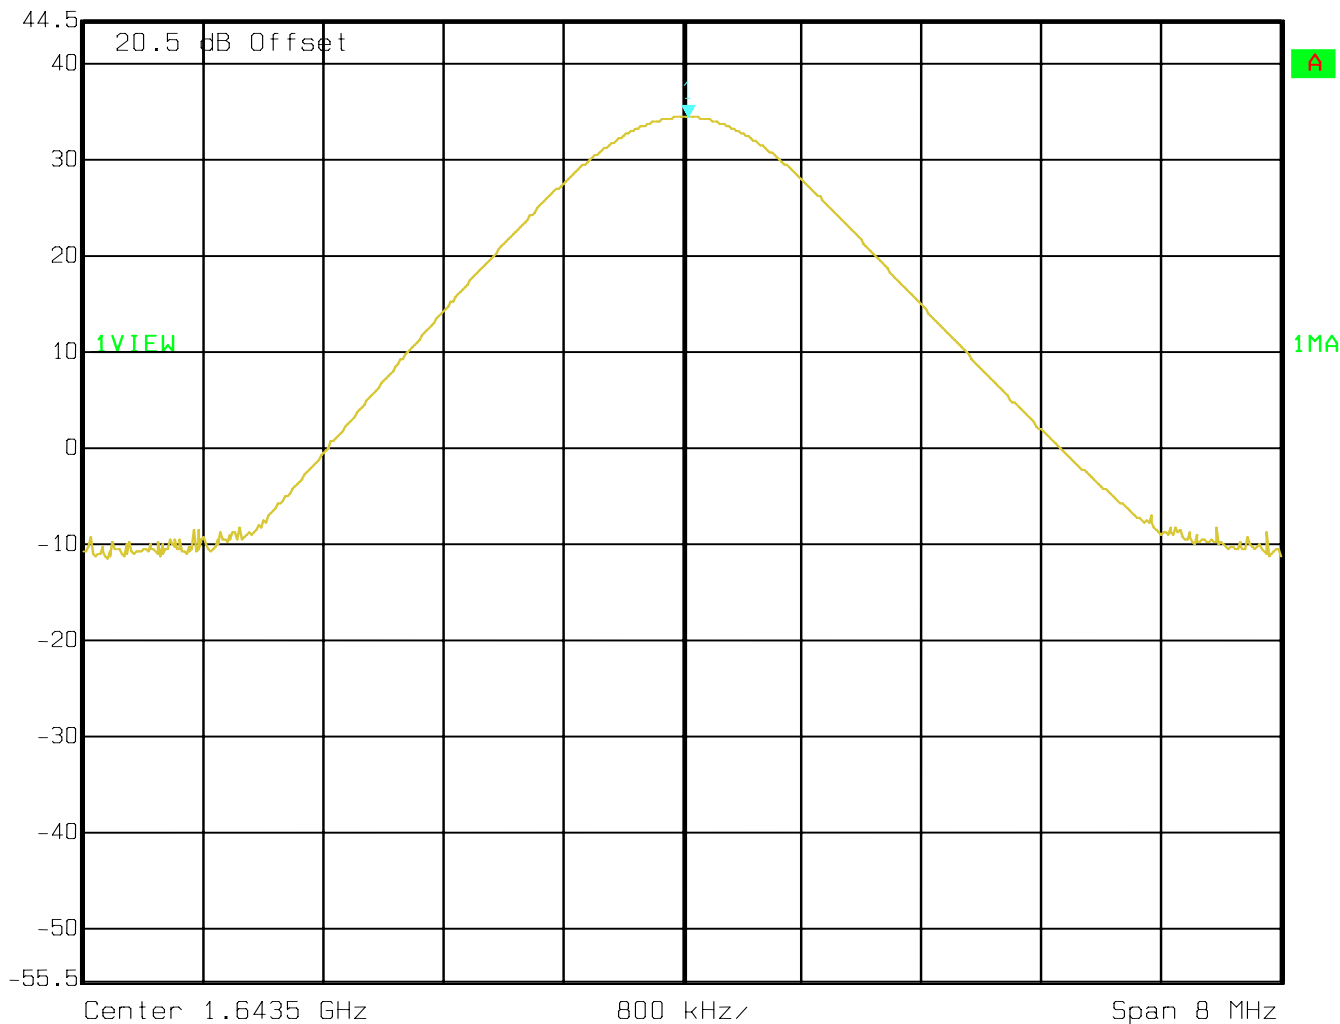


Date: 18.OCT.2006 14:53:40



**Conducted Peak Power**  
**Mid Channel: 1643.5MHz**


 Ref Lvl 44.5 dBm      Marker 1 [T1] 34.35 dBm      RBW 1 MHz      RF Att 50 dB  
44.5 dBm      1.64354008 GHz      VBW 1 MHz      Unit dBm  
SWT 5 ms

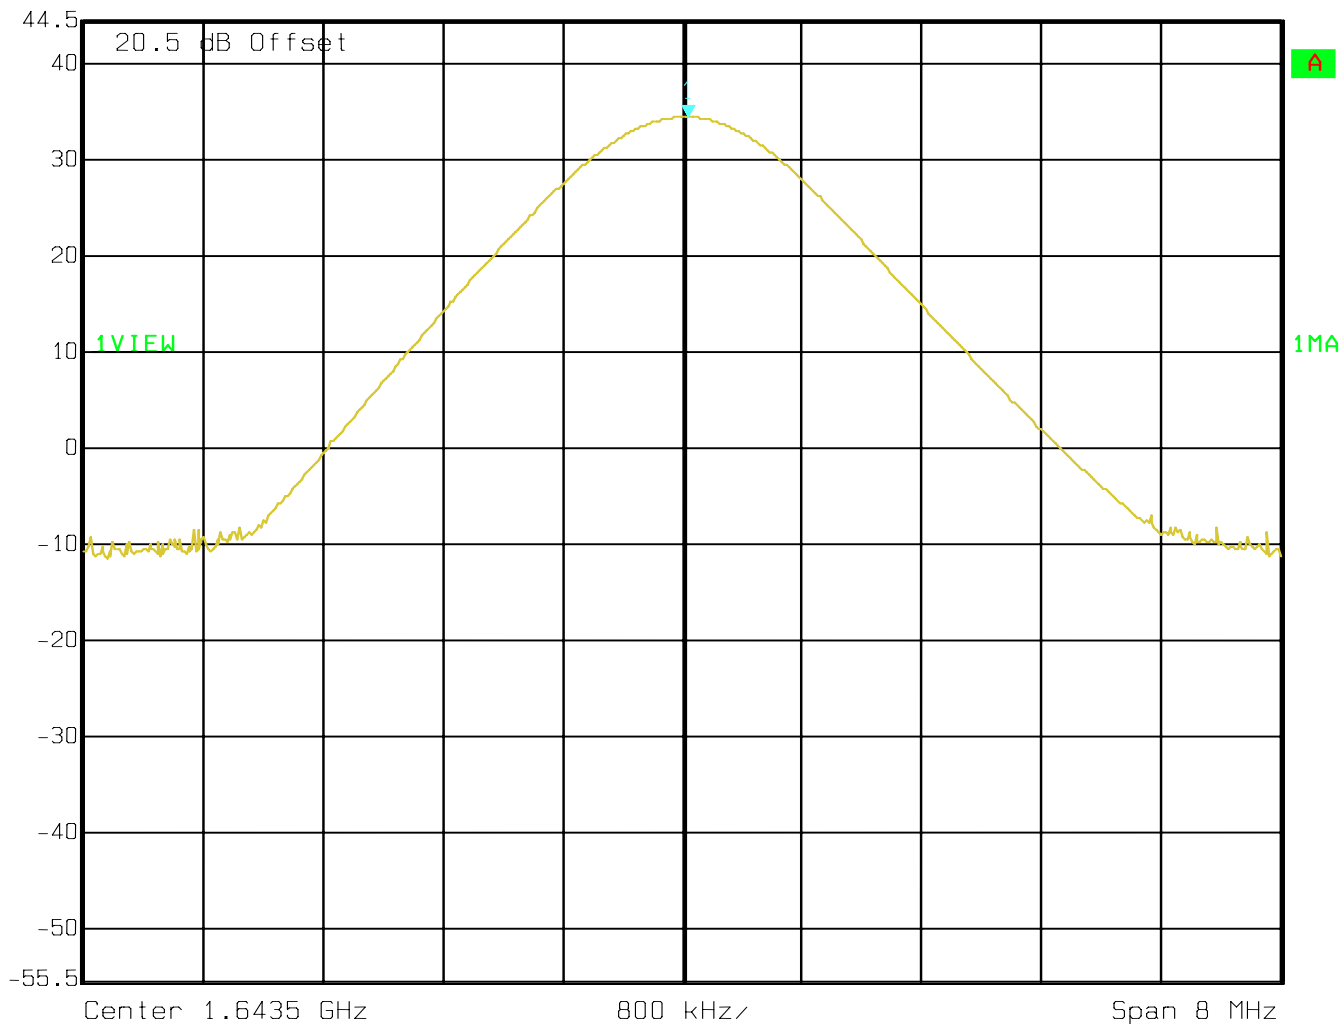

Date: 18.OCT.2006 14:53:40

**Conducted Peak Power**  
**Highest Channel: 1660.5MHz**

 Ref Lvl 44.5 dBm      Marker 1 [T1] 34.05 dBm      RBW 1 MHz      RF Att 50 dB  
44.5 dBm      1.66050000 GHz      VBW 1 MHz  
SWT 5 ms      Unit dBm

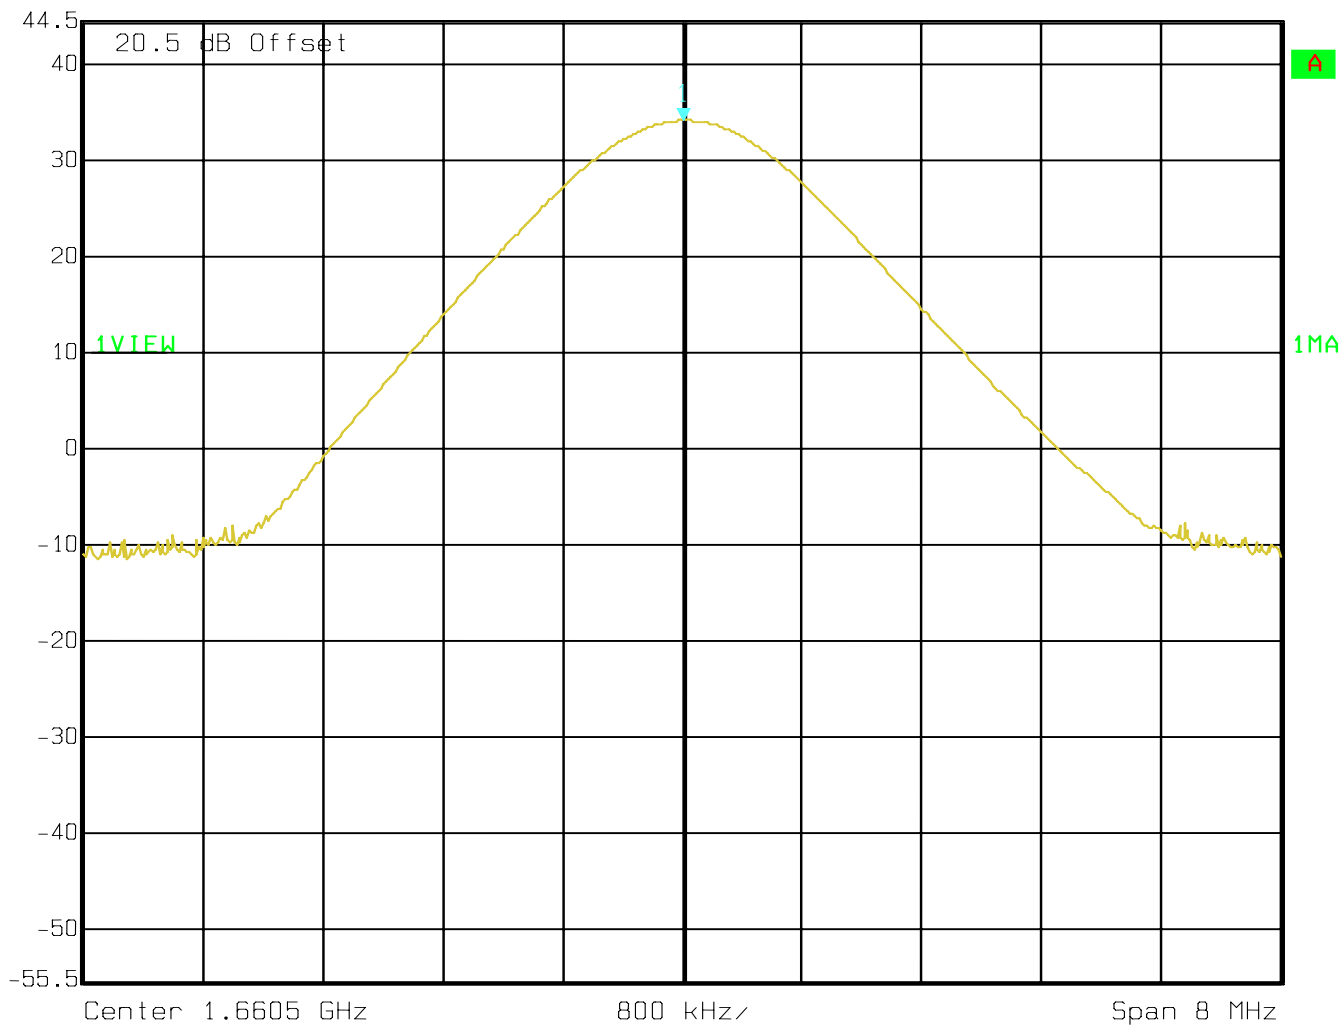

Date: 18.OCT.2006 14:53:02

---

FREQUENCY STABILITY

§ 25.202 (e)

**Frequency Stability measurements were performed by Wireless Matrix. See Appendix-1 to this test report.**

**OCCUPIED BANDWIDTH**

**§2.1049**


**Occupied Bandwidth Results**

Table below lists the measured -20dBc BW (99%). Spectrum analyzer plots are included on the following pages.

<b>Frequency</b>	<b>Occupied Bandwidth (-20dBc BW) kHz</b>
<b>1626.5</b>	<b>6.2325</b>
<b>1643.5</b>	<b>6.2725</b>
<b>1660.5</b>	<b>6.2926</b>

**Lowest Channel: 1626.5MHz**  
**Occupied Bandwidth (-20dBc BW)**


	Delta 1 [T1]	RBW	1 kHz	RF Att	60 dB
	Ref Lvl	-0.41 dB	VBW	1 kHz	
	51 dBm	6.23246493 kHz	SWT	150 ms	Unit dBm

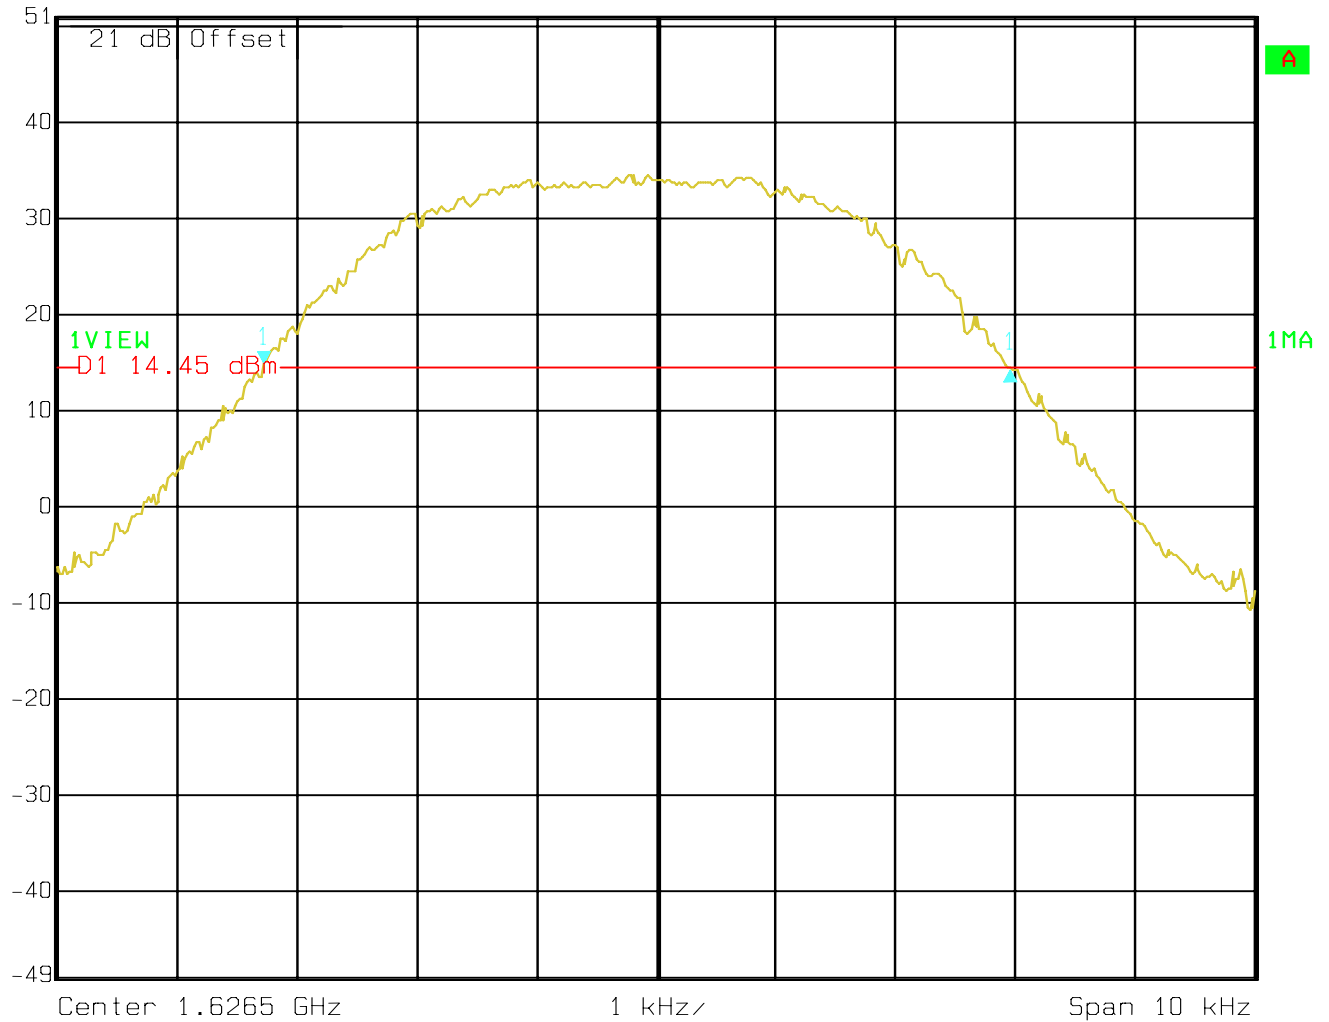

Date: 18.OCT.2006 10:43:46

**Mid Channel: 1643.5MHz**  
**Occupied Bandwidth (-20dBc BW)**

	Ref Lvl	Delta 1 [T1]	RBW	1 kHz	RF Att	60 dB
	51 dBm	0.05 dB	VBW	1 kHz		
		6.27254509 kHz	SWT	150 ms	Unit	dBm

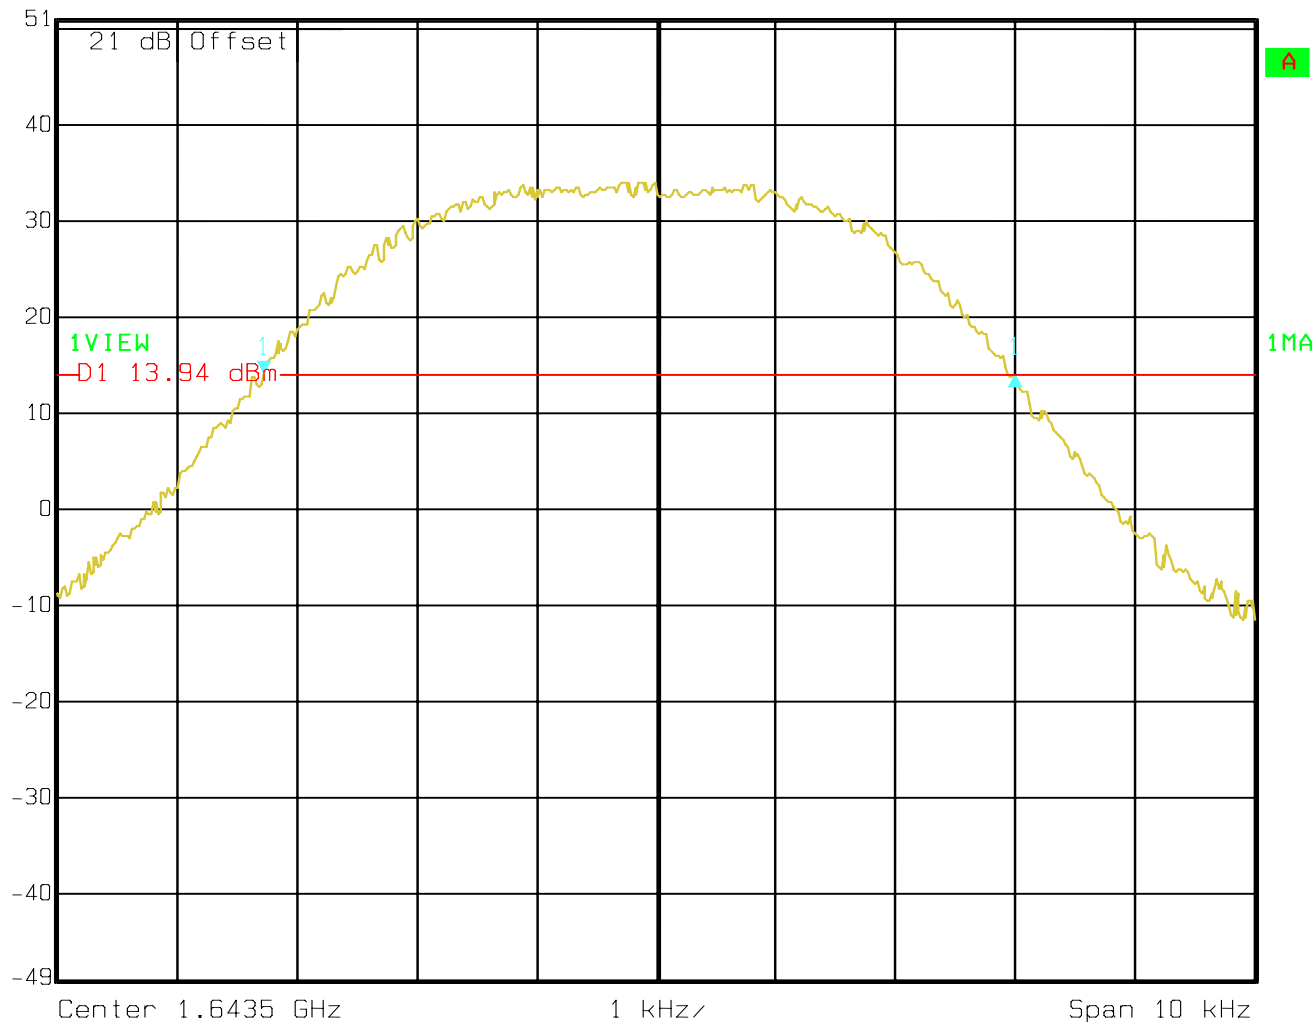


Date: 18.OCT.2006 10:41:56

**Highest Channel: 1660.5MHz**  
**Occupied Bandwidth (-20dBc BW)**



Ref Lvl	Delta 1 [T1]	RBW	1 kHz	RF Att	60 dB
51 dBm	-0.73 dB	VBW	1 kHz	Unit	dBm
	6.29258517 kHz	SWT	150 ms		

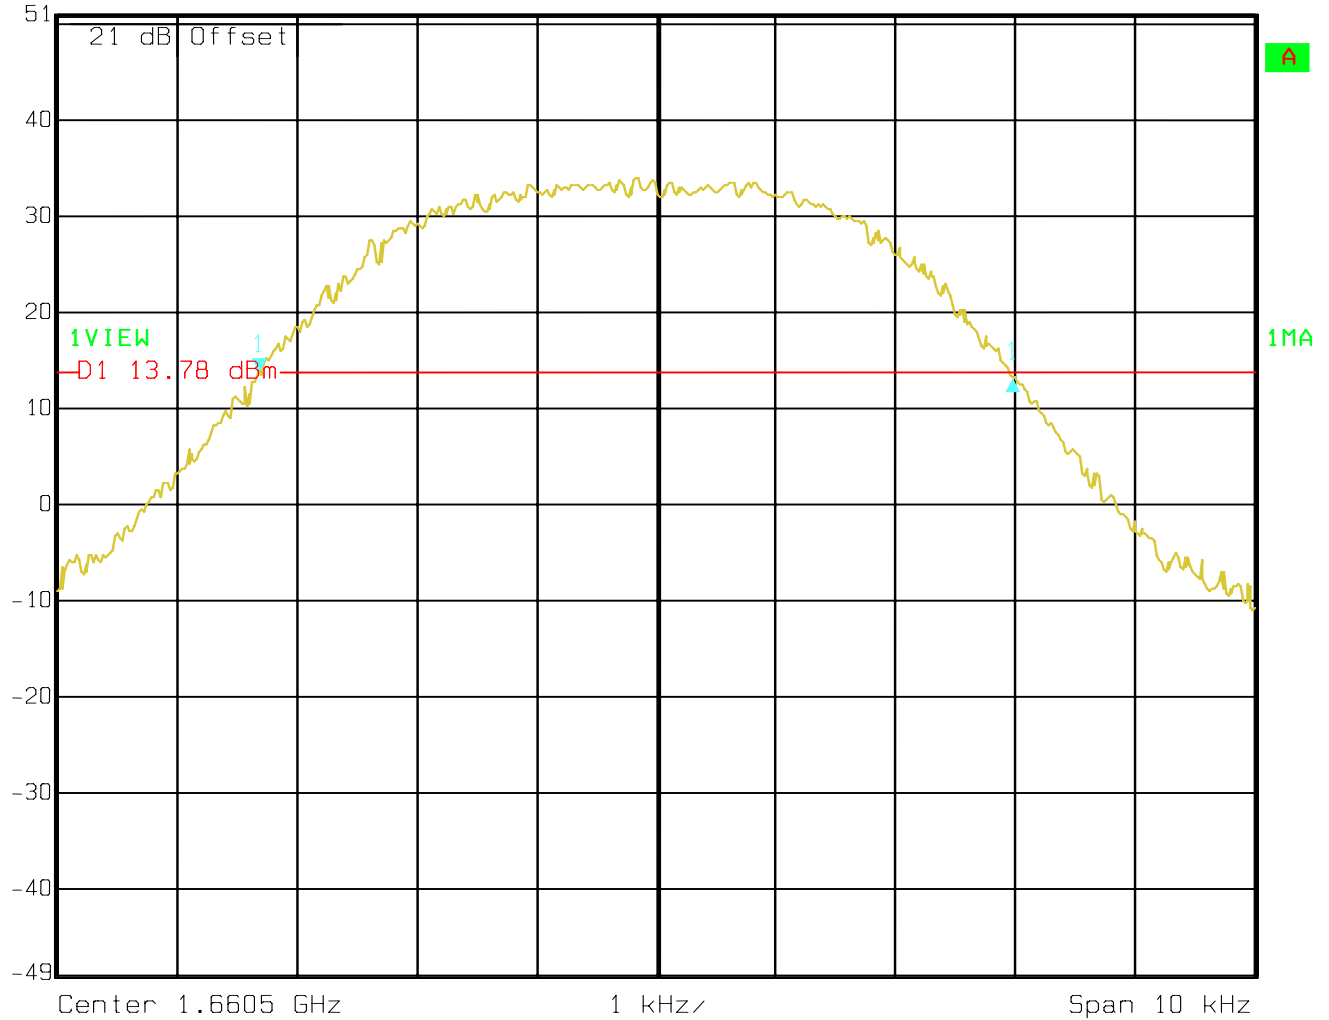

Date: 18.OCT.2006 10:44:54

**EMISSIONS LIMITS**

**§25.202(f)**

**Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the EUT. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1660.5 MHz. The resolution bandwidth is set as outlined in Part 25. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels.

**The final Radiated emission test procedure is as follows:**

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) A double-ridged wave-guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- c) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded.

<b>Channel</b>	<b>Frequency</b>
Low	1626.5 MHz
Mid	1643.5 MHz
High	1660.5 MHz

**Measurement Limit:**

Sec. 25.202(f) Emission Limits.



**Measurement Results:**

**NOTE:** The spurious emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 18 GHz very short cable connections to the antenna was used to minimize the noise level.

**RESULTS OF RADIATED TESTS FOR FCC-25:**

<b>Harmonic</b>	<b>Tx Freq.: 1626.5(MHz)</b>	<b>Level (dBm)</b>	<b>Tx Freq.: 1643.5(MHz)</b>	<b>Level (dBm)</b>	<b>Tx Freq.: 1660.5(MHz)</b>	<b>Level (dBm)</b>
2	3253	NF	3287	NF	3321	NF
3	4879.5	NF	4930.5	NF	4981.5	NF
4	6506	NF	6574	NF	6642	NF
5	8132.5	NF	8217.5	NF	8302.5	NF
6	9759	NF	9861	NF	9963	NF
7	11385.5	NF	11504.5	NF	11623.5	NF
8	13012	NF	13148	NF	13284	NF
9	14638.5	NF	14791.5	NF	13944.5	NF
10	1626.5	NF	1643.5	NF	1660.5	NF

nf: noise floor

**RADIATED SPURIOUS EMISSIONS**

**Lowest Channel (1626.5MHz):30MHz - 1GHz**


Spurious emission limit -13dBm

**Antenna: vertical**

**Note: This plot is valid for low, mid & high channels (worst-case plot).**

*SWEEP TABLE: "FCC 25 Spur 30M-1G"*

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz

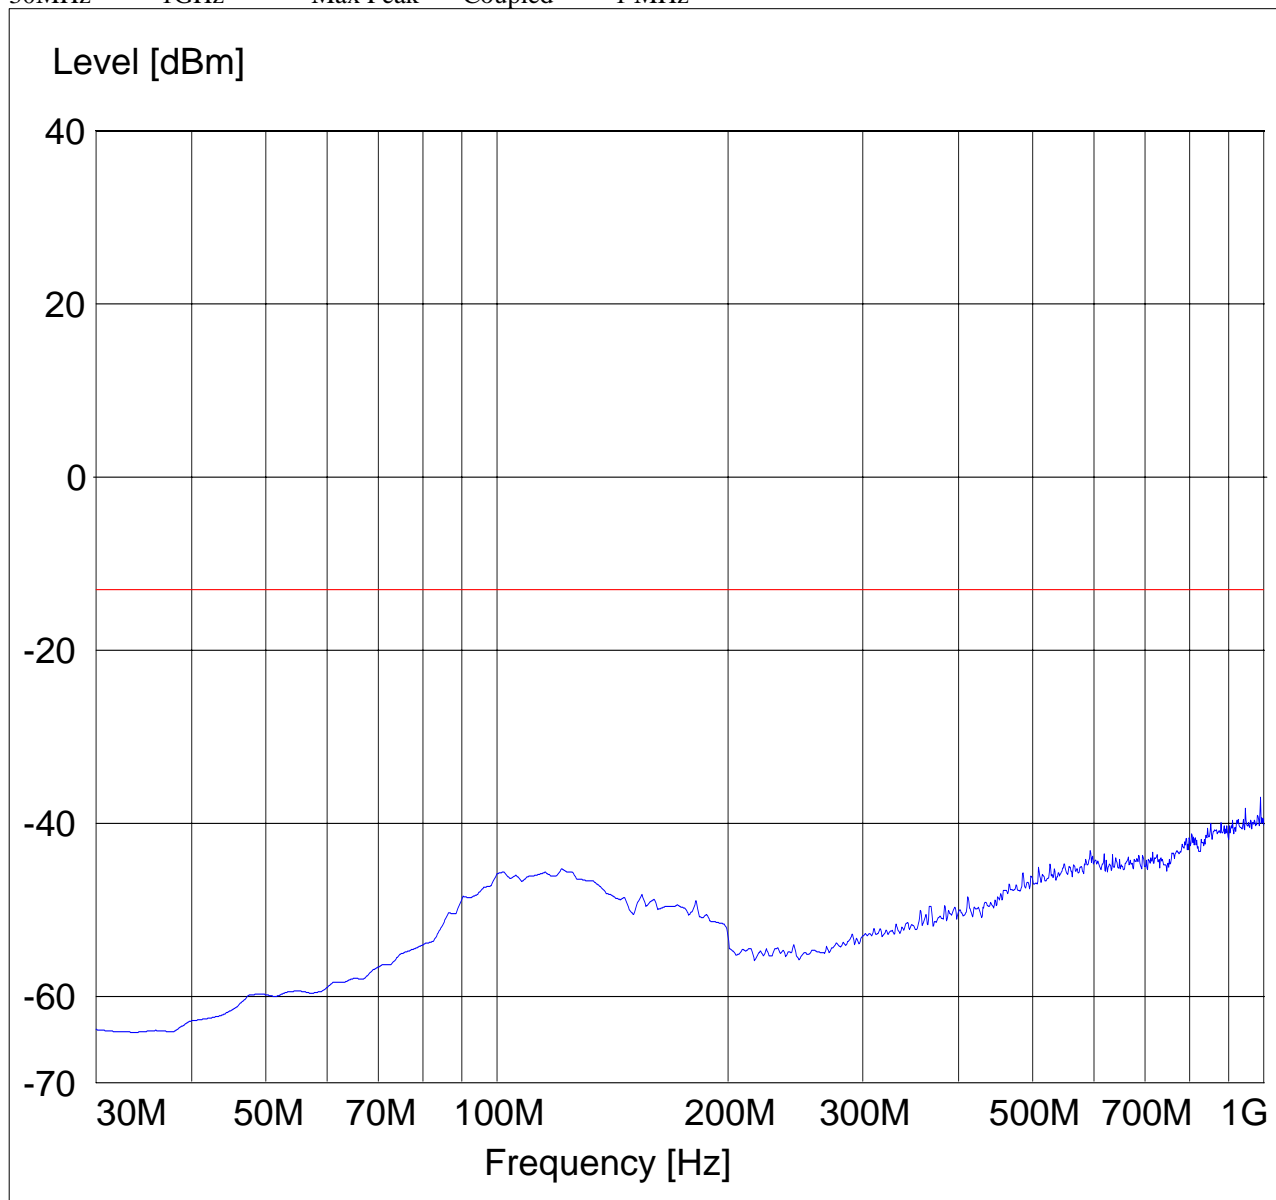

**RADIATED SPURIOUS EMISSIONS**

**Lowest Channel (1626.5MHz):30MHz - 1GHz**


Spurious emission limit -13dBm

**Antenna: horizontal**

**Note: This plot is valid for low, mid & high channels (worst-case plot).**

**SWEEP TABLE: "FCC 25 Spur 30M-1G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz

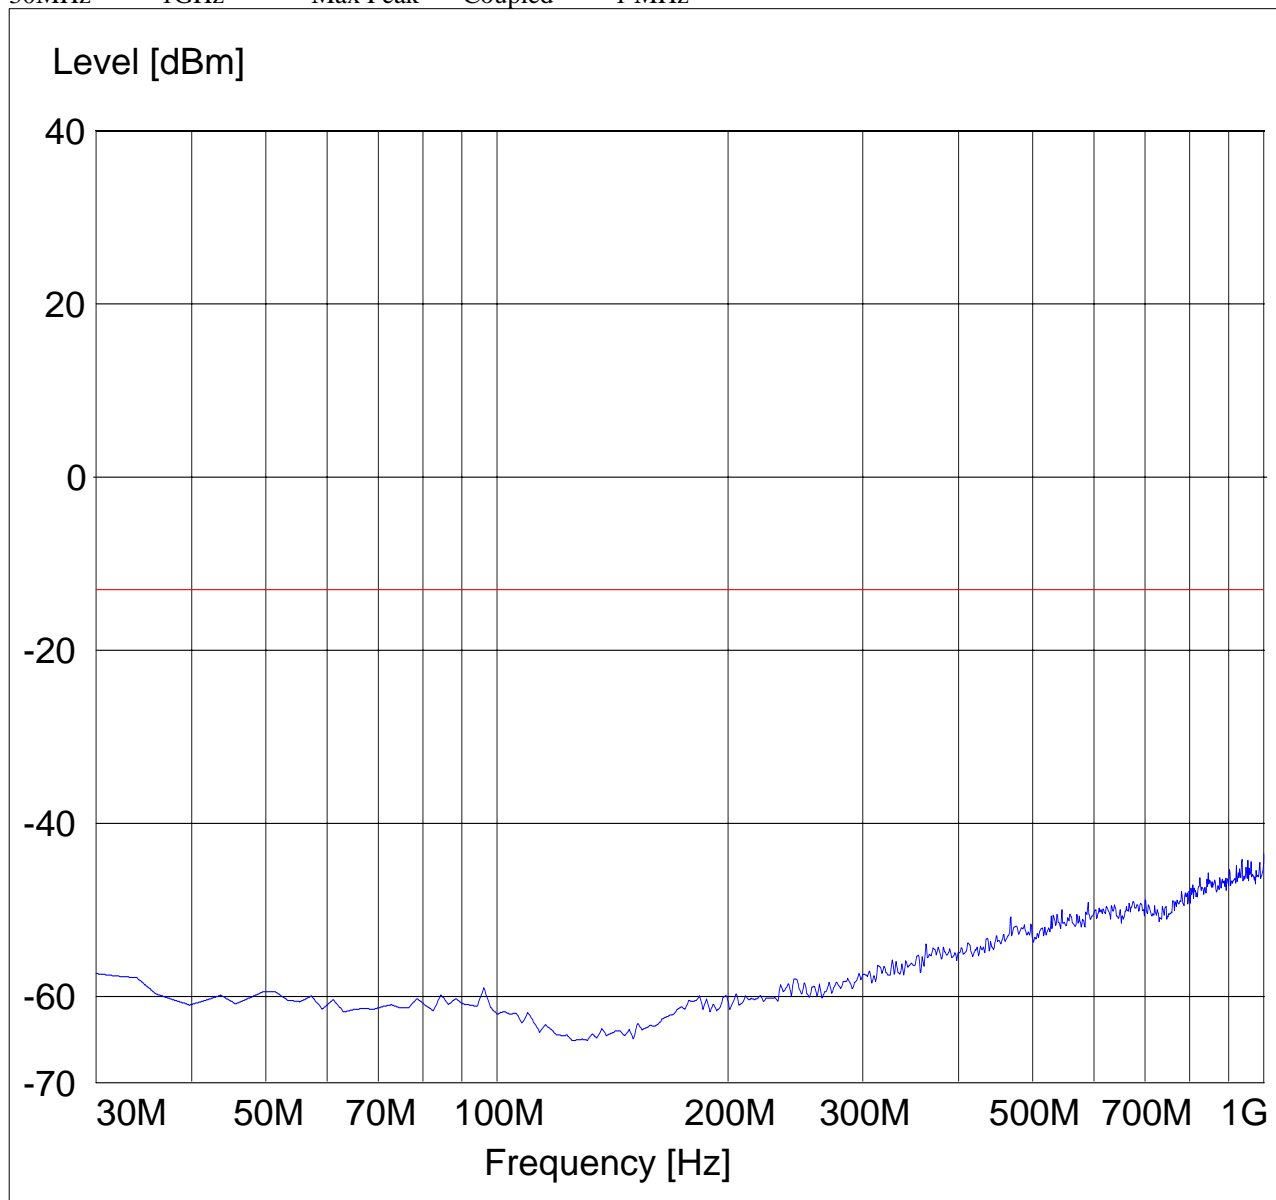


**RADIATED SPURIOUS EMISSIONS**  
**Lowest Channel (1626.5MHz):1GHz - 3GHz**  
Spurious emission limit -13dBm

NOTE: peak above the limit line is the Carrier frequency @ low channel

**SWEEP TABLE: "FCC Spuri 1-3G"**


Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz

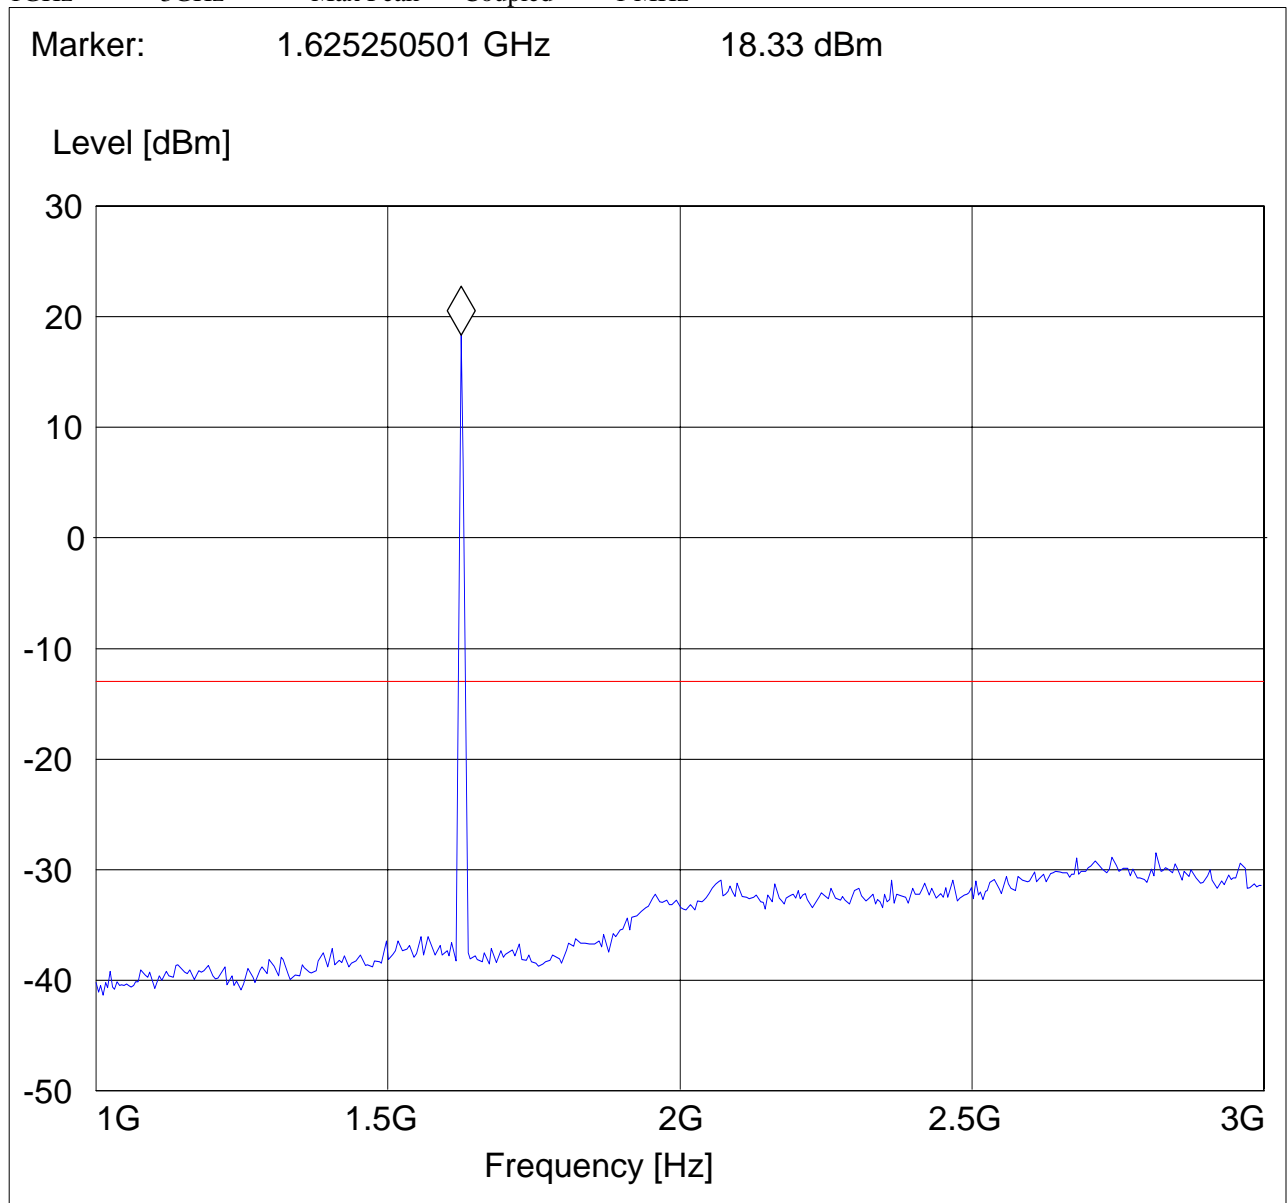

**RADIATED SPURIOUS EMISSIONS**  
**Lowest Channel (1626.5MHz):3GHz - 18GHz**  
Spurious emission limit -13dBm

**SWEEP TABLE: "FCC Spuri 3-18G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz

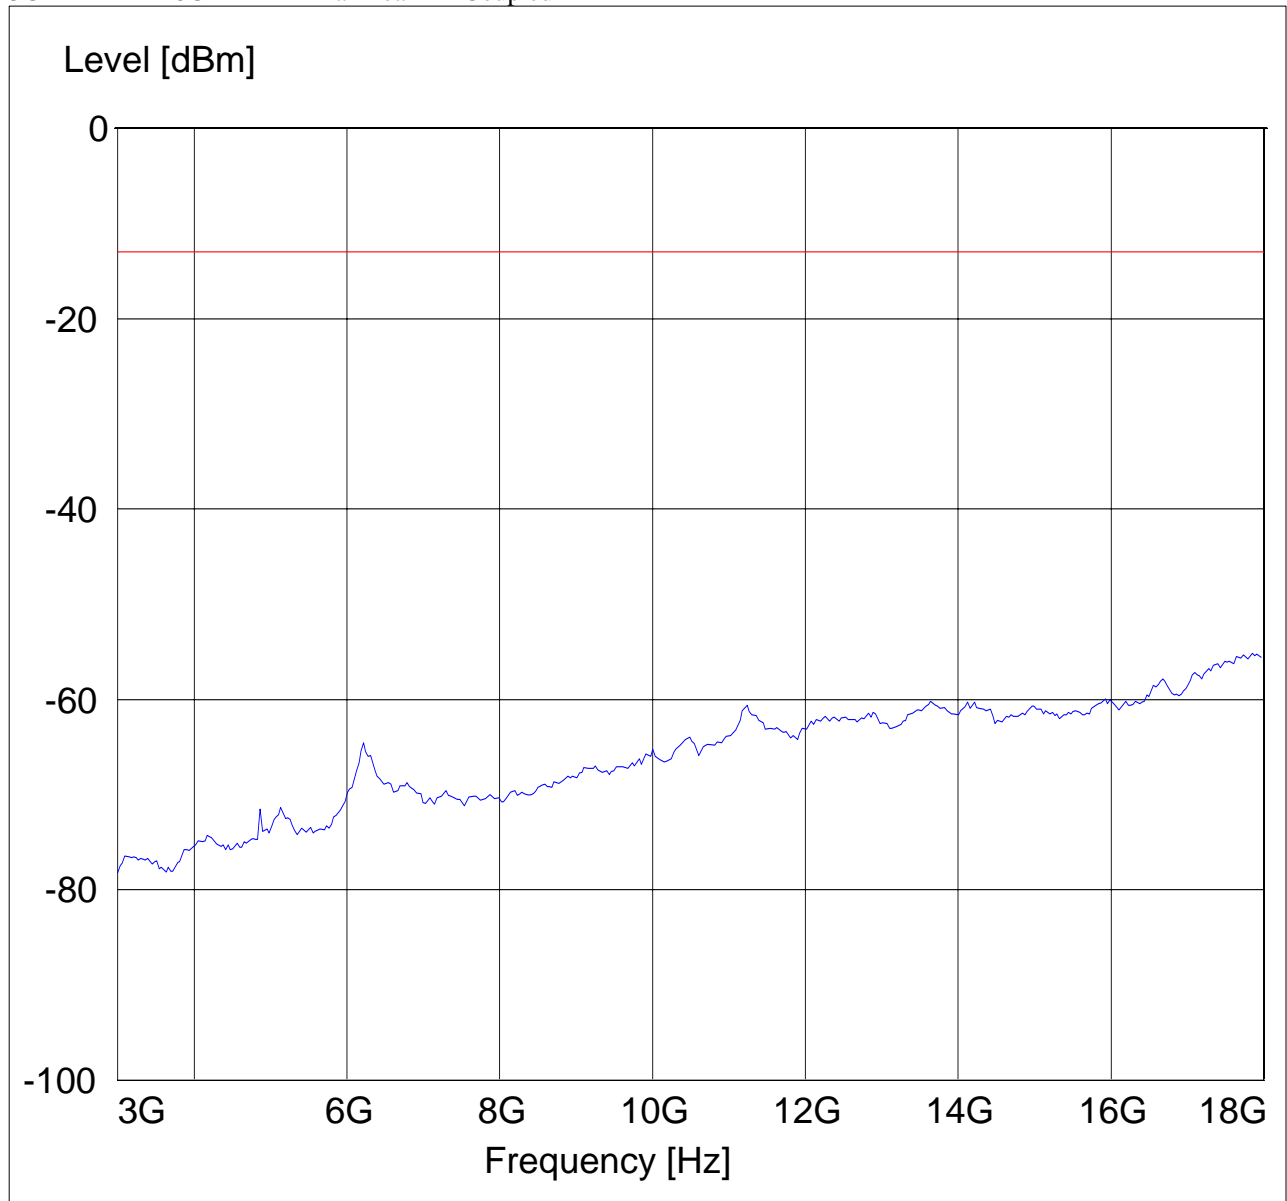


**RADIATED SPURIOUS EMISSIONS**  
**Mid Channel (1643.5MHz):1GHz - 3GHz**  
Spurious emission limit -13dBm

**NOTE: peak above the limit line is the Carrier frequency @ mid channel**

**SWEEP TABLE: "FCC Spuri 1-3G"**


Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz

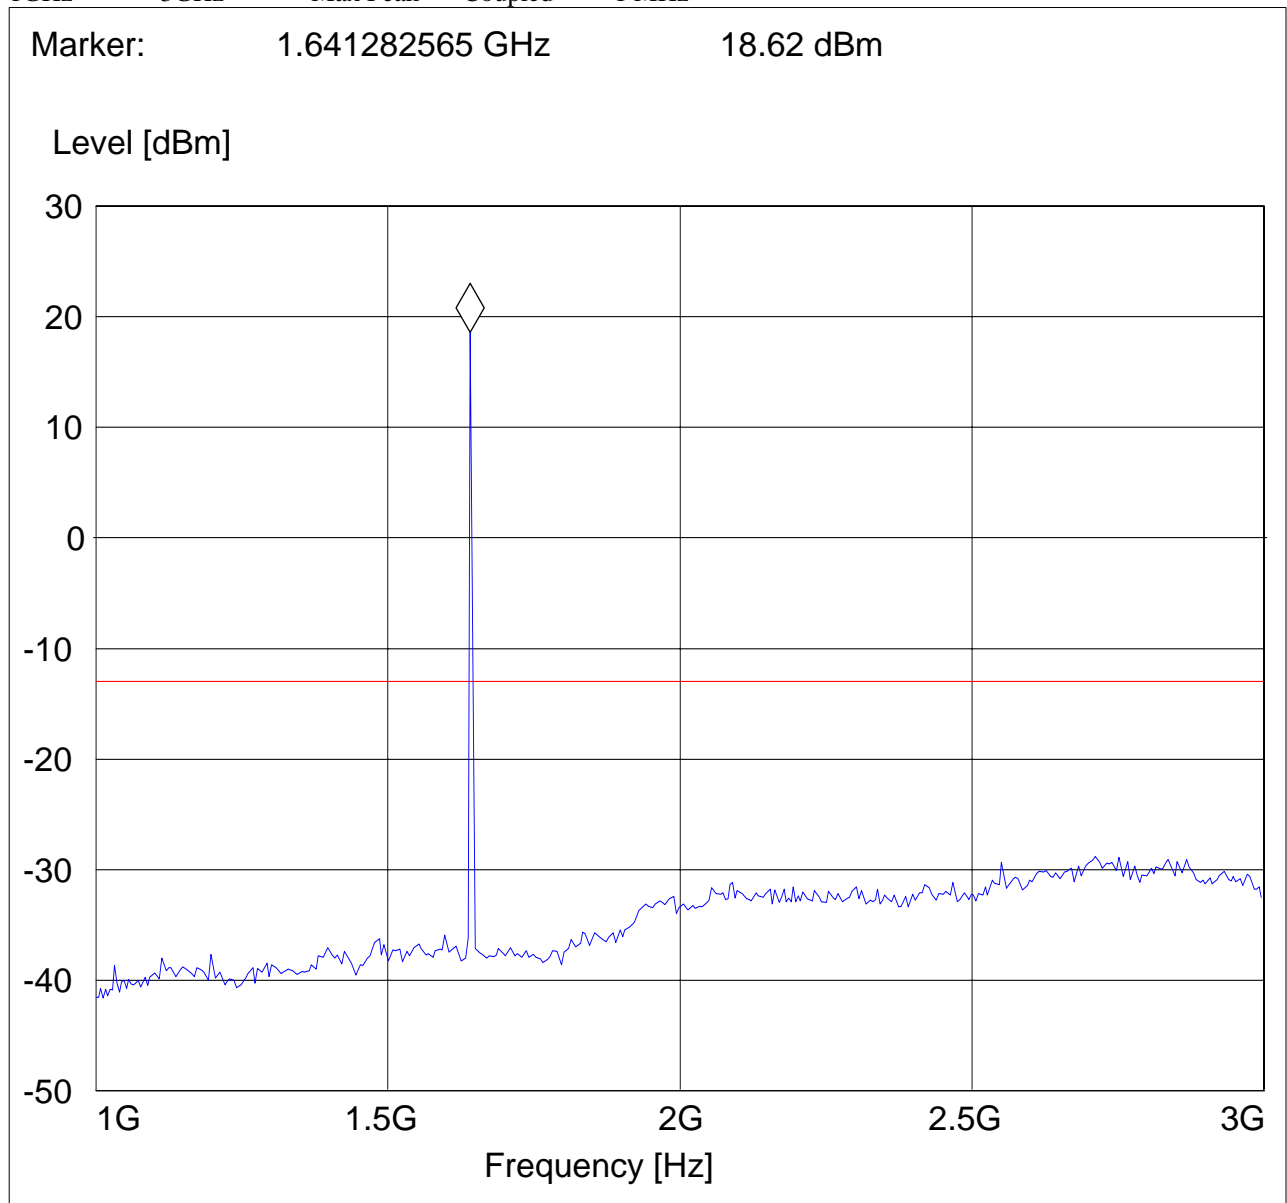

**RADIATED SPURIOUS EMISSIONS**  
**Mid Channel (1643.5MHz):3GHz - 18GHz**  
Spurious emission limit -13dBm

*SWEEP TABLE: "FCC Spuri 3-18G"*

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz

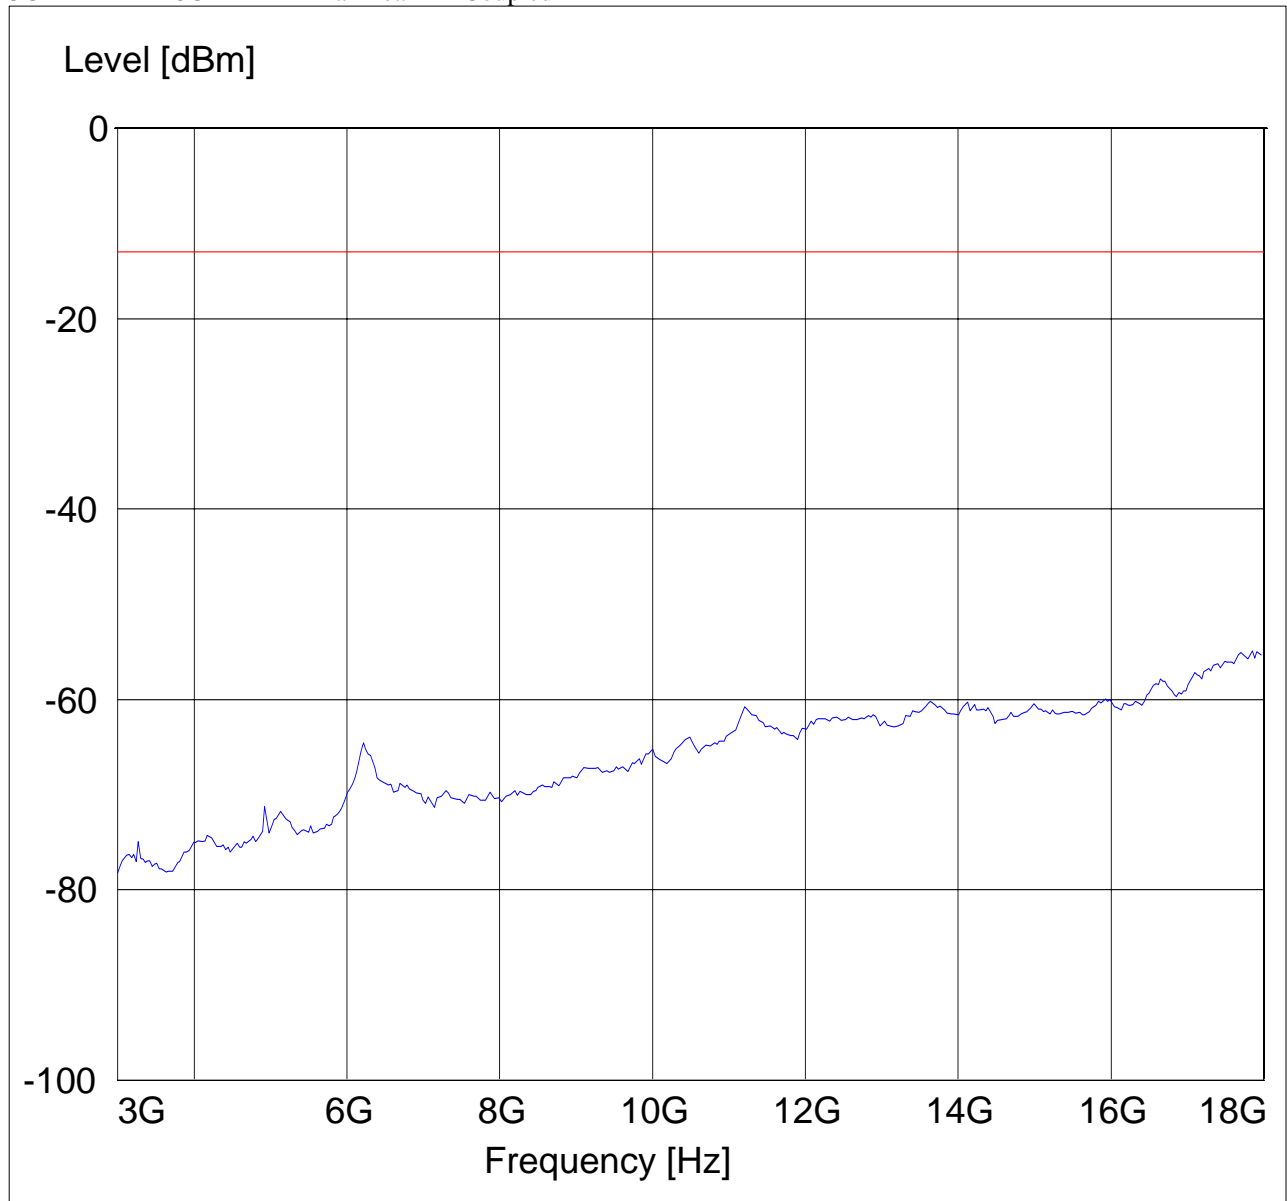


**RADIATED SPURIOUS EMISSIONS**  
**Highest Channel (1660.5MHz):1GHz - 3GHz**  
Spurious emission limit -13dBm

**NOTE:** marked peak above the limit line is the Carrier frequency @ high channel

**SWEEP TABLE: "FCC Spuri 1-3G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz

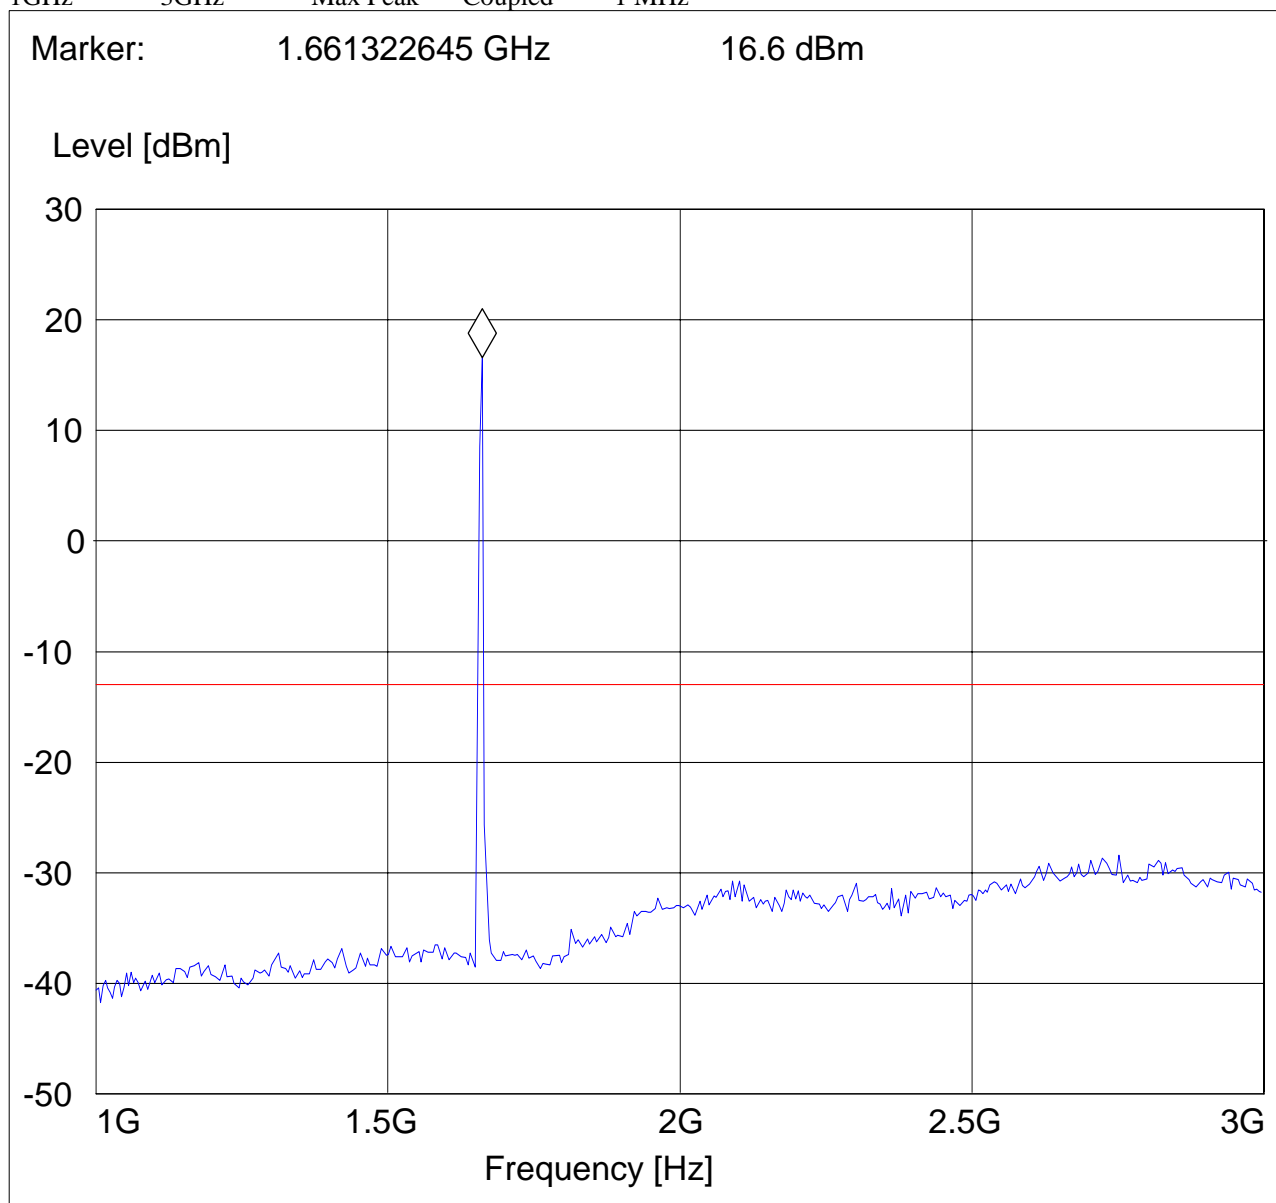




**RADIATED SPURIOUS EMISSIONS**  
**Highest Channel (1660.5MHz):3GHz - 18GHz**  
Spurious emission limit -13dBm

**SWEEP TABLE: "FCC Spuri 3-18G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz

Marker: 3 GHz -78.2 dBm

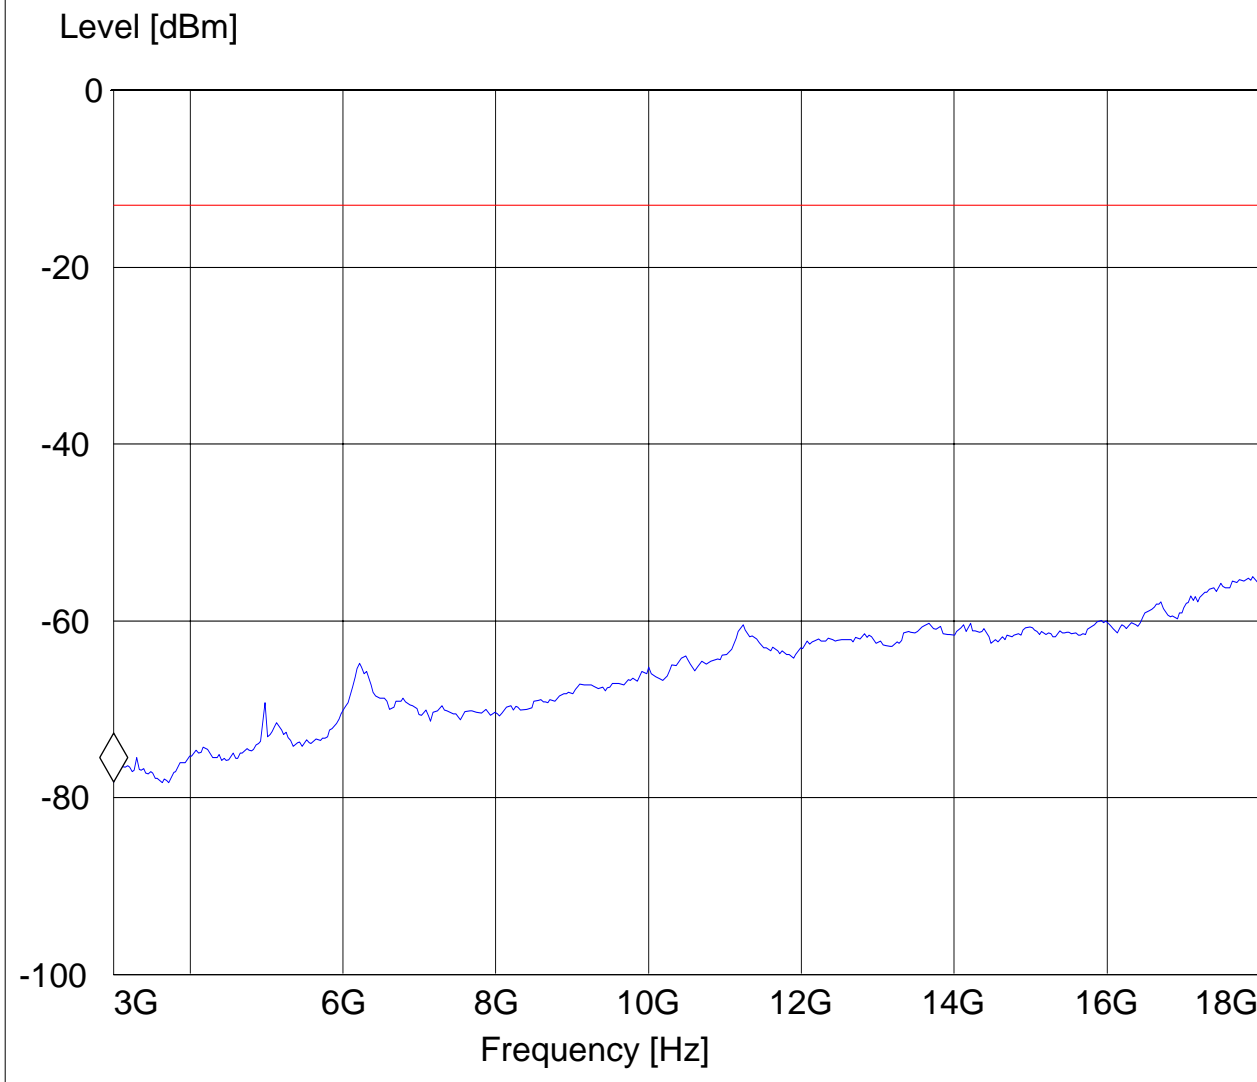

**RADIATED SPURIOUS EMISSIONS**


**EUT in Idle Mode: 30MHz – 1GHz**

Spurious emission limit -13dBm

**Antenna: vertical**

**SWEEP TABLE: "FCC 25 Spur 30M-1G"**

Start	Stop	Detector	Meas. Time	RBW/VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz

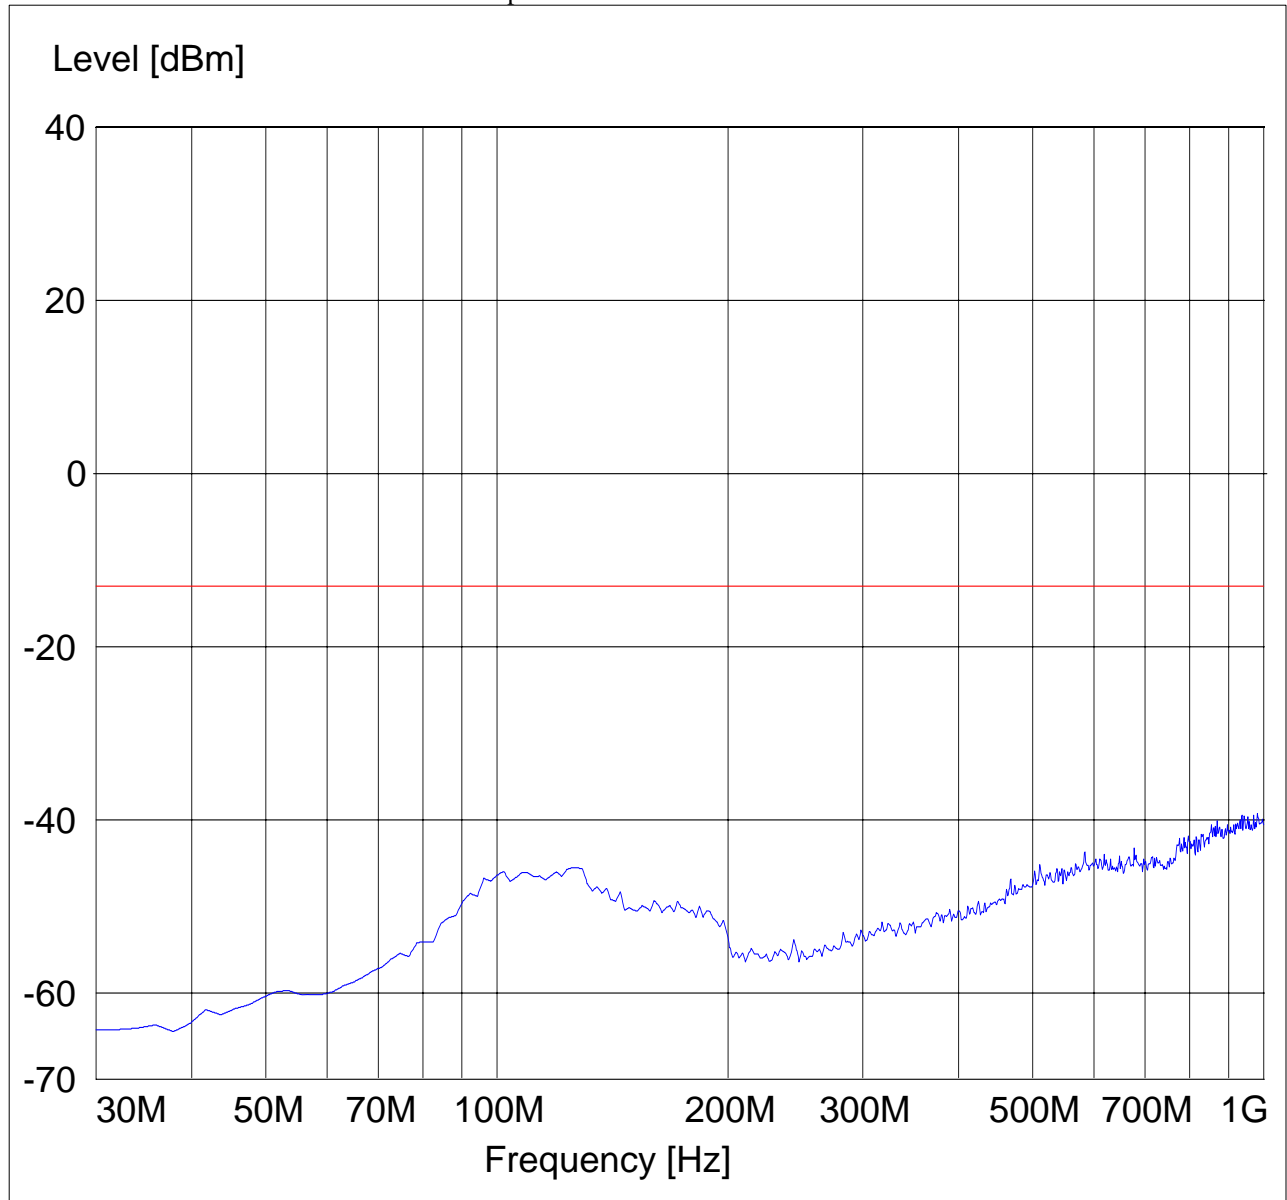

**RADIATED SPURIOUS EMISSIONS**


**EUT in Idle Mode: 30MHz – 1GHz**

Spurious emission limit -13dBm

**Antenna: horizontal**

**SWEEP TABLE: "FCC 25 Spur 30M-1G"**

Start	Stop	Detector	Meas. Time	RBW/VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz

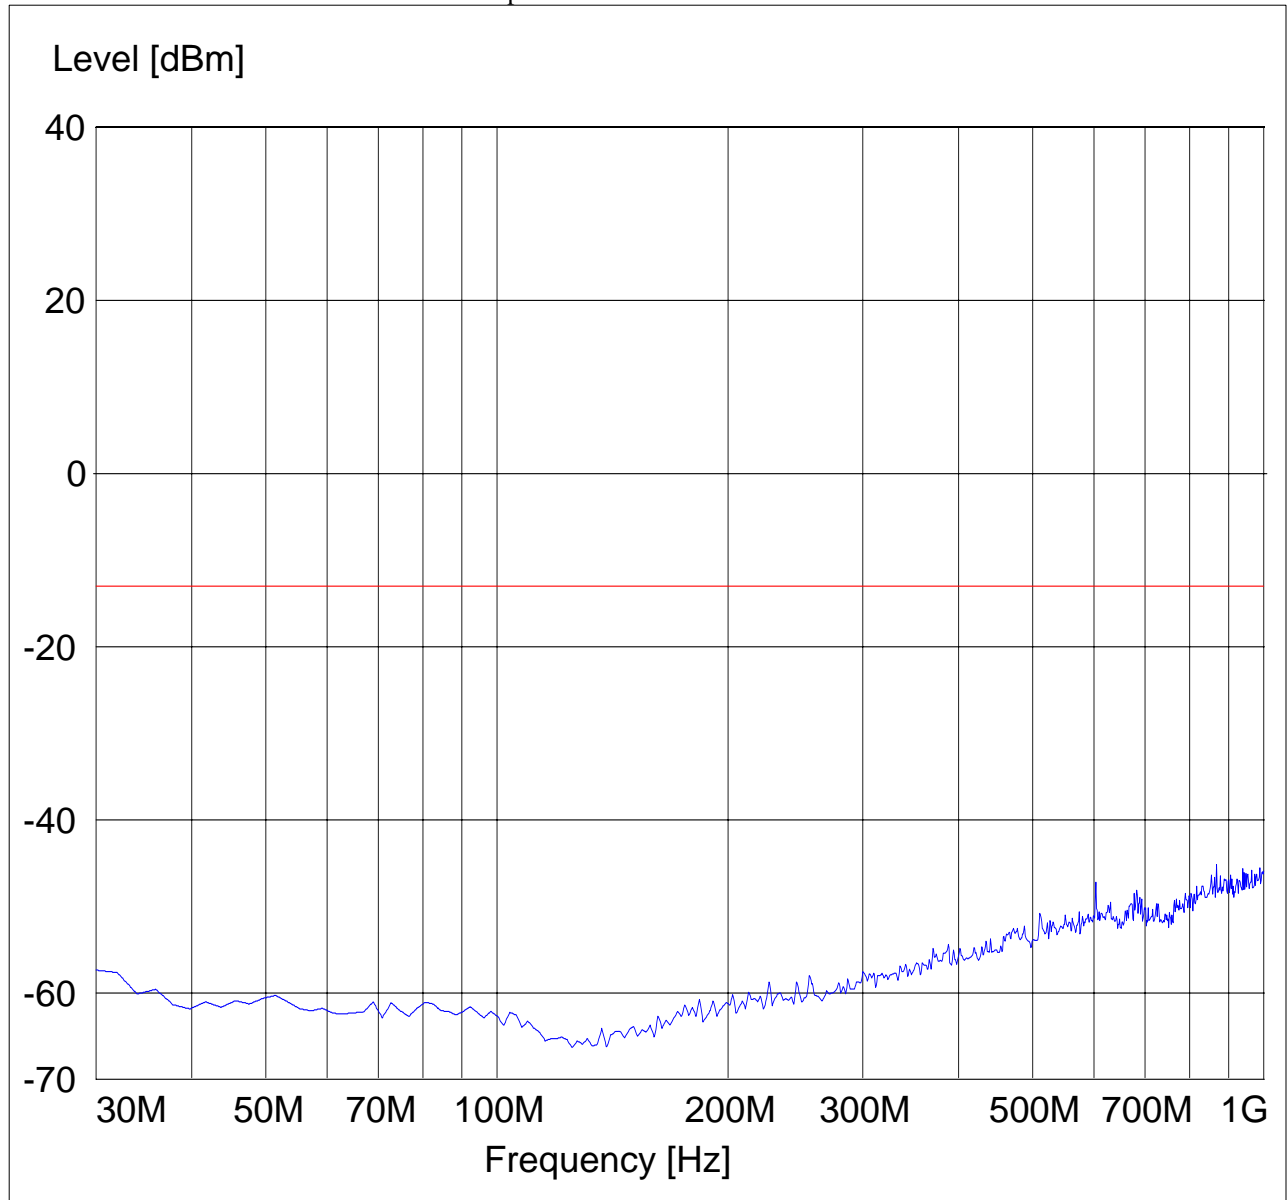


**RADIATED SPURIOUS EMISSIONS**

**EUT in Idle Mode: 1GHz – 3GHz**

Spurious emission limit –13dBm

**SWEEP TABLE: "FCC Spuri 1-3G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz

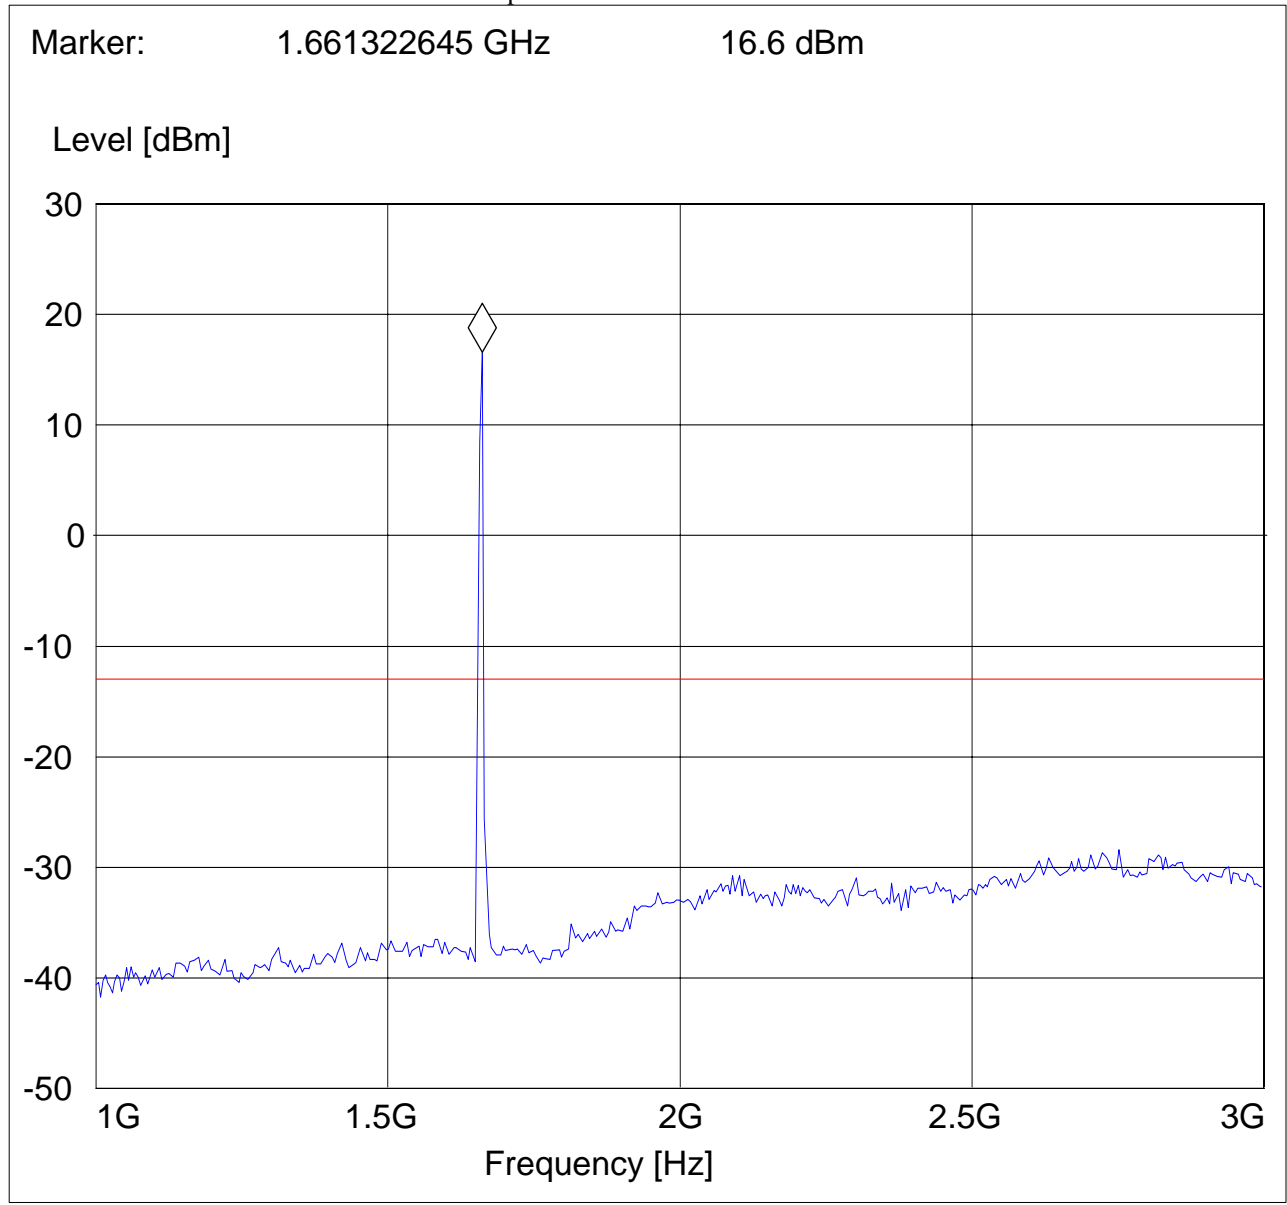


**RADIATED SPURIOUS EMISSIONS**

**EUT in Idle Mode: 3GHz – 18GHz**

Spurious emission limit -13dBm

**SWEEP TABLE: "FCC spuri 3-18G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz

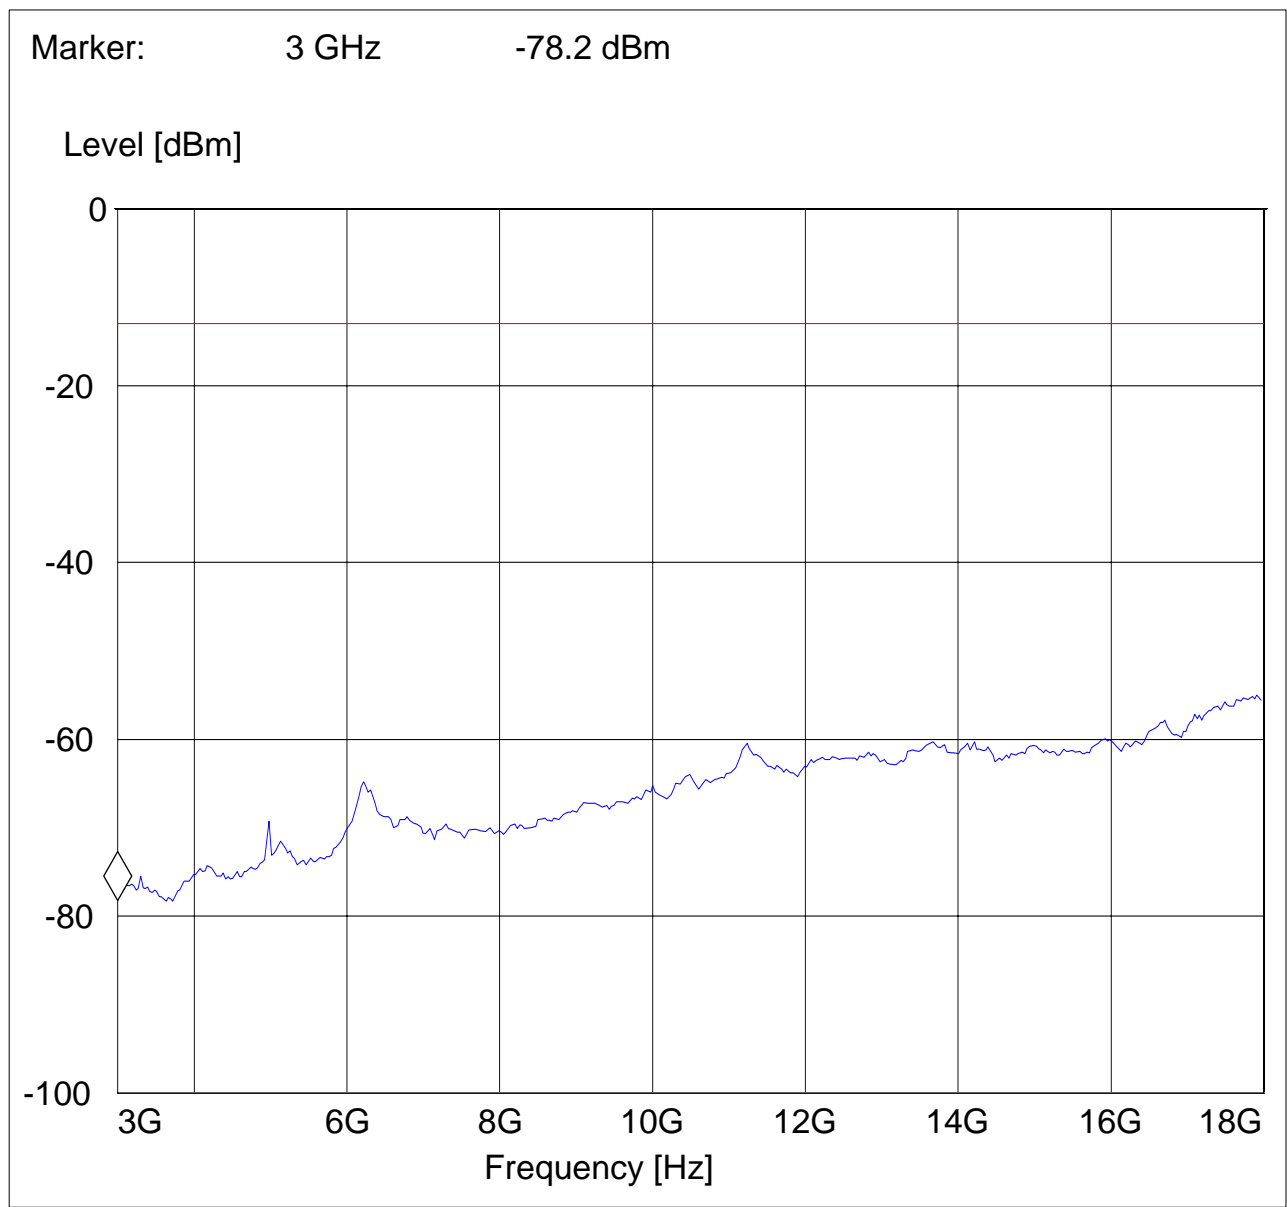

**EMISSION MASK  
(Conducted)**

§25.202 (f)

**Emission mask table based on 25.202(f)**

<b>Frequency offset from centre freq (kHz)</b>	<b>Mean power of emissions below the mean output power of transmitter</b>
<b>0 to 3kHz</b>	<b>0 dBc</b>
<b>3kHz to 6kHz</b>	<b>-25 dBc in any 4kHz</b>
<b>6kHz to 15kHz</b>	<b>-35 dBc in any 4kHz</b>
<b>&gt; 15kHz</b>	<b>-43 dBW in any 4kHz</b>

Analyzer settings: RBW = VBW = 300 Hz


(Note: due to authorized BW of 6 kHz 300 Hz RBW was used for measurements.)

**EMISSION MASK**

**Lowest Channel (1626.5MHz)**

**(Conducted)**


 Ref Lvl 10.7 dBm  
Marker 1 [T1] 10.68 dBm  
1.62649974 GHz  
RBW 300 Hz RF Att 40 dB  
VBW 300 Hz  
SWT 1.35 s Unit dBm

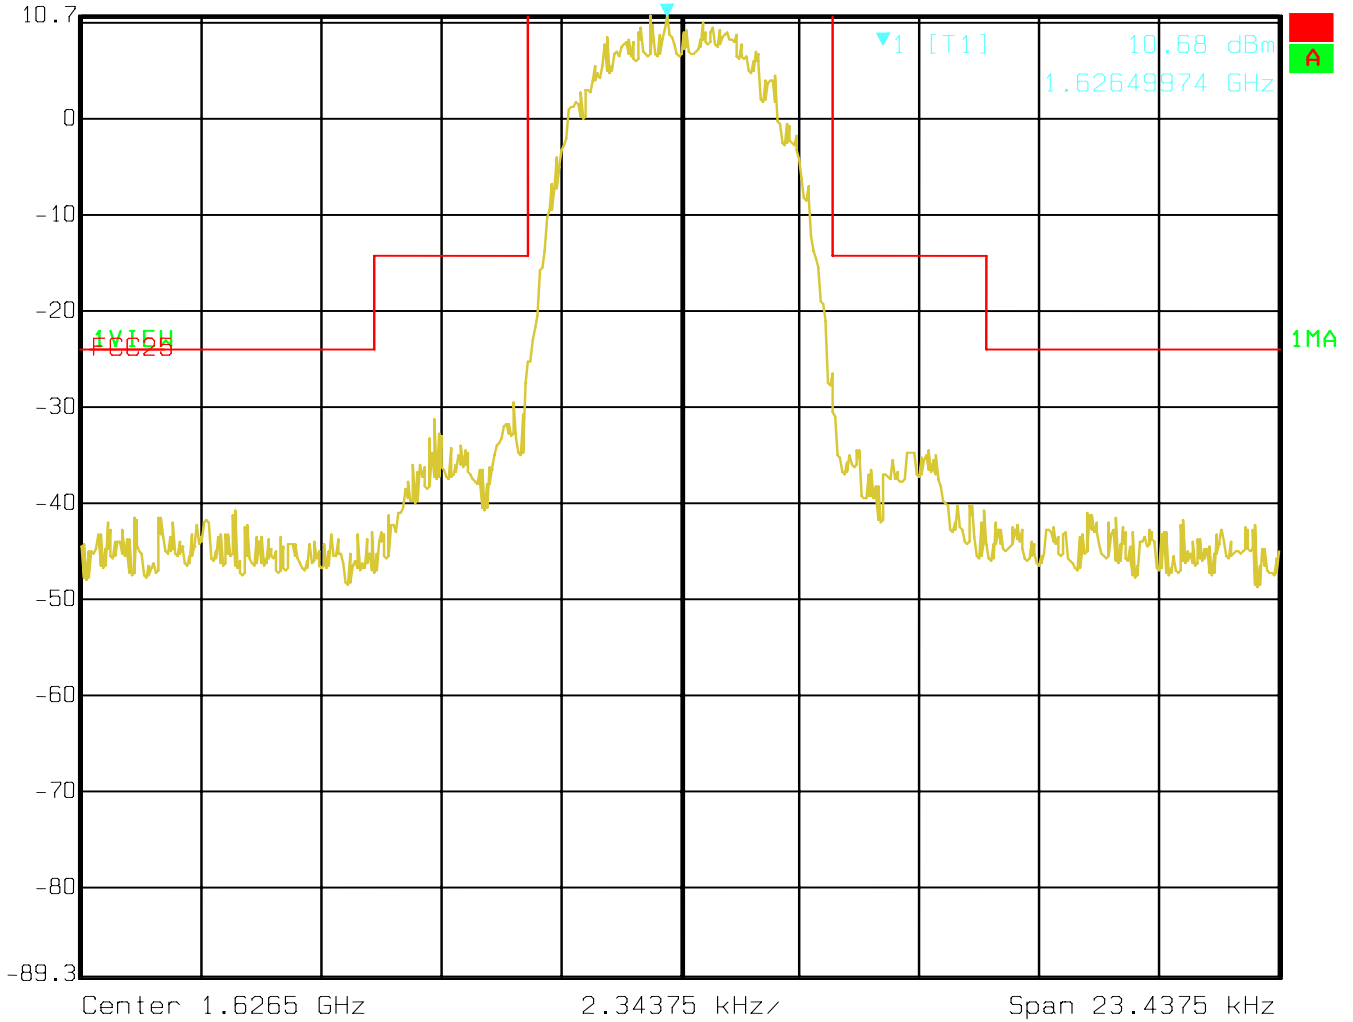

Date: 02.NOV.2006 13:37:53

**EMISSION MASK**  
**Mid Channel (1643.5MHz)**  
**(Conducted)**

 Marker 1 [T1] RBW 300 Hz RF Att 40 dB  
Ref Lvl 10.26 dBm VBW 300 Hz  
10.3 dBm 1.64350073 GHz SWT 1.35 s Unit dBm

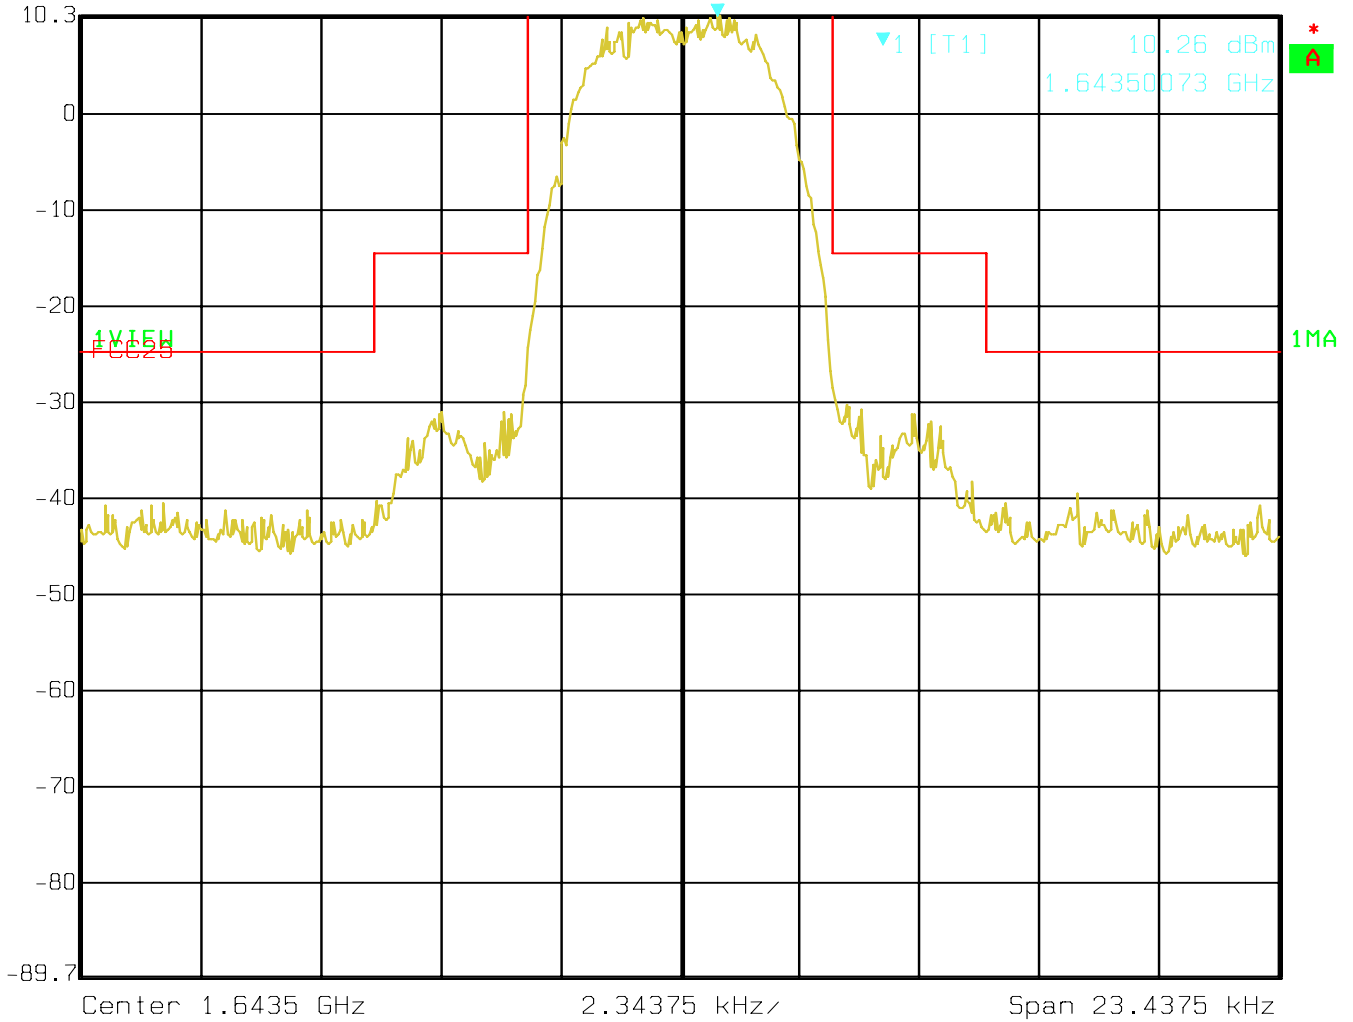

Date: 02.NOV.2006 13:34:03





**RECEIVER RADIATED EMISSIONS**

**§ 15.209**

**NOTE:** The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 18GHz very short cable connections to the antenna was used to minimize the noise level.

**Limits**

**SUBCLAUSE § 15.209**

<b>Frequency (MHz)</b>	<b>Field strength (<math>\mu</math>V/m)</b>	<b>Measurement distance (m)</b>
<b>0.009 - 0.490</b>	<b>2400/F(kHz)</b>	<b>300</b>
<b>0.490 - 1.705</b>	<b>24000/F(kHz)</b>	<b>30</b>
<b>1.705 - 30.0</b>	<b>30</b>	<b>30</b>
<b>30 - 88</b>	<b>100</b>	<b>3</b>
<b>88 - 216</b>	<b>150</b>	<b>3</b>
<b>216 - 960</b>	<b>200</b>	<b>3</b>
<b>Above 960</b>	<b>500</b>	<b>3</b>

**RECEIVER RADIATED EMISSIONS**


**EUT in Rx Mode: 30MHz – 1GHz**

**Antenna: vertical**

**Note: This plot is valid for both polarities (worst-case plot)**

**SWEEP TABLE: "FCC 15 Spur 30M-1G"**


Start	Stop	Detector	Meas. Time	RBW/VBW
30MHz	1GHz	Max Peak	Coupled	100KHz

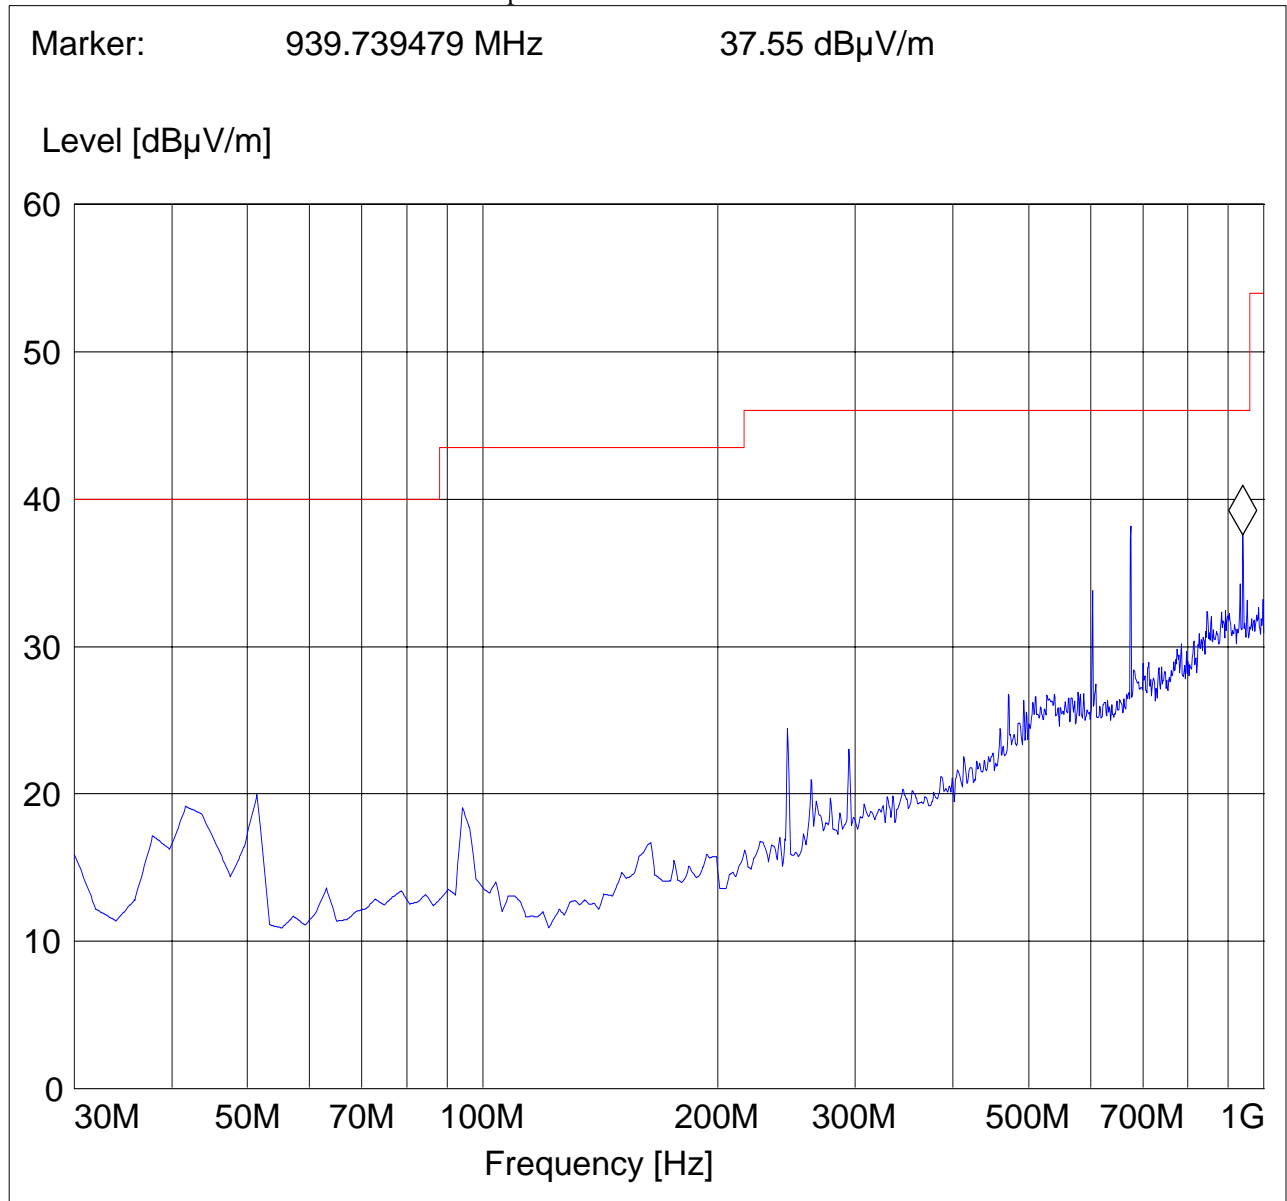

**RECEIVER RADIATED EMISSIONS**  
**EUT in Rx Mode: 1GHz – 3GHz**

*SWEEP TABLE: "FCC 15 Spuri 1-3G"*


<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
1GHz	3GHz	Max Peak	Coupled	1 MHz

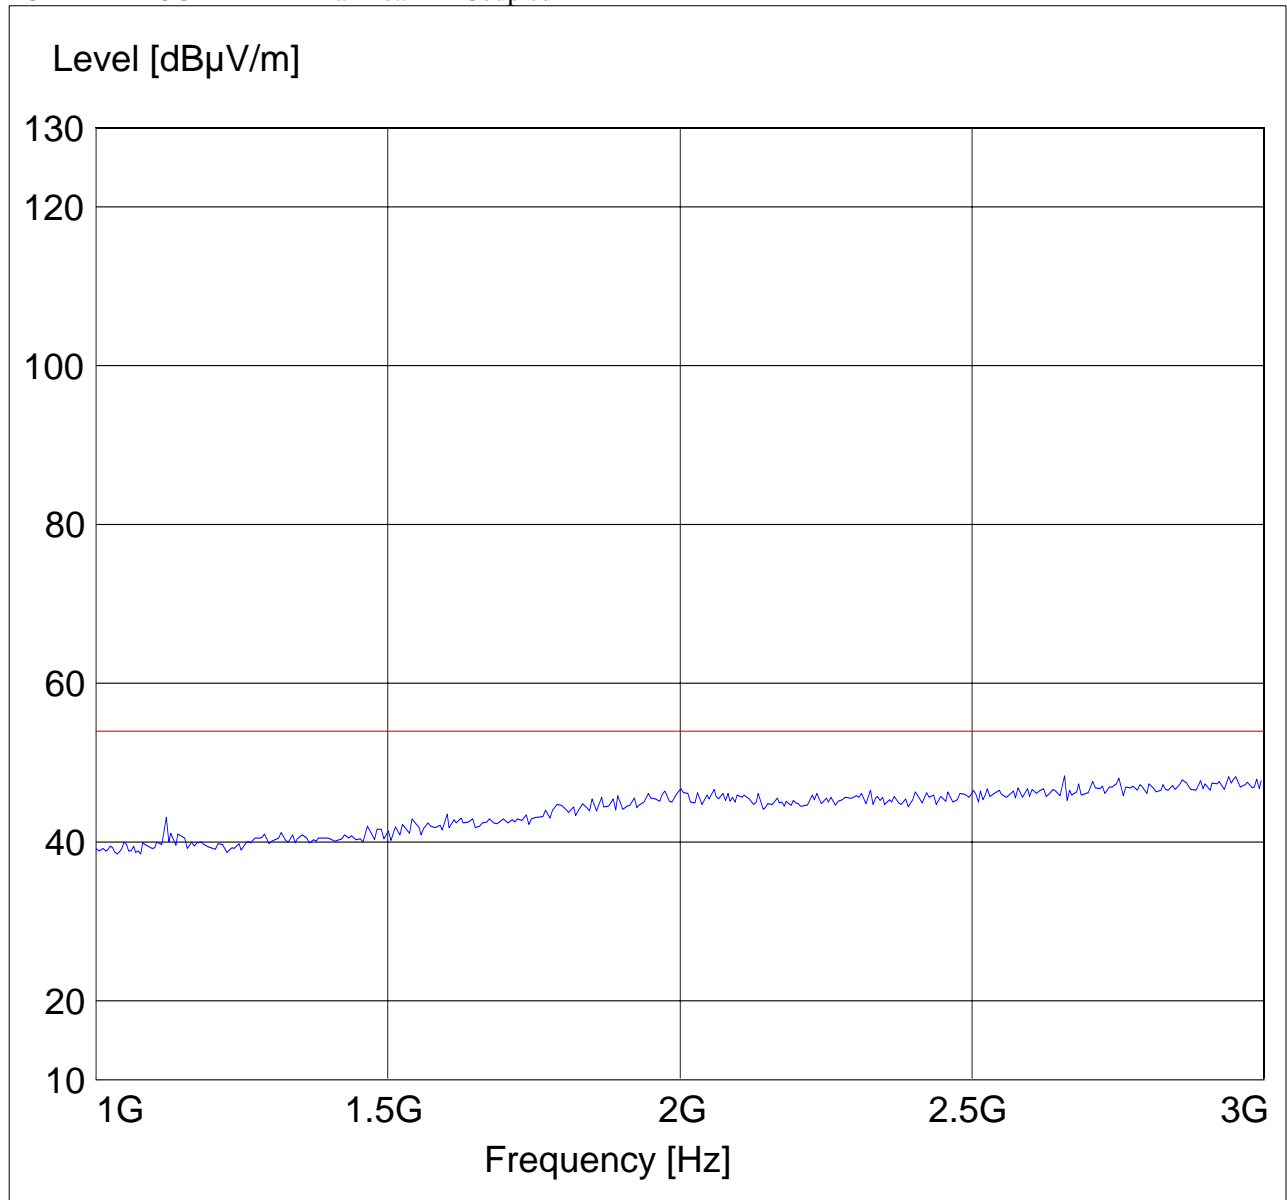

**RECEIVER RADIATED EMISSIONS**  
**EUT in Rx Mode: 3GHz – 18GHz**

*SWEEP TABLE: "FCC 15 spuri 3-18G"*

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz

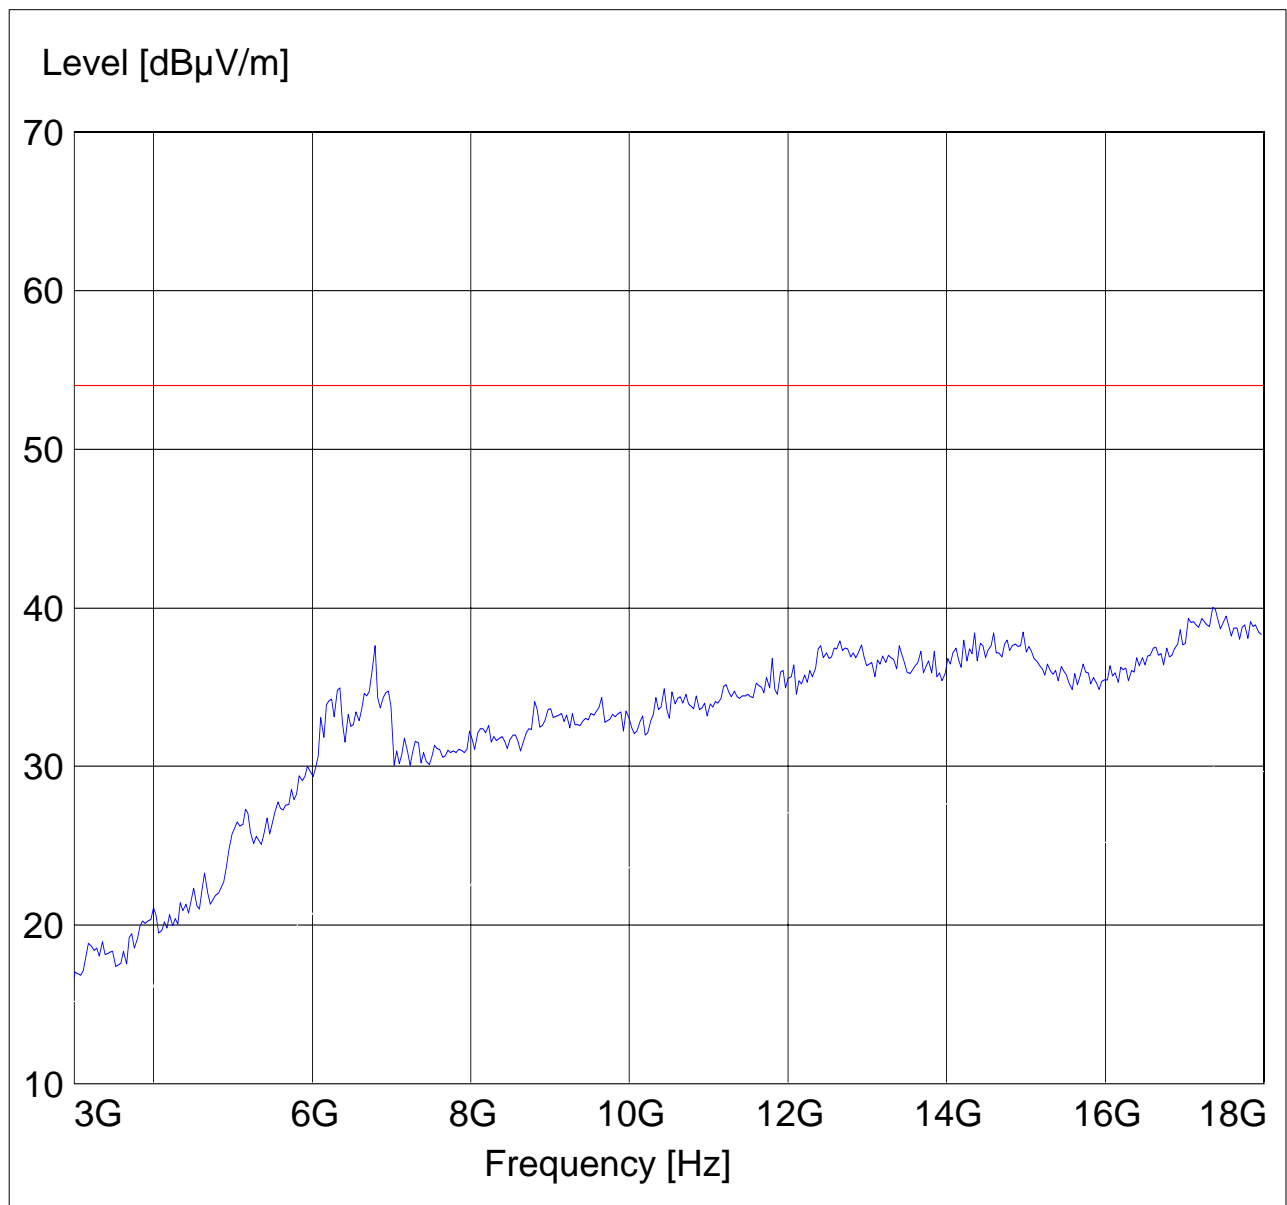

**CONDUCTED SPURIOUS EMISSIONS**

**Measurement Procedure:**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment under test, this equates to a frequency range of 30 MHz to 16.065 GHz, data taken from 30 MHz to 18 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

<b>Channel</b>	<b>Frequency</b>
Low	1626.5 MHz
Mid	1643.5 MHz
High	1660.5 MHz

**Measurement Limit:**

Sec. 25.202(f) Emission Limits.

**Test data**


See plots on next pages

**CONDUCTED SPURIOUS EMISSIONS**

**Lowest Channel (1626.5MHz):30MHz - 18GHz**

Spurious emission limit -13dBm


**NOTE: peak above the limit line is the carrier frequency.**

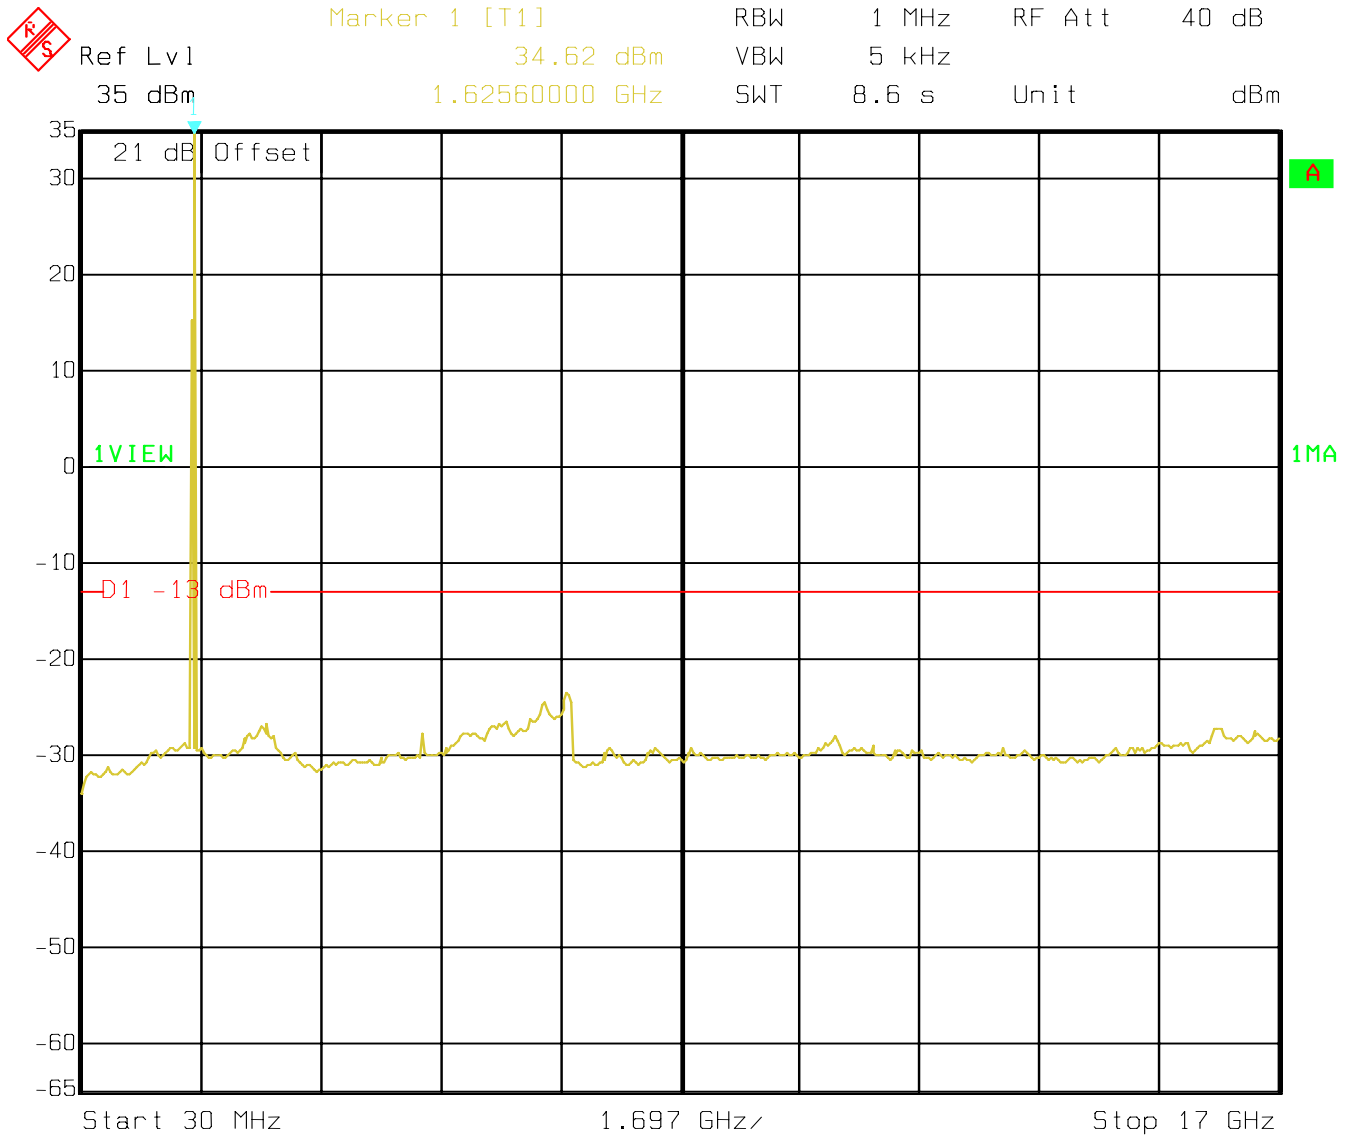

Date: 18.OCT.2006 14:45:16

**CONDUCTED SPURIOUS EMISSIONS**  
**Mid Channel (1643.5MHz):30MHz - 18GHz**  
Spurious emission limit -13dBm

**NOTE: peak above the limit line is the carrier frequency.**

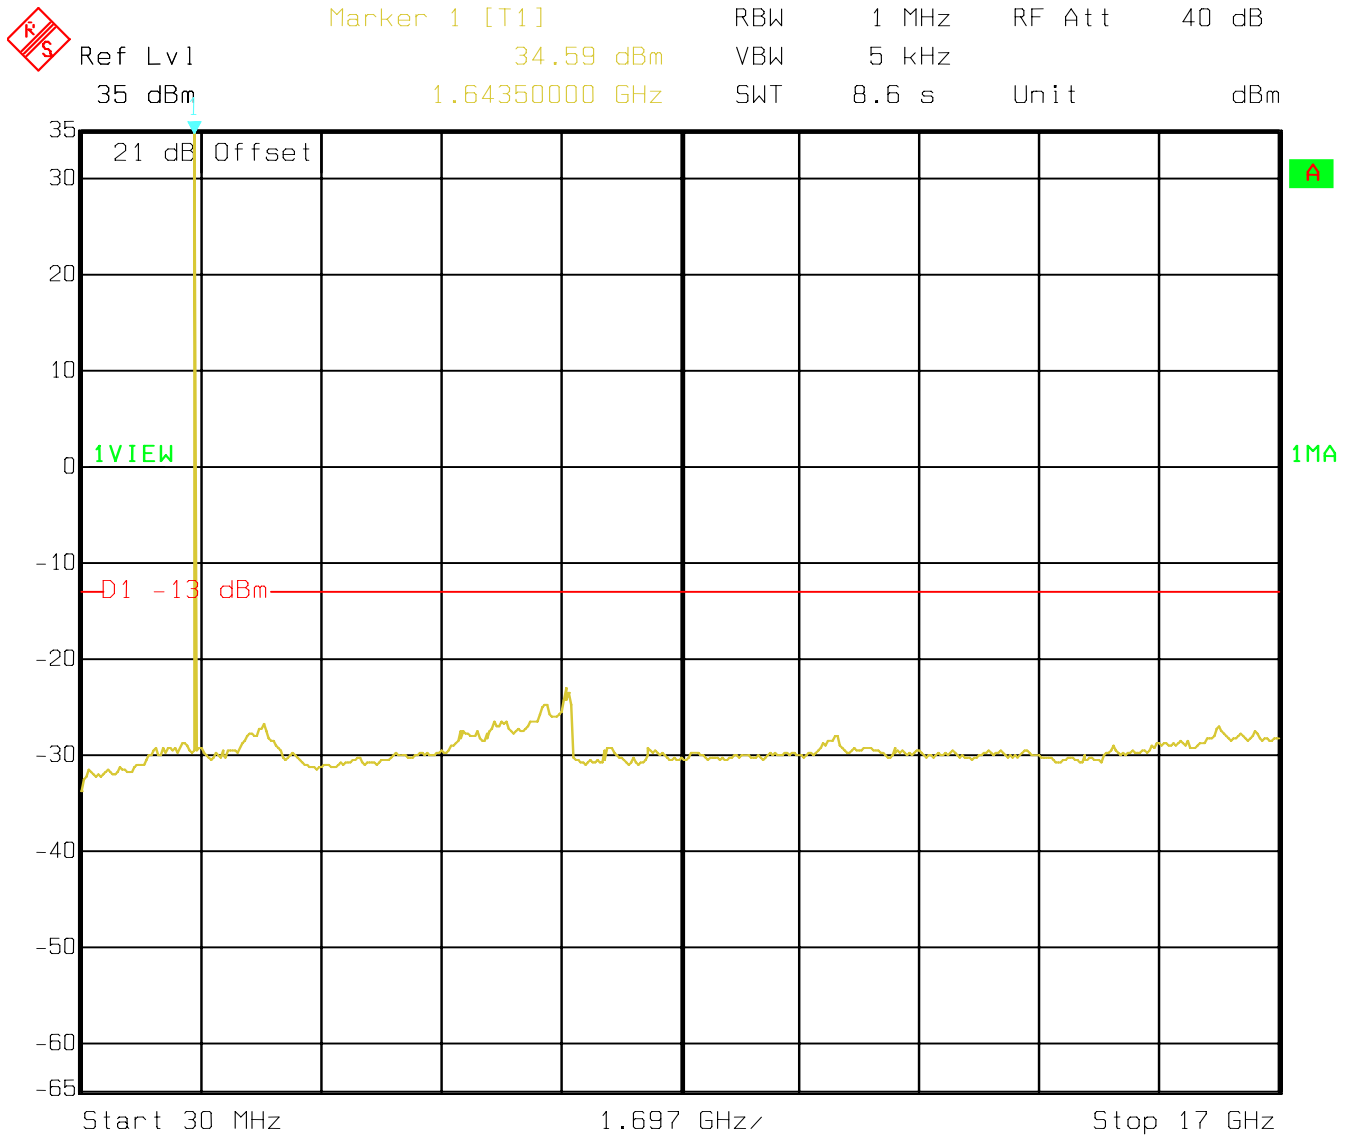


Date: 18.OCT.2006 14:46:18



**CONDUCTED SPURIOUS EMISSIONS**  
**Highest Channel (1660.5MHz):30MHz - 18GHz**  
Spurious emission limit -13dBm

**NOTE: peak above the limit line is the carrier frequency.**

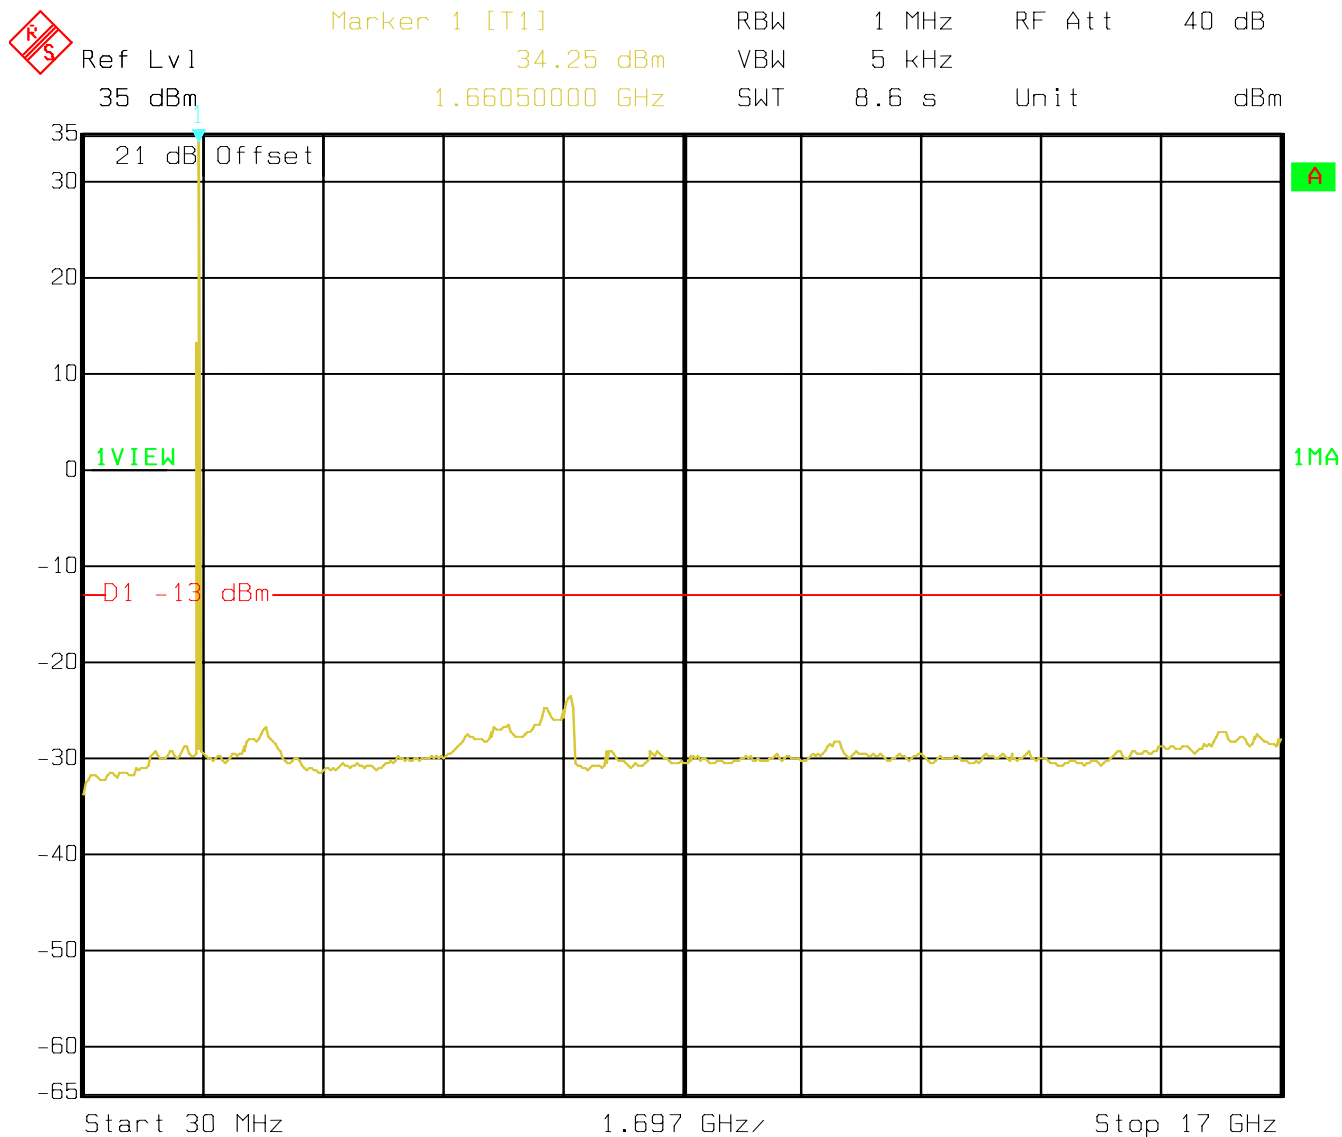

Date: 18.OCT.2006 14:47:00

**CONDUCTED EMISSIONS**


§ 15.107/207

**This measurement is not applicable for EUT**

**TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2007	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2007	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2007	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2007	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2007	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2007	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2007	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2007	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2007	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2007	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2007	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2007	1 year

**BLOCK DIAGRAMS**  
**Conducted Testing**

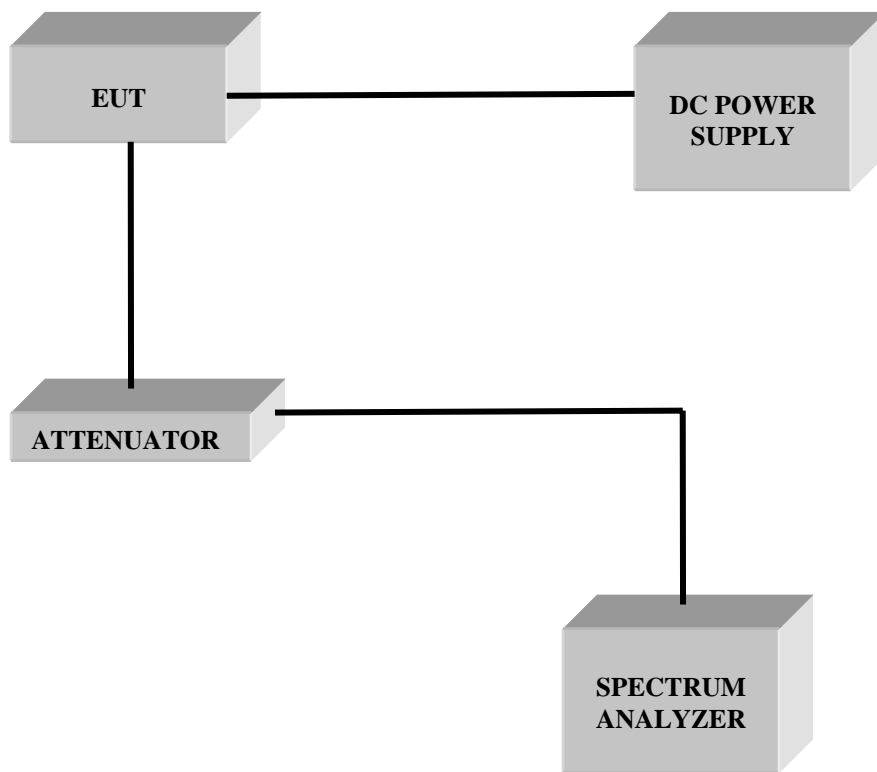

**Radiated Testing**

**ANECHOIC CHAMBER**

