


TEST REPORT FROM RADIO FREQUENCY INVESTIGATION LTD.

Test Of: Danger Inc.
Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238)
and FCC Part 15: 2001 (Sections: 15.107 and 15.109)

Test Report Serial No:
RFI/MPTB3/RP15341A

This Test Report supersedes RFI Test Report No's.:
RFI/MPTB1/RP15341A and RFI/MPTB2/RP15341A

This Test Report Is Issued Under The Authority Of Richard Jacklin, Operations Director: 	Checked By: 
Tested By: 	Release Version No: PDF01
Issue Date: 10 April 2002	Test Dates: 11 February 2002 to 15 February 2002

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed:
Changing the document, Selecting text and graphics, Adding or changing notes and form fields.
Furthermore, the date of creation must match the issue date stated above.
This report may be copied in full. The results in this report apply only to the sample(s) tested.

Radio Frequency Investigation Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ, ENGLAND. Tel: +44 (0) 1256 851193 Fax: +44 (0) 1256 851192	Registered in England, No. 211 7901. Registered Office: Ewhurst Park, Ramsdell, Basingstoke, Hampshire RG26 5RQ	 UKAS TESTING 0644
---	---	--

RADIO FREQUENCY INVESTIGATION LTD.

EMC Department

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

TEST REPORT

S.No: RFI/MPTB3/RP15341A

Page 2 of 46

Issue Date: 10 April 2002

This page has been left intentionally blank.

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

Table of Contents

1. Client Information	4
2. Equipment Under Test (EUT).....	5
3. Test Specification, Methods And Procedures.....	8
4. Deviations From The Test Specification.....	10
5. Operation Of The EUT During Testing	11
6. Summary Of Test Results.....	12
7. Measurements, Examinations And Derived Results.....	13
8. Measurement Uncertainty.....	31
Appendix 1. Test Equipment Used.....	32
Appendix 2. Measurement Methods	34
Appendix 3. Test Configuration Drawings	41
Appendix 4. Photographs of EUT.....	46

RADIO FREQUENCY INVESTIGATION LTD.

EMC Department

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

TEST REPORT

S.No: RFI/MPTB3/RP15341A

Page 4 of 46

Issue Date: 10 April 2002

1. Client Information

Company Name:	Danger, Inc
Address:	124 University Avenue. Palo Alto, CA 94301 USA
Contact Name:	Marcus Wallgren

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

2. Equipment Under Test (EUT)

The following information has been supplied by the client:

2.1. Identification Of Equipment Under Test (EUT)

Brand Name:	Danger
Model Name or Number:	Hiptop
Unique Type Identification:	Not Stated by Client
Serial Number:	00102200002803
Country of Manufacture:	Thailand
FCC ID Number:	P5J-FYMASMBD-01
Date of Receipt:	11 February 2002

2.2. Description Of EUT

The equipment under test is a GSM-1900, GPRS, class 8, class B-enabled PDA, powered by a non-removable lithium ion battery; the battery is supplied with the EUT. The EUT is also capable of being used with a recharger and digital camera accessories.

2.3. Modifications Incorporated In EUT

The EUT has not been modified from what is described by the Model Name stated above.

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**2.4. Additional Information Related To Testing**

Power Supply Requirement: (non-removable lithium ion battery)	+ 4.2 V
Power Supply Requirement: (AC Battery Charger)	110 V, 60 Hz AC Mains Battery Charger
Intended Operating Environment:	Within GSM Network Coverage
Equipment Category:	Mobile Telephony/PDA
Type of Unit:	Mobile Station
Weight:	184 g
Dimensions:	120 mm x 67 mm x 30 mm
Interface Ports:	2.5 mm Jack headset/camera port 2.5 mm Jack Power port USB Downlink Port Infra-Red Port
Transmit Frequency	B, M and T (1850.2, 1880.0 and 1909.8 MHz)
Receive Frequency	B, M and T (1930.2, 1960.0 and 1989.8 MHz)
Maximum Power Output	1 Watts Max

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

2.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Digital Camera
Brand Name:	Kyocera
Model Name or Number:	HC-D01
Serial Number:	Not Stated by Client
FCC ID Number:	Not Applicable
Cable Length And Type:	Not Stated by Client
Connected to Port:	2.5 mm Jack Plug socket

Description:	USB Cable
Brand Name:	Copartner
Model Name or Number:	E188601
Serial Number:	Not Stated by Client
FCC ID Number:	Not Applicable
Cable Length And Type:	183 cm
Connected to Port:	USB Downlink Port

Description:	Battery Charger
Brand Name:	Not Stated by Client
Model Name or Number:	Not Stated by Client
Serial Number:	Not Stated by Client
FCC ID Number:	Not Stated by Client
Cable Length And Type:	Not Stated by Client
Connected to Port:	Charger Port

Description:	Head Set
Brand Name:	Not Stated by Client
Model Name or Number:	Not Stated by Client
Serial Number:	Not Stated by Client
FCC ID Number:	Not Applicable
Cable Length And Type:	Not Stated by Client
Connected to Port:	2.5 mm Jack Plug socket

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

3. Test Specification, Methods And Procedures

3.1. Test Specification

Reference:	FCC Part 24: 2001 Sections 24.232, 24.235, 24.238
Title:	Code of Federal Regulations, Part 24 (47CFR) Personal Communication Services.
Comments:	A description of the test facility used for this test is on file with, and has been accepted by, the Federal Communications Commission as required by Section 2.948 of Federal Rules.
Purpose of Test:	To determine whether the equipment complied with the requirements of the specification for the purposes of certification.

Reference:	FCC Part 15: 2001 Class A
Title:	Code of Federal Regulations, Part 15 (47CFR) Radio Frequency Devices: Digital Devices.
Comments:	A description of the test facility used for this test is on file with, and has been accepted by, the Federal Communications Commission as required by Section 2.948 of Federal Rules.
Purpose of Test:	To determine whether the equipment complied with the requirements of the specification for the purposes of certification.

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

**To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**

3.2. Methods And Procedures

The methods and procedures used were as detailed in:

47CFR: Part 24 (2001)

Title: Federal Communications Commission: Code of Federal Regulations 47: Personal Communication Services.

47CFR: Part 15 (2001)

Title: Federal Communications Commission: Code of Federal Regulations 47: Telecommunication

47CFR: Part 2 (2001)

Title: Federal Communications Commission: Code of Federal Regulations 47: Telecommunication

ANSI C63.2 (1996)

Title: American National Standard for Instrumentation - Electromagnetic noise and field strength.

ANSI C63.4 (2001)

Title: American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

ANSI C63.5 (1998)

Title: American National Standard for the Calibration of antennas used for Radiated Emission measurements in Electromagnetic Interference (EMI) control.

ANSI C63.7 (1988)

Title: American National Standard Guide for Construction of Open Area Test Sites for performing Radiated Emission Measurements.

CISPR 16-1 (1999)

Title: Specification for radio disturbance and immunity measuring apparatus and methods. Part 1. Radio disturbance and immunity measuring apparatus.

3.3. Definition Of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the Methods & Procedures section above. Appendix 1 contains a list of the test equipment used.

RADIO FREQUENCY INVESTIGATION LTD.

EMC Department

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

TEST REPORT

S.No: RFI/MPTB3/RP15341A

Page 10 of 46

Issue Date: 10 April 2002

4. Deviations From The Test Specification

None.

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

5. Operation Of The EUT During Testing

5.1. Operating Conditions

The EUT was tested in a normal laboratory environment.

During testing, the EUT was powered by a 4.2 V battery supply and connected to 110 V AC battery charger.

5.2. Operating Modes

The EUT was tested in the following operating modes:

Call Mode:

For carrier output power, occupied bandwidth, final transmitter radiated measurements, testing was performed at full power on top, middle and bottom channels of the assigned frequency block.

For frequency stability testing, measurements were performed at full power on the top and bottom channels of the assigned frequency block at -30 through +50 deg.C in 10 degree increments.

All transmitter radiated and conducted spurious pre-scan tests were performed at full power on the middle channel of the assigned frequency block. Final measurements were then performed on the Top, Middle and Bottom channels if an emission was identified.

Receive/PDA Mode:

Testing was performed with the call terminated and the phone was left in its receive mode. All PDA accessories were connected during this phase of testing and the PDA was open and active.

5.3. Configuration And Peripherals

The EUT was tested in the following configuration:

The EUT was connected to a GSM test set either by direct connection or via an air link. The EUT was configured with all of its accessories connected.

NB Section 2 of this report contains a full list of support equipment used and Appendix 3 contains a schematic diagram of the test configuration.

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
 FCC Part 15: 2001 (Sections: 15.107 and 15.109)

6. Summary Of Test Results

6.1. Call Mode

Range Of Measurements	Specification Reference	Mode of Operation	Port Type	Compliance Status
Carrier Output Power (Radiated)	Part 24 of CFR 47: 2002, Section 24.232	Transmit	Antenna	Complied
Carrier Output Power (Conducted)	Part 24 of CFR 47: 2002, Section 24.232	Transmit	Antenna Terminals	Complied
Frequency Stability (Temperature Variation)	Part 24 of CFR 47: 2002, Section 24.235	Transmit	Antenna Terminals	Complied
Frequency Stability (Voltage Variation)	Part 24 of CFR 47: 2002, Section 24.235	Transmit	Antenna Terminals	Complied
Occupied Bandwidth	Part 24 of CFR 47: 2002, Section 24.238	Transmit	Antenna Terminals	Complied
Emissions at Band Edges	Part 24 of CFR 47: 2002, Section 24.238	Transmit	Antenna Terminals	Complied
Conducted Emissions (Antenna Terminals)	Part 24 of CFR 47: 2002, Section 24.238	Transmit	Antenna Terminals	Complied
Electric Field Strength, Spurious Emissions (1 MHz to 20000 MHz)	Part 24 of CFR 47: 2002, Section 24.238	Transmit	Antenna	Complied

6.2. Receive/PDA Mode

Range Of Measurements	Specification Reference	Mode of Operation	Port Type	Compliance Status
Electric Field Strength, Spurious Emissions (1 MHz to 10000 MHz)	Part 15 of CFR 47: 2002, Section 15.109	Receive/ PDA	Enclosure	Complied
Conducted Spurious Emissions (450 kHz to 30 MHz)	Part 15 of CFR 47: 2002, Section 15.107	Receive/ PDA	AC Mains Input	Complied

6.3. Location Of Tests

All the measurements described in this report were performed at the premises of Radio Frequency Investigation Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ, England.

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

7. Measurements, Examinations And Derived Results

7.1. General Comments

7.1.1. This section contains test results only. Details of the test methods and procedures can be found in Appendix 3 of this report.

7.1.2. Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to Section 8 for details of measurement uncertainties.

7.1.3. The term "Call Mode" is used to signify Transmitter active and in normal mode of operation.

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

7.2. Carrier Output Power: Call Mode: (Antenna Terminals):
Section 24.232

7.2.1. The EUT, spectrum analyser and GSM test set were configured as for conducted antenna port measurements.

7.2.2. Tests were performed to identify the maximum transmit power in accordance with FCC Part 24.232 for conducted power.

7.2.3. The applicant provided a temporary antenna port to allow a direct connection to be made for conducted power measurements.

7.2.4. Results are shown for the EUT set to Bottom, Middle and Top channels using a fully charged battery. The battery nominally charged voltage is declared at 4.2 Volts:

Results:

Channel	Maximum Transmitter Output Level (Watts)	Limit (Watts)	Margin	Result
Bottom (512)	0.914	2.0	1.086	Complied
Middle (660)	0.935	2.0	1.065	Complied
Top (810)	0.977	2.0	1.023	Complied

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**7.3. Carrier Output Power: Call Mode: (EIRP): Section 24.232**

7.3.1. Tests were performed to identify the maximum transmit power in accordance with FCC Part 24.232 for EIRP.

7.3.2. Results are shown for the EUT set to Bottom, Middle and Top channels using a fully charged battery. The battery nominally charged voltage is declared at 4.2 Volts:

Results

Channel	Antenna Polarity (H/V)	Maximum Transmitter EIRP (dBm)	Limit EIRP (dBm)	Margin	Result
Bottom (512)	Vert	26.6	33	6.400	Complied
Middle (660)	Vert	26.4	33	6.600	Complied
Top (810)	Vert	23.6	33	9.400	Complied

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**7.4. Carrier Output Power: Call Mode: (Field Strength): Section 24.232**

7.4.1. Tests were performed to identify the maximum transmit power in accordance with FCC Part 24.232 for field strength.

7.4.2. Results are shown for the EUT set to Bottom, Middle and Top channels using a fully charged battery. The battery nominally charged voltage is declared at 4.2 Volts:

Bottom Channel

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dBmV/m)	Peak Limit (dBmV/m)	Peak Margin (dB)	Result
1.850000	Vert.	106	22	0.5	128.50	130.4	1.90	Complied

Middle Channel

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dBmV/m)	Peak Limit (dBmV/m)	Peak Margin (dB)	Result
1.879708	Vert.	105.9	22	0.5	128.40	130.4	2.00	Complied

Top Channel

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dBmV/m)	Peak Limit (dBmV/m)	Peak Margin (dB)	Result
1.909708	Vert.	103.3	22	0.5	125.80	130.4	4.60	Complied

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

7.5. Frequency Stability Measurements: Call Mode: (Temperature and Voltage Variation): Section 24.235

7.5.1. The EUT and HP GSM analyser were configured for conducted antenna port measurements.

7.5.2. A temporary antenna port was provided by the applicant to allow for conducted measurements.

7.5.3. Measurements were performed to determine the frequency stability of the fundamental emission from the EUT, when subjected to variation of ambient temperature and variation of supply voltage.

7.5.4. The device is battery operated. The applicant has stated that the nominal voltage of the battery is 4.2 volts with an end point voltage of 3.6 volts. Extreme measurements were performed at these two voltages as requested in FCC Part 2.1055 (d) (2)

7.5.5. The ambient temperature was varied from -30°C to +50°C in 10°C steps. During the test the fundamental frequency of the EUT shall stay within the authorised frequency block.

7.5.6. The client has stated that the authorised frequency block is:-

Lower Block Edge	1850 MHz
Upper Block Edge	1910 MHz

The limit is defined as the distance between the declared carrier and the band edge of the authorised frequency block. The limit is specified in parts per million.

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**Frequency Stability Measurements: Call Mode: (continued)****Results: Top Channel (1909.8 MHz)**

Temperature (°C)	DC Input Voltage (Volts)	Absolute Peak Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
-30	4.2	39	0.020	104.723	104.703	Complied
	3.6	51	0.028	104.723	104.696	Complied
-20	4.2	51	0.027	104.723	104.696	Complied
	3.6	44	0.023	104.723	104.700	Complied
-10	4.2	48	0.025	104.723	104.698	Complied
	3.6	42	0.022	104.723	104.701	Complied
+0	4.2	53	0.028	104.723	104.695	Complied
	3.6	22	0.012	104.723	104.712	Complied
+10	4.2	48	0.025	104.723	104.698	Complied
	3.6	36	0.019	104.723	104.704	Complied
+20	4.2	45	0.024	104.723	104.699	Complied
	3.6	14	0.007	104.723	104.716	Complied
+30	4.2	51	0.027	104.723	104.696	Complied
	3.6	28	0.015	104.723	104.708	Complied
+40	4.2	33	0.017	104.723	104.706	Complied
	3.6	23	0.012	104.723	104.711	Complied
+50	4.2	50	0.026	104.723	104.697	Complied
	3.6	29	0.015	104.723	104.708	Complied

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**Frequency Stability Measurements: Call Mode: (continued)****Results: Bottom Channel (1850.2 MHz)**

Temperature (°C)	DC Input Voltage (Volts)	Absolute Peak Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
-30	4.2	17	0.009	108.921	108.942	Complied
	3.6	72	0.039	108.921	108.882	Complied
-20	4.2	47	0.025	108.921	108.909	Complied
	3.6	48	0.026	108.921	108.908	Complied
-10	4.2	31	0.017	108.921	108.927	Complied
	3.6	46	0.025	108.921	108.910	Complied
+0	4.2	25	0.014	108.921	108.933	Complied
	3.6	40	0.022	108.921	108.917	Complied
+10	4.2	42	0.023	108.921	108.915	Complied
	3.6	39	0.021	108.921	108.918	Complied
+20	4.2	34	0.018	108.921	108.923	Complied
	3.6	46	0.025	108.921	108.910	Complied
+30	4.2	39	0.021	108.921	108.918	Complied
	3.6	48	0.026	108.921	108.908	Complied
+40	4.2	37	0.020	108.921	108.920	Complied
	3.6	47	0.025	108.921	108.909	Complied
+50	4.2	33	0.018	108.921	108.924	Complied
	3.6	48	0.026	108.921	108.908	Complied

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**7.6. Transmitter Conducted Measurements: Call Mode: (Occupied Bandwidth): Section 24.238**

7.6.1. The EUT, HP GSM test and spectrum analyser were configured for conducted antenna port measurements.

7.6.2. A temporary antenna port was provided by the applicant to allow for conducted measurements.

7.6.3. The device was operating in its normal mode of operation.

7.6.4. Measurements were performed to determine the Occupied Bandwidth of the fundamental emission from the EUT at the bottom middle and top channels.

7.6.5. The Occupied Bandwidth was measured using the built in occupied bandwidth function of the Rohde and Schwarz FSEB spectrum analyser. It was set to measure the bandwidth where 99% of the signal power was contained. The analyser settings were set as per those outlined in the FSEB user manual for this measurement. Ie, $RBW \leq 1/20$ of occupied bandwidth.

Results:

Channel	Frequency (MHz)	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (kHz)
Bottom (512)	1850.2	3	3	245.491
Middle (660)	1879.8	3	3	305.611
Top (810)	1909.8	3	3	250.501

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**7.7. Transmitter Conducted Measurements: Call Mode: (Emissions at Band Edges): Section 24.238**

7.7.1. The EUT and spectrum analyser was configured as for conducted antenna port measurements.

7.7.2. A temporary antenna port was provided by the applicant to allow for conducted measurements.

7.7.3. FCC Part 24.238 states that emissions shall be attenuated by at least $43 + 10 \log(P)$ dB below the transmitter power (P). It also states that the 1st MHz band immediately adjacent to the applicants declared frequency block may be measured using a resolution bandwidth of at least 1% of the emission bandwidth. This bandwidth was found to be 3 kHz.

7.7.4. The highest level within these 1 MHz bands was thus measured and recorded.

Results:**Bottom Band Edge**

Frequency (MHz)	Peak Emission Level (Watts)	Spurious Attenuation Level (dB)	Limit (dB)	Margin (dB)	Result
1850.000	0.032	44.6	43.0	1.60	Complied

Top Band Edge

Frequency (MHz)	Peak Emission Level (Watts)	Spurious Attenuation Level (dB)	Limit (dB)	Margin (dB)	Result
1910.000	0.031	45.0	43.0	2.00	Complied

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**7.8. Transmitter Conducted Measurements: Call Mode: (Emissions Outside of Authorised Frequency Block): Section 24.238**

7.8.1. The EUT and spectrum analyser was configured as for conducted antenna port measurements.

7.8.2. A temporary antenna port was provided by the applicant to allow for conducted measurements.

7.8.3. FCC Part 24.238 states that emissions shall be attenuated by at least $43 + 10 \log (P)$ dB below the transmitter power (P).

7.8.4. The spurious attenuation level is defined as: -

$$dB = 10 \log_{10} \left(\frac{TX \text{ power in watts}}{0.001} \right) - \text{spurious level (dBm)}$$

Results:

Frequency (MHz)	Peak Emission Level (mW)	Spurious Attenuation Level (dB)	Limit (dB)	Margin (dB)	Result
0.038	0.000400	63.9	43.0	20.9	Complied
0.150	0.000058	72.3	43.0	29.3	Complied
926.711	0.000051	72.8	43.0	29.8	Complied
2626.000	0.000085	70.6	43.0	27.6	Complied
3700.350	0.002455	56.0	43.0	13.0	Complied
3819.480	0.000479	63.1	43.0	20.1	Complied
3822.000	0.001413	58.4	43.0	15.4	Complied
4752.000	0.000100	69.9	43.0	26.9	Complied
5733.000	0.000065	71.8	43.0	28.8	Complied
6872.000	0.000043	73.6	43.0	30.6	Complied
8717.000	0.000032	74.9	43.0	31.9	Complied
9474.000	0.000031	75.0	43.0	32.0	Complied
10536.000	0.000030	75.2	43.0	32.2	Complied
11462.000	0.000035	74.5	43.0	31.5	Complied

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

Transmitter Conducted Measurements: Call Mode: (Emissions Outside of Authorised Frequency Block): Section 24.238 (continued)**Results (continued):**

Frequency (MHz)	Peak Emission Level (mW)	Spurious Attenuation Level (dB)	Limit (dB)	Margin (dB)	Result
12644.000	0.000034	74.6	43.0	31.6	Complied
13970.000	0.000066	71.7	43.0	28.7	Complied
14048.000	0.000098	70.0	43.0	27.0	Complied
15280.000	0.000229	66.3	43.0	23.3	Complied
16497.000	0.000081	70.8	43.0	27.8	Complied
17466.000	0.000085	70.6	43.0	27.6	Complied

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**7.9. Test Results For Radiated Emissions: Call Mode: Section 2.1053****7.9.1. Electric Field Strength Measurements: 30 to 1000 MHz**

7.9.1.1. Preliminary Radiated spurious scans were performed with the EUT set to the Middle channel. Any visible spurious was then measured with the device set to top, bottom and middle channels.

7.9.1.2. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector at a test distance of 3m (results incorporate antenna factors and cable losses):

7.9.1.3. FCC Part 24.238 states that emissions shall be attenuated by at least $43+10 \log (P)$ dB below the transmitter power (P_t). However, this is defined for conducted measurements. For radiated field strength measurements the limit is re-defined.

7.9.1.4. The standard equation for electric field strength from a transmitting antenna such that the electric and magnetic field values are related by the impedance of free space is:

$$E_{\text{v/m}} = \frac{\sqrt{30P_tG_t}}{r}$$

Inserting values for P_t , G_t and r :-

$$127.4 = \frac{\sqrt{30*1.0*1.64}}{3}$$

P_t = Power Transmitted in Watts (W)

G_t = Numeric Gain of Transmitting Antenna

r = Separation Between Antennas (meters)

The transmitting antenna is assumed to be an ideal dipole with a gain of 1.64 or 2.15 dBi. At 3 meters the field strength for 1 watt equates to 127.4 dBuV/m. The limit is specified that spurious emissions shall be attenuated by at least $43+10 \log (P)$. For the rated carrier power of 1 watt this equates to a required attenuation of 43 dB. The calculated limit is thus 84.4 dBuV/m.

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

Test Results For Radiated Emissions: Call Mode: Section 2.1053 (continued)**Results:**

Frequency (MHz)	Ant. Pol.	Q-P Level (dBmV/m)	Limit (dBmV/m)	Margin (dB)	Result
114.014	Horiz.	22.5	84.4	61.9	Complied
117.620	Vert.	23.9	84.4	60.5	Complied
169.008	Horiz.	26.8	84.4	57.6	Complied
174.012	Horiz.	28.0	84.4	56.4	Complied
264.026	Horiz.	35.8	84.4	48.6	Complied
552.063	Horiz.	36.0	84.4	48.4	Complied
864.258	Vert.	36.0	84.4	48.4	Complied

*Note: all three channels exhibited the same levels of emission.

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**7.10. Test Results For Radiated Emissions: Call Mode****7.10.1. Electric Field Strength Measurements: 1.0 to 26.0 GHz**

7.10.1.1. The client has stated that the highest clock frequency for the EUT was 2.480 GHz. Therefore tests were performed up to 26 GHz.

7.10.1.2. Preliminary radiated spurious scans were performed with the EUT set to Bottom, Middle and Top channels as stated in section 5.2.

7.10.1.3. The following table lists frequencies at which emissions were measured using an Peak detector, a measurement test distance of 3 meters was used for the indicated results (results incorporate antenna factors and cable losses):

7.10.1.4. The limit was calculated as described in section 7.9.1.4 above.

Highest Peak Level:

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dBmV/m)	Peak Limit (dBmV/m)	Peak Margin (dB)	Result
14.0338	Horiz.	21.0	34	3	58.00	84.4	26.40	Complied

*Note: all three channels exhibited the same levels of emission

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**7.11. Test Results For Radiated Emissions: Receive/PDA Mode: Section 15.109****7.11.1. Electric Field Strength Measurements (Frequency Range: 30 to 1000 MHz)**

7.11.1.1. The following table indicates measured results with the EUT operated in receive mode to the limits specified in Part 15.109.

7.11.1.2. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector at a test distance of 3m (results incorporate antenna factors and cable losses):

Frequency (MHz)	Ant. Pol.	Q-P Level (dBmV/m)	Limit (dBmV/m)	Margin (dB)	Result
114.014	Horiz.	22.5	43.5	21.0	Complied
117.620	Vert.	23.9	43.5	19.6	Complied
169.008	Horiz.	26.8	43.5	16.7	Complied
174.012	Horiz.	28.0	43.5	15.5	Complied
264.026	Horiz.	35.8	46.0	10.2	Complied
552.063	Horiz.	36.0	46.0	10.0	Complied
864.258	Vert.	36.0	46.0	10.0	Complied

*Note: all three channels exhibited the same levels of emission

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**Test Results For Radiated Emissions: Receive/PDA Mode (continued)****Electric Field Strength Measurements (Frequency Range: 1.0 to 26.0 GHz)**

7.11.1.3. The following table indicates measured results with the EUT operated in receive mode to the limits specified in Part 15.109.

Highest Average Level:

Frequency (GHz)	Antenna Polarity (H/V)	Average Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Average Level (dBmV/m)	Average Limit (dBmV/m)	Average Margin (dB)	Result
14.0338	Horiz.	8.8	34	3	45.80	54.0	8.20	Complied

Highest Peak Level:

Frequency (GHz)	Antenna Polarity (H/V)	Peak Detector level (dBmV)	Antenna factor (dB)	Cable loss (dB)	Actual Peak Level (dBmV/m)	Peak Limit (dBmV/m)	Peak Margin (dB)	Result
14.0338	Horiz.	21.0	34	3	58.00	74.0	16.00	Complied

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**7.12. Test Results For AC Mains Conducted Emissions: Call Mode:
Section 15.207****7.12.1. Quasi-Peak Detector Measurements On Live And Neutral Lines**

7.12.1.1. The following table indicates measured results to the limits specified in Part 15.207 (a) and (b)

7.12.1.2. Preliminary conducted spurious scans were performed with the EUT set to Bottom, Middle and Top channel.

7.12.1.3. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector:

Bottom Channel

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.465	Live/ Neutral	40.7	48.0	7.3	Complied

Middle Channel

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.483	Live/ Neutral	37.9	48.0	10.1	Complied

Top Channel

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.450	Live/ Neutral	40.6	48.0	7.4	Complied

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**7.13. Test Results For AC Mains Conducted Emissions: Receive/PDA Mode: Section 15.107****7.13.1. Quasi-Peak Detector Measurements On Live And Neutral Lines**

7.13.1.1. The following table indicates measured results to the limits specified in Part 15.107

7.13.1.2. The following table lists frequencies at which emissions were measured using a Quasi-Peak detector:

Bottom Channel

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.465	Live/Neutral	40.7	48.0	7.3	Complied

Middle Channel

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.483	Live/Neutral	37.9	48.0	10.1	Complied

Top Channel

Frequency (MHz)	Line	Q-P Level (dBmV)	Q-P Limit (dBmV)	Margin (dB)	Result
0.450	Live/Neutral	40.6	48.0	7.4	Complied

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

8. Measurement Uncertainty

8.1. No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

8.2. The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

8.3. The uncertainty of the result may need to be taken into account when interpreting the measurement results.

8.4. The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level	Calculated Uncertainty
Carrier Output Power (EIRP)	Not applicable	95%	+/- 4.0 dB
Conducted Emissions (AC)	0.15 MHz to 30 MHz	95%	+/- 3.25 dB
Conducted Emissions Antenna Port	0.009 kHz to 26 GHz	95%	+/- 2.9 dB
Radiated Emissions at 3.0 metres	30 MHz to 1000 MHz	95%	+/- 5.26 dB
Radiated Emissions at 3.0 metres	1 GHz to 26 GHz	95%	+/- 4.18 dB
Frequency Stability	Not applicable	95%	+/- 4.2 dB
Occupied Bandwidth	1850 to 1910 MHz	95%	+/- 0.12 %
Emissions at Band Edges	1850 to 1910 MHz	95%	+/- 2.9 dB

8.5. The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
 FCC Part 15: 2001 (Sections: 15.107 and 15.109)

Appendix 1. Test Equipment Used

Instrument	Manufacturer	Model	RFI No.
HFH2-Z2 Loop Antenna	Rohde & Schwarz	HFH2-Z2	A007
HFH2-Z2 Metal Tripod	Rohde & Schwarz	HFU-Z	A008
Horn Antenna	Eaton	9188-2	A027
Horn Antenna	Eaton	91888-2	A028
2 to 4 GHz Eaton Horn Antenna	Eaton	91889-2	A031
LISN	Rohde & Schwarz	ESH3-Z5	A067
Chase Bilog Antenna	Chase EMC Ltd	CBL6112B	A1037
Site 2 Controller SC144	-	SC144	A197
WG 16 Microwave Horn	Flann Microwave	16240-20	A255
OATS Positioning Controller	Rohde & Schwarz	HCC	A276
3 dB attenuator (9)	Suhner	6803.17.B	A392
WG 14 horn	Flann	14240-20	A427
WG 12 horn	Flann	12240-20	A428
WG 18 horn	Flann	18240-20	A430
WG 20 horn	Flann	20240-20	A436
Bilog Antenna	Chase	CBL6111A	A490
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	A559
Cable	RFI	None	C161
Cable	Rosenberger	UFA210A-1-1181-70x70	C230
Coaxial Cable	Rosenberger	UFA210A-1-1181-70x70	C346
Cable	Rosenberger	UFA210A-1-1181-70x70	C360
Cable	Rosenberger	UFA210A-1-1181-70x70	C362
BNC Cable	Rosenberger	RG142	C364

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**Test Equipment Used (continued)**

Instrument	Manufacturer	Model	RFI No.
N-Type Coaxial Cable	Rosenberger	UFA210A-1-3937-504504	C468
C564-N-2	Rosenberger	UFA 210A-1-0787-70x70	C564
C574-N-N-2	Rosenberger	UFA210A-1-788-50x50	C574
PCN Environmental Chamber	Sanyo	ATMOS chamber	E013
Spectrum Monitor	Rohde & Schwarz	EZM	M003
ESVP Receiver	Rohde & Schwarz	ESVP	M023
ESMI Spectrum Analyser / Receiver	Rohde & Schwarz	ESMI	M069
GSM Test set	Hewlett Packard	8922M	M1013
DCS Test set	Hewlett Packard	83220E	M1014
Spectrum Analyser	Rohde & Schwarz	FSEB 30	M127
Fluke 76 DVM	Fluke	76	M128
Turntable Controller	R.H.Electrical Services	RH351	M173
GSM MS Test Set	Hewlett Packard	8922M	M175
DCS 1800 MS Test Set	Hewlett Packard	83220E	M176
Thermo/hygrometer	Oregon Scientific	M245	M245
Analyser Display Unit	Rohde & Schwarz	ESAI-D	M505
RF unit	Rohde & Schwarz	ESBI-RF	M506
D.C. PSU	INSTEK	PC-3060	S010

NB In accordance with NAMAS requirements, all the measurement equipment is on a calibration schedule.

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

Appendix 2. Measurement Methods

A2.1 FCC Part 24.232: Effective Isotropic Radiated Power (EIRP)

A2.1.1 EIRP measurements were performed in accordance with the standard, against appropriate limits.

A2.1.2 The EIRP was measured with the EUT arranged on a non-conducting table on an open area test site using an antenna height of 1.5 m and a measurement distance of 3 m

A2.1.3 The level of the EIRP was maximised by rotating the table.

A2.1.4 Once the final amplitude (maximised) had been made, the EIRP was ascertained using a substitution method using a isotropic antenna and a supplied test signal via a signal generator.

A2.1.5 All measurements were performed using broadband Horn antennas.

A2.1.6 The test equipment settings for EIRP measurements were as follows:

Receiver Function	Final Measurements
Detector Type:	Peak
Mode:	Not applicable
Bandwidth:	1 MHz
Amplitude Range:	20 dB
Measurement Time:	> 1 s
Observation Time:	> 15 s
Sweep Time:	Coupled

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

A2.2 FCC Part 24.235: Frequency Stability

A2.2.1 Measurements were performed inside an environmental chamber under extremes of temperature and voltage to determine the frequency stability of the device under test against specified limits.

2.2.2 Measurements were made on the top and bottom channels within the temperature range -30 to 50 Deg C, and at the declared nominal supply voltage and at the declared endpoint voltage.

2.2.3 The EUT was then switched off for a minimum of 30 minutes while the environmental chamber stabilised at the next temperature within the temperature range. .

A2.2.4 FCC Part 24.235 states that the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorised frequency block. As such, the frequency difference from declared was measured in parts per million (ppm) with the difference between this and the authorised band edge being reported., also in (ppm)

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**A2.3 Conducted Antenna Port Measurements: FCC Part 24.238:**

A2.3.1 Spurious measurements at the Antenna port were performed from 1 MHz to the lower frequency of the allocated frequency block and from the top frequency of the allocated frequency block to 10 times the highest EUT generated frequency (26 GHz).

A2.3.2 A measuring receiver was connected to the antenna port of the EUT via a suitable cable and RF Attenuator. The total loss of both the cable and the attenuator were measured and entered as a reference level offset into the measuring receiver to correct for the losses.

A2.3.3 The specified frequency band was investigated with the transmitter operating at full power on the middle channel. Any spurious noted was then measured with the transmitter set to top, bottom and middle channels.

A2.3.4 Measurements were also made in the 1 MHz bands, immediately adjacent to the band edges of the frequency block, using a resolution bandwidth of at least 1% of the occupied bandwidth (300kHz), as per FCC Part 24.238 (b). The resolution bandwidth was thus set to 3kHz.

A2.3.5 The test equipment settings for conducted antenna port measurements were as follows:

Receiver Function	Initial Scan	Final Measurements Below 1GHz	Final Measurements Above 1 GHz
Detector Type:	Peak	Quasi-Peak (CISPR)	Peak/Average
Mode:	Max Hold	Not applicable	Not applicable
Bandwidth:	100 kHz	120 kHz	1 MHz
Amplitude Range:	60 dB	20 dB	20 dB (typical)
Measurement Time:	Not applicable	> 1 s	> 1 s
Observation Time:	Not applicable	> 15 s	> 15 s
Step Size:	Continuous sweep	Not applicable	Not applicable
Sweep Time:	Coupled	Not applicable	Not applicable

* The resolution bandwidth used for measurements in the 1 MHz blocks either side of the declared operating frequency block was set to 3 kHz.

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

A2.4 FCC Part 24.238: Occupied Bandwidth

A2.4.1 The EUT was connected to the spectrum analyser via its temporary antenna port.

A2.4.2 The Occupied Bandwidth was measured using the built in occupied bandwidth function of the Rohde and Schwarz FSEB spectrum analyser. It was set to measure the bandwidth where 99% of the signal power was contained. The analyser settings were set as per those outlined in the FSEB user manual for this measurement. Ie, RBW \leq 1/20 of occupied bandwidth. A value of 3kHz was used.

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)**A2.5 FCC Part 15: AC Mains Conducted Emissions**

A2.5.1 AC mains conducted emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

A2.5.2 The test was performed in a shielded enclosure with the equipment arranged as detailed in the standard on a wooden bench using the floor of the screened enclosure as the ground reference plane.

A2.5.3 Initial measurements in the form of swept scans covering the entire measurement band were performed in order to identify frequencies on which the EUT was generating interference. In order to minimise the time taken for these swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidths (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

A2.5.4 During the swept measurements (and also during subsequent final measurements on single frequencies) any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT.

A2.5.5 Following the initial scans, a graph was produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested (at individual frequencies) using the appropriate detector function.

A2.5.6 The test equipment settings for conducted emissions measurements were as follows:

Receiver Function	Initial Scan	Final Measurements
Detector Type:	Peak	Quasi-Peak (CISPR)/Average
Mode:	Max Hold	Not applicable
Bandwidth:	10 kHz*	9 kHz*
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	> 1 s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

* Where measurements were made below 150 kHz a 200 Hz bandwidth was used.

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

A2.6 Radiated Emissions: FCC Part 15/24

A2.6.1 Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

A2.6.2 Initial measurements covering the entire measurement band in the form of swept scans in a shielded enclosure were performed in order to identify frequencies on which the EUT was generating interference. This determined the frequencies on which the EUT should be re-measured in full on the open area test site. In order to minimise the time taken for the swept measurements, a Peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

A2.6.3 The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m. Following the initial scans, graphs were produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested on the open area test site, at the appropriate distance, using a measuring receivers with a Quasi-Peak detector (below 1000 MHz), where applicable, for measurements above 1000 MHz average and peak detectors were used.

A2.6.4 For the main (final) measurements the EUT was arranged on a non-conducting table on an open area test site, as detailed in the specification.

A2.6.5 All measurements on the open area test site were performed using broadband antennas.

A2.6.6 On the open area test site, at each frequency where a signal was found, the levels were maximised by initially rotating the turntable through 360° and then varying the antenna height between 1 m and 4 m. At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT.

A2.6.7 For final measurements on the open area test site, for frequencies between 9 kHz and 30 MHz where a signal was found, the levels were maximised by initially rotating the turntable through 360° and then varying the antenna angle through 360°. With the antenna set to a fixed height of 1.5 m. At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT.

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

A2.6.8 The test equipment settings for radiated emissions measurements were as follows:

Receiver Function	Initial Scan	Final Measurements Below 1GHz	Final Measurements Above 1 GHz
Detector Type:	Peak	Quasi-Peak (CISPR)	Peak/Average
Mode:	Max Hold	Not applicable	Not applicable
Bandwidth:	(120 kHz < 1GHz) (1MHz > 1GHz)	120 kHz	1 MHz (If Applicable)
Amplitude Range:	60 dB	20 dB	20 dB (typical)
Measurement Time:	Not applicable	> 1 s	> 1 s
Observation Time:	Not applicable	> 15 s	> 15 s
Step Size:	Continuous sweep	Not applicable	Not applicable
Sweep Time:	Coupled	Not applicable	Not applicable

RADIO FREQUENCY INVESTIGATION LTD.

EMC Department

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

TEST REPORT

S.No: RFI/MPTB3/RP15341A

Page 41 of 46

Issue Date: 10 April 2002

Appendix 3. Test Configuration Drawings

This appendix contains the following drawings:


Drawing Reference Number	Title
DRG\15341JD02\EMICON	Test configuration for measurement of conducted emissions
DRG\15341JD02\EMIRAD	Test configuration for measurement of radiated emissions
DRG\15341JD02\001	Schematic diagram of the EUT, support equipment and interconnecting cables used for the test (Receive/PDA mode)
DRG\15341JD02\002	Schematic diagram of the EUT, support equipment and interconnecting cables used for the test (call mode)

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
 FCC Part 15: 2001 (Sections: 15.107 and 15.109)

DRG\15341JD02\EMICON

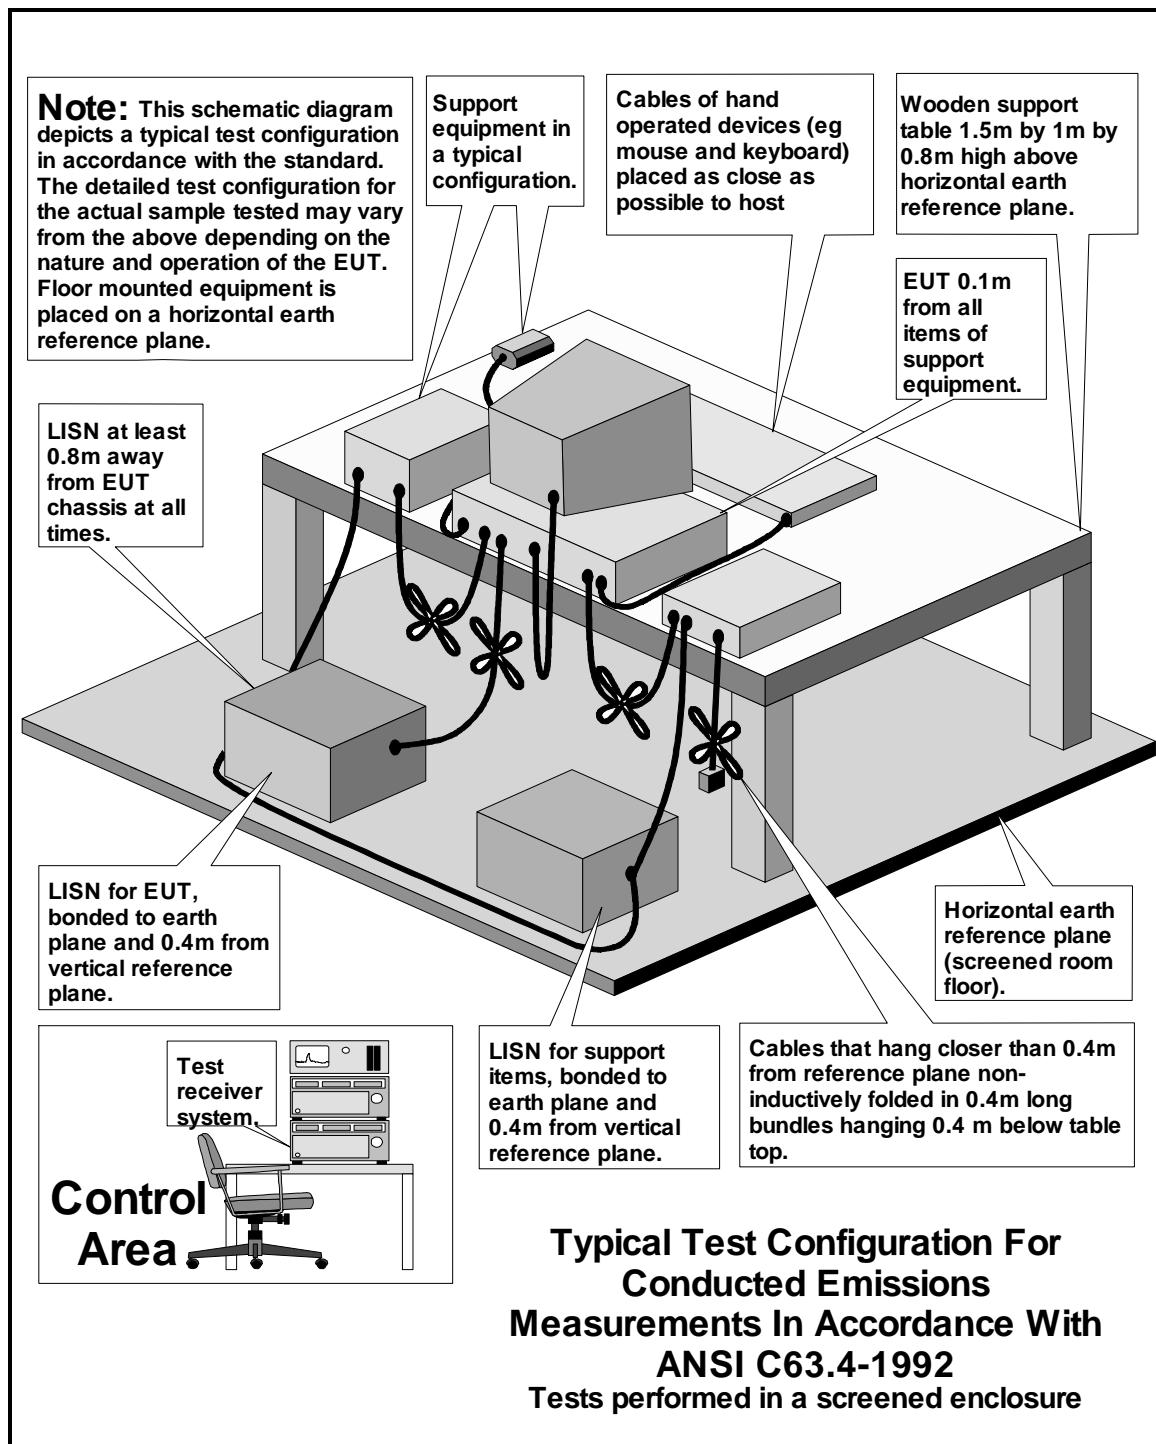


Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
 FCC Part 15: 2001 (Sections: 15.107 and 15.109)

DRG\15341JD02\EMIRAD

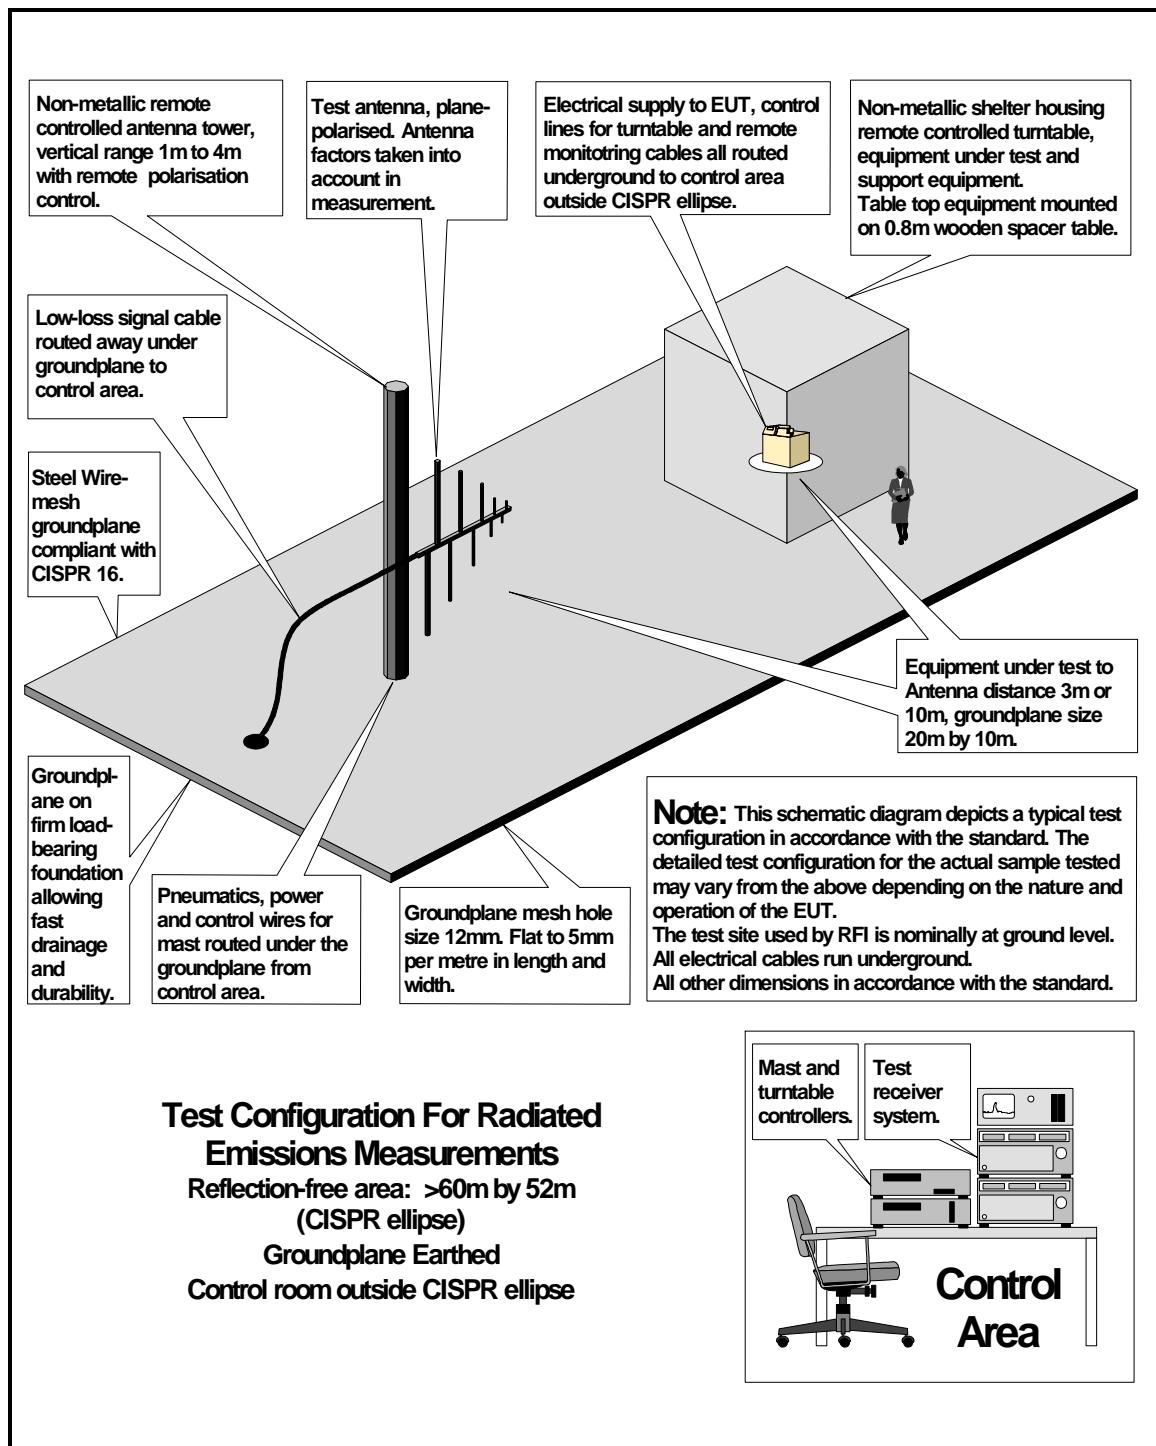


Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

DRG\15341JD02\001

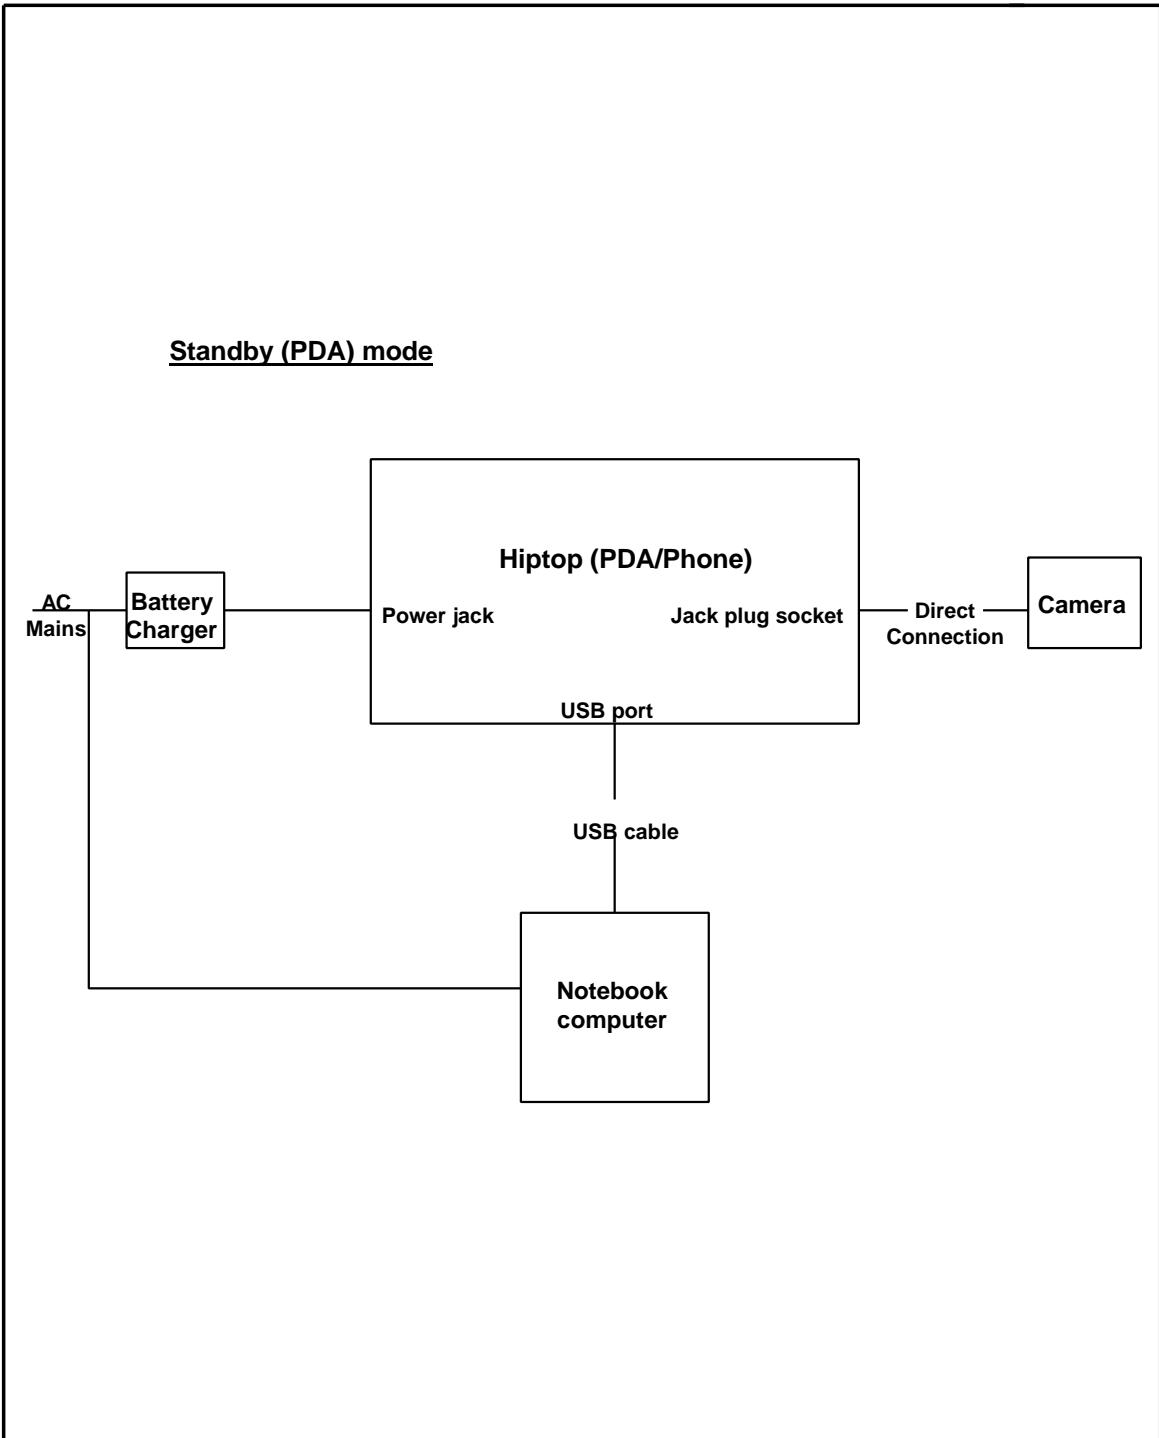


Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

DRG\15341JD02\002

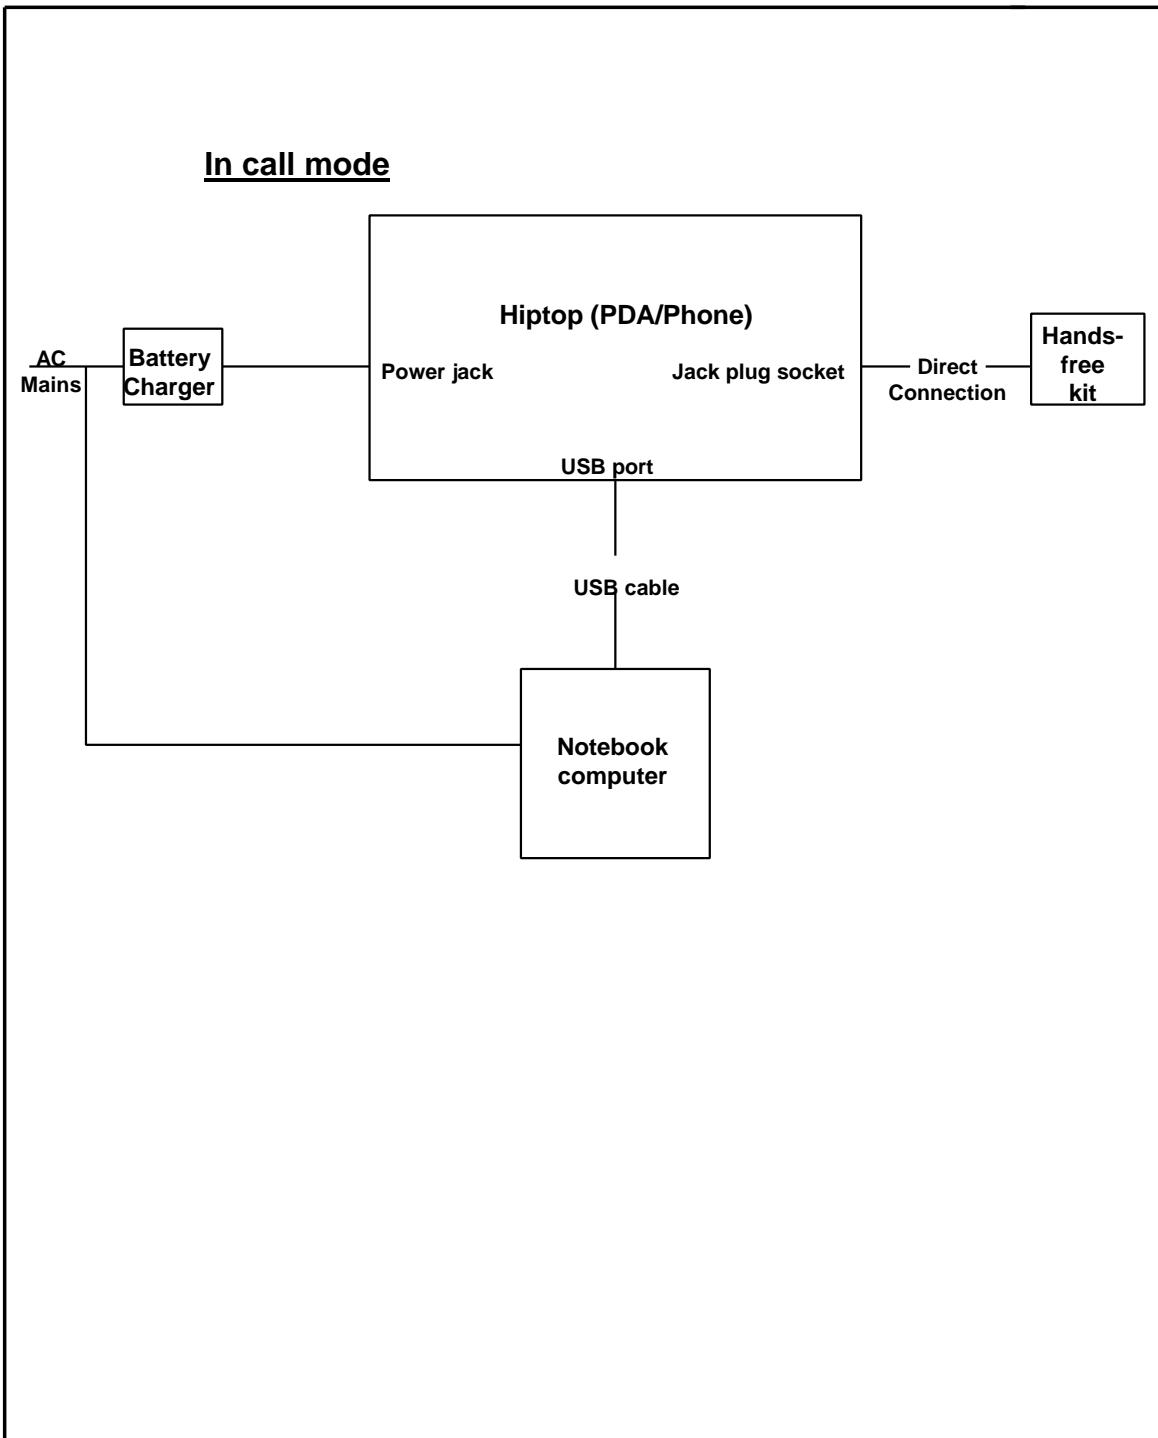

Test Of: Danger Inc.

Hiptop GSM 1900 Mobile Phone

To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

Appendix 4. Photographs of EUT


This appendix contains the following photographs:

Photo Reference Number	Title
PHT\15341JD02\001	Close-up view of conducted emissions.
PHT\15341JD02\002	Side view of conducted emissions.
PHT\15341JD02\003	Front view close up with camera fitted on OATS.
PHT\15341JD02\004	Rear view close up with camera fitted on OATS.
PHT\15341JD02\005	Front view close up with hands free kit fitted on OATS.
PHT\15341JD02\006	Rear view close up with hands free kit fitted on OATS.

These pages are not included in the total number of pages for this report.

Test Of: Danger Inc.
Hiptop GSM 1900 Mobile Phone
To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

PHT\15341JD02\001 Close-up view of conducted emissions.

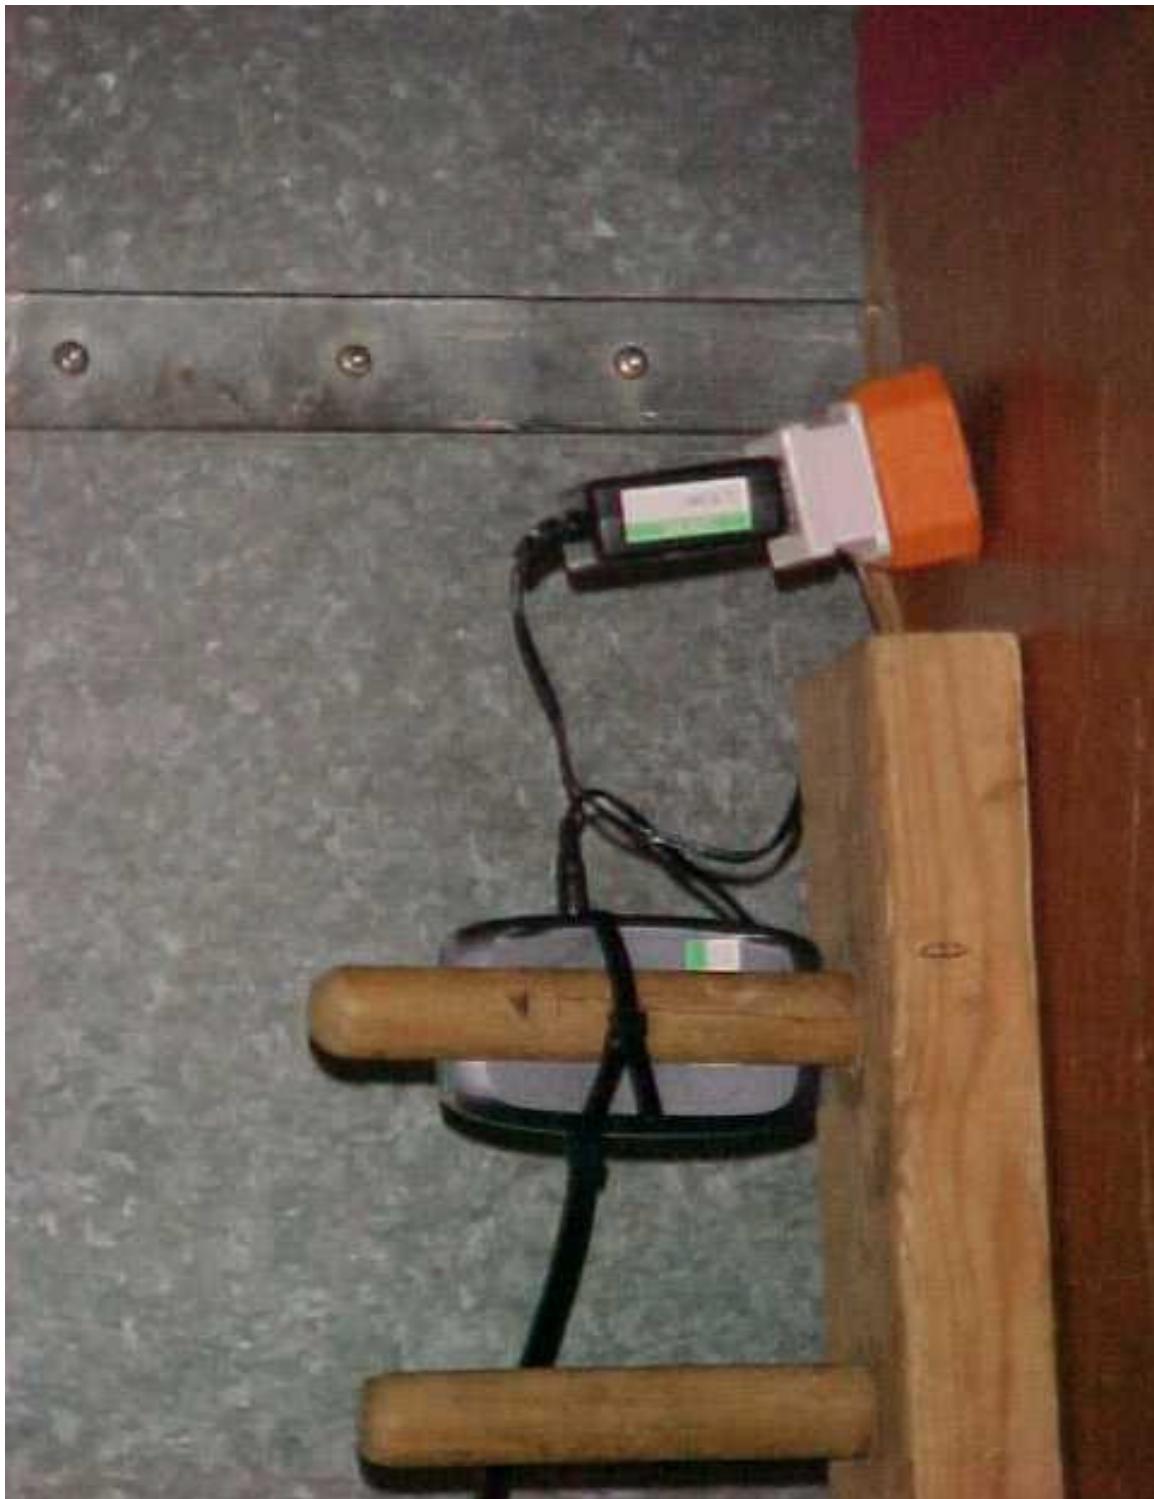

EMC Department

Test Of: Danger Inc.
Hiptop GSM 1900 Mobile Phone
To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

PHT\15341JD02\002 Side view of conducted emissions.



Test Of: Danger Inc.
Hiptop GSM 1900 Mobile Phone
To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

PHT\15341JD02\003 Front view close up with camera fitted on OATS.



EMC Department


Test Of: Danger Inc.
Hiptop GSM 1900 Mobile Phone
To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

PHT\15341JD02\004 Rear view close up with camera fitted on OATS.



Test Of: Danger Inc.
Hiptop GSM 1900 Mobile Phone
To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

PHT\15341JD02\005 Front view close up with hands free kit fitted on OATS.

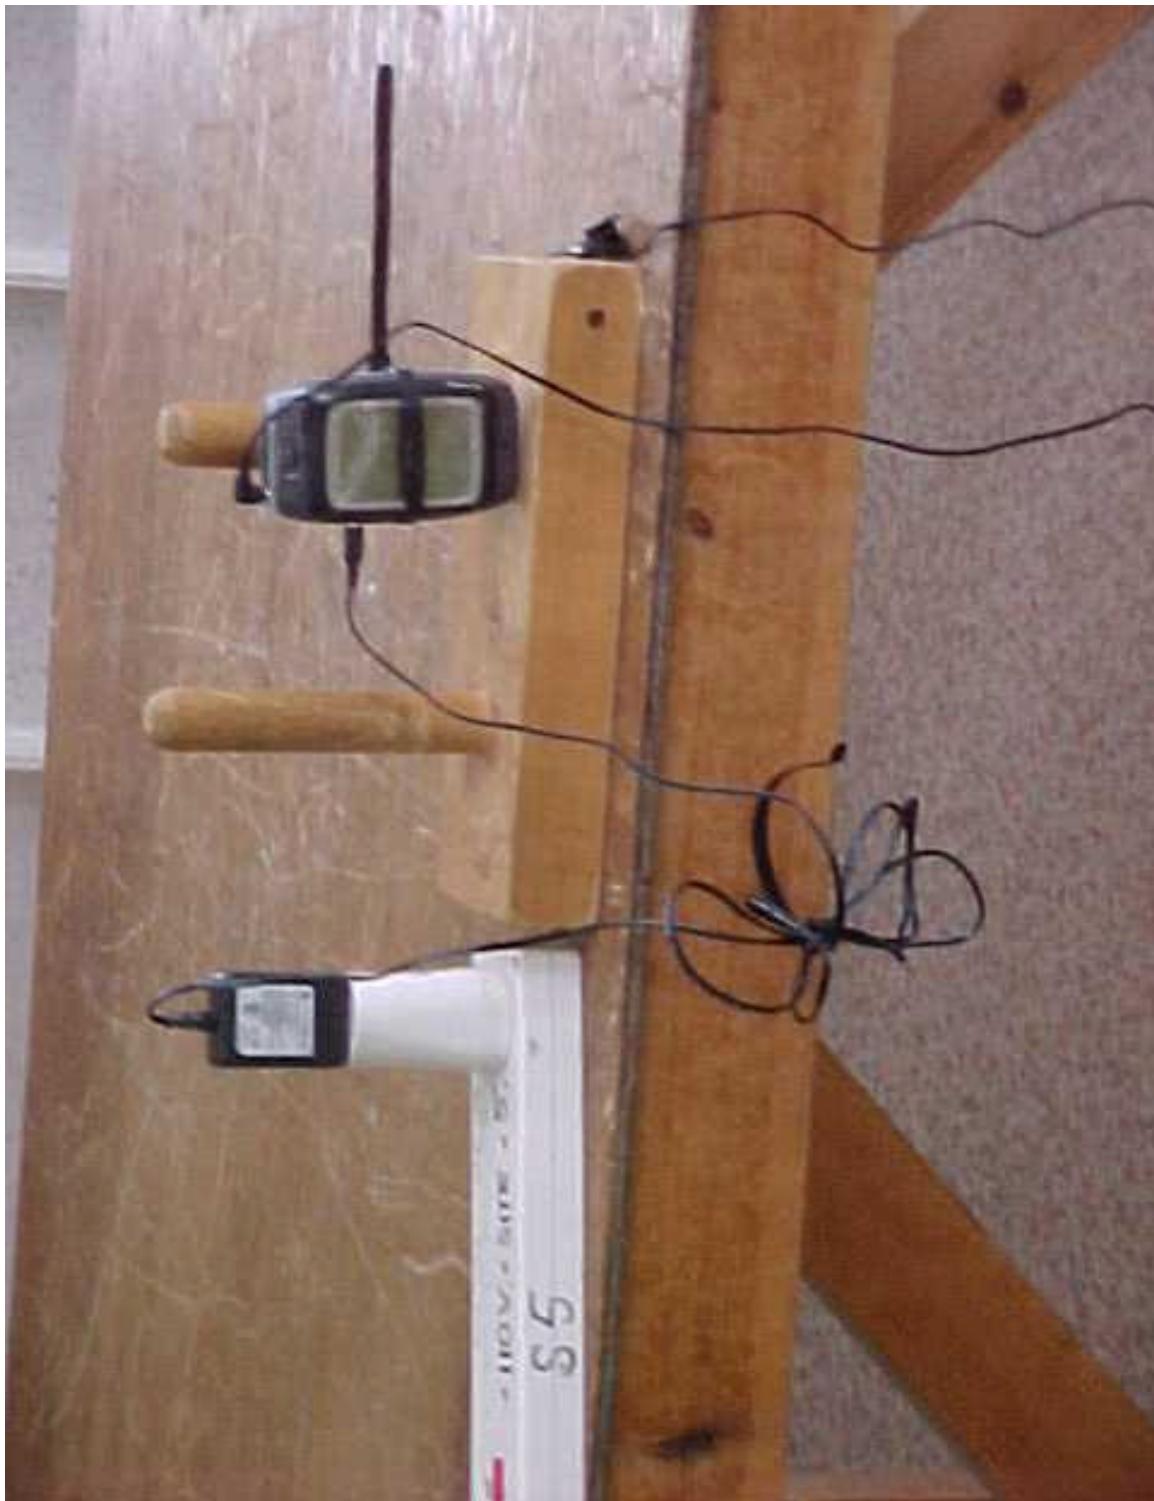

Test Of: Danger Inc.
Hiptop GSM 1900 Mobile Phone
To: FCC Part 24: 2001 (Sections: 24.232, 24.235, 24.238) and
FCC Part 15: 2001 (Sections: 15.107 and 15.109)

PHT\15341JD02\006 Rear view close up with hands free kit fitted on OATS.

