

# SAR TEST REPORT

Equipment Under Test	:	Industrial PDA
Model No.	:	ALH-9001 (Additional name : ALH-9001-EMA, Si203)
Applicant	:	Alien Technology Corporation
Address of Applicant	:	18220 Butterfield Blvd Morgan Hill, CA 95037, USA
FCC ID	:	P65ALH9001
Device Category	:	Portable Device
Exposure Category	:	General Population/Uncontrolled Exposure
Date of Receipt	:	2011-06-07
Date of Test(s)	:	2011-07-02 ~ 2011-07-04
Date of Issue	:	2011-07-26
Max. SAR	:	0.792 W/kg (GSM850), 0.294 W/kg (PCS1900), 0.704 W/kg (WCDMA V), 0.487 W/kg (WCDMA II), 0.318 W/kg (WLAN)

## Standards:

**FCC OET Bulletin 65 supplement C**  
**IEEE 1528, 2003**  
**ANSI/IEEE C95.1, C95.3**

In the configuration tested, the EUT complied with the standards specified above.

## Remarks:

---

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Testing Korea Co., Ltd. or testing done by SGS Testing Korea Co., Ltd. in connection with distribution or use of the product described in this report must be approved by SGS Testing Korea Co., Ltd. in writing.

---

<b>Tested by</b>	:	<b>Fred Jeong</b>		<b>2011-07-26</b>
------------------	---	-------------------	---	-------------------

<b>Approved by</b>	:	<b>Charles Kim</b>		<b>2011-07-26</b>
--------------------	---	--------------------	--	-------------------

## **Contents**

### **1. General Information**

1.1	Testing Laboratory.....	3
1.2	Details of Applicant.....	3
1.3	Version of Report.....	3
1.4	Description of EUT(s).....	3
1.5	Test Environment.....	4
1.6	Operation description.....	4
1.7	Evaluation procedures.....	5
1.8	The SAR Measurement System.....	6
1.9	System Components.....	8
1.10	SAR System Verification.....	9
1.11	Tissue Simulant Fluid for the Frequency Band.....	11
1.12	Test Standards and Limits.....	12
<b>2.</b>	<b>Instruments List.....</b>	<b>14</b>
<b>3.</b>	<b>Summary of Results.....</b>	<b>15</b>

### **APPENDIX**

- A. DASY4 SAR Report
- B. Uncertainty Analysis
- C. Calibration certificate

# 1. General Information

## 1.1 Testing Laboratory

SGS Testing Korea Co., Ltd.  
 Wireless Div. 2FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040  
 Telephone : +82 +31 428 5700  
 FAX : +82 +31 427 2371  
 Homepage : [www.kr.sgs.com/ee](http://www.kr.sgs.com/ee)

## 1.2 Details of Manufacturer

Manufacturer : ATID CO.,Ltd  
 Address : 1210 Byuksan/Gyungin digital valley II #481-10 Gasan-Dong  
 Gumchon-Gu Seoul, Korea  
 Contact Person : Bong ki Song  
 Phone No. : 82-2-544-1436

## 1.3 Version of Report

Version Number	Date	Revision
00	2011-07-08	Initial issue
01	2011-07-26	Revision 01

## 1.4 Description of EUT(s)

<b>EUT Type</b>	: Industrial PDA
<b>Model</b>	: ALH-9001 (Additional name : ALH-9001-EMA, Si203)
<b>Serial Number</b>	: N/A
<b>Mode of Operation</b>	: GSM850, PCS1900, WCDMA V, WCDMA II, WLAN, Bluetooth
<b>Duty Cycle</b>	: 8(GSM), 8(GPRS 1Tx Slot), 4(GPRS 2 Tx Slot), 1(WCDMA), 1(WLAN)
<b>Body worn Accessory</b>	: None
<b>Tx Frequency Range</b>	: 824.2 MHz ~ 848.8 MHz (GSM850) 1850.2 MHz ~ 1909.8 MHz (PCS1900) 826.4 MHz ~ 846.6 MHz (WCDMA V) 1852.4 MHz ~ 1907.6 MHz (WCDMA II) 2412 MHz ~ 2462 MHz (WLAN) 2402 MHz ~ 2480 MHz (Bluetooth)
<b>Conducted Max Power</b>	: 32.34 dBm(GSM850), 30.05 dBm(PCS1900), 26.00 dBm(WCDMA V), 25.92 dBm(WCDMA II) 16.87 dBm(WLAN), 5.12 dBm(Bluetooth)
<b>Battery Type</b>	: 3.7 V d.c. (Lithium-ion Battery)

### 1.5 Test Environment

Ambient temperature	: (22 ± 2) ° C
Tissue Simulating Liquid	: (22 ± 2) ° C
Relative Humidity	: (55 ± 5) % R.H.

### 1.6 Operation Configuration

The device in GSM and WCDMA mode was controlled by using a Communication tester (CMU 200). Communication between the device and the tester was established by air link. And the client provided a special driver and test program which can control the frequency and power of the WLAN module. Measurements were performed at the lowest, middle and highest channels of the operating band. The EUT was set to maximum power level during all tests and at the beginning of each test the battery was fully charged.

The DASY4 system measures power drift during SAR testing by comparing e-field in the same location at the beginning and at the end of measurement.

## 1.7 EVALUATION PROCEDURES

### - Power Reference Measurement Procedures

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties (for example, 2.7 mm for an ET3DV6 probe type).

- The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan.
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1 g and 10 g.

The probe is calibrated at the center of the dipole sensors that is located 1 mm to 2.7 mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1 % for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with

relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1 g and 10 g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30x30x30mm contains about 30 g of tissue. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1 g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

### 1.8 The SAR Measurement System

A photograph of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system ( Speag Dasy 4 professional system ). A Model ET3DV6 1782 E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation  $SAR = \sigma (|E_i|^2) / \rho$  where  $\sigma$  and  $\rho$  are the conductivity and mass density of the tissue-simulant. The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimeter probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

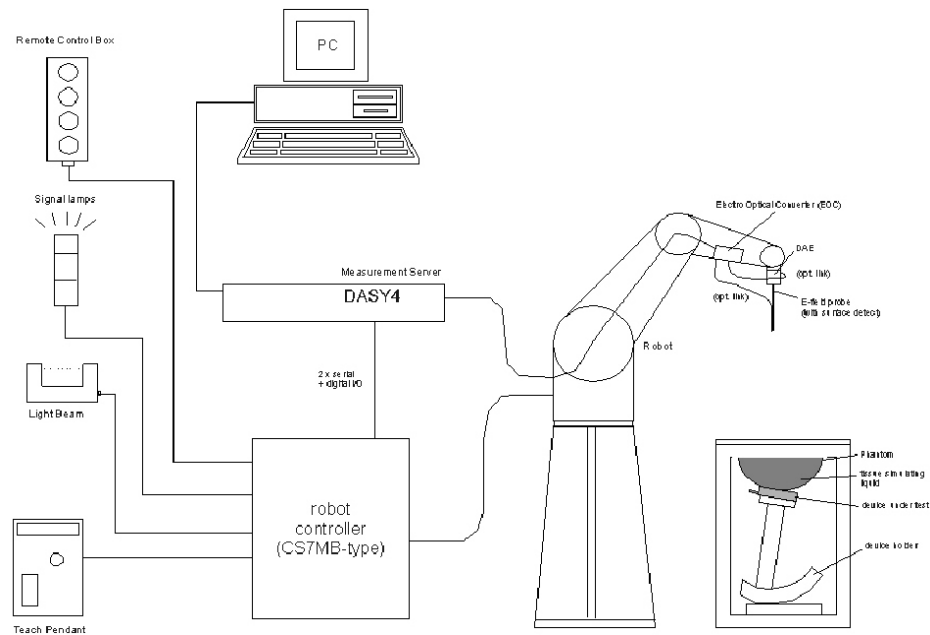



Fig a. The microwave circuit arrangement used for SAR system verification

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing body usage.
- The device holder for flat phantom.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

## 1.9 System Components

### ET3DV6 E-Field Probe

<b>Construction</b>	: Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g. glycol).
<b>Calibration</b>	: In air from 10 MHz to 2.5 GHz In brain simulating tissue (accuracy $\pm 8\%$ )
<b>Frequency</b>	: 10 MHz to >6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 3 GHz)
<b>Directivity</b>	: $\pm 0.2$ dB in brain tissue (rotation around probe axis) $\pm 0.4$ dB in brain tissue (rotation normal to probe axis)
<b>Dynamic Range</b>	: $5 \mu\text{W/g}$ to $>100 \text{ mW/g}$ ; Linearity: $\pm 0.2$ dB
<b>Srfce. Detect</b>	: $\pm 0.2$ mm repeatability in air and clear liquids over diffuse reflecting surfaces
<b>Dimensions</b>	: Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
<b>Application</b>	: General dosimetry up to 3 GHz Compliance tests of mobile phone

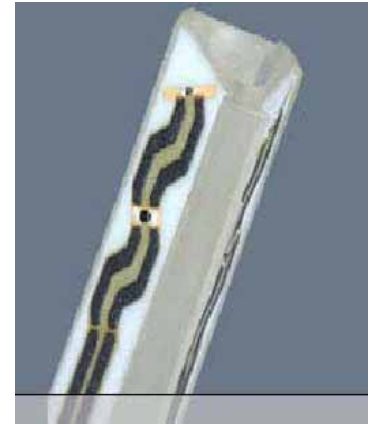

ET3DV6 E-Field Probe

#### NOTE:

1. The Probe parameters have been calibrated by the SPEAG. Please reference "APPENDIX D" for the Calibration Certification Report.



### SAM Phantom

**Construction:** The SAM Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90 % of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot



SAM Phantom

**Shell Thickness:** 2.0 mm  $\pm$  0.1 mm

**Filling Volume:** Approx. 25 liters

### DEVICE HOLDER

**Construction** In combination with the Twin SAM PhantomV4.0/V4.0C or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Device Holder

### 1.10 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within  $\pm 10\%$  from the target SAR values. These tests were done at 835 MHz, 1900 MHz and 2450 MHz. The tests for EUT were conducted within 24 hours after each validation. The obtained results from the system accuracy verification are displayed in the table 1. During the tests, the ambient temperature of the laboratory was in the range  $(22 \pm 2)^\circ\text{C}$ , the relative humidity was in the range  $(55 \pm 5)\%$  R.H. and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

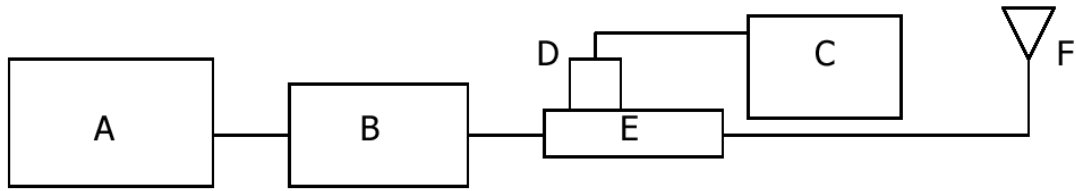


Fig b. The microwave circuit arrangement used for SAR system verification

- A. Agilent Model E4421B Signal Generator
- B. EMPOWER Model 2057-BBS3Q5KCK Amplifier
- C. Agilent Model E4419B Power Meter
- D. Agilent Model 9300H Power Sensor
- E. Agilent Model 777D/778D Dual directional coupling
- F. Reference dipole Antenna



Photo of the dipole Antenna

### System Validation Results

Validation Kit	Tissue	Target SAR 1 g from Calibration Certificate (Normalized to 1 W)	Measured SAR 1 g (Normalized to 1 W)	Deviation (%)	Date	Liquid Temp. (°C)
D835V2 S/N: 490	835 MHz Brain	9.62 W/kg	<b>9.44 W/kg</b>	<b>-1.87</b>	2011-07-03	22.2
D835V2 S/N: 490	835 MHz Body	9.84 W/kg	<b>10.04 W/kg</b>	<b>2.03</b>	2011-07-03	22.2
D1900V2 S/N: 5d033	1900 MHz Brain	39.40 W/kg	<b>39.76 W/kg</b>	<b>0.91</b>	2011-07-04	22.1
D1900V2 S/N: 5d033	1900 MHz Body	41.30 W/kg	<b>41.20 W/kg</b>	<b>-0.24</b>	2011-07-04	22.1
D2450V2 S/N: 734	2450 MHz Brain	51.70 W/kg	<b>49.60 W/kg</b>	<b>-4.06</b>	2011-07-02	22.2
D2450V2 S/N: 734	2450 MHz Body	53.50 W/kg	<b>52.40 W/kg</b>	<b>-2.06</b>	2011-07-02	22.2

Table 1. Results system validation

### 1.11 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this simulant fluid were measured by using the Agilent Model 85070D Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Agilent E5070B Network Analyzer(300 KHz - 3 GHz ) by using a procedure detailed in Section V.

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			Permittivity	Conductivity	Simulated Tissue Temp( )
835	Head	Measured, 2011-07-03	<b>41.8</b>	<b>0.90</b>	<b>22.2</b>
		Recommended Limits	41.5	0.90	21.0 ~ 23.0
		Deviation(%)	-0.72	0	-
	Body	Measured, 2011-07-03	<b>57.0</b>	<b>0.95</b>	<b>22.2</b>
		Recommended Limits	55.2	0.97	21.0 ~ 23.0
		Deviation(%)	3.26	-2.06	-
1900	Head	Measured, 2011-07-04	<b>38.3</b>	<b>1.41</b>	<b>22.1</b>
		Recommended Limits	40.0	1.40	21.0 ~ 23.0
		Deviation(%)	-4.25	0.71	-
	Body	Measured, 2011-07-04	<b>51.3</b>	<b>1.55</b>	<b>22.1</b>
		Recommended Limits	53.3	1.52	21.0 ~ 23.0
		Deviation(%)	-3.75	1.97	-
2450	Head	Measured, 2011-07-02	<b>38.8</b>	<b>1.82</b>	<b>22.2</b>
		Recommended Limits	39.2	1.80	21.0 ~ 23.0
		Deviation(%)	-0.10	1.11	-
	Body	Measured, 2011-07-02	<b>52.3</b>	<b>2.01</b>	<b>22.2</b>
		Recommended Limits	52.7	1.95	21.0 ~ 23.0
		Deviation(%)	-0.075	3.08	-

The composition of the brain tissue simulating liquid

*The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.*

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99<sup>+</sup>% Pure Sodium Chloride

Sugar: 98<sup>+</sup>% Pure Sucrose

Water: De-ionized, 16 MΩ<sup>+</sup> resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99<sup>+</sup>% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

### 1.12 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (“SAR”) in Section 4.2 of “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz,” ANSI/IEEE C95.3–2003, Copyright 2003 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in “Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields,” NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the

frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

(1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube). Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

(2) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.(Table .4)

<b>Human Exposure</b>	<b>Uncontrolled Environment General Population</b>	<b>Controlled Environment Occupational</b>
<b>Partial Peak SAR</b> (Partial)	1.60 m W/g	8.00 m W/g
<b>Partial Average SAR</b> (Whole Body)	0.08 m W/g	0.40 m W/g
<b>Partial Peak SAR</b> (Hands/Feet/Ankle/Wrist)	4.00 m W/g	20.00 m W/g

Table .4 RF exposure limits

## 2. Instruments List

Manufacturer	Device	Type	Serial Number	Due date of Calibration
Stäubli	Robot	RX90BL	F03/5W05A1/A/01	N/A
Schmid& Partner Engineering AG	Dosimetric E-Field Probe	ET3DV6	1782	April 14, 2012
Schmid& Partner Engineering AG	835 MHz System Validation Dipole	D835V2	490	May 21, 2012
Schmid& Partner Engineering AG	1900 MHz System Validation Dipole	D1900V2	5d033	May 26, 2012
Schmid& Partner Engineering AG	2450 MHz System Validation Dipole	D2450V2	734	May 27, 2012
Schmid& Partner Engineering AG	Data acquisition Electronics	DAE3	567	January 27, 2012
Schmid& Partner Engineering AG	Software	DASY 4 V4.7	-	N/A
Schmid& Partner Engineering AG	Phantom	SAM Phantom V4.0	TP-1299 TP-1300	N/A
Agilent	Network Analyzer	E5070B	MY42100282	March 31, 2012
Agilent	Dielectric Probe Kit	85070D	2184	N/A
Agilent	Power Meter	E4419B	GB43311126	September 28, 2011
Agilent	Power Sensor	E9300H	MY41495307	October 01, 2011
			MY41495308	October 01, 2011
Agilent	Signal Generator	E4421B	MY43350132	September 28, 2011
Empower RF Systems	Power Amplifier	2057-BBS3Q5KCK	1003 D/C 0344	April 06, 2012
Empower RF Systems	Power Amplifier	2001-BBS3Q7ECK	1032 D/C 0336	April 01, 2012
Agilent	Dual Directional Coupler	777D 778D	50128 50454	September 28, 2011
Microlab	LP Filter	LA-15N LA-30N	N/A	October 01, 2011
R&S	Mobile Test Unit	CMU 200	109495	September 29, 2011

## 3. Summary of Results

### FCC Power Measurement Procedures

Power measurements were performed using a base station simulator under digital average power.

The handset was placed into a simulated call using a base station simulator in shielded chamber. SAR measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator. The SAR measurement Software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5 % occurred, the tests were repeated.

### RF Conducted Power

#### GSM

	Channel	Frequency(MHz)	Conducted Power(dBm)				
			GSM	GPRS			
				1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
GSM 850 Band	128	824.2	32.34	32.11	32.09		
	190	836.6	32.21	32.00	31.98		
	251	848.8	32.23	32.02	32.01		
PCS 1900 Band	512	1850.2	29.81	29.25	29.24		
	661	1880.0	30.05	29.43	29.41		
	810	1909.8	29.93	29.31	29.30		

#### Bluetooth

Mode (Data Rate)	Average Power(dBm)		
	Low	Mid	High
GFSK	4.66	4.53	5.12
8DPSK	3.03	2.88	3.54

#### WLAN

##### 802.11b

Data Rate(Mbps)	Low Channel	Mid Channel	High Channel
1	16.87	16.42	16.58
2	16.82	16.43	16.55
5.5	16.76	16.39	16.58
11	16.80	16.38	16.60

##### 802.11g

Data Rate (Mbps)	Low Channel	Mid Channel	High Channel
6	16.27	16.58	15.67
9	16.22	16.53	15.60
12	16.20	16.55	15.59
18	16.27	16.57	15.64
24	16.15	16.40	15.67
36	16.05	16.36	15.40
48	15.98	16.34	15.37
54	15.82	16.33	15.33

**WCDMA V**

Band	Mode	Channel	Frequency(MHz)	Conducted Power(dBm)		
WCDMA V (RMC)	RMC	4132	826.4	25.93		
	RMC	4183	836.6	26.00		
	RMC	4233	846.6	25.95		
WCDMA V (HSDPA Active)	Sub-test 1	4132	826.4	25.91		
		4183	836.6	25.98		
		4233	846.6	25.94		
	Sub-test 2	4132	826.4	25.90		
		4183	836.6	25.96		
		4233	846.6	25.92		
	Sub-test 3	4132	826.4	25.88		
		4183	836.6	25.94		
		4233	846.6	25.91		
	Sub-test 4	4132	826.4	25.87		
		4183	836.6	25.93		
		4233	846.6	25.90		
			<b>c</b>	<b>d</b>	<b>ACK, NACK, CQI</b>	<b>AGV</b>
	Sub-test 1	2	15	8	-	
	Sub-test 2	12	15	8	-	
	Sub-test 3	15	8	8	-	
Sub-test 4	15	4	8	-		

**WCDMA II**

Band	Mode	Channel	Frequency(MHz)	Conducted Power(dBm)		
WCDMA II (RMC)	RMC	9262	1852.4	25.43		
	RMC	9400	1880.0	25.92		
	RMC	9538	1907.6	25.51		
WCDMA II (HSDPA Active)	Sub-test 1	9262	1852.4	25.41		
		9400	1880.0	25.90		
		9538	1907.6	25.50		
	Sub-test 2	9262	1852.4	25.40		
		9400	1880.0	25.88		
		9538	1907.6	25.47		
	Sub-test 3	9262	1852.4	25.36		
		9400	1880.0	25.87		
		9538	1907.6	25.46		
	Sub-test 4	9262	1852.4	25.35		
		9400	1880.0	25.42		
		9538	1907.6	25.34		
			<b>c</b>	<b>d</b>	<b>ACK, NACK, CQI</b>	<b>AGV</b>
	Sub-test 1	2	15	8	-	
	Sub-test 2	12	15	8	-	
	Sub-test 3	15	8	8	-	
Sub-test 4	15	4	8	-		



## KDB 648474 D01 SAR Handsets Multi Xmitter and Ant v01r05 \_Sept. 2008

### Summary of SAR Evaluation Requirements for Cell Phone with Multiple Transmitters

These procedures were followed according to KDB 648474 document “SAR Handsets Multi Xmitter and Ant v01r05”, September 2008. The procedures are applicable to phones with built-in unlicensed transmitters, such as 802.11 a/b/g and Bluetooth devices.

#### <Output Power Thresholds for Unlicensed Transmitters>

	2.45	5.15 - 5.35	5.47 - 5.85	GHz
$P_{Ref}$	12	6	5	mW
Device output power should be rounded to the nearest mW to compare with values specified in this table.				

#### <SAR Evaluation Requirements for Cellphones with Multiple Transmitters>


	Individual Transmitter	Simultaneous Transmission
<b>Licensed Transmitters</b>	<u>Routine evaluation required</u>	<b>SAR not required:</b> <b>Unlicensed only</b>
<b>Unlicensed Transmitters</b>	<p><b>When there is no simultaneous transmission –</b></p> <ul style="list-style-type: none"> <li>output <math>\leq 60</math>f: SAR not required</li> <li>output <math>&gt; 60</math>f: stand-alone SAR required</li> </ul> <p><b>When there is simultaneous transmission –</b> <u>Stand-alone SAR not required when</u></p> <ul style="list-style-type: none"> <li>output <math>\leq 2 \cdot P_{Ref}</math> and antenna is <math>\geq 5.0</math> cm from other antennas</li> <li>output <math>\leq P_{Ref}</math> and antenna is <math>\geq 2.5</math> cm from other antennas</li> <li>output <math>\leq P_{Ref}</math> and antenna is <math>&lt; 2.5</math> cm from other antennas, each with either output power <math>\leq P_{Ref}</math> or 1-g SAR <math>&lt; 1.2</math> W/kg</li> </ul> <p><u>Otherwise stand-alone SAR is required</u></p> <p><b>When stand-alone SAR is required</b></p> <ul style="list-style-type: none"> <li>test SAR on highest output channel for each wireless mode and exposure condition</li> <li>if SAR for highest output channel is <math>&gt; 50\%</math> of SAR limit, evaluate all channels according to normal procedures</li> </ul>	<ul style="list-style-type: none"> <li>when stand-alone 1-g SAR is not required and antenna is <math>\geq 5</math> cm from other antennas</li> </ul> <p><b>Licensed &amp; Unlicensed</b></p> <ul style="list-style-type: none"> <li>when the sum of the 1-g SAR is <math>&lt; 1.6</math> W/kg for all simultaneous transmitting antennas</li> <li>when SAR to peak location separation ratio of simultaneous transmitting antenna pair is <math>&lt; 0.3</math></li> </ul> <p><b>SAR required:</b> <b>Licensed &amp; Unlicensed</b></p> <p>antenna pairs with SAR to peak location separation ratio <math>\geq 0.3</math>; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition</p> <p><b>Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply</b></p>
<b>Jaw, Mouth and Nose</b>	<p><u>Flat phantom SAR required</u></p> <ul style="list-style-type: none"> <li>when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues</li> <li>position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations</li> </ul>	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.

<KDB 648474 Simultaneous SAR evaluation>

Mode (f)	P (dBm)	P (mW)	Stand-alone SAR
GSM 850	32.34	1713.96	Yes
PCS 1900	30.05	1011.58	Yes
WCDMA II	25.92	390.84	Yes
WCDMA V	26.00	398.11	Yes
WLAN	16.87	48.64	Yes
Bluetooth	5.12	3.25	No

Mode pair	D <sub>xy</sub> (mm)	Part	The sum of all 1g SAR	Simultaneous Tx SAR	Notes
GSM/WCDMA & 802.11 b/g	110	Head	0.792 + 0.123 = <b>0.915</b>	No	d <sub>xy</sub> > 5 cm, the sum of all 1g SAR < 1.6 W/kg
		Body	0.761 + 0.318 = 1.079	No	d <sub>xy</sub> > 5 cm, the sum of all 1g SAR < 1.6 W/kg

\* Please see Antenna distance file for finding all distances.

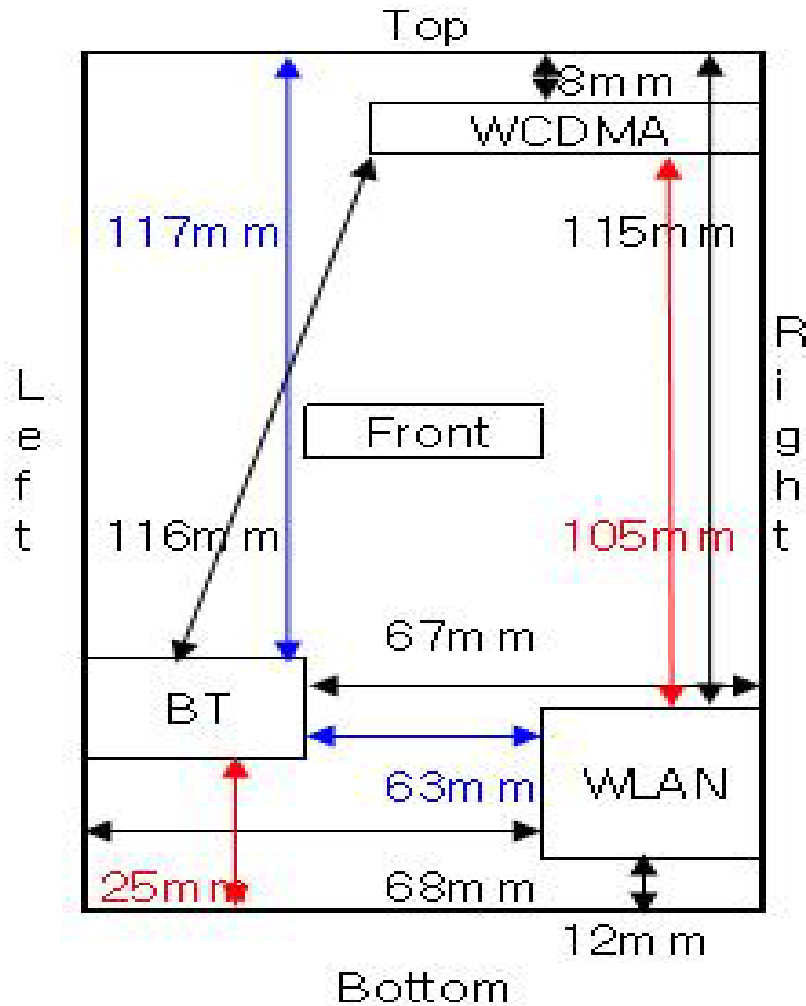

## GSM850 Head SAR

Ambient Temperature (°C)	22.2
Liquid Temperature (°C)	22.2
Date	2011-07-03

Head	EUT Position	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
		Frequency (MHz)	Channel			
Left Ear	Cheek	836.6	190	-0.003	0.619	1.6
	Tilt	836.6	190	0.068	0.585	
Right Ear	Cheek	836.6	190	0.185	0.786	
	Tilt	836.6	190	0.065	<b>0.792</b>	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Liquid tissue depth was at least 15 cm.
5. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.

## GSM850 Body SAR

Ambient Temperature (°C)	22.2
Liquid Temperature (°C)	22.2
Date	2011-07-03

Test Mode	EUT Position	Slot	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
			Frequency (MHz)	Channel			
GPRS	Front	2 Tx	836.6	190	-0.069	<b>0.761</b>	1.6
	Back	2 Tx	836.6	190	0.018	0.455	
	Front	1 Tx	836.6	190	-0.024	0.493	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Liquid tissue depth was at least 15 cm.
5. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.
6. The distance from EUT to flat phantom for testing Body SAR is 15 mm.
7. This model supports GPRS (Class 10) and all Tx (1Tx ~ 2Tx) cases were investigated with the conducted power.

## PCS1900 Head SAR

Ambient Temperature (°C)	22.1
Liquid Temperature (°C)	22.1
Date	2011-07-04

Head	EUT Position	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
		Frequency (MHz)	Channel			
Left Ear	Cheek	1880.0	661	-0.091	0.173	1.6
	Tilt	1880.0	661	-0.047	0.156	
Right Ear	Cheek	1880.0	661	0.195	<b>0.294</b>	
	Tilt	1880.0	661	-0.032	0.280	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Liquid tissue depth was at least 15 cm.
5. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.

## PCS1900 Body SAR

Ambient Temperature (°C)	22.1
Liquid Temperature (°C)	22.1
Date	2011-07-04

Test Mode	EUT Position	Slot	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
			Frequency (MHz)	Channel			
GPRS	Front	2 Tx	1880.0	661	-0.147	0.150	1.6
	Back	2 Tx	1880.0	661	-0.053	<b>0.173</b>	
	Back	1 Tx	1880.0	661	0.024	0.121	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Liquid tissue depth was at least 15 cm.
5. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.
6. The distance from EUT to flat phantom for testing Body SAR is 15 mm.
7. This model supports GPRS (Class 10) and all Tx (1Tx ~ 2Tx) cases were investigated with the conducted power.

## WCDMA V Head SAR

Ambient Temperature (°C)	22.2
Liquid Temperature (°C)	22.2
Date	2011-07-03

Head	EUT Position	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
		Frequency (MHz)	Channel			
Left Ear	Cheek	836.6	4183	0.194	0.529	1.6
	Tilt	836.6	4183	0.120	0.560	
Right Ear	Cheek	836.6	4183	0.032	<b>0.704</b>	
	Tilt	836.6	4183	0.022	0.550	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Liquid tissue depth was at least 15 cm.
5. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.

## WCDMA V Body SAR

Ambient Temperature (°C)	22.2
Liquid Temperature (°C)	22.2
Date	2010-07-03

Test Mode	EUT Position	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
		Frequency (MHz)	Channel			
RMC	Front	836.6	4183	-0.008	<b>0.434</b>	1.6
	Back	836.6	4183	-0.139	0.302	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Liquid tissue depth was at least 15 cm.
5. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.
6. The distance from EUT to flat phantom for testing Body SAR is 15 mm.

(Please refer to the conduction power table Page 15)



## WCDMA II Head SAR

Ambient Temperature (°C)	22.1
Liquid Temperature (°C)	22.1
Date	2011-07-04

Head	EUT Position	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
		Frequency (MHz)	Channel			
Left Ear	Cheek	1880.0	9400	0.071	0.303	1.6
	Tilt	1880.0	9400	-0.005	0.248	
Right Ear	Cheek	1880.0	9400	-0.008	<b>0.487</b>	
	Tilt	1880.0	9400	-0.011	0.441	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Liquid tissue depth was at least 15 cm.
5. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.

## WCDMA II Body SAR

Ambient Temperature (°C)	22.1
Liquid Temperature (°C)	22.1
Date	2011-07-04

Test Mode	EUT Position	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
		Frequency (MHz)	Channel			
RMC	Front	1880.0	9400	0.084	0.164	1.6
	Back	1880.0	9400	0.024	<b>0.219</b>	

<Note>

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Liquid tissue depth was at least 15 cm.
5. Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.
6. The distance from EUT to flat phantom for testing Body SAR is 15 mm.

(Please refer to the conduction power table Page 15)

## WLAN Head SAR

Ambient Temperature (°C)	22.2
Liquid Temperature (°C)	22.2
Date	2011-07-02

Head	Test Mode	EUT Position	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
			Frequency (MHz)	Channel			
Left Ear	11b	Cheek	2412	1	-0.011	<b>0.123</b>	1.6
	11b	Cheek	2437	6	-0.181	0.109	
	11b	Cheek	2462	11	0.020	0.110	
	11b	Tilt	2437	6	0.157	0.030	
Right Ear	11b	Cheek	2437	6	-0.165	0.054	
	11b	Tilt	2437	6	-0.172	0.023	

<Note>

- The test data reported are the worst-case SAR value with the position set in a typical configuration.
- All modes of operation were investigated, and worst-case results are reported.
- Battery is fully charged for all readings and the standard batteries are the only options.
- Liquid tissue depth was at least 15 cm.
- Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek, tilt) is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.
- WLAN could be used for data transmission during voice communication at the same time.
- KDB 248227 <SAR Measurement Procedures for 802.11 a/b/g Transmitters>
  - Channel 1, 6 and 11 were tested by the definition of “default test channels”.
  - Highest average RF output power channel for the lowest data rate were selected for SAR evaluation. Other mode were not tested since the average output powers were not greater than 0.25 dB than that of the corresponding channel in the lowest data rate IEEE 802.11b mode.
- WLAN transmission was verified using a spectrum analyzer.

## WLAN Body SAR

Ambient Temperature (°C)	22.2
Liquid Temperature (°C)	22.2
Date	2011-07-02

Body	Test Mode	EUT Position	Traffic Channel		Power Drift(dB)	1 g SAR (W/kg)	1 g SAR Limits (W/kg)
			Frequency (MHz)	Channel			
Body	11b	Front	2412	1	0.029	<b>0.270</b>	1.6
	11b	Front	2437	6	-0.198	0.210	
	11b	Front	2462	11	-0.169	0.318	
	11b	Back	2437	6	0.133	0.012	

<Note>

- The test data reported are the worst-case SAR value with the position set in a typical configuration.
- All modes of operation were investigated, and worst-case results are reported.
- Battery is fully charged for all readings and the standard batteries are the only options.
- Liquid tissue depth was at least 15 cm.
- Justification for reduced test configuration : Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration is at least 3.0 dB lower than the SAR limit, testing at the high and low channel is optional for such test configurations.
- The distance from EUT to flat phantom for testing Body SAR is 15 mm.
- KDB 248227 <SAR Measurement Procedures for 802.11 a/b/g Transmitters>
  - Channel 1, 6 and 11 were tested by the definition of “default test channels”.
  - Highest average RF output power channel for the lowest data rate were selected for SAR evaluation. Other mode were not tested since the average output powers were not greater than 0.25 dB than that of the corresponding channel in the lowest data rate IEEE 802.11b mode.
- WLAN transmission was verified using a spectrum analyzer.

## Appendix

### List

Appendix A	DASY4 Report (Plots of the SAR Measurements)	- 835 MHz, 1900 MHz, 2450 MHz Validation Test - GSM850 Test - PCS1900 Test - WCDMA V Test - WCDMA II Test - WLAN Test
Appendix B	Uncertainty Analysis	
Appendix C	Calibration Certificate	- PROBE - DAE - DIPOLE



Report File No. : F690501/RF-SAR001947-A1  
Date of Issue : 2011-07-26  
Page : 30 / 133

## **Appendix A**

### **Test Plot - DASY4 Report**

## 835 MHz Validation Test\_Head

Date: 2011-07-03

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [Validation 835 MHz\\_Head.da4](#)

Input Power : 250 mW

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:490**  
**Program Name: Validation 835 MHz\_Head**


Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.903 \text{ mho/m}$ ;  $\epsilon_r = 41.8$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(6.22, 6.22, 6.22); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP\_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Validation 835 MHz\_Head/Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 2.57 mW/g

**Validation 835 MHz\_Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 55.4 V/m; Power Drift = -0.021 dB  
 Peak SAR (extrapolated) = 3.50 W/kg  
**SAR(1 g) = 2.36 mW/g; SAR(10 g) = 1.53 mW/g**  
 Maximum value of SAR (measured) = 2.56 mW/g

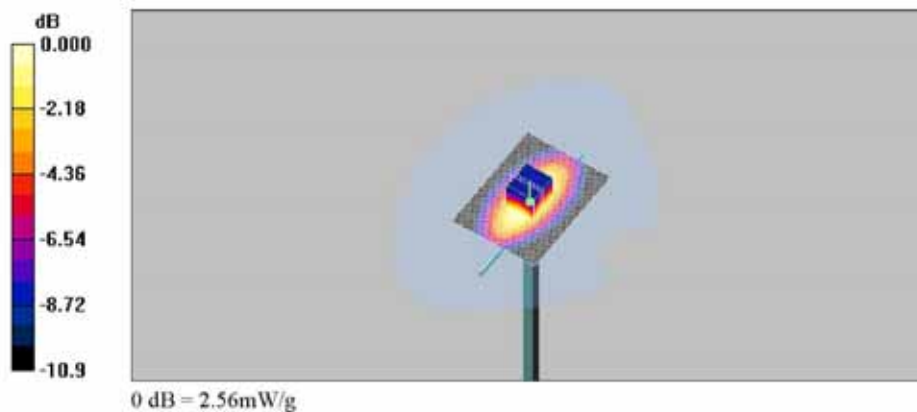

### Z Scan

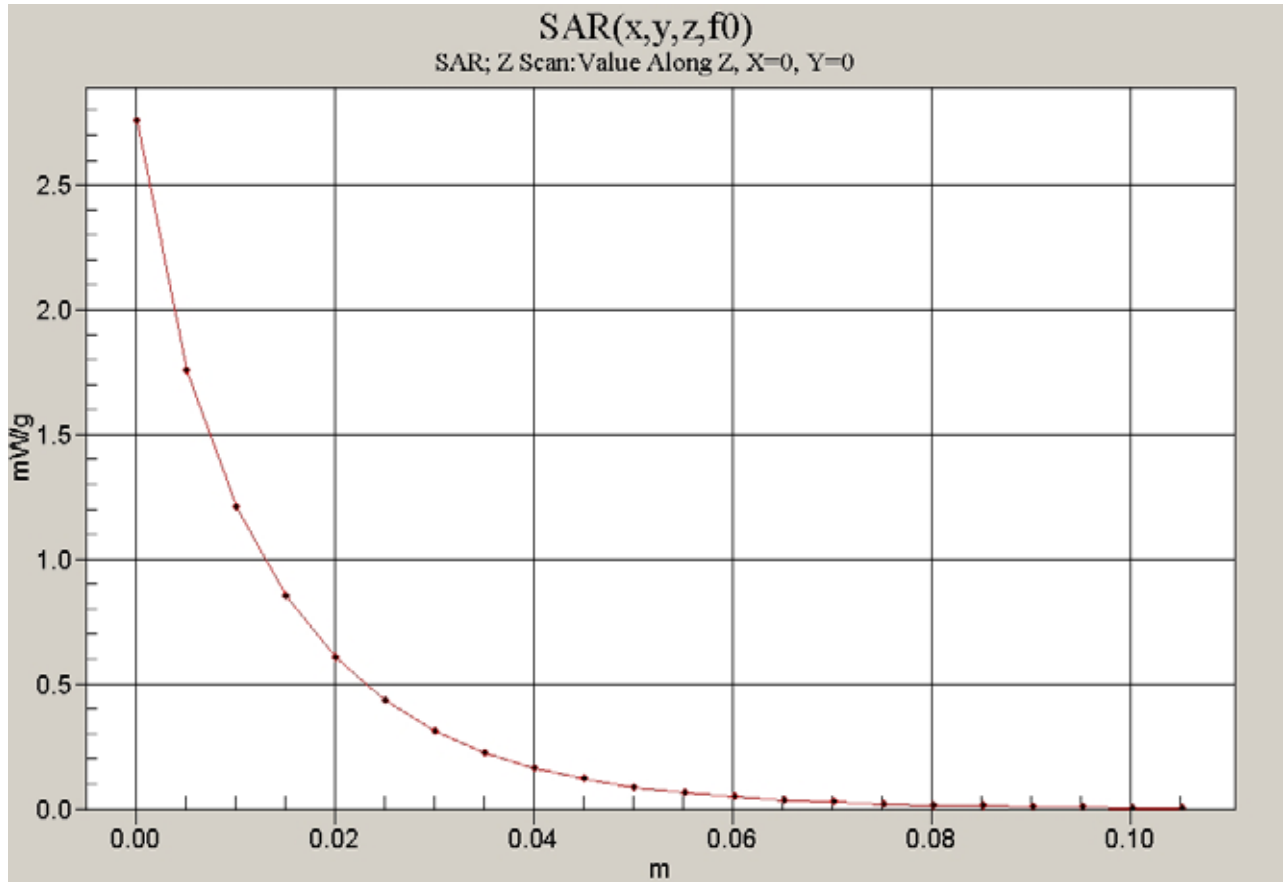



## 835 MHz Validation Test\_Body

Date: 2011-07-03

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [Validation 835 MHz\\_Body.da4](#)

Input Power : 250 mW

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:490**  
**Program Name: Validation 835 MHz\_Body**


Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.952 \text{ mho/m}$ ;  $\epsilon_r = 57$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(6.03, 6.03, 6.03); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP\_900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Validation 835 MHz\_Body/Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 2.71 mW/g

**Validation 835 MHz\_Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 55.2 V/m; Power Drift = -0.037 dB  
 Peak SAR (extrapolated) = 3.64 W/kg  
**SAR(1 g) = 2.51 mW/g; SAR(10 g) = 1.65 mW/g**  
 Maximum value of SAR (measured) = 2.72 mW/g

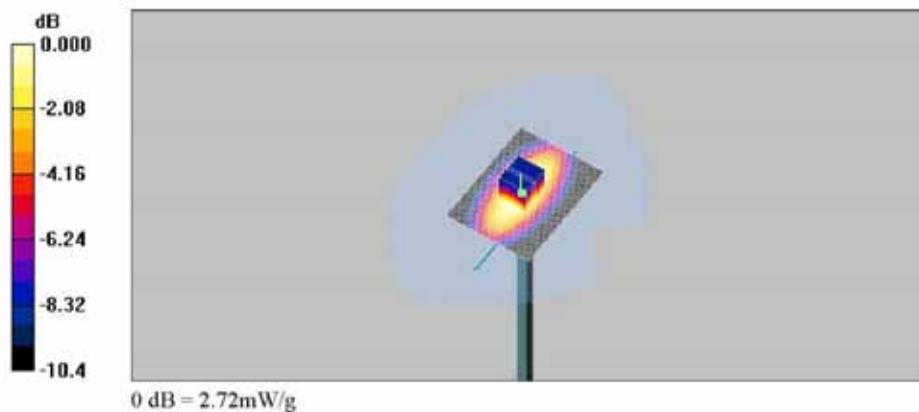

### Z Scan

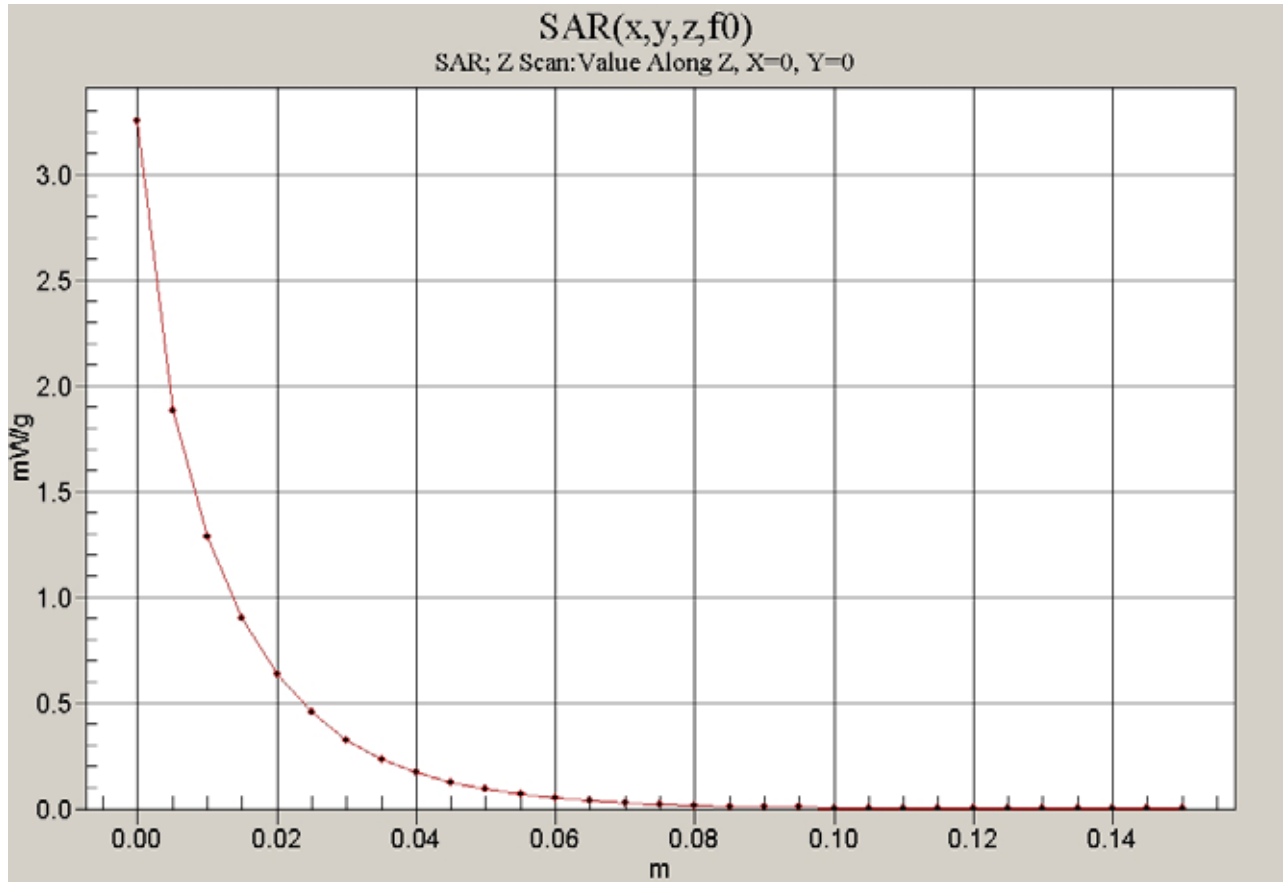

## 1900 MHz Validation Test\_Head

Date: 2011-07-04

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [Validation 1900 MHz\\_Head.da4](#)

Input Power : 250 mW

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d033**  
**Program Name: Validation 1900 MHz\_Head**


Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 38.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(4.95, 4.95, 4.95); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Validation 1900 MH\_Head/Area Scan (61x71x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 12.4 mW/g

**Validation 1900 MH\_Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 93.0 V/m; Power Drift = -0.047 dB  
 Peak SAR (extrapolated) = 17.9 W/kg  
**SAR(1 g) = 9.94 mW/g; SAR(10 g) = 5.08 mW/g**  
 Maximum value of SAR (measured) = 11.3 mW/g

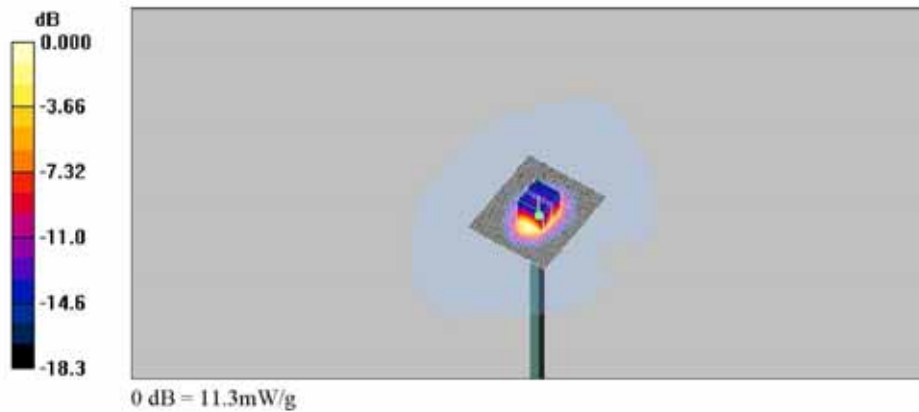

### Z Scan

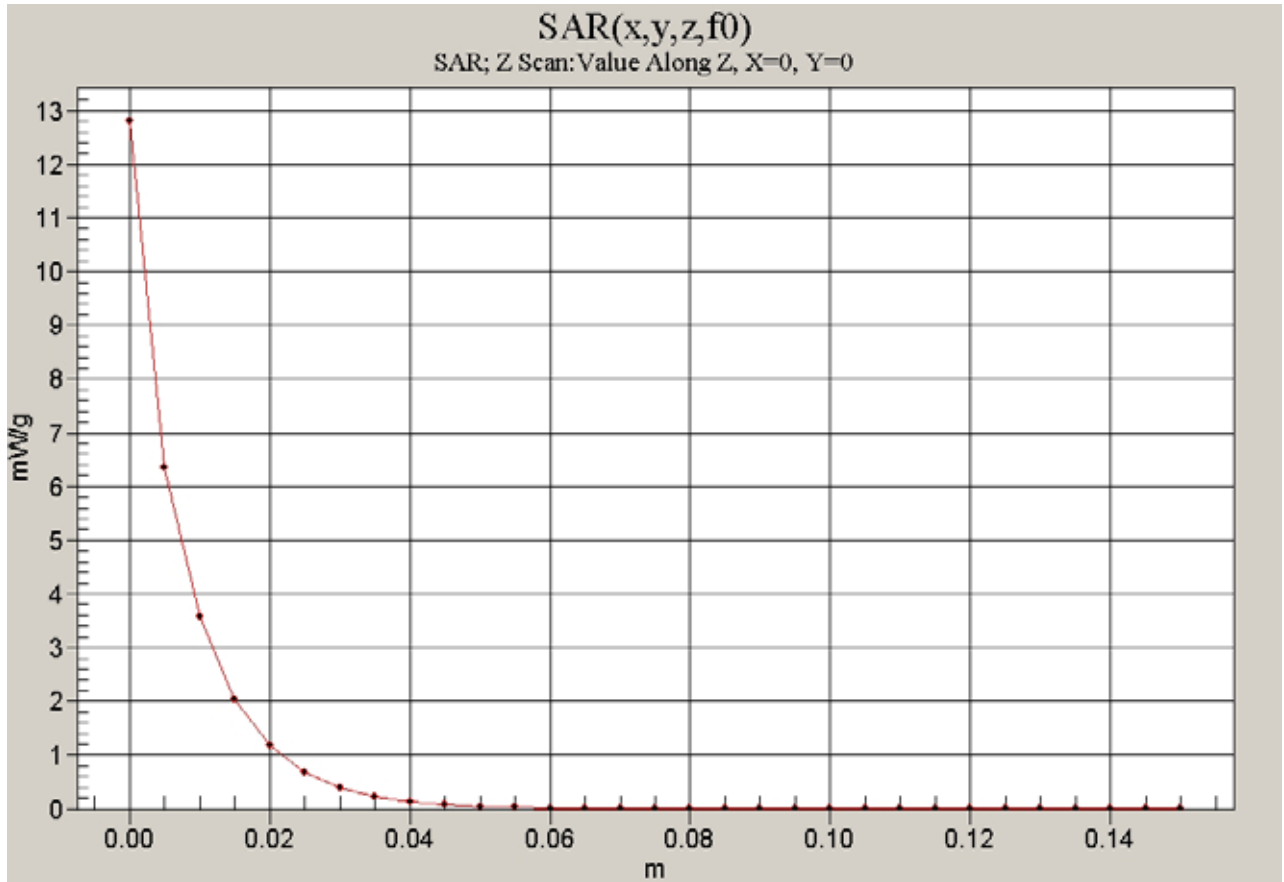

## 1900 MHz Validation Test\_Body

Date: 2011-07-04

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [Validation 1900 MHz\\_Body.da4](#)

Input Power : 250 mW

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d033**  
**Program Name: Validation 1900 MHz\_Body**


Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 51.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(4.34, 4.34, 4.34); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Validation 1900 MH\_Body/Area Scan (61x71x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 12.9 mW/g

**Validation 1900 MH\_Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 90.7 V/m; Power Drift = -0.044 dB  
 Peak SAR (extrapolated) = 17.9 W/kg  
**SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.28 mW/g**  
 Maximum value of SAR (measured) = 11.7 mW/g

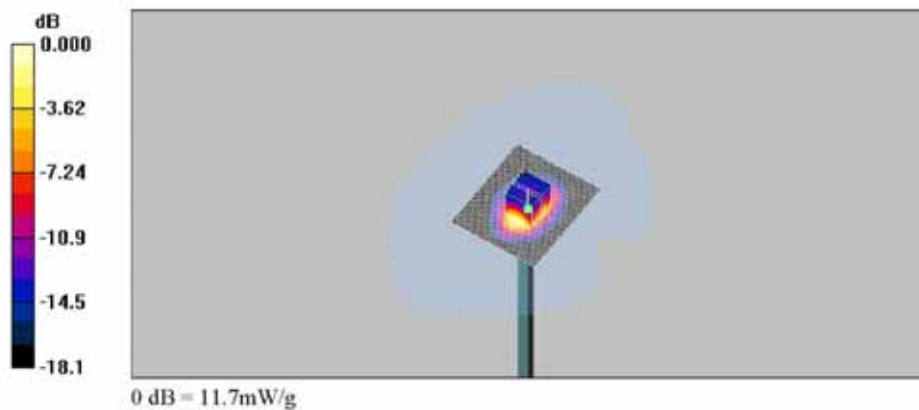

## Z Scan

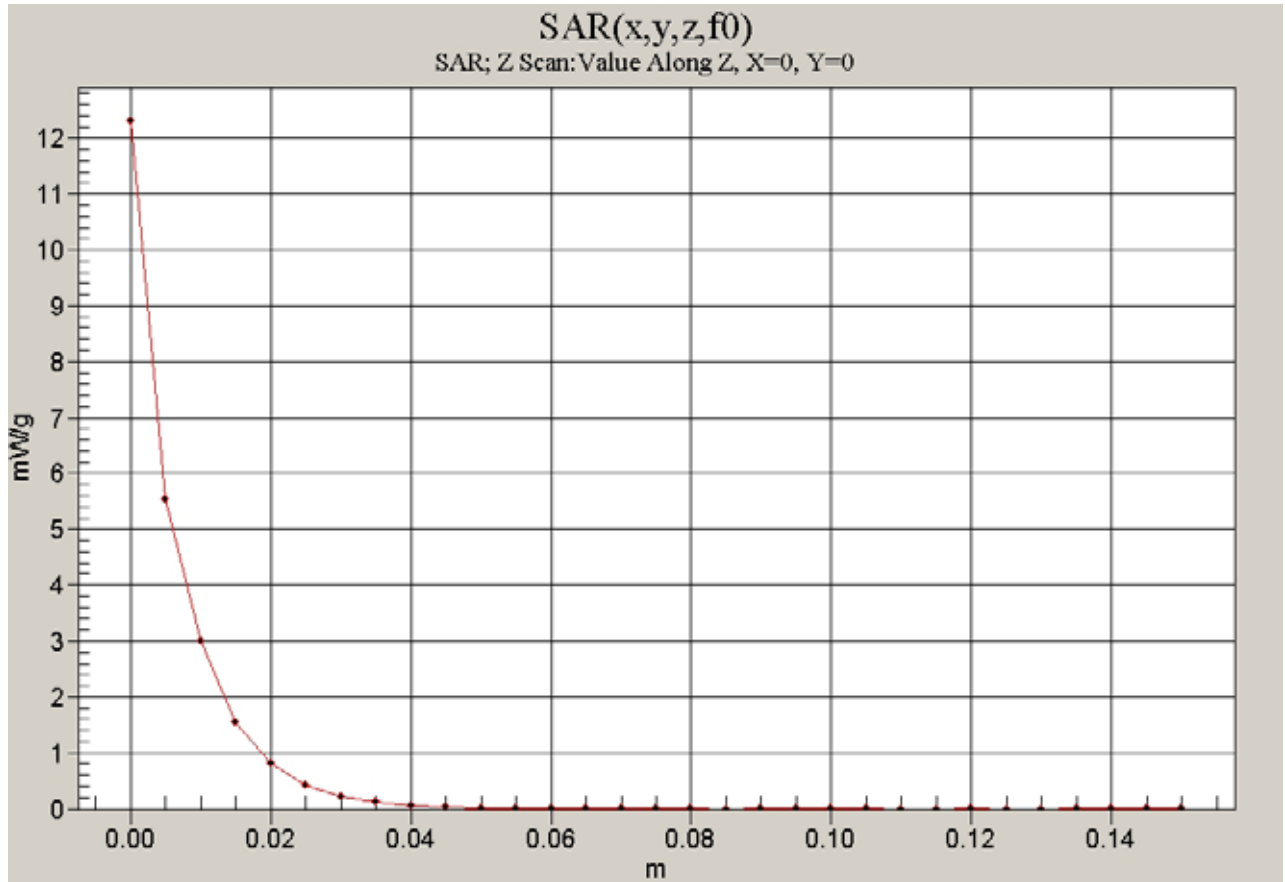

## 2450 MHz Validation Test\_Head

Date: 2011-07-02

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [Validation 2450 MHz\\_Head.da4](#)

Input Power : 250 mW

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:734**  
**Program Name: Validation 2450 MHz\_Head**


Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.82$  mho/m;  $\epsilon_r = 38.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(4.37, 4.37, 4.37); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Validation 2450 MHz/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 13.9 mW/g

**Validation 2450 MHz/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 92.2 V/m; Power Drift = -0.066 dB  
 Peak SAR (extrapolated) = 30.3 W/kg  
**SAR(1 g) = 12.4 mW/g; SAR(10 g) = 5.35 mW/g**  
 Maximum value of SAR (measured) = 13.8 mW/g

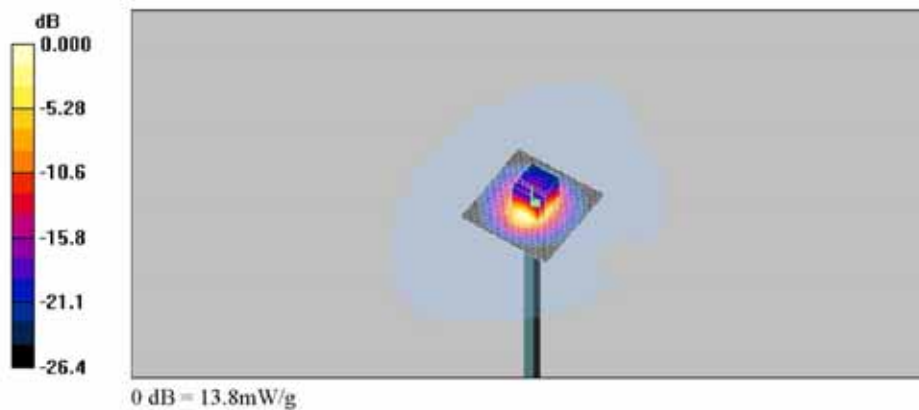

### Z Scan

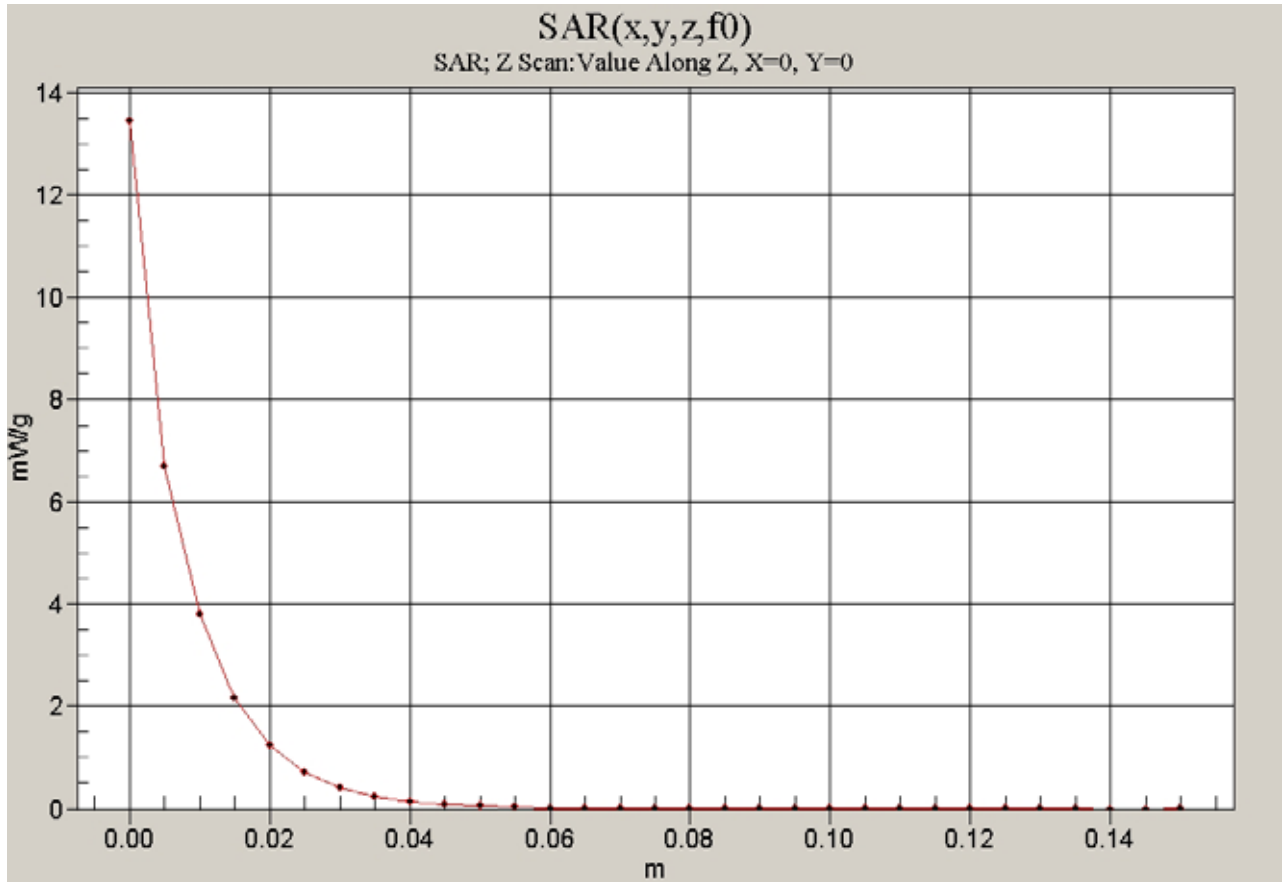



## 2450 MHz Validation Test\_Body

Date: 2011-07-02

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [Validation 2450 MHz\\_Body.da4](#)

Input Power : 250 mW

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:734**  
**Program Name: Validation 2450 MHz\_Body**


Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.01$  mho/m;  $\epsilon_r = 52.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(3.94, 3.94, 3.94); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Validation 2450 MHz/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 14.4 mW/g

**Validation 2450 MHz/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 85.9 V/m; Power Drift = -0.029 dB  
 Peak SAR (extrapolated) = 36.1 W/kg  
**SAR(1 g) = 13.1 mW/g; SAR(10 g) = 5.57 mW/g**  
 Maximum value of SAR (measured) = 14.2 mW/g

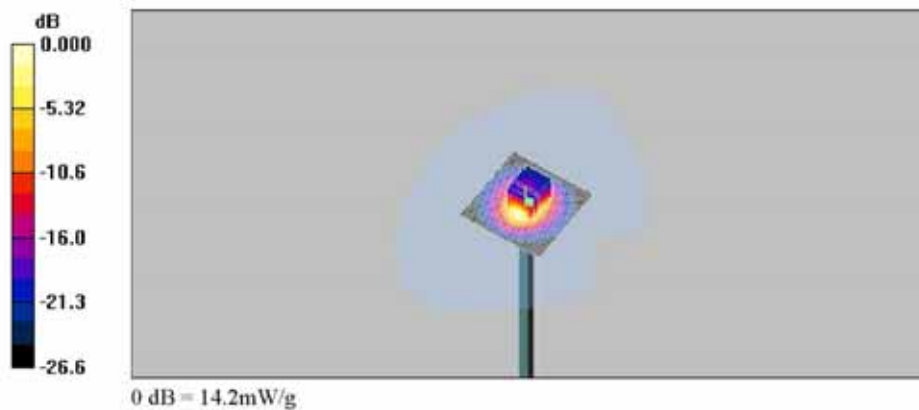

### Z Scan

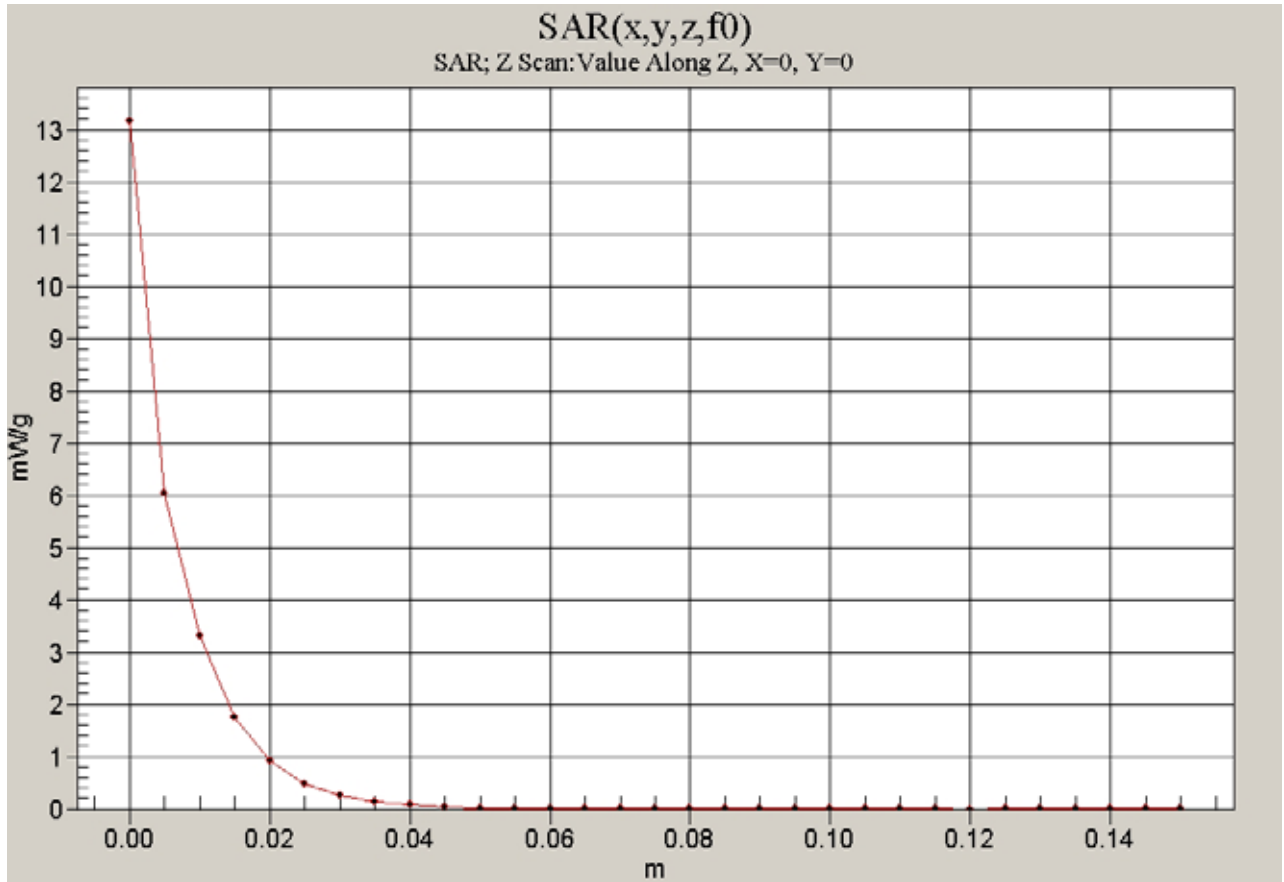

## GSM 850 Head SAR Test

Date: 2011-07-03

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [GSM850\\_LE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: GSM850\_Head**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8  
 Medium parameters used (interpolated):  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.905 \text{ mho/m}$ ;  $\epsilon_r = 41.8$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.22, 6.22, 6.22); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP 900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**GSM850\_LE\_Mid\_Cheek/Area Scan (71x91x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.691 mW/g

**GSM850\_LE\_Mid\_Cheek/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 23.0 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 1.73 W/kg

**SAR(1 g) = 0.593 mW/g; SAR(10 g) = 0.293 mW/g**

Maximum value of SAR (measured) = 0.635 mW/g


**GSM850\_LE\_Mid\_Cheek/Zoom Scan (7x7x7)/Cube 1:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 23.0 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 0.904 W/kg

**SAR(1 g) = 0.619 mW/g; SAR(10 g) = 0.416 mW/g**

Maximum value of SAR (measured) = 0.666 mW/g

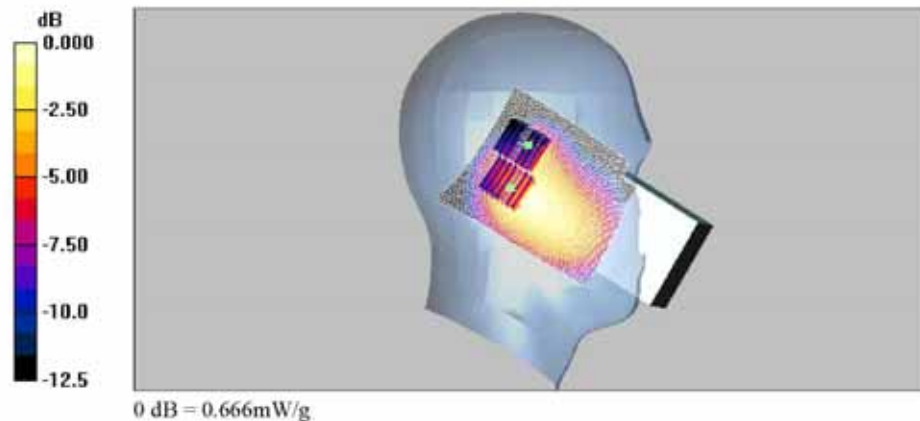

Date: 2011-07-03

Test Laboratory: SGS Korea (Gumpo Laboratory)  
File Name: [GSM850\\_LE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: GSM850\_Head**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.905$  mho/m;  $\epsilon_r = 41.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(6.22, 6.22, 6.22); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP 900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**GSM850\_LE\_Mid\_Tilt/Area Scan (71x91x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
Maximum value of SAR (interpolated) = 0.679 mW/g

**GSM850\_LE\_Mid\_Tilt/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 19.5 V/m; Power Drift = 0.068 dB  
Peak SAR (extrapolated) = 1.96 W/kg  
**SAR(1 g) = 0.585 mW/g; SAR(10 g) = 0.261 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
Maximum value of SAR (measured) = 0.628 mW/g

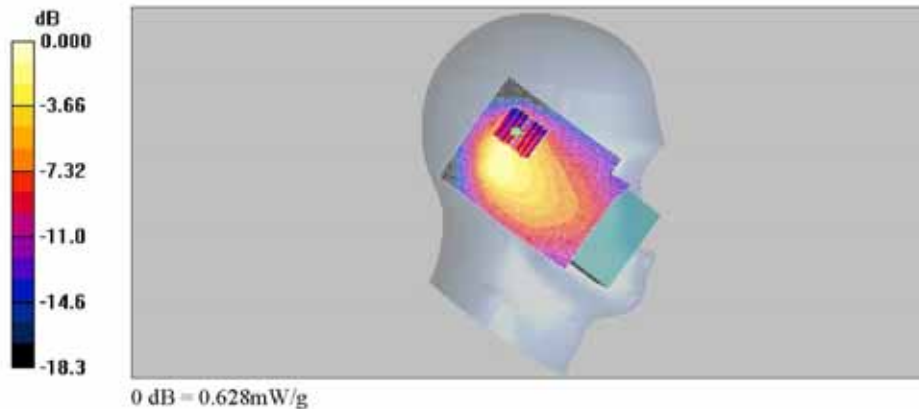

Date: 2011-07-03

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: GSM850\_RE.da4

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: GSM850\_Head**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8  
 Medium parameters used (interpolated):  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.905 \text{ mho/m}$ ;  $\epsilon_r = 41.8$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(6.22, 6.22, 6.22); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP 900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**GSM850\_RE\_Mid\_Cheek/Area Scan (71x91x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 0.867 mW/g

**GSM850\_RE\_Mid\_Cheek/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 25.4 V/m; Power Drift = 0.185 dB  
 Peak SAR (extrapolated) = 1.36 W/kg  
**SAR(1 g) = 0.786 mW/g; SAR(10 g) = 0.505 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 0.855 mW/g

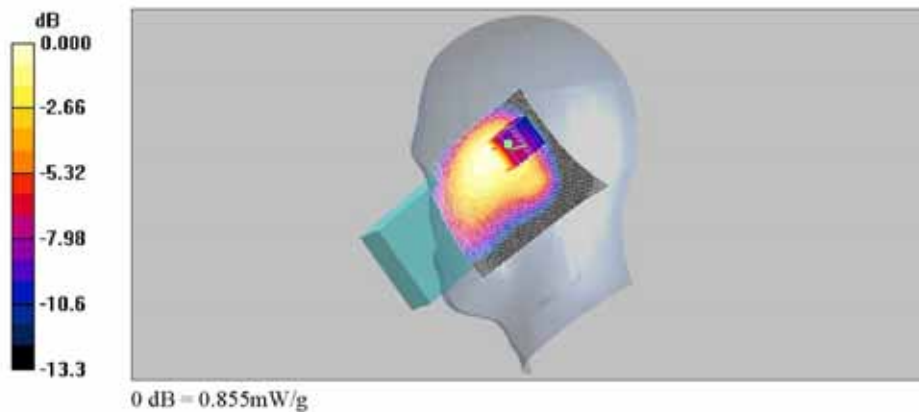

Date: 2011-07-03

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: GSM850\_RE.da4

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: GSM850\_Head**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8  
 Medium parameters used (interpolated):  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.905 \text{ mho/m}$ ;  $\epsilon_r = 41.8$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(6.22, 6.22, 6.22); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP 900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**GSM850\_RE\_Mid\_Tilt/Area Scan (71x91x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$


Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 0.873 mW/g

**GSM850\_RE\_Mid\_Tilt/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 25.9 V/m; Power Drift = 0.065 dB  
 Peak SAR (extrapolated) = 1.39 W/kg  
**SAR(1 g) = 0.792 mW/g; SAR(10 g) = 0.505 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 0.861 mW/g

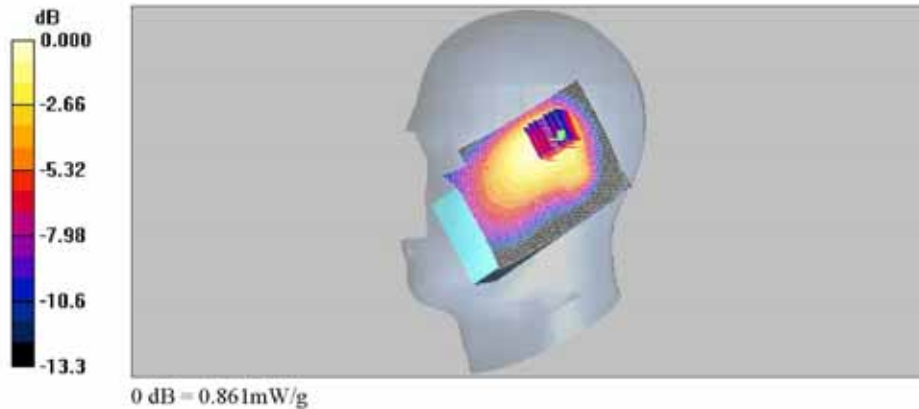

### Z Scan

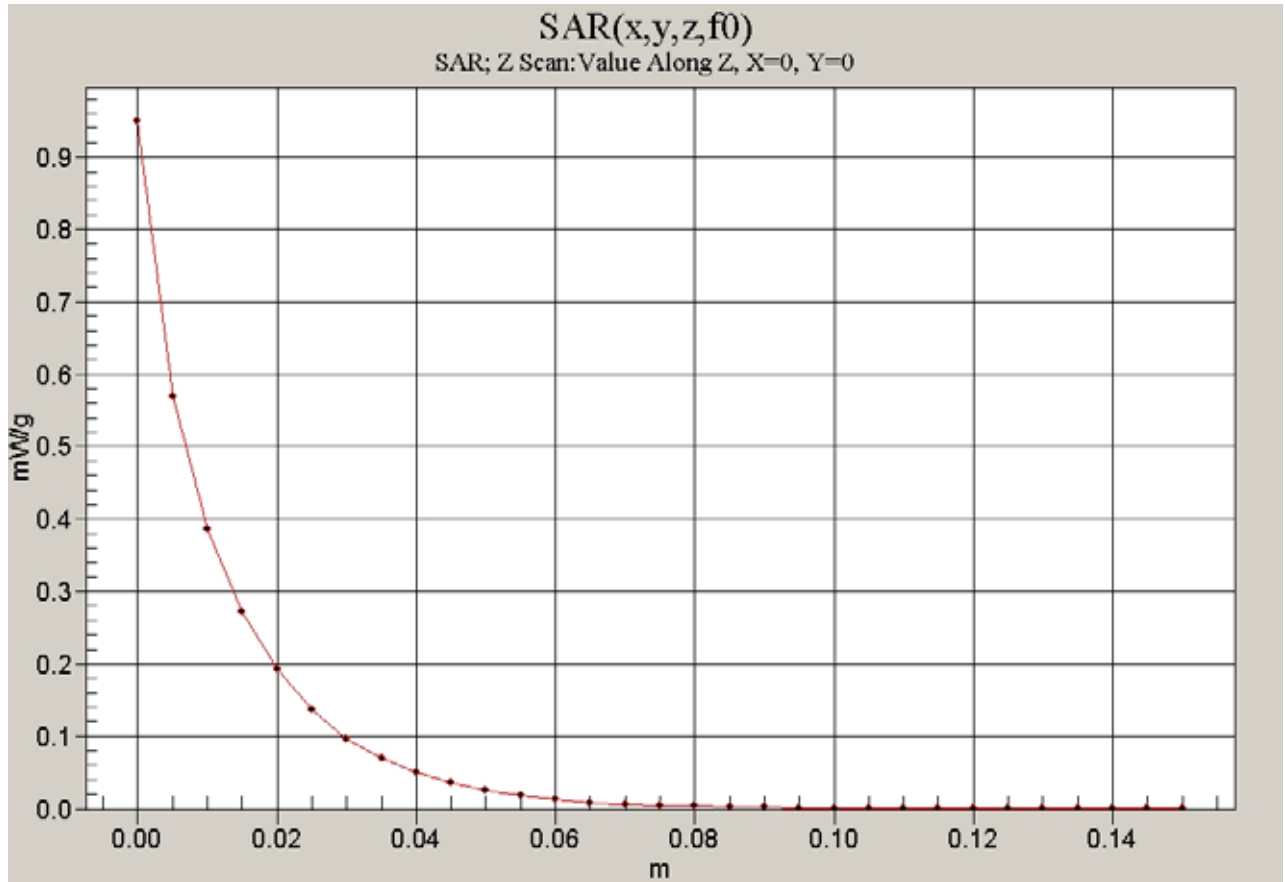

## GSM850 Body SAR Test

Date: 2011-07-03

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [GPRS850\\_Body\\_2Tx.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: GSM850\_Body**

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:4  
 Medium parameters used (interpolated):  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.954 \text{ mho/m}$ ;  $\epsilon_r = 57$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(6.03, 6.03, 6.03); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP 900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**GSM850\_Body\_Front\_Mid\_2Tx/Area Scan (71x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 0.793 mW/g


**GSM850\_Body\_Front\_Mid\_2Tx/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 16.7 V/m; Power Drift = -0.069 dB  
 Peak SAR (extrapolated) = 1.02 W/kg  
**SAR(1 g) = 0.761 mW/g; SAR(10 g) = 0.538 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 0.811 mW/g

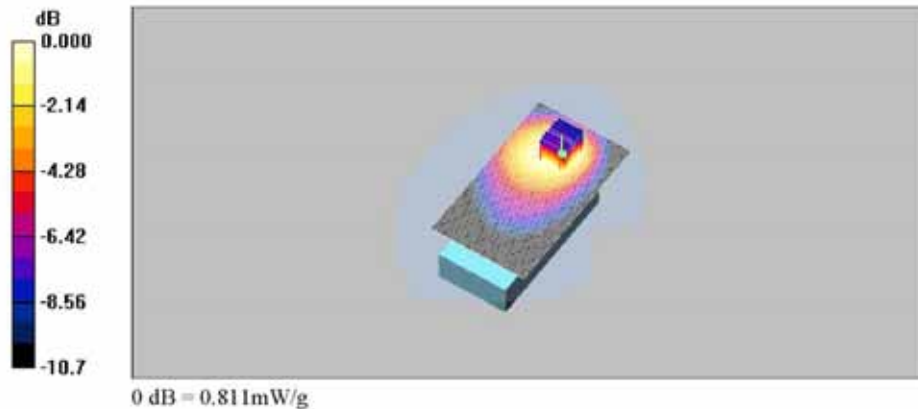



### Z Scan

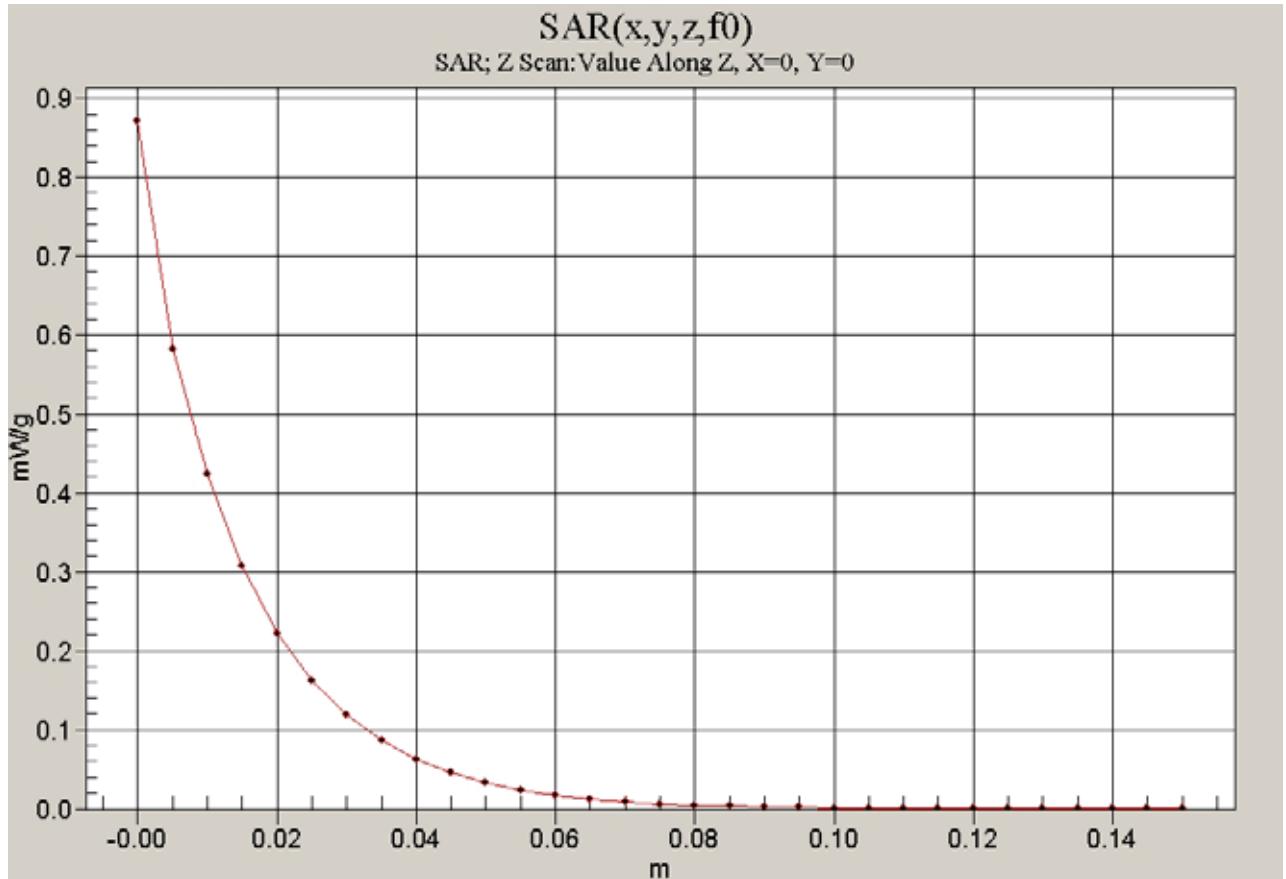

Date: 2011-07-03

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: GPRS850\_Body\_2Tx.da4

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: GSM850\_Body**

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:4  
 Medium parameters used (interpolated):  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.954 \text{ mho/m}$ ;  $\epsilon_r = 57$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(6.03, 6.03, 6.03); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP 900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**GSM850\_Body\_Back\_Mid\_2Tx/Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 0.484 mW/g

**GSM850\_Body\_Back\_Mid\_2Tx/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 17.1 V/m; Power Drift = 0.018 dB  
 Peak SAR (extrapolated) = 0.588 W/kg  
**SAR(1 g) = 0.455 mW/g; SAR(10 g) = 0.335 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 0.480 mW/g

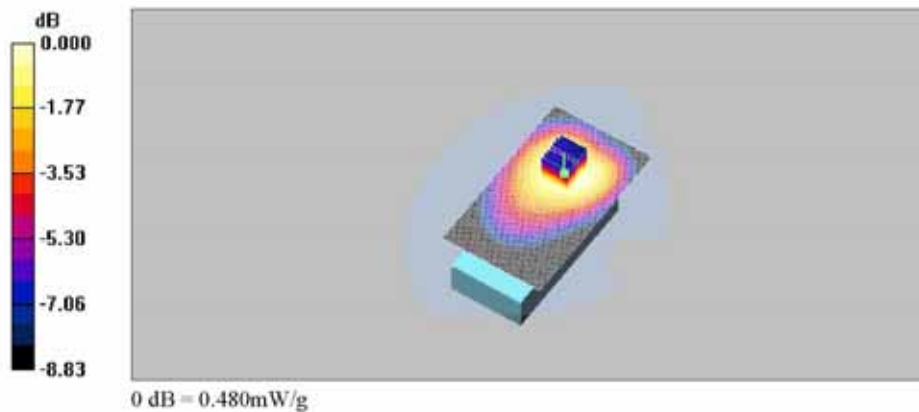

Date: 2011-07-03

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: GPRS850\_Body\_1Tx.da4

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: GSM850\_Body**

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8  
 Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.954$  mho/m;  $\epsilon_r = 57$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(6.03, 6.03, 6.03); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP 900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**GSM850\_Body\_Front\_Mid\_1Tx/Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 0.519 mW/g

**GSM850\_Body\_Front\_Mid\_1Tx/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 14.6 V/m; Power Drift = -0.024 dB  
 Peak SAR (extrapolated) = 0.648 W/kg  
**SAR(1 g) = 0.493 mW/g; SAR(10 g) = 0.351 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 0.524 mW/g

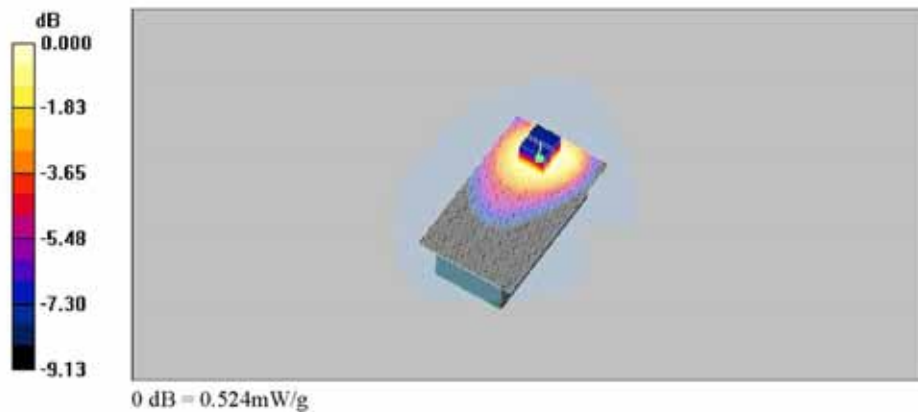

## PCS1900 Head SAR Test

Date: 2011-07-04

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [PCS1900\\_LE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: PCS1900\_Head**


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 38.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.95, 4.95, 4.95); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM with CRP\_1900\_2011\_07\_04(left); Type: SAM; Serial: TP-1645
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**PCS1900\_LE\_Mid\_Check/Area Scan (71x91x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 0.192 mW/g

**PCS1900\_LE\_Mid\_Check/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 10.7 V/m; Power Drift = -0.091 dB  
 Peak SAR (extrapolated) = 0.263 W/kg  
**SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.106 mW/g**  
 Maximum value of SAR (measured) = 0.188 mW/g

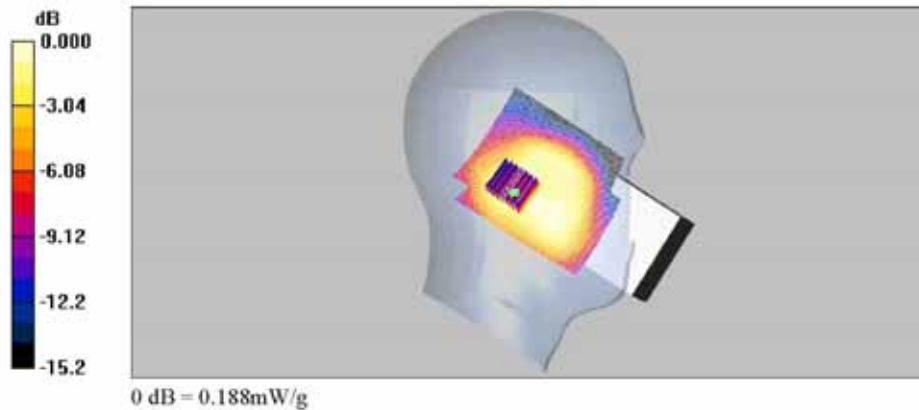

Date: 2011-07-04

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [PCS1900\\_LE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: PCS1900\_Head**


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.41 \text{ mho/m}$ ;  $\epsilon_r = 38.4$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.95, 4.95, 4.95); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM with CRP\_1900\_2011\_07\_04(left); Type: SAM; Serial: TP-1645
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**PCS1900\_LE\_Mid\_Tilt/Area Scan (71x91x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (interpolated) = 0.166 mW/g

**PCS1900\_LE\_Mid\_Tilt/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 11.0 V/m; Power Drift = -0.047 dB  
 Peak SAR (extrapolated) = 0.245 W/kg  
**SAR(1 g) = 0.156 mW/g; SAR(10 g) = 0.092 mW/g**  
 Maximum value of SAR (measured) = 0.172 mW/g

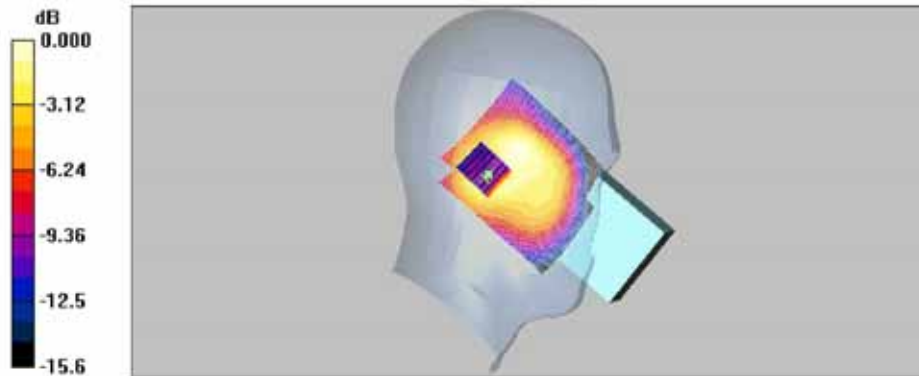

0 dB = 0.172mW/g

Date: 2011-07-04

Test Laboratory: SGS Korea (Gumpo Laboratory)  
File Name: [PCS1900\\_RE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: PCS1900\_Head**


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 38.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(4.95, 4.95, 4.95); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM with CRP\_1900\_2011\_07\_04(left); Type: SAM; Serial: TP-1645
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**PCS1900\_RE\_Mid\_Check/Area Scan (71x91x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.321 mW/g

**PCS1900\_RE\_Mid\_Check/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 10.1 V/m; Power Drift = 0.195 dB  
Peak SAR (extrapolated) = 0.441 W/kg  
**SAR(1 g) = 0.294 mW/g; SAR(10 g) = 0.175 mW/g**  
Maximum value of SAR (measured) = 0.321 mW/g

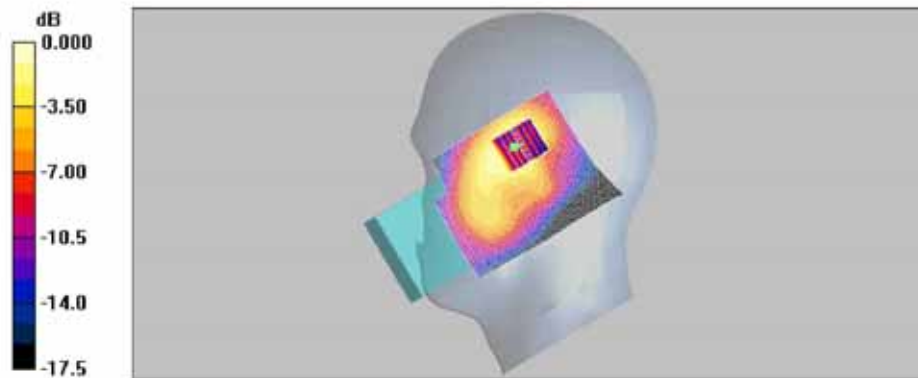

### Z Scan

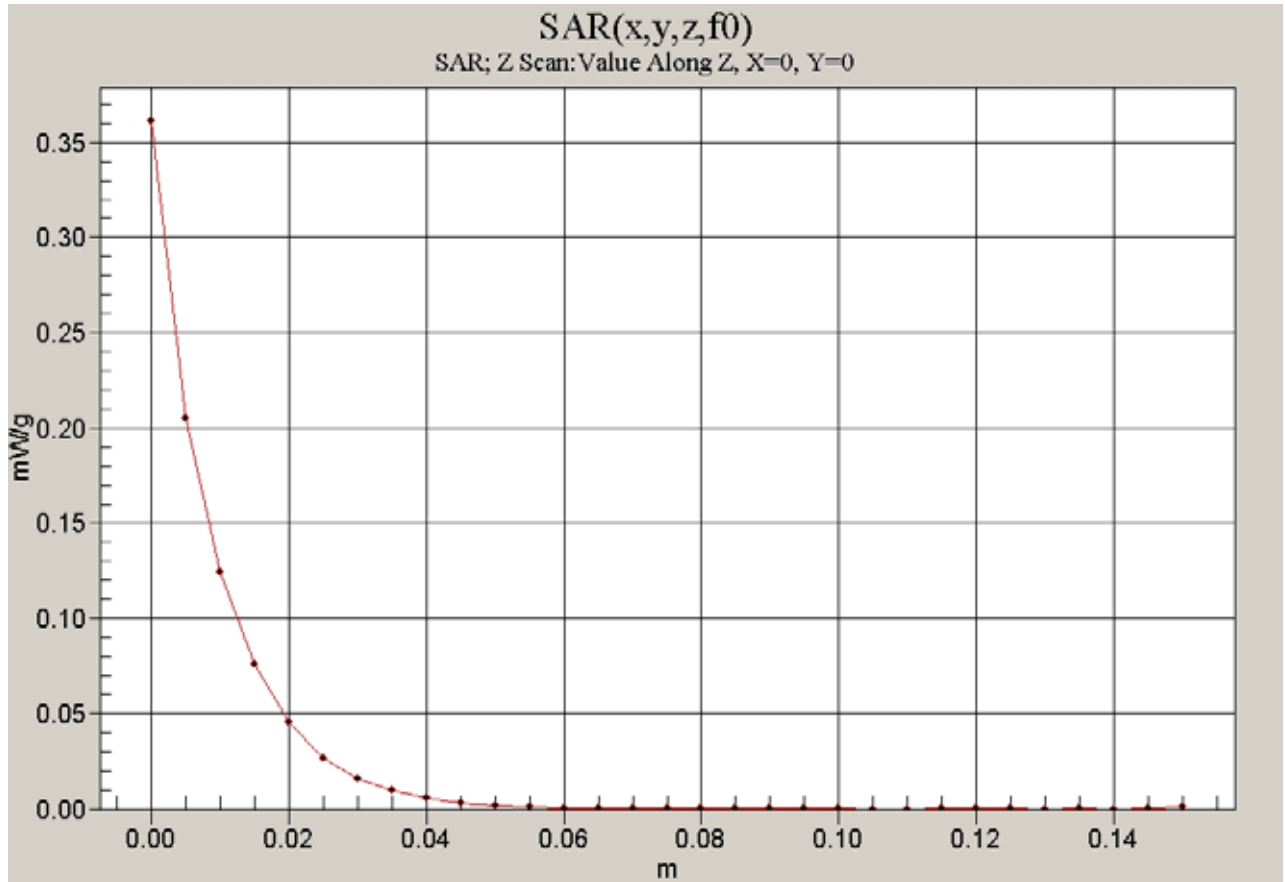

Date: 2011-07-04

Test Laboratory: SGS Korea (Gumpo Laboratory)  
File Name: [PCS1900\\_RE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: PCS1900\_Head**


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 38.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.95, 4.95, 4.95); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM with CRP\_1900\_2011\_07\_04(left); Type: SAM; Serial: TP-1645
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**PCS1900\_RE\_Mid\_Tilt/Area Scan (71x91x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.309 mW/g

**PCS1900\_RE\_Mid\_Tilt/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 10.9 V/m; Power Drift = -0.032 dB  
Peak SAR (extrapolated) = 0.480 W/kg  
**SAR(1 g) = 0.280 mW/g; SAR(10 g) = 0.158 mW/g**  
Maximum value of SAR (measured) = 0.305 mW/g

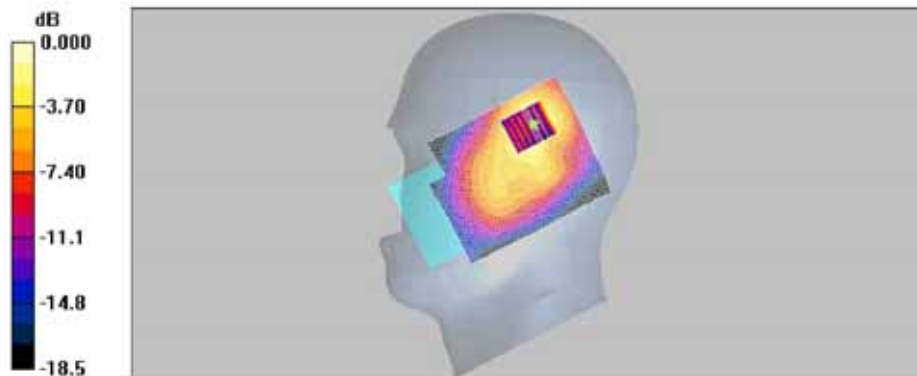



## PCS1900 Body SAR Test

Date: 2011-07-04

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [PCS1900\\_Body\\_2Tx.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: PCS1900\_Body**


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 51.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.34, 4.34, 4.34); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM with CRP\_1900\_2011\_07\_04(left); Type: SAM; Serial: TP-1645
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**PCS1900\_Body\_Front\_Mid\_2Tx/Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 0.164 mW/g

**PCS1900\_Body\_Front\_Mid\_2Tx/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 9.13 V/m; Power Drift = -0.147 dB  
 Peak SAR (extrapolated) = 0.230 W/kg  
**SAR(1 g) = 0.150 mW/g; SAR(10 g) = 0.091 mW/g**  
 Maximum value of SAR (measured) = 0.162 mW/g

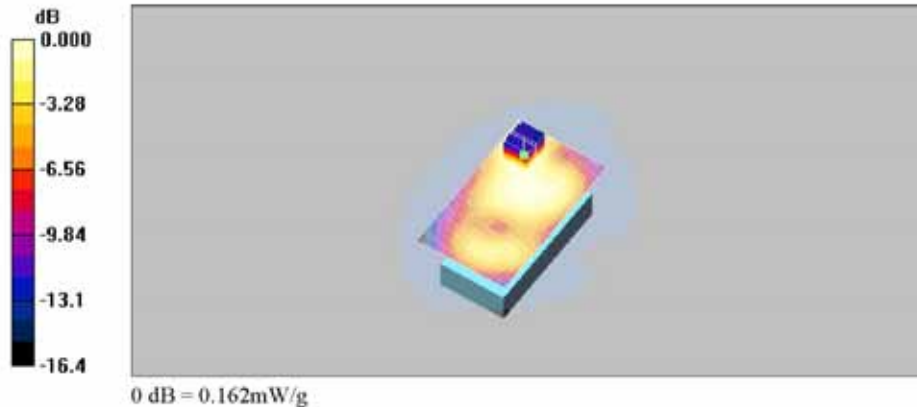

Date: 2011-07-04

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [PCS1900\\_Body\\_2Tx.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: PCS1900\_Body**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 51.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.34, 4.34, 4.34); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM with CRP\_1900\_2011\_07\_04(left); Type: SAM; Serial: TP-1645
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**PCS1900\_Body\_Back\_Mid\_2Tx/Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 0.194 mW/g


**PCS1900\_Body\_Back\_Mid\_2Tx/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.36 V/m; Power Drift = -0.053 dB


Peak SAR (extrapolated) = 0.275 W/kg

**SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.104 mW/g**

Maximum value of SAR (measured) = 0.188 mW/g

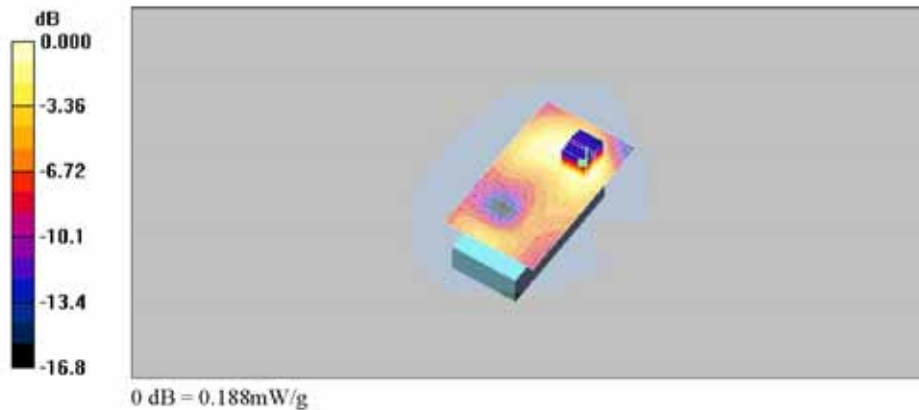

## Z Scan

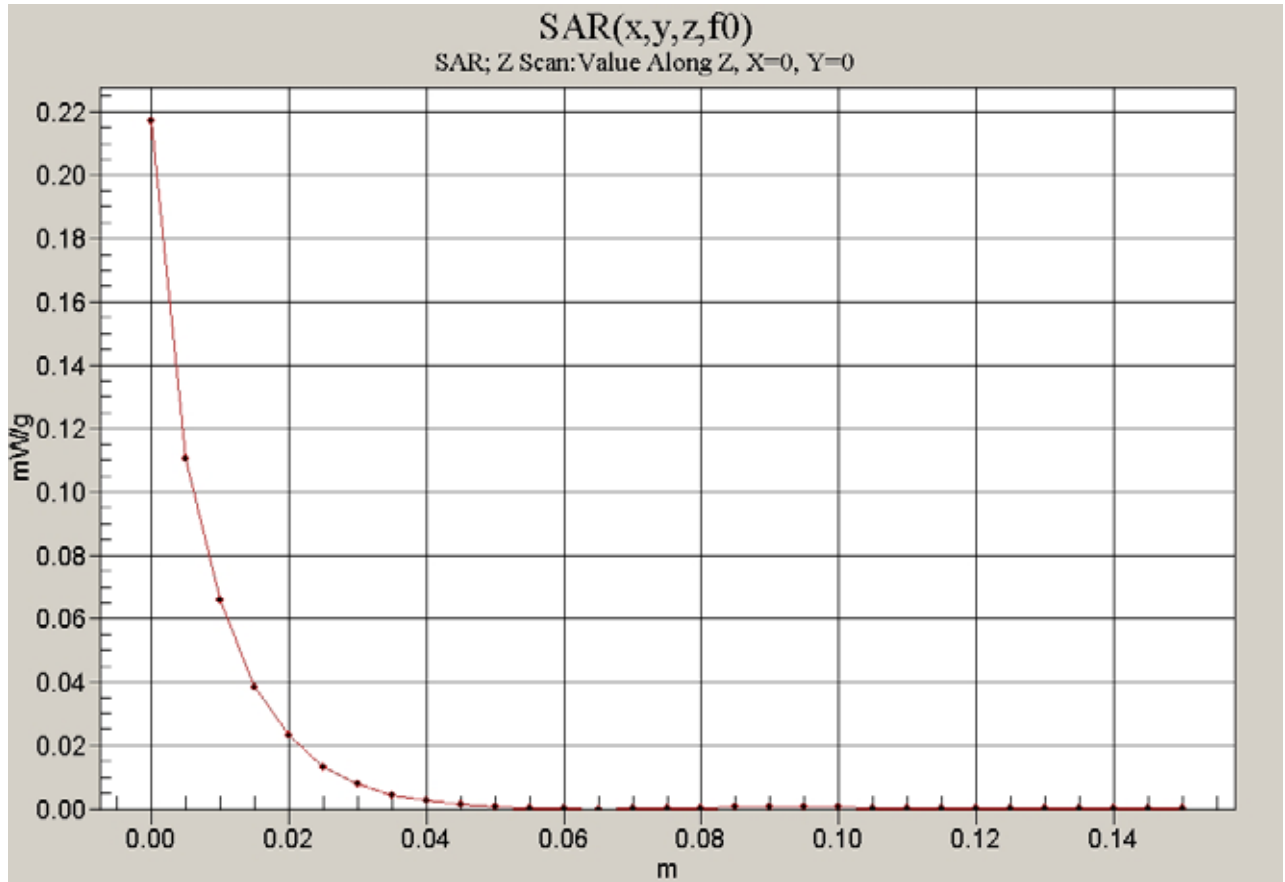

Date: 2011-07-04

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [PCS1900\\_Body\\_1Tx.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: PCS1900\_Body**

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 51.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.34, 4.34, 4.34); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM with CRP\_1900\_2011\_07\_04(left); Type: SAM; Serial: TP-1645
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**PCS1900\_Body\_Back\_Mid\_1Tx/Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 0.133 mW/g


**PCS1900\_Body\_Back\_Mid\_1Tx/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.60 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.192 W/kg

**SAR(1 g) = 0.121 mW/g; SAR(10 g) = 0.073 mW/g**

Maximum value of SAR (measured) = 0.131 mW/g

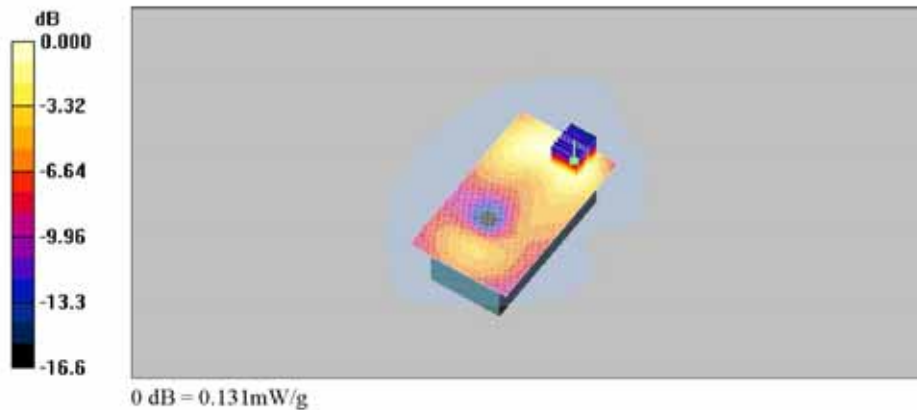

## WCDMA V Head SAR Test

Date: 2011-07-03

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [WCDMA V\\_LE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WCDMA V\_Head**

Communication System: WCDMA V; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.905 \text{ mho/m}$ ;  $\epsilon_r = 41.8$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.22, 6.22, 6.22); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP 900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**WCDMA V\_LE\_Mid\_Cheek/Area Scan (71x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.612 mW/g

**WCDMA V\_LE\_Mid\_Cheek/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.9 V/m; Power Drift = 0.194 dB

Peak SAR (extrapolated) = 0.790 W/kg

**SAR(1 g) = 0.529 mW/g; SAR(10 g) = 0.362 mW/g**

Maximum value of SAR (measured) = 0.564 mW/g


**WCDMA V\_LE\_Mid\_Cheek/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.9 V/m; Power Drift = 0.194 dB

Peak SAR (extrapolated) = 1.31 W/kg

**SAR(1 g) = 0.492 mW/g; SAR(10 g) = 0.251 mW/g**

Maximum value of SAR (measured) = 0.517 mW/g

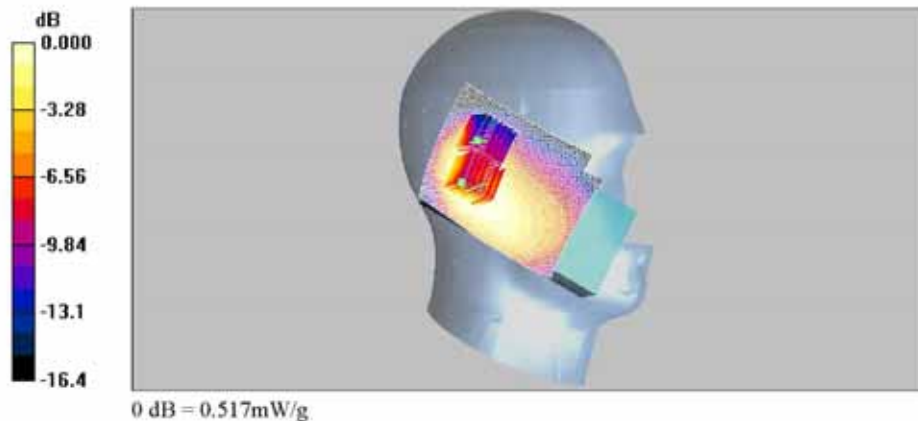

Date: 2011-07-03

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [WCDMA V\\_LE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WCDMA V\_Head**

Communication System: WCDMA V; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.905 \text{ mho/m}$ ;  $\epsilon_r = 41.8$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(6.22, 6.22, 6.22); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP 900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**WCDMA V\_LE\_Mid\_Tilt/Area Scan (71x91x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 0.615 mW/g

**WCDMA V\_LE\_Mid\_Tilt/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 18.7 V/m; Power Drift = 0.120 dB  
 Peak SAR (extrapolated) = 1.97 W/kg  
**SAR(1 g) = 0.560 mW/g; SAR(10 g) = 0.248 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 0.585 mW/g

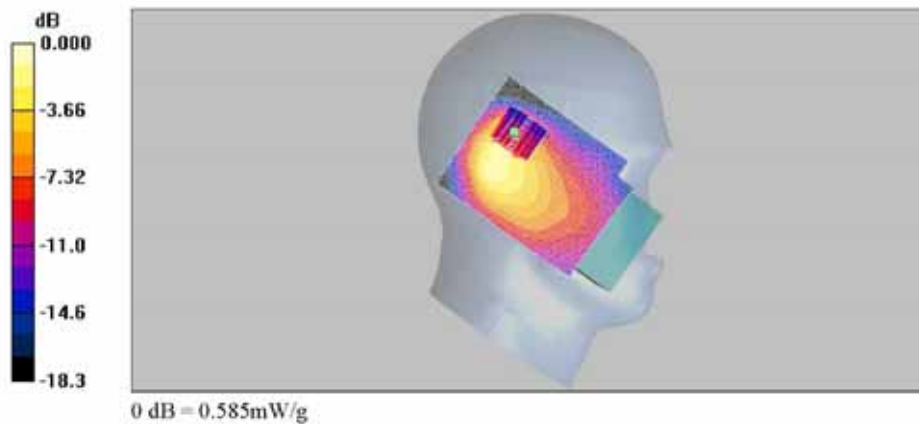

Date: 2011-07-03

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [WCDMA V\\_RE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WCDMA V\_Head**

Communication System: WCDMA V; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.905$  mho/m;  $\epsilon_r = 41.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.22, 6.22, 6.22); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP 900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**WCDMA V\_RE\_Mid\_Cheek/Area Scan (71x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.823 mW/g

**WCDMA V\_RE\_Mid\_Cheek/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.4 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.704 mW/g; SAR(10 g) = 0.447 mW/g**

Maximum value of SAR (measured) = 0.754 mW/g


**WCDMA V\_RE\_Mid\_Cheek/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.4 V/m; Power Drift = 0.032 dB


Peak SAR (extrapolated) = 0.824 W/kg

**SAR(1 g) = 0.626 mW/g; SAR(10 g) = 0.445 mW/g**

Maximum value of SAR (measured) = 0.664 mW/g

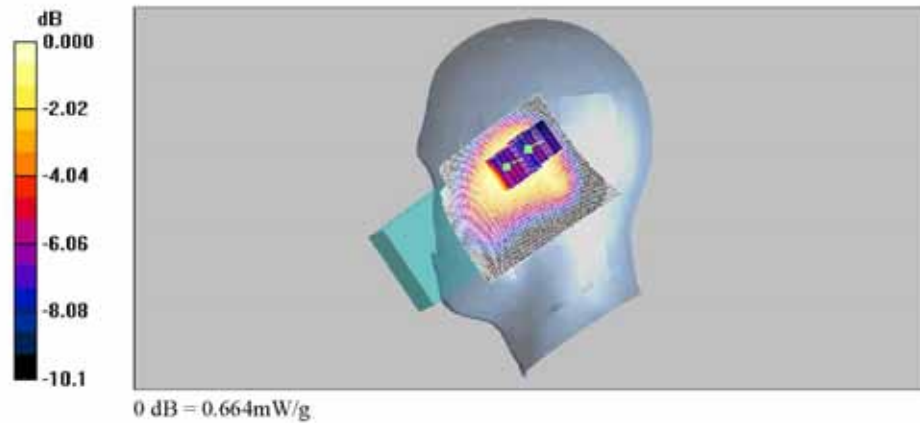

## Z Scan

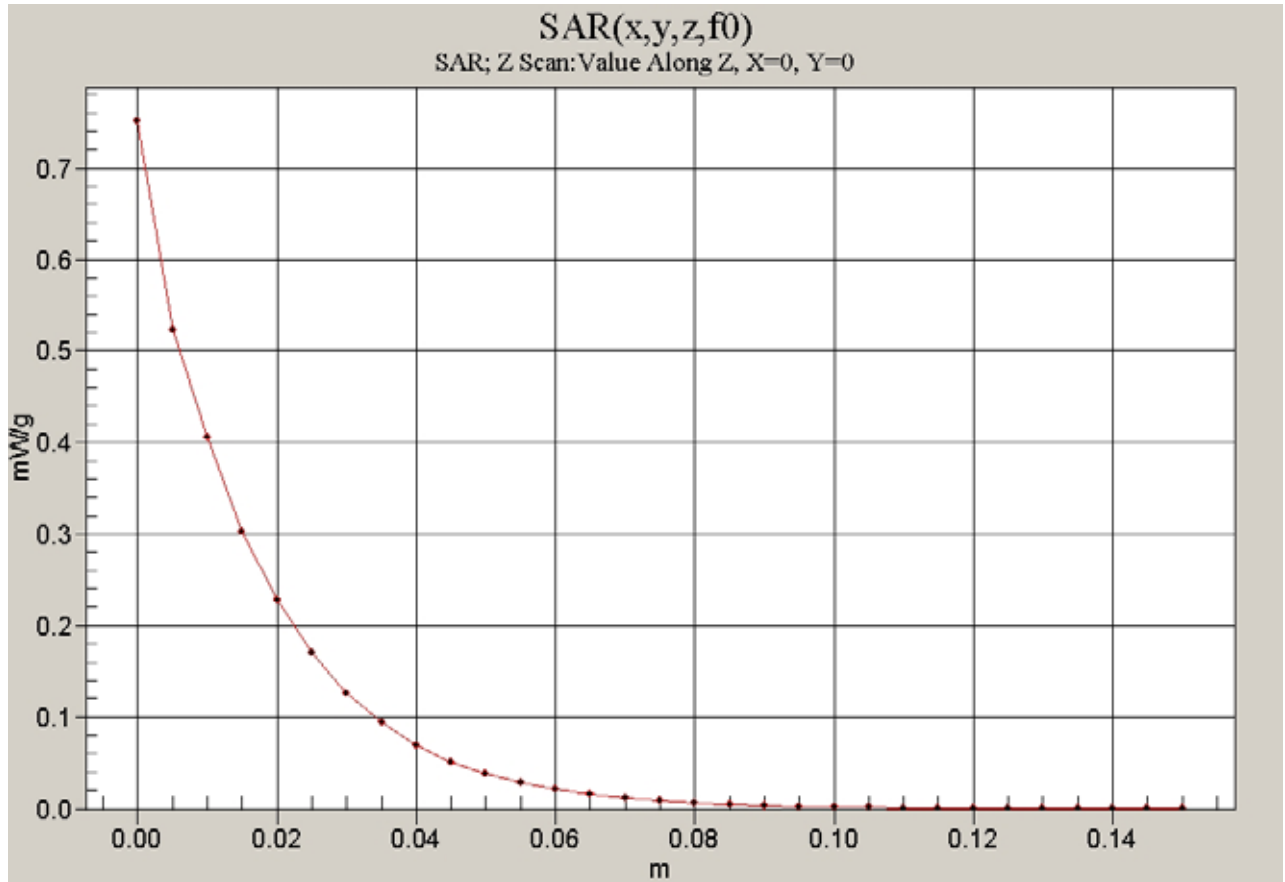



Date: 2011-07-03

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [WCDMA V\\_RE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WCDMA V\_Head**

Communication System: WCDMA V; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.905$  mho/m;  $\epsilon_r = 41.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.22, 6.22, 6.22); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP 900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


**WCDMA V\_RE\_Mid\_Tilt/Area Scan (71x91x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 0.554 mW/g

**WCDMA V\_RE\_Mid\_Tilt/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.6 V/m; Power Drift = 0.022 dB  
 Peak SAR (extrapolated) = 1.08 W/kg  
**SAR(1 g) = 0.550 mW/g; SAR(10 g) = 0.320 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 0.601 mW/g

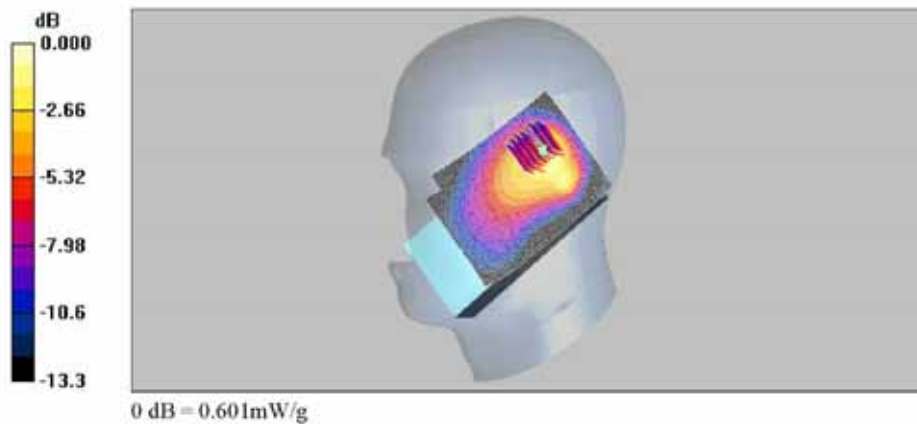

## WCDMA V Body SAR Test

Date: 2011-07-03

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [WCDMA V\\_Body.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WCDMA V\_Body**

Communication System: WCDMA V; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.954$  mho/m;  $\epsilon_r = 57$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.03, 6.03, 6.03); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP 900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


**WCDMA V\_Front\_Mid/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 0.478 mW/g


**WCDMA V\_Front\_Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.8 V/m; Power Drift = -0.008 dB  
 Peak SAR (extrapolated) = 0.585 W/kg  
**SAR(1 g) = 0.434 mW/g; SAR(10 g) = 0.308 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 0.461 mW/g

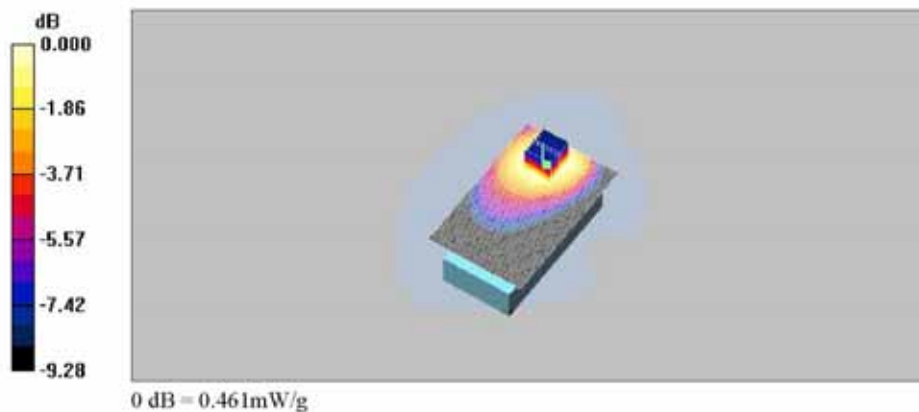

### Z Scan

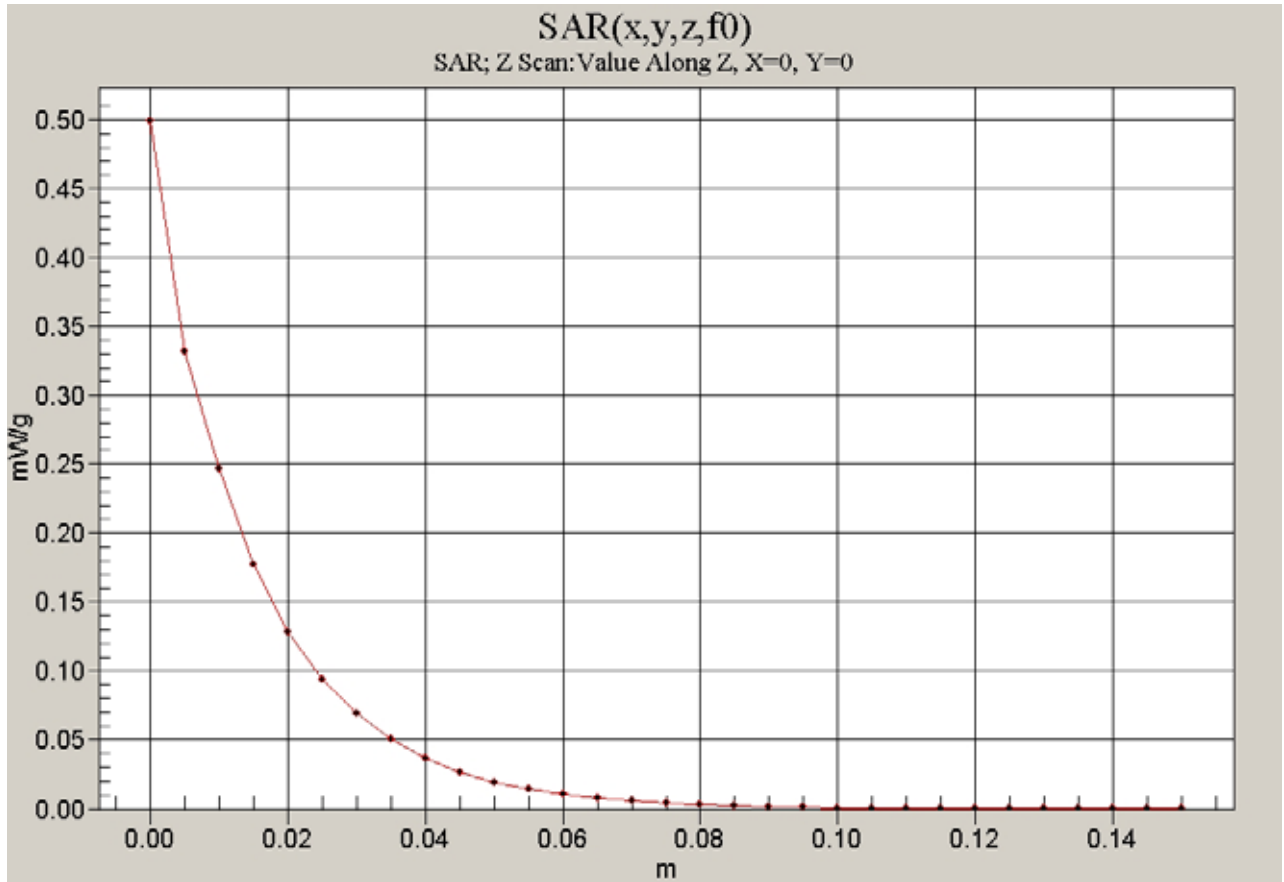

Date: 2011-07-03

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [WCDMA V\\_Body.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WCDMA V\_Body**

Communication System: WCDMA V; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.954 \text{ mho/m}$ ;  $\epsilon_r = 57$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(6.03, 6.03, 6.03); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP 900MHz; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**WCDMA V\_Back\_Mid/Area Scan (71x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 0.307 mW/g

**WCDMA V\_Back\_Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 12.2 V/m; Power Drift = -0.139 dB  
 Peak SAR (extrapolated) = 0.396 W/kg  
**SAR(1 g) = 0.302 mW/g; SAR(10 g) = 0.217 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 0.322 mW/g

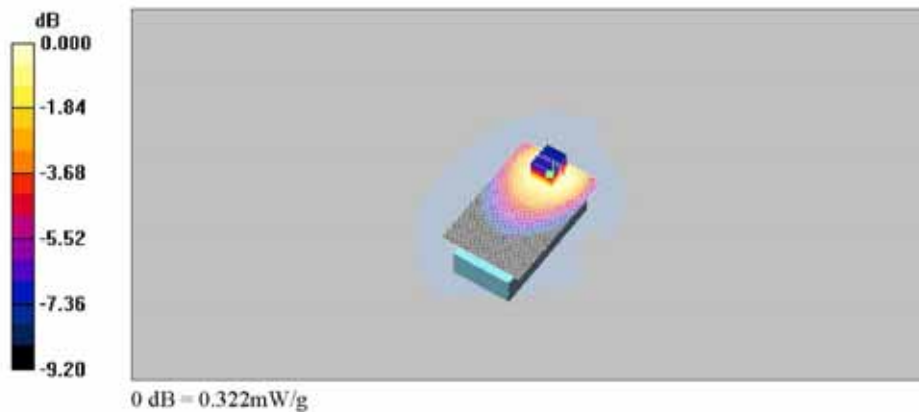

## WCDMA II Head SAR Test

Date: 2011-07-04

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [WCDMA II\\_LE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WCDMA II\_Head**


Communication System: W-CDMA II; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 51.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.34, 4.34, 4.34); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**WCDMA II\_LE\_Mid\_Check/Area Scan (71x91x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 0.392 mW/g

**WCDMA II\_LE\_Mid\_Check/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 14.0 V/m; Power Drift = 0.071 dB  
 Peak SAR (extrapolated) = 0.553 W/kg  
**SAR(1 g) = 0.371 mW/g; SAR(10 g) = 0.229 mW/g**  
 Maximum value of SAR (measured) = 0.416 mW/g

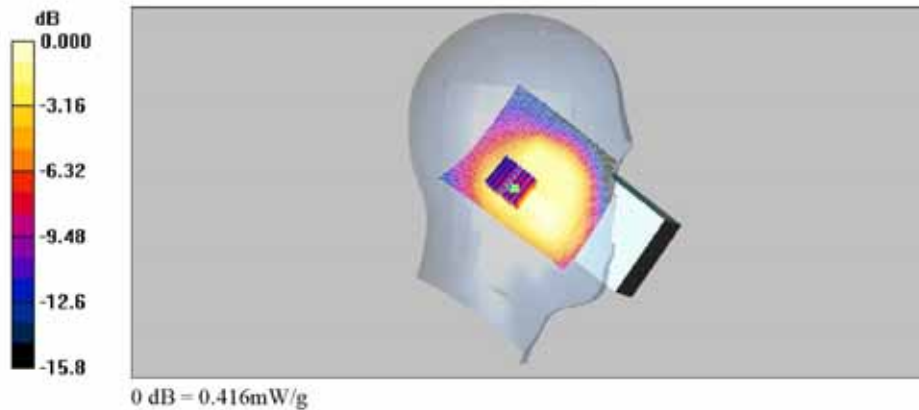

Date: 2011-07-04

Test Laboratory: SGS Korea (Gumpo Laboratory)  
File Name: [WCDMA II\\_LE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WCDMA II\_Head**


Communication System: W-CDMA II; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 51.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.34, 4.34, 4.34); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**WCDMA II\_LE\_Mid\_Tilt/Area Scan (71x91x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.352 mW/g

**WCDMA II\_LE\_Mid\_Tilt/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 15.0 V/m; Power Drift = -0.005 dB  
Peak SAR (extrapolated) = 0.436 W/kg  
**SAR(1 g) = 0.304 mW/g; SAR(10 g) = 0.188 mW/g**  
Maximum value of SAR (measured) = 0.331 mW/g

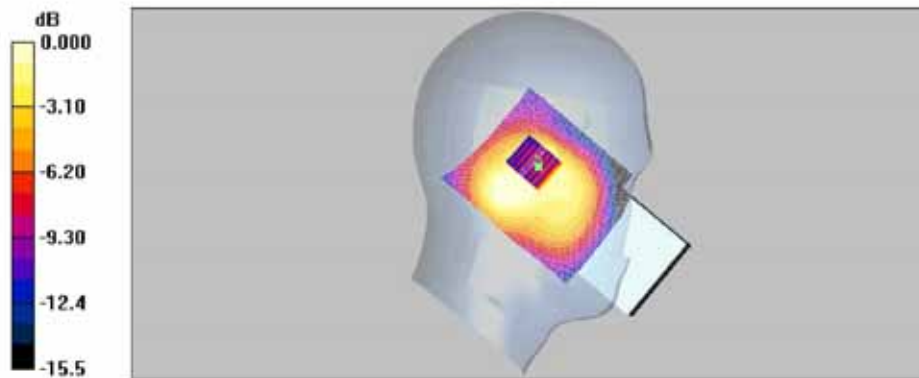

Date: 2011-07-04

Test Laboratory: SGS Korea (Gumpo Laboratory)  
File Name: [WCDMA II\\_RE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WCDMA II\_Head**


Communication System: W-CDMA II; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 51.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(4.34, 4.34, 4.34); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**WCDMA II\_RE\_Mid\_Check/Area Scan (71x91x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.633 mW/g

**WCDMA II\_RE\_Mid\_Check/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 12.7 V/m; Power Drift = -0.008 dB  
Peak SAR (extrapolated) = 0.882 W/kg  
**SAR(1 g) = 0.596 mW/g; SAR(10 g) = 0.361 mW/g**  
Maximum value of SAR (measured) = 0.644 mW/g

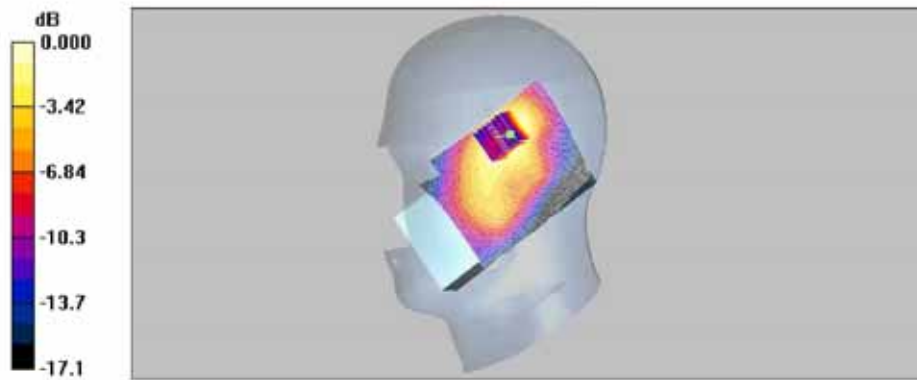

### Z Scan

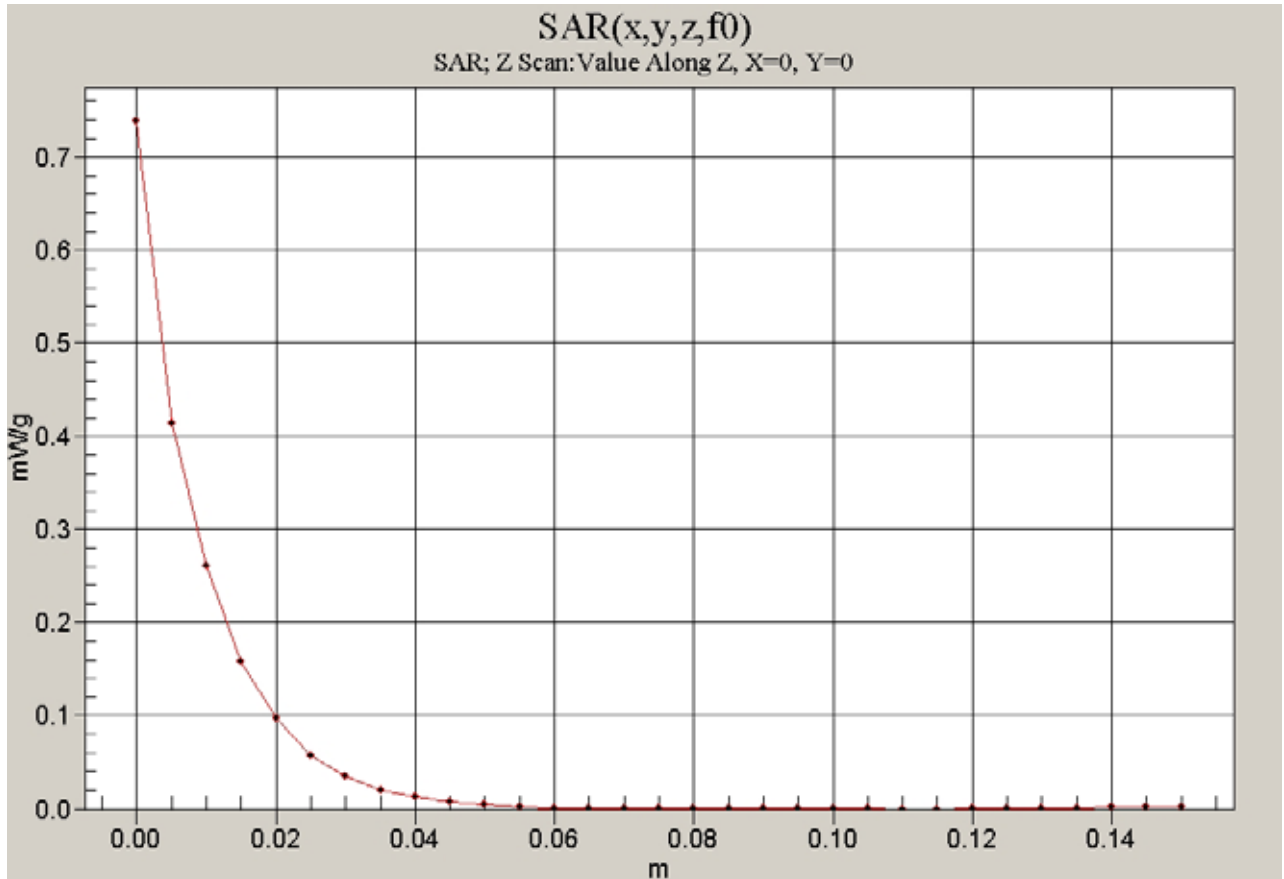



Date: 2011-07-04

Test Laboratory: SGS Korea (Gumpo Laboratory)  
File Name: [WCDMA II\\_RE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WCDMA II\_Head**


Communication System: W-CDMA II; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 51.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.34, 4.34, 4.34); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**WCDMA II\_RE\_Mid\_Tilt/Area Scan (71x91x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.588 mW/g

**WCDMA II\_RE\_Mid\_Tilt/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 14.2 V/m; Power Drift = -0.011 dB  
Peak SAR (extrapolated) = 0.908 W/kg  
**SAR(1 g) = 0.540 mW/g; SAR(10 g) = 0.306 mW/g**  
Maximum value of SAR (measured) = 0.616 mW/g

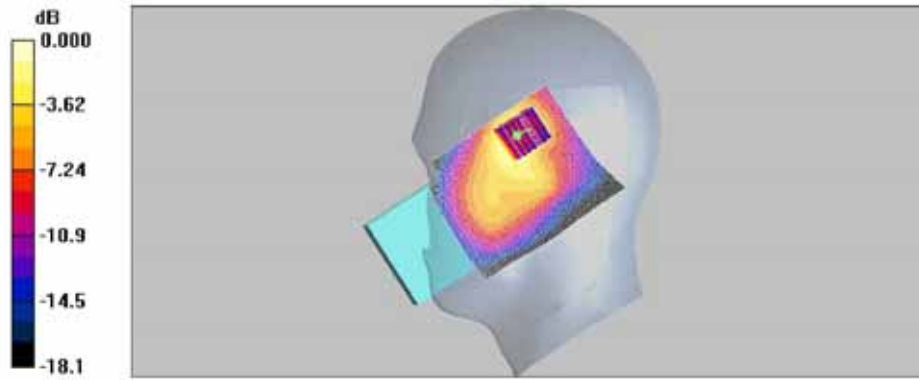

## WCDMA II Body SAR Test

Date: 2011-07-04

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [WCDMA II\\_Body.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WCDMA II\_Body**


Communication System: W-CDMA II; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 51.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.34, 4.34, 4.34); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**WCDMA II\_Front\_Mid/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 0.177 mW/g

**WCDMA II\_Front\_Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 9.48 V/m; Power Drift = 0.084 dB  
 Peak SAR (extrapolated) = 0.244 W/kg  
**SAR(1 g) = 0.164 mW/g; SAR(10 g) = 0.102 mW/g**  
 Maximum value of SAR (measured) = 0.178 mW/g

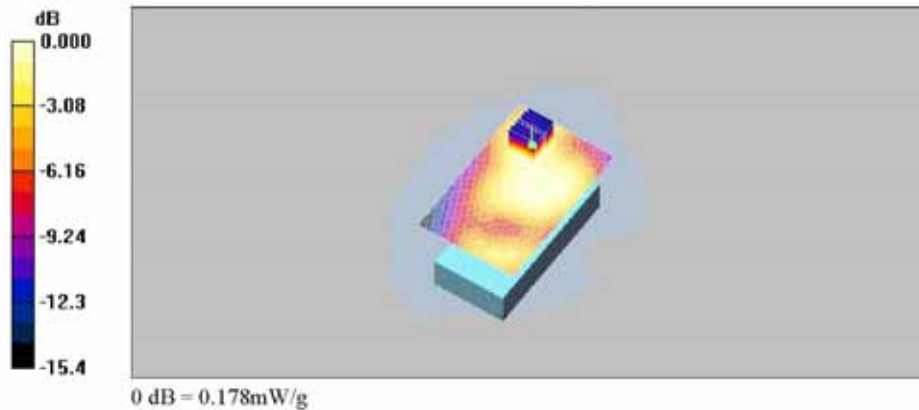

Date: 2011-07-04

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [WCDMA II\\_Body.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WCDMA II\_Body**


Communication System: W-CDMA II; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 51.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ET3DV6 - SN1782; ConvF(4.34, 4.34, 4.34); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM MIC #2000-93 with CRP; Type: SAM MIC #2000-93; Serial: TP-1299
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


**WCDMA II\_Back\_Mid/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 0.241 mW/g

**WCDMA II\_Back\_Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 5.81 V/m; Power Drift = 0.024 dB  
 Peak SAR (extrapolated) = 0.348 W/kg  
**SAR(1 g) = 0.219 mW/g; SAR(10 g) = 0.133 mW/g**  
 Maximum value of SAR (measured) = 0.239 mW/g

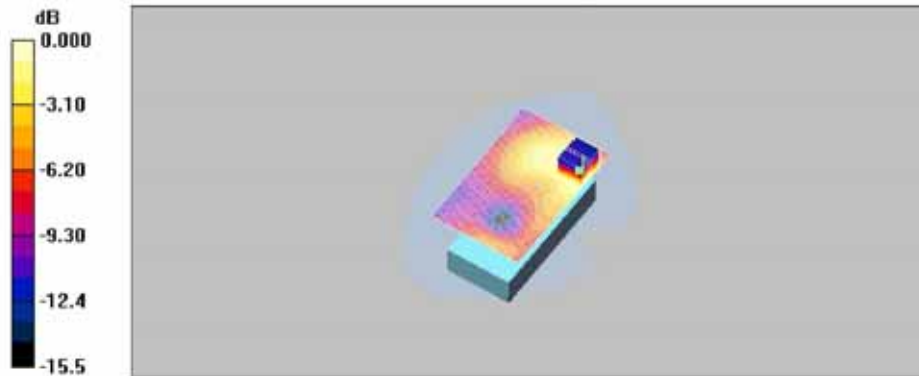

0 dB = 0.239mW/g

### Z Scan

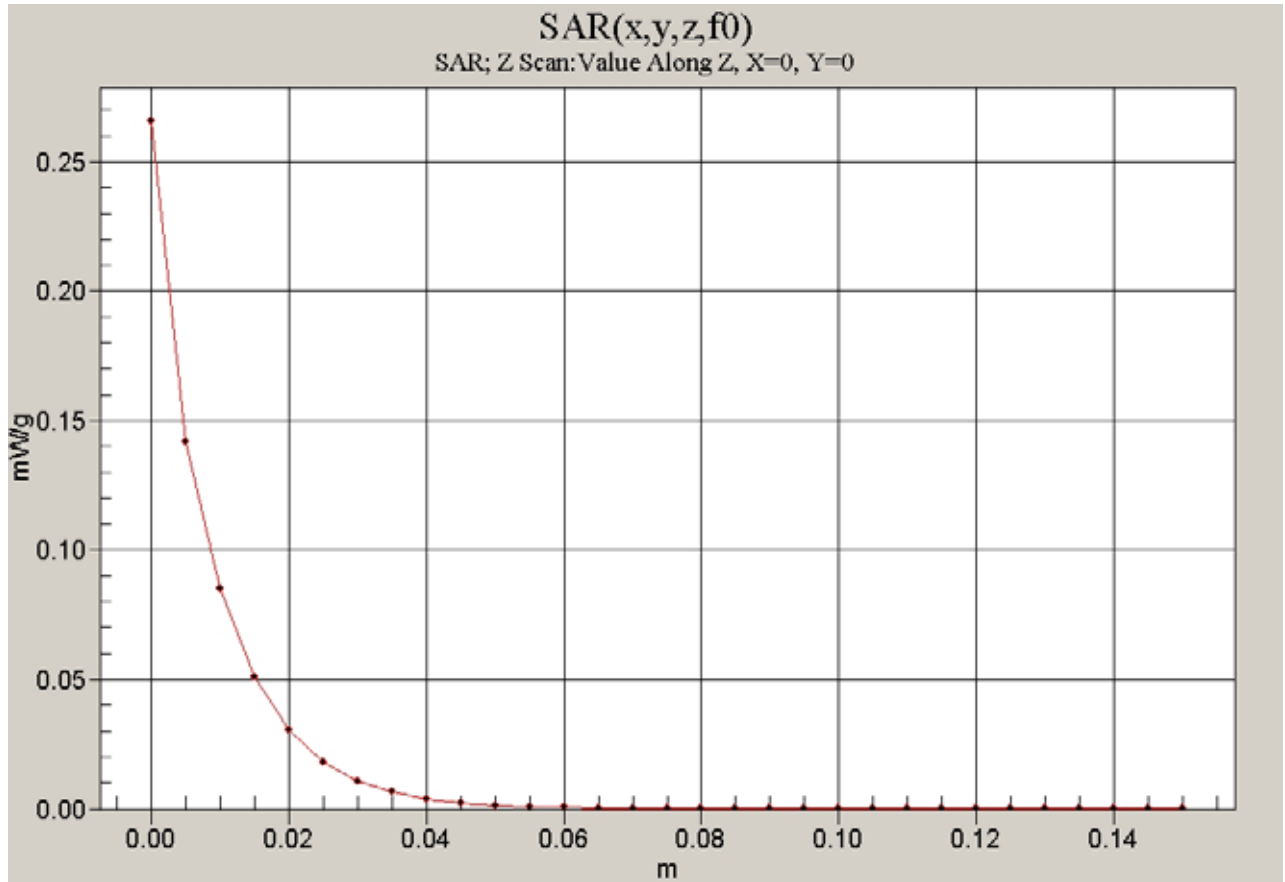

## WLAN Head SAR Test

Date: 2011-07-02

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [WLAN\\_LE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WLAN\_Head**


Communication System: WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.77$  mho/m;  $\epsilon_r = 39$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Left Section

**DASY4 Configuration:**


- Probe: ET3DV6 - SN1782; ConvF(4.37, 4.37, 4.37); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM with CRP\_1900\_2011\_07\_04(left); Type: SAM; Serial: TP-1645
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**LE\_11b\_Low\_Cheek/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 0.131 mW/g

**LE\_11b\_Low\_Cheek/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 2.59 V/m; Power Drift = -0.011 dB  
 Peak SAR (extrapolated) = 0.238 W/kg  
**SAR(1 g) = 0.123 mW/g; SAR(10 g) = 0.069 mW/g**  
 Maximum value of SAR (measured) = 0.132 mW/g

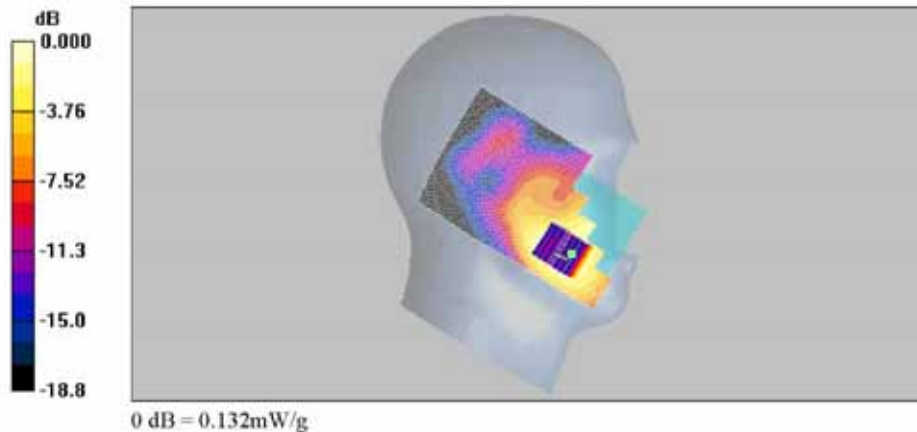

### Z Scan

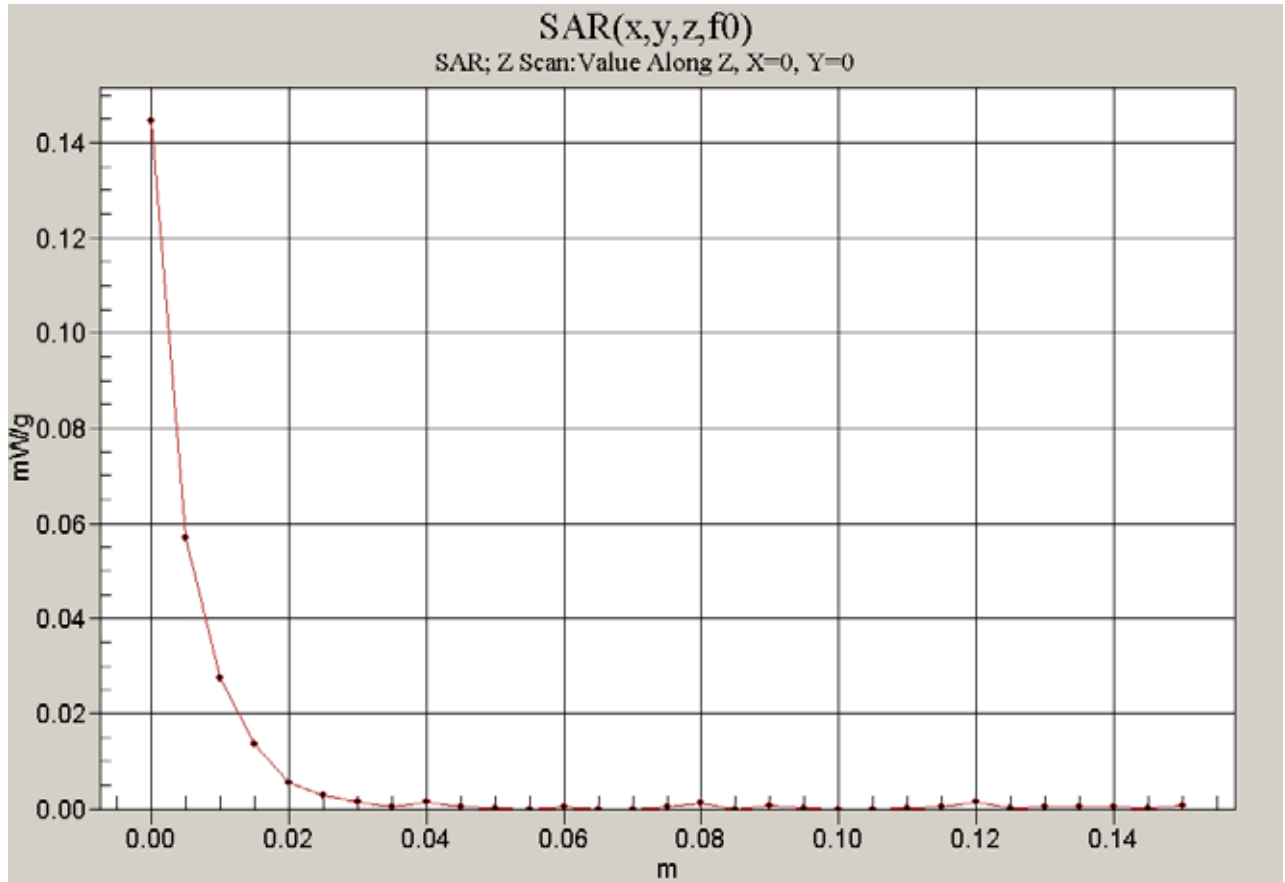

Date: 2011-07-02

Test Laboratory: SGS Korea (Gumpo Laboratory)  
File Name: [WLAN\\_LE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WLAN\_Head**


Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.8$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.37, 4.37, 4.37); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM with CRP\_1900\_2011\_07\_04(left); Type: SAM; Serial: TP-1645
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**LE\_11b\_Mid\_Cheek/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.120 mW/g

**LE\_11b\_Mid\_Cheek/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 2.61 V/m; Power Drift = -0.181 dB  
Peak SAR (extrapolated) = 0.210 W/kg  
**SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.062 mW/g**  
Maximum value of SAR (measured) = 0.116 mW/g

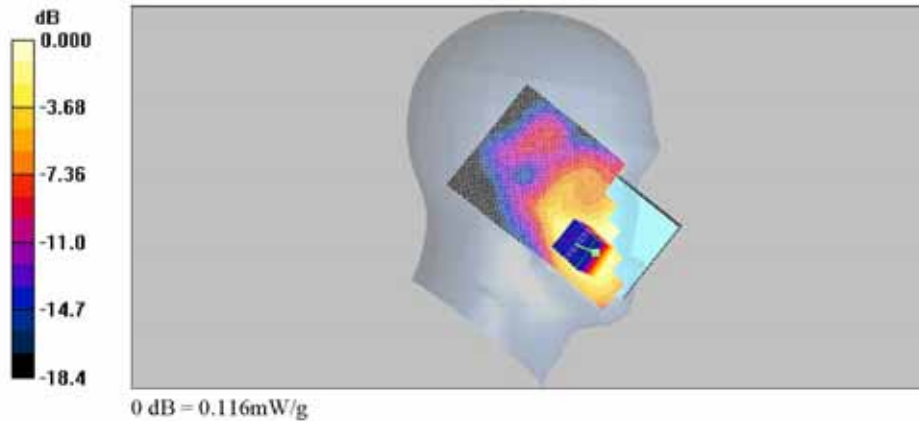

Date: 2011-07-02

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [WLAN\\_LE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WLAN\_Head**


Communication System: WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2462 \text{ MHz}$ ;  $\sigma = 1.83 \text{ mho/m}$ ;  $\epsilon_r = 38.8$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.37, 4.37, 4.37); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM with CRP\_1900\_2011\_07\_04(left); Type: SAM; Serial: TP-1645
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**LE\_11b\_High\_Check/Area Scan (71x111x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (interpolated) = 0.119 mW/g

**LE\_11b\_High\_Check/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 2.29 V/m; Power Drift = 0.020 dB  
 Peak SAR (extrapolated) = 0.216 W/kg  
**SAR(1 g) = 0.110 mW/g; SAR(10 g) = 0.062 mW/g**  
 Maximum value of SAR (measured) = 0.119 mW/g

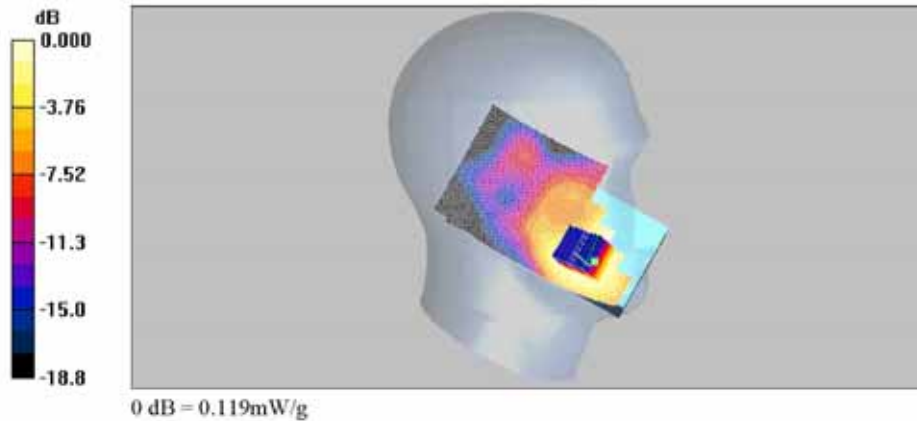



Date: 2011-07-02

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [WLAN\\_LE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WLAN\_Head**


Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.8$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(4.37, 4.37, 4.37); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM with CRP\_1900\_2011\_07\_04(left); Type: SAM; Serial: TP-1645
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**LE\_11b\_Mid\_Tilt/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 0.031 mW/g

**LE\_11b\_Mid\_Tilt/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 3.37 V/m; Power Drift = 0.157 dB  
 Peak SAR (extrapolated) = 0.054 W/kg  
**SAR(1 g) = 0.030 mW/g; SAR(10 g) = 0.018 mW/g**  
 Maximum value of SAR (measured) = 0.031 mW/g

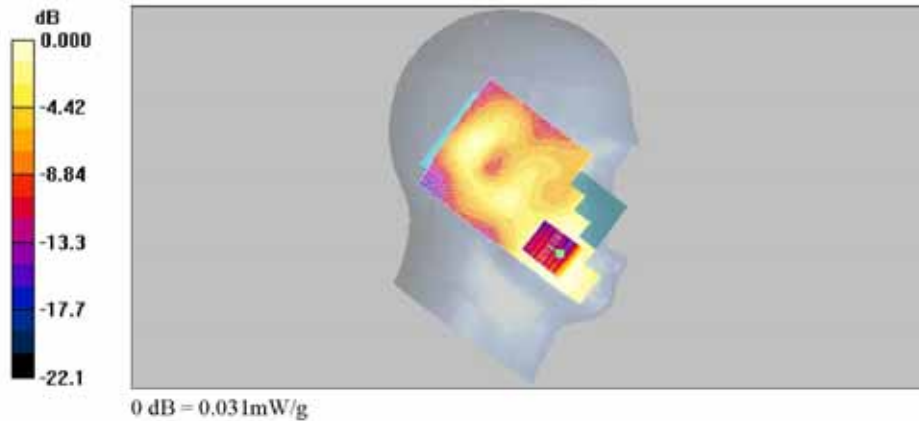

Date: 2011-07-02

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [WLAN\\_RE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WLAN\_Head**


Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.8$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Right Section

**DASY4 Configuration:**

- Probe: ET3DV6 - SN1782; ConvF(4.37, 4.37, 4.37); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM with CRP\_1900\_2011\_07\_04(left); Type: SAM; Serial: TP-1645
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**RE\_11b\_Mid\_Cheek/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 0.058 mW/g

**RE\_11b\_Mid\_Cheek/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 3.34 V/m; Power Drift = -0.165 dB  
 Peak SAR (extrapolated) = 0.106 W/kg  
**SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.030 mW/g**  
 Maximum value of SAR (measured) = 0.058 mW/g

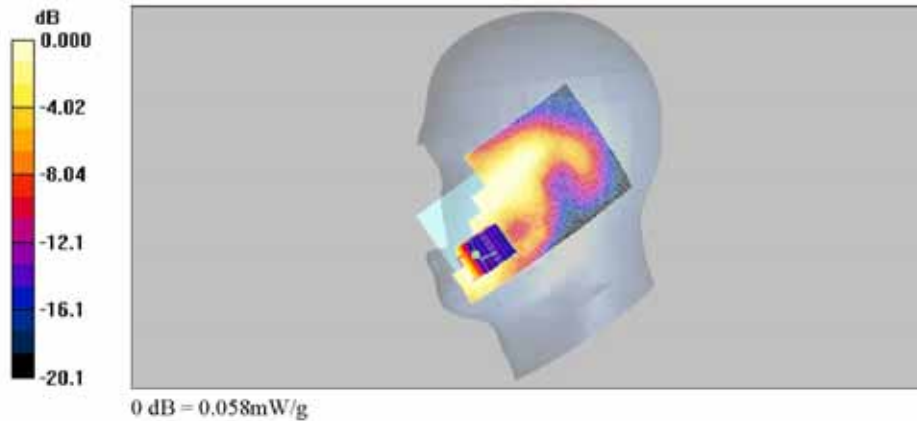

Date: 2011-07-02

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [WLAN\\_RE.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WLAN\_Head**


Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.8$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Right Section

**DASY4 Configuration:**

- Probe: ET3DV6 - SN1782; ConvF(4.37, 4.37, 4.37); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM with CRP\_1900\_2011\_07\_04(left); Type: SAM; Serial: TP-1645
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**RE\_11b\_Mid\_Tilt/Area Scan (71x111x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
 Maximum value of SAR (interpolated) = 0.025 mW/g

**RE\_11b\_Mid\_Tilt/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
 Reference Value = 3.71 V/m; Power Drift = -0.172 dB  
 Peak SAR (extrapolated) = 0.045 W/kg  
**SAR(1 g) = 0.023 mW/g; SAR(10 g) = 0.012 mW/g**  
 Maximum value of SAR (measured) = 0.025 mW/g

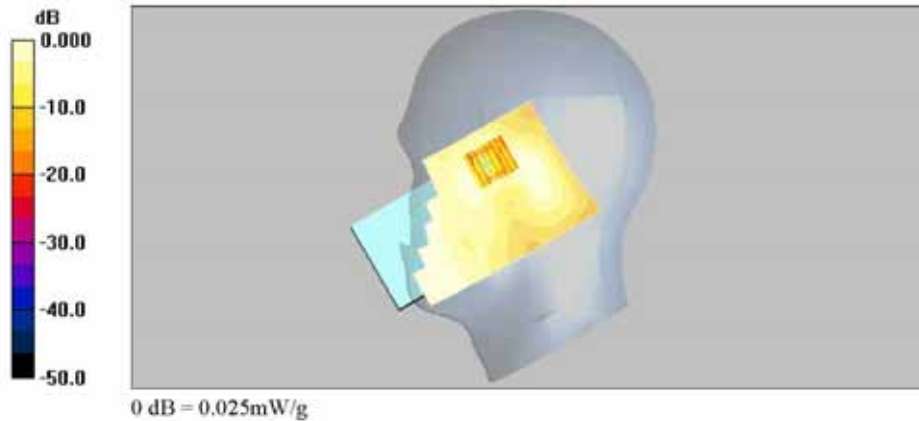

## WLAN Body SAR Test

Date: 2011-07-02

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [WLAN\\_Body.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WLAN\_Body**


Communication System: WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.95$  mho/m;  $\epsilon_r = 52.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(3.94, 3.94, 3.94); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM with CRP\_1900\_2011\_07\_04(left); Type: SAM; Serial: TP-1645
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Body\_11b\_Low\_Front/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 0.289 mW/g

**Body\_11b\_Low\_Front/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 3.13 V/m; Power Drift = 0.029 dB  
 Peak SAR (extrapolated) = 0.603 W/kg  
**SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.142 mW/g**  
 Maximum value of SAR (measured) = 0.284 mW/g

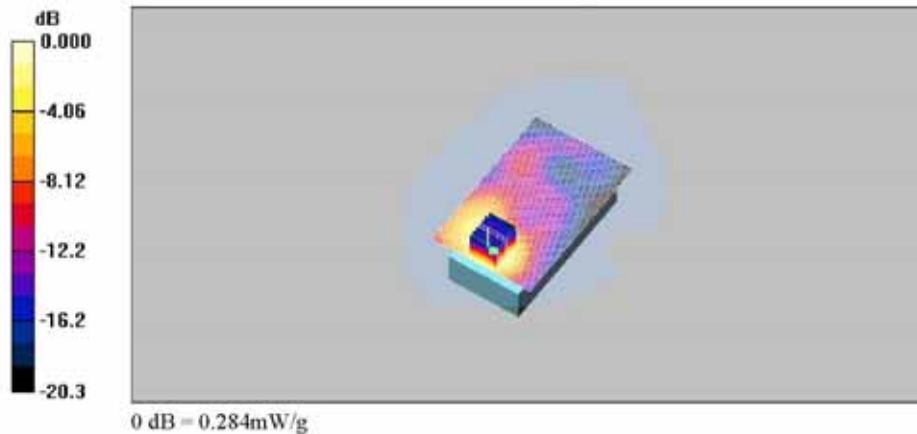

Date: 2011-07-02

Test Laboratory: SGS Korea (Gumpo Laboratory)  
 File Name: [WLAN\\_Body.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WLAN\_Body**


Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.99$  mho/m;  $\epsilon_r = 52.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ET3DV6 - SN1782; ConvF(3.94, 3.94, 3.94); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM with CRP\_1900\_2011\_07\_04(left); Type: SAM; Serial: TP-1645
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Body\_11b\_Mid\_Front/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 0.219 mW/g

**Body\_11b\_Mid\_Front/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 2.98 V/m; Power Drift = -0.198 dB  
 Peak SAR (extrapolated) = 0.469 W/kg  
**SAR(1 g) = 0.210 mW/g; SAR(10 g) = 0.112 mW/g**  
 Maximum value of SAR (measured) = 0.220 mW/g

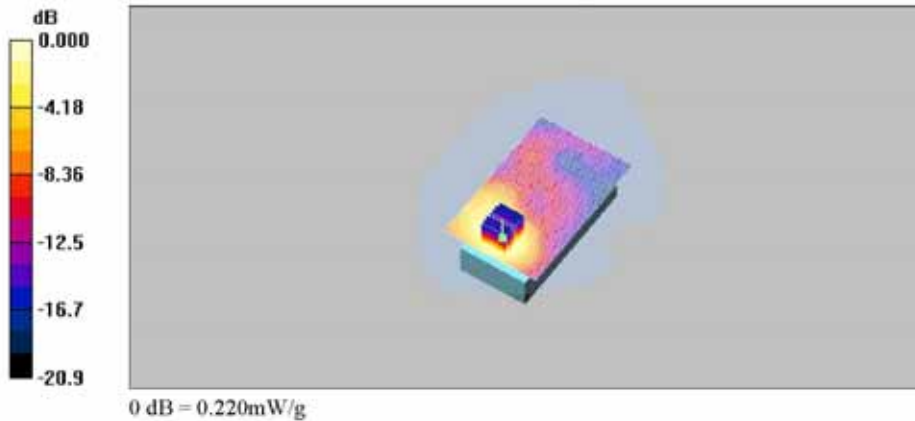

Date: 2011-07-02

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [WLAN\\_Body.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WLAN\_Body**


Communication System: WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 2.02$  mho/m;  $\epsilon_r = 52.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(3.94, 3.94, 3.94); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM with CRP\_1900\_2011\_07\_04(left); Type: SAM; Serial: TP-1645
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Body\_11b\_High\_Front/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 0.340 mW/g

**Body\_11b\_High\_Front/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 3.39 V/m; Power Drift = -0.169 dB  
 Peak SAR (extrapolated) = 0.724 W/kg  
**SAR(1 g) = 0.318 mW/g; SAR(10 g) = 0.166 mW/g**  
 Maximum value of SAR (measured) = 0.333 mW/g

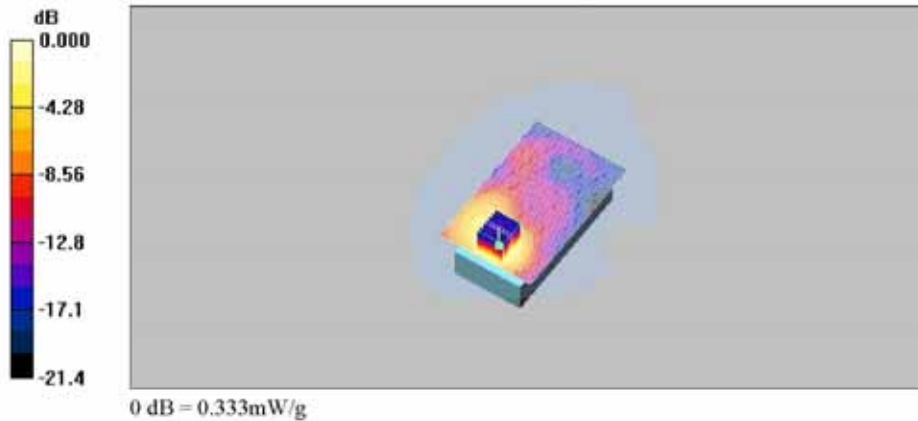

### Z Scan

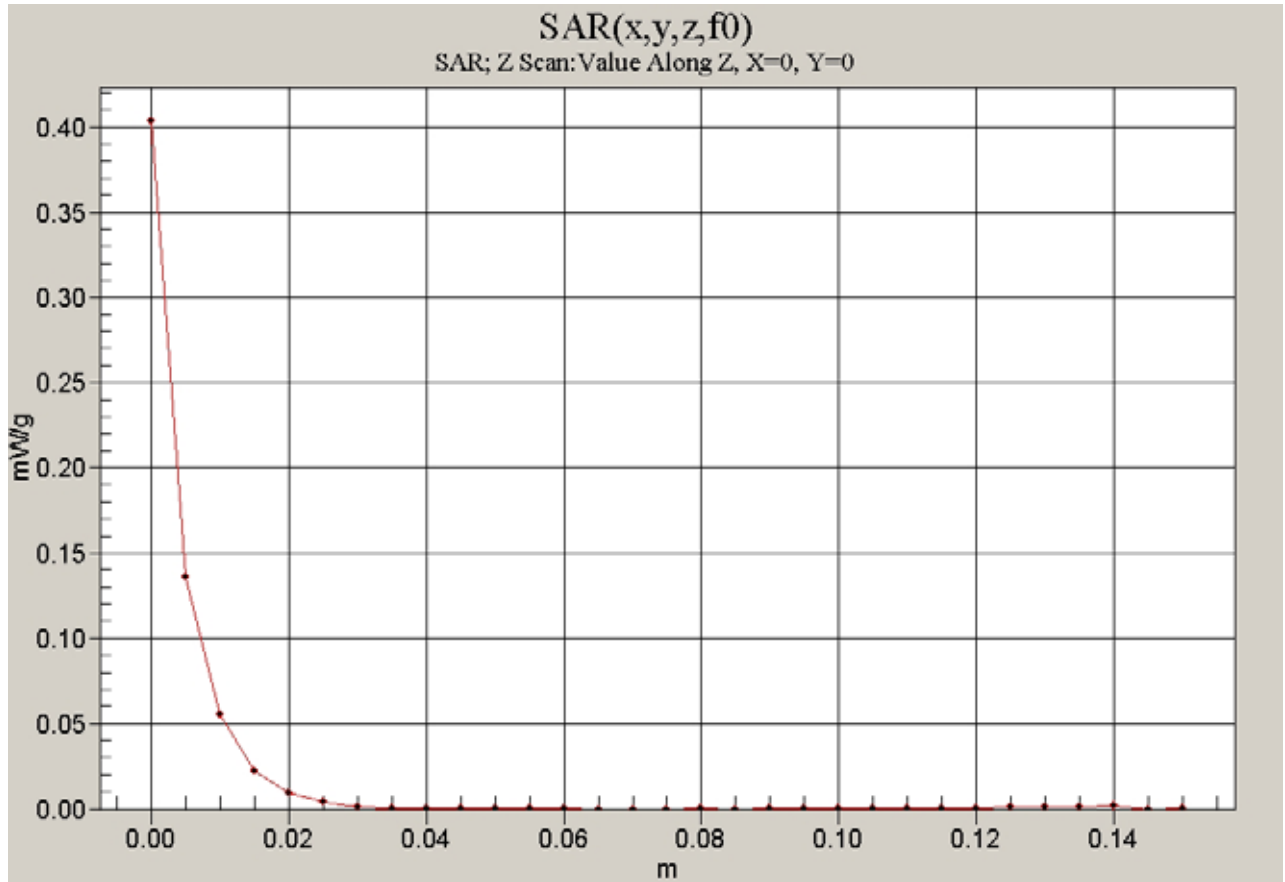

Date: 2011-07-02

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [WLAN\\_Body.da4](#)

**DUT: ALH-9001; Type: Bar; Serial: N/A**  
**Program Name: WLAN\_Body**


Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.99$  mho/m;  $\epsilon_r = 52.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(3.94, 3.94, 3.94); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2011-01-27
- Phantom: SAM with CRP\_1900\_2011\_07\_04(left); Type: SAM; Serial: TP-1645
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Body\_11b\_Mid\_Back/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 0.013 mW/g

**Body\_11b\_Mid\_Back/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 0.960 V/m; Power Drift = 0.133 dB  
 Peak SAR (extrapolated) = 0.030 W/kg  
**SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.00638 mW/g**  
 Maximum value of SAR (measured) = 0.012 mW/g

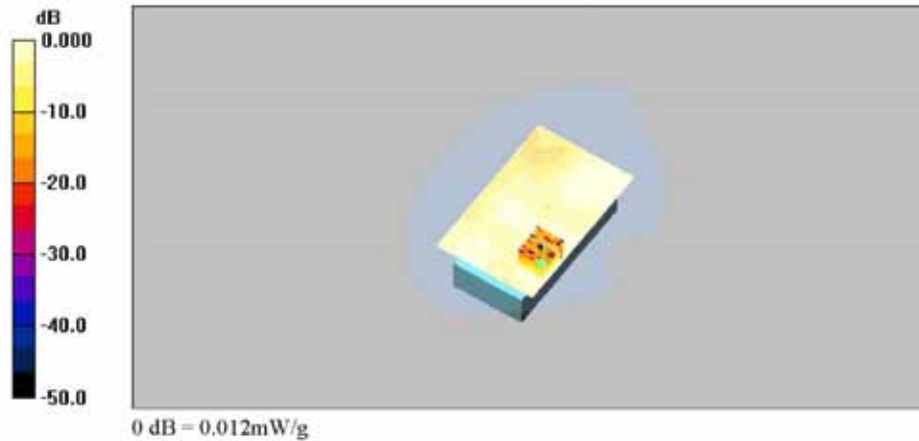



## Appendix B

### Uncertainty Analysis

a	b	c	d	e = f(d,k)	g	l = cxg/e	k
Uncertainty Component	Section in P1528	Tol (%)	Prob . Dist.	Div.	Ci (1g)	1g ui (%)	Vi (Veff)
Probe calibration	E.2.1	6.3	N	1	1	6.30	
Axial isotropy	E.2.2	0.5	R	1.73	0.71	0.20	
hemispherical isotropy	E.2.2	2.6	R	1.73	0.71	1.06	
Boundary effect	E.2.3	0.8	R	1.73	1	0.46	
Linearity	E.2.4	0.6	R	1.73	1	0.35	
System detection limit	E.2.5	0.25	R	1.73	1	0.14	
Readout electronics	E.2.6	0.3	N	1	1	0.30	
Response time	E.2.7	0	R	1.73	1	0.00	
Integration time	E.2.8	2.6	R	1.73	1	1.50	
RF ambient Condition -Noise	E.6.1	3	R	1.73	1	1.73	
RF ambient Condition - reflections	E.6.1	3	R	1.73	1	1.73	
Probe positioning- mechanical tolerance	E.6.2	1.5	R	1.73	1	0.87	
Probe positioning- with respect to phantom	E.6.3	2.9	R	1.73	1	1.67	
Max. SAR evaluation	E.5.2	1	R	1.73	1	0.58	
Test sample positioning	E.4.2	4.75	N	1	1	4.75	9
Device holder uncertainty	E.4.1	3.6	N	1	1	3.60	
Output power variation -SAR drift measurement	6.62	5	R	1.73	1	2.89	
Phantom uncertainty (shape and thickness tolerances)	E.3.1	4	R	1.73	1	2.31	
Liquid conductivity - deviation from target values	E.3.2	5	R	1.73	0.64	1.85	
Liquid conductivity - measurement uncertainty	E.3.2	1.58	N	1	0.64	1.01	5
Liquid permittivity - deviation from target values	E.3.3	5	R	1.73	0.6	1.73	
Liquid permittivity - measurement uncertainty	E.3.3	1.54	N	1	0.6	0.92	5
Combined standard uncertainty				RSS		10.53	216
Expanded uncertainty (95% CONFIDENCE INTERVAL)				K=2		21.06	



Report File No. : F690501/RF-SAR001947-A1  
Date of Issue : 2011-07-26  
Page : 90 / 133

## **Appendix C**

### **Calibration Certificate**

**- PROBE**

**- DAE**

**- 835 MHz, 1900 MHz, 2450 MHz DIPOLE**

## - PROBE Calibration Certificate

**Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS (Dymstec)**

Certificate No: **ET3-1782\_Apr11**

### CALIBRATION CERTIFICATE

Object: **ET3DV6 - SN:1782**

Calibration procedure(s): **QA CAL-01.v7, QA CAL-12.v6, QA CAL-23.v4, QA CAL-25.v3  
 Calibration procedure for dosimetric E-field probes**



Calibration date: **April 14, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41495277	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498067	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	23-Apr-10 (No. DAE4-654_Apr10)	Apr-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	in house check: Oct-11
Network Analyzer HP 8753E	US37390565	18-Oct-01 (in house check Oct-10)	in house check: Oct-11

	Name	Function	Signature
Calibrated by:	Jeton Kastrali	Laboratory Technician	
Approved by:	Kalja Pokovic	Technical Manager	

Issued: April 14, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

**Glossary:**

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

**Methods Applied and Interpretation of Parameters:**

- NORM<sub>x,y,z</sub>: Assessed for E-field polarization  $\theta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z are numerical linearization parameters in dB assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media.
- VR: VR is the validity range of the calibration related to the average diode voltage or DAE voltage in mV.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ET3DV6 – SN:1782

April 14, 2011

# Probe ET3DV6

## SN:1782

Manufactured: April 15, 2003  
Calibrated: April 14, 2011

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

ET3DV6- SN:1782

April 14, 2011

## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1782

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	2.07	1.66	1.92	± 10.1 %
DCP (mV) <sup>B</sup>	96.4	96.6	97.6	

### Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc <sup>C</sup> (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	111.1	±1.9 %
			Y	0.00	0.00	1.00	141.0	
			Z	0.00	0.00	1.00	145.1	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter; uncertainty not required.

<sup>C</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ET3DV6- SN:1782

April 14, 2011

## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1782

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>c</sup>	Relative Permittivity <sup>f</sup>	Conductivity (S/m) <sup>f</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	43.5	0.87	6.89	6.89	6.89	0.21	2.29	± 13.4 %
835	41.5	0.90	6.22	6.22	6.22	0.88	1.63	± 12.0 %
1750	40.1	1.37	5.14	5.14	5.14	0.57	2.53	± 12.0 %
1900	40.0	1.40	4.95	4.95	4.95	0.58	2.54	± 12.0 %
2450	39.2	1.80	4.37	4.37	4.37	0.80	1.93	± 12.0 %

<sup>c</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>f</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

ET3DV6- SN:1782

April 14, 2011

## DASY/EASY - Parameters of Probe: ET3DV6- SN:1782

### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>c</sup>	Relative Permittivity <sup>f</sup>	Conductivity (S/m) <sup>f</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	56.7	0.94	7.49	7.49	7.49	0.16	2.34	± 13.4 %
835	55.2	0.97	6.03	6.03	6.03	0.85	1.72	± 12.0 %
1750	53.4	1.49	4.54	4.54	4.54	0.64	2.70	± 12.0 %
1900	53.3	1.52	4.34	4.34	4.34	0.63	2.57	± 12.0 %
2450	52.7	1.95	3.94	3.94	3.94	0.99	1.21	± 12.0 %

<sup>c</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.


<sup>f</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



ET3DV6-SN:1782

April 14, 2011

## Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)


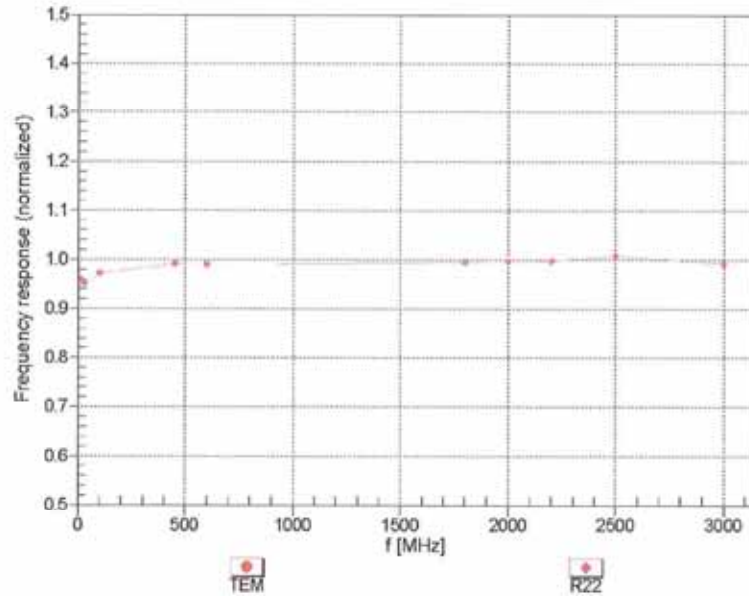


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

ET3DV6-SN:1782

April 14, 2011

## Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

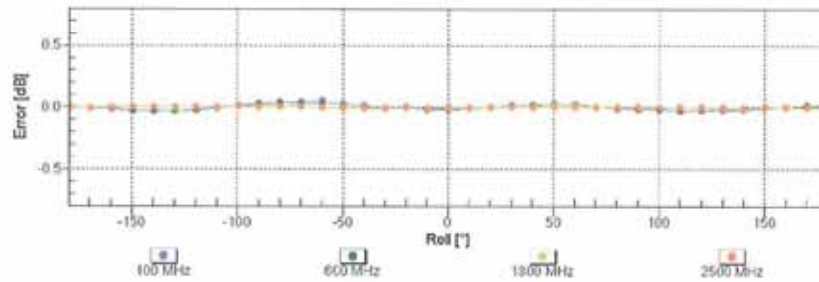
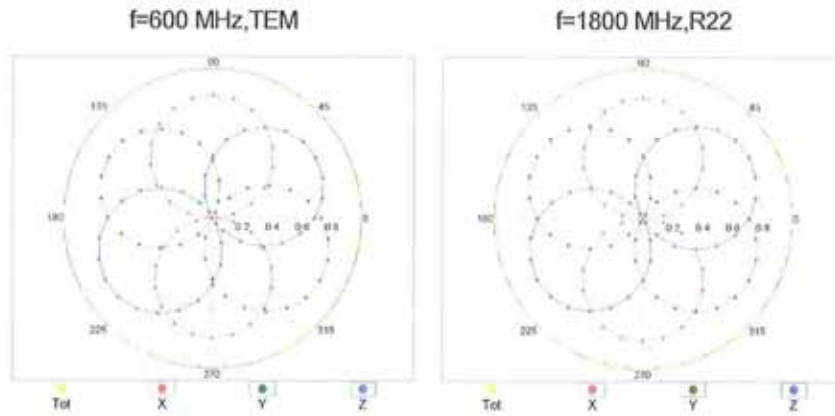


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

ET3DV6-SN-1782

April 14, 2011

## Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f = 900 \text{ MHz}$ )

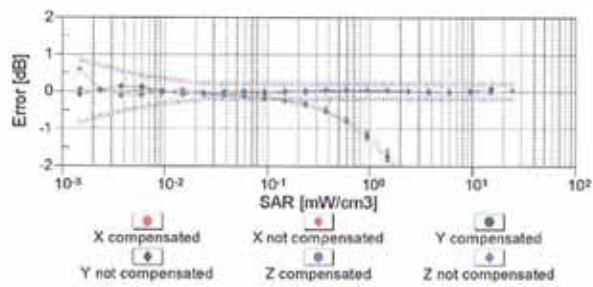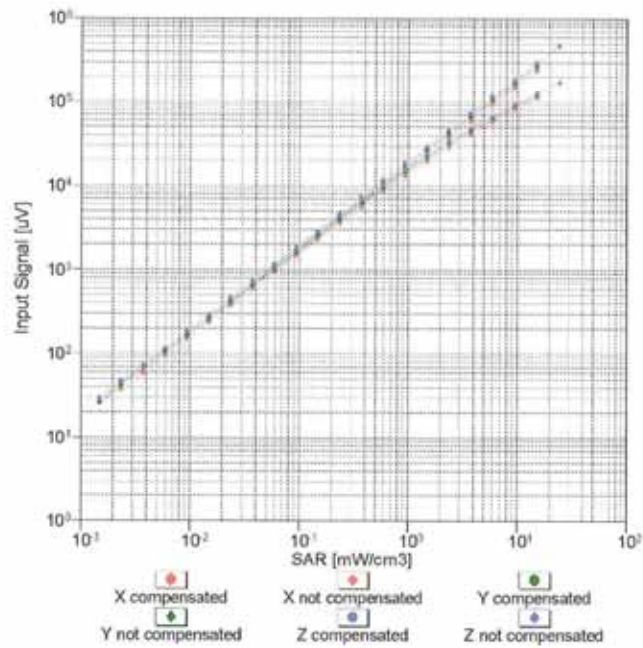


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )


ET3DV6-SN:1782

April 14, 2011

## Conversion Factor Assessment

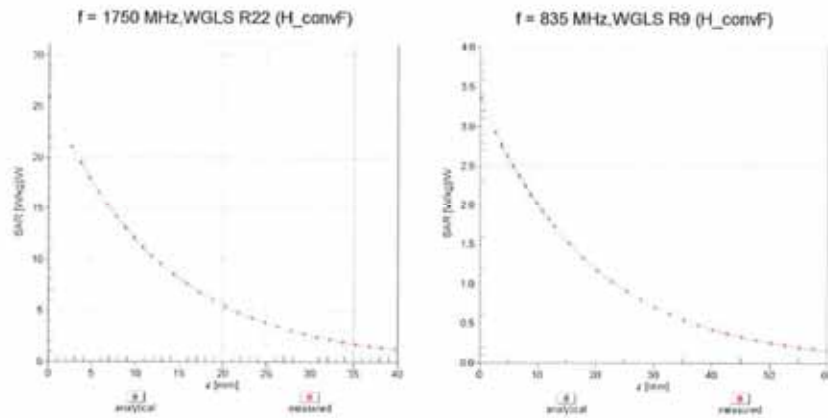

## Deviation from Isotropy in Liquid Error ( $\phi, \theta$ ), $f = 900$ MHz

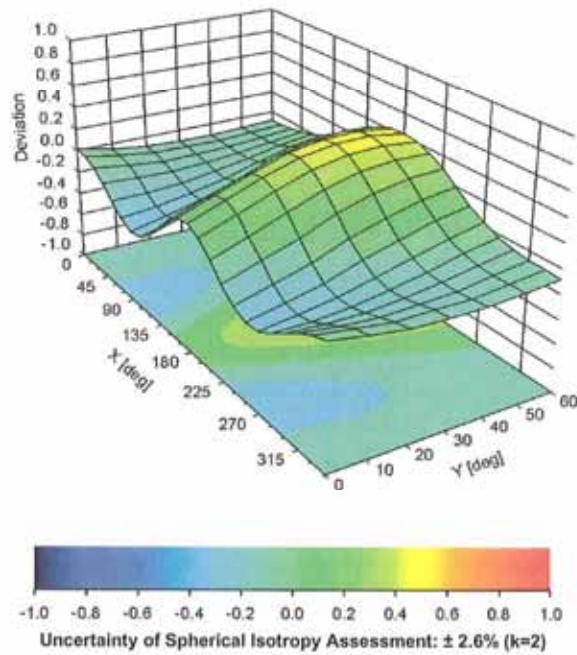

ET3DV6- SN:1782

April 14, 2011

### DASY/EASY - Parameters of Probe: ET3DV6 - SN:1782

#### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

## -DAE Calibration Certificate

**Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS (Dymstec)**

Certificate No: **DAE3-567\_Jan11**

### CALIBRATION CERTIFICATE

Object **DAE3 - SD.000 D03 AA - SN: 567**

Calibration procedure(s) **QA CAL-06.v22  
 Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **January 27, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	28-Sep-10 (No:10376)	Sep-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMS 006 AB 1004	07-Jun-10 (in house check)	In house check: Jun-11

Calibrated by:	Name <b>Andrea Guntli</b>	Function <b>Technician</b>	Signature 
Approved by:	Name <b>Fin Bornholt</b>	Function <b>R&amp;D Director</b>	Signature 

Issued: January 27, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

## Glossary

**DAE** data acquisition electronics  
**Connector angle** information used in DASY system to align probe sensor X to the robot coordinate system.

## Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
  - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
  - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
  - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
  - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - **Input resistance:** Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
  - **Power consumption:** Typical value for information. Supply currents in various operating modes.

**DC Voltage Measurement**

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 $\mu$ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.644 $\pm$ 0.1% (k=2)	404.400 $\pm$ 0.1% (k=2)	404.475 $\pm$ 0.1% (k=2)
Low Range	3.94940 $\pm$ 0.7% (k=2)	3.96974 $\pm$ 0.7% (k=2)	3.94828 $\pm$ 0.7% (k=2)

**Connector Angle**

Connector Angle to be used in DASY system	5.5 $\pm$ 1 $^{\circ}$
---	------------------------



**Appendix**
**1. DC Voltage Linearity**

High Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	200011.1	0.86	0.00
Channel X + Input	20005.53	5.63	0.03
Channel X - Input	-19994.55	6.05	-0.03
Channel Y + Input	200012.0	3.19	0.00
Channel Y + Input	19998.16	-0.94	-0.00
Channel Y - Input	-19999.31	0.89	-0.00
Channel Z + Input	200007.6	-0.57	-0.00
Channel Z + Input	20000.62	1.02	0.01
Channel Z - Input	-19997.10	3.20	-0.02

Low Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	1999.6	-0.43	-0.02
Channel X + Input	200.86	0.86	0.43
Channel X - Input	-198.93	1.07	-0.54
Channel Y + Input	2000.2	0.40	0.02
Channel Y + Input	200.07	0.07	0.03
Channel Y - Input	-199.81	0.09	-0.05
Channel Z + Input	1999.8	-0.29	-0.01
Channel Z + Input	199.45	-0.75	-0.38
Channel Z - Input	-200.35	-0.25	0.12

**2. Common mode sensitivity**

DASYS measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading ( $\mu\text{V}$ )	Low Range Average Reading ( $\mu\text{V}$ )
Channel X	200	3.83	1.88
	-200	0.20	-2.32
Channel Y	200	0.69	-0.01
	-200	-1.13	-1.19
Channel Z	200	4.39	4.66
	-200	-6.15	-6.31

**3. Channel separation**

DASYS measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X ( $\mu\text{V}$ )	Channel Y ( $\mu\text{V}$ )	Channel Z ( $\mu\text{V}$ )
Channel X	200	-	2.13	-0.21
Channel Y	200	3.01	-	3.24
Channel Z	200	1.69	-1.11	-

#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16333	16454
Channel Y	16169	16436
Channel Z	15951	16115

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M $\Omega$

	Average ( $\mu$ V)	min. Offset ( $\mu$ V)	max. Offset ( $\mu$ V)	Std. Deviation ( $\mu$ V)
Channel X	-0.23	-1.40	0.68	0.42
Channel Y	-0.84	-2.05	0.49	0.41
Channel Z	-0.76	-1.62	0.54	0.38

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <251A

#### 7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

#### 8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

#### 9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

## - 835 MHz Dipole Calibration Certificate

**Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client: **SGS KES (Dymstec)**

Certificate No.: **D835V2-490\_May10**

### CALIBRATION CERTIFICATE

Object: **D835V2 - SN: 490**

Calibration procedure(s): **QA CAL-05.v7  
 Calibration procedure for dipole validation kits**



Calibration date: **May 21, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37460704	08-Oct-09 (No. 217-01086)	Oct-10
Power sensor HP 8481A	US37292783	08-Oct-09 (No. 217-01086)	Oct-10
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	02-Mar-10 (No. DAE4-601_Mar10)	Mar-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	in house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	in house check: Oct-11
Network Analyzer HP 8753E	US37390585 54206	18-Oct-01 (in house check Oct-09)	in house check: Oct-10

Calibrated by:	Name Jeton Kastrali	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 

Issued: May 21, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.7 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
Head TSL temperature during test	(22.5 $\pm$ 0.2) °C	----	----

### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.42 mW / g
SAR normalized	normalized to 1W	9.68 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>9.62 mW /g <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.58 mW / g
SAR normalized	normalized to 1W	6.32 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>6.29 mW /g <math>\pm</math> 16.5 % (k=2)</b>

### Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.2 ± 6 %	0.98 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	---	---

### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.49 mW / g
SAR normalized	normalized to 1W	10.0 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>9.84 mW / g ± 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.63 mW / g
SAR normalized	normalized to 1W	6.52 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>6.47 mW / g ± 16.5 % (k=2)</b>

**Appendix**

**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	49.9 $\Omega$ - 5.3 $j\Omega$
Return Loss	- 25.4 dB

**Antenna Parameters with Body TSL**

Impedance, transformed to feed point	45.4 $\Omega$ - 6.9 $j\Omega$
Return Loss	- 21.2 dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.381 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	May 19, 2003

**DASY5 Validation Report for Head TSL**

Date/Time: 21.05.2010 10:57:47

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:490**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL900

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.91 \text{ mho/m}$ ;  $\epsilon_r = 41.9$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3205; ConvF(6.03, 6.03, 6.03); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61


**Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement**  
 grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.1 V/m; Power Drift = 0.00869 dB

Peak SAR (extrapolated) = 3.6 W/kg

**SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.58 mW/g**


Maximum value of SAR (measured) = 2.8 mW/g

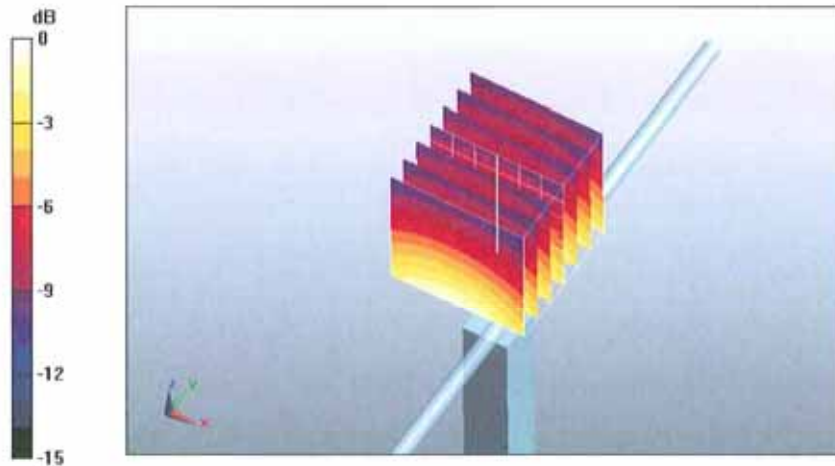

0 dB = 2.8mW/g



## Impedance Measurement Plot for Head TSL

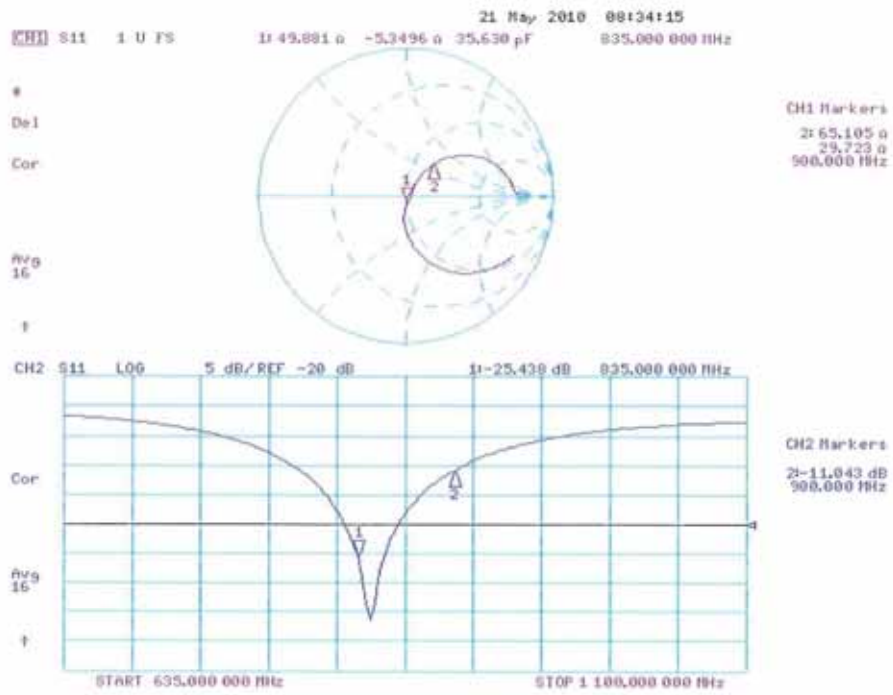

**DASY5 Validation Report for Body**

Date/Time: 20.05.2010 10:28:20

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:490**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL900

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.98 \text{ mho/m}$ ;  $\epsilon_r = 54.2$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3205; ConvF(5.86, 5.86, 5.86); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61


**Pin250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm**

Reference Value = 56.1 V/m; Power Drift = 0.000723 dB

Peak SAR (extrapolated) = 3.65 W/kg


**SAR(1 g) = 2.49 mW/g; SAR(10 g) = 1.63 mW/g**

Maximum value of SAR (measured) = 2.89 mW/g

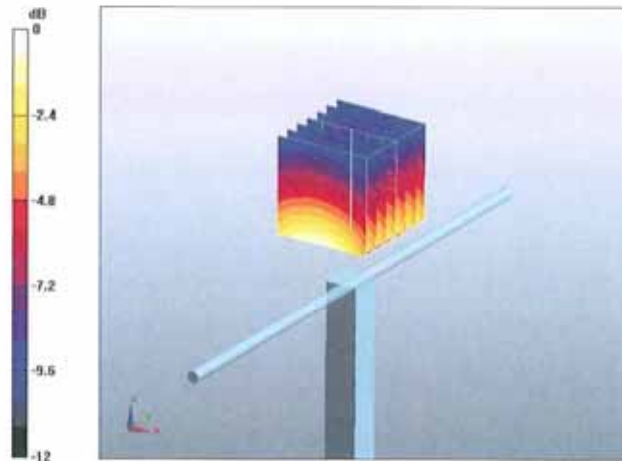

0 dB = 2.89mW/g

## Impedance Measurement Plot for Body TSL

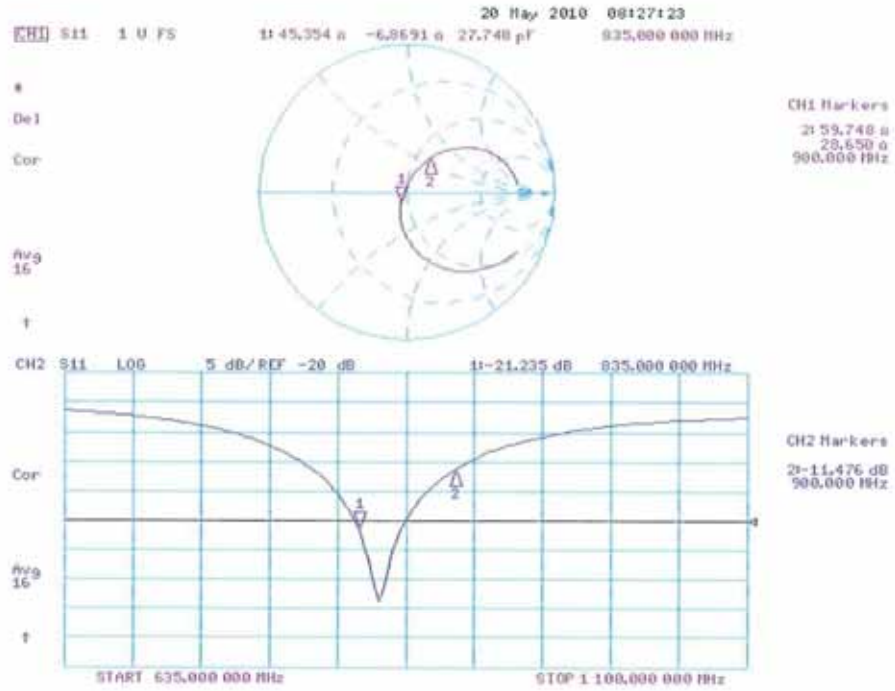

## - 1900 MHz Dipole Calibration Certificate

**Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS KES (Dymstec)**

Certificate No: **D1900V2-5d033\_May10**

### CALIBRATION CERTIFICATE

Object: **D1900V2 - SN: 5d033**

Calibration procedure(s): **QA CAL-05.v7  
 Calibration procedure for dipole validation kits**



Calibration date: **May 26, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10
Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	02-Mar-10 (No. DAE4-601_Mar10)	Mar-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

	Name	Function	Signature
Calibrated by:	Dimce Iliev	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: May 27, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.7 $\pm$ 6 %	1.41 mho/m $\pm$ 6 %
Head TSL temperature during test	(21.5 $\pm$ 0.2) °C	----	----

### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.90 mW / g
SAR normalized	normalized to 1W	39.6 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>39.4 mW / g <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.15 mW / g
SAR normalized	normalized to 1W	20.6 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>20.5 mW / g <math>\pm</math> 16.5 % (k=2)</b>

### Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.1 ± 6 %	1.52 mho/m ± 6 %
Body TSL temperature during test	(21.8 ± 0.2) °C	----	----

### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.3 mW / g
SAR normalized	normalized to 1W	41.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	41.3 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.50 mW / g
SAR normalized	normalized to 1W	22.0 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	22.0 mW / g ± 16.5 % (k=2)

**Appendix**

**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	49.5 $\Omega$ + 3.8 j $\Omega$
Return Loss	- 28.4 dB

**Antenna Parameters with Body TSL**

Impedance, transformed to feed point	47.1 $\Omega$ + 4.3 j $\Omega$
Return Loss	- 25.4 dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.205 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	March 17, 2003



**DASY5 Validation Report for Head TSL**

Date/Time: 17.05.2010 15:51:21

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d033**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U11 BB

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.41 \text{ mho/m}$ ;  $\epsilon_r = 39.8$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.09, 5.09, 5.09); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61


**Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 97.4 V/m; Power Drift = 0.00578 dB

Peak SAR (extrapolated) = 18.3 W/kg


**SAR(1 g) = 9.9 mW/g; SAR(10 g) = 5.15 mW/g**

Maximum value of SAR (measured) = 12.4 mW/g

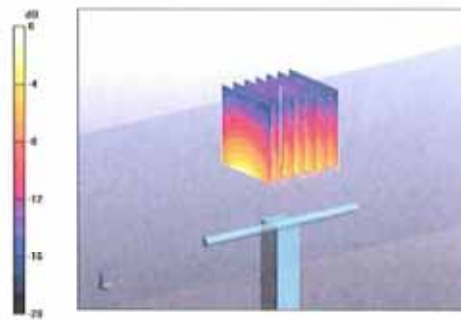

0 dB = 12.4mW/g

### Impedance Measurement Plot for Head TSL

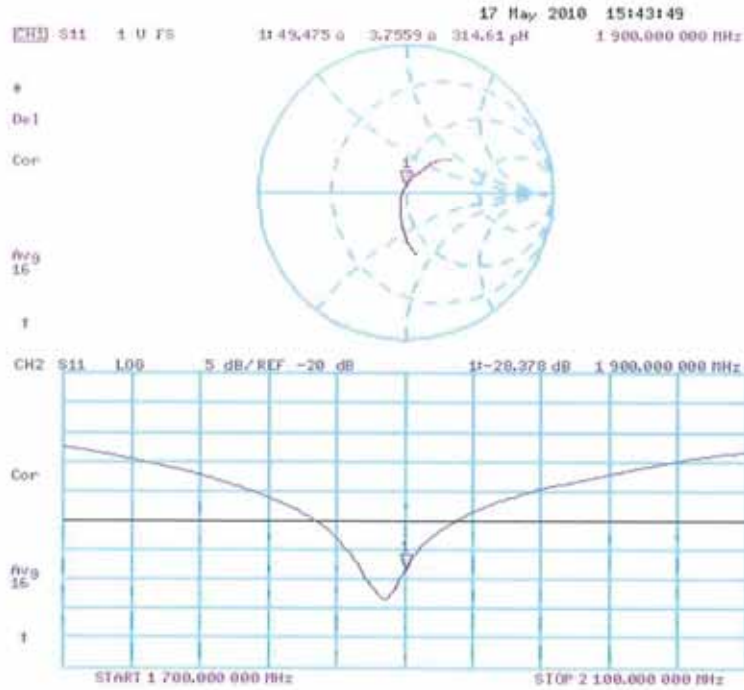

**DASY5 Validation Report for Body**

Date/Time: 26.05.2010 15:04:02

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d033**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U11 BB

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.59, 4.59, 4.59); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61


**Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.2 V/m; Power Drift = -0.00657 dB

Peak SAR (extrapolated) = 17.1 W/kg


**SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.5 mW/g**

Maximum value of SAR (measured) = 12.9 mW/g

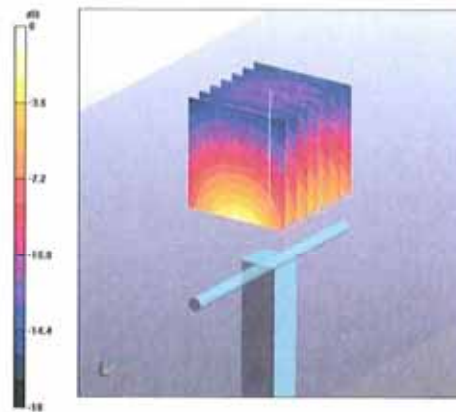

0 dB = 12.9mW/g

## Impedance Measurement Plot for Body TSL

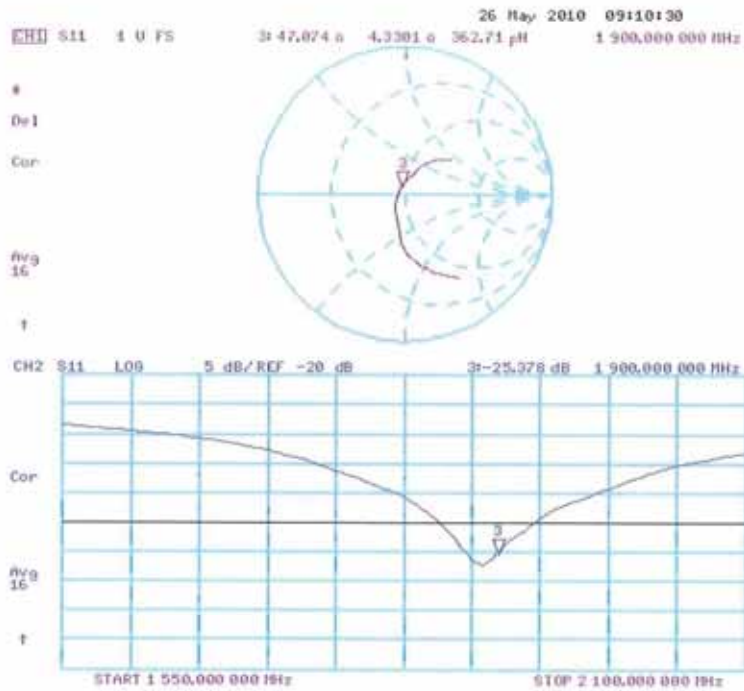

## - 2450 MHz Dipole Calibration Certificate

**Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS (Dymstec)**

Certificate No: **D2450V2-734\_May10**

### CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 734**

Calibration procedure(s) **QA CAL-05.v7  
 Calibration procedure for dipole validation kits**

Calibration date: **May 27, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10
Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	02-Mar-10 (No. DAE4-601_Mar10)	Mar-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	in house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	in house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	in house check: Oct-10

	Name	Function	Signature
Calibrated by:	Dimce Iliev	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: May 27, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.0 $\pm$ 6 %	1.76 mho/m $\pm$ 6 %
Head TSL temperature during test	(21.5 $\pm$ 0.2) °C	----	----

### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	12.8 mW / g
SAR normalized	normalized to 1W	51.2 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	51.7 mW / g $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.03 mW / g
SAR normalized	normalized to 1W	24.1 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	24.2 mW / g $\pm$ 16.5 % (k=2)

### Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.6 ± 6 %	1.97 mho/m ± 6 %
Body TSL temperature during test	(21.8 ± 0.2) °C	----	----

### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.4 mW / g
SAR normalized	normalized to 1W	53.6 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	53.5 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.31 mW / g
SAR normalized	normalized to 1W	25.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	25.2 mW / g ± 16.5 % (k=2)



**Appendix**

**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	53.8 $\Omega$ + 3.2 j $\Omega$
Return Loss	- 26.4 dB

**Antenna Parameters with Body TSL**

Impedance, transformed to feed point	49.8 $\Omega$ + 4.4 j $\Omega$
Return Loss	- 27.1 dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.153 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.  
 No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	May 07, 2003

**DASY5 Validation Report for Head TSL**

Date/Time: 25.05.2010 14:48:31

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:734**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL U11 BB

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.76$  mho/m;  $\epsilon_r = 39$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement**


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.2 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 26.1 W/kg


**SAR(1 g) = 12.8 mW/g; SAR(10 g) = 6.03 mW/g**

Maximum value of SAR (measured) = 16.7 mW/g

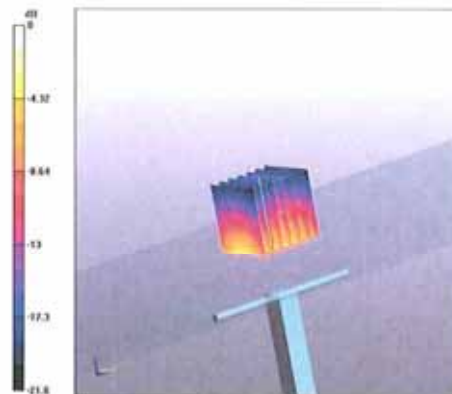

0 dB = 16.7mW/g

## Impedance Measurement Plot for Head TSL

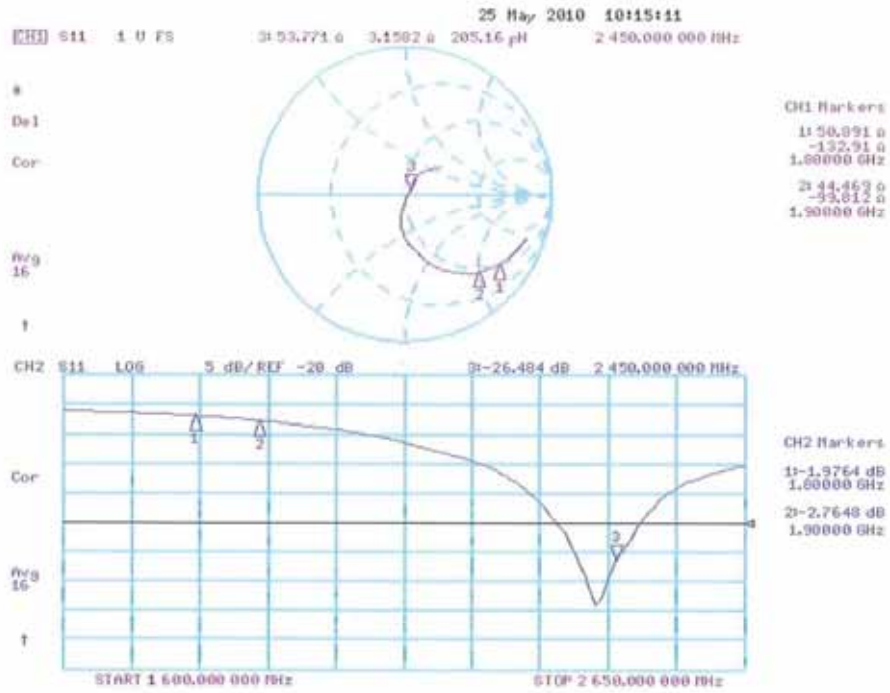

**DASY5 Validation Report for Body**

Date/Time: 27.05.2010 10:14:45

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:734**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL U11 BB

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.97$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.31, 4.31, 4.31); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement**


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.7 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 27.3 W/kg

**SAR(1 g) = 13.4 mW/g; SAR(10 g) = 6.31 mW/g**

Maximum value of SAR (measured) = 17.4 mW/g

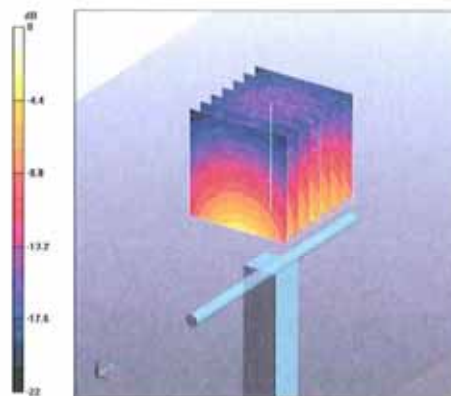

0 dB = 17.4mW/g

## Impedance Measurement Plot for Body TSL

