



683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea. 449-080
 Tel: +82-31-321-2664 Fax: +82-31-321-1664
<http://www.digitalemc.com>

CERTIFICATE OF COMPLIANCE
FCC Part 15B Certification

Dates of Tests: August 06 ~ 08, 2007
 Test Report S/N:DR50110708H
 Test Site : DIGITAL EMC CO., LTD.

FCC ID.

P7KRIR-900

APPLICANT

Diasonic Technology Co., Ltd.

FCC Classification	:	Part 15 Class B Personal Computers & Peripherals
Device name	:	Digital Voice Recorder
Manufacturer	:	Diasonic Technology Co., Ltd. #321-43, Suksu-dong, Manan-ku, Anyang-city, Kyungki-do, Korea.
Model name(Brand Name)	:	RIR-900 (TM SLIM)
Test Device Serial number	:	Identical prototype
FCC Rule Part(s)	:	FCC Part 15 Subpart B; ANSI C 63.4-2003
Data of issue	:	August 21, 2007

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



NVLAP LAB CODE 200559-0

TABLE OF CONTENTS

1. GENERAL INFORMATIONS -----	3
2. INFORMATIONS ABOUT TEST ITEM -----	4
3. TEST REPORT -----	5
3.1 SUMMARY OF TESTS -----	5
3.2 TRANSMITTER REQUIREMENTS -----	6
3.2.1 RADIATED EMISSION -----	6
3.2.2 CONDUCTED EMISSION -----	11
APPENDIX TEST EQUIPMENT USED FOR TESTS -----	16

1. General Informations

This report contains the result of tests performed by:

DIGITAL EMC CO., LTD.

Address : 683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea. 449-080

<http://www.digitalemc.com> E-mail : shins@digitalemc.com

Tel: +82-31-321-2664 Fax: +82-31-321-1664

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.
This laboratory is accredited by NVLAP for NVLAP Lab. Code : 200559-0.

Test operator: Engineer

August 21, 2007

Tae-Hun Kim

th.kim

Data

Name

Signature

Report Reviewed By: Manager

August 21, 2007

Young-Kyu Shin

Shin

Data

Name

Signature

Ordering party:

Company name	:	Diasonic Technology Co., Ltd.
Address	:	#321-43, Suksu-dong, Manan-ku,
City/town	:	Anyang-city, Kyungki-do
Country	:	Korea.
Zip code	:	430-040
Date of order	:	July 11, 2007

2. Informations about test item

RIR-900

2.1 Equipment information

Kind of Equipment	Digital Voice Recorder
Model No.(Brand Name)	RIR-900 (TM SLIM)
Serial No.	None
Memory Size	2GB
Type of Sample Tested	Pre-Production
Rating Power Supply (Used AC/DC adapter)	Model No : UL110-0515 Manufacture : UNIFIVE Co., Ltd. Input : AC100-120V, 50/60Hz, 0.3A Output : DC5V, 1.5A
High Frequency	32.768kHz, 12MHz
Tested Power Supply	1 Phase 120Vac, 60Hz

2.2 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
PC	LG	Y8Y	408KIEV102124
LCD Monitor	LENOVO KOREA LCC.INC	6135-AB1	N/A
Printer	SAMSUNG	SRP-770	SRP77008060035
Mouse	CHIC TECHNOLOGY	SMOP5000WX	04010159128
Keyboard	GREAT PLEASURE ELECTRONICS	SWT1000	N/A

2.3 EMI Suppression Device(s)/Modifications

None

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Status (note 1)
Transmitter requirements		
15.109	Radiated Emission	C
15.107	Conducted Emissions	C
Note 1: C= Complies NC=Not Complies NT=Not Tested NA=Not Applicable		

The sample was tested according to the following specification:

FCC Parts 15B; ANSI C-63.4-2003

3.2 Transmitter requirements

3.2.1 Radiated Emission

Procedure:

In the frequency range of 30MHz to 1GHz, the Electric Field strength was measured on a 10m Semi Anechoic Chamber with a reference ground plane and at a distance of 10m. The height of the measuring antenna was varied between 1 to 4 m and the table (height: 0.8m) was rotated a full revolution order to obtain maximum values of the electric field intensity. The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report. For further description of the configuration refer to the picture of the test set-up. Measurements were performed with a quasi-peak detector.

The spectrum analyzer is set to:

RBW = 120 kHz (30MHz ~ 1 GHz)

VBW \geq RBW

= 1 MHz (1 GHz ~ 10th harmonic)

Trace = max hold

Detector function = peak / Quasi-peak / average

Sweep = auto

Measurement Result: **Complies**

- Refer to the Next page

Minimum Standard: **LIMIT**

Frequency (MHz)	Limit (dBuV/m) @ 10m
30 ~ 230	30
230~ 1000	37

Radiated Emissions

Test mode : Play mode




RADIATED EMISSION

Date : 2007-08-08 22:26:38

Model Name	:	RIR-900	Reference No.	:
Model No.	:		Power Supply	:
Serial No.	:		Temp/Humi	:
Test Condition	:	RECODING	Operator	:

Memo :

LIMIT : CISPR Pub.22 Class B (10m)
MARGIN: 6 dB

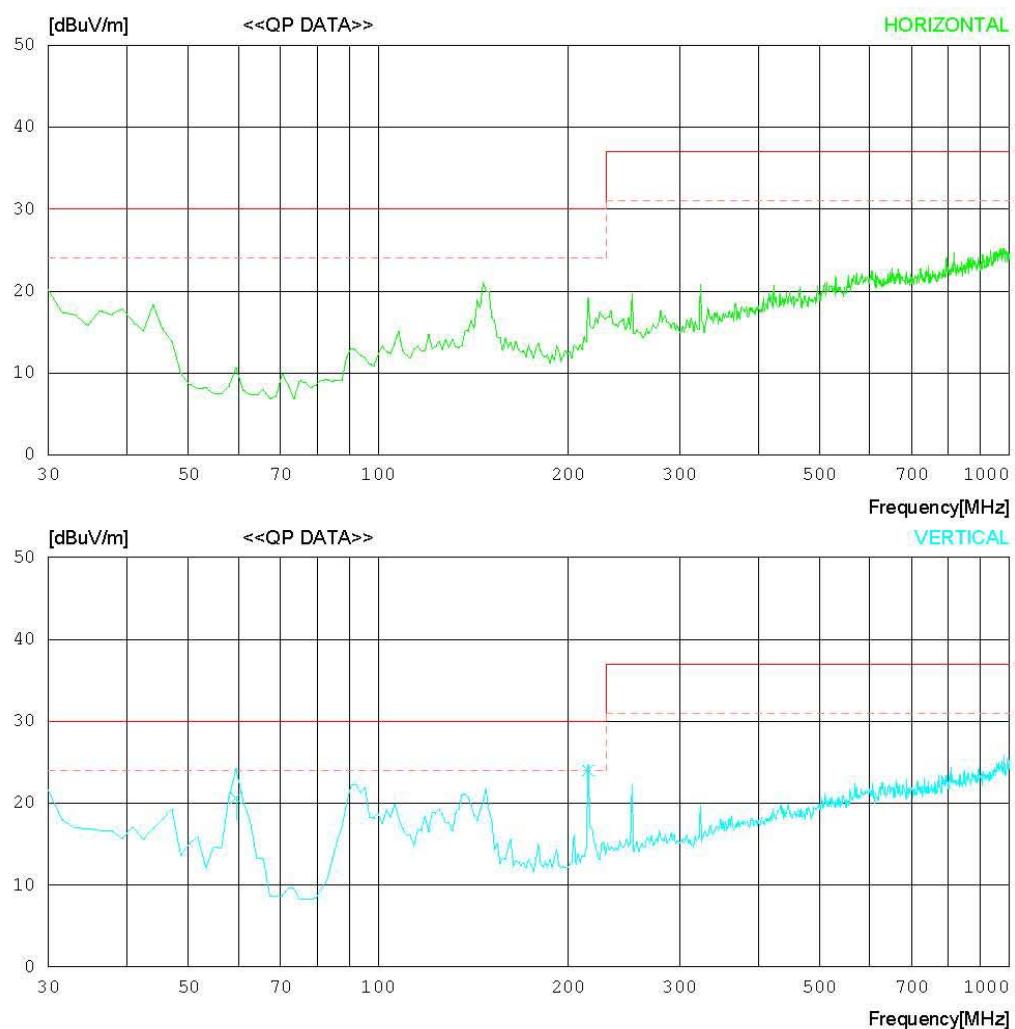

RADIATED EMISSION

Date : 2007-08-08 22:26:38

Model Name	:	RIR-900	Reference No.	:	
Model No.	:		Power Supply	:	120V 60Hz
Serial No.	:		Temp/Humi	:	22'C 74%
Test Condition	:	RECODING	Operator	:	T.H.KIM

Memo :

LIMIT : CISPR Pub.22 Class B (10m)
MARGIN: 6 dB

No.	FREQ [MHz]	READING [dBuV]	ANT QP [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Vertical -----										
1	59.535	36.5	5.8	1.0	22.7	20.6	30.0	9.4	201	0
2	214.984	34.1	11.3	1.8	23.2	24.0	30.0	6.0	100	24

Radiated Emissions


Test mode : PC mode

RADIATED EMISSION

Date : 2007-08-08 23:15:32

Model Name	:	RIR-900	Reference No.	:	
Model No.	:		Power Supply	:	120V 60Hz
Serial No.	:		Temp/Humi	:	22°C 74%
Test Condition	:	PC MODE	Operator	:	T.H.KIM

Memo :

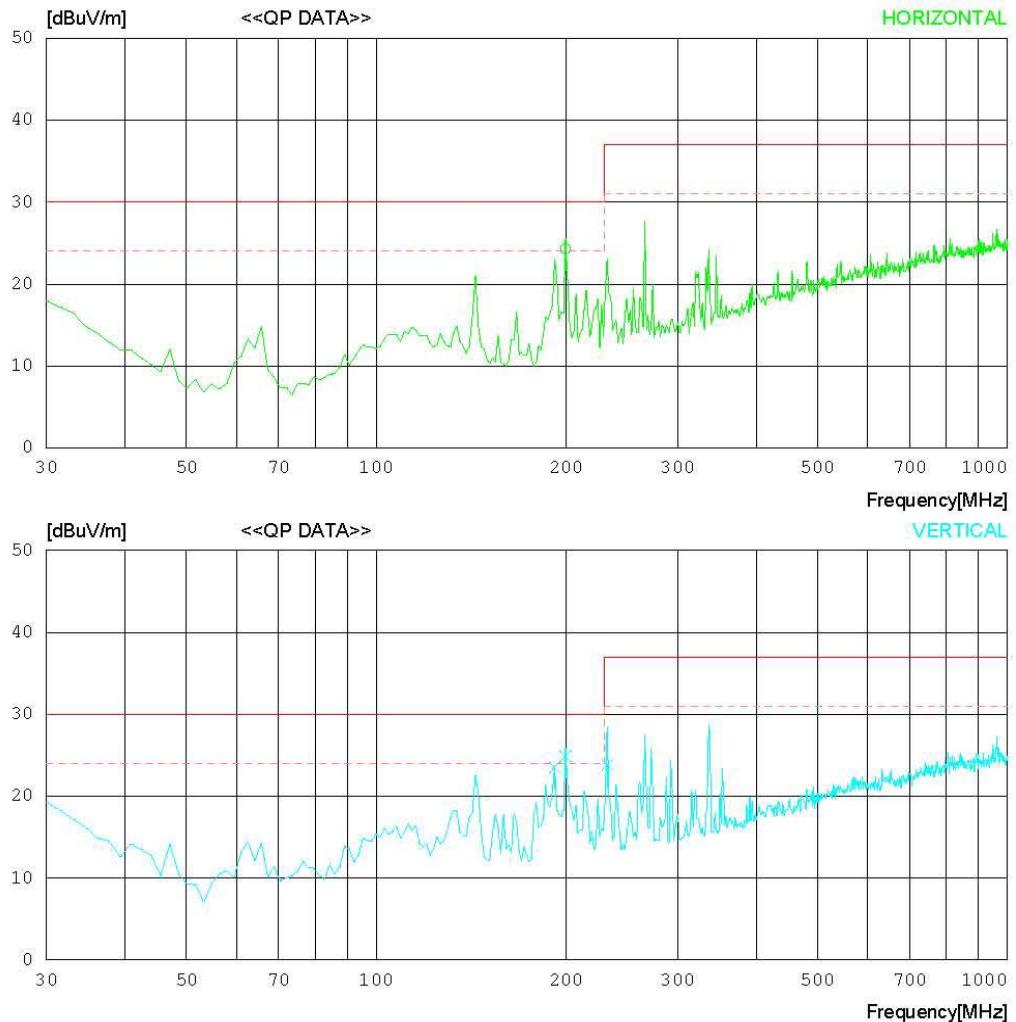LIMIT : CISPR Pub.22 Class B (10m)
MARGIN: 6 dB

RADIATED EMISSION

Date : 2007-08-08 23:15:32

Model Name	:	RIR-900	Reference No.	:
Model No.	:		Power Supply	:
Serial No.	:		Temp/Humi	:
Test Condition	:	PC MODE	Operator	:

Memo	:
------	---

LIMIT : CISPR Pub.22 Class B (10m)
MARGIN: 6 dB

No.	FREQ [MHz]	READING [dBuV]	ANT QP [dB]	LOSS [dB]	GAIN [dBuV/m]	RESULT [dBuV/m]	LIMIT [dB]	MARGIN [cm]	ANTENNA [DEG]	TABLE
----- Horizontal -----										
1	199.439	36.8	8.8	1.8	23.1	24.3	30.0	5.7	400	1
----- Vertical -----										
2	191.667	36.3	8.6	1.7	23.1	23.5	30.0	6.5	100	1
3	199.439	37.4	8.8	1.8	23.1	24.9	30.0	5.1	100	1
4	232.084	35.4	9.8	1.9	23.3	23.8	37.0	13.2	100	197

3.2.2 Conducted Emission.

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its receiving function. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: **Complies**

- During the charging mode, this EUT was not applied because The EUT couldn't the transmission.

Minimum Standard: FCC Part 15.107/CISPR 22

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Measurement Setup



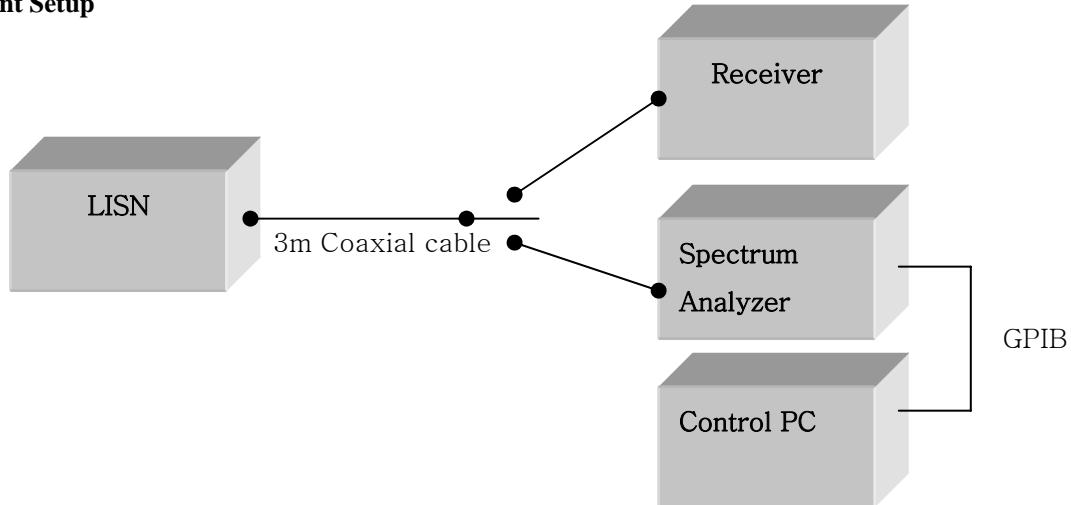


Figure 2: Measurement setup for AC Conducted Emission

Recording Mode / Graph

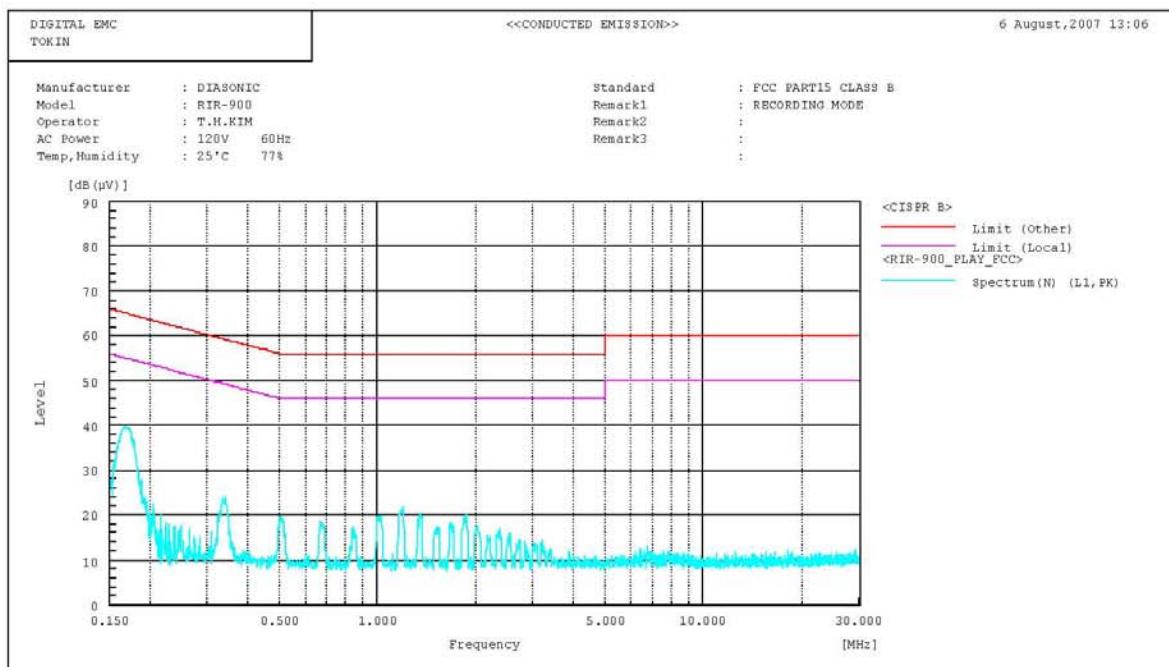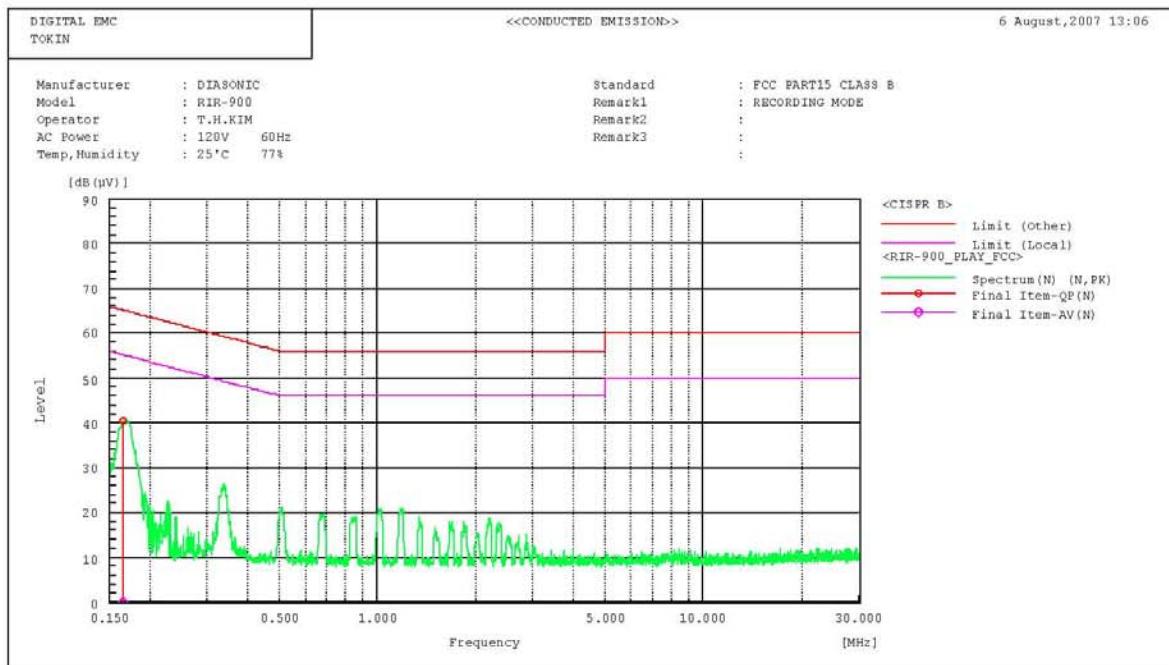

Recording Mode / Data



<<CONDUCTED EMISSION>>

6 August, 2007 13:05

Final Result

THE JOURNAL OF CLIMATE

PC link Mode / Graph

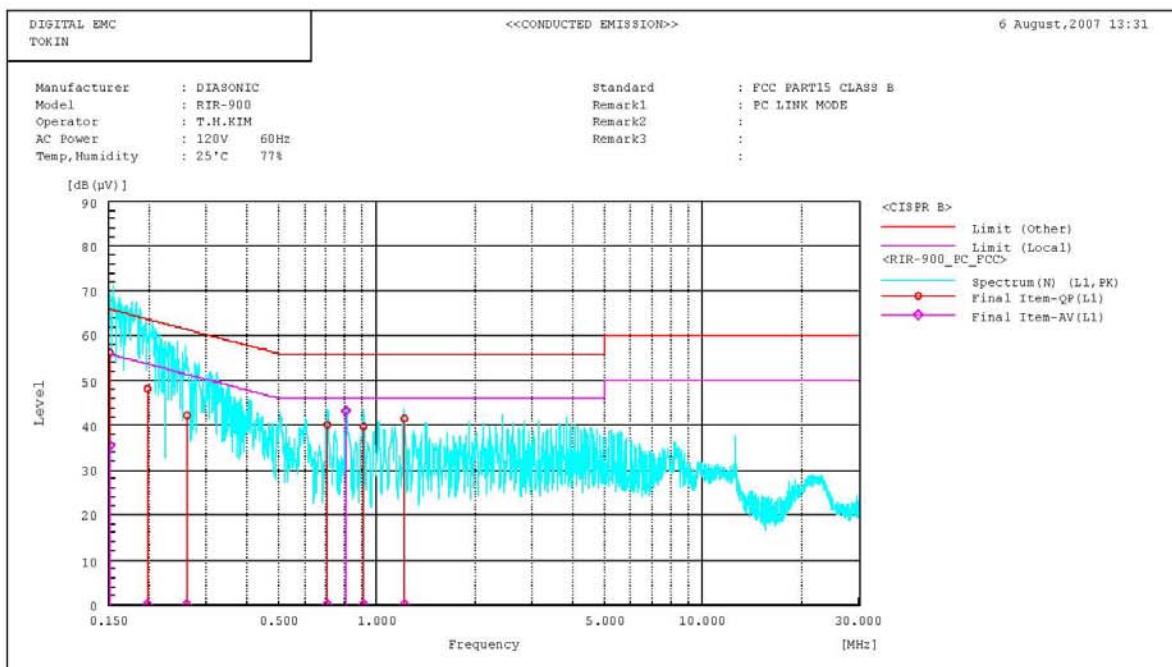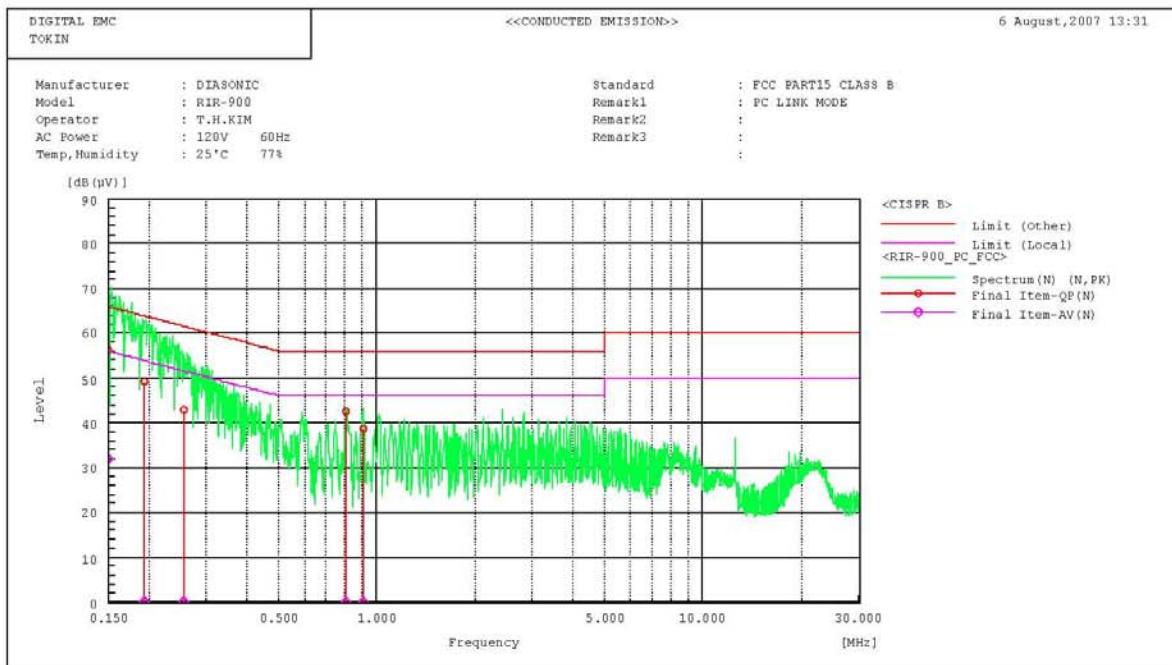

PC link Mode / Data

Standard	FCC PART15 CLASS B																							
Manufacturer	DIASOMATIC																							
Model	XIR-900																							
Operator	T.H.KIM																							
AC Power	120V 60Hz																							
Temp.,Humidity	25°C 77%																							
Remark1	FC LINK MODE																							
Remark2																								
Remark3																								
Final Result																								
--- M Phase ---																								
No.	Frequency [MHz]	Reading OP	Reading AV	Reading c.f.	Result OP	Result AV	Limit OP	Limit AV	Margin OP	Margin AV	Margin	Remark												
1	0.152	[dB(µV)] 56.0	[dB(µV)] 35.4	0.1	[dB(µV)] 56.1	[dB(µV)] 35.5	[dB(µV)] 65.9	[dB(µV)] 55.9	[dB] 9.8	[dB] 20.4	24.1													
2	0.199	[dB(µV)] 48.1	[dB(µV)] 42.1	0.0	[dB(µV)] 48.2	[dB(µV)] 42.2	[dB(µV)] 63.7	[dB(µV)] 53.7	[dB] 15.5	[dB] 19.1	0.0													
3	0.263	[dB(µV)] 40.1	[dB(µV)] 37.0	0.0	[dB(µV)] 40.2	[dB(µV)] 37.0	[dB(µV)] 61.3	[dB(µV)] 51.3	[dB] 10.0	[dB] 14.0	14.0													
4	0.706	[dB(µV)] 43.2	[dB(µV)] 40.0	0.1	[dB(µV)] 43.3	[dB(µV)] 40.0	[dB(µV)] 56.0	[dB(µV)] 46.0	[dB] 15.8	[dB] 20.0	20.0													
5	0.807	[dB(µV)] 39.5	[dB(µV)] 36.0	0.1	[dB(µV)] 39.6	[dB(µV)] 36.0	[dB(µV)] 56.0	[dB(µV)] 46.0	[dB] 12.7	[dB] 17.0	17.0													
6	0.908	[dB(µV)] 41.4	[dB(µV)] 38.5	0.0	[dB(µV)] 41.5	[dB(µV)] 38.6	[dB(µV)] 56.0	[dB(µV)] 46.0	[dB] 13.3	[dB] 17.4	17.4													
7	1.211	[dB(µV)] 41.4	[dB(µV)] 38.5	0.1	[dB(µV)] 41.5	[dB(µV)] 38.6	[dB(µV)] 56.0	[dB(µV)] 46.0	[dB] 14.5	[dB] 18.0	18.0													

***** DIGITAL EMC *****
<<CONDUCTED EMISSIONS>>

6 August, 2007 13:31

APPENDIX

TEST EQUIPMENT USED FOR TESTS

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment.

	Type	Manufacturer	Model	Cal.Due.Date (dd/mm/yy)	S/N
01	Spectrum Analyzer	HP	8591E	16/04/08	3649A05889
02	EMI TEST RECEIVER	R&S	ESCI	25/01/08	100014
03	Artificial mains network	R&S	ESH2-Z5	08/11/08	828739/006
04	Artificial mains network	Kyoritsu Electrical Works	KNW-242	09/10/07	8-654-15
05	EMI TEST RECEIVER	R&S	ESU	27/04/08	100364
06	COTROLLER	TOKIN	5905A	N/A	N/A
07	DRIVER	TOKIN	5902T2	N/A	14174
08	Amplifier (25dB)	Agilent	8447D	08/08/08	2443A03690
09	BILOG ANTENNA	SCHAFFNER	CBL6112B	08/06/08	2737