

VERTU

RM-266V OCCUPIED BANDWIDTH & BAND EDGE EMISSIONS

Document Type / FCC Test Report
Group / VERTU R&D
Document ID / DTX26425-EN-1.0
Author / S Piradeeban
Approved by / S Piradeeban
Issue Status / 03/07/2008
Information Classification CONFIDENTIAL

Change History /

Version	Date	Author	Reason(s) for change
0.1	03/07/2008	S Piradeeban	Initial draft
1.0	10/07/2008	S Piradeeban	Approved.

VERTU

Table of Contents

1.	Purpose	3
1.1	Document Purpose	3
1.2	Test Overview	3
1.3	Test Rationale	3
2.	LIST OF AbbrEviations, Acronyms and Terms	3
2.1	Abbreviations	3
2.2	Acronyms	3
2.3	Terms	3
3.	STANDARDS BASIS	4
3.1	PCS1900 Band Subdivision	4
3.2	Test Equipment and Materials	5
3.3	Phone Sample	5
4.	Location Information	5
5.	PASS/FAIL CRITERIA	5
6.	System Validation Instructions	5
7.	TEST Procedure	6
8.	GSM 1900 Results	7
8.1	Mid Channel, Power in 1MHz	7
8.2	Mid Channel, Occupied Bandwidth	7
8.3	Block 1 (Band A) Lower Edge Emissions	8
8.4	Block 1 (Band A) Upper Edge Emissions	8
8.5	Block 2 (Band D) Lower Edge Emissions	9
8.6	Block 2 (Band D) Upper Edge Emissions	9
8.7	Block 3 (Band B) Lower Edge Emissions	10
8.8	Block 3 (Band B) Upper Edge Emissions	10
8.9	Block 4 (Band E) Lower Edge Emissions	11
8.10	Block 4 (Band E) Upper Edge Emissions	11
8.11	Block 5 (Band F) Lower Edge Emissions	12
8.12	Block 5 (Band F) Upper Edge Emissions	12
8.13	Block 6 (Band C) Lower Edge Emissions	13
8.14	Block 6 (Band C) Upper Edge Emissions	13
9.	850 Band	14
9.1	GSM 850	14
9.1.1	Mid Channel Power in 1MHz	14
9.1.2	Mid Channel Occupied Bandwidth	14
9.1.3	Lower Band Edge Emissions	15
9.1.4	Upper Band Edge Emissions	15
9.2	WCDMA 850	16
9.2.1	Mid Channel Power in 1MHz	16
9.2.2	Mid channel occupied bandwidth	16
9.2.3	Lower Band Edge Emissions	17
9.2.4	Upper Band Edge Emissions	17

VERTU

1. Purpose

1.1 Document Purpose

This test is used to determine RM-266V's compliance to a variety of government emissions regulations for the United States. This test is necessary to support applications for approval of RM-266V in the United States. This test also takes account of recent FCC guidelines dividing the PCS1900 band into 6 blocks, compliance with band edge emissions regulations is now required to be shown at the band edges of all blocks.

1.2 Test Overview

A conducted connection is made between the phone and the test equipment. The phone is placed in a call. Its occupied bandwidth is measured, then its band edge emissions are measured to determine if it is within guidelines

1.3 Test Rationale

This test is essential to determining a handset's compliance with federal regulations.

2. LIST OF AbbrEviations, Acronyms and Terms

2.1 Abbreviations

dBm	dB (milliwatts)
MHz	Megahertz
Tx	Transmit

2.2 Acronyms

ARFCN	Absolute Radio Frequency Channel Number
BSE	Base Station Emulator
BW	Bandwidth
CFR	Code of Federal Regulations
DC	Direct Current
EUT	Equipment Under Test
FCC	Federal Communications Commission
GPS	Global Positioning System
GSM	Global System for Mobile communications
PCS	Personal Communications Systems
PPower (Watts)	
RBW	Resolution Bandwidth

2.3 Terms

This section intentionally left blank.

VERTU

3. STANDARDS BASIS

Note – The CFR is updated annually. The latest version should always apply.


FCC. 47 CFR, Part 2.1049 (c): Occupied Bandwidth.

FCC. 47 CFR, Part 24.238 (b): Occupied Bandwidth.

FCC. 47 CFR, Part 24: Emissions at Band Edges

3.1 PCS1900 Band Subdivision

Recent FCC correspondence indicated a requirement to show compliance at all band edges within the relevant Tx band. For PCS1900 this requires compliance to be shown at 12 band edges. The frequency blocks for PCS1900 Mobile Transmitters are shown below:

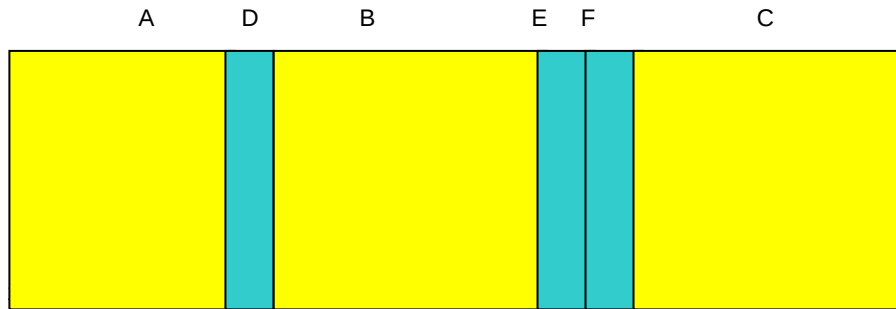

Block	Freq	Band	Channel range
BLOCK 1:	1850 – 1865 MHz	(A)	ARFCN 512 - 585
BLOCK 2:	1865 – 1870 MHz	(D)	ARFCN 587 - 610
BLOCK 3:	1870 – 1885 MHz	(B)	ARFCN 612 - 685
BLOCK 4:	1885 – 1890 MHz	(E)	ARFCN 687 - 710
BLOCK 5:	1890 – 1895 MHz	(F)	ARFCN 712 - 735
BLOCK 6:	1895 – 1910 MHz	(C)	ARFCN 737 – 810

VERTU

3.2 Test Equipment and Materials

The relevant equipment used during the test is listed below.

Power Supply:	Serial no. KR94625344
HP E3631A	Calibrated 10 Jan 07 Due 10 Jan 08

Base Station Emulator	Serial no. 100350
Rohde & Schwarz CMU200	Calibrated 16 Sep 07 Due 16 Sep 09

Spectrum Analyser	Serial no. 3216U00120
Agilent 8563E	Calibrated 12 Sep 07 Due 12 Sep 09

3.3 Phone Sample

RM-266V HWID 3000 IMEI 0040101088155

Conducted RF connection to test system, powered via dummy battery connected to power supply. FBUS via system connector for automated phone control. Test conducted in shielded room.

4. Location Information

All equipment needed to perform this test is available in the RM-266V project area laboratory at the Vertu Ltd. Church Crookham site in the UK.

5. PASS/FAIL CRITERIA

FCC Part 24.238 specifies a maximum allowable emission of $P - 43 + 10 \log (P)$ outside of the licensee's frequency block

For a GSM1900 transmitter operating at top power level and transmitting 29 dBm (1W) as per the GSM recommendations this equates to $29 - 43 + 10 \log (1) = -14$ dBm.

For a GSM850 transmitter operating at top power level and transmitting 32.5 dBm (2W) as per the GSM recommendations this equates to $32.5 - 43 + 10 \log (2) = -7.5$ dBm.

For the band edge channels this is measured using a bandwidth equal to 1% of the emission bandwidth

6. System Validation Instructions

The following was verified before proceeding:


VERTU

- All calibrated equipment is marked with a calibration sticker and is still within its calibration interval.
- The ambient temperature and humidity of the lab is within the normal operating limits of all test equipment.
- The BSE should power on and pass any internal self checks.

7. TEST Procedure

The testing described below is designed to cover all the requirements listed in Section 3.

The measurement equipment is set up as shown below.

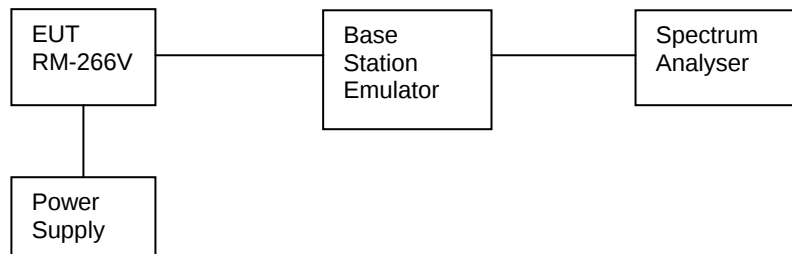


- 1) The EUT is connected via a conducted connection and placed in a call with random (worst case) modulation against the base station emulator, mid channel, Tx Power Control level set to max power.
- 2) The spectrum analyser is connected via the coupled RF port on the base station emulator.
- 3) The maximum power in 1 MHz RBW is measured.
- 4) The Occupied Bandwidth is measured via the 99% Power BW function on the spectrum analyser.
- 5) The channel is changed to low channel.
- 6) The band edge emissions limit is checked in 1% RBW for compliance.
- 7) The channel is changed to the next band edge channel.
- 8) The band edge emissions limit is checked in 1% RBW for compliance.
- 9) Repeat 7) & 8) up to the last band edge channel.
- 10) Repeat 1) to 9) for all other bands of operation.
- 11) The results are attached in the following pages.


VERTU

8. GSM 1900 Results

8.1 Mid Channel, Power in 1MHz

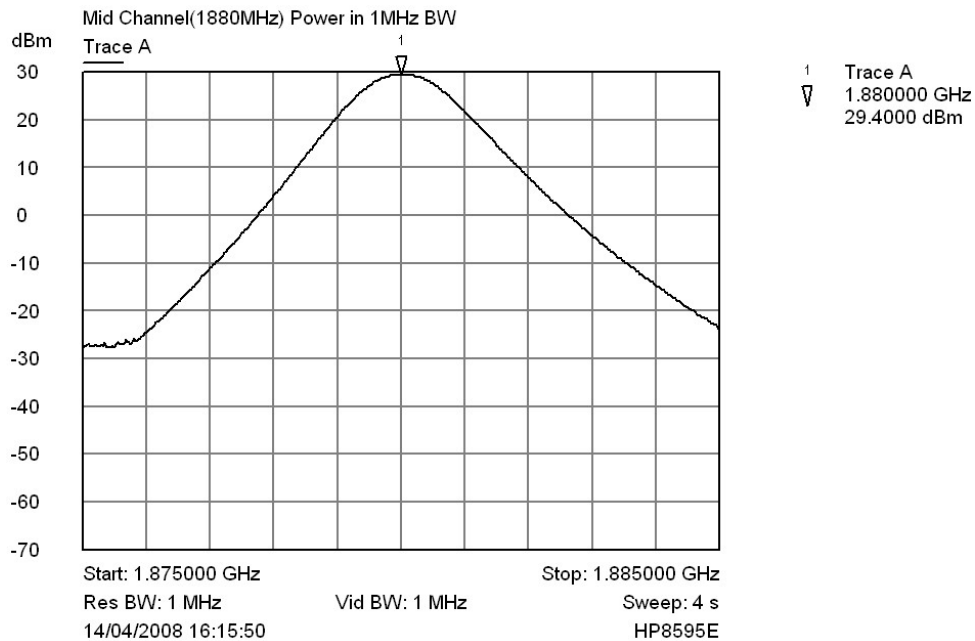

8.2 Mid Channel, Occupied Bandwidth

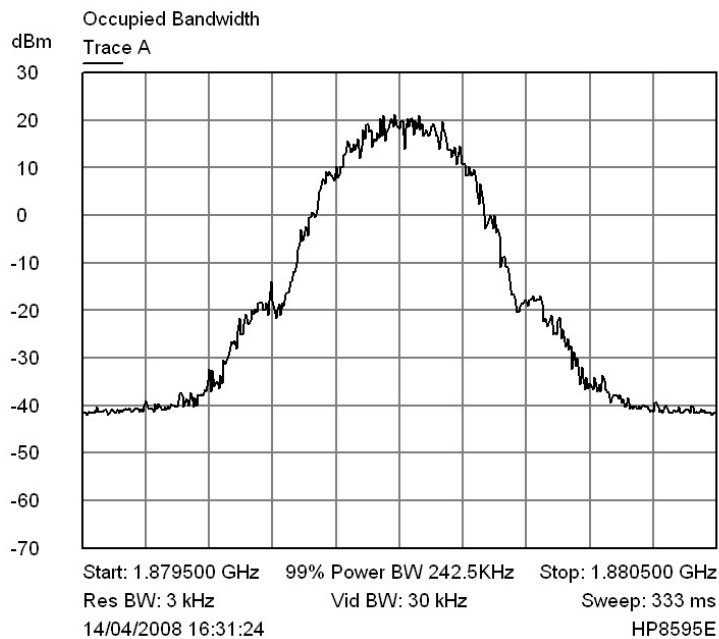


Power: Tx level 0 (highest) Modulation: Random GMSK Channel: Mid ARFCN 661

Occupied Bandwidth = 242.5 kHz 1% Bandwidth = 2.425 kHz


3kHz = next largest bandwidth on spectrum analyser

VERTU

8.3 Block 1 (Band A) Lower Edge Emissions

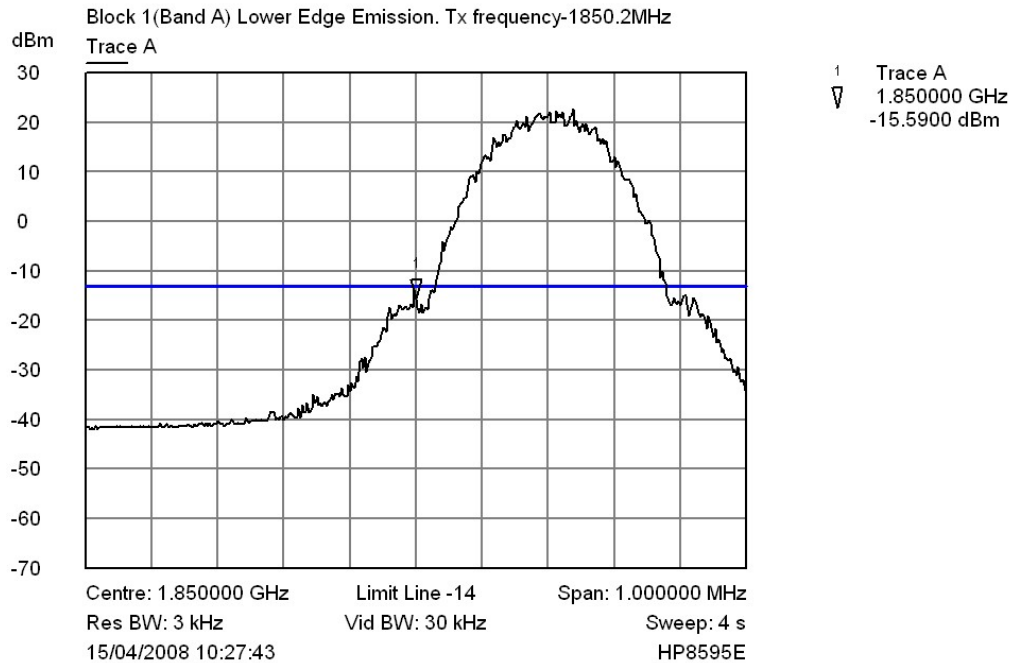


8.4 Block 1 (Band A) Upper Edge Emissions

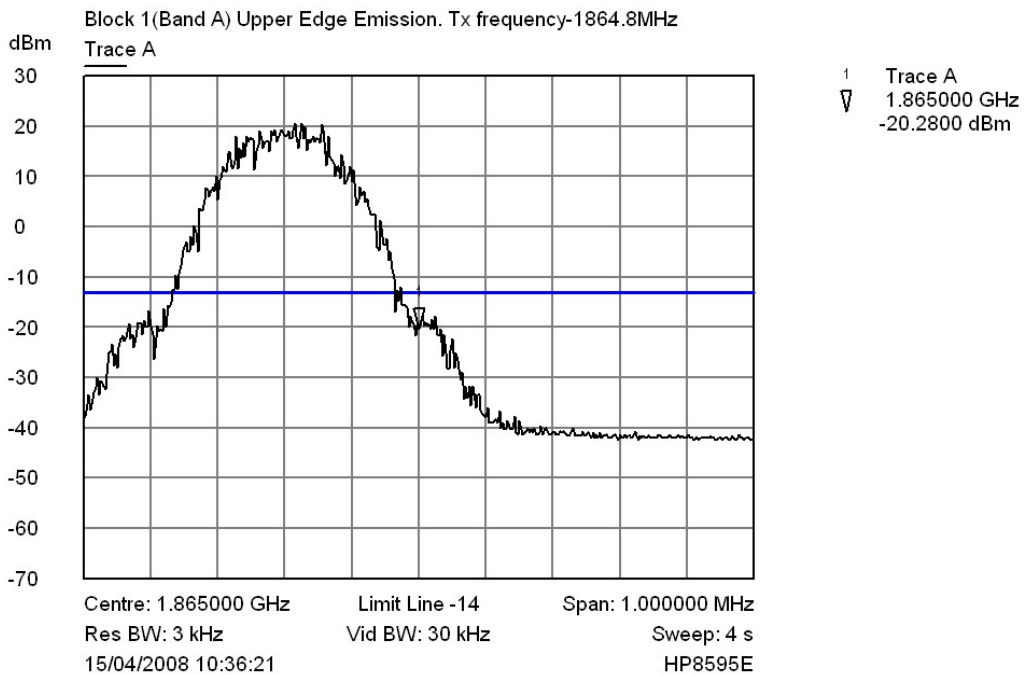


VERTU

8.5 Block 2 (Band D) Lower Edge Emissions

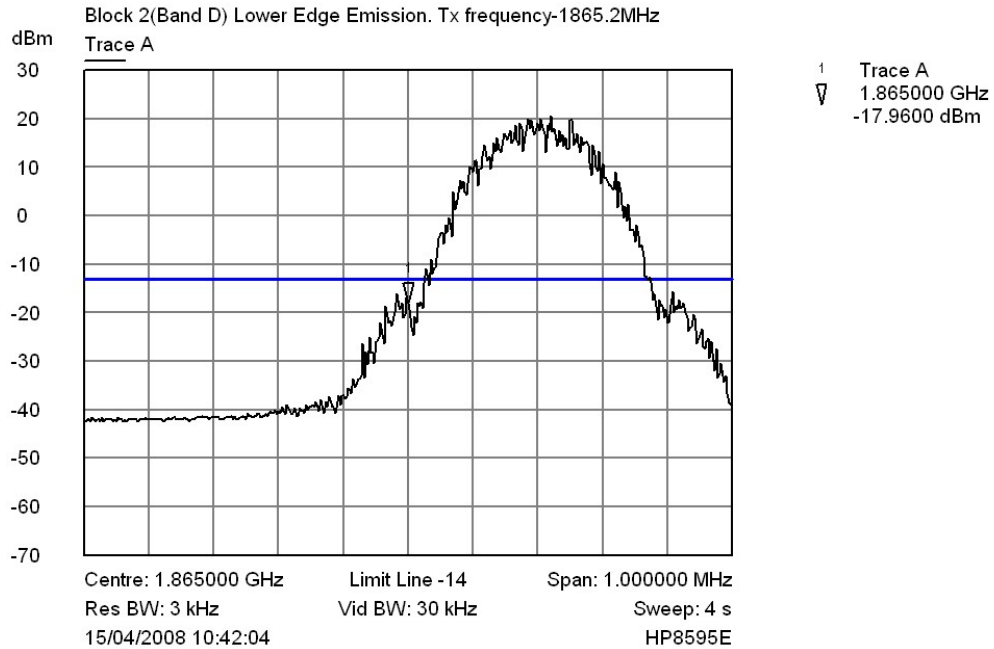


8.6 Block 2 (Band D) Upper Edge Emissions

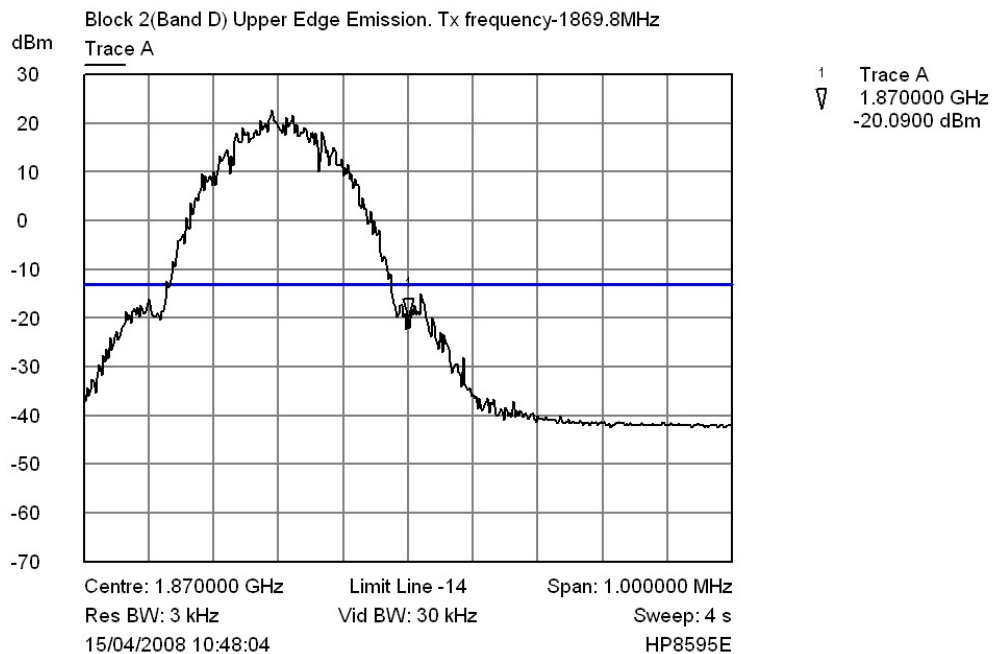


VERTU

8.7 Block 3 (Band B) Lower Edge Emissions

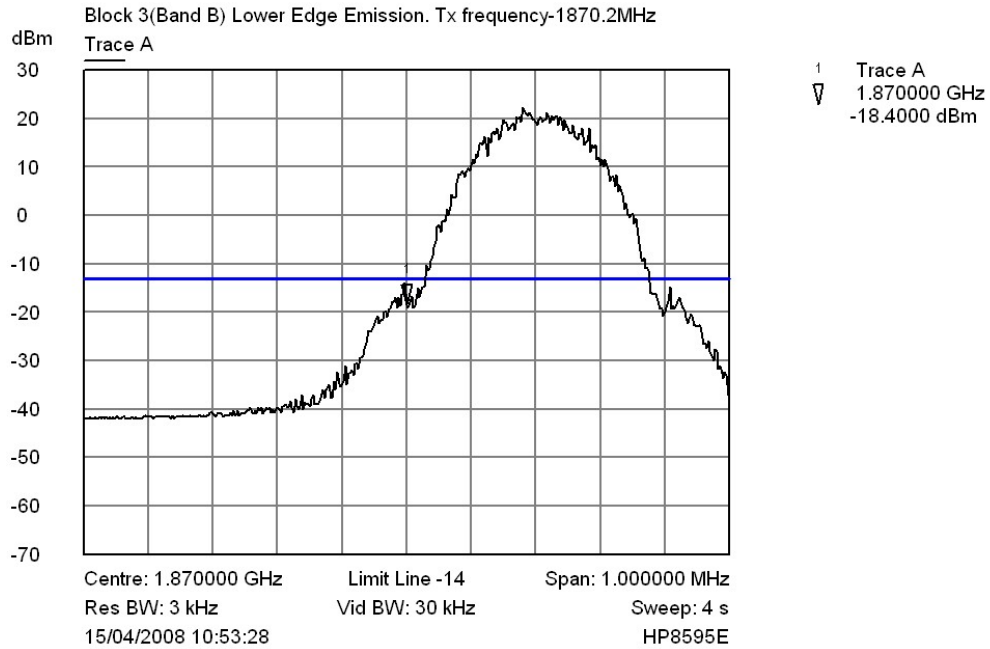


8.8 Block 3 (Band B) Upper Edge Emissions

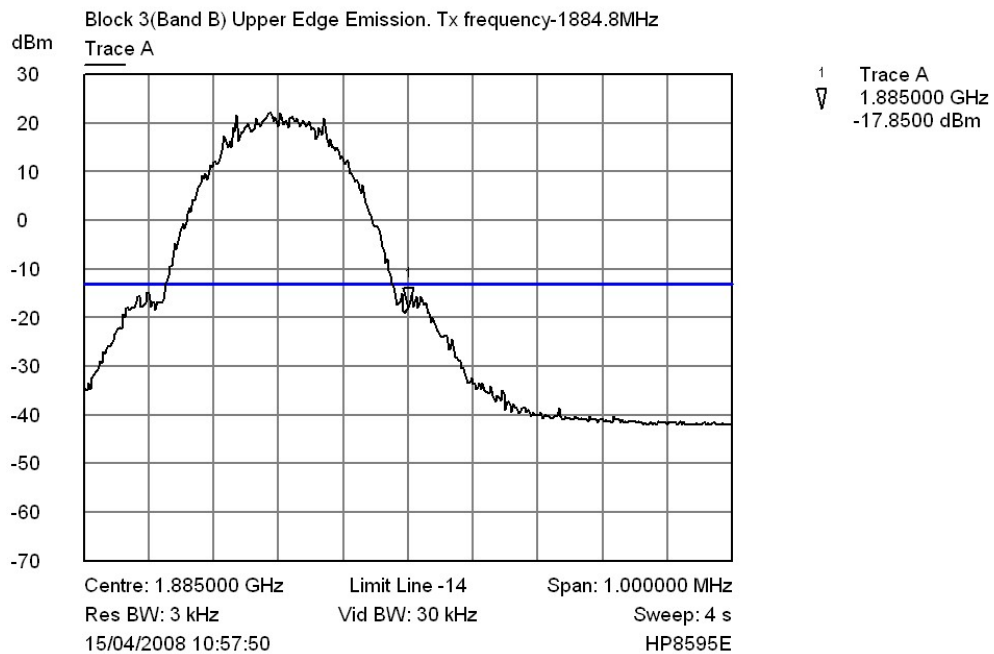


VERTU

8.9 Block 4 (Band E) Lower Edge Emissions

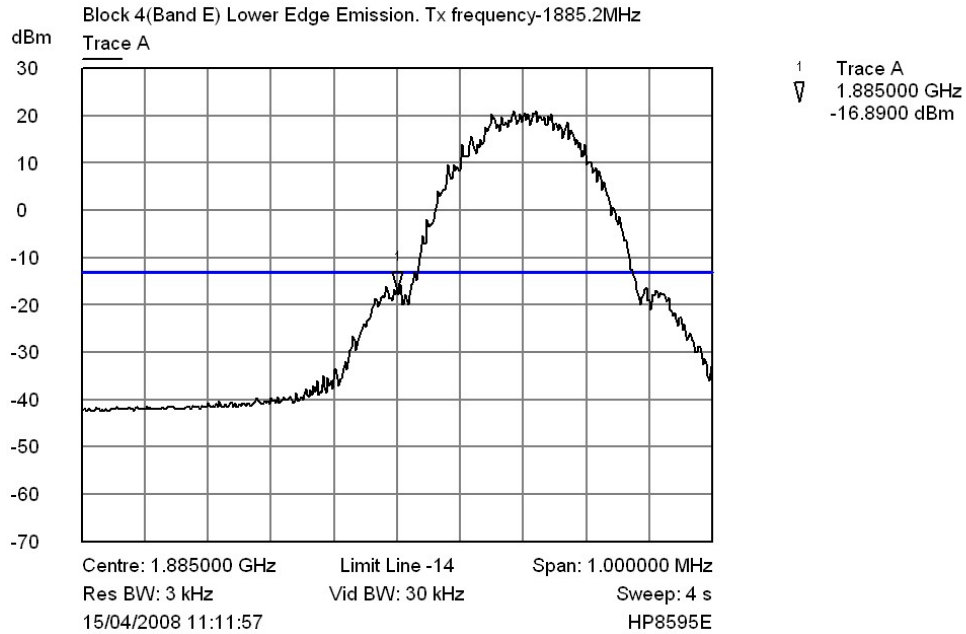


8.10 Block 4 (Band E) Upper Edge Emissions

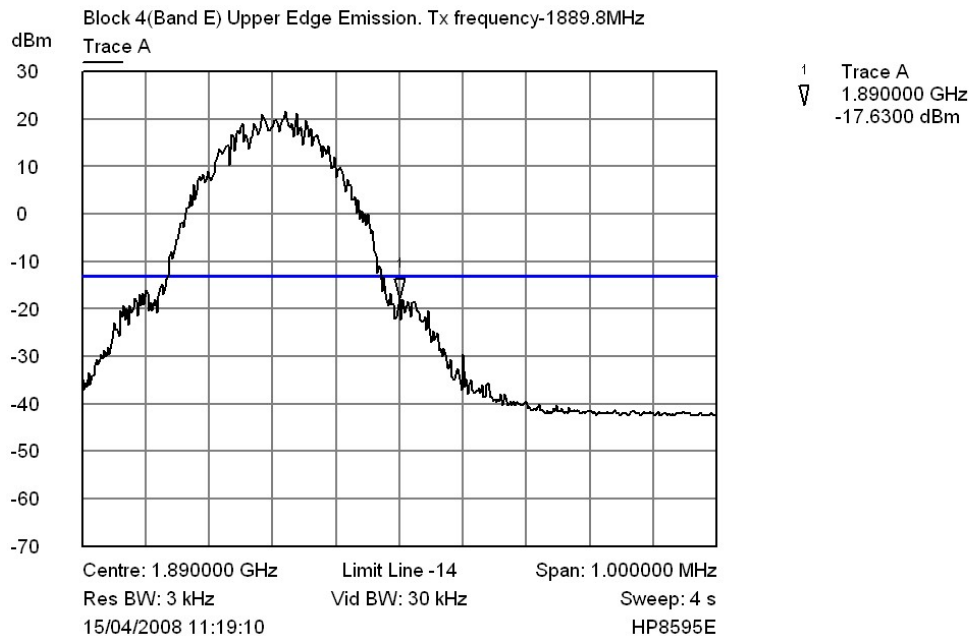


VERTU

8.11 Block 5 (Band F) Lower Edge Emissions

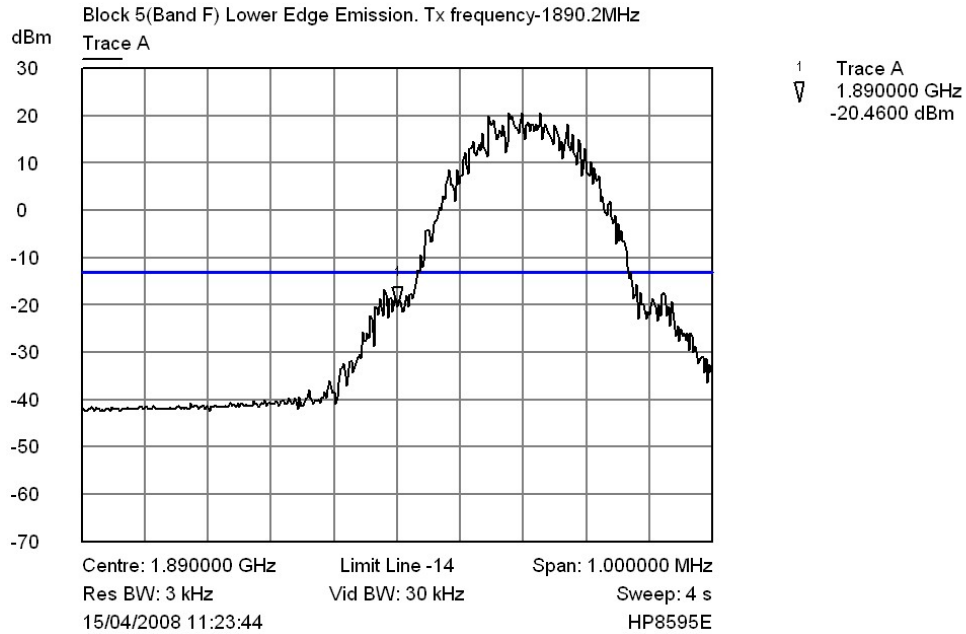


8.12 Block 5 (Band F) Upper Edge Emissions

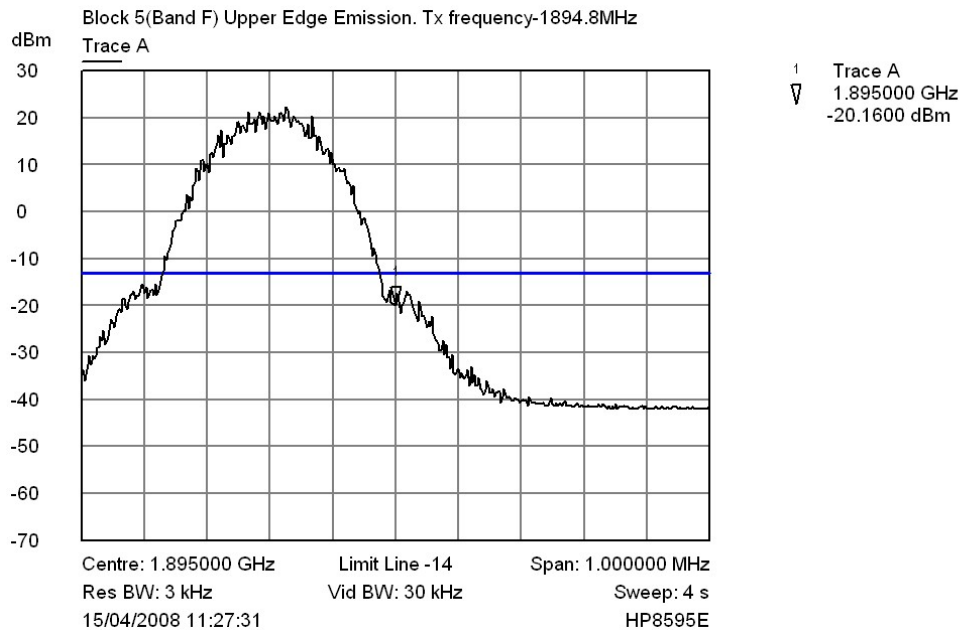


VERTU

8.13 Block 6 (Band C) Lower Edge Emissions

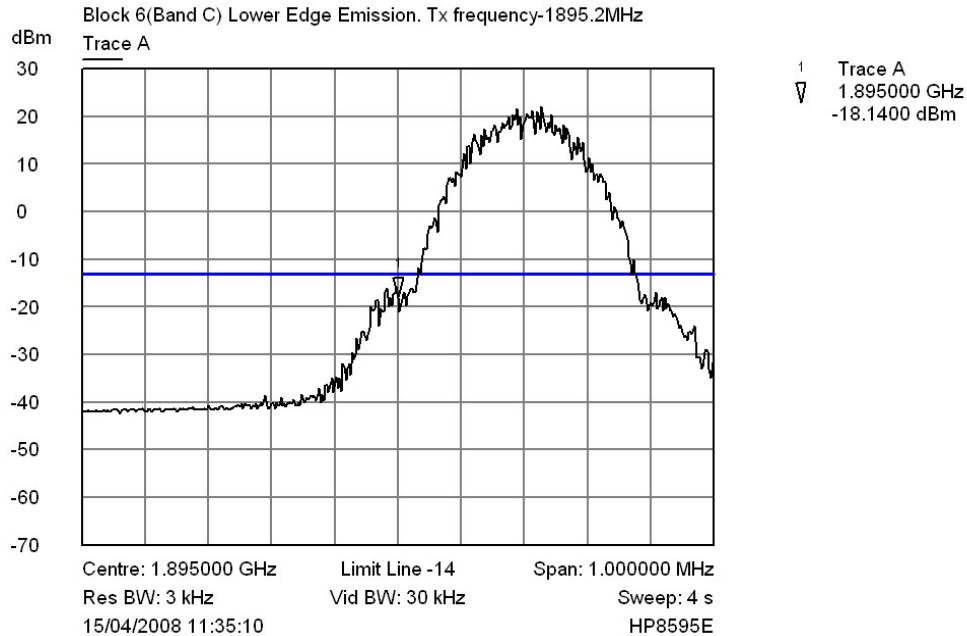

8.14 Block 6 (Band C) Upper Edge Emissions

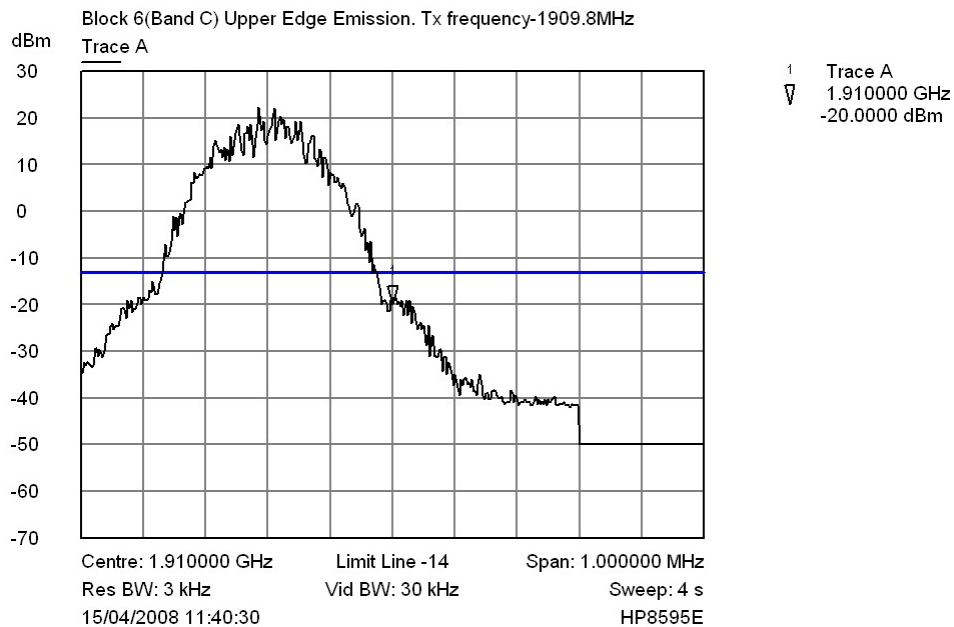


VERTU


9. 850 Band

9.1 GSM 850

9.1.1 Mid Channel Power in 1MHz

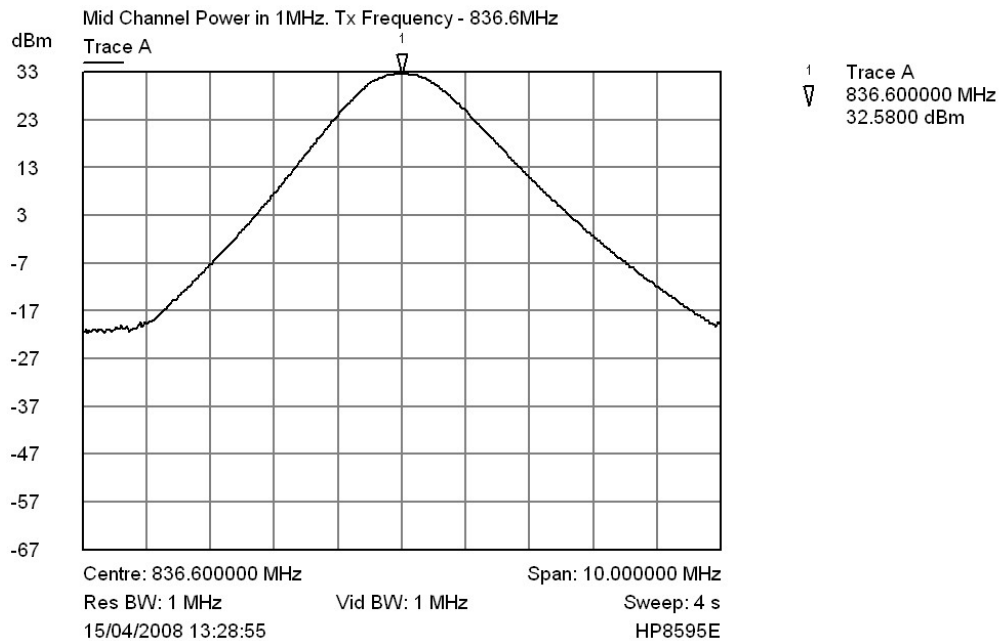

9.1.2 Mid Channel Occupied Bandwidth

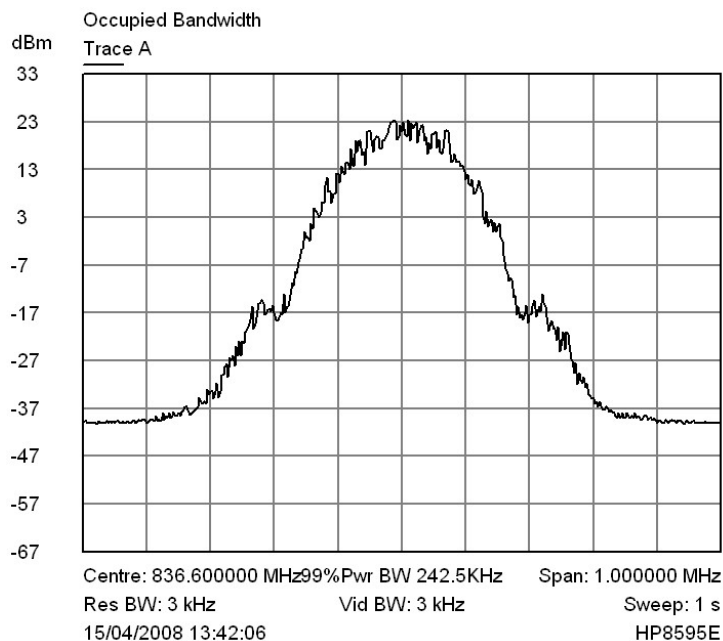


Power: Tx level 5 (highest) Modulation: Random GMSK Channel: Mid ARFCN 190

Occupied Bandwidth = 242.5 kHz 1% Bandwidth = 2.425 kHz


3kHz = next largest bandwidth on spectrum analyser

VERTU

9.1.3 Lower Band Edge Emissions

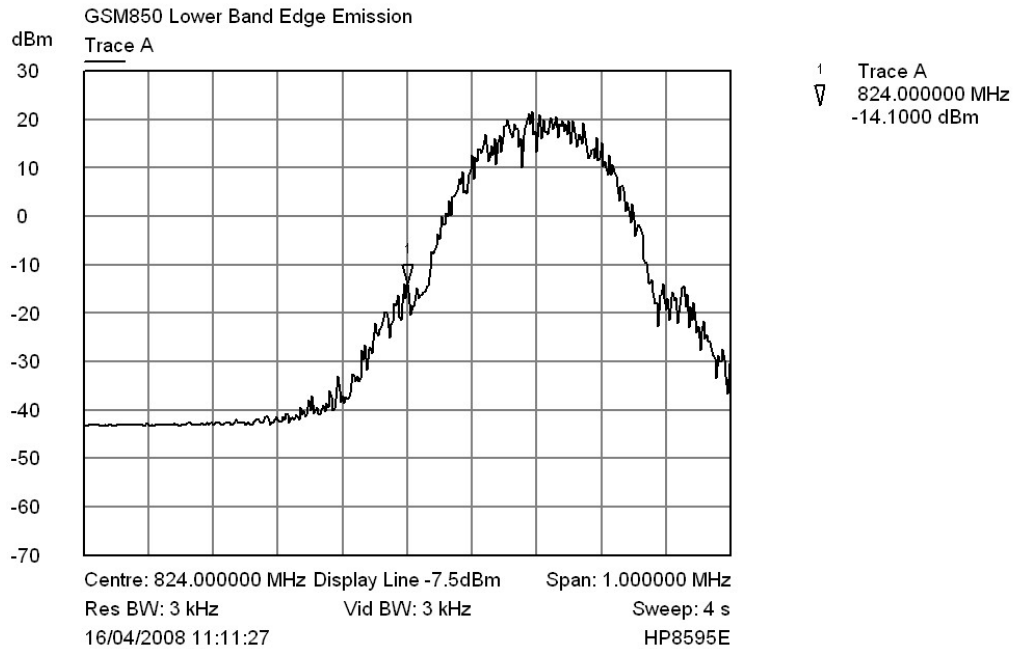


9.1.4 Upper Band Edge Emissions

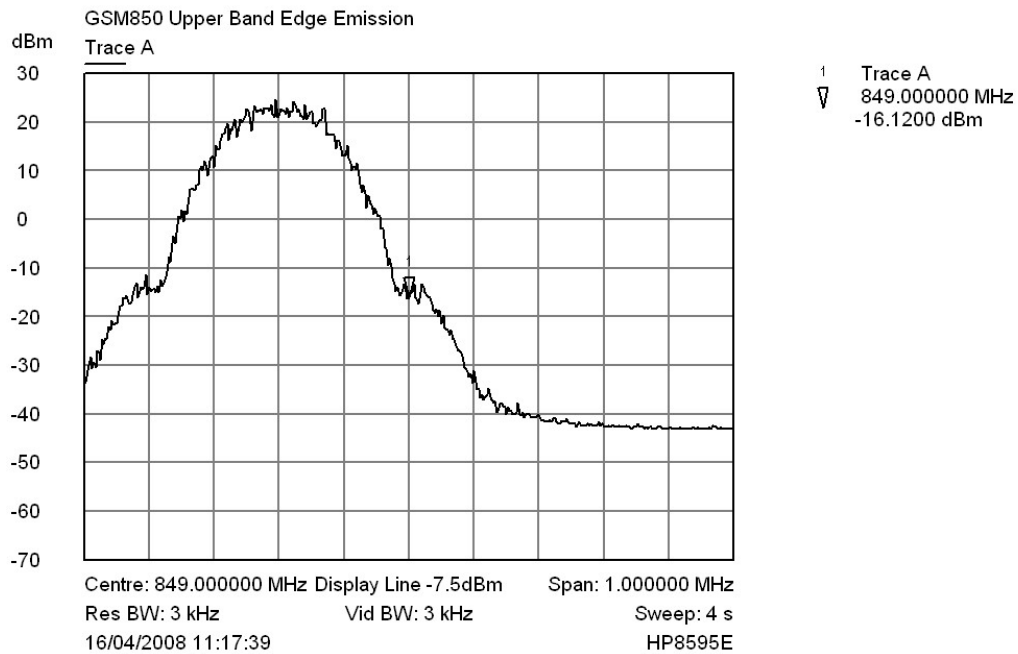


VERTU

9.2 WCDMA 850

9.2.1 Mid Channel Power in 1MHz

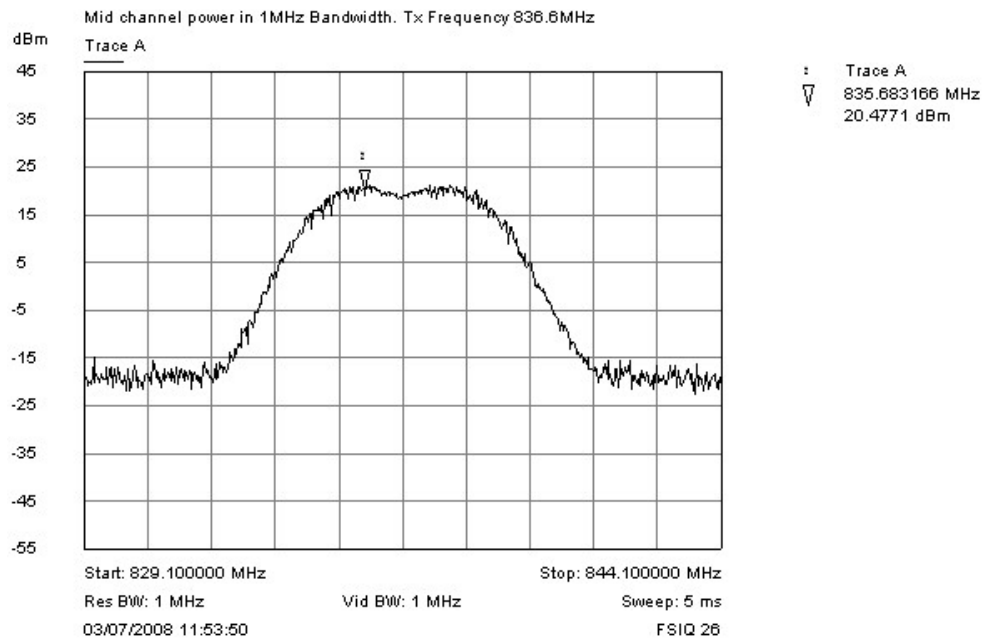


9.2.2 Mid channel occupied bandwidth

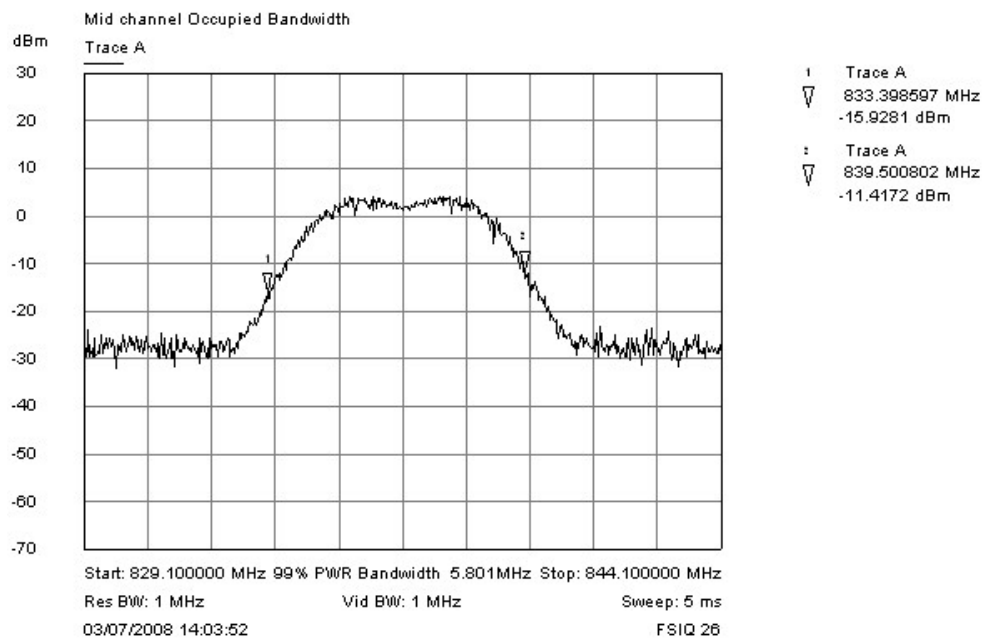

VERTU

9.2.3 Lower Band Edge Emissions

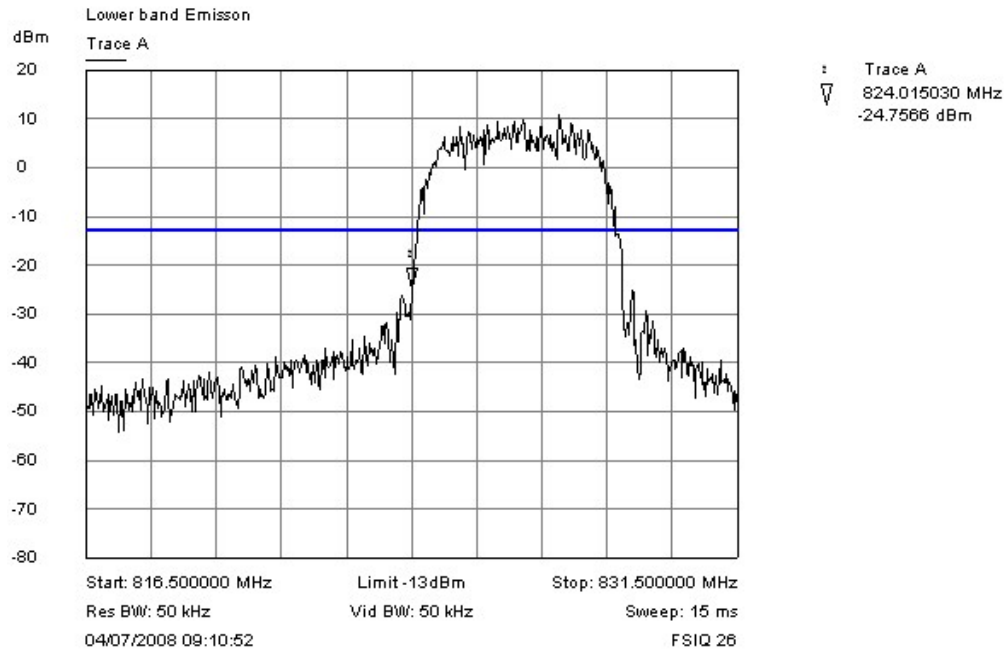

9.2.4 Upper Band Edge Emissions

