

WLAN Radiated Peak Output Power Test Report

Test Report no.:	Tre_FCC_0820_09.doc	Date of Report:	30-May-2008
Number of pages:	6	Customer's Contact person:	Swapna Murala
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation Beacon Hill Road Church Crookham, Hampshire United Kingdom, GU52 8DY Tel. +44 1252 611000 Fax. +44 1252 611300
FCC listing no.:	3608		
IC recognition no.:			
Tested devices/ accessories:	Phone RM-266V / Battery BL-5CV / AC-Charger AC-7EV		
FCC ID:	P7QRM-266V	IC:	4299A-RM266V
Supplement reports:	-		
Testing has been carried out in accordance with:	See section "Test method and limit". WLAN Radiated peak output power results are used only for SAR Test Report.		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jari Jantunen, Test System Manager

1. Summary for WLAN Radiated Peak Output Power Test Report

Date of receipt	30-Apr-2008
Testing completed	15-May-2008
The customer's contact person	Swapna Murala
Test Plan referred to	T:\Projects\RM-266V\TestPlan_RS\RS_Testplan_RM-266V.xls
Notes	-
Document name	T:\Projects\RM-266V\EMC\Results\FCC\Tre_FCC_0820_09.doc

1.1. EUT and Accessory Information

The EUT is a 6-band (GSM850/900/1800/1900 and WCDMA Band I/V(850)) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. WLAN is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-266V	004401010884027	B3.1	-	300.01	41484
Battery	BL-5CV	-	-	-	-	41486
AC-Charger	AC-7EV	-	-	-	-	41490

1.2. Summary of Test Results

Name of the test	Result
WLAN Radiated peak output power for SAR Test Report	PASSED

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Tampere Laboratory.


CONTENTS

1. Summary for WLAN Radiated Peak Output Power Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated peak output power.....	4
2.1. Test setup	4
2.2. Test method and limit.....	4
2.3. Test results.....	5
3. Test Equipment.....	6
3.1. Conducted measurements	6
3.2. Radiated measurements	6

2. Radiated peak output power

EUT with DUT number	RM-266V DUT 41484
Accessories with DUT numbers	BL-5CV DUT 41486 / AC-7 DUT 41490
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 48 / 101.5
Date of measurements	15-May-2008
Measured by	Jari Jantunen

2.1. Test setup

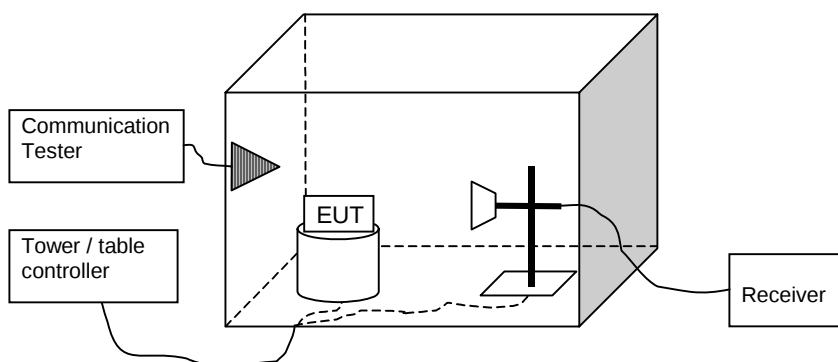

2.2. Test method and limit

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss and substitution correction ($A_{TOT} = L_{CABLES} + A_{SUBST}$).

Limits for radiated peak output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

2.3. Test results

2.3.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f_c [MHz]	EIRP [dBm]	EIRP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
1 / 2412	15.20	0.033	- 30.60	45.80	VERTICAL	PASSED
7 / 2442	17.10	0.051	- 29.10	46.20	HORIZONTAL	PASSED
11 / 2462	16.40	0.044	- 29.70	46.10	HORIZONTAL	PASSED

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM37610	Spectrum analyzer	FSU	R&S	22/24, 15C
TM37678	Radio communication tester	CMU-200	R&S	22/24, 15C
	Attenuator 10 dB	6251.17.A	Huber+Suhner AG	22/24, 15C
TM37499	Power splitter	11667A	Agilent	22/24, 15C
	Temperature chamber	VT4002	Vötsch	22/24, 15C
TM38112	DC power supply	6632A	Agilent	22/24, 15C
TM38111	Multimeter	34401A	Agilent	22/24, 15C
	EMI Test receiver	ESPC	R&S	15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	15C, 15B
TM38631	Signal generator	83640L	Agilent	15C, 15B
TM38114	DC power supply	6632A	Agilent	15C, 15B
TM22835	Multimeter	87	Fluke	15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5/	R&S	15C, 15B
TM30636	LISN 50 µH	L2-16/	PMM	15C, 15B

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24
TM37502	Dipole antenna	3125-1880	EMCO	22/24
TM37773	Radio communication tester	CMU-200	R&S	22/24, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24, 15C, 15B
	High pass filter	WHK2010-10SS	Trilithic	22/24, 15C, 15B
	Low pass filter	WLK1750-10SS	Trilithic	22/24, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Turntable controller	HD-100	Deisel	22/24, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24, 15C, 15B
TM22835	Multimeter	87	Fluke	22/24, 15C, 15B