

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-389V_03.doc	Date of Report:	13-Jul-2009
Number of pages:	41	Customer's Contact person:	Swapna Murala
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation Beacon Hill Road Church Crookham, Hampshire United Kingdom, GU52 8DY Tel. +44 1252 611000 Fax. +44 1252 611300
FCC listing no.:	99059		
IC recognition no.:	661AD-1		
Tested devices/ accessories:	Phone; RM-389V (HW: 3.6), Battery; BL-4UV, AC-Charger; AC-31, Data Cable; CA-101V		
FCC ID:	P7QRM-389V	IC:	4299A-RM89V
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Ruben Hansen, Test System Manager, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	02-Jun-2009
Testing completed	07-Jul-2009
The customer's contact person	Swapna Murala
Test Plan referred to	T:\Projects\RM-389V\TestPlan_RS\RS_Testplan_RM-389V.xls
Notes	None
Document name	FCC15C_RM-389V_03.doc

1.1. EUT and Accessory Information

The EUT is a 8-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/V(850)/VI) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-389V	004401/10/625352/5	3.6	-	vam08w11300.01	25064
Phone	RM-389V	004401/10/625331/9	3.6	-	vam08w11300.01	25055
Battery	BL-4UV	-	-	-	-	25045
Battery	BL-4UV	-	-	-	-	25044
AC-Charger	AC-31	00187	V 05	V 05	-	25035
AC-Charger	AC-31	00187	V 05	V 05	-	25035
Data Cable	CA-101V	07306442806701302991	-	-	-	25017
Phone	RM-389V	004401/10/625337/6	3.6	-	vam08w11300.01	25066
Battery	BL-4UV	-	-	-	-	25041
AC Charger	AC-31	00008	V 05	V 05	-	25037
Data Cable	CA-101V	07306442806701303059	-	-	-	25023

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	Passed
15.247(d)	A8.5	Band edge compliance of RF emissions	Passed
15.247(d)	A8.5	Spurious RF conducted emissions	Passed
15.247(d), 15.209	A8.5	Spurious radiated emissions	Passed
15.207	7.2.2	AC powerline conducted emissions	Passed
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	Passed
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	Passed
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	Passed
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	Passed

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Copenhagen Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	5
2.1. Conducted RF test setup	5
2.2. AC powerline conducted emissions test setup	5
2.3. Radiated test setup	5
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	6
3.1. Test method and limit	6
3.2. Bluetooth Test results	7
4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5).....	10
4.1. Test method and limit	10
4.2. Bluetooth Test results	11
5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5).....	15
5.1. Test method and limit	15
5.2. Bluetooth Test results	16
6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5).....	19
6.1. Test method and limit	19
6.2. Bluetooth Test results	20
7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	23
7.1. Test method and limit	23
7.2. Bluetooth Test results	24
8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a))	27
8.1. Test method and limit	27
8.2. Bluetooth Test results	28
9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b)).....	31
9.1. Test method and limit	31
9.2. Bluetooth Test results	32
10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d)).....	34
10.1. Test method and limit	34
10.2. Bluetooth Test results	35
11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))	37
11.1. Test method and limit	37
11.2. Bluetooth test results	38


12.	Test Equipment	40
12.1.	Conducted measurements	40
12.2.	Radiated measurements	40

2. Test setups


2.1. Conducted RF test setup

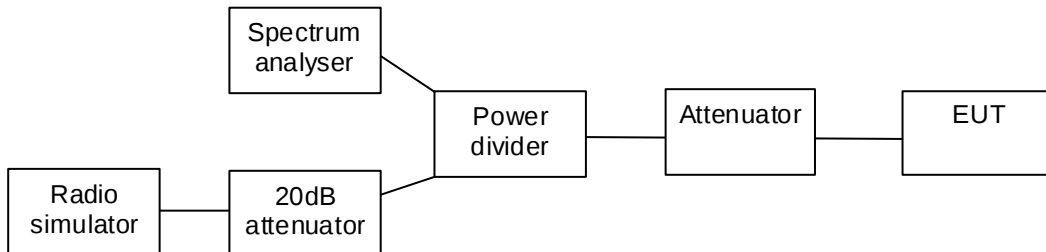

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

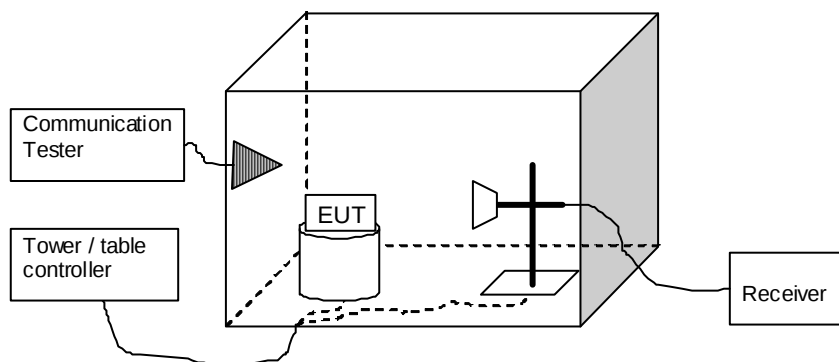

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-389 DUT: 25055
Accessories with DUT numbers	BL-4UV DUT: 25044, AC-31 DUT: 25035, CA-101V DUT 25023
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 56 / 1022
Date of measurements	3-July-2009
Measured by	Ruben Hansen / Christian Andersen

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	-2.20	0.603	Passed
40 / 2442	-2.00	0.631	Passed
78 / 2480	-2.30	0.589	Passed


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

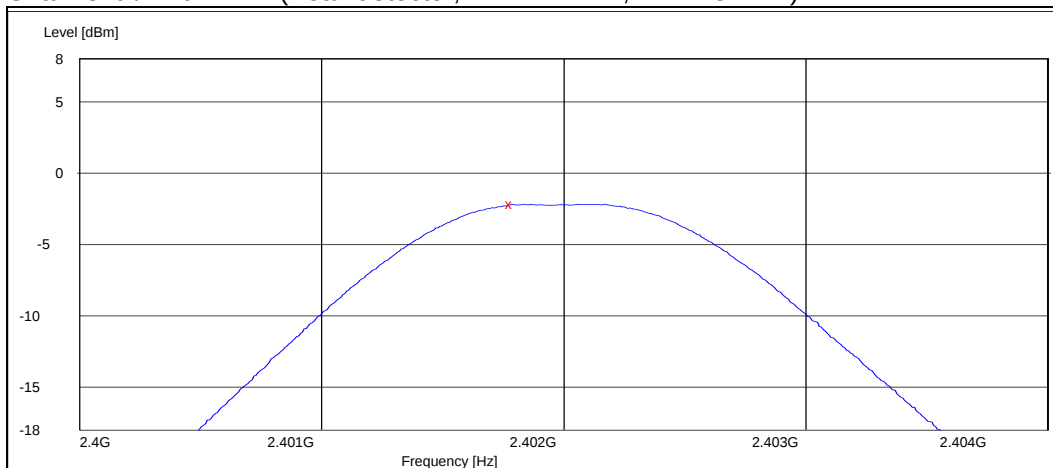

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

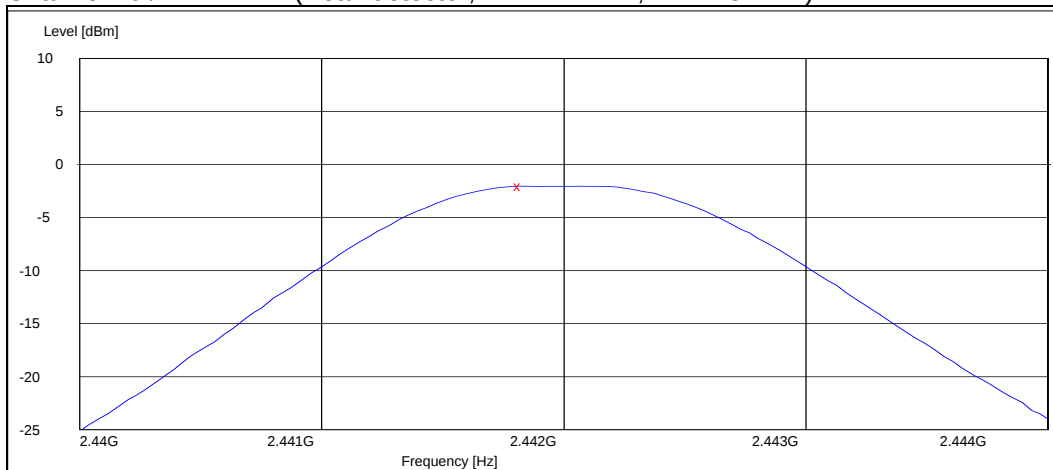


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

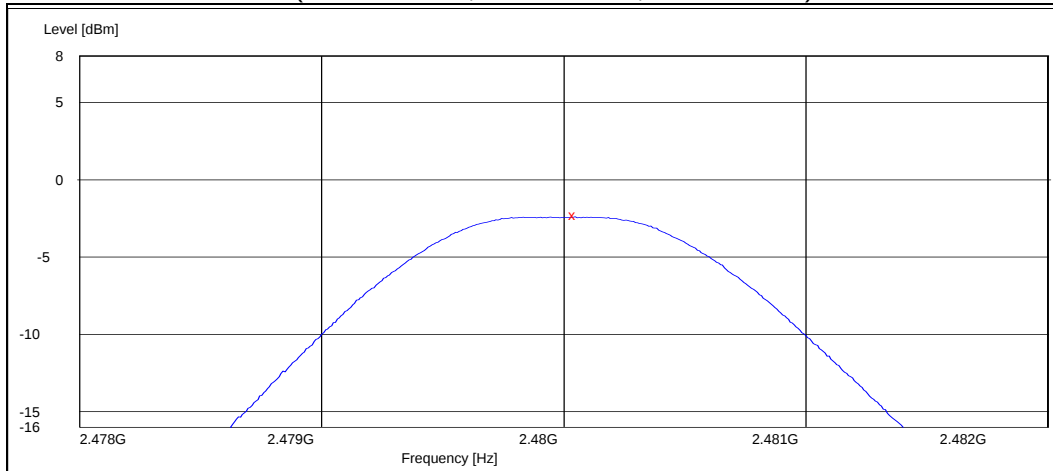


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	-1.00	0.794	Passed
40 / 2442	-0.20	0.955	Passed
78 / 2480	-0.50	0.891	Passed


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

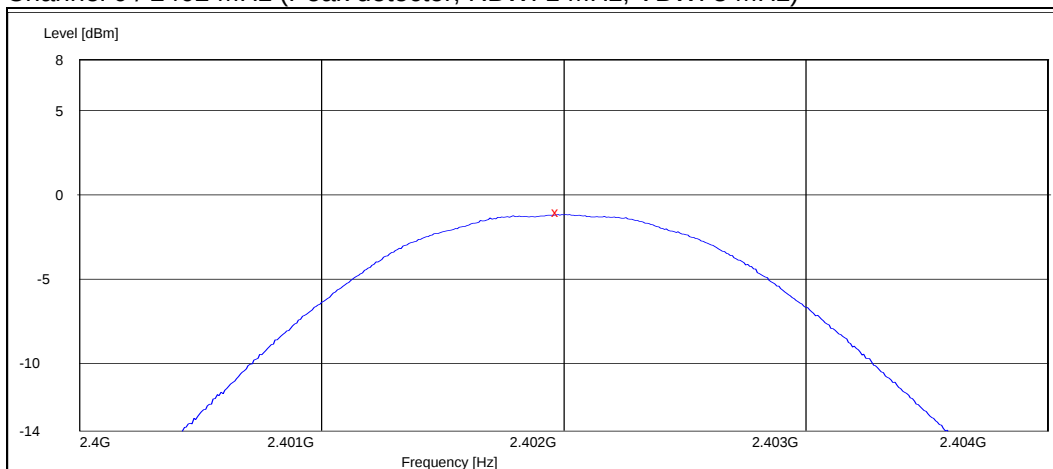

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

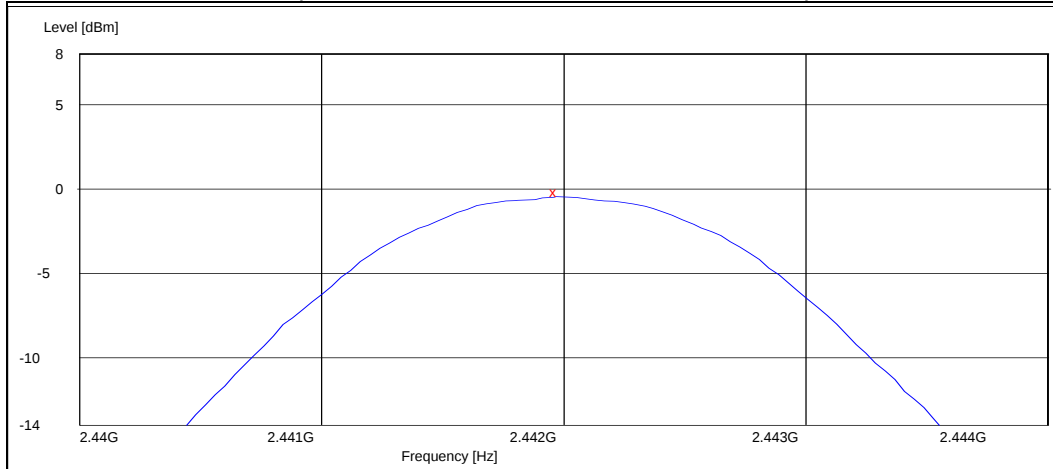

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

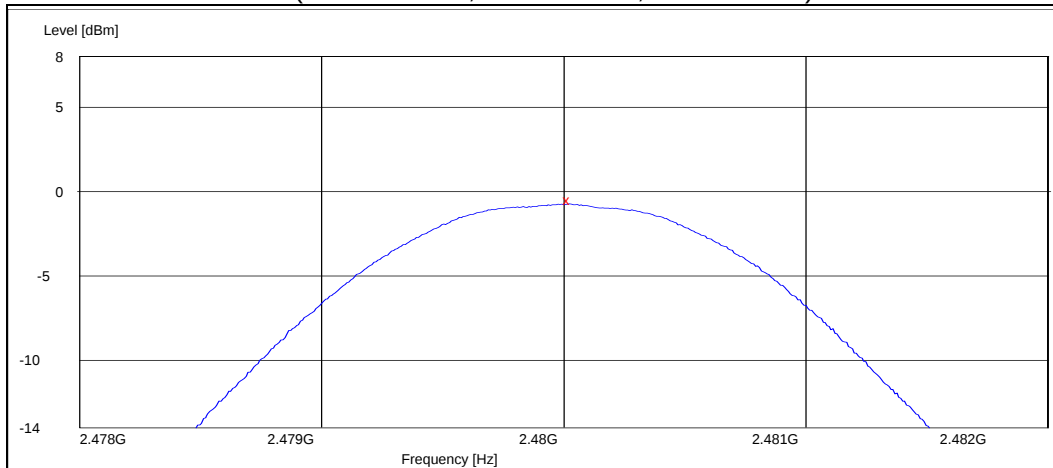

4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-389V DUT 25066
Accessories with DUT numbers	BL-4UV DUT 25041, AC-31 DUT 25037, CA-101V DUT 25023
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	Phone tested in flip open mode.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 39 / 99
Date of measurements	07-Jul-2009
Measured by	Christian Andersen

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

4.2. Bluetooth Test results


4.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

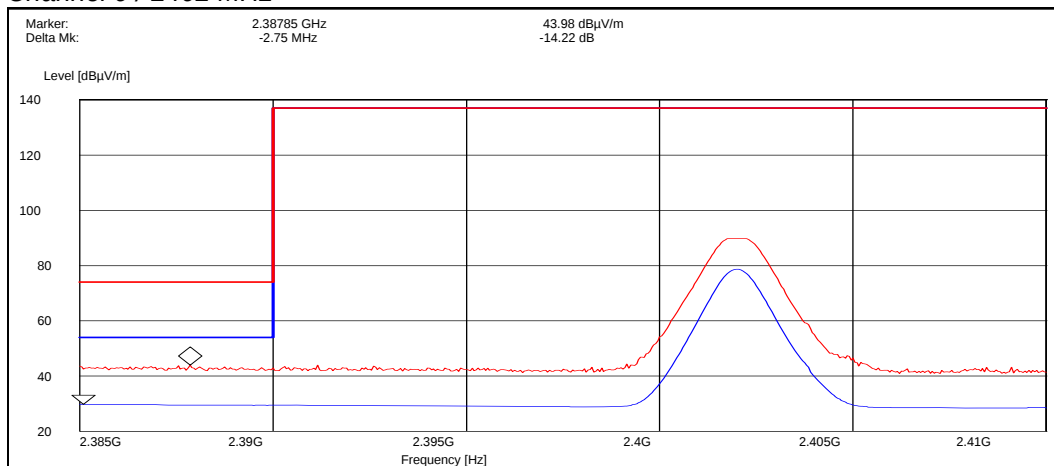


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	44.00	Passed
Average	29.80	Passed

Channel 78 / 2480 MHz

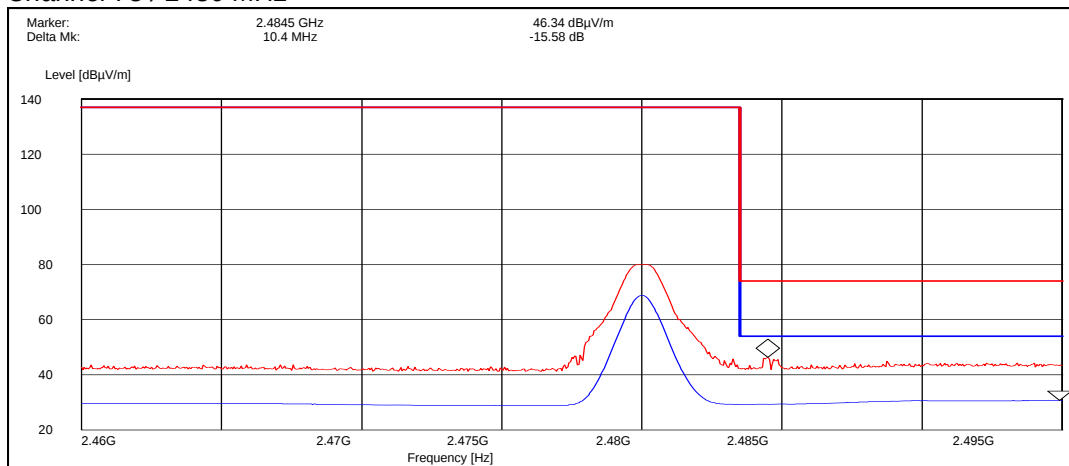


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	46.30	Passed
Average	30.80	Passed

Hopping on, low end

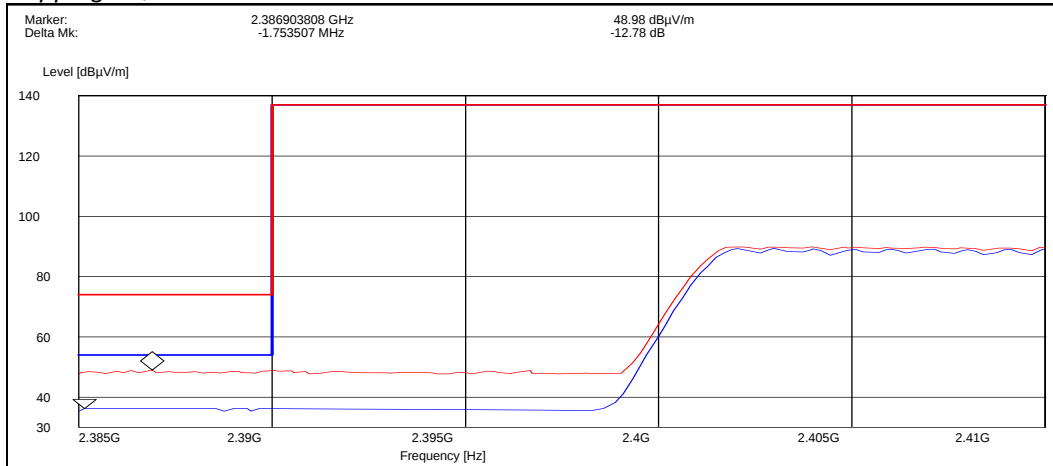

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	49.00	Passed
Average	36.20	Passed


Hopping on, high end

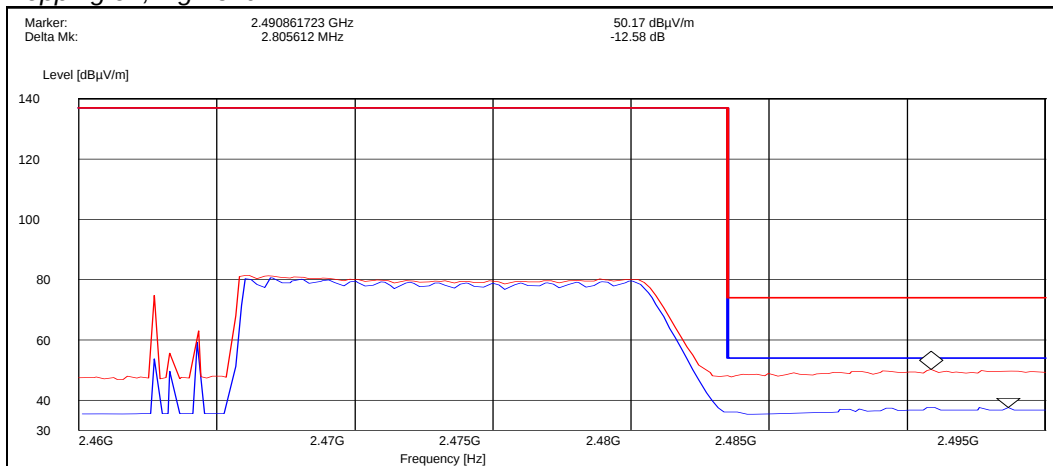

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	50.20	Passed
Average	37.60	Passed


4.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

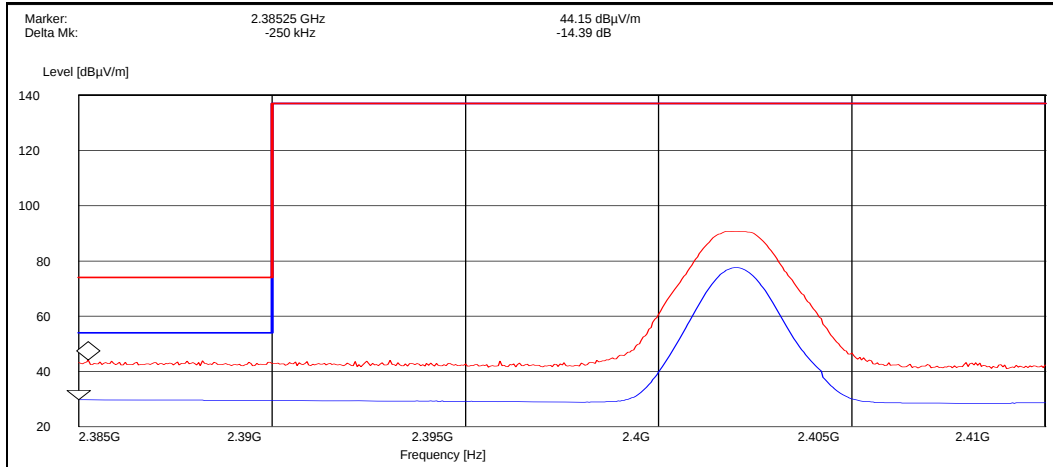


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	44.20	Passed
Average	29.80	Passed

Channel 78 / 2480 MHz

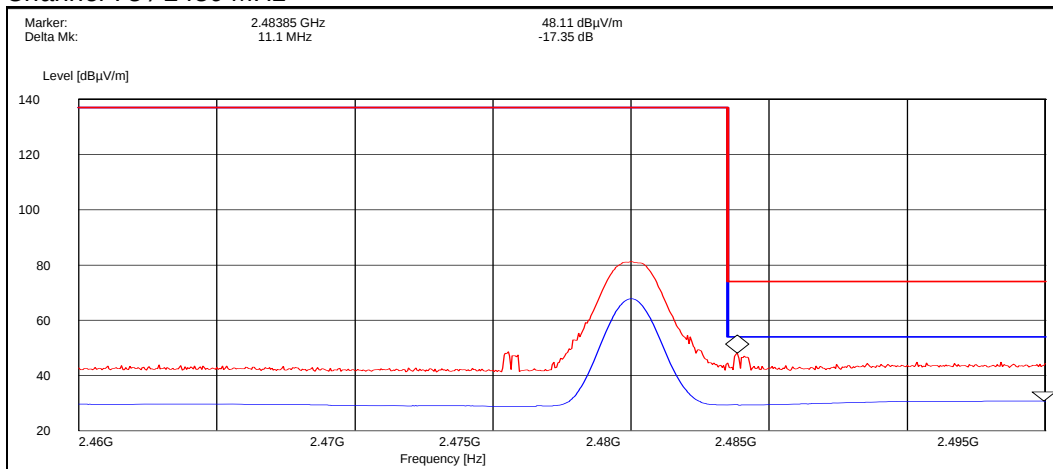


Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	48.10	Passed
Average	30.80	Passed

Hopping on, low end

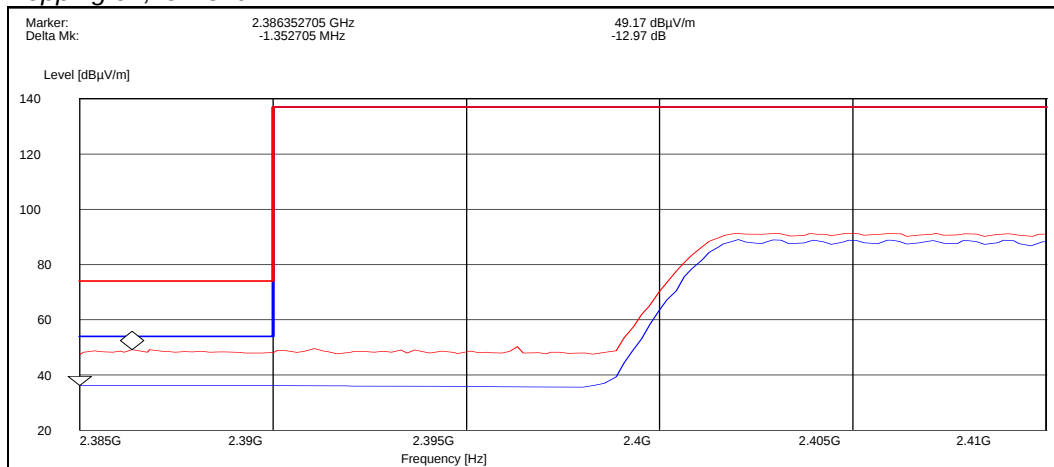

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	49.20	Passed
Average	36.20	Passed

Hopping on, high end

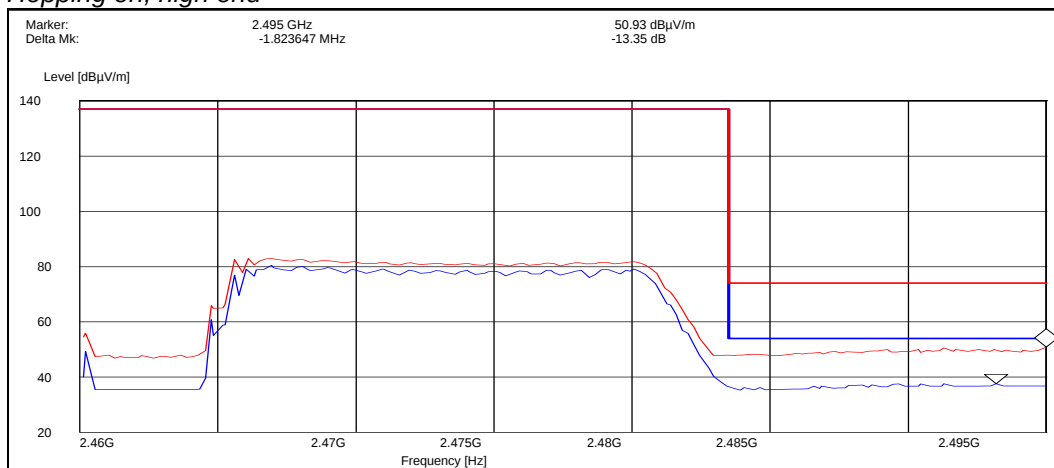

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	50.90	Passed
Average	37.60	Passed

5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)

EUT with DUT number	RM-389 DUT: 25055
Accessories with DUT numbers	BL-4UV DUT: 25044, AC-31 DUT: 25035, CA-101V DUT 25023
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 56 / 1022
Date of measurements	3-July-2009
Measured by	Ruben Hansen / Christian Andersen

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

5.2. Bluetooth Test results

5.2.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

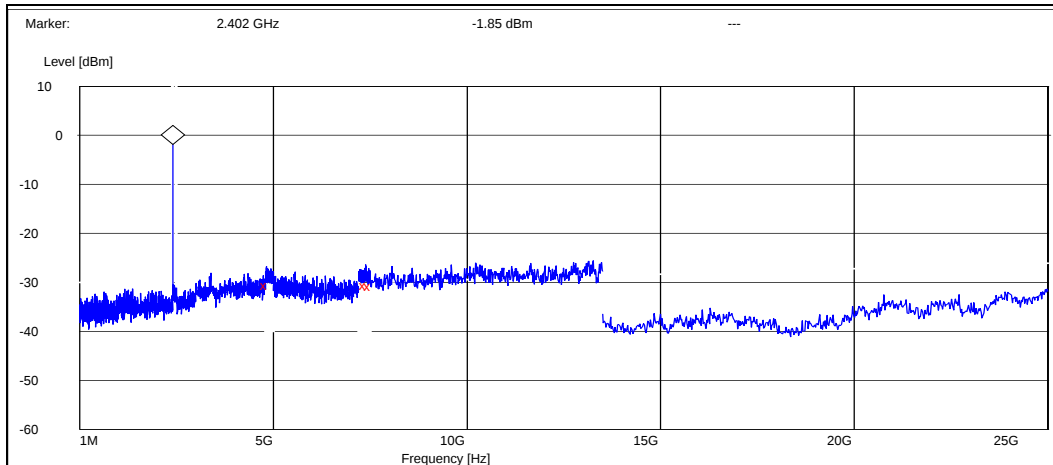

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4826.400000	-28.754205	Passed
7384.200000	-28.754205	Passed
7500.000000	-28.854205	Passed


Channel 40 / 2442 MHz

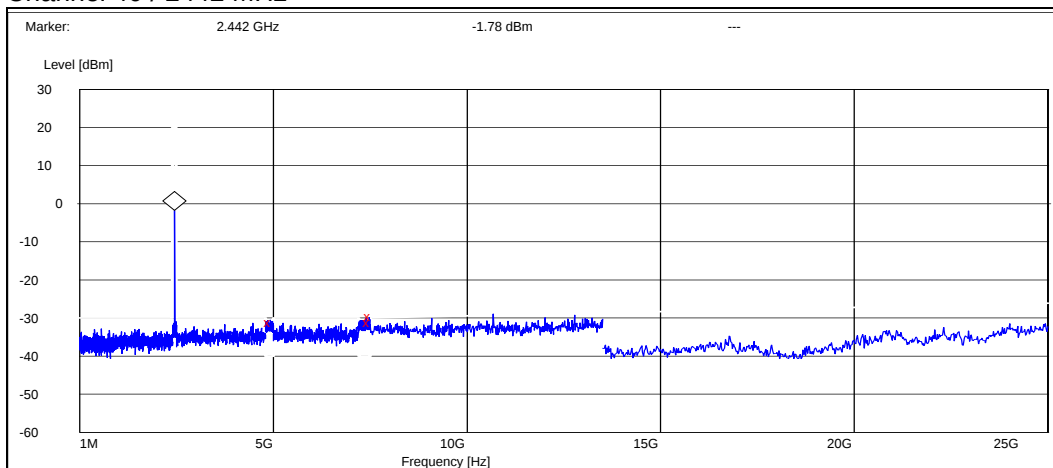

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4918.400000	-29.215302	Passed
7476.000000	-29.215302	Passed
7500.000000	-27.715302	Passed

Channel 78 / 2480 MHz

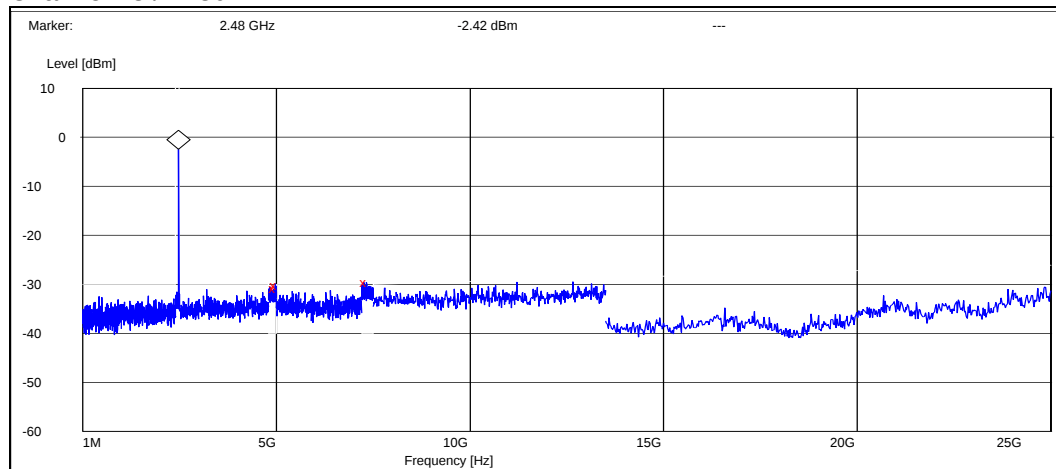


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4978.400000	-28.483504	Passed
5000.000000	-27.883504	Passed
7322.400000	-27.183504	Passed

5.2.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

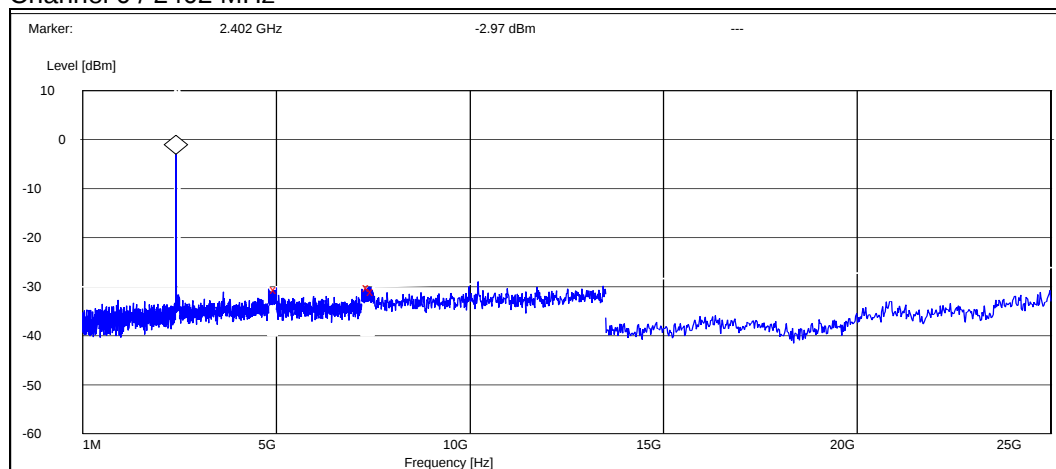

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4997.600000	-27.433104	Passed
7392.000000	-27.233104	Passed
7500.000000	-27.933104	Passed


Channel 40 / 2442 MHz

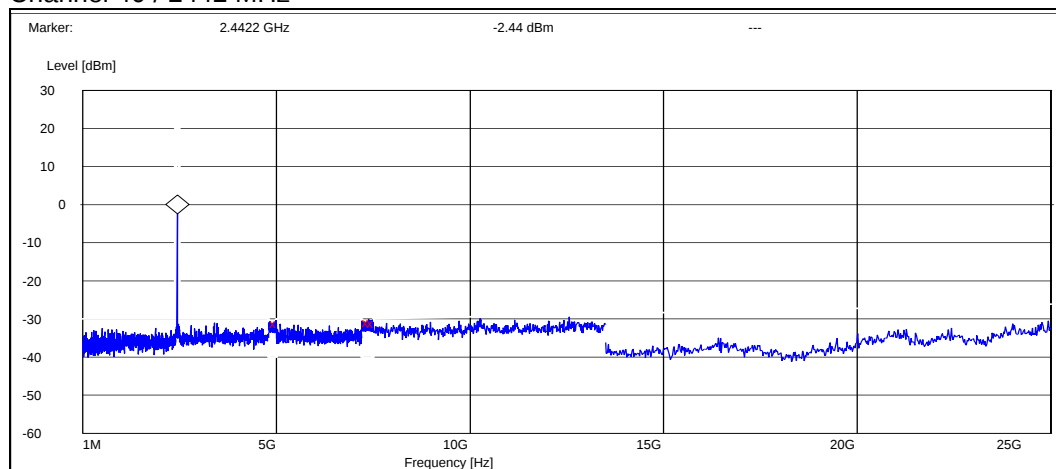

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4993.600000	-28.561378	Passed
7377.000000	-28.361378	Passed
7500.000000	-28.561378	Passed

Channel 78 / 2480 MHz

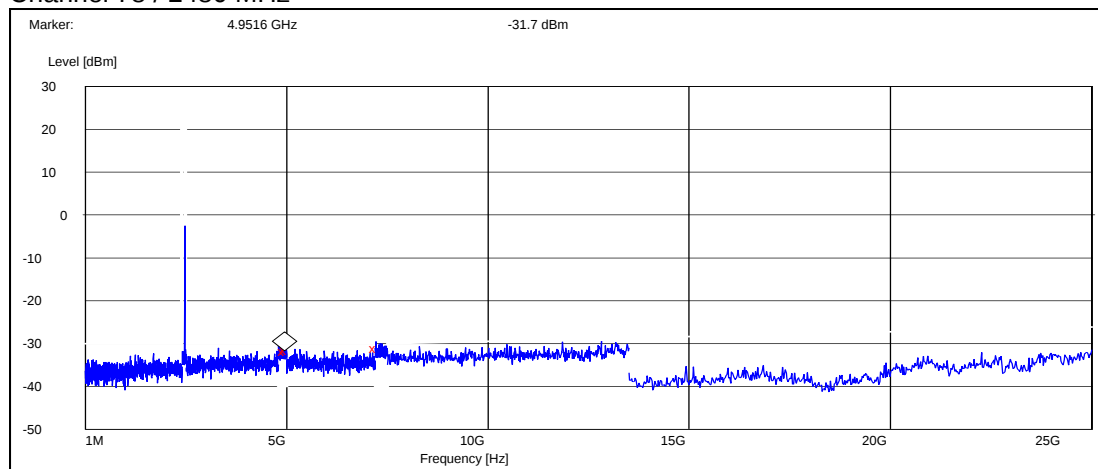

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4951.600000	-29.199390	Passed
5000.000000	-29.099390	Passed
7220.400000	-28.499390	Passed

6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-389V DUT 25066
Accessories with DUT numbers	BL-4UV DUT 25041, AC-31 DUT 25037, CA-101V DUT 25023
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	Phone tested in flip open mode.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 39 / 99
Date of measurements	07-Jul-2009
Measured by	Christian Andersen

6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

TX mode, channel 0 / 2402 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	54.40	524.81	54.90	-0.5	HORIZONTAL	Passed
7206.000000	48.60	269.15	39.80	8.8	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	42.60	134.90	43.10	-0.5	HORIZONTAL	Passed
7206.000000	34.60	53.70	25.80	8.8	HORIZONTAL	Passed

TX mode, channel 40 / 2442 MHz

peak (RBW: 120 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
37.595391	24.20	16.22	40.30	-16.1	VERTICAL	Passed
74.067535	16.00	6.31	41.60	-25.6	HORIZONTAL	Passed
75.069940	18.50	8.41	44.00	-25.5	HORIZONTAL	Passed
108.756313	20.50	10.59	44.10	-23.6	VERTICAL	Passed

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
1947.895792	66.90	2213.09	70.20	-3.3	VERTICAL	Passed
4884.267535	53.20	457.09	53.40	-0.2	HORIZONTAL	Passed
4884.269539	53.20	457.09	53.40	-0.2	HORIZONTAL	Passed
7326.651303	45.20	181.97	36.40	8.8	HORIZONTAL	Passed
17479.461924	52.70	431.52	29.10	23.6	VERTICAL	Passed
17922.349699	59.00	891.25	29.80	29.2	HORIZONTAL	Passed

*1947.8 MHz frequency is coming from communication tester and thus ignored.

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1947.895792	66.30	2065.38	69.60	-3.3	VERTICAL	
4884.267535	39.60	95.50	39.80	-0.2	HORIZONTAL	
4884.269539	39.70	96.61	39.90	-0.2	HORIZONTAL	
7326.151303	32.90	44.16	24.10	8.8	HORIZONTAL	
17481.461924	40.00	100.00	16.40	23.6	VERTICAL	
17920.849699	46.00	199.53	16.90	29.1	HORIZONTAL	

*1947.8 MHz frequency is coming from communication tester and thus ignored.

TX mode, channel 78 / 2480 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	52.90	441.57	53.00	-0.1	HORIZONTAL	Passed
7440.000000	47.80	245.47	38.20	9.6	HORIZONTAL	Passed

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	40.80	109.65	40.90	-0.1	HORIZONTAL	Passed
7440.000000	33.30	46.24	23.70	9.6	HORIZONTAL	Passed

6.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	56.20	645.65	56.70	-0.5	HORIZONTAL	Passed
7206.000000	51.30	367.28	42.50	8.8	HORIZONTAL	Passed

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	48.10	254.10	48.60	-0.5	HORIZONTAL	Passed
7206.000000	39.40	93.33	30.60	8.8	HORIZONTAL	Passed

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
37.595391	19.00	8.91	35.10	-16.1	VERTICAL	Passed
108.056313	22.00	12.59	45.60	-23.6	VERTICAL	Passed

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1947.895792	59.50	944.06	62.80	-3.3	VERTICAL	Passed
4883.769539	54.90	555.90	55.10	-0.2	HORIZONTAL	Passed
4884.267535	54.80	549.54	55.00	-0.2	HORIZONTAL	Passed
7325.151303	47.90	248.31	39.10	8.8	HORIZONTAL	Passed
17449.903808	52.90	441.57	29.40	23.5	HORIZONTAL	Passed
17907.315631	59.10	901.57	30.20	28.9	HORIZONTAL	Passed

*1947.8 MHz frequency is coming from communication tester and thus ignored.

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1947.895792	58.40	831.76	61.70	-3.3	VERTICAL	Passed
4883.767535	46.40	208.93	46.60	-0.2	HORIZONTAL	Passed
4883.769539	46.40	208.93	46.60	-0.2	HORIZONTAL	Passed
7325.651303	36.90	69.98	28.10	8.8	HORIZONTAL	Passed
17453.903808	40.10	101.16	16.60	23.5	HORIZONTAL	Passed
17910.315631	45.80	194.98	16.90	28.9	HORIZONTAL	Passed

*1947.8 MHz frequency is coming from communication tester and thus ignored.

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	54.40	524.81	54.50	-0.1	HORIZONTAL	Passed
7440.000000	49.00	281.84	39.40	9.6	HORIZONTAL	Passed

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	46.10	201.84	46.20	-0.1	HORIZONTAL	Passed
7440.000000	36.60	67.61	27.00	9.6	HORIZONTAL	Passed

7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-389V Dut 25064
Accessories with DUT numbers	BL-4UV Dut 25045, AC-31 Dut 25035, CA-101V Dut 25017
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24.1 / 57.0 102.9
Date of measurements	01-Jul-2009
Measured by	Allan F. Henriksen

7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

7.2. Bluetooth Test results

7.2.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

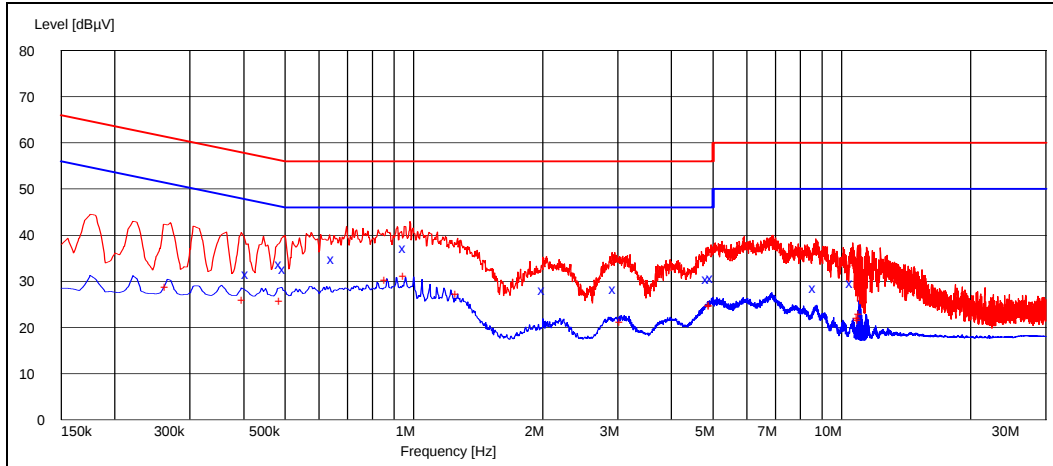

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.410000	31.50	L1	Passed
0.490000	33.70	L1	Passed
0.500000	32.60	L1	Passed
0.650000	34.80	L1	Passed
0.955000	37.30	L1	Passed
2.020000	28.00	L1	Passed
2.955000	28.30	L1	Passed
4.880000	30.60	N	Passed
4.990000	30.80	N	Passed
8.670000	28.50	N	Passed
10.580000	29.60	L1	Passed


Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.265000	28.70	L1	Passed
0.400000	26.00	L1	Passed
0.490000	25.70	N	Passed
0.865000	30.30	N	Passed
0.955000	31.20	N	Passed
1.265000	27.20	N	Passed
3.055000	21.10	N	Passed
4.945000	24.80	N	Passed
4.950000	24.60	N	Passed
10.980000	21.90	L1	Passed
11.025000	21.60	L1	Passed
11.065000	22.90	L1	Passed

7.2.2 8DPSK modulation, PRBS packet type

Channel 40 / 2442 MHz

Middle channel / 98.0 MHz

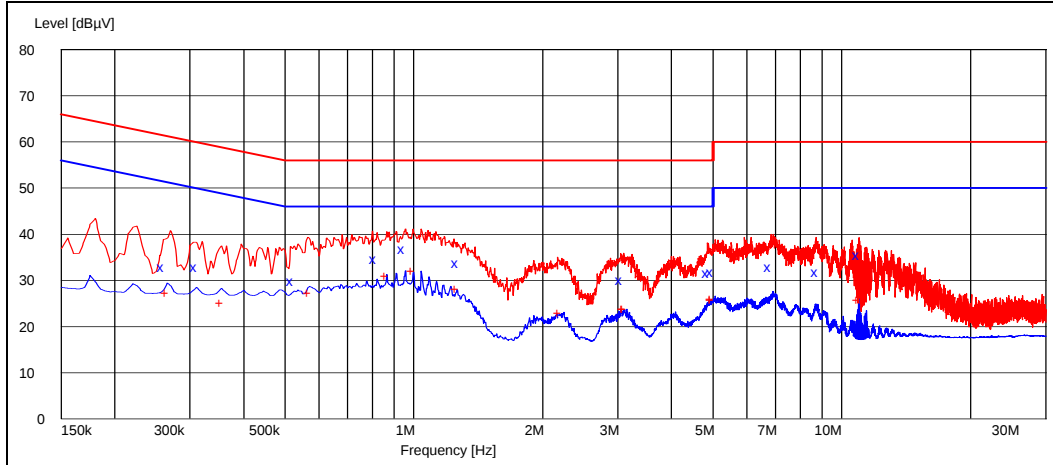

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.260000	32.90	L1	Passed
0.310000	33.00	L1	Passed
0.520000	29.90	L1	Passed
0.815000	34.70	N	Passed
0.950000	36.90	N	Passed
1.265000	33.80	N	Passed
3.060000	30.20	N	Passed
4.885000	31.50	N	Passed
4.995000	31.80	N	Passed
6.815000	32.80	N	Passed
8.765000	31.70	N	Passed
10.965000	35.40	N	Passed

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.265000	27.30	L1	Passed
0.355000	25.20	L1	Passed
0.570000	27.20	N	Passed
0.865000	31.00	N	Passed
0.995000	31.90	N	Passed
1.260000	28.10	N	Passed
2.195000	23.00	N	Passed
3.095000	23.80	N	Passed
3.100000	23.80	N	Passed
4.970000	25.70	N	Passed
4.975000	25.90	N	Passed
10.965000	25.80	N	Passed

8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a))

EUT with DUT number	RM-389 DUT: 25055
Accessories with DUT numbers	BL-4UV DUT: 25044, AC-31 DUT: 25035, CA-101V DUT 25023
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 56 / 1022
Date of measurements	3-July-2009
Measured by	Ruben Hansen / Christian Andersen

8.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

8.2. Bluetooth Test results


8.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	900.000	Passed
40 / 2442	900.000	Passed
78 / 2480	900.000	Passed


Channel 0 / 2402 MHz

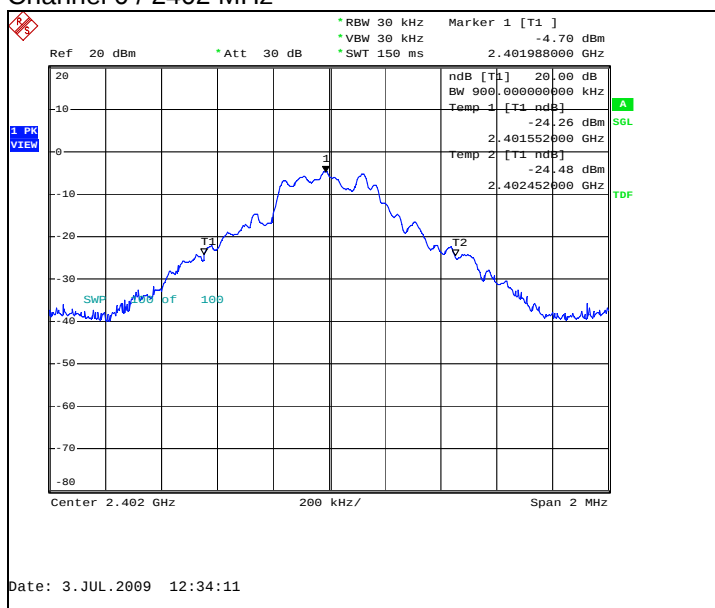

Channel 40 / 2442 MHz

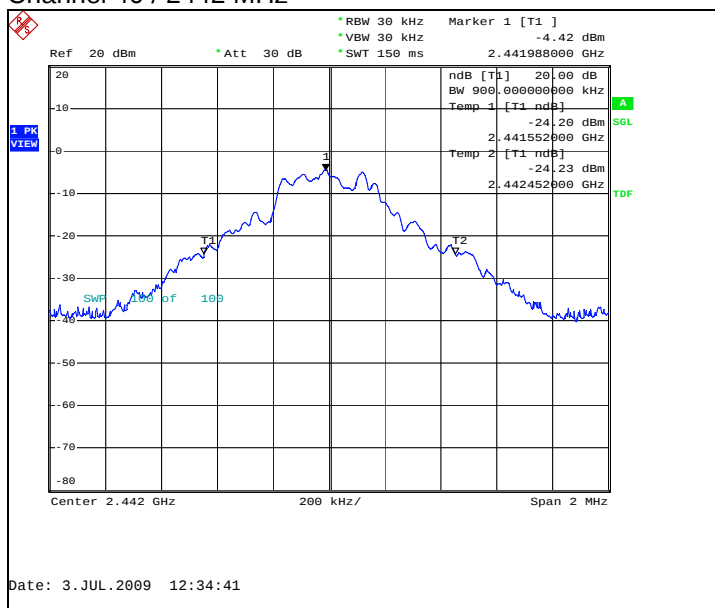


Channel 78 / 2480 MHz

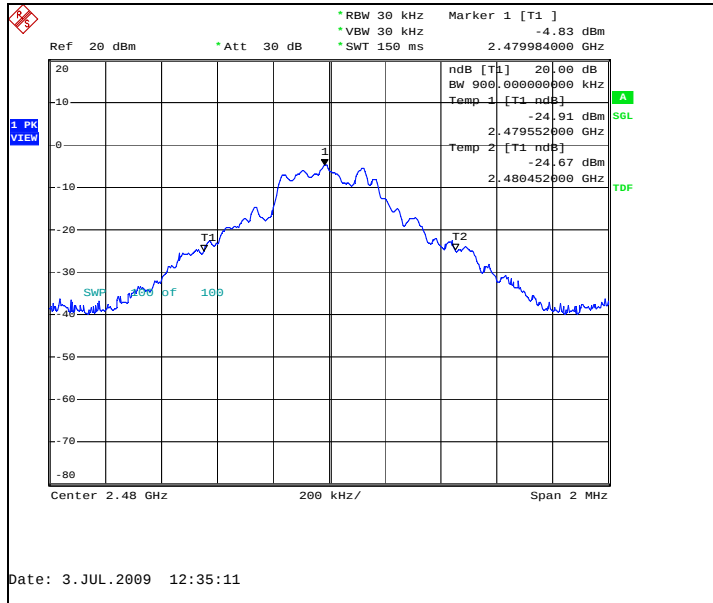


8.2.2 8DPSK modulation, PRBS packet type

Channel / f _c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1332.000	Passed
40 / 2442	1320.000	Passed
78 / 2480	1320.000	Passed


Channel 0 / 2402 MHz

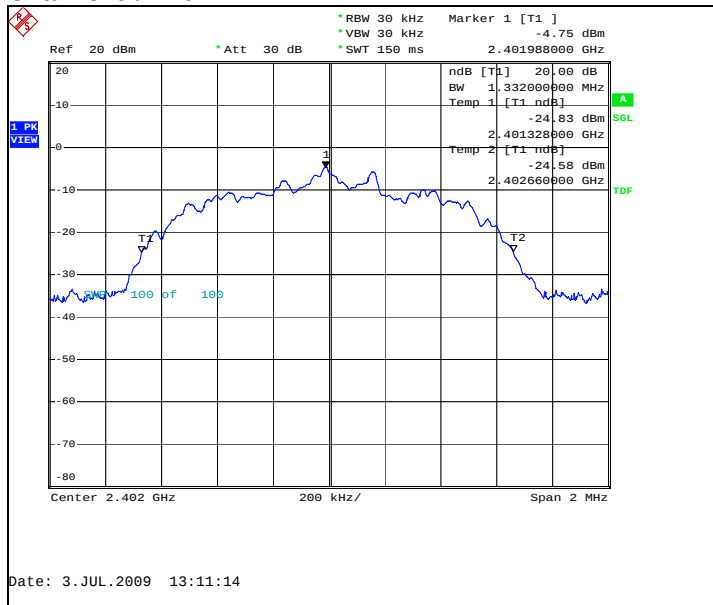

Channel 40 / 2442 MHz

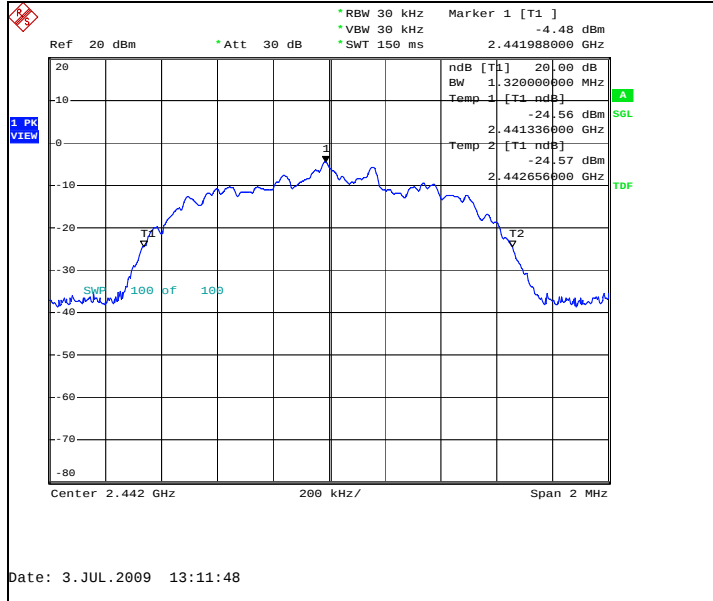

Channel 78 / 2480 MHz

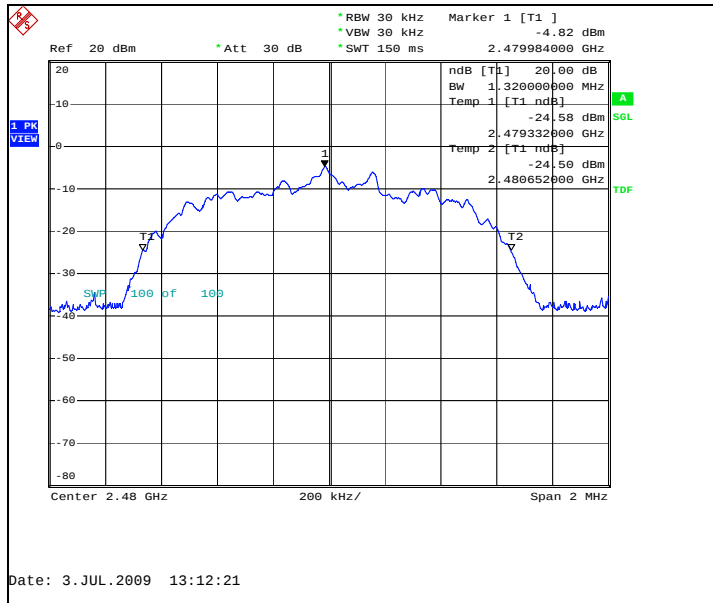

9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b))

EUT with DUT number	RM-389 DUT: 25055
Accessories with DUT numbers	BL-4UV DUT: 25044, AC-31 DUT: 25035, CA-101V DUT 25023
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 56 / 1022
Date of measurements	3-July-2009
Measured by	Ruben Hansen / Christian Andersen

9.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

9.2. Bluetooth Test results

9.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1020	Passed


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

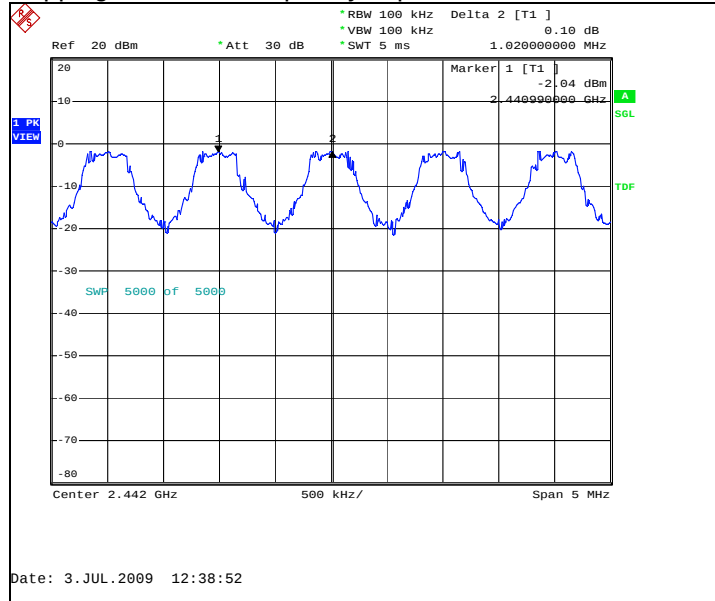

9.2.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1120	Passed

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

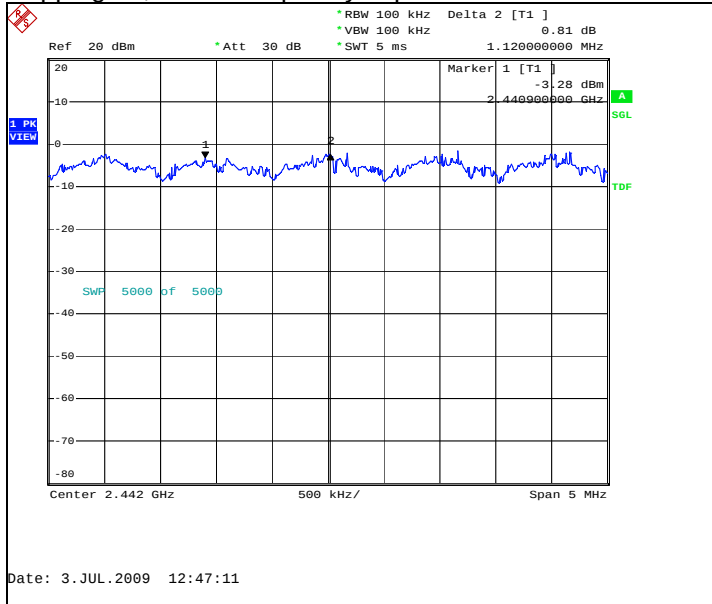

10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-389 DUT: 25055
Accessories with DUT numbers	BL-4UV DUT: 25044, AC-31 DUT: 25035, CA-101V DUT 25023
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 56 / 1022
Date of measurements	3-July-2009
Measured by	Ruben Hansen / Christian Andersen

10.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

10.2. Bluetooth Test results

10.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	Passed


Hopping on, number of hopping frequencies

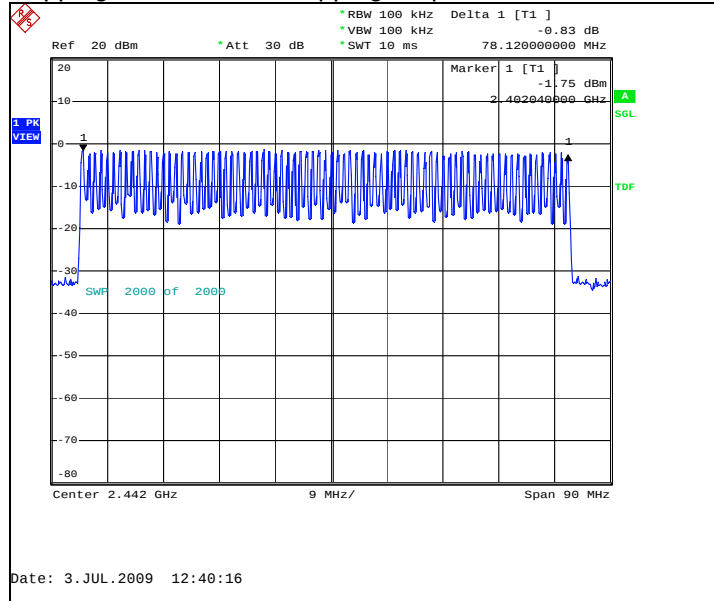

10.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
70	Passed

Hopping on, number of hopping frequencies

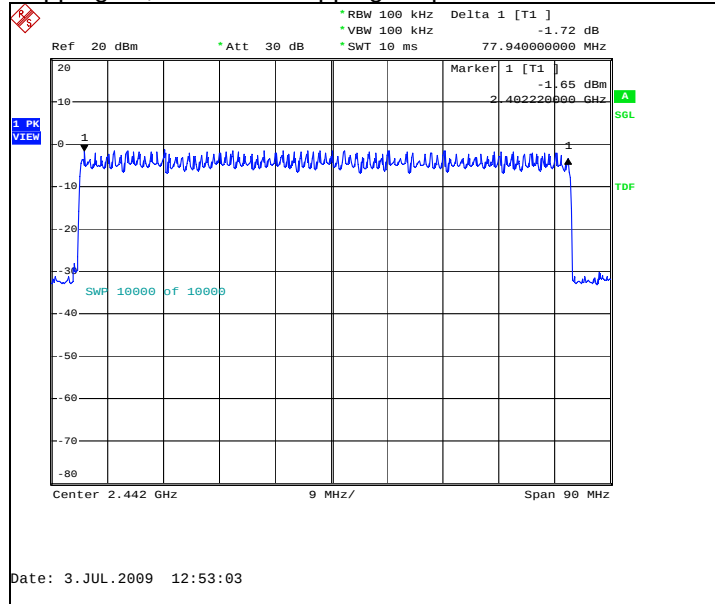

11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

EUT with DUT number	RM-389 DUT: 25055
Accessories with DUT numbers	BL-4UV DUT: 25044, AC-31 DUT: 25035, CA-101V DUT 25023
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 56 / 1022
Date of measurements	3-July-2009
Measured by	Ruben Hansen / Christian Andersen

11.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

11.2. Bluetooth test results


11.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
82	2920	0.239440	Passed

Hopping on, number of transmissions, channel 40 / 2442 MHz

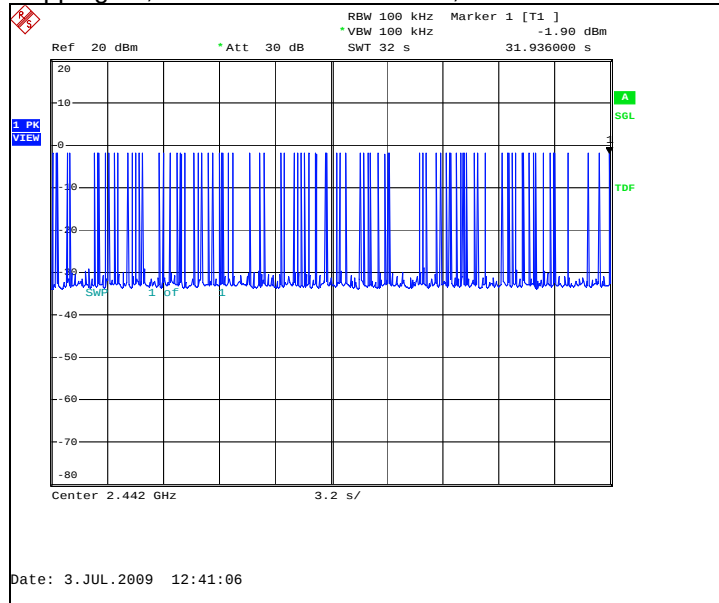


Hopping on, duration of one transmission, channel 40 / 2442 MHz

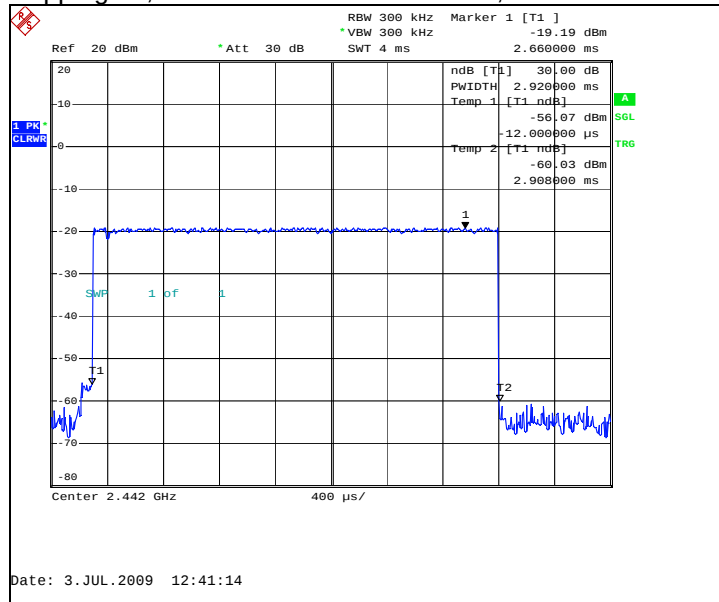


11.2.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
94	2920	0.274480	Passed

Hopping on, number of transmissions, channel 40 / 2442 MHz

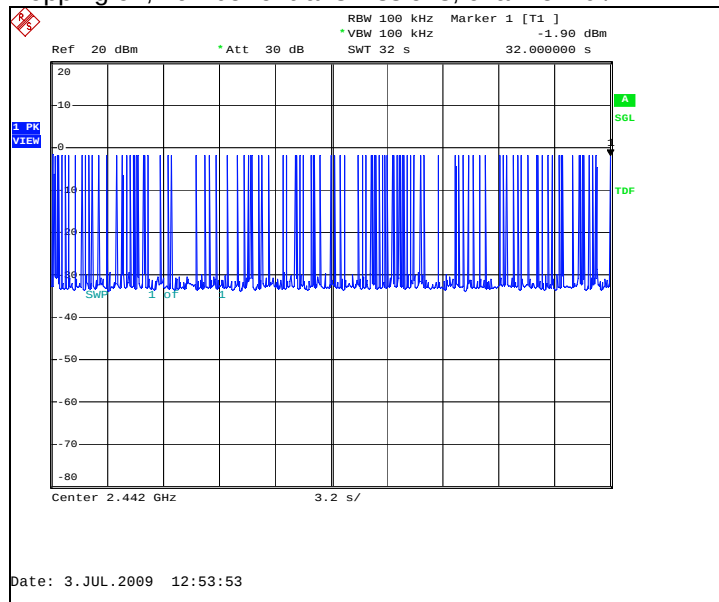

Hopping on, duration of one transmission, channel 40 / 2442 MHz

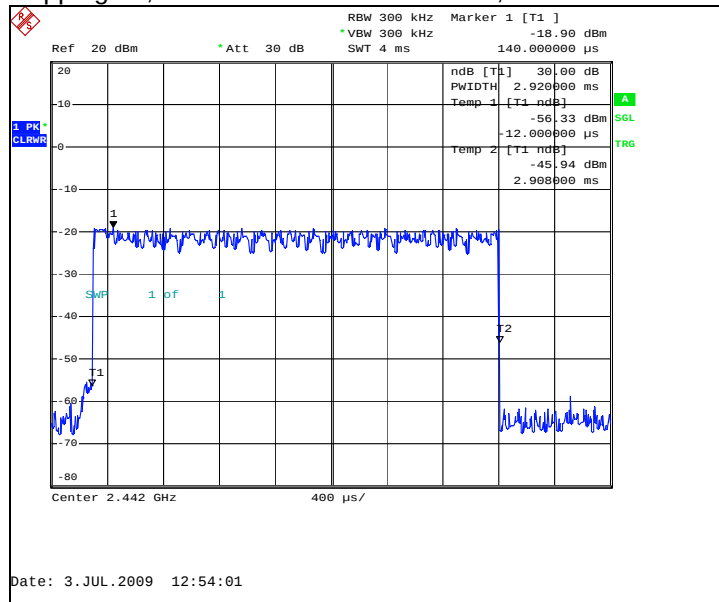

12. Test Equipment

12.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15C, 15B
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	System DC Power Supply	HP6632A	Hewlett Packard	22/24/27, 15C, 15B
19678	Spectrum Analyzer 26 GHz	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
16601	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
19625	Vötsch Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
13357	Rohde & Schwartz Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth EDR Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B

12.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18416	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
14020	Power Supply Module Relay Switching System 45W	10-910-002	Pickering	22/24/27, 15C, 15B
15743	Power Supply Module Relay Switching System 50W	10-910L-001	Pickering	22/24/27, 15C, 15B
16490	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24/27, 15C, 15B
	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24/27, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24/27, 15C, 15B
	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
18792	Multi Device Controller	2090	ETS-EMCO	22/24/27, 15C, 15B
14963	RF Preamplifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	22/24/27, 15C, 15B
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	22/24/27, 15C, 15B
20335	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Shielded Chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B
19151	High Pass Filter 3GHz	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
	WHK3.0/18G-10ss			
13937	Ultra Stable Notch Filter 850MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B
14114	Highpass filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
19587	BT/WLAN Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
20115	WDCMA Band 2 filter		Wainwright	24, 15C, 15B
20114	WDCMA Band 4 filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	27, 15C, 15B
20116	WDCMA Band 5&6 filter	WRCG832/83/-825/845-40/5SS	Wainwright	22, 15C, 15B
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953-1940/1960-40/6SS	Wainwright	22/24/27, 15C, 15B
20031	Double Ridged Broadband Horn	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
19966	Magnetic Loop Antenna 9 kHz - 30 MHz	HFH2-Z2	Rohde&Schwarz	15C, 15B
14993	EMI Test Receiver 9KHz-2750MHz	ESCS30	Rohde&Schwarz	22/24/27, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-----	NMP Cph	22/24/27, 15C, 15B
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-----	NMP Cph	22/24/27, 15C, 15B
20168	Bluetooth EDR Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B