



FCC RF Test Report

APPLICANT : VERTU Corporation Limited
EQUIPMENT : GSM 4 Band/CDMA/EVDO 2 Band/TD-SCDMA
2Band/UMTS 5 Band/HSUPA/HSDPA/LTE 21
Band/WLAN/BT/NFC mobile phone
BRAND NAME : VERTU
MODEL NAME : CONSTELLATION X
TYPE NAME : VM-08
FCC ID : P7QVM-08
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jul. 20, 2016 and testing was completed on Dec. 22, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.

No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

1	GENERAL DESCRIPTION	5
1.1	Applicant	5
1.2	Manufacturer	5
1.3	Product Feature of Equipment Under Test	5
1.4	Product Specification of Equipment Under Test	6
1.5	Modification of EUT	6
1.6	Testing Location	6
1.7	Applicable Standards	6
1.8	Specification of Accessory	7
2	TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1	Descriptions of Test Mode	8
2.2	Test Mode	9
2.3	Connection Diagram of Test System	10
2.4	Support Unit used in test configuration and system	11
2.5	EUT Operation Test Setup	11
2.6	Measurement Results Explanation Example	11
3	TEST RESULT	12
3.1	6dB and 99% Bandwidth Measurement	12
3.2	Peak Output Power Measurement	17
3.3	Power Spectral Density Measurement	18
3.4	Conducted Band Edges and Spurious Emission Measurement	23
3.5	Radiated Band Edges and Spurious Emission Measurement	32
3.6	AC Conducted Emission Measurement	36
3.7	Antenna Requirements	40
4	LIST OF MEASURING EQUIPMENT	41
5	UNCERTAINTY OF EVALUATION	42
APPENDIX A. CONDUCTED TEST RESULTS		
APPENDIX B. RADIATED SPURIOUS EMISSION		
APPENDIX C. DUTY CYCLE PLOTS		
APPENDIX D. SETUP PHOTOGRAPHS		



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR672003B	Rev. 01	Initial issue of report	Feb. 17, 2017

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.93 dB at 44.550 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 13.64 dB at 18.622 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

VERTU Corporation Limited

Beacon Hill Road, Church Crookham, Hampshire GU52 8DY, United Kingdom.

1.2 Manufacturer

VERTU Corporation Limited

Beacon Hill Road, Church Crookham, Hampshire GU52 8DY, United Kingdom.

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	GSM 4 Band/CDMA/EVDO 2 Band/TD-SCDMA 2Band/UMTS 5 Band/HSUPA/HSDPA/LTE 21 Band/WLAN/BT/NFC mobile phone
Brand Name	VERTU
Model Name	CONSTELLATION X
Type Name	VM-08
FCC ID	P7QVM-08
GSM Operating Band(s)	GSM 850/900/1800/1900MHz
WCDMA Operating Band(s)	FDD Band I / II / IV / V /VIII
CDMA Operating Band(s)	CDMA2000 BC0/BC1
LTE Operating Band(s)	FDD Band 1/2/3/4/5/7/8/12/13/17/19/20/25/26/28/29/30 TDD Band 38/39/40/41
GPRS / EGPRS Multi Slot Class	GPRS Class 33, EGPRS Class 33
Wi-Fi Specification	2.4GHz 802.11b/g/n HT20 5GHz 802.11a/n HT20/HT40 5GHz 802.11ac VHT20/VHT40/VHT80
Bluetooth Version	Bluetooth v3.0 + EDR / Bluetooth v4.0 LE/ Bluetooth v4.2 LE
NFC Type	A, B, F, V
IMEI Code	Conducted: 004402550120731/004402550120749 Conduction: 004402550120376/004402550120384 Radiation: 004402550120491/004402550120509
HW Version	PIO2
SW Version	6.0.1_1.434.0.070
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. Manufacturer's declaration LTE band 40 disabled by software.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	1.65 dBm (0.0015 W)
99% Occupied Bandwidth	1.051MHz
Antenna Type / Gain	PIFA Antenna with gain -2.00 dBi
Type of Modulation	Bluetooth LE : GFSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-KS	03CH03-KS	CO01-KS	306251

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ♦ ANSI C63.10-2013
- ♦ IC RSS-247 Issue 1
- ♦ IC RSS-Gen Issue 4

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.8 Specification of Accessory

Specification of Accessory			
AC Adapter	Brand Name	VERTU	Model Name AC-32V
	Power Rating	I/P: 100-240Vac, 450mA, O/P: 5Vdc, 2000mA	
Battery	Brand Name	VERTU	Model Name VBL-04
	Power Rating	3.82Vdc, 3200mAh	
USB Cable	Brand Name	VERTU	Model Name VC-02
	Signal Line Type	1.20m shielded cable, without ferrite core	
Earphone 1	Brand Name	VERTU	Model Name WH5-V
	Signal Line Type	1.20m Unshielded cable, without ferrite core	
Earphone 2	Brand Name	VERTU	Model Name HP-1V
	Signal Line Type	1.57m Unshielded cable, without ferrite core	
Earphone 3	Brand Name	VERTU	Model Name HP-1V
	Signal Line Type	1.55m Unshielded cable, without ferrite core	
Wireless Charger Pad	Brand Name	VERTU	Model Name AC-35V
	Power Rating	I/P: 5Vac, 1800mA	
Car Charger	Brand Name	VERTU	Model Name DC-30V
	Power Rating	I/P: 12/24Vdc, 1.35A MAX, O/P: 5.15Vdc, 2.1AMAX	
Bluetooth Travel Speaker	Brand Name	VERTU	Model Name SP-1V
	Power Rating	I/P: 5Vdc, 2Ah	
Portable Battery Charger	Brand Name	VERTU	Model Name DC-10V
	Power Rating	I/P: 5Vdc, 2A, O/P: 5Vdc, 1.5/2.1A	

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth – LE RF Output Power
		Data Rate / Modulation
		GFSK
		1Mbps
Ch00	2402MHz	1.23 dBm
Ch19	2440MHz	1.65 dBm
Ch39	2480MHz	0.76 dBm

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Z plane as worst plane) from all possible combinations.
- b. AC power line Conducted Emission was tested under maximum output power.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1 :GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone 1 + USB Cable (Charging from Adapter)
Remark: For Radiated TCs, The tests were performed with Adapter, Earphone 1, and USB Cable.	

2.3 Connection Diagram of Test System

<Bluetooth LE Tx Mode>

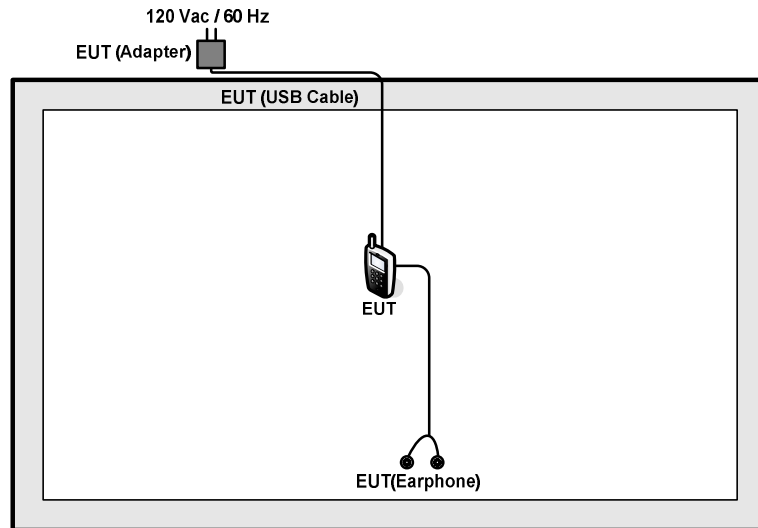

<AC Conducted Emission Mode>

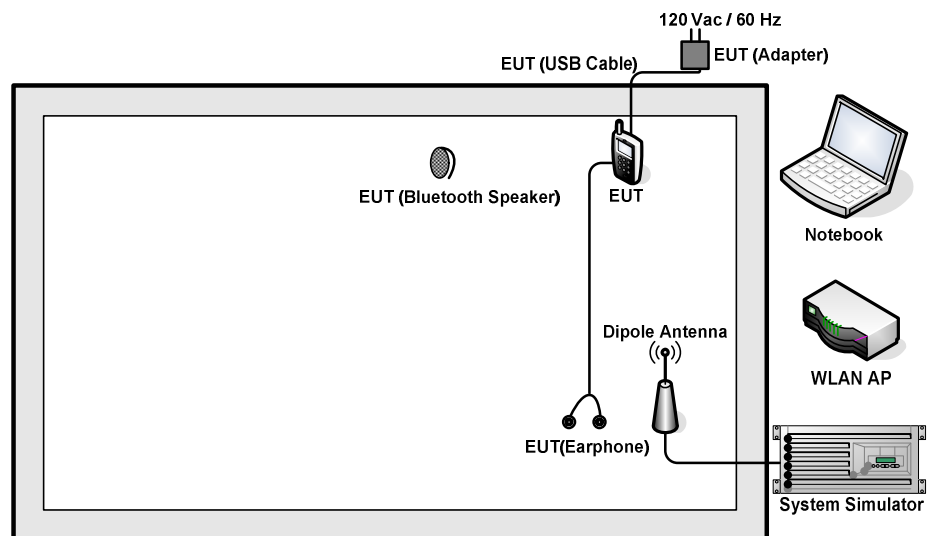

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	FCC DoC	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

For Bluetooth v4.2 LE function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.6 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.6 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

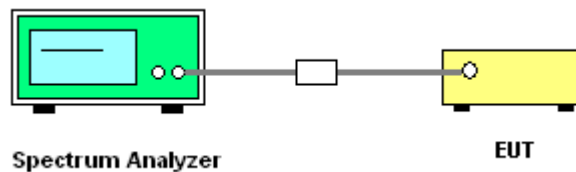




3.1.5 Test Result of 6dB Bandwidth

Test data refer to Appendix A.


6 dB Bandwidth Plot on Channel 00

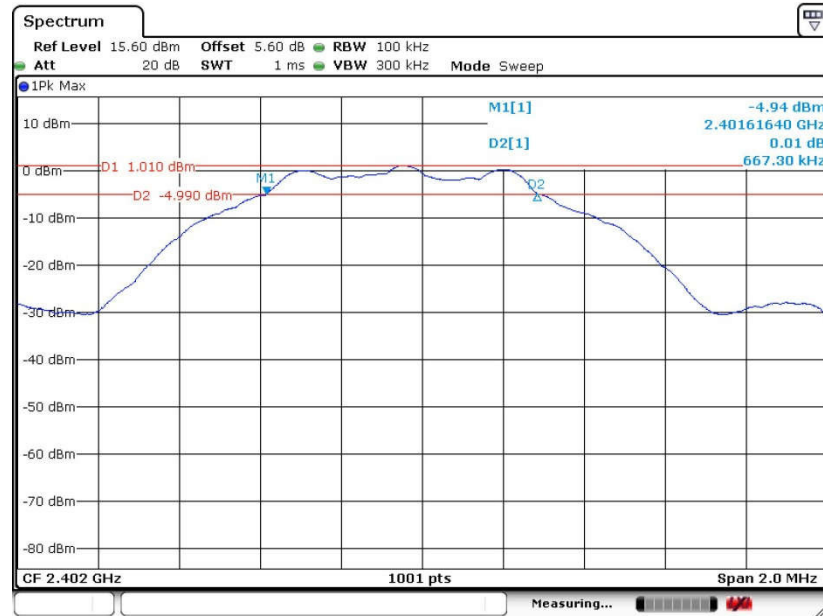

Date: 7.DEC.2016 00:56:20




6 dB Bandwidth Plot on Channel 19

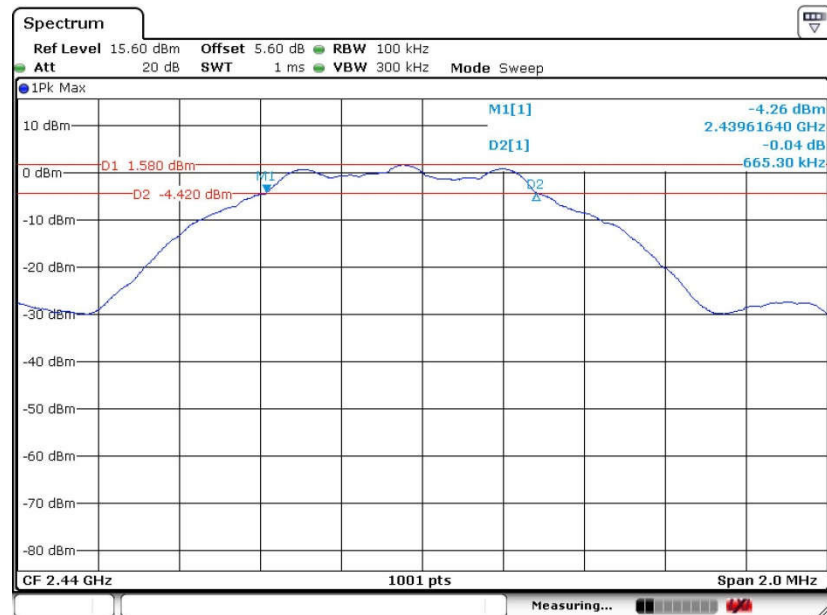

Date: 7.DEC.2016 01:01:12

6 dB Bandwidth Plot on Channel 39

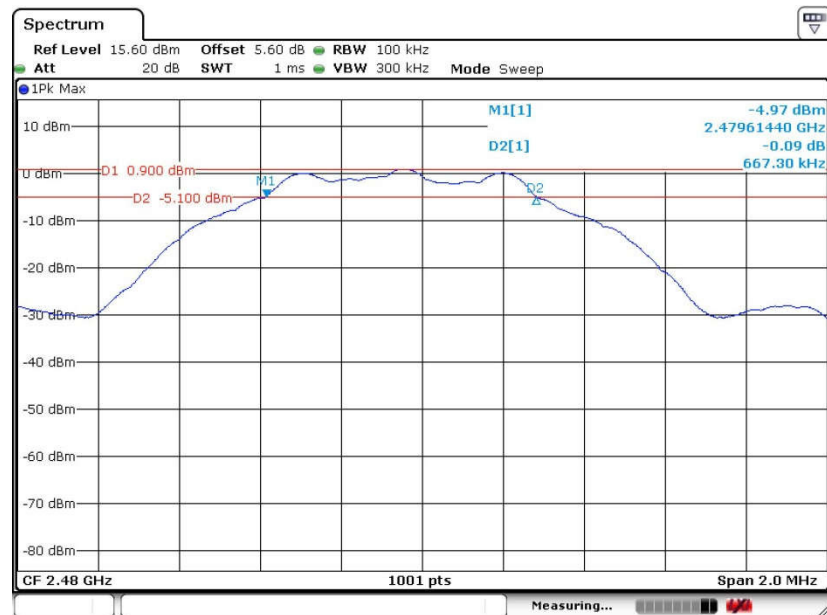


Date: 7.DEC.2016 01:10:14



3.1.6 Test Result of 99% Occupied Bandwidth

Test data refer to Appendix A.


99% Bandwidth Plot on Channel 00

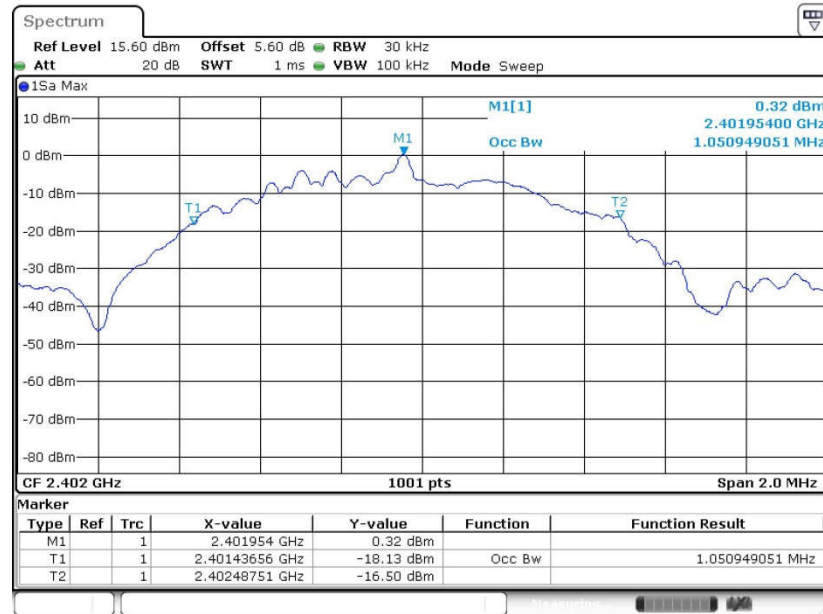


Date: 7.DEC.2016 01:08:33



99% Occupied Bandwidth Plot on Channel 19

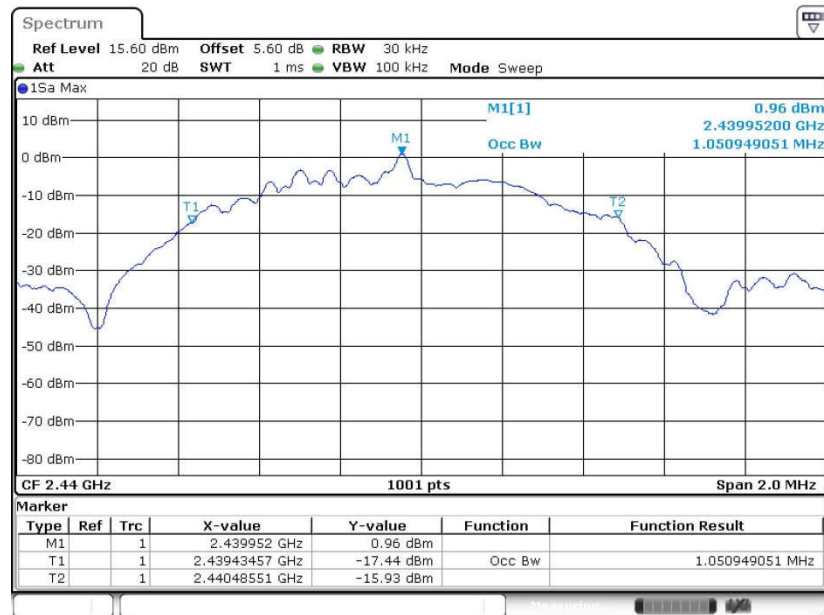

99% Occupied Bandwidth Plot on Channel 39

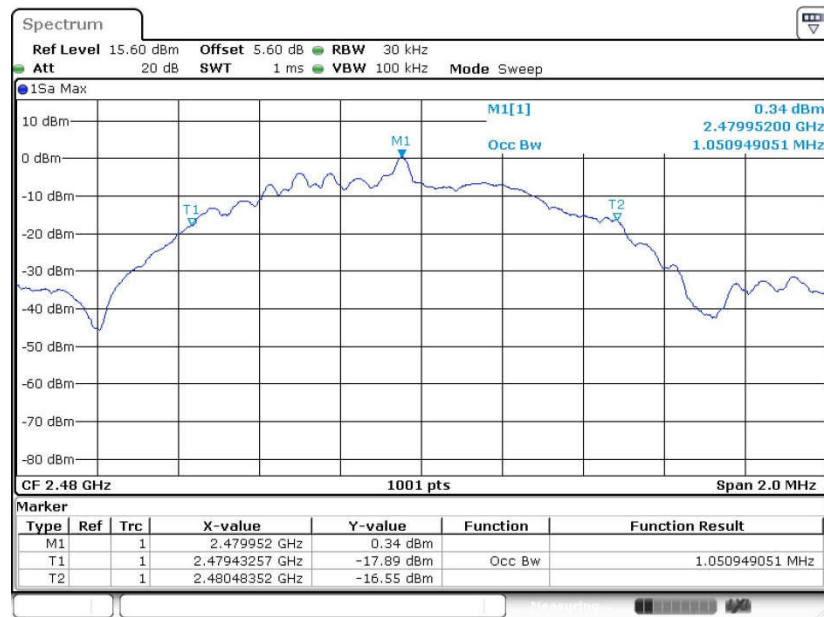

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

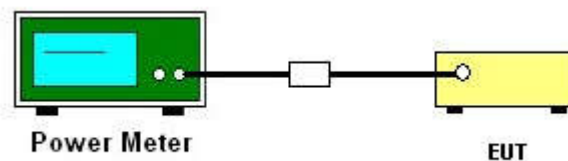

3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

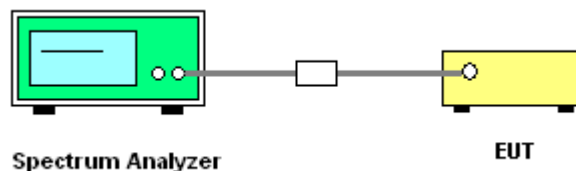




3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.

3.3.6 Test Result of Power Spectral Density Plots (100kHz)


PSD 100kHz Plot on Channel 00

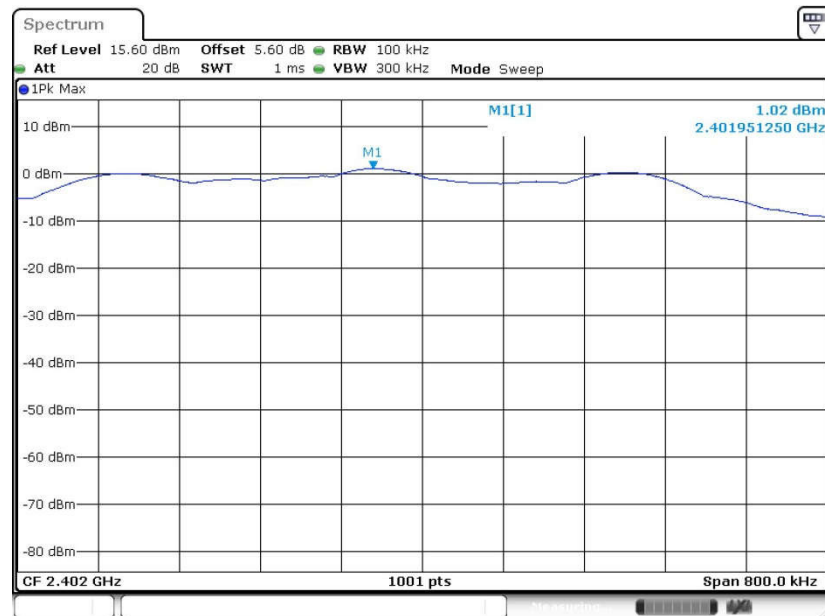

Date: 7.DEC.2016 00:57:58




PSD 100kHz Plot on Channel 19

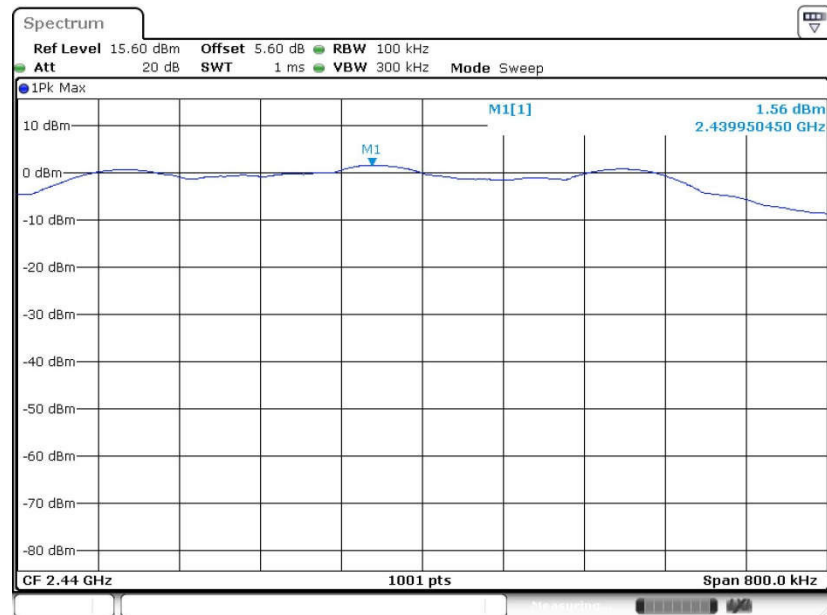

Date: 7.DEC.2016 01:01:49

PSD 100kHz Plot on Channel 39

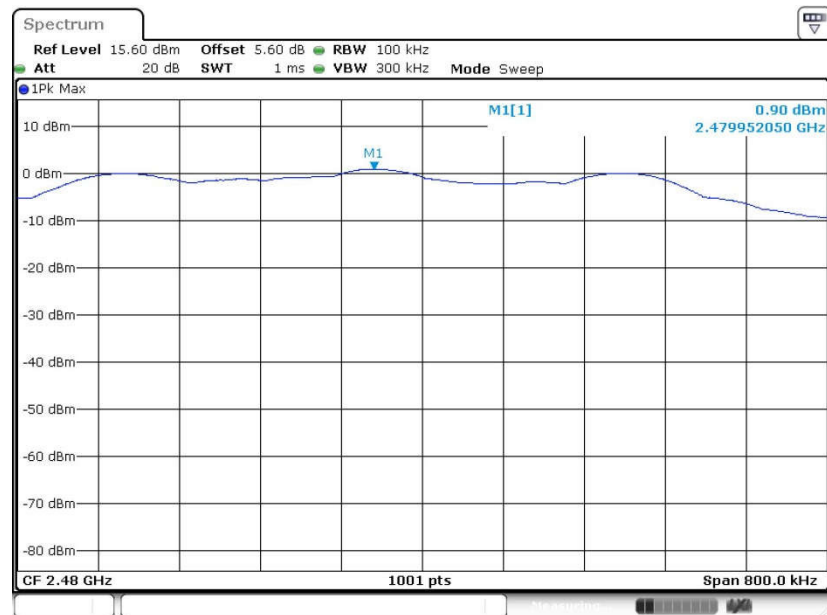


Date: 7.DEC.2016 01:10:50



3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 00

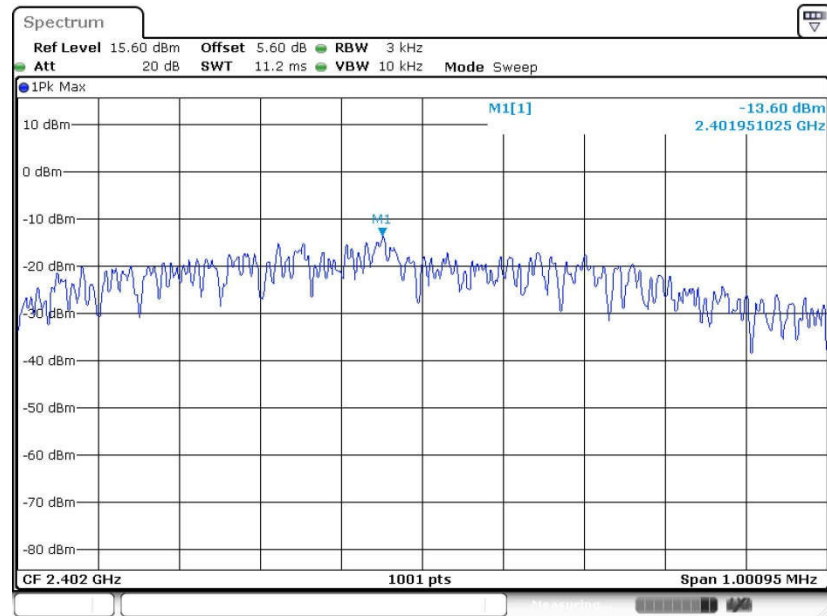

Date: 7.DEC.2016 00:57:43




PSD 3kHz Plot on Channel 19

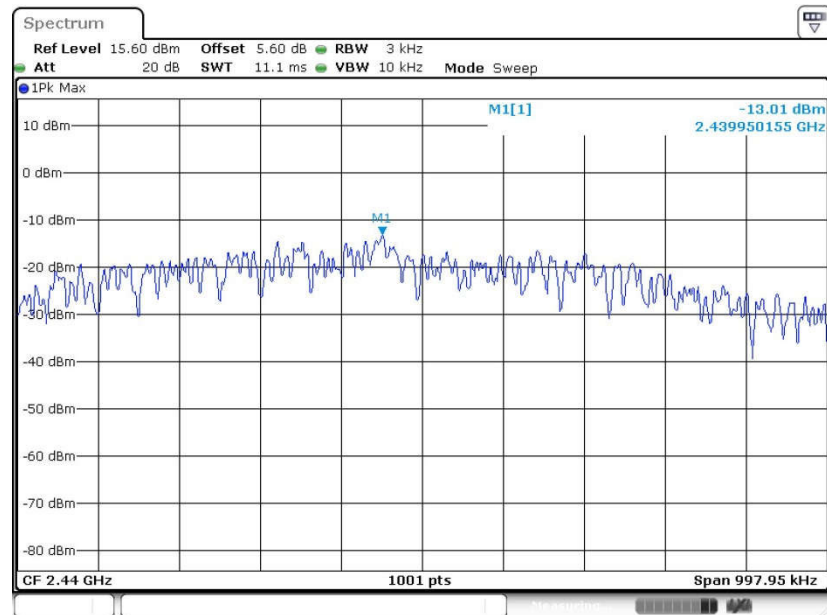

Date: 7.DEC.2016 01:01:31

PSD 3kHz Plot on Channel 39

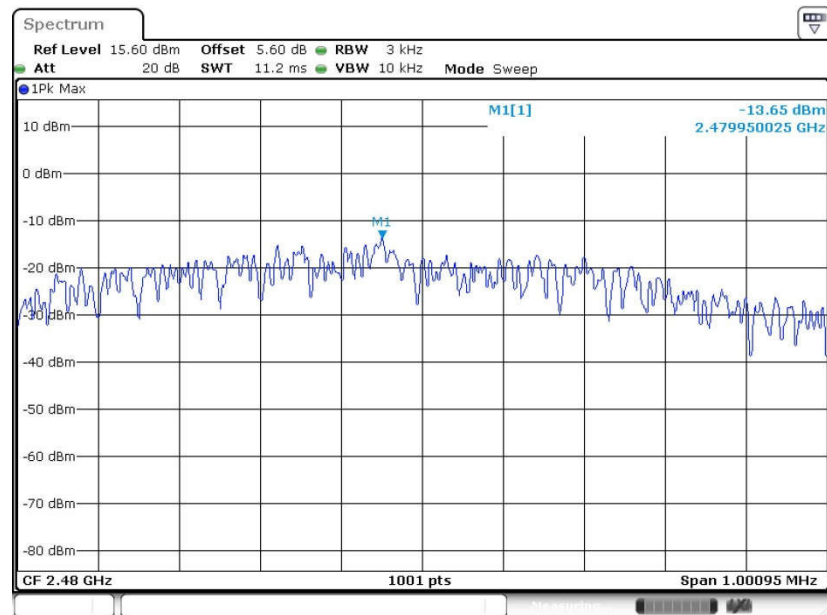

Date: 7.DEC.2016 01:10:35

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

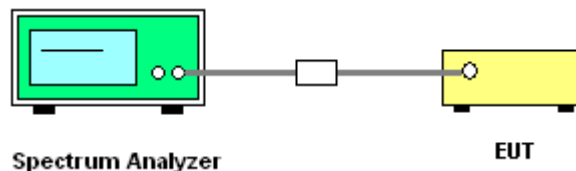



3.4.5 Test Result of Conducted Band Edges Plots


Low Band Edge Plot on Channel 00

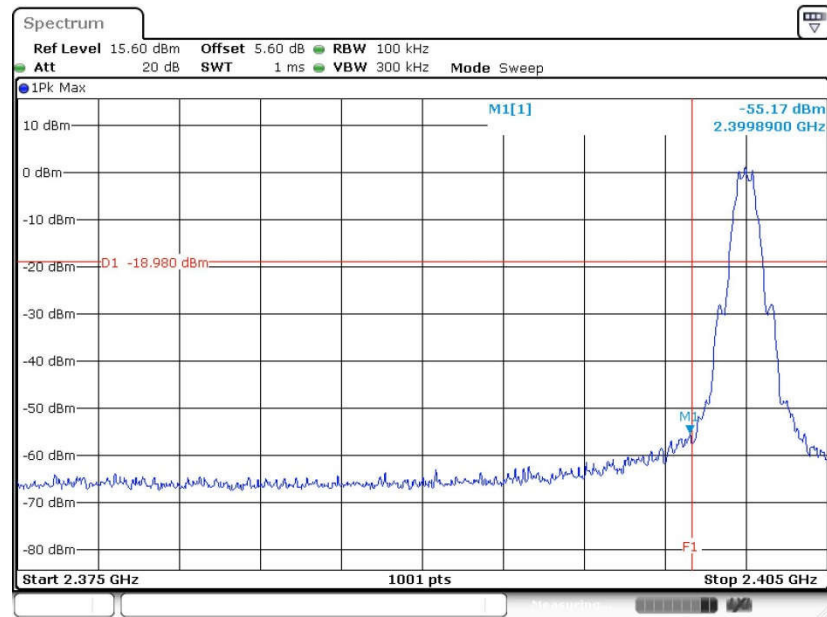

Date: 7.DEC.2016 00:58:31



High Band Edge Plot on Channel 39

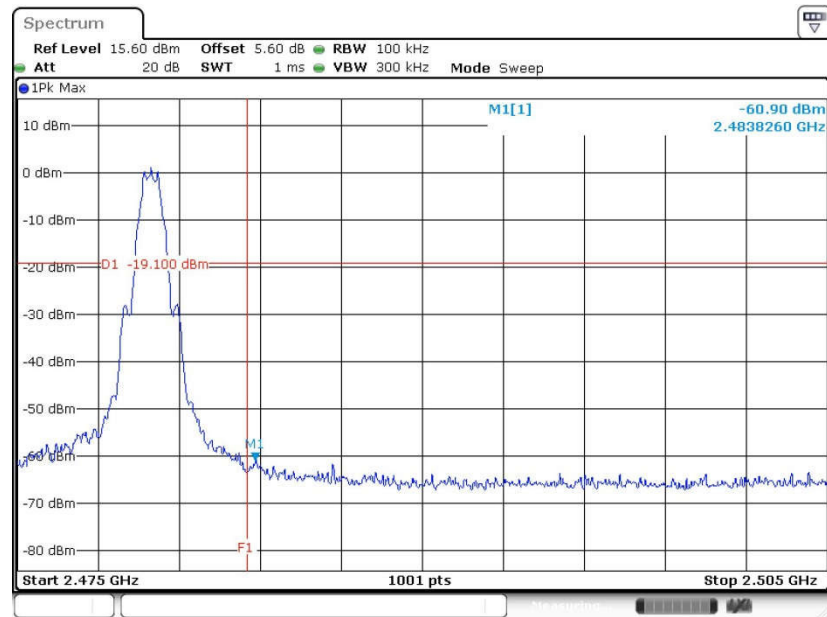


Date: 7.DEC.2016 01:12:37



3.4.6 Test Result of Conducted Spurious Emission Plots


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

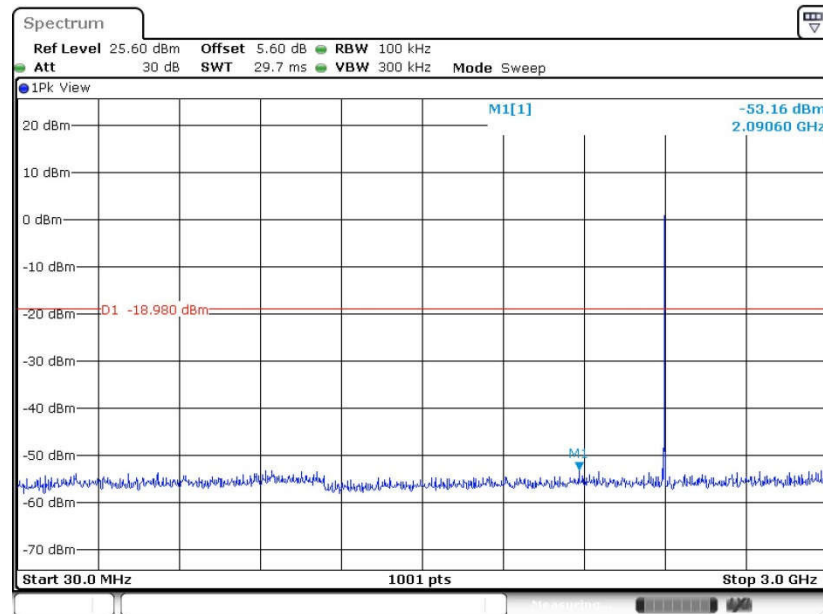

Date: 7.DEC.2016 00:59:14




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 00

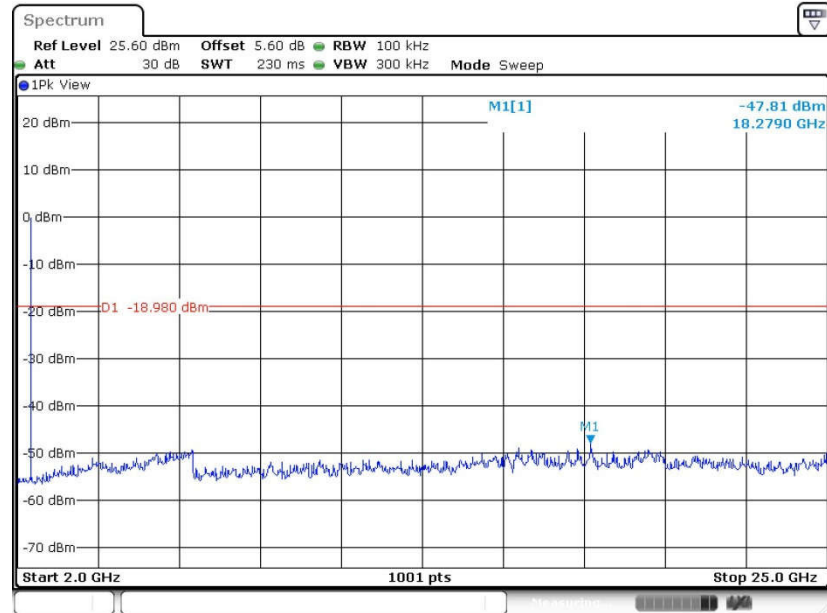

Date: 7.DEC.2016 00:59:22




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

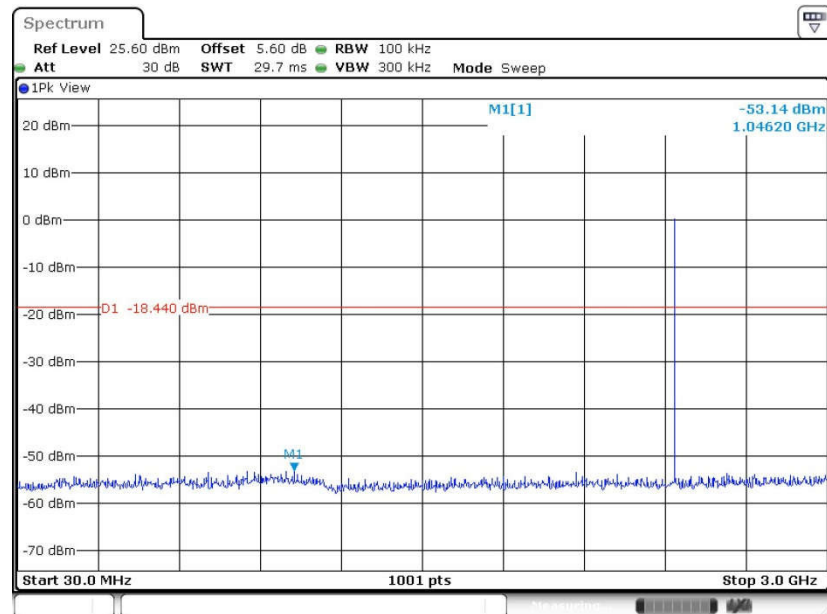

Date: 7.DEC.2016 01:02:05




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

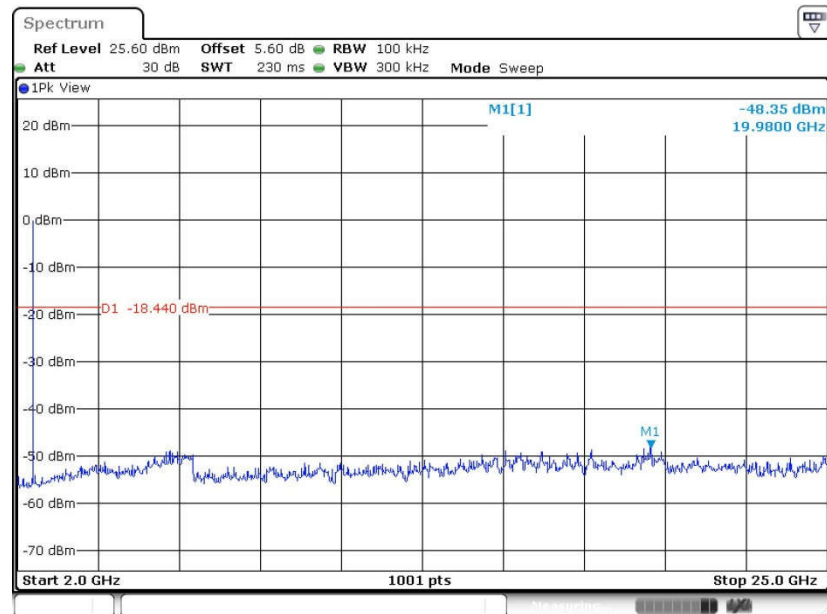

Date: 7.DEC.2016 01:02:14




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

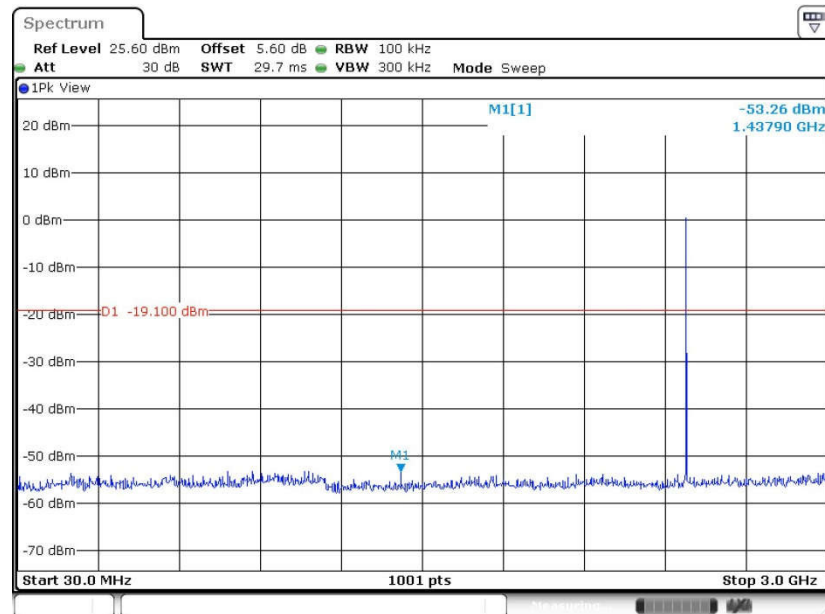

Date: 7.DEC.2016 01:12:04



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

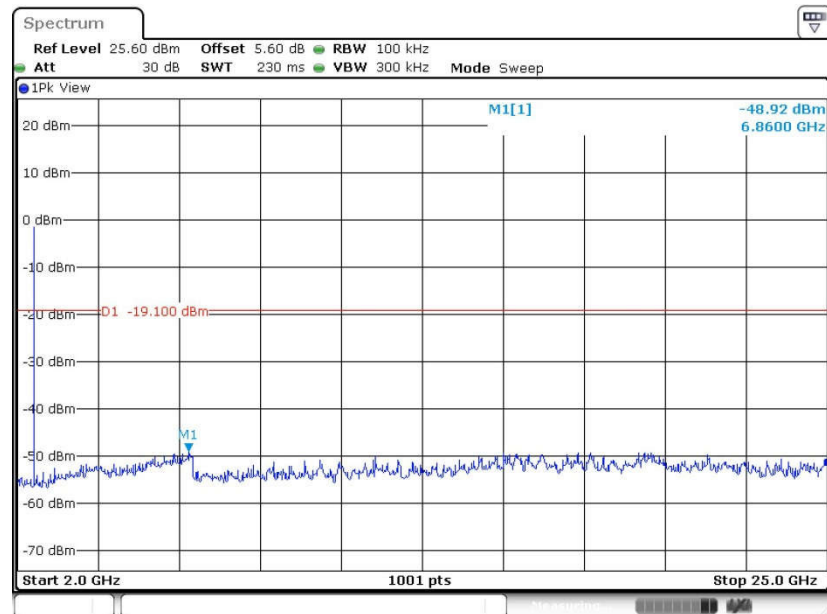

Date: 7.DEC.2016 01:12:12

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

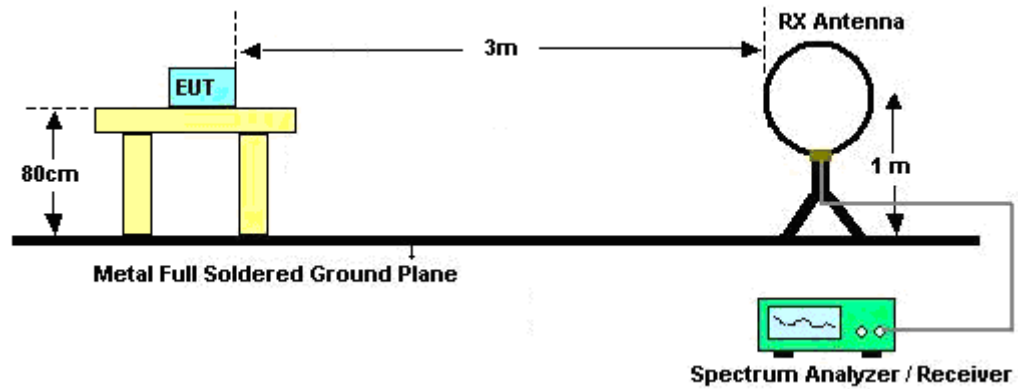

For radiated emissions from 30MHz to 1GHz

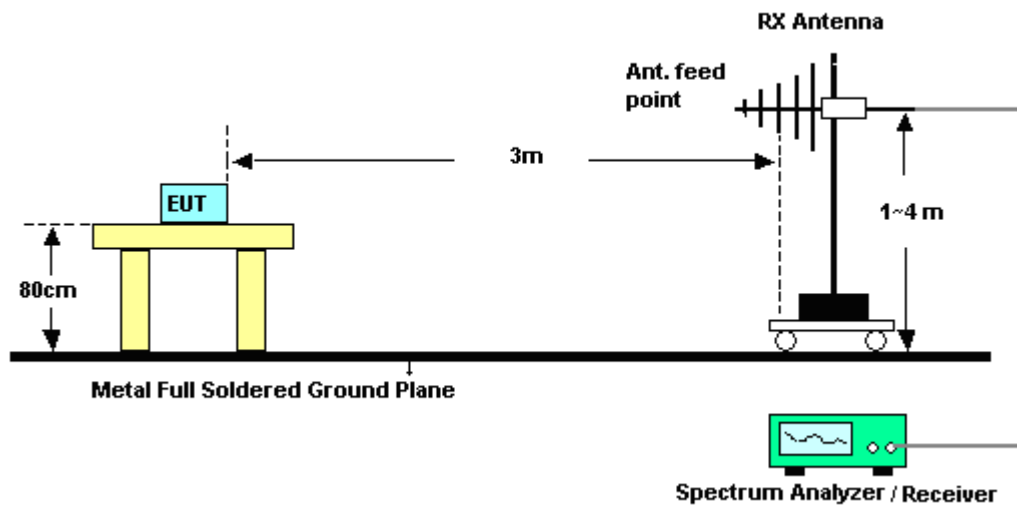

For radiated emissions above 1GHz

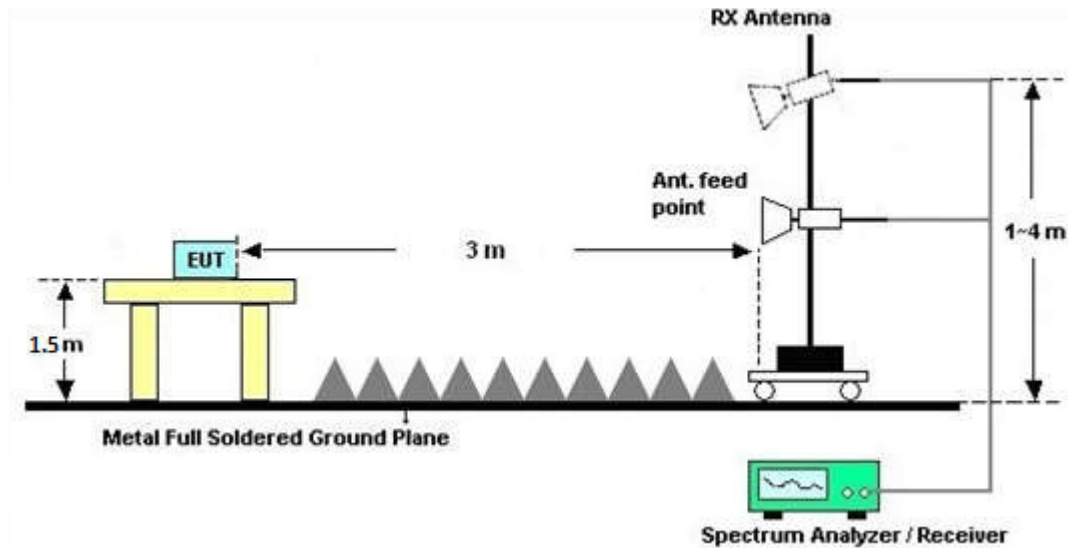

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.6.4 Test Setup

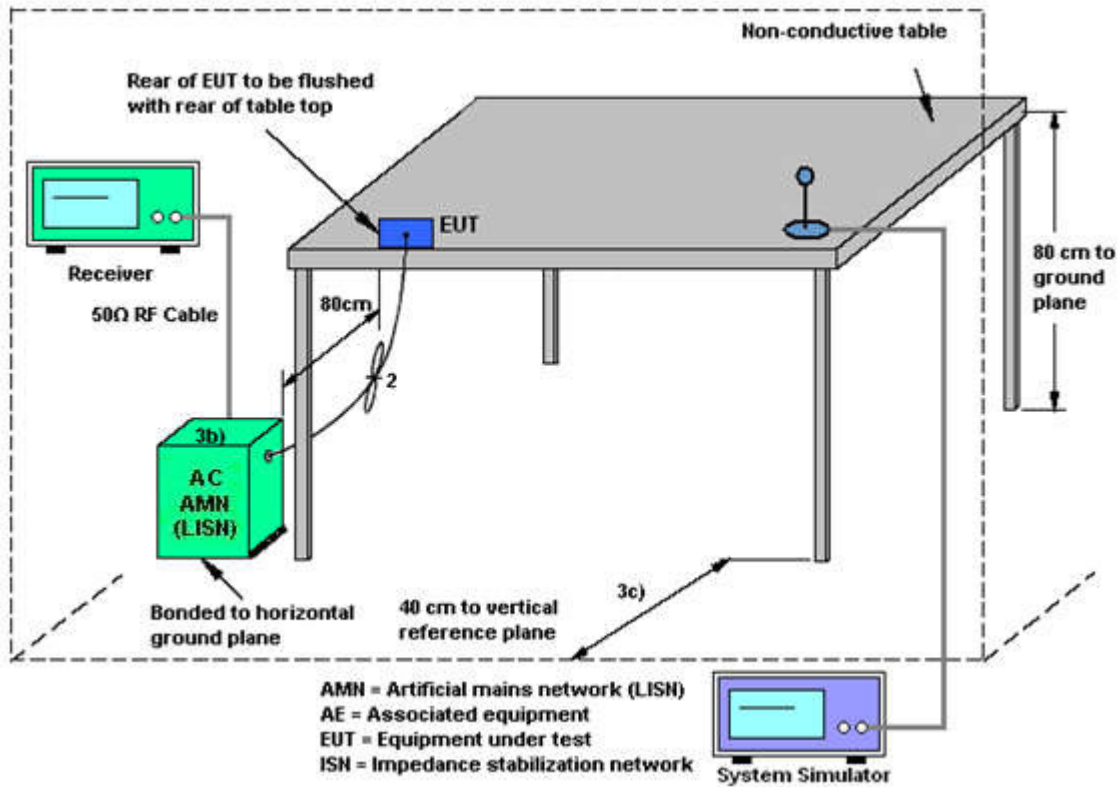



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Peter Wei	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone 1 + USB Cable (Charging from Adapter)		

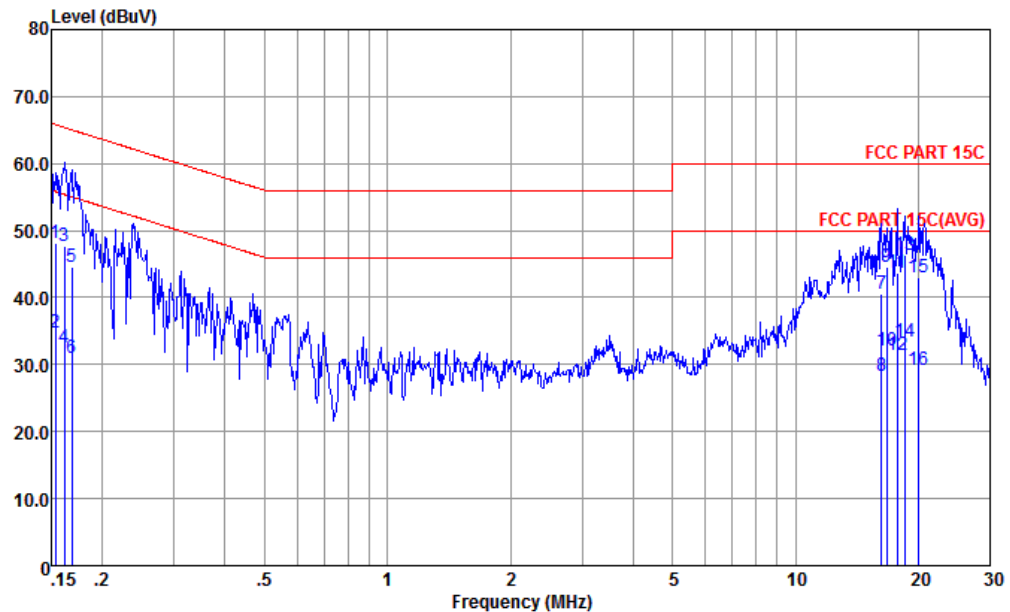


Site : CO01-KS
Condition : FCC PART 15C LISN-L-20151024 LINE
mode : Mode 1
IMEI : 004402550120376 / 004402550120384

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.153	48.20	-17.62	65.82	37.30	0.51	10.39	QP
2	0.153	34.70	-21.12	55.82	23.80	0.51	10.39	Average
3	0.162	47.73	-17.65	65.38	36.90	0.45	10.38	QP
4	0.162	32.43	-22.95	55.38	21.60	0.45	10.38	Average
5	0.169	44.68	-20.35	65.03	33.90	0.41	10.37	QP
6	0.169	31.08	-23.95	55.03	20.30	0.41	10.37	Average
7	16.226	40.64	-19.36	60.00	29.80	0.26	10.58	QP
8	16.226	28.34	-21.66	50.00	17.50	0.26	10.58	Average
9	16.750	44.49	-15.51	60.00	33.60	0.26	10.63	QP
10	16.750	31.99	-18.01	50.00	21.10	0.26	10.63	Average
11	17.755	43.58	-16.42	60.00	32.59	0.27	10.72	QP
12	17.755	31.38	-18.62	50.00	20.39	0.27	10.72	Average
13 *	18.622	46.36	-13.64	60.00	35.30	0.27	10.79	QP
14	18.622	33.46	-16.54	50.00	22.40	0.27	10.79	Average
15	20.056	43.07	-16.93	60.00	31.90	0.27	10.90	QP
16	20.056	29.27	-20.73	50.00	18.10	0.27	10.90	Average



Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Peter Wei	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone 1 + USB Cable (Charging from Adapter)		

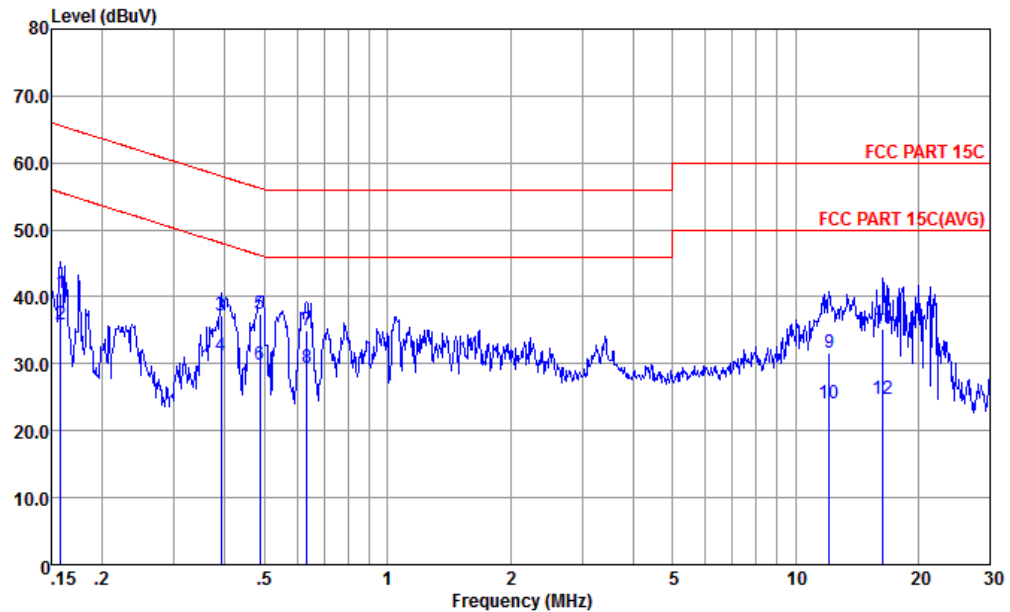

Site : CO01-KS
Condition : FCC PART 15C LISN-N-20151024 NEUTRAL

mode : Mode 1
IMEI : 004402550120376/ 004402550120384

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.158	40.58	-24.98	65.56	29.90	0.30	10.38	QP
2	0.158	35.98	-19.58	55.56	25.30	0.30	10.38	Average
3	0.391	37.32	-20.71	58.03	26.80	0.32	10.20	QP
4	0.391	31.12	-16.91	48.03	20.60	0.32	10.20	Average
5	0.486	37.41	-18.82	56.23	26.90	0.32	10.19	QP
6 *	0.486	29.91	-16.32	46.23	19.40	0.32	10.19	Average
7	0.634	35.01	-20.99	56.00	24.50	0.33	10.18	QP
8	0.634	29.41	-16.59	46.00	18.90	0.33	10.18	Average
9	12.124	31.66	-28.34	60.00	20.99	0.28	10.39	QP
10	12.124	24.16	-25.84	50.00	13.49	0.28	10.39	Average
11	16.398	35.16	-24.84	60.00	24.31	0.26	10.59	QP
12	16.398	24.76	-25.24	50.00	13.91	0.26	10.59	Average



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 13, 2016	Dec. 05, 2016~ Dec. 07, 2016	Oct. 12, 2017	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Dec. 05, 2016~ Dec. 07, 2016	Aug. 08, 2017	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 20, 2016	Dec. 05, 2016~ Dec. 07, 2016	Jan. 19, 2017	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 20, 2016	Dec. 05, 2016~ Dec. 07, 2016	Jan. 19, 2017	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Aug. 09, 2016	Dec. 05, 2016~ Dec. 27, 2016	Aug. 08, 2017	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 22, 2016	Dec. 05, 2016~ Dec. 27, 2016	Apr. 21, 2017	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 23, 2016	Dec. 05, 2016~ Dec. 27, 2016	Nov. 22, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 16, 2016	Dec. 05, 2016~ Dec. 27, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 16, 2016	Dec. 05, 2016~ Dec. 27, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Mar. 03, 2016	Dec. 05, 2016~ Dec. 27, 2016	Mar. 02, 2017	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	187289	9kHz~1GHz	Aug. 09, 2016	Dec. 05, 2016~ Dec. 27, 2016	Aug. 08, 2017	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18GHz~40GHz	Jan. 20, 2016	Dec. 05, 2016~ Dec. 27, 2016	Jan. 19, 2017	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 13, 2016	Dec. 05, 2016~ Dec. 27, 2016	Oct. 12, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 05, 2016~ Dec. 27, 2016	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 05, 2016~ Dec. 27, 2016	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 05, 2016~ Dec. 27, 2016	NCR	Radiation (03CH03-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX104	03CH01KS005	30MHz~18GHz	Jun. 22, 2016	Dec. 05, 2016~ Dec. 27, 2016	Jun. 21, 2017	Radiation (03CH03-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX104	03CH01KS006	30MHz~18GHz	Jun. 22, 2016	Dec. 05, 2016~ Dec. 27, 2016	Jun. 21, 2017	Radiation (03CH03-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Apr. 29, 2016	Dec. 20, 2016	Apr. 28, 2017	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2016	Dec. 20, 2016	Oct. 12, 2017	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2016	Dec. 20, 2016	Oct. 12, 2017	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 13, 2016	Dec. 20, 2016	Oct. 12, 2017	Conduction (CO01-KS)
RF Cable	WOKEN	Y5T	00100N1Q3N1	150kHz~30MHz	Aug. 26, 2016	Dec. 20, 2016	Aug. 25, 2017	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3dB
--	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5dB
--	-------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5dB
--	-------

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6dB
--	-------



Appendix A. Conducted Test Results

Bluetooth Low Energy

Test Engineer:	Silent Hai	Temperature:	21~25	°C
Test Date:	2016/12/5~2016/12/7	Relative Humidity:	51~55	%

TEST RESULTS DATA**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.05	0.67	0.50	Pass
BLE	1Mbps	1	19	2440	1.05	0.67	0.50	Pass
BLE	1Mbps	1	39	2480	1.05	0.67	0.50	Pass

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	1.23	30.00	-2.00	-0.77	36.00	Pass
BLE	1Mbps	1	19	2440	1.65	30.00	-2.00	-0.35	36.00	Pass
BLE	1Mbps	1	39	2480	0.76	30.00	-2.00	-1.24	36.00	Pass

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	1.86	0.85
BLE	1Mbps	1	19	2440	1.86	1.60
BLE	1Mbps	1	39	2480	1.86	0.58

TEST RESULTS DATA**Peak Power Density**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.02	-13.60	-2.00	8.00	Pass
BLE	1Mbps	1	19	2440	1.56	-13.01	-2.00	8.00	Pass
BLE	1Mbps	1	39	2480	0.90	-13.65	-2.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2325.86	50.71	-23.29	74	55.51	26.82	5.39	37.01	129	126	P	H
		2330.8	40.65	-13.35	54	45.45	26.82	5.39	37.01	129	126	A	H
	*	2402	93.53	-	-	98.08	27	5.47	37.02	129	126	P	H
	*	2402	92.94	-	-	97.49	27	5.47	37.02	129	126	A	H
		2376.95	50.22	-23.78	74	54.84	26.95	5.45	37.02	171	282	P	V
		2376.56	40.48	-13.52	54	45.1	26.95	5.45	37.02	171	282	A	V
	*	2402	94.19	-	-	98.74	27	5.47	37.02	171	282	P	V
	*	2402	93.62	-	-	98.17	27	5.47	37.02	171	282	A	V
BLE CH 19 2440MHz		2340.42	50.54	-23.46	74	55.28	26.86	5.41	37.01	147	1	P	H
		2389.69	40.5	-13.50	54	45.05	27	5.47	37.02	147	1	A	H
	*	2440	93.41	-	-	97.5	27.39	5.49	36.97	147	1	P	H
	*	2440	92.84	-	-	96.93	27.39	5.49	36.97	147	1	A	H
		2485.54	50.67	-23.33	74	54.46	27.64	5.51	36.94	147	1	P	H
		2487.16	41.35	-12.65	54	45.14	27.64	5.51	36.94	147	1	A	H
		2359.79	49.92	-24.08	74	54.6	26.91	5.43	37.02	167	289	P	V
		2376.95	40.49	-13.51	54	45.11	26.95	5.45	37.02	167	289	A	V
	*	2440	94.22	-	-	98.31	27.39	5.49	36.97	167	289	P	V
	*	2440	93.67	-	-	97.76	27.39	5.49	36.97	167	289	A	V
		2486.32	51.1	-22.90	74	54.89	27.64	5.51	36.94	167	289	P	V
		2490.88	41.46	-12.54	54	45.1	27.77	5.52	36.93	167	289	A	V



BLE CH 39 2480MHz	*	2480	92.7	-	-	96.49	27.64	5.51	36.94	143	37	P	H
	*	2480	92.16	-	-	95.95	27.64	5.51	36.94	143	37	A	H
		2484.52	52.32	-21.68	74	56.11	27.64	5.51	36.94	143	37	P	H
		2483.5	41.93	-12.07	54	45.72	27.64	5.51	36.94	143	37	A	H
	*	2480	94.63	-	-	98.42	27.64	5.51	36.94	158	282	P	V
	*	2480	94.06	-	-	97.85	27.64	5.51	36.94	158	282	A	V
		2483.5	51.95	-22.05	74	55.74	27.64	5.51	36.94	158	282	P	V
		2483.5	42.42	-11.58	54	46.21	27.64	5.51	36.94	158	282	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4806	41.7	-32.30	74	39.2	31.48	7.71	36.69	100	360	P	H
		4806	42.9	-31.10	74	40.4	31.48	7.71	36.69	100	360	P	V
BLE CH 19 2440MHz		4878	42.33	-31.67	74	39.64	31.59	7.76	36.66	100	360	P	H
		7320	45.05	-28.95	74	37.9	34.08	9.78	36.71	100	360	P	H
		4878	42.14	-31.86	74	39.45	31.59	7.76	36.66	100	360	P	V
		7320	44.77	-29.23	74	37.62	34.08	9.78	36.71	100	360	P	V
BLE CH 39 2480MHz		4962	42.87	-31.13	74	39.96	31.72	7.82	36.63	100	360	P	H
		7440	46.62	-27.38	74	39.08	34.44	9.87	36.77	100	360	P	H
		4962	42.49	-31.51	74	39.58	31.72	7.82	36.63	100	360	P	V
		7440	44.98	-29.02	74	37.44	34.44	9.87	36.77	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		45.52	30.59	-9.41	40	42.29	18.9	0.83	31.43	100	0	P	H
		89.17	22.13	-21.37	43.5	35.06	17.4	1.14	31.47	-	-	P	H
		150.28	23.76	-19.74	43.5	35.93	17.9	1.48	31.55	-	-	P	H
		305.48	25.55	-20.45	46	35.48	19.27	2.15	31.35	-	-	P	H
		777.87	29.73	-16.27	46	29.59	27.63	3.54	31.03	-	-	P	H
		943.74	31.06	-14.94	46	28.46	29.37	3.96	30.73	-	-	P	H
	!	30	34.56	-5.44	40	37.98	27.2	0.65	31.27	-	-	P	V
	!	44.55	35.07	-4.93	40	46.21	19.45	0.83	31.42	100	0	P	V
		159.98	27.3	-16.20	43.5	39.82	17.49	1.53	31.54	-	-	P	V
		207.51	27.13	-16.37	43.5	40.88	16	1.73	31.48	-	-	P	V
		306.45	26.53	-19.47	46	36.39	19.32	2.16	31.34	-	-	P	V
		967.02	31.95	-22.05	54	29.12	29.5	4.02	30.69	-	-	P	V
Remark		1. No other spurious found. 2. All results are PASS against limit line.											

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth v4.2 LE	65.19	0.41	2.44	3kHz

Bluetooth v4.2 LE

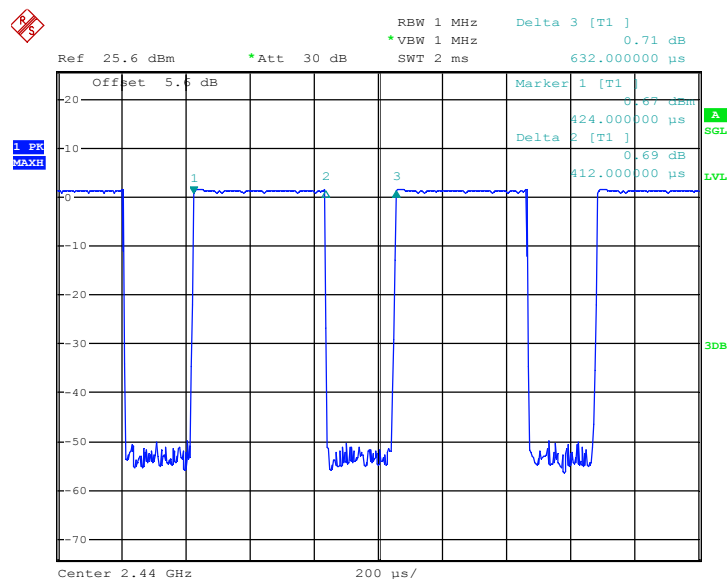

Date: 5.DEC.2016 19:22:25