

#01_GSM850_GPRS (4 Tx slots)_Left Cheek_Ch251

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.08

Medium: HSL850_141117 Medium parameters used: $f = 849$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.75$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.59, 8.59, 8.59); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch251/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.194 W/kg


Configuration/Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.702 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.192 W/kg

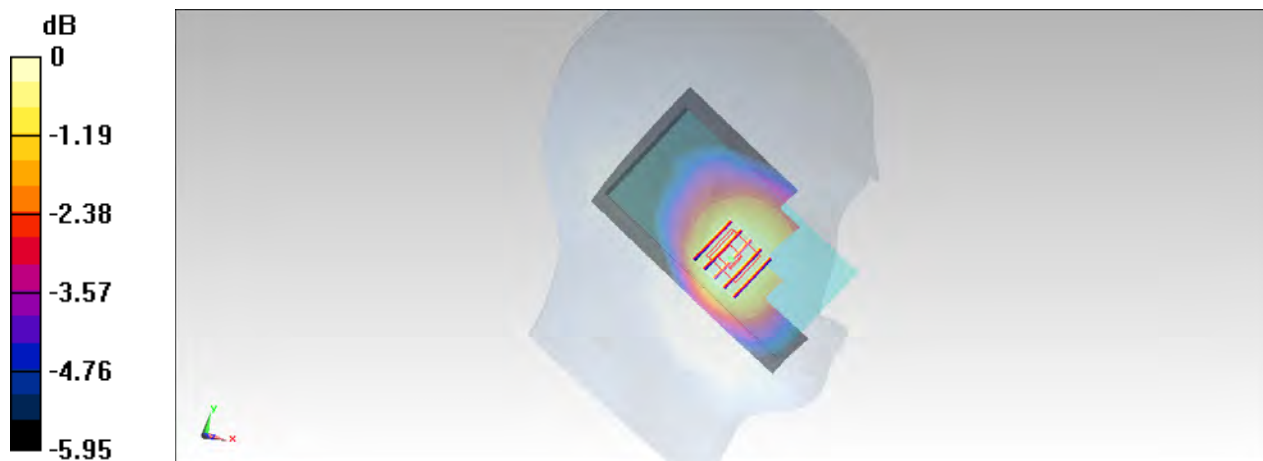

0 dB = 0.192 W/kg = -7.17 dBW/kg

#02_GSM1900_EDGE (4 Tx slots)_Left Cheek_Ch512

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:2.08

Medium: HSL1900_141115 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 38.513$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.35, 7.35, 7.35); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch512/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.488 W/kg


Configuration/Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.420 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.562 W/kg

SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.240 W/kg

Maximum value of SAR (measured) = 0.452 W/kg

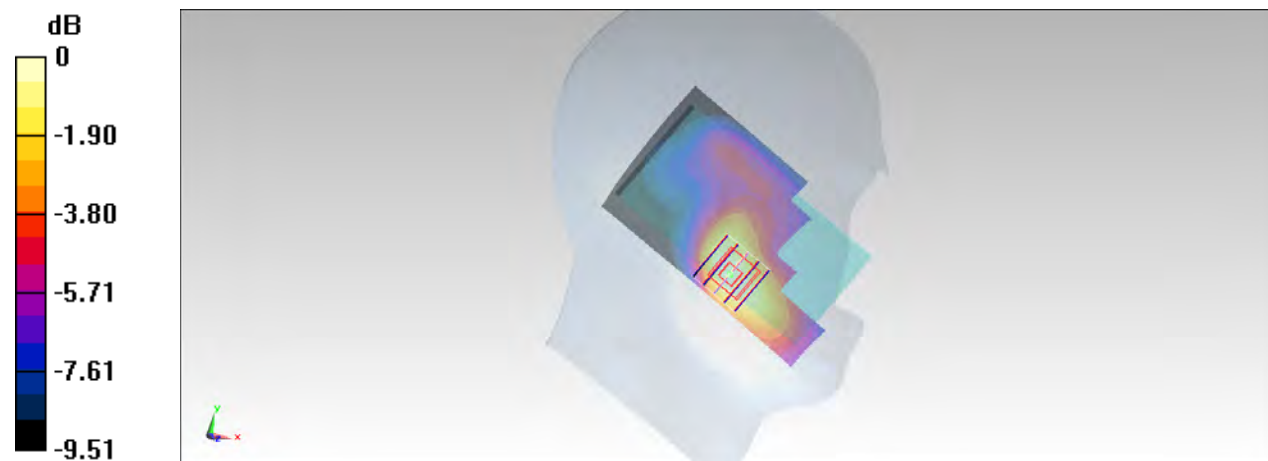

0 dB = 0.452 W/kg = -3.45 dBW/kg

#03_WCDMA V_RMC 12.2Kbps_Left Cheek_Ch4233

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium: HSL850_141117 Medium parameters used: $f = 847 \text{ MHz}$; $\sigma = 0.916 \text{ S/m}$; $\epsilon_r = 42.77$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.59, 8.59, 8.59); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch4233/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.249 W/kg


Configuration/Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.252 V/m ; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.263 W/kg

SAR(1 g) = 0.218 W/kg ; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.242 W/kg

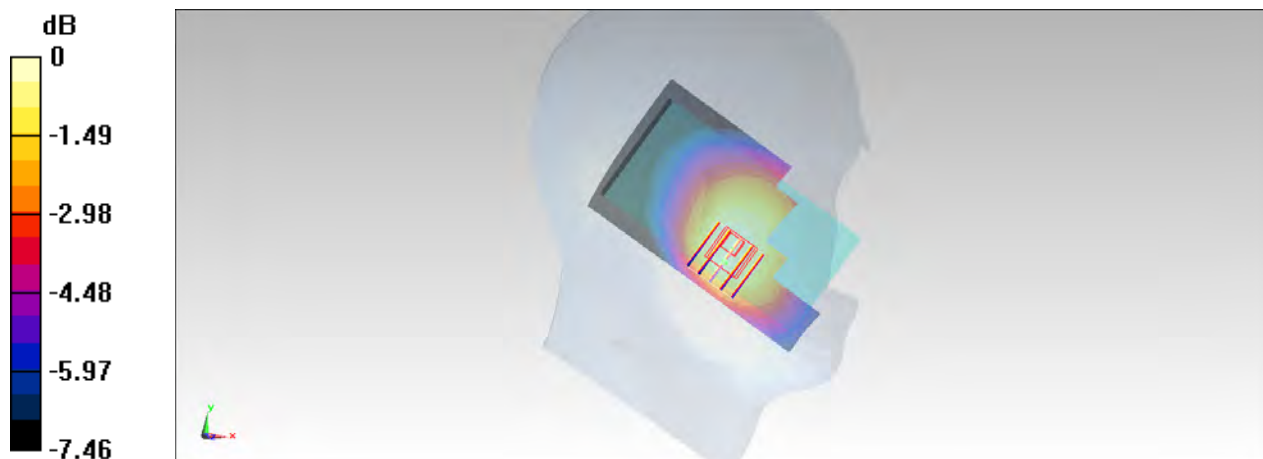

0 dB = $0.242 \text{ W/kg} = -6.16 \text{ dBW/kg}$

#04_WCDMA IV_RMC 12.2Kbps_Left Cheek_Ch1413

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium: HSL1750_141116 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 40.873$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.71, 7.71, 7.71); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch1413/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.622 W/kg


Configuration/Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.358 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.682 W/kg

SAR(1 g) = 0.447 W/kg; SAR(10 g) = 0.297 W/kg

Maximum value of SAR (measured) = 0.555 W/kg

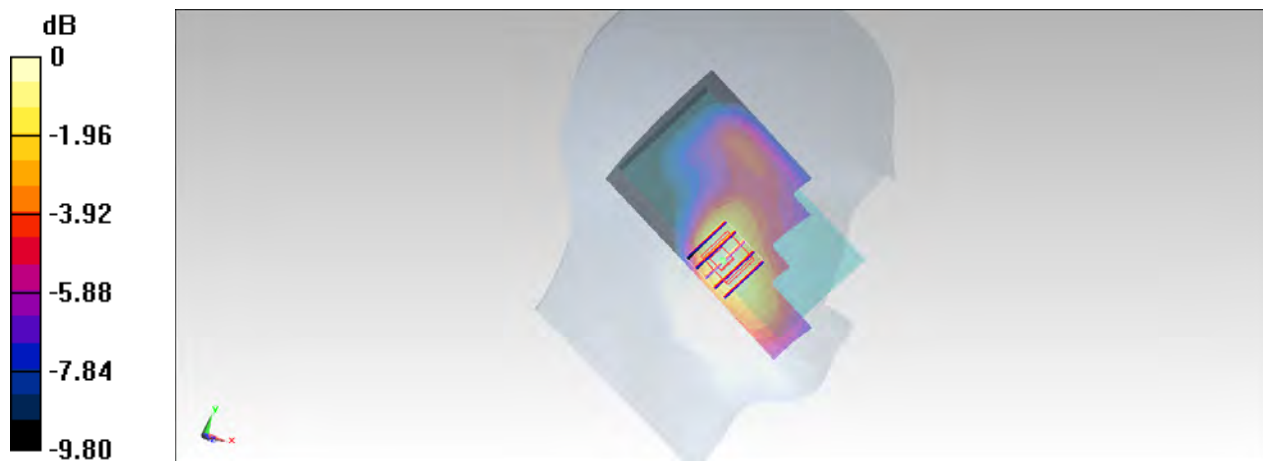

0 dB = 0.555 W/kg = -2.56 dBW/kg

#05_WCDMA II_RMC 12.2Kbps_Left Cheek_Ch9262

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1
 Medium: HSL1900_141115 Medium parameters used: $f = 1852.4 \text{ MHz}$; $\sigma = 1.389 \text{ S/m}$; $\epsilon_r = 38.505$;
 $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.6 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.35, 7.35, 7.35); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch9262/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.563 W/kg


Configuration/Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.576 V/m ; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.637 W/kg

SAR(1 g) = 0.411 W/kg ; SAR(10 g) = 0.274 W/kg

Maximum value of SAR (measured) = 0.506 W/kg

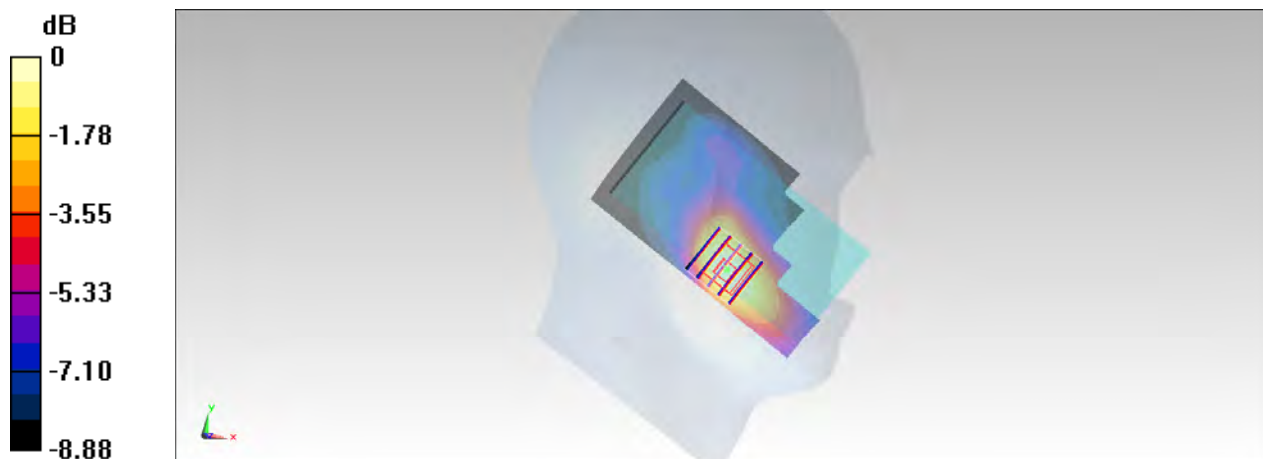

$0 \text{ dB} = 0.506 \text{ W/kg} = -2.96 \text{ dBW/kg}$

#06_LTE Band 5_10M_QPSK_1RB_0Offset_Left Cheek_Ch20600

Communication System: LTE; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: HSL850_141117 Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.913 \text{ S/m}$; $\epsilon_r = 42.804$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.59, 8.59, 8.59); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch20600/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.210 W/kg


Configuration/Ch20600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.304 V/m ; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.222 W/kg

SAR(1 g) = 0.189 W/kg ; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.207 W/kg

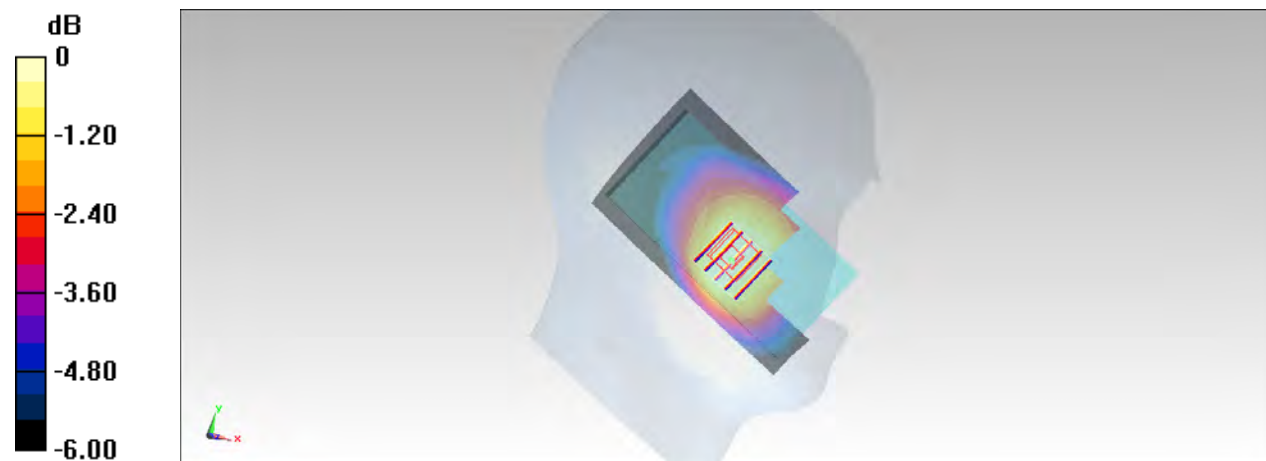

$0 \text{ dB} = 0.207 \text{ W/kg} = -6.84 \text{ dBW/kg}$

#07_LTE Band 4_20M_QPSK_1RB_0Offset_Left Cheek_Ch20300

Communication System: LTE; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750_141116 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.827$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.71, 7.71, 7.71); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.551 W/kg


Configuration/Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.099 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.612 W/kg

SAR(1 g) = 0.400 W/kg; SAR(10 g) = 0.272 W/kg

Maximum value of SAR (measured) = 0.493 W/kg

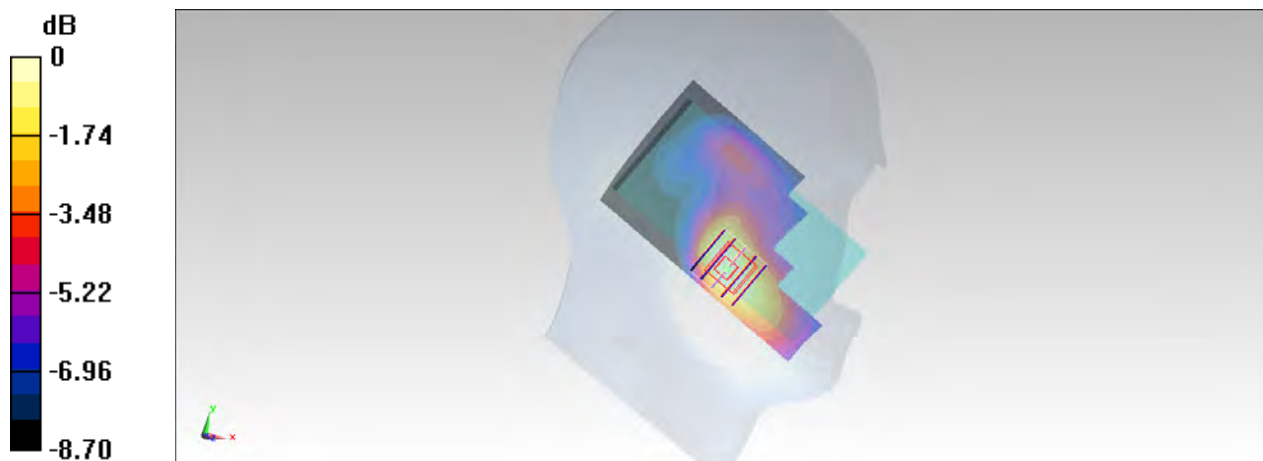

0 dB = 0.493 W/kg = -3.07 dBW/kg

#08_LTE Band 2_20M_QPSK_1RB_0Offset_Left Cheek_Ch18700

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1900_141115 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 38.478$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.35, 7.35, 7.35); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch18700/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.492 W/kg


Configuration/Ch18700/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.978 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.561 W/kg

SAR(1 g) = 0.356 W/kg; SAR(10 g) = 0.237 W/kg

Maximum value of SAR (measured) = 0.429 W/kg

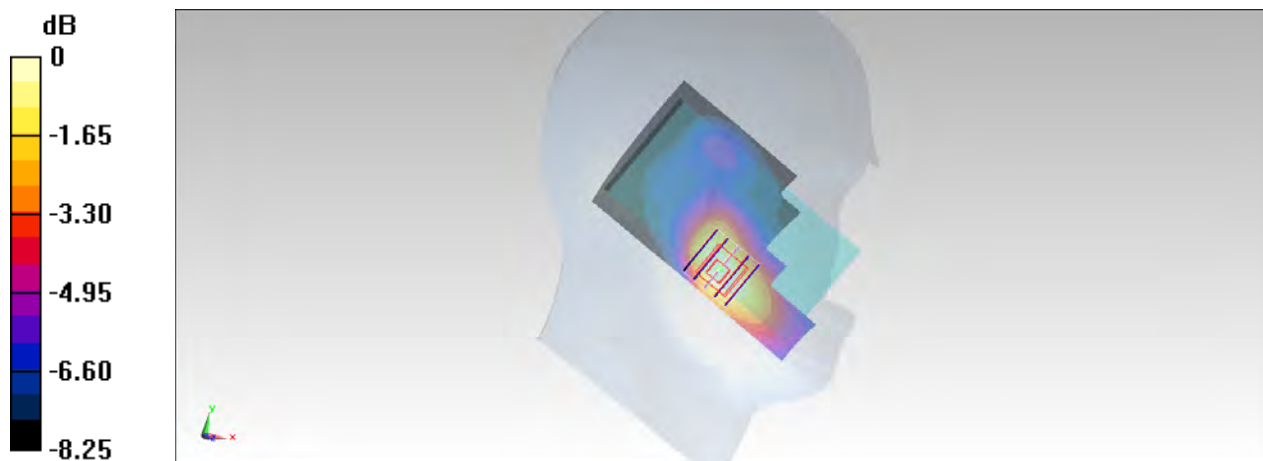

0 dB = 0.429 W/kg = -3.68 dBW/kg

#09_LTE Band 25_20M_QPSK_1RB_Offset_Left Cheek_Ch26340

Communication System: LTE; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900_141115 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 38.428$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.35, 7.35, 7.35); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch26340/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.581 W/kg


Configuration/Ch26340/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.799 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.656 W/kg

SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.271 W/kg

Maximum value of SAR (measured) = 0.531 W/kg

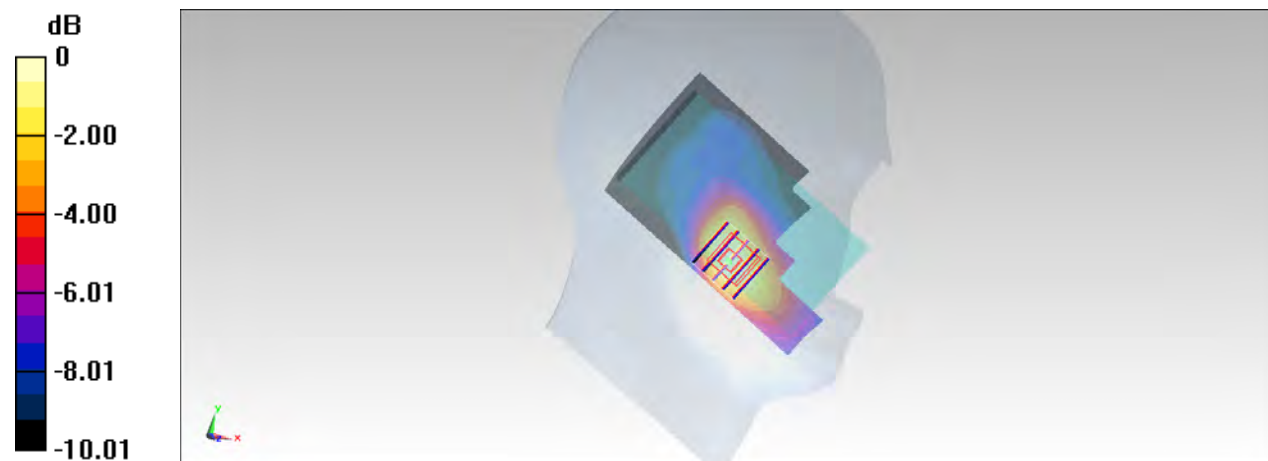

0 dB = 0.531 W/kg = -2.75 dBW/kg

#10_LTE Band 7_20M_QPSK_1RB_0Offset_Left Cheek_Ch21350

Communication System: LTE; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600_141114 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.932$ S/m; $\epsilon_r = 38.584$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.25, 6.25, 6.25); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch21350/Area Scan (81x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.760 W/kg


Configuration/Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.063 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.987 W/kg

SAR(1 g) = 0.539 W/kg; SAR(10 g) = 0.334 W/kg

Maximum value of SAR (measured) = 0.748 W/kg

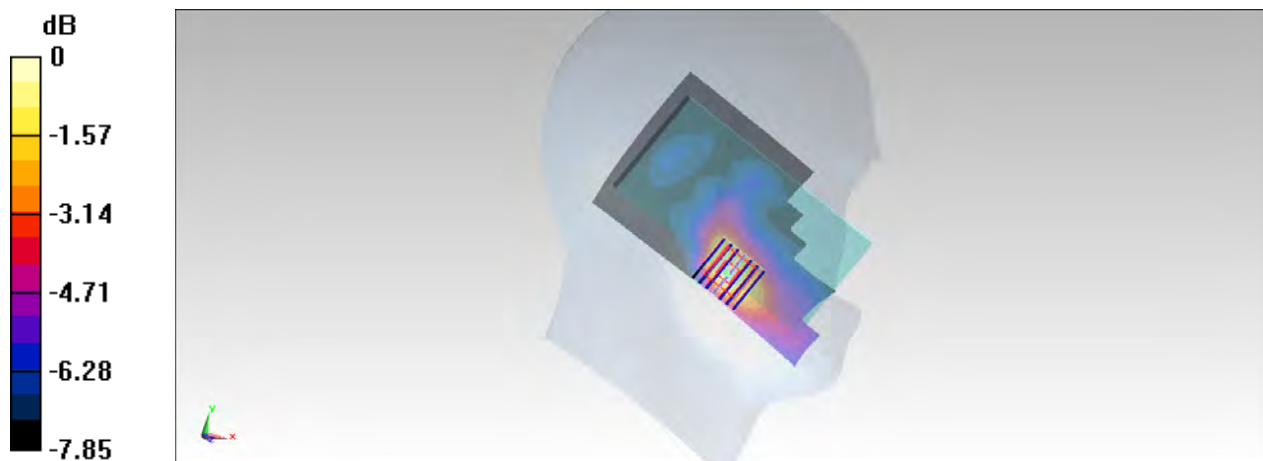

0 dB = 0.748 W/kg = -1.26 dBW/kg

#11_LTE Band 38_20M_QPSK_1RB_0Offset_Left Cheek_Ch37850

Communication System: LTE; Frequency: 2580 MHz; Duty Cycle: 1:1.59

Medium: HSL2600_141114 Medium parameters used: $f = 2580$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 38.536$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.25, 6.25, 6.25); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch37850/Area Scan (81x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.506 W/kg


Configuration/Ch37850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.373 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.692 W/kg

SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 0.513 W/kg

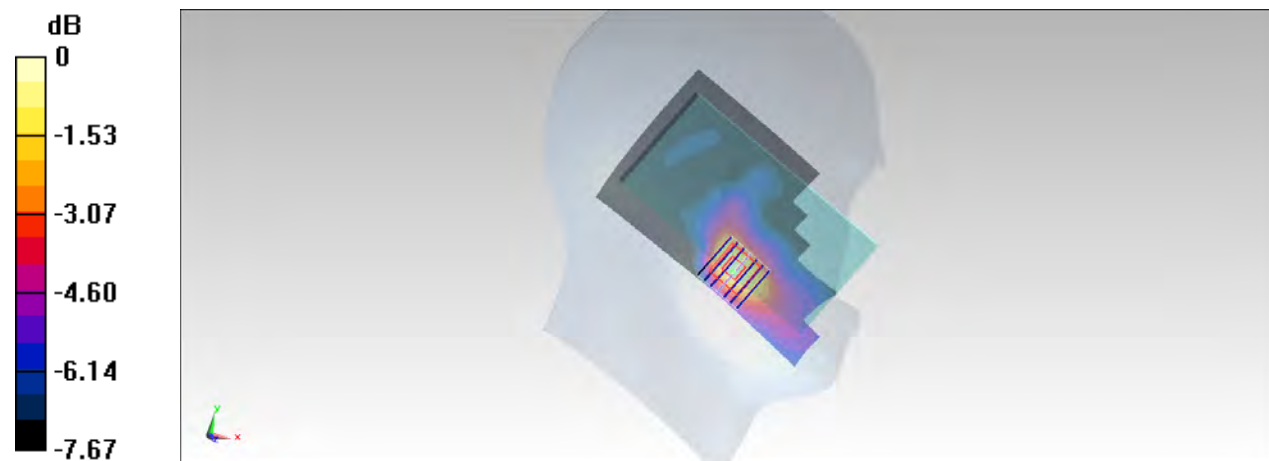

0 dB = 0.513 W/kg = -2.90 dBW/kg

#12_LTE Band 41_20M_QPSK_1RB_0Offset_Left Cheek_Ch40620

Communication System: LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.59

Medium: HSL2600_141114 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.974$ S/m; $\epsilon_r = 38.509$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.25, 6.25, 6.25); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch40620/Area Scan (81x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.484 W/kg


Configuration/Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.796 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.624 W/kg

SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.225 W/kg

Maximum value of SAR (measured) = 0.474 W/kg

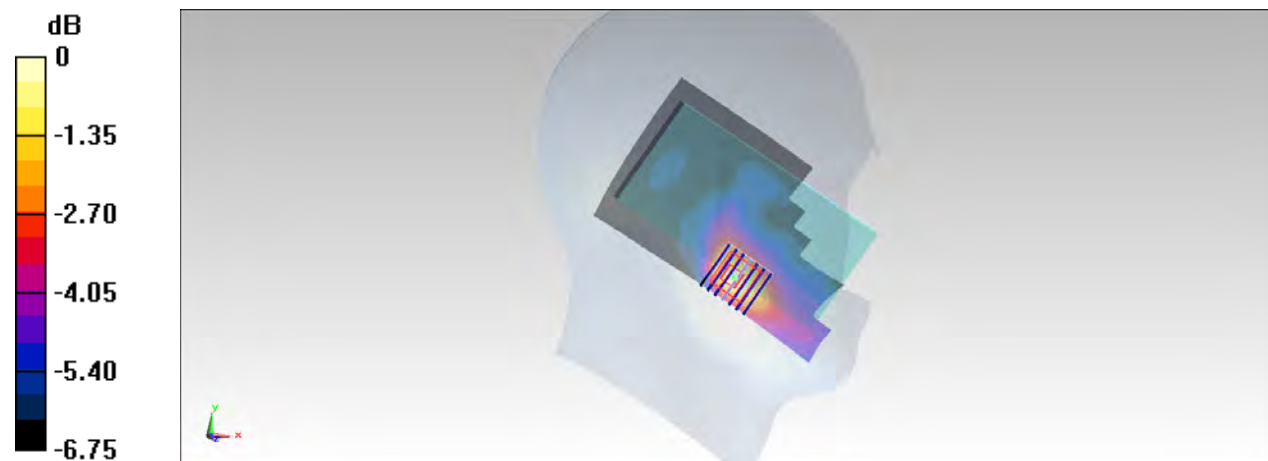

0 dB = 0.474 W/kg = -3.24 dBW/kg

#13_WLAN2.4GHz_802.11b 1Mbps_Right Tilted_Ch1

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1.024

Medium: HSL_2450_141105 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.92, 6.92, 6.92); Calibrated: 2014/9/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Ch1/Area Scan (81x141x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.542 mW/g


Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.1 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.830 W/kg

SAR(1 g) = 0.379 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.575 mW/g

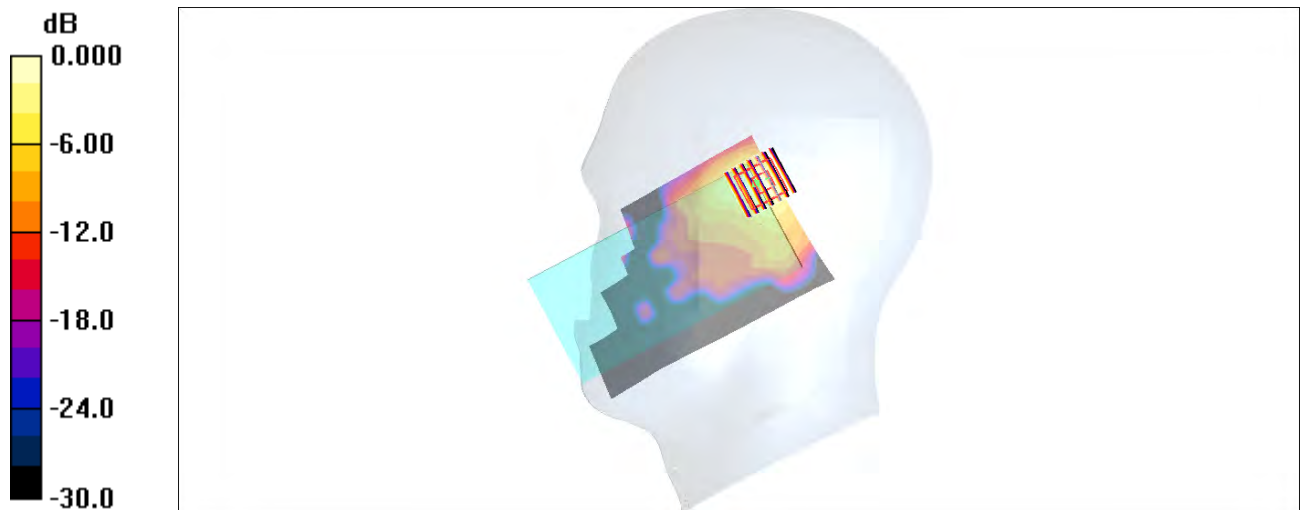

0 dB = 0.575mW/g

#14_WLAN5GHz_802.11a 6Mbps_Right Tilted_Ch48

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1.192

Medium: HSL_5G_141106 Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.84 \text{ mho/m}$; $\epsilon_r = 35.4$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.79, 4.79, 4.79); Calibrated: 2014/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Ch48/Area Scan (91x161x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.819 mW/g


Ch48/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 12.5 V/m ; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.232 mW/g ; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.689 mW/g

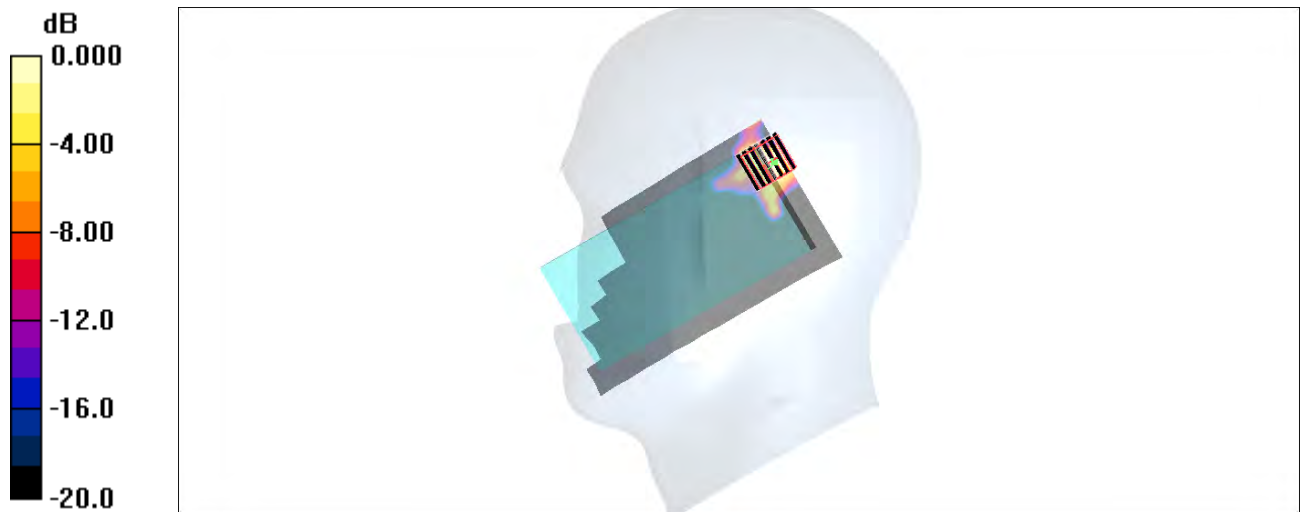

0 dB = 0.689mW/g

#15_WLAN5GHz_802.11a 6Mbps_Right Tilted_Ch64

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1.192

Medium: HSL_5G_141106 Medium parameters used: $f = 5320$ MHz; $\sigma = 4.92$ mho/m; $\epsilon_r = 35.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.66, 4.66, 4.66); Calibrated: 2014/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Ch64/Area Scan (91x171x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.886 mW/g


Ch64/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.95 V/m; Power Drift = 0.073 dB

Peak SAR (extrapolated) = 0.789 W/kg

SAR(1 g) = 0.174 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.518 mW/g

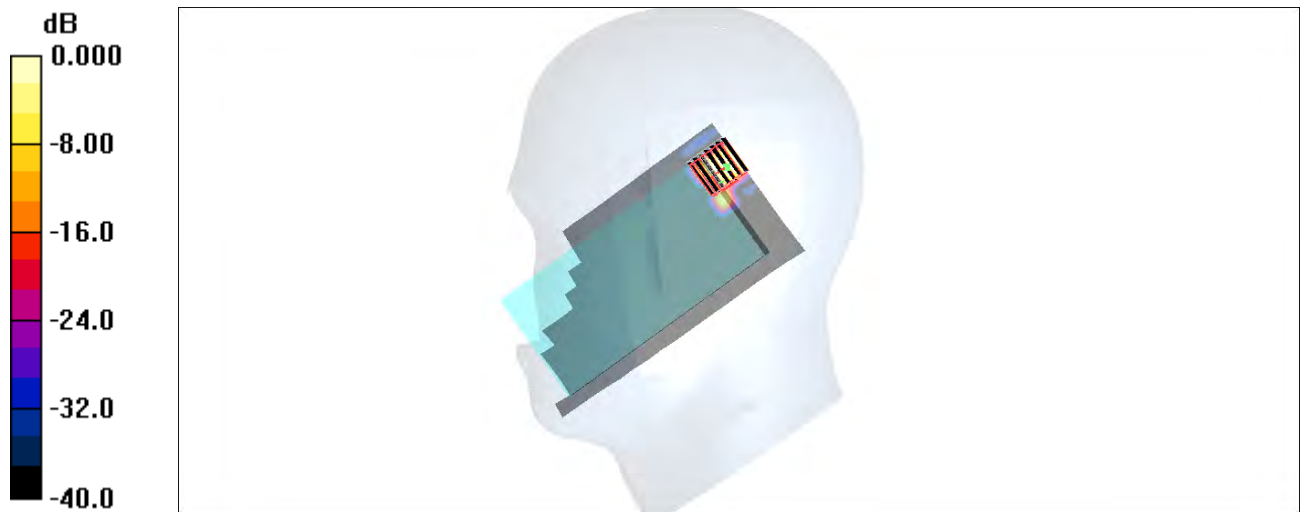

0 dB = 0.518mW/g

#16_WLAN5GHz_802.11a 6Mbps_Right Tilted_Ch136

Communication System: 802.11a; Frequency: 5680 MHz; Duty Cycle: 1:1.192

Medium: HSL_5G_141106 Medium parameters used : $f = 5680$ MHz; $\sigma = 5.29$ mho/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.34, 4.34, 4.34); Calibrated: 2014/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Ch136/Area Scan (91x171x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.926 mW/g


Ch136/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 12.8 V/m; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.268 mW/g; SAR(10 g) = 0.062 mW/g

Maximum value of SAR (measured) = 0.724 mW/g

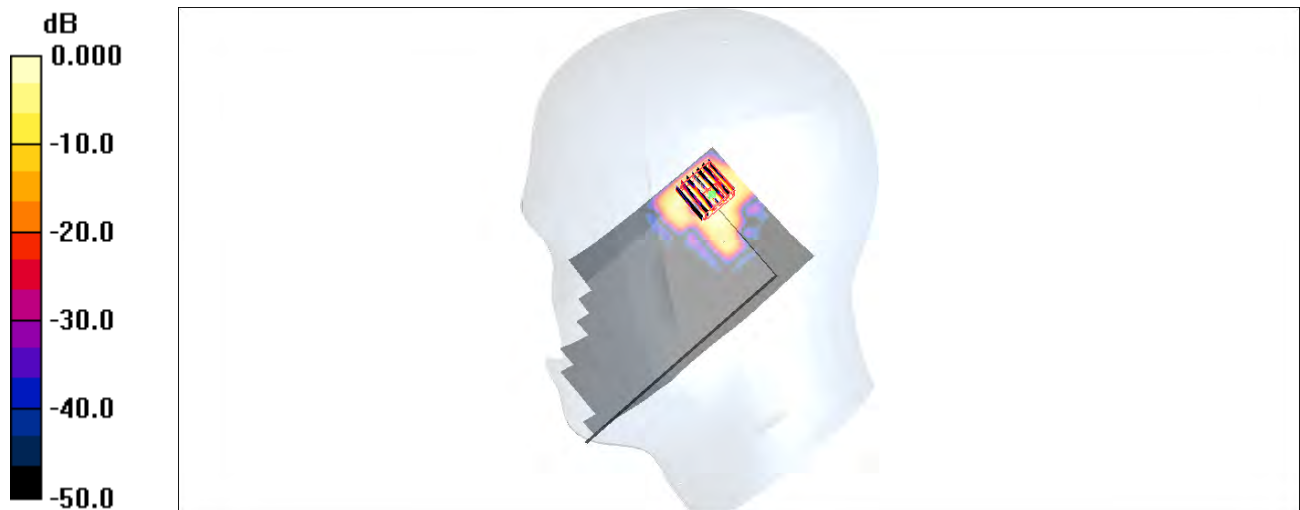

0 dB = 0.724mW/g

#17_WLAN5GHz_802.11a 6Mbps_Right Tilted_Ch165

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1.192

Medium: HSL_5G_141107 Medium parameters used: $f = 5825$ MHz; $\sigma = 5.45$ mho/m; $\epsilon_r = 34.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.34, 4.34, 4.34); Calibrated: 2014/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Ch165/Area Scan (91x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.430 mW/g


Ch165/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.47 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.718 W/kg

SAR(1 g) = 0.157 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.435 mW/g

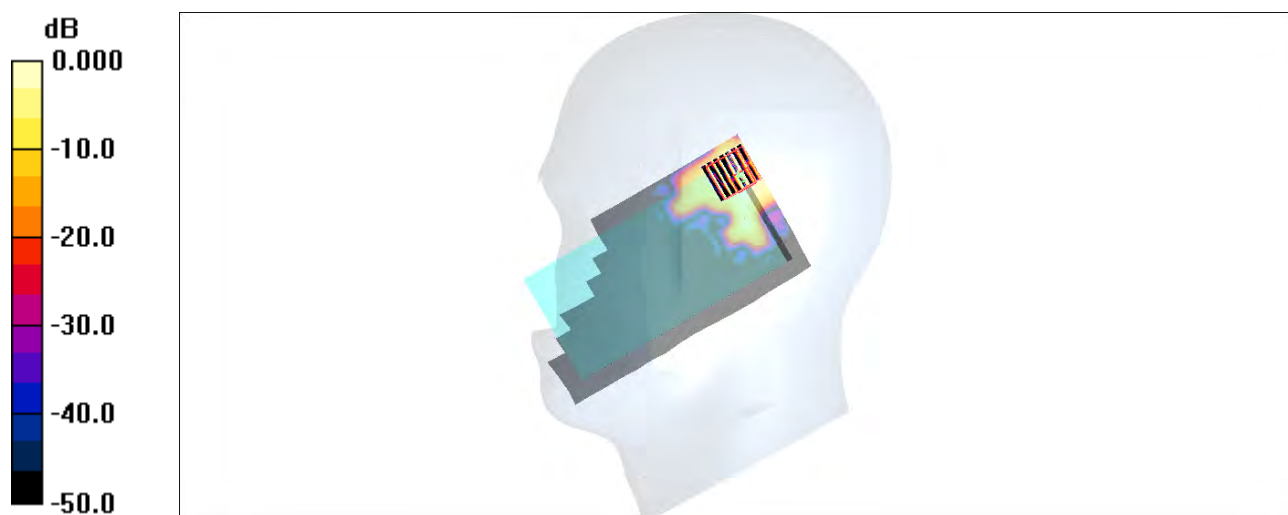

0 dB = 0.435mW/g

#18_Bluetooth_1Mbps_Right_Cheek_Ch78

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.2

Medium: HSL_2450_141105 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.92, 6.92, 6.92); Calibrated: 2014/9/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Ch78/Area Scan (81x141x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.053 mW/g


Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.52 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.032 mW/g; SAR(10 g) = 0.010 mW/g

Maximum value of SAR (measured) = 0.077 mW/g

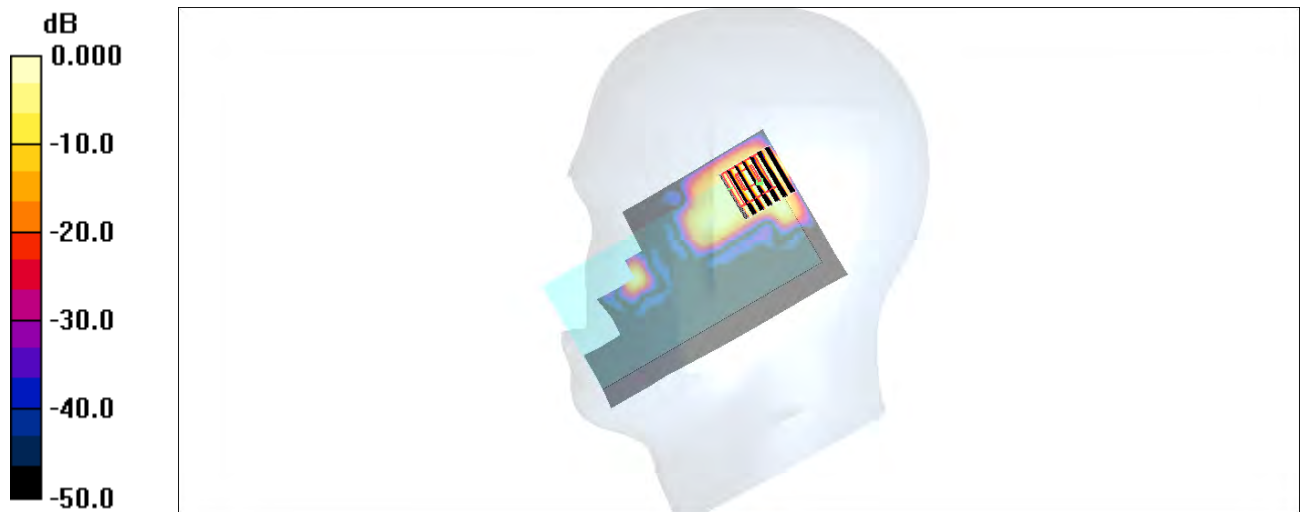

#19_GSM850_GPRS (4 Tx slots)_Back_1cm_Ch251

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.08

Medium: MSL850_141112 Medium parameters used: $f = 849$ MHz; $\sigma = 0.985$ S/m; $\epsilon_r = 54.733$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.48, 8.48, 8.48); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch251/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.425 W/kg


Configuration/Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.256 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 0.424 W/kg

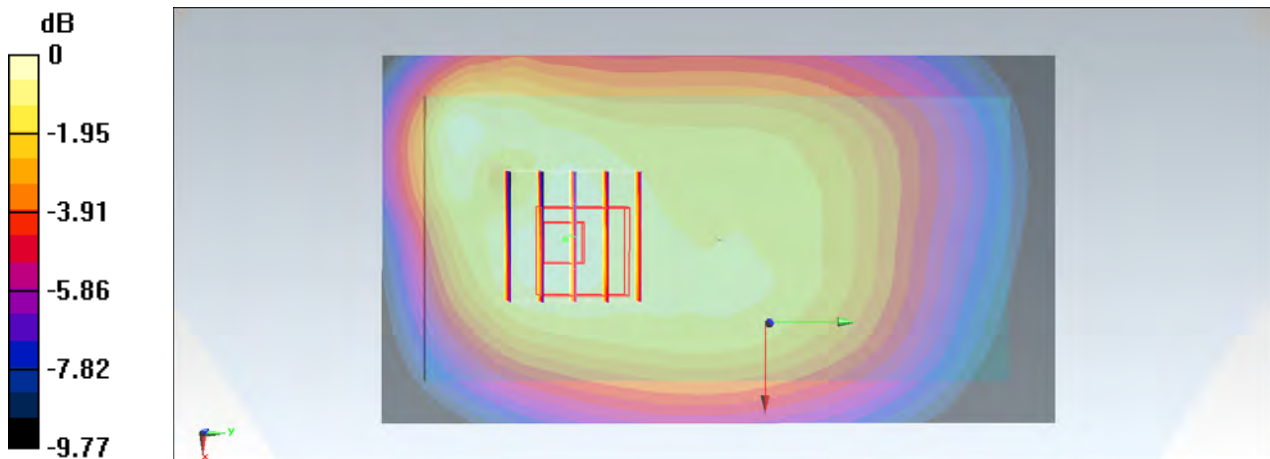

0 dB = 0.424 W/kg = -3.73 dBW/kg

#20_GSM1900_EDGE (4 Tx slots)_Back_1cm_Ch661

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:2.08

Medium: MSL1900_141109 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ S/m; $\epsilon_r = 51.581$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.86, 6.86, 6.86); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch661/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.603 W/kg


Configuration/Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.402 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.845 W/kg

SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 0.650 W/kg

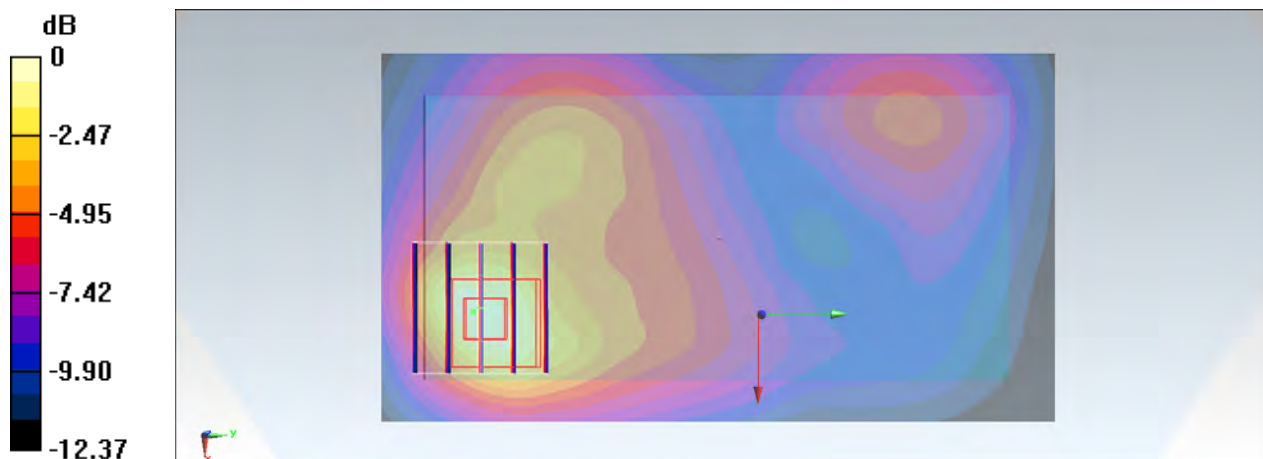

0 dB = 0.650 W/kg = -1.87 dBW/kg

#21_WCDMA V_RMC 12.2Kbps_Left Side_1cm_Ch4233

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium: MSL850_141112 Medium parameters used: $f = 847 \text{ MHz}$; $\sigma = 0.983 \text{ S/m}$; $\epsilon_r = 54.746$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.8 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.48, 8.48, 8.48); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch4233/Area Scan (41x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.484 W/kg


Configuration/Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.755 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.553 W/kg

SAR(1 g) = 0.396 W/kg ; SAR(10 g) = 0.278 W/kg

Maximum value of SAR (measured) = 0.484 W/kg

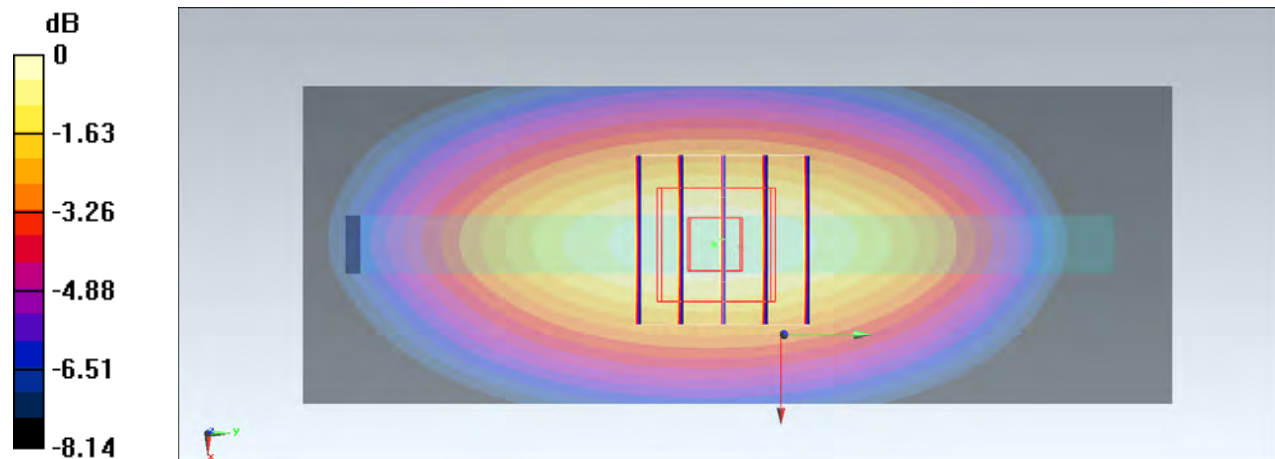

$0 \text{ dB} = 0.484 \text{ W/kg} = -3.15 \text{ dBW/kg}$

#22_WCDMA IV_RMC 12.2Kbps_Back_1cm_Ch1513

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: MSL1750_141111 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.521$ S/m; $\epsilon_r = 51.036$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.32, 7.32, 7.32); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch1513/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.692 W/kg


Configuration/Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.410 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.892 W/kg

SAR(1 g) = 0.502 W/kg; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 0.658 W/kg

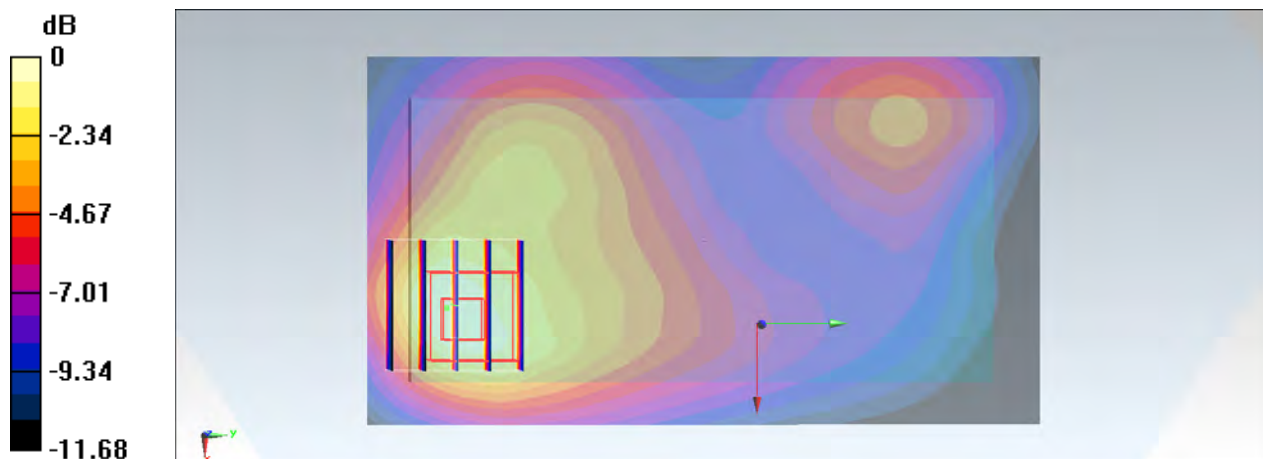

0 dB = 0.658 W/kg = -1.82 dBW/kg

#23_WCDMA II_RMC 12.2Kbps_Back_1cm_Ch9538

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL1900_141109 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.544 \text{ S/m}$; $\epsilon_r = 51.468$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.3 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.86, 6.86, 6.86); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch9538/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.993 W/kg


Configuration/Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.913 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.759 W/kg ; SAR(10 g) = 0.421 W/kg

Maximum value of SAR (measured) = 1.00 W/kg

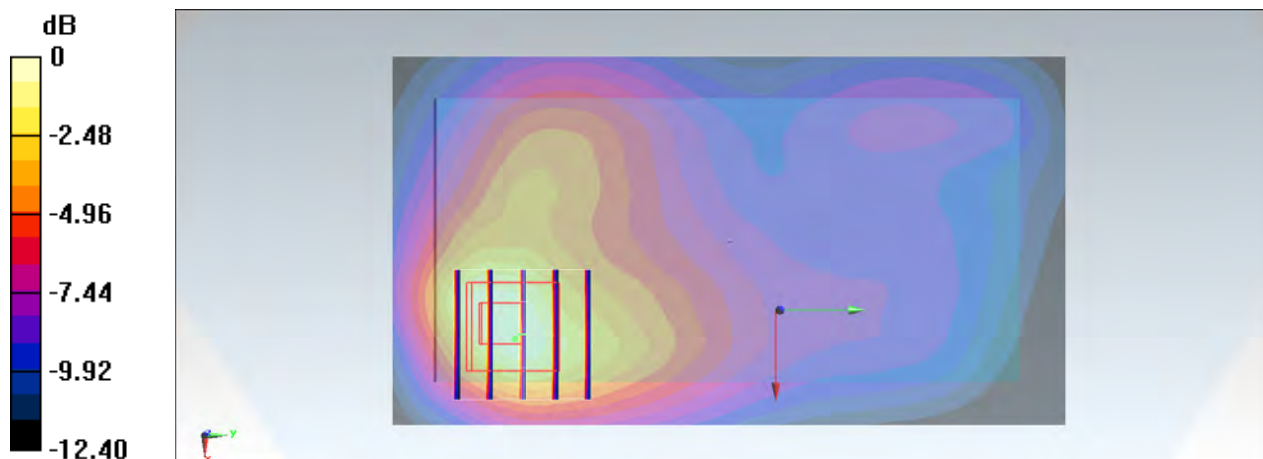

0 dB = 1.00 W/kg = 0.00 dBW/kg

#24_LTE Band 5_10M_QPSK_1RB_0Offset_Back_1cm_Ch20600

Communication System: LTE; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: MSL850_141112 Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.981 \text{ S/m}$; $\epsilon_r = 54.768$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.8 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.48, 8.48, 8.48); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch20600/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.437 W/kg


Configuration/Ch20600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.549 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.374 W/kg ; SAR(10 g) = 0.280 W/kg

Maximum value of SAR (measured) = 0.435 W/kg

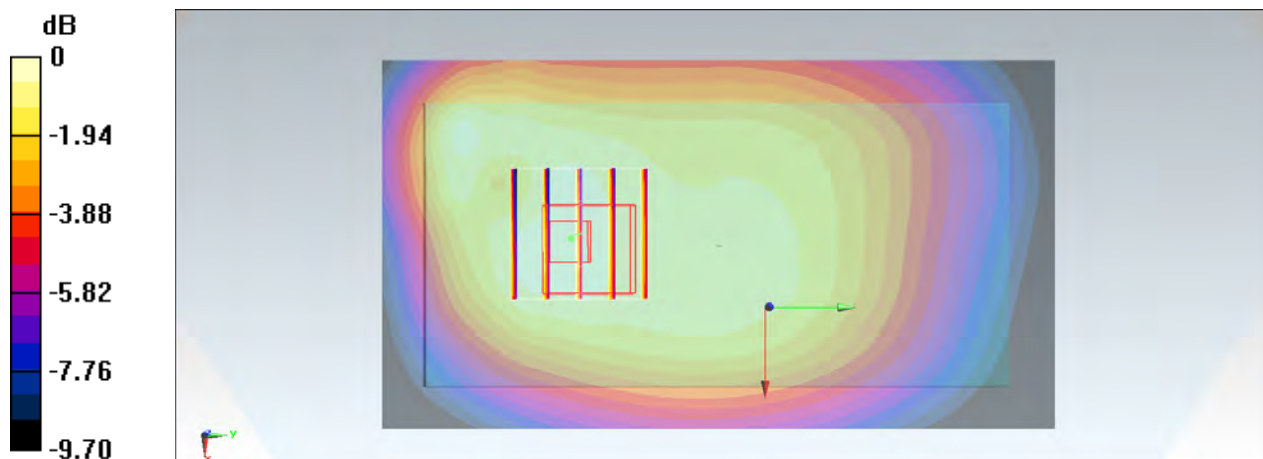

$0 \text{ dB} = 0.435 \text{ W/kg} = -3.62 \text{ dBW/kg}$

#25_LTE Band 4_20M_QPSK_1RB_0Offset_Back_1cm_Ch20300

Communication System: LTE; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: MSL1750_141111 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 51.061$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.32, 7.32, 7.32); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.611 W/kg


Configuration/Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.270 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.777 W/kg

SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.284 W/kg

Maximum value of SAR (measured) = 0.588 W/kg

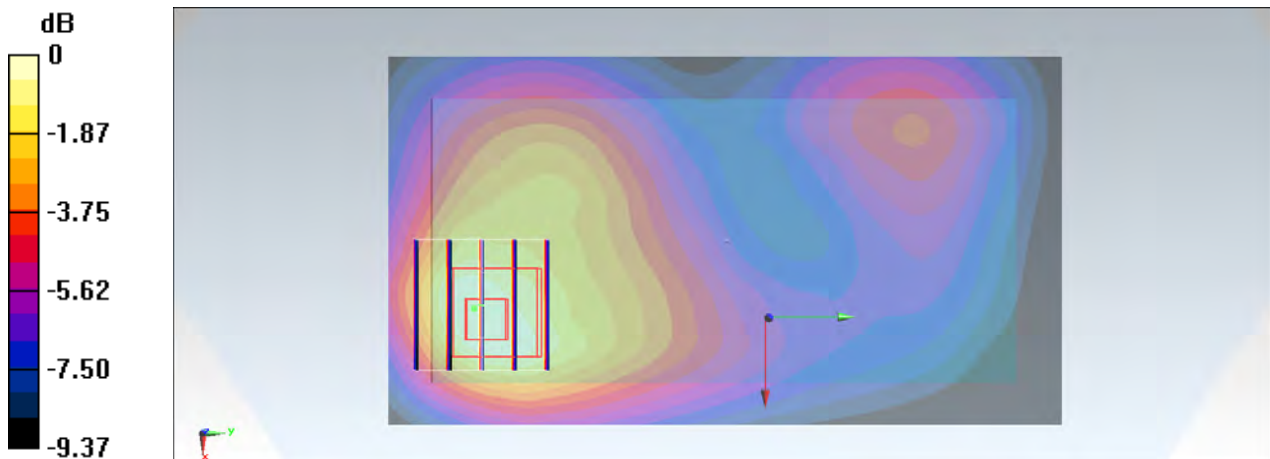

0 dB = 0.588 W/kg = -2.31 dBW/kg

#26_LTE Band 2_20M_QPSK_1RB_0Offset_Back_1cm_Ch18700

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: MSL1900_141109 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.498$ S/m; $\epsilon_r = 51.629$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.86, 6.86, 6.86); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch18700/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.601 W/kg


Configuration/Ch18700/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.097 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.830 W/kg

SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.275 W/kg

Maximum value of SAR (measured) = 0.642 W/kg

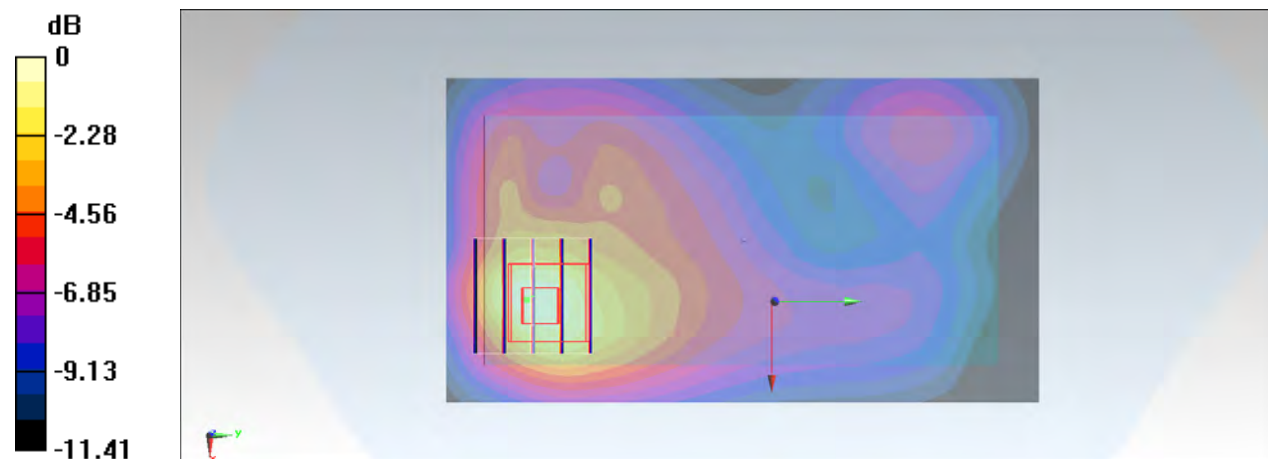

0 dB = 0.642 W/kg = -1.92 dBW/kg

#27_LTE Band 25_20M_QPSK_1RB_0Offset_Back_1cm_Ch26140

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: MSL1900_141109 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.498$ S/m; $\epsilon_r = 51.629$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.86, 6.86, 6.86); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch26140/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.544 W/kg


Configuration/Ch26140/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.557 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.742 W/kg

SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 0.568 W/kg

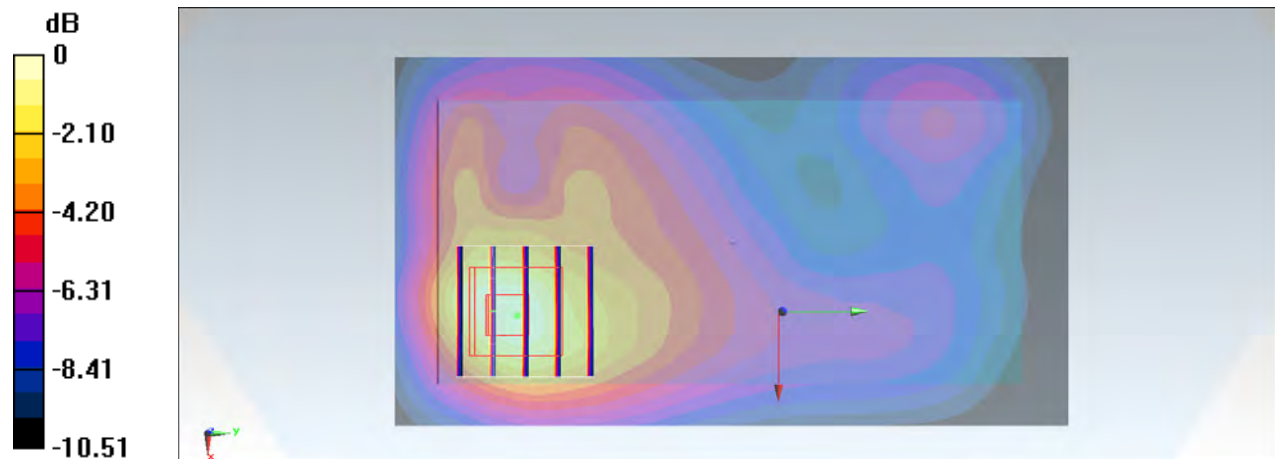

0 dB = 0.568 W/kg = -2.46 dBW/kg

#28_LTE Band 7_20M_QPSK_1RB_0Offset_Back_1cm_Ch21350

Communication System: LTE; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: MSL2600_141106 Medium parameters used: $f = 2560$ MHz; $\sigma = 2.149$ S/m; $\epsilon_r = 52.782$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.22, 6.22, 6.22); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch21350/Area Scan (81x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.62 W/kg


Configuration/Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.825 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.41 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.473 W/kg

Maximum value of SAR (measured) = 1.64 W/kg

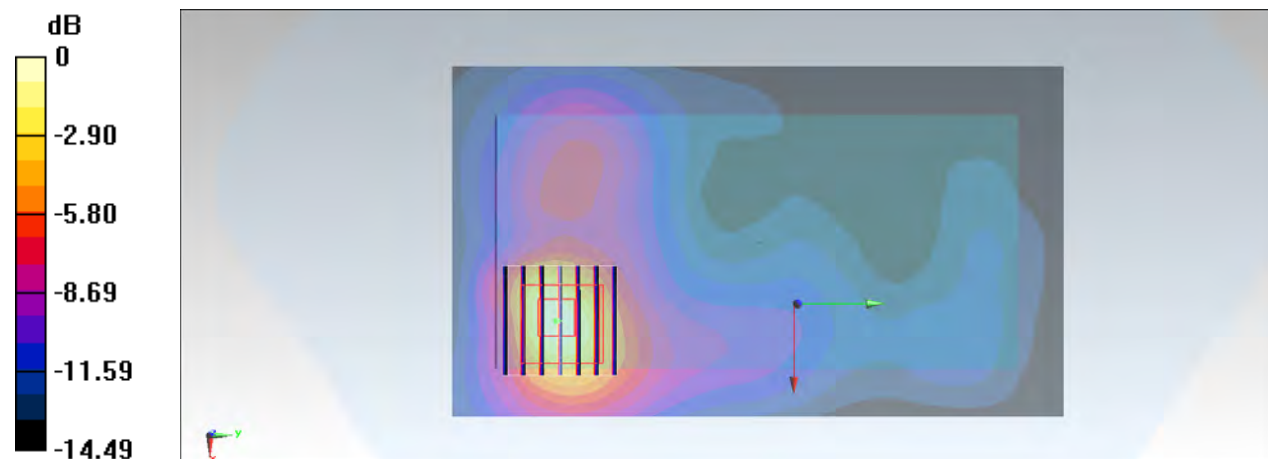

0 dB = 1.64 W/kg = 2.15 dBW/kg

#29_LTE Band 38_20M_QPSK_1RB_0Offset_Back_1cm_Ch37850

Communication System: LTE; Frequency: 2580 MHz; Duty Cycle: 1:1.59

Medium: MSL2600_141106 Medium parameters used: $f = 2580$ MHz; $\sigma = 2.176$ S/m; $\epsilon_r = 52.779$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.22, 6.22, 6.22); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch37850/Area Scan (81x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.04 W/kg


Configuration/Ch37850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.233 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.332 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

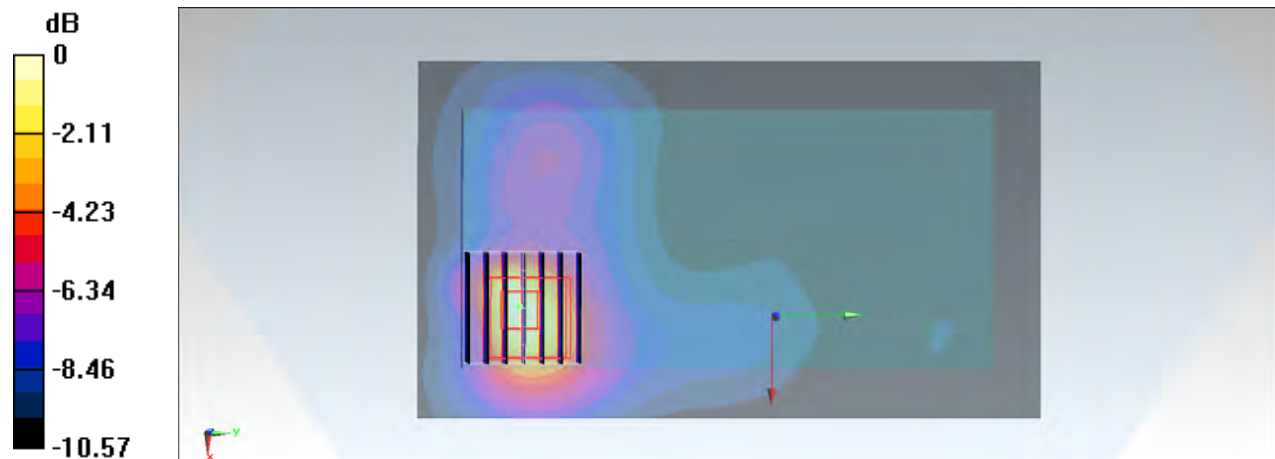

0 dB = 1.06 W/kg = 0.25 dBW/kg

#30_LTE Band 41_20M_QPSK_1RB_0Offset_Back_1cm_Ch40185

Communication System: LTE; Frequency: 2549.5 MHz; Duty Cycle: 1:1.59

Medium: MSL2600_141107 Medium parameters used: $f = 2549.5$ MHz; $\sigma = 2.153$ S/m; $\epsilon_r = 51.316$;
 $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.22, 6.22, 6.22); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch40185/Area Scan (81x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.885 W/kg


Configuration/Ch40185/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.720 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.602 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 0.938 W/kg

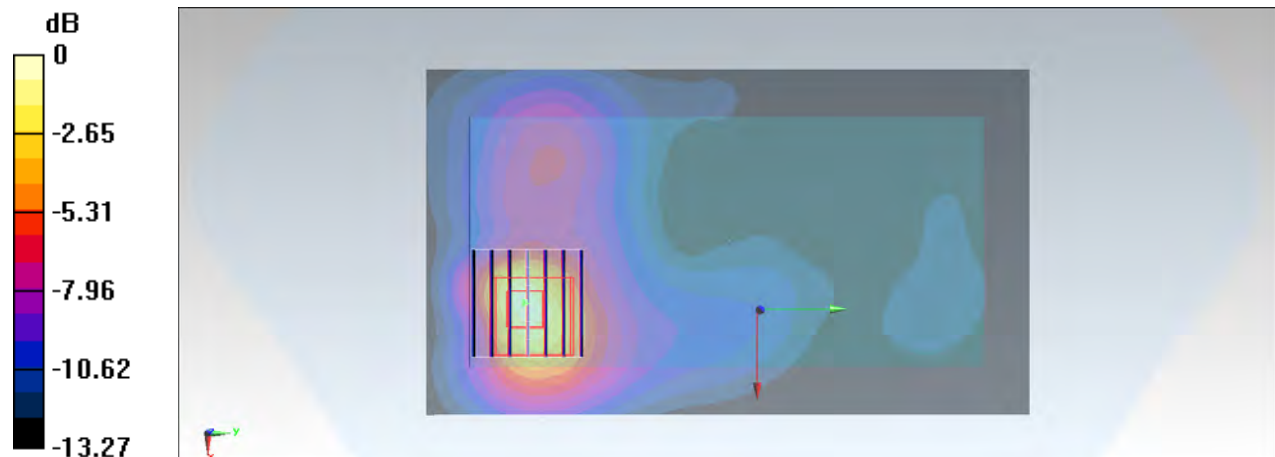

0 dB = 0.938 W/kg = -0.28 dBW/kg

#31_WLAN2.4GHz_802.11b 1Mbps_Back_1cm_Ch1

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1.024

Medium: MSL_2450_141105 Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.88 \text{ mho/m}$; $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.78, 6.78, 6.78); Calibrated: 2014/9/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Ch1/Area Scan (81x141x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (interpolated) = 0.197 mW/g


Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.3 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.271 W/kg

SAR(1 g) = 0.136 mW/g ; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.199 mW/g

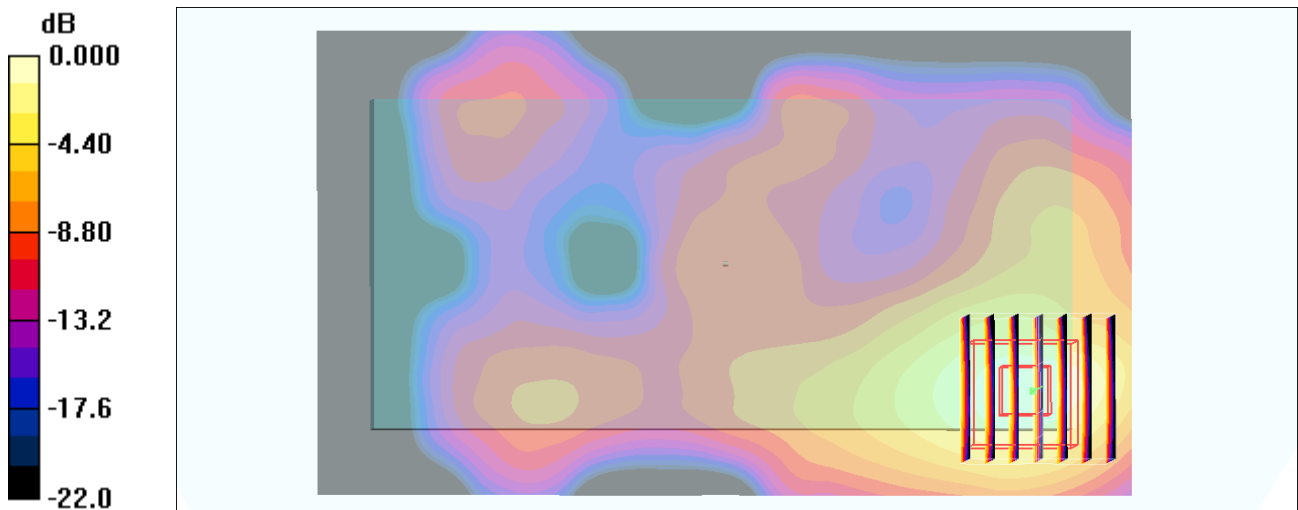

0 dB = 0.199mW/g

#32_Bluetooth_1Mbps_Back_1cm_Ch39

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.2

Medium: MSL_2450_141105 Medium parameters used: $f = 2441 \text{ MHz}$; $\sigma = 1.92 \text{ mho/m}$; $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.78, 6.78, 6.78); Calibrated: 2014/9/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Ch39/Area Scan (81x141x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (interpolated) = 0.037 mW/g


Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.16 V/m ; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 0.025 W/kg

SAR(1 g) = 0.011 mW/g ; SAR(10 g) = 0.00493 mW/g

Maximum value of SAR (measured) = 0.018 mW/g

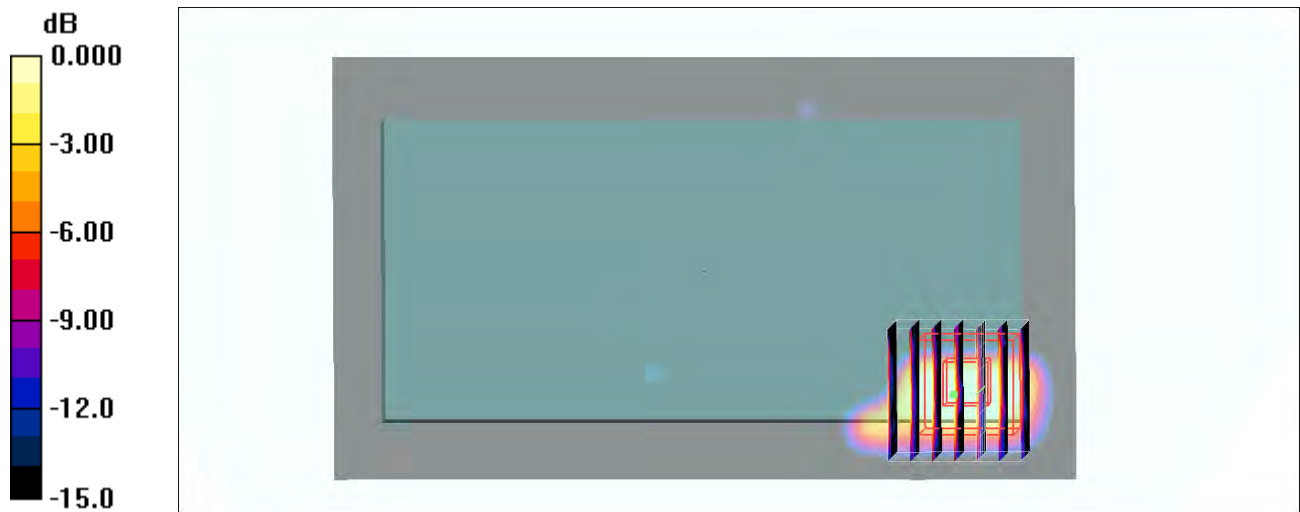

0 dB = 0.018mW/g

#33_GSM850_GPRS (4 Tx slots)_Back_1cm_Ch251

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.08

Medium: MSL850_141112 Medium parameters used: $f = 849$ MHz; $\sigma = 0.985$ S/m; $\epsilon_r = 54.733$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.48, 8.48, 8.48); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch251/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.425 W/kg


Configuration/Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.256 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 0.424 W/kg

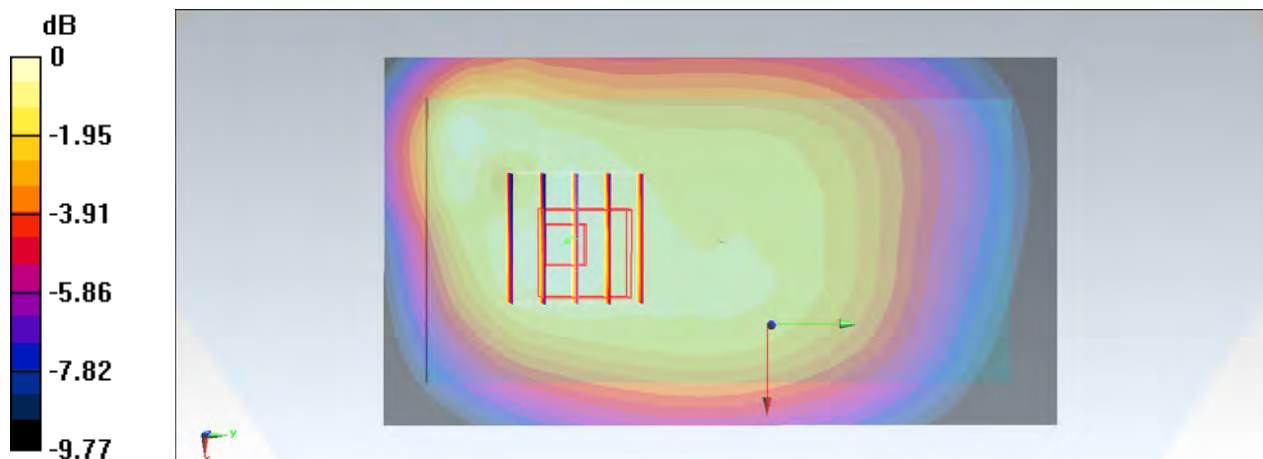

0 dB = 0.424 W/kg = -3.73 dBW/kg

#34_GSM1900_EDGE (4 Tx slots)_Back_1cm_Ch661

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:2.08

Medium: MSL1900_141109 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.516$ S/m; $\epsilon_r = 51.581$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.86, 6.86, 6.86); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch661/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.603 W/kg


Configuration/Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.402 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.845 W/kg

SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 0.650 W/kg

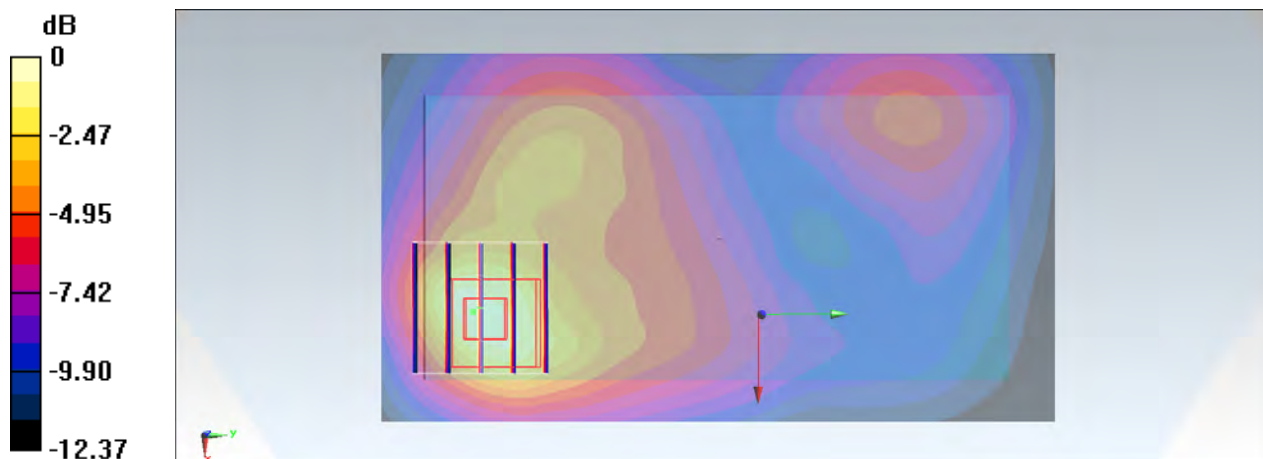

0 dB = 0.650 W/kg = -1.87 dBW/kg

#35_WCDMA V_RMC 12.2Kbps_Back_1cm_Ch4233

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium: MSL850_141112 Medium parameters used: $f = 847 \text{ MHz}$; $\sigma = 0.983 \text{ S/m}$; $\epsilon_r = 54.746$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.8 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.48, 8.48, 8.48); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch4233/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.480 W/kg


Configuration/Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.383 V/m ; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.367 W/kg ; SAR(10 g) = 0.244 W/kg

Maximum value of SAR (measured) = 0.450 W/kg

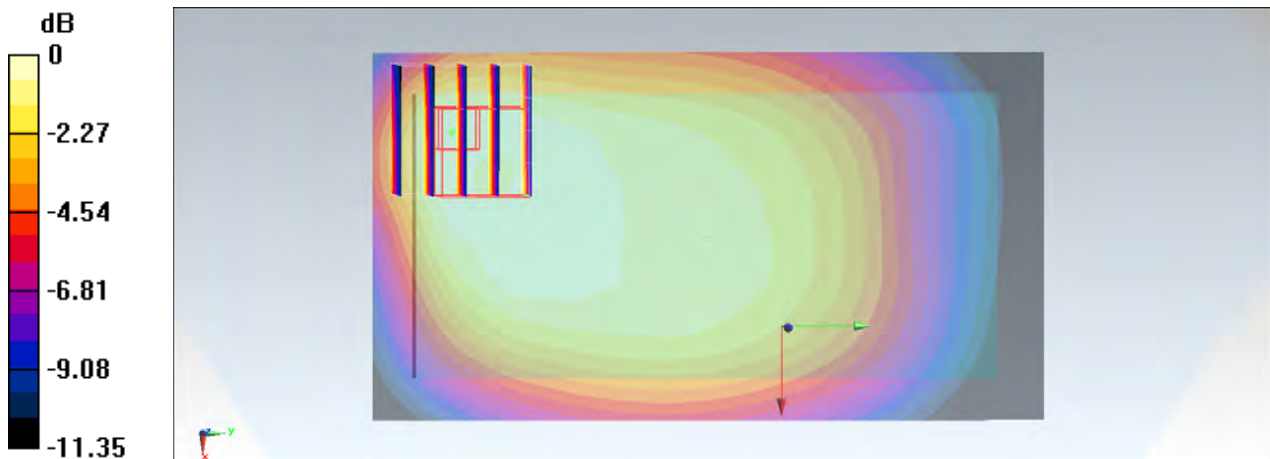

0 dB = $0.450 \text{ W/kg} = -3.47 \text{ dBW/kg}$

#36_WCDMA IV_RMC 12.2Kbps_Back_1cm_Ch1513

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: MSL1750_141111 Medium parameters used: $f = 1753 \text{ MHz}$; $\sigma = 1.521 \text{ S/m}$; $\epsilon_r = 51.036$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.32, 7.32, 7.32); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch1513/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.692 W/kg


Configuration/Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.410 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.892 W/kg

SAR(1 g) = 0.502 W/kg ; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 0.658 W/kg

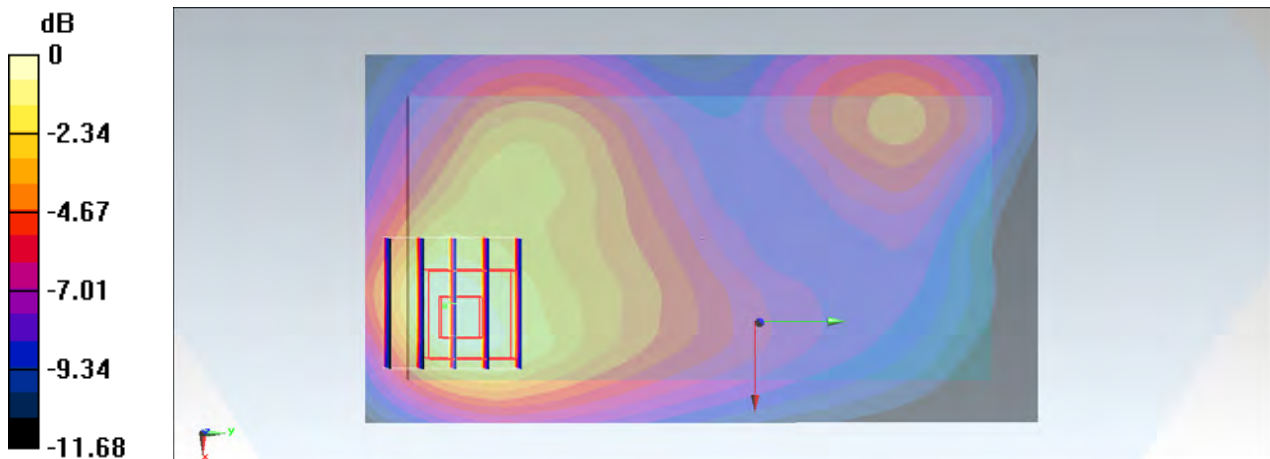

0 dB = $0.658 \text{ W/kg} = -1.82 \text{ dBW/kg}$

#37_WCDMA II_RMC 12.2Kbps_Back_1cm_Ch9538

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL1900_141109 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.544 \text{ S/m}$; $\epsilon_r = 51.468$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.3 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.86, 6.86, 6.86); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch9538/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.993 W/kg


Configuration/Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.913 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.759 W/kg ; SAR(10 g) = 0.421 W/kg

Maximum value of SAR (measured) = 1.00 W/kg

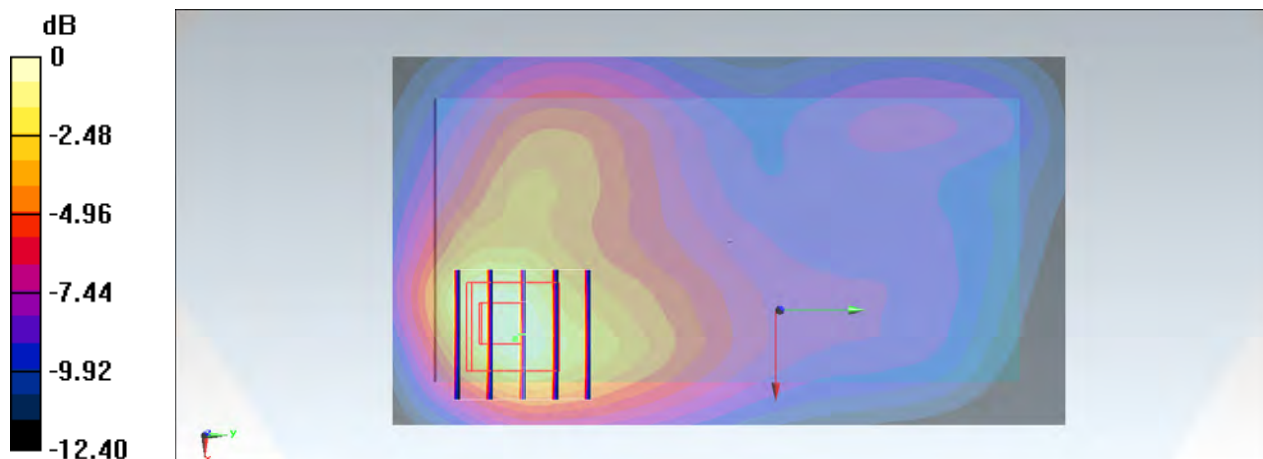

$0 \text{ dB} = 1.00 \text{ W/kg} = 0.00 \text{ dBW/kg}$

#38_LTE Band 5_10M_QPSK_1RB_0Offset_Back_1cm_Ch20600

Communication System: LTE; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: MSL850_141112 Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.981 \text{ S/m}$; $\epsilon_r = 54.768$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.8 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(8.48, 8.48, 8.48); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch20600/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.437 W/kg


Configuration/Ch20600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.549 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.374 W/kg ; SAR(10 g) = 0.280 W/kg

Maximum value of SAR (measured) = 0.435 W/kg

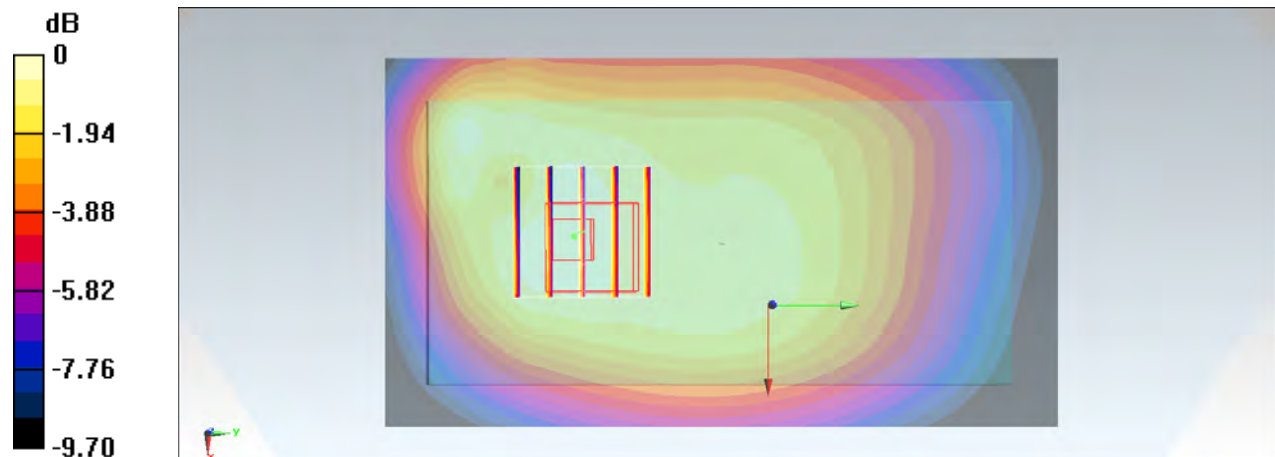

$0 \text{ dB} = 0.435 \text{ W/kg} = -3.62 \text{ dBW/kg}$

#39_LTE Band 4_20M_QPSK_1RB_0Offset_Back_1cm_Ch20300

Communication System: LTE; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: MSL1750_141111 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 51.061$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.32, 7.32, 7.32); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.611 W/kg


Configuration/Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.270 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.777 W/kg

SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.284 W/kg

Maximum value of SAR (measured) = 0.588 W/kg

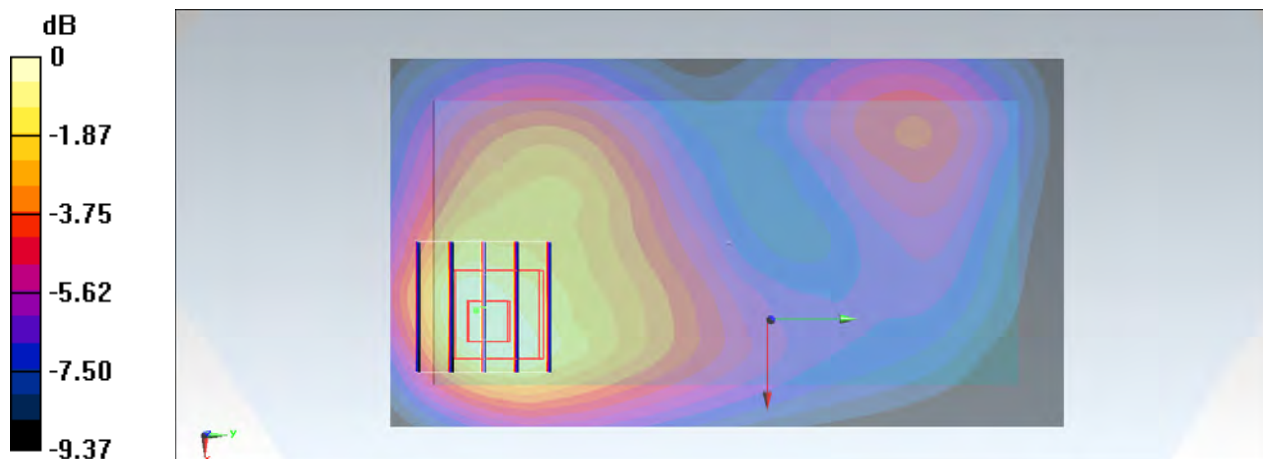

0 dB = 0.588 W/kg = -2.31 dBW/kg

#40_LTE Band 2_20M_QPSK_1RB_0Offset_Back_1cm_Ch18700

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: MSL1900_141109 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.498$ S/m; $\epsilon_r = 51.629$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.86, 6.86, 6.86); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch18700/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.601 W/kg


Configuration/Ch18700/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.097 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.830 W/kg

SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.275 W/kg

Maximum value of SAR (measured) = 0.642 W/kg

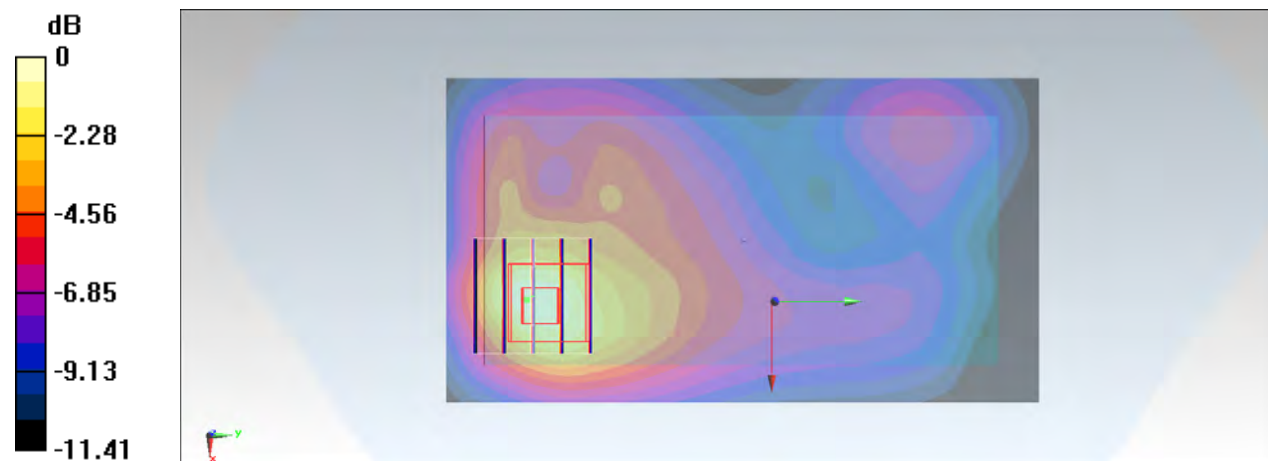

0 dB = 0.642 W/kg = -1.92 dBW/kg

#41_LTE Band 25_20M_QPSK_1RB_0Offset_Back_1cm_Ch26140

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: MSL1900_141109 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.498$ S/m; $\epsilon_r = 51.629$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.86, 6.86, 6.86); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch26140/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.544 W/kg


Configuration/Ch26140/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.557 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.742 W/kg

SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 0.568 W/kg

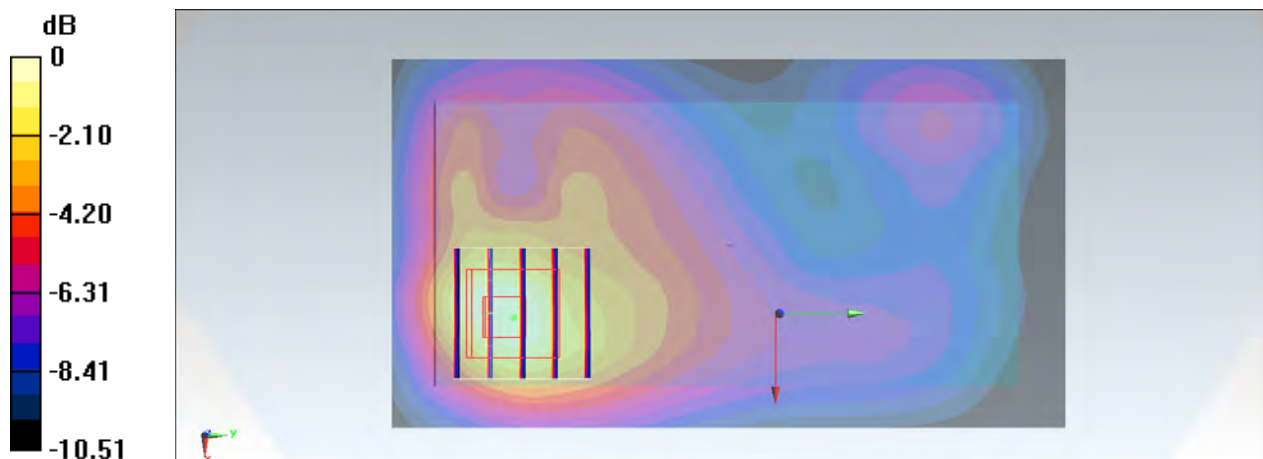

0 dB = 0.568 W/kg = -2.46 dBW/kg

#42_LTE Band 7_20M_QPSK_1RB_0Offset_Back_1cm_Ch21350

Communication System: LTE; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: MSL2600_141106 Medium parameters used: $f = 2560$ MHz; $\sigma = 2.149$ S/m; $\epsilon_r = 52.782$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.22, 6.22, 6.22); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch21350/Area Scan (81x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.62 W/kg


Configuration/Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.825 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.41 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.473 W/kg

Maximum value of SAR (measured) = 1.64 W/kg

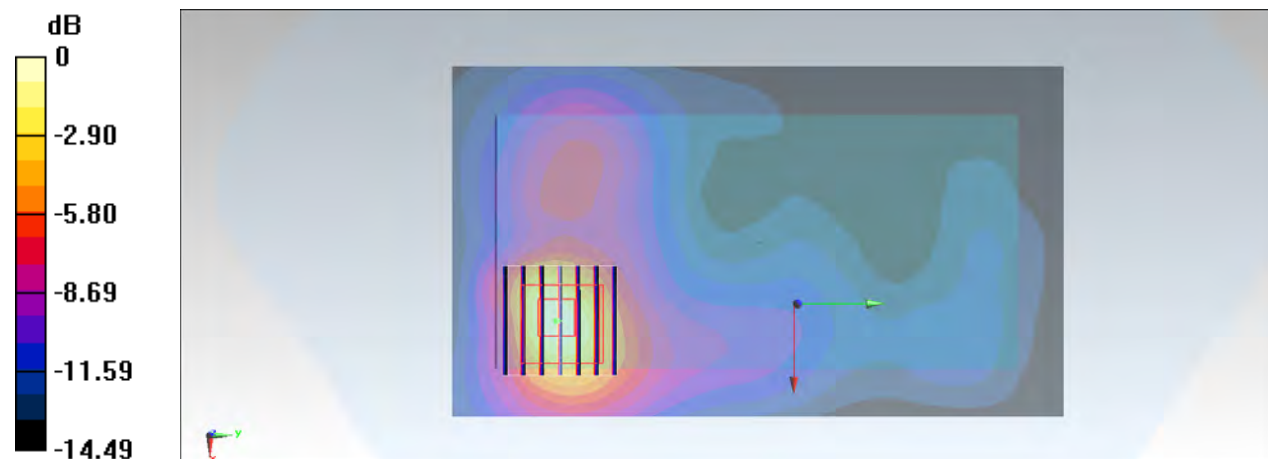

0 dB = 1.64 W/kg = 2.15 dBW/kg

#43_LTE Band 38_20M_QPSK_1RB_0Offset_Back_1cm_Ch37850

Communication System: LTE; Frequency: 2580 MHz; Duty Cycle: 1:1.59

Medium: MSL2600_141106 Medium parameters used: $f = 2580$ MHz; $\sigma = 2.176$ S/m; $\epsilon_r = 52.779$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.22, 6.22, 6.22); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch37850/Area Scan (81x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.04 W/kg


Configuration/Ch37850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.233 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.332 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

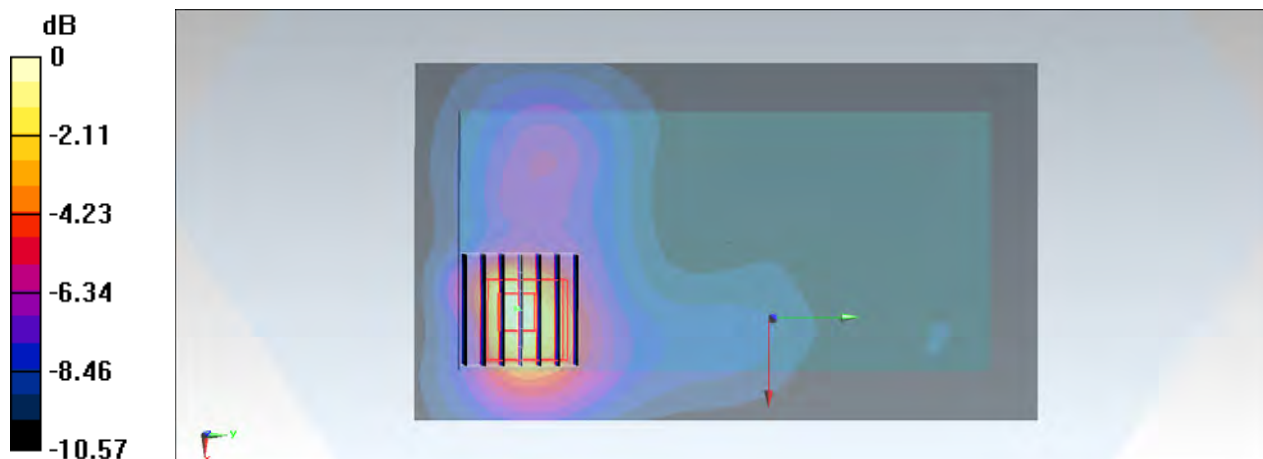

0 dB = 1.06 W/kg = 0.25 dBW/kg

#44_LTE Band 41_20M_QPSK_1RB_0Offset_Back_1cm_Ch40185

Communication System: LTE; Frequency: 2549.5 MHz; Duty Cycle: 1:1.59
 Medium: MSL2600_141107 Medium parameters used: $f = 2549.5$ MHz; $\sigma = 2.153$ S/m; $\epsilon_r = 51.316$;
 $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.22, 6.22, 6.22); Calibrated: 2014/6/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn911; Calibrated: 2014/2/25
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch40185/Area Scan (81x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.885 W/kg


Configuration/Ch40185/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.720 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.602 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 0.938 W/kg

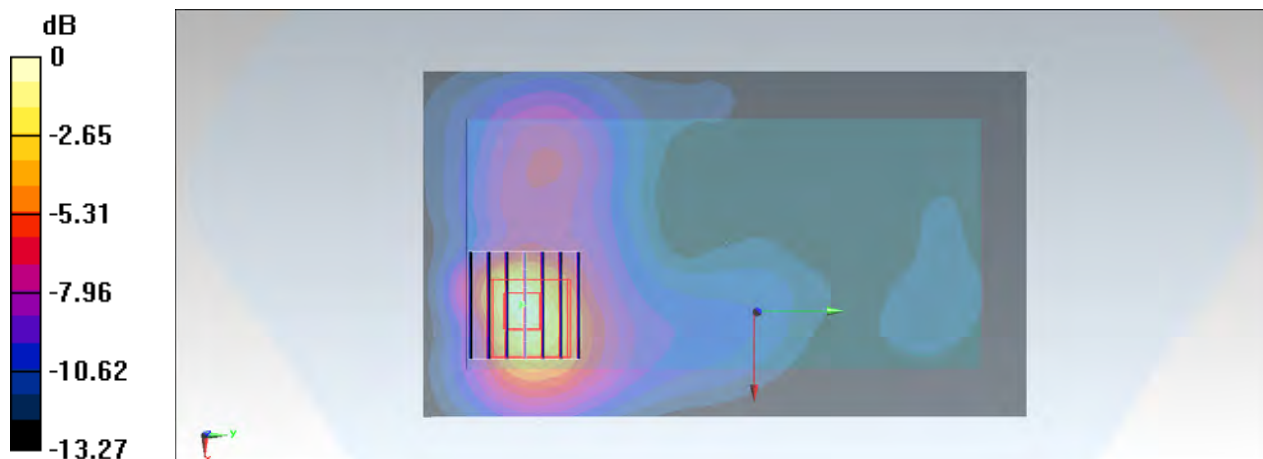

0 dB = 0.938 W/kg = -0.28 dBW/kg

#45_WLAN2.4GHz_802.11b 1Mbps_Back_1cm_Ch1

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1.024

Medium: MSL_2450_141105 Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.88 \text{ mho/m}$; $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.78, 6.78, 6.78); Calibrated: 2014/9/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Ch1/Area Scan (81x141x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (interpolated) = 0.197 mW/g


Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.3 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.271 W/kg

SAR(1 g) = 0.136 mW/g ; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.199 mW/g

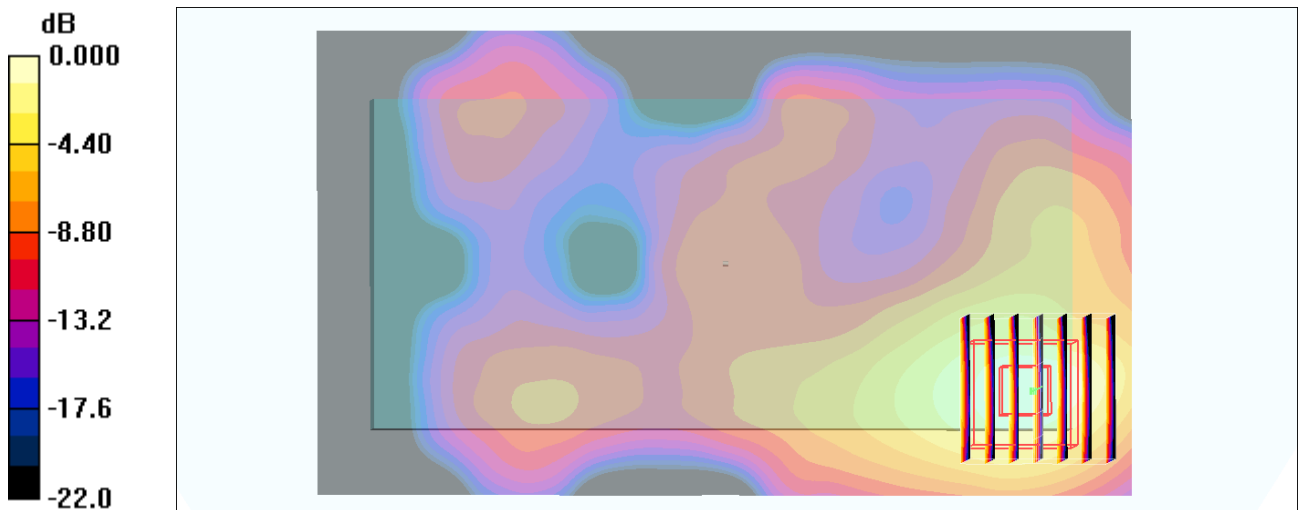

0 dB = 0.199mW/g

#46_WLAN5GHz_802.11a 6Mbps_Back_1cm_Ch36

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1.192

Medium: MSL_5G_141108 Medium parameters used : $f = 5180 \text{ MHz}$; $\sigma = 5.21 \text{ mho/m}$; $\epsilon_r = 47.5$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.25, 4.25, 4.25); Calibrated: 2014/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Ch36/Area Scan (91x171x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.336 mW/g


Ch36/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 8.53 V/m ; Power Drift = 0.131 dB

Peak SAR (extrapolated) = 0.584 W/kg

SAR(1 g) = 0.152 mW/g ; SAR(10 g) = 0.054 mW/g

Maximum value of SAR (measured) = 0.361 mW/g

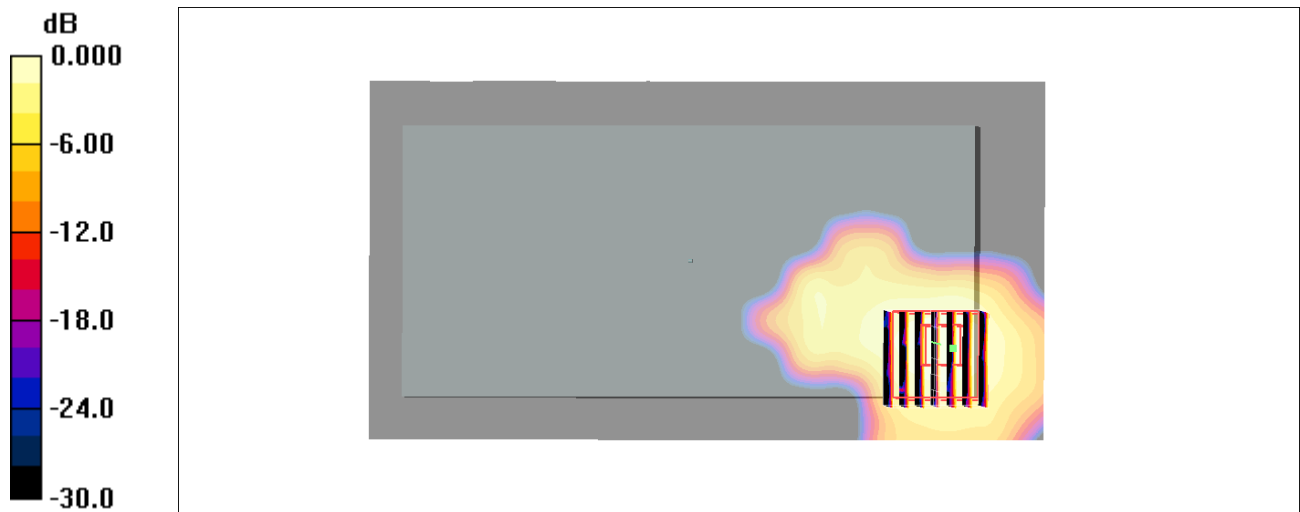

0 dB = 0.361mW/g

#47_WLAN5GHz_802.11a_6Mbps_Back_1cm_Ch64

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1.192

Medium: MSL_5G_141110 Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 5.5 \text{ mho/m}$; $\epsilon_r = 48.4$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.3 \text{ }^\circ\text{C}$

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.04, 4.04, 4.04); Calibrated: 2014/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Ch64/Area Scan (91x171x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.221 mW/g


Ch64/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 7.24 V/m ; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.087 mW/g ; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.235 mW/g

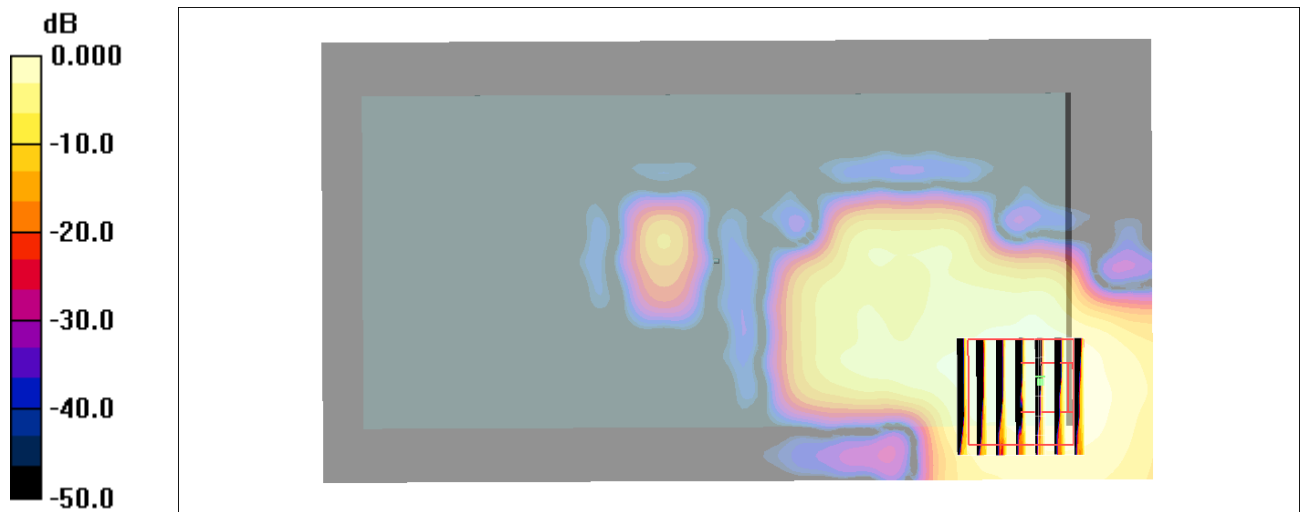

0 dB = 0.235mW/g

#48_WLAN5GHz_802.11a_6Mbps_Back_1cm_Ch136

Communication System: 802.11a; Frequency: 5680 MHz; Duty Cycle: 1:1.192

Medium: MSL_5G_141110 Medium parameters used: $f = 5680$ MHz; $\sigma = 5.94$ mho/m; $\epsilon_r = 47.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(3.79, 3.79, 3.79); Calibrated: 2014/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Ch136/Area Scan (91x171x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.420 mW/g


Ch136/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.90 V/m; Power Drift = 0.054 dB

Peak SAR (extrapolated) = 0.641 W/kg

SAR(1 g) = 0.148 mW/g; SAR(10 g) = 0.048 mW/g

Maximum value of SAR (measured) = 0.424 mW/g

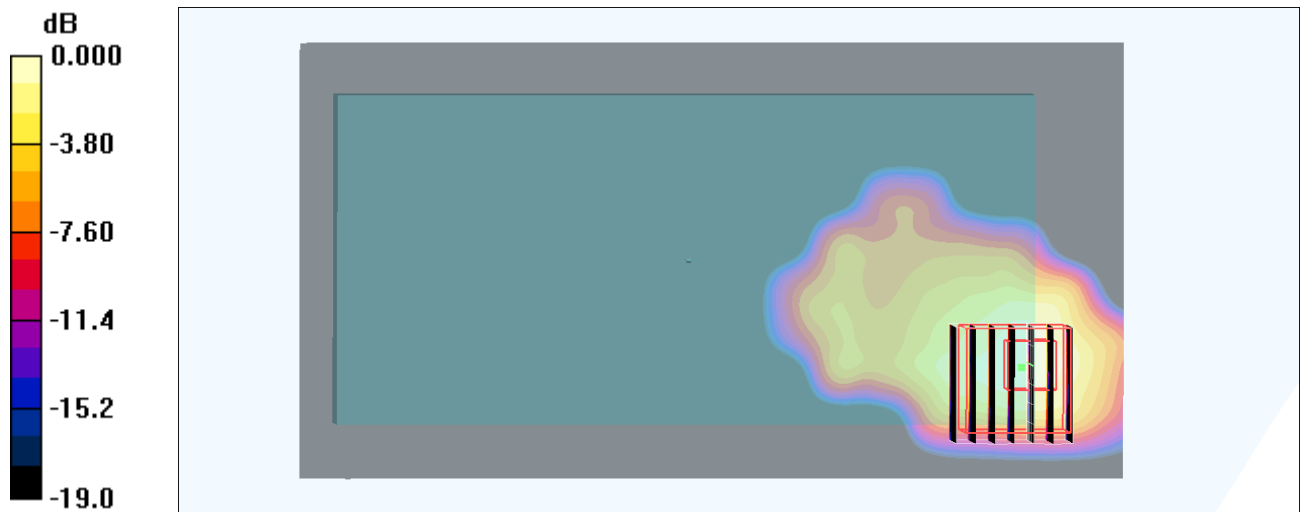

0 dB = 0.424mW/g

#49_WLAN5GHz_802.11a 6Mbps_Back_1cm_Ch165

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1.192

Medium: MSL_5G_141110 Medium parameters used : $f = 5825$ MHz; $\sigma = 6.13$ mho/m; $\epsilon_r = 47.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(3.93, 3.93, 3.93); Calibrated: 2014/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Ch165/Area Scan (91x171x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.323 mW/g


Ch165/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.27 V/m; Power Drift = 0.196 dB

Peak SAR (extrapolated) = 0.830 W/kg

SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.355 mW/g

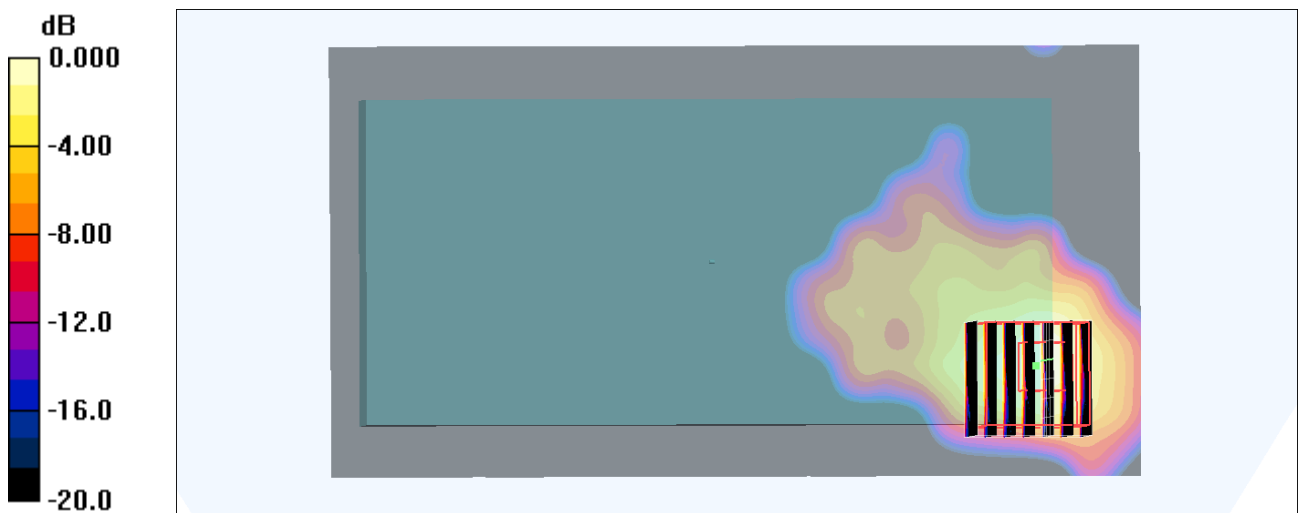

0 dB = 0.355mW/g

#50_Bluetooth_1Mbps_Back_1cm_Ch39

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.2

Medium: MSL_2450_141105 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.78, 6.78, 6.78); Calibrated: 2014/9/29
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Ch39/Area Scan (81x141x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.037 mW/g


Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.16 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 0.025 W/kg

SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00493 mW/g

Maximum value of SAR (measured) = 0.018 mW/g

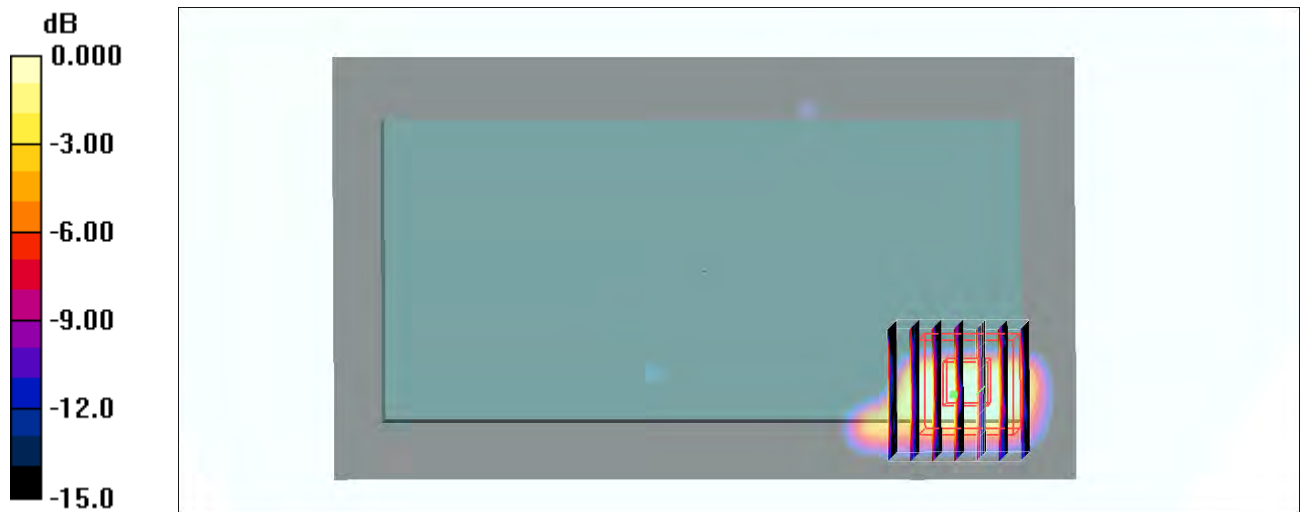

0 dB = 0.018mW/g