



Certificate of compliance

| | | | |
|---------------------|---|-----------------|------------------|
| Test report No.: | ITN-2003-087 | | |
| Applicant : | Etronics Corporation. | | |
| Applicant Address : | 345-50, Gasan-Dong, Geumcheon-Gu, Seoul, Korea, 153-802 | | |
| Product : | LCD Color TV/Monitor | | |
| FCC ID : | P87-ETR0005 | Model NO.: | TL-1700W |
| Receipt NO.: | N/A | Date of receipt | October 06, 2004 |
| Date of Issue : | October 06, 2004 | | |
| Testing location : | Etronics Corporation. 461, Tokjeong-Ri, Changan-Myun, Hwaseong-city, Kyunggi-Do, Korea | | |
| Test Standards: | ANSI C63.4 / 2001 | | |
| Rule Parts : | FCC Part 15 Subpart B | | |
| Equipment Class : | Class B Device Peripheral | | |
| Test Result : | The above mentioned product has been tested and passed. | | |

Prepared by : H.N.Chi

Tested by : S.S.Oh / Engineer

Approved By : J.W.Cho /
Lab. Manager

Signature Date

Signature Date

Signature Date

Other Aspects :

Abbreviations : OK, Passed · Fall = failed · N/A = not applicable

- * This test report is not permitted to copy partly without our permission.
- * This test result is dependent on only equipment to be used.
- * This test result is based on single evaluation of one sample of the above mentioned.
- * We certify that this test report has been based on the measurement standards that is traceable to the national or International standards.



contents

| | |
|--|----|
| Contents | 2 |
| List of Tables | 2 |
| 1. General | 3 |
| 2. Test Site | 3 |
| 2.1 Location | 3 |
| 2.2 List of Test and Measurement Instruments | 4 |
| 2.3 Test Data | 4 |
| 2.4 Test Environment | 4 |
| 3. Description of the tested samples | 5 |
| 3.1 Rating and Physical characteristics | 5 |
| 3.2 Submitted documents | 5 |
| 4. Measurement conditions | 6 |
| 4.1 Modes of operation | 6 |
| 4.2 List of Peripherals | 6 |
| 4.3 Type of Used cables | 7 |
| 4.4 Test Setup | 7 |
| 4.5 Uncertainty | 7 |
| 5. Emission Test | 8 |
| 5.1 Conducted Emissions | 8 |
| 5.2 Radiated Emissions | 10 |
| ➤ List of Tables | |
| Table 1 List of test and measurement equipment | 4 |
| Table 2 Test Data, Conducted Emissions | 11 |
| Table 3 Test Data, Radiated Emissions | 13 |



1. General

This equipment has been shown to be capable of compliance with the applicable technical standards and was tested in accordance with the measurement procedures as indicated in this report.

We attest to the accuracy of data. All measurements reported herein were performed by Etronics Corp. and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

2. Test Site

Etronics Corporation.

2.1 Location

461, Tokjeong-Ri, Changan-Myun, Hwaseong-city, Kyunggi-do, Korea, 445-944

The test site is in compliance with ANSI C63.4/2001 for measurement of radio Interference.



2.2 List of Test and Measurement Instruments

Table 1 : List of Test and Measurement Equipment

· Conducted Emissions

| Kind of Equipment | Type | S/N | Calibrated until |
|--------------------------|-------------|------------|-------------------------|
| EMI Reciver | ESS | 841432/010 | 08.2004 |
| Two Line V-Network | ESH3-Z5 | 894785/013 | 08.2004 |
| Conducted Cable | N/A | N/A | 09.2004 |

· Radiated Emissions

| Kind of Equipment | Type | S/N | Calibrated until |
|--------------------------------|-------------|------------|-------------------------|
| EMI Reciver | ESS | 841432/010 | 08.2004 |
| Spectrum Analyzer | 8568B | 3019A05457 | 08.2004 |
| Amplifier | 8447F | 3113A04584 | 08.2004 |
| Log Periodic Antenna | UHALP9107 | 9107846 | 04.2004 |
| Biconical Antenna | BBA9106 | 91039103 | 04.2004 |
| Open Site Cable | N/A | N/A | 01.2004 |
| Antenna Mast | EMRT2014 | N/A | N/A |
| Antenna & Turntable controller | EMAT2015 | N/A | N/A |

2.3 Test Date

Date of Application : Setember 09, 2004

Date of Test : Setember 10, 2004 ~ October 04, 2004

2.4 Test Environment

See each test item's description



3. Description of the tested samples

The EUT is TFT LCD TV With MONITOR

3.1 Rating and Physical Characteristics

Panel Display size : 17.1"(434.38 mm, diagonal)

Panel Actual Display size : 372.48(H) X 223.488(V) mm

Panel Pixel size : 0.291 X 0.291 mm

Panel Viewing Angle : 88 / 88 / 88 / 88 (L/R/U/D)

Frequency Horizontal : 30 – 64 KHz

Frequency Vertical : 50 – 85 KHz

Frequency Display Color : 16.777.216 colors

Display Resolution Optimum Mode : 1280 X 768 @ 60

Display Resolution Maximum Mode : 1280 X 1024 @ 60

Input Signal Sync. : H/V Separate, TTL, SOG (Sync On Green)

Video Color system : NTSC

Video Ins Antenna : 75Ohms unbalance, F-Type

Video Ins Composite : CVBS

Video Ins S-Video : S-VHS

Video Ins Component (1/2) : Y/Pb/Pr, (480i/480p)

Video Ins VGS : Analog R/G/B

Video Ins DVI-D : Digital R/G/B

Audio Ins/Out Audio Ins : RCA Jack, Red(R)/White(L), 0.3Vrms

Audio Ins/Out PC Audio In : Stereo mini jack, 0.3Vrms

Audio Ins/Out Headphone Out : Stereo mini jack, 10mV Output

Audio Amplifier : Max. 4.2W output

Power Supply Input : AC 100-240 V, 1.8-0.9 A (50/60 Hz)

Power Supply Output : DC 14V / 4.5A

Power Maximum : 63 W

Consumption Power Saving : < 10 W

Dimensions Weight : Unit (WXDXH) :

TV body : 22.06 X 2.6 X 11.43 inch / 15.44 lbs (560 X 66 X 290 mm / 7 Kg)

Stand : 20.06 X 7.87 X 14.8 inch / 24.26 lbs (560 X 200 X 376 mm / 11 Kg)

Environmental Considerations Operating Temperature : 32 ° F to 122 ° F (0 ° C to 50 ° C)

Environmental Considerations Operating Humidity : 10% to 90%

Environmental Considerations Storge Temperature : -4 ° F to 140 ° F (-20 ° C to 60 ° C)

Environmental Considerations Storge Humidity : 10% to 90%



3.2 Submitted Documents

N/A

4. Measurement Conditions

The operating voltage of EUT is supplied by a TFT LCD TV With MONITOR

4.1 Modes of Operation

The EUT was in the following operation mode during all testing;

The measurement was conducted under "H" Pattern Display of MNT and PC operating

4.2 List of Peripherals

| Description | Manufacturer | Model Name | Serial No. | FCC ID |
|--------------------|---------------------|-------------------|-------------------|---------------|
| Personal Computer | SAMSUNG | MA10 | A32192DT400609 | N/A |
| Keyboard | SAMSUNG | SEM-DT35 | 3V002032 | N/A |
| Mouse | Logitech | M-S48a | HCA20912082 | JNZ201213 |



4.3 Type of Used Cables

| Description | Length | Type of shield | Manufacturer | Remark |
|--------------------------|---------------|-----------------------|---------------------|---------------|
| PC power cable | 2.0m | Non-Shield | None | |
| Video interfacd cable | 1.5m | Shield | None | |
| Keyboard interface cable | 1.2m | Non-Shield | None | |
| Mouse interface cable | 1.8m | Non-Shield | None | |

4.4 Test Setup

The test setup photographs showed the external supply connections and interfaces.

4.5 Uncertainty

1) Radiated disturbance

$$U_c \text{ (Combined standard Uncertainty)} = \pm 2.08B$$

$$\text{Expanded uncertainty } U = K_{uc}$$

$$\therefore U = \pm 4.16dB$$

2) Conducted disturbance

$$U_c = \pm 1.25dB$$

$$U = K_{uc} - 2 \times U_c = \pm 2.5B$$



5. Emission Test

5.1 Conducted Emissions

Result : Passed

The line-conducted facility is located inside a 3.0M × 4.0M × 7.0M shielded enclosure.

The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 604-05.

A 1m × 1.5m wooden table 80cm. High is placed 40cm away from the vertical wall and 1.5m away from the side wall of the shielded room. R&S Model ESH3-Z5 (10KHz-30MHz)

50ohm/50uH Lone-Impedance Stabilization Networks(LISNs) are bonded to the shielded room.

The EUT is powered from the R&S LISN and the support equipment is powered from the R&S LISN. Power to the LISNs are filtered by a high-current high-insertion loss Lindgren enclosures power line filters.

The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the Shielded enclosure.

All electrical cables are shielded by braided tinned copper zipper tubing with inner diameter of 1/2". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the R&S LISN.

All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to Warm up to their normal operating condition. The RF output of the LISN was connected to the Spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The frequency producing the maximum level was reexamined using EMI/field Intensity Meter (ESS) and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak mode.

The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by:switching power lines;varying the mode of operation or resolution;

Clock or data exchange speed;if applicable;whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of conducted test.

Each EME reported was calibrated using self-calibrating mode.

Figure 1 : Spectral Diagram, Line-PE (HOT)

CONDUCTED EMISSIONS
EUT: TL-1700W
HOT
Date: 30. Sep 04 17:35
Scan Settings (1 Range)
|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 10k 10k PK 20ms AUTO LN ON 60dB
Transducer No. Start Stop Name
2 150k 30M CE

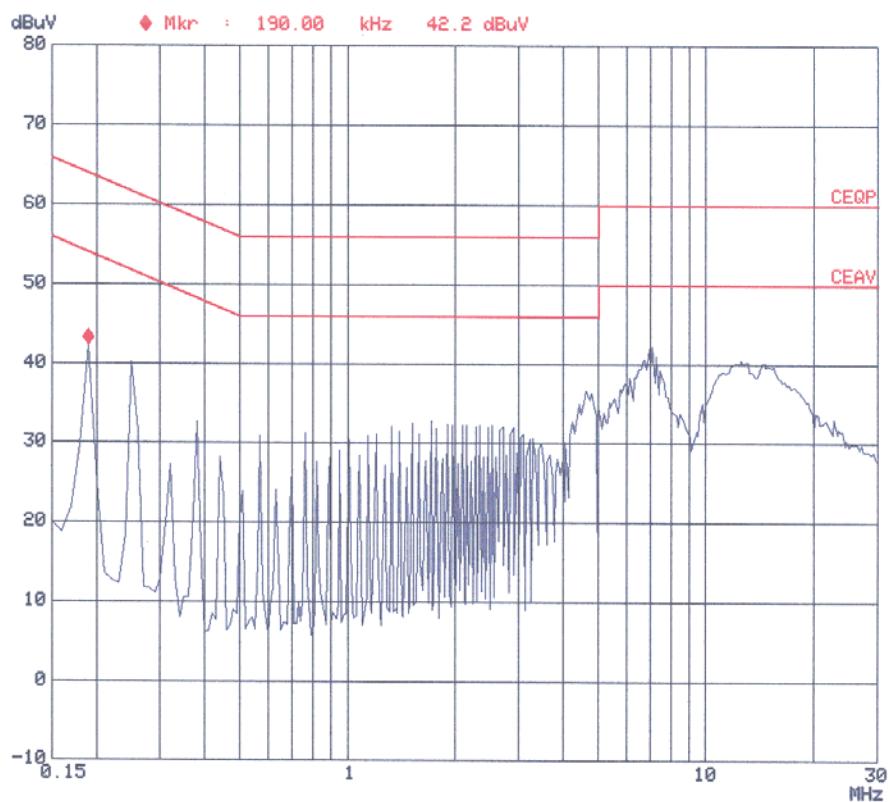
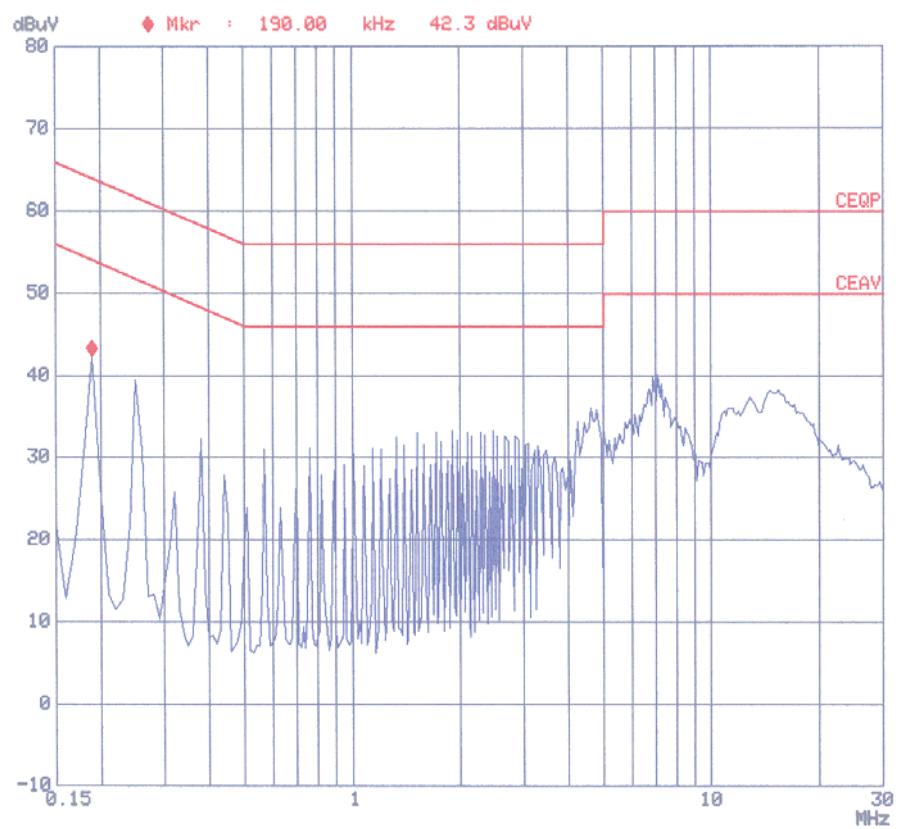


Figure 2 : Spectral Diagram, Neutral-PE (Neutral)

CONDUCTED EMISSIONS
EUT: TL-1700W
NEUTRAL
Date: 30. Sep 04 17:26

Scan Settings (1 Range)
Frequencies |----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 10k 10k PK 20ms AUTO LN ON 60dB

| Transducer No. | Start | Stop | Name |
|----------------|-------|------|------|
| 2 | 150k | 30M | CE |



**Table 2 : Test Data, Conducted Emissions**

| Frequency (MHz) | Line | QP Actual (dB μ V) | AV Actual (dB μ V) | QP Limit (dB μ V) | AV Limit (dB μ V) | QP Margin (dB) | AV Margin (dB) |
|-----------------|------|------------------------|------------------------|-----------------------|-----------------------|----------------|----------------|
| 0.19 | A | 40.9 | 32.5 | 64.0 | 54.0 | 23.1 | 21.5 |
| 0.25 | A | 38.6 | 30.0 | 61.7 | 51.7 | 23.1 | 21.7 |
| 0.38 | A | 31.2 | 27.8 | 58.2 | 48.2 | 27.0 | 20.4 |
| 0.57 | B | 30.4 | 29.4 | 56.0 | 46.0 | 25.6 | 16.6 |
| 0.76 | B | 30.2 | 27.7 | 56.0 | 46.0 | 25.8 | 18.3 |
| 7.09 | A | 40.6 | 34.6 | 60.0 | 50.0 | 19.4 | 15.4 |
| 15.20 | B | 36.4 | 31.2 | 60.0 | 50.0 | 23.6 | 18.8 |

NOTES :

1. All modes of operation were investigated
and the worst-case emission are reported.
2. All other emissions are non-significant.
3. All readings are calibrated by self-mode in receiver,
4. Measurements using CISPR quasi-peak mode.
5. Line A = LINE-Pem Line B = NEUTRAL-PE
6. C/F = Correction Factor
7. C/L = Cable Loss

Margin Calculation

$$\text{Margin} = \text{Limit} - \text{Actual}$$

$$\text{Actual} = \text{Reading} + \text{C/F} + \text{C/L}$$

5.2 Radiated Emissions



Result : Passed

Preliminary measurements were made indoors at 1meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME.

Appropriate percaution was taken to ensure that all EME from EUT were maximized and Investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found.

The spectrum was scanned from 30 to 300 MHz using biconical antenna and from 300 to 1000 MHz using log-periodic antenna. Above 1GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using SCHWARZBECK dipole antennas. The test equipment was placed on a wooden table situated on a 4 × 4meter area adjacent to the measurement area, Turntable was to protect from weather in the dome that made with FRP. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-exmined and invertigated using EMI/Fiedl Intensity Meter(ESS) and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1MHz depending on the frequency or type of signal.

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8meter high non-metallic 1 × 1.5meter table.

The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission, The turntable containing the system was rotated; the antenna height was varied 1 to 4meters and stopped at the azimuth or height producing the maximum emission.

Each emission was maximized by: varying the mode of operation of resolution: clock or data exchange speed, and/or support equipment, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of radiated emission test, Each EME reported was calibrated using self-calibrating mode.

**Table 3 : Test Data, Radiated Emissions**

| Frequency [MHz] | Pol. | Height [m] | Angle [°] | (1) Reading [dB μ V] | (2) AFCL [dB/m] | (3) Actual [dB μ V/m] | (4) Limit [dB μ V/m] | (5) Margin [dB] |
|-----------------|------|------------|-----------|--------------------------|-----------------|---------------------------|--------------------------|-----------------|
| 71.61 | H | 1.2 | 225 | 12.65 | 7.55 | 20.20 | 40.0 | 19.8 |
| 85.93 | H | 1.2 | 230 | 9.20 | 9.90 | 19.10 | 40.0 | 20.9 |
| 100.24 | H | 1.3 | 235 | 14.30 | 12.69 | 27.00 | 43.5 | 16.5 |
| 114.56 | V | 1.5 | 280 | 19.93 | 14.87 | 34.80 | 43.5 | 8.7 |
| 128.88 | V | 1.5 | 285 | 14.56 | 16.44 | 31.00 | 43.5 | 12.5 |
| 143.20 | H | 1.6 | 230 | 16.30 | 17.50 | 33.80 | 43.5 | 9.7 |
| 151.41 | H | 1.4 | 240 | 12.61 | 17.99 | 30.60 | 43.5 | 12.9 |
| 157.52 | H | 1.7 | 240 | 22.07 | 18.13 | 40.20 | 43.5 | 3.3 |
| 171.83 | V | 1.6 | 290 | 17.62 | 18.68 | 36.30 | 43.5 | 7.2 |
| 186.14 | V | 1.5 | 285 | 13.50 | 19.10 | 32.60 | 43.5 | 10.9 |
| 194.37 | H | 1.2 | 268 | 16.04 | 19.36 | 35.40 | 43.5 | 8.1 |
| 200.47 | H | 1.2 | 279 | 10.61 | 19.59 | 30.20 | 43.5 | 13.3 |
| 327.64 | V | 1.5 | 260 | 10.88 | 19.62 | 30.50 | 46.0 | 15.5 |
| 381.16 | V | 1.5 | 267 | 20.39 | 20.91 | 41.30 | 46.0 | 4.7 |
| 551.32 | H | 1.2 | 279 | 17.22 | 25.48 | 42.70 | 46.0 | 3.3 |

Table. Radiated Measurements at 3-meters

1. All modes of operation were investigated and the worst-case emission are reported.
2. All other emission are non-significant.
3. All readings are calibrated by self-mode in receiver,
4. Measurements using CISPR quasi-peak mode
5. AFCL = Antenna factor and cable loss
6. H = Horizontal, V = Vertical Polarization.

Margin Calculation

$$\begin{aligned}(5)\text{Margin} &= (4)\text{Limit} - (3)\text{Actual} \\ (3)\text{Actual} &= (1)\text{Reading} + (2)\text{ACL}\end{aligned}$$