

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR PCS LICENSED TRANSMITTER

Test Report No. : E087R-068
AGR No. : A087A-083
Applicant : Inkel Corp.
Address : 177 Cheongcheon-dong, Bupyeong-gu, Incheon Korea
Manufacturer : Inkel Corp.
Address : 3-8 Cheongcheon-dong, Bypyeong-gu, Incheon Korea
Type of Equipment : RF Repeater
FCC ID. : P87JR10
Model Name : JR-10
Serial number : N/A
Total page of Report : 124 pages (including this page)
Date of Incoming : July 17, 2008
Date of issue : July 24, 2008

SUMMARY

The equipment complies with the regulation; **FCC Part 22 Subpart H and Part 24 Subpart E.**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by: 
Young-Min, Choi / Asst. Chief Engineer
RF Div.
ONETECH Corp.

Reviewed by: 
Y. K. Kwon / Managing Director
EMC/RF Center
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	3
2. TEST SUMMARY.....	3
2.1 TEST ITEMS AND RESULTS.....	3
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	3
2.3 RELATED SUBMITTAL(S) / GRANT(S)	3
2.4 PURPOSE OF THE TEST	3
2.5 TEST METHODOLOGY	3
2.6 TEST FACILITY	3
3. GENERAL INFORMATION.....	3
3.1 PRODUCT DESCRIPTION.....	3
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.	3
4. EUT MODIFICATIONS	3
5. SYSTEM TEST CONFIGURATION.....	3
5.1 JUSTIFICATION	3
5.2 PERIPHERAL EQUIPMENT.....	3
5.3 MODE OF OPERATION DURING THE TEST.....	3
5.4 MODULATION CHARACTERISTICS.....	3
6. RF POWER OUTPUT AT ANTENNA TERMINAL	3
6.1 OPERATING ENVIRONMENT	3
6.2 TEST SET-UP	3
6.3 TEST EQUIPMENT USED	3
6.4 TEST DATA	3
6.4.1 TEST RESULT FOR CELLULAR BAND	3
6.4.2 TEST RESULT FOR PCS BAND	3
7. OCCUPIED BANDWIDTH	3
7.1 OPERATING ENVIRONMENT	3
7.2 TEST SET-UP	3
7.3 TEST EQUIPMENT USED	3
7.4 TEST DATA.....	3
8. SPURIOUS EMISSION AT ANTENNA TERMINAL	3

8.1 OPERATING ENVIRONMENT	3
8.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	3
8.3 TEST EQUIPMENT USED	3
8.4 TEST DATA	3
8.4.1 TEST RESULT FOR CELLULAR BAND	3
8.4.2 TEST RESULT FOR PCS BAND	3
9. SPURIOUS EMISSION AT ANTENNA TERMINAL AT BLOCK EDGES ± 1 MHZ	3
9.1 OPERATING ENVIRONMENT	3
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	3
9.3 TEST EQUIPMENT USED	3
9.4 TEST DATA	3
9.4.1 TEST RESULT FOR CELLULAR BAND	3
9.4.2 TEST RESULT FOR PCS BAND	3
10. INTERMODULATION TEST	3
10.1 OPERATING ENVIRONMENT	3
10.2 TEST SET-UP	3
10.3 TEST EQUIPMENT USED	3
10.4 TEST DATA	3
10.4.1 TEST RESULT FOR CELLULAR BAND	3
10.4.2 TEST RESULT FOR PCS BAND	3
11. FIELD STRENGTH OF SPURIOUS RADIATION	3
11.1 OPERATING ENVIRONMENT	3
11.2 TEST SET-UP	3
11.3 TEST EQUIPMENT USED	3
11.4. TEST DATA FOR CELLULAR BAND	3
11.4.1. TEST RESULT FOR UPLINK MODE.....	3
11.4.1.1. OPERATING MODULATION: IS-95 CDMA	3
11.4.1.2. OPERATING MODULATION: CDMA 2000	3
11.4.1.3. OPERATING MODULATION: 1X EVDO	3
11.4.2. TEST RESULT FOR DOWNLINK MODE.....	3
11.4.2.1. OPERATING MODULATION: IS-95 CDMA	3
11.4.2.2. OPERATING MODULATION: CDMA 2000	3
11.4.2.3. OPERATING MODULATION: 1X EVDO	3
11.5. TEST DATA FOR PCS BAND	3
11.5.1. TEST RESULT FOR UPLINK MODE.....	3

11.5.1.1. OPERATING MODULATION: IS-95 CDMA	3
11.5.1.2. OPERATING MODULATION: CDMA 2000	3
11.5.1.3. OPERATING MODULATION: 1x EVDO	3
11.5.2. TEST RESULT FOR DOWNLINK MODE	3
11.5.2.1. OPERATING MODULATION: IS-95 CDMA	3
11.5.2.2. OPERATING MODULATION: CDMA 2000	3
11.5.2.3. OPERATING MODULATION: 1x EVDO	3
12. FREQUENCY STABILITY WITH TEMPERATURE VARIATION	3
12.1 OPERATING ENVIRONMENT	3
12.2 TEST SET-UP	3
12.3 TEST EQUIPMENT USED	3
12.4 TEST DATA FOR CELLULAR BAND	3
12.4.1 TEST RESULT FOR UPLINK MODE	3
12.4.2 TEST RESULT FOR DOWNLINK MODE	3
12.5 TEST DATA FOR PCS BAND	3
12.5.1 TEST RESULT FOR UPLINK MODE	3
12.5.2 TEST RESULT FOR DOWNLINK MODE	3
13. FREQUENCY STABILITY WITH VOLTAGE VARIATION	3
13.1 OPERATING ENVIRONMENT	3
13.2 TEST SET-UP	3
13.3 TEST EQUIPMENT USED	3
13.4 TEST DATA FOR CELLULAR BAND	3
13.4.1 TEST RESULT FOR UPLINK MODE	3
13.4.2 TEST RESULT FOR DOWNLINK MODE	3
13.5 TEST DATA FOR PCS BAND	3
13.5.1 TEST RESULT FOR UPLINK MODE	3
13.5.2 TEST RESULT FOR DOWNLINK MODE	3
14. RADIATED EMISSION TEST FOR GENERAL REQUIREMENT	3
14.1 OPERATING ENVIRONMENT	3
14.2 TEST SET-UP	3
14.3 TEST EQUIPMENT USED	3
14.4 TEST DATA FOR CELLULAR BAND	3
14.4.1 TEST RESULT FOR UPLINK MODE	3
14.4.2 TEST RESULT FOR DOWNLINK MODE	3
14.5 TEST DATA FOR PCS BAND	3

14.5.1 TEST RESULT FOR UPLINK MODE	3
14.5.2 TEST RESULT FOR DOWNLINK MODE.....	3
15. CONDUCTED EMISSION TEST	3
15.1 OPERATING ENVIRONMENT	3
15.2 TEST SET-UP	3
15.3 TEST EQUIPMENT USED	3
15.4 TEST DATA FOR CELLULAR BAND	3
15.4.1 TEST RESULT FOR UPLINK MODE.....	3
15.4.2 TEST RESULT FOR DOWNLINK MODE.....	3
15.5 TEST DATA FOR PCS BAND	3
15.5.1 TEST RESULT FOR UPLINK MODE.....	3
15.5.2 TEST RESULT FOR DOWNLINK MODE.....	3
16. MAXIMUM PERMISSIBLE EXPOSURE.....	3
16.1 RF EXPOSURE CALCULATION	3
16.2 CALCULATED MPE SAFE DISTANCE.....	3

1. VERIFICATION OF COMPLIANCE

APPLICANT : Inkel Corp.
ADDRESS : 177 Cheongcheon-dong, Bupyeong-gu, Incheon Korea
CONTACT PERSON : Mr. Ohvom, Kwon / Senior Research Engineer
TELEPHONE NO : +82-2-818-8614
FCC ID : P87JR10
MODEL NAME : JR-10
SERIAL NUMBER : N/A
DATE : July 24, 2008

EQUIPMENT CLASS	PCB - PCS Licensed Transmitter
EQUIPMENT DESCRIPTION	RF Repeater
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.4: 2003, EIA/TAI 603B
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	PART 22 Subpart H and Part 24 Subpart E
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER(S) OPEN AREA TEST SITE

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
2.1046, 24.232	RF Power Output at Antenna Terminals	Met the Limit / PASS
2.1047, 22.915	Modulation Characteristics	Met the requirement / PASS
2.1049, 24.238	Occupied Bandwidth, Bandwidth Limitation	Met the Limit / PASS
2.1049, 22.917	Band Edge	Met the Limit / PASS
2.1051, 22.917, 24.238 (a)	Spurious Emissions at Antenna Terminals	Met the Limit / PASS
2.1053, 22.917, 24.238 (a)	Field strength of Spurious Radiation	Met the Limit / PASS
2.1055(a)(1), 24.235	Frequency Stability with Temperature variation	Met the requirement / PASS
2.1055(d), 22.355, 24.235	Frequency stability with primary voltage variation	Met the requirement / PASS
2.1093	RF Exposure	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original Grant

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 2.1.

2.5 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The Electromagnetic compatibility measurement facilities are located on at 307-51 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-862, Korea. Description details of test facilities were submitted to the Federal Communications Commission on August 30, 2005 (Registration Number: 92819 and 340658), accredited by KOLAS (Korea Laboratory Accreditation Scheme, No: 85) and approved by TUV, DNV and MIC (Ministry of Information and Communications in Korea) according to the requirement of ISO17025.

3. GENERAL INFORMATION

3.1 Product Description

The Inkel Corp., Model JR-10 (referred to as the EUT in this report) is a RF Repeater that consists of Link antenna, Coverage antenna and CU (Coverage Unit) Repeater. The role of the Link Antenna is to communicate with the BTS. It is usually located outside the building where service is to be improved and the Antenna can be mounted onto a wall or a pole, depending on the specific installation needs. The role of the CU (Coverage Unit) Repeater is to communicate with the mobiles within the building where needs improved coverage. It is intended for wall mounting. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE		RF Repeater
OPERATING FREQUENCY	CELLULAR	Uplink: (824~869) MHz, Downlink: (869~894) MHz
	PCS	Uplink: (1 850~1 910) MHz, Downlink: (1 930~1 990) MHz
RATED CONDUCTED RF OUTPUT POWER	CELLULAR	Uplink: 15 dBm (0.03 W), Downlink: 2 dBm (0.001 6 W)
	PCS	Uplink: 15 dBm(0.03 W), Downlink: 4 dBm (0.002 5 W)
TYPE OF MODULATION		F9W
EMISSION DESIGNATOR		1M34F9W
DC VOLTAGE & CURRENT INTO FINAL AMPLIFIER	CELLULAR	Uplink: 3.3 V, 210 mA, Downlink: 4.96 V, 70 mA
	PCS	Uplink: 3.3 V, 210 mA, Downlink: 4.96 V, 70 mA
USED LINK ANTENNA	TYPE	Model No: HSP-800/1900-10S, MFR: Satena
	GAIN	10 dBi
USED COVERAGE ANTENNA	TYPE	Model No: TB-800/1900-T, MFR: Satena
	GAIN	1 dBi
ANTENNA CONNECTOR		SMA Type
NUMBER OF LAYER		6 Layers
POWER REQUIREMENT		DC 12 V, 3.5 A from an AC/DC Adapter
EXTERNAL CONNECTOR		SMA,, TNC Connector, DC Input, Younho Connector

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Inkel Corp.	7020-21568-001-0S	N/A
Antenna Board	Inkel Corp.	N/A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	FCC ID	Description	Connected to
JR-10	Inkel Corp.	P87JR10	RF Repeater (EUT)	-
DSA-0421S-12UL	BT Telecom	N/A	AC/DC Adapter	EUT
HSP-800/1900-10S	Satena	N/A	LINK Antenna	EUT
TB-800/1900-T	Satena	N/A	Coverage Antenna	EUT

5.3 Mode of operation during the test

The EUT was received signal form signal generator and then each mode, IS-95 CDMA, CDMA2000 and 1xEVDO was configured for producing maximum signal gain and bandwidth. The EUT was operated in a manner representative of the typical usage of the equipment. During all testing, system components were manipulated within the confines of typical usage to maximize each emission. Also The EUT has dip switches for frequency band and power selecting, but the software used to control the EUT for frequency band and maximum RF output power.

5.4 Modulation Characteristics

The EUT uses CDMA modulation, so the voice is digitized and coded into a bit stream. Also the EUT does not produce a modulated signal, so the test dose not performed and met the requirement.

6. RF POWER OUTPUT at ANTENNA TERMINAL


6.1 Operating environment

Temperature : 24 °C
Relative humidity : 48.2 %R.H.

6.2 Test set-up

The RF output port of the EUT was connected to the input of the spectrum analyzer. The software for RF control on the notebook PC was set to transmit maximum signal gain and bandwidth. The test was performed at three frequencies (low, middle, and high channels) using all modulation.

RF output power was measured by channel power measurement function of the spectrum analyzer.

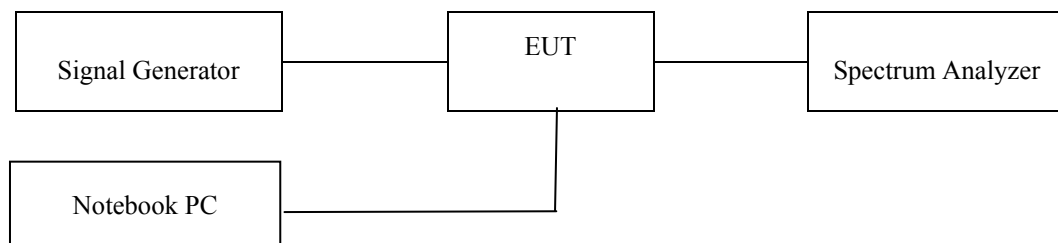

6.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
□ -	437B	HP	Power Meter	3125U25121	June 16, 2008
□ -	8481A	HP	Power Sensor	1550A14928	Dec. 07, 2007
■ -	E4432B	HP	Signal Generator	US38440950	June 16, 2008
■ -	SMJ 100A	R/S	Vecter Signal Generator	101037	June 19, 2007
■ -	FSP	R/S	Spectrum Analyzer	100017	Mar. 11, 2008

All test equipment used is calibrated on a regular basis.


6.4 Test data

-. Test Date : June 18, 2008

-. Test Result : PASS

6.4.1 Test result for Cellular Band

Configuration	Modulation	Channel	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)	Output Power (W)	Limit (W)
Uplink	IS-95 CDMA	Low	826.11	-42.50	15.00	0.031 6	500.00
		Middle	836.52	-42.67	15.00		
		High	848.31	-42.33	15.00		
	CDMA2000	Low	826.11	-42.33	15.00		
		Middle	836.52	-42.50	15.00		
		High	848.31	-42.17	15.00		
	1xEVDO	Low	826.11	-42.67	15.00		
		Middle	836.52	-42.50	15.00		
		High	848.31	-42.45	15.00		
Downlink	IS-95 CDMA	Low	871.11	-57.80	2.00	0.001 6	500.00
		Middle	881.52	-58.50	2.00		
		High	893.31	-58.40	2.00		
	CDMA2000	Low	871.11	-57.67	2.00		
		Middle	881.52	-58.33	2.00		
		High	893.31	-58.50	2.00		
	1xEVDO	Low	871.11	-57.83	2.00		
		Middle	881.52	-58.42	2.00		
		High	893.31	-58.35	2.00		



Tested by: Ki-Hong, Nam / Project Engineer

6.4.2 Test result for PCS Band

Configuration	Modulation	Channel	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)	Output Power (W)	Limit (W)
Uplink	IS-95	Low	1851.25	-51.67	15.00	0.031 6	100.00
		Middle	1877.50	-51.33	15.00		
		High	1908.75	-51.44	15.00		
	CDMA	Low	1851.25	-51.42	15.00		
		Middle	1877.50	-51.67	15.00		
		High	1908.75	-51.50	15.00		
	EVDO	Low	1851.25	-51.67	15.00		
		Middle	1877.50	-51.33	15.00		
		High	1908.75	-51.48	15.00		
Downlink	IS-95	Low	1931.25	-65.83	4.00	0.002 5	100.00
		Middle	1957.50	-65.67	4.00		
		High	1988.75	-65.90	4.00		
	CDMA	Low	1931.25	-65.90	4.00		
		Middle	1957.50	-65.75	4.00		
		High	1988.75	-65.85	4.00		
	EVDO	Low	1931.25	-65.72	4.00		
		Middle	1957.50	-65.80	4.00		
		High	1988.75	-65.93	4.00		

기홍

Tested by: Ki-Hong, Nam / Project Engineer

7. OCCUPIED BANDWIDTH


7.1 Operating environment

Temperature : 24 °C
Relative humidity : 48.2 %R.H.

7.2 Test set-up

The RF output port of the EUT was connected to the input of the spectrum analyzer. The software for RF control on the notebook PC was set to transmit maximum signal gain and bandwidth. The test was performed at three frequencies (low, middle, and high channels).

For the testing, the RBW was set to 1 % to 3 % of the -26 dB bandwidth. The VBW is set to 3 times the RBW and sweep time is coupled.

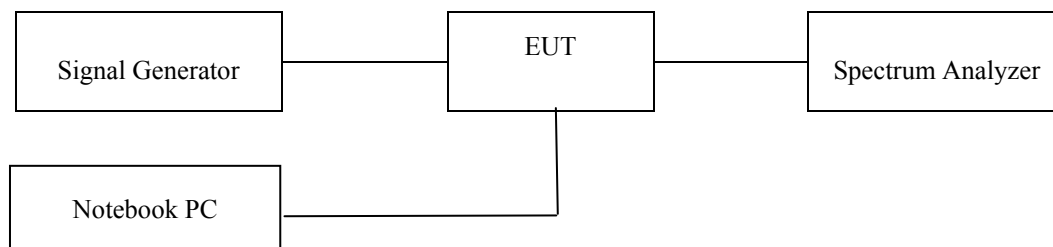

7.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	8564E	HP	Spectrum Analyzer	3650A00756	June 16, 2008
■ -	E4432B	HP	Signal Generator	US38440950	June 16, 2008
■ -	SMJ 100A	R/S	Vector Signal Generator	101037	June 19, 2007
□ -	FSP	R/S	Spectrum Analyzer	100017	Mar. 15, 2008

All test equipment used is calibrated on a regular basis.


7.4 Test data

- Test Date : June 18, 2008
- Test Result : PASS


7.4.1 Test result for Cellular Band

Configuration	Modulation	Channel	26dB Bandwidth (kHz)
Uplink	IS-95	Low	1583
		Middle	1583
		High	1575
	CDMA	Low	1575
		Middle	1583
		High	1575
	EVDO	Low	1575
		Middle	1583
		High	1583
Downlink	IS-95	Low	1583
		Middle	1575
		High	1575
	CDMA	Low	1583
		Middle	1575
		High	1575
	EVDO	Low	1575
		Middle	1575
		High	1583

Remark: According to above result, the carrier frequency shall be within the frequency block edges.




Tested by: Ki-Hong, Nam / Project Engineer

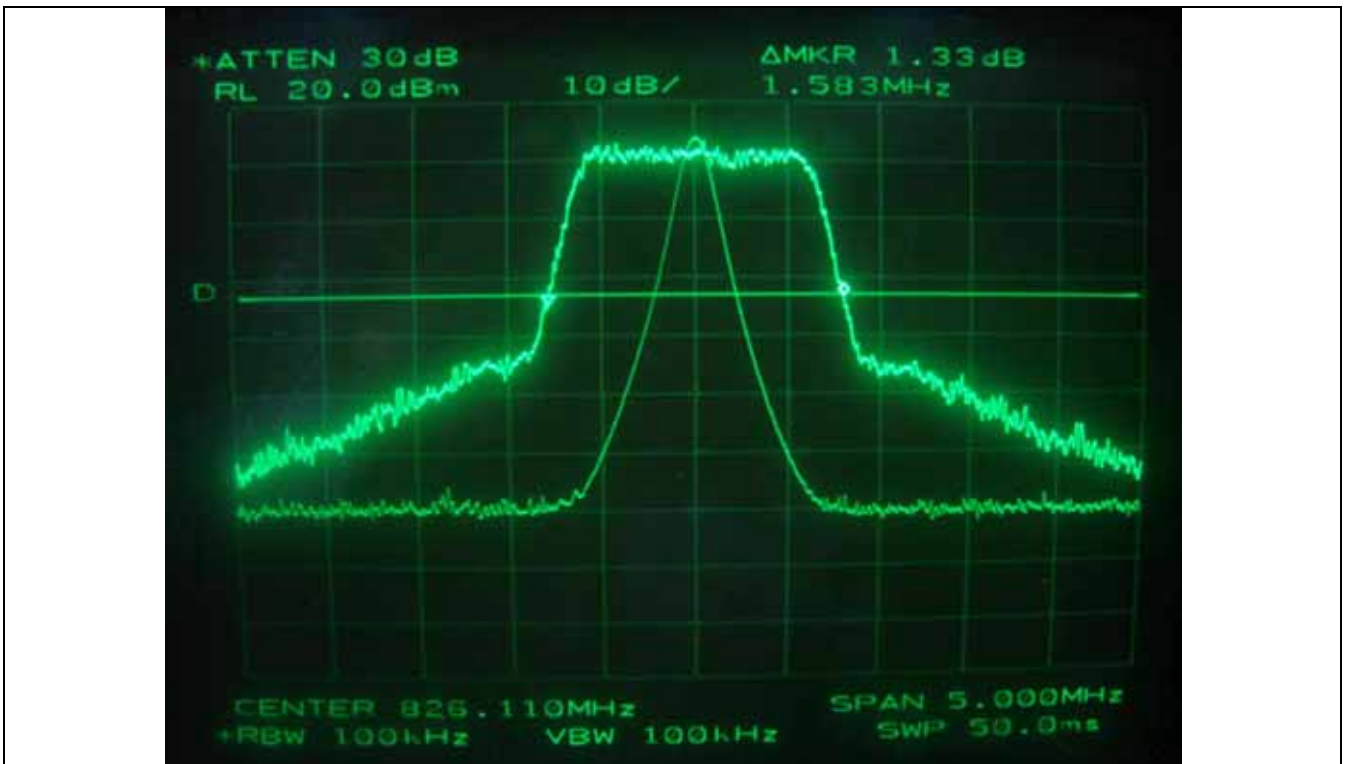

IS-95 CDMA - 26dB Bandwidth




IS-95 CDMA – Input Signal

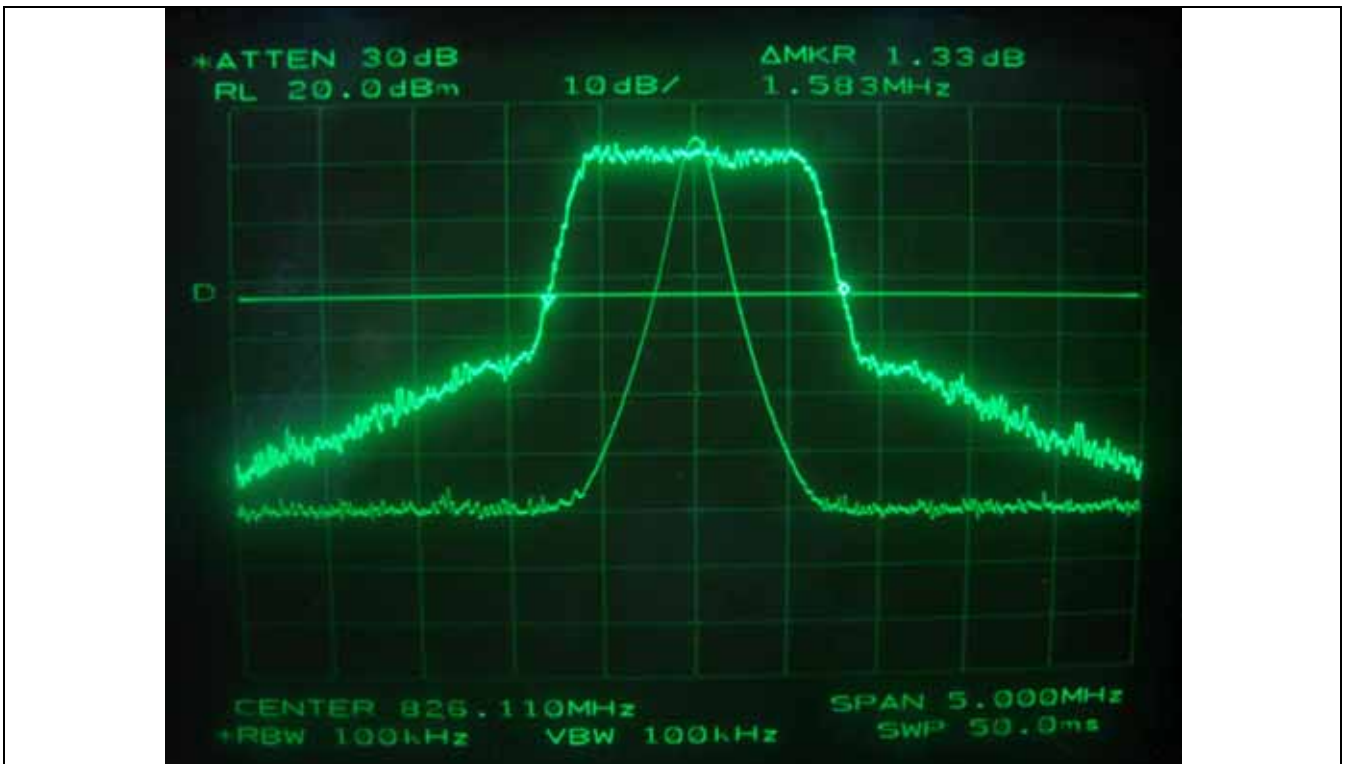

CDMA 2000 - 26dB Bandwidth



CDMA 2000 - Input Signal

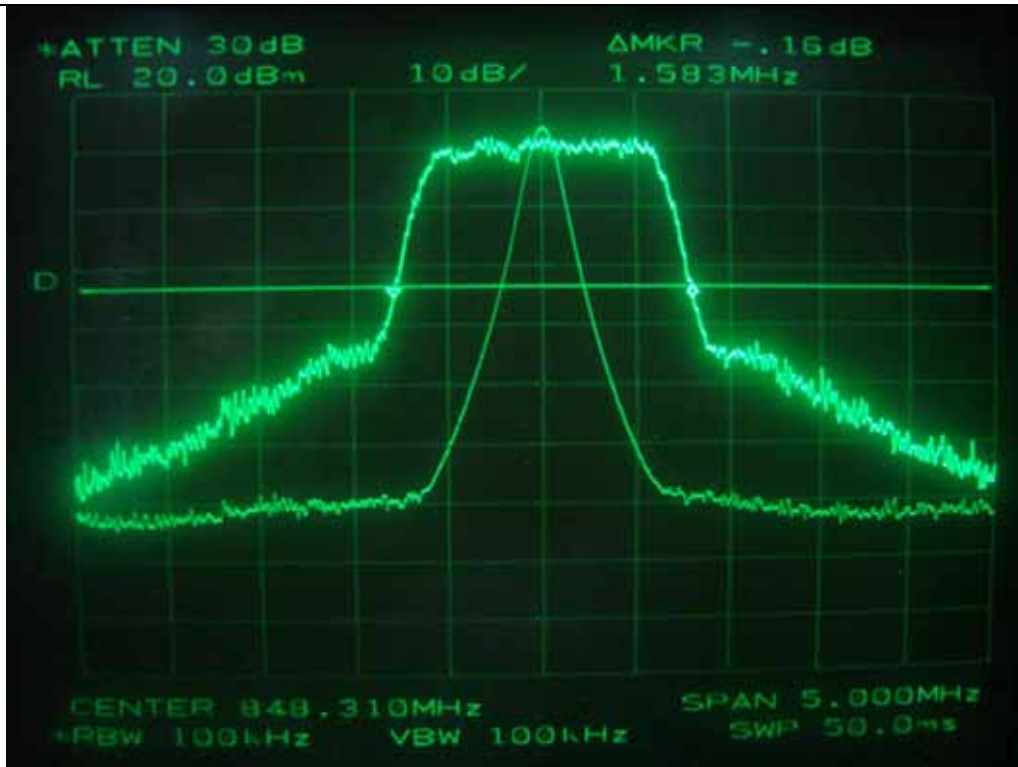

1x EVDO - 26dB Bandwidth




1x EVDO – Input Signal


7.4.2 Test result for PCS Band

Configuration	Modulation	Channel	26dB Bandwidth (kHz)
Uplink	IS-95 CDMA	Low	1583
		Middle	1592
		High	1575
	CDMA 2000	Low	1575
		Middle	1583
		High	1583
	1xEVDO	Low	1583
		Middle	1583
		High	1583
Downlink	IS-95 CDMA	Low	1583
		Middle	1575
		High	1575
	CDMA 2000	Low	1583
		Middle	1583
		High	1583
	1xEVDO	Low	1583
		Middle	1575
		High	1583

Remark: According to above result, the carrier frequency shall be within the frequency block edges.

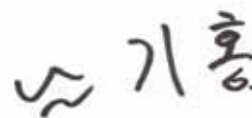


Tested by: Ki-Hong, Nam / Project Engineer

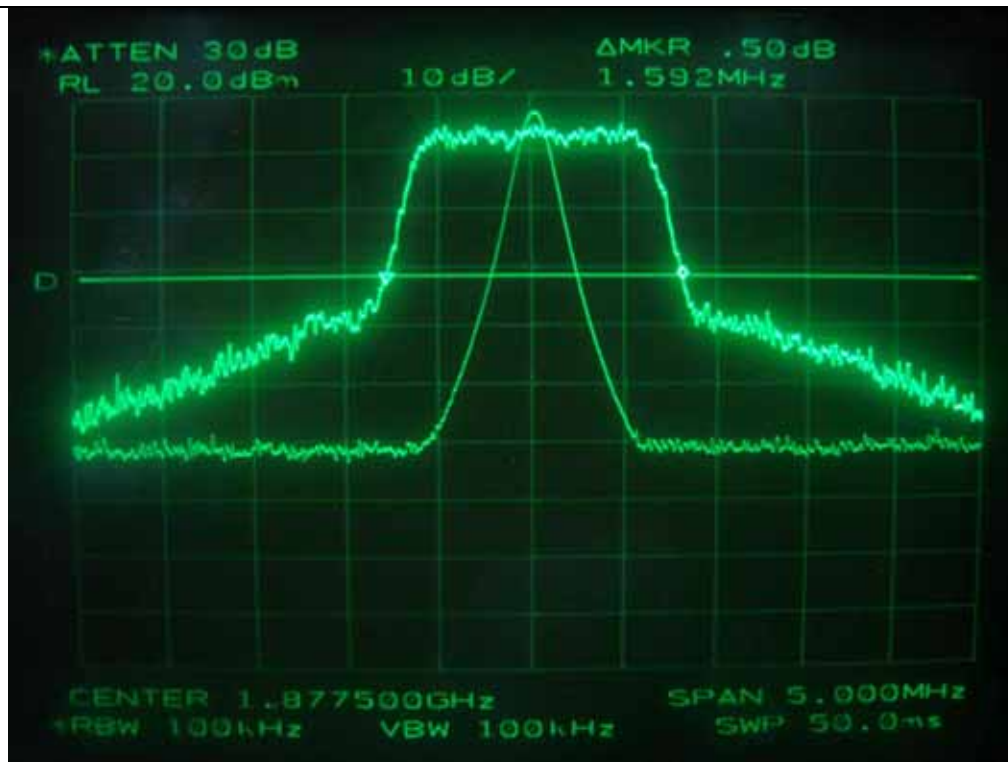

IS-95 CDMA - 26dB Bandwidth




IS-95 CDMA – Input Signal

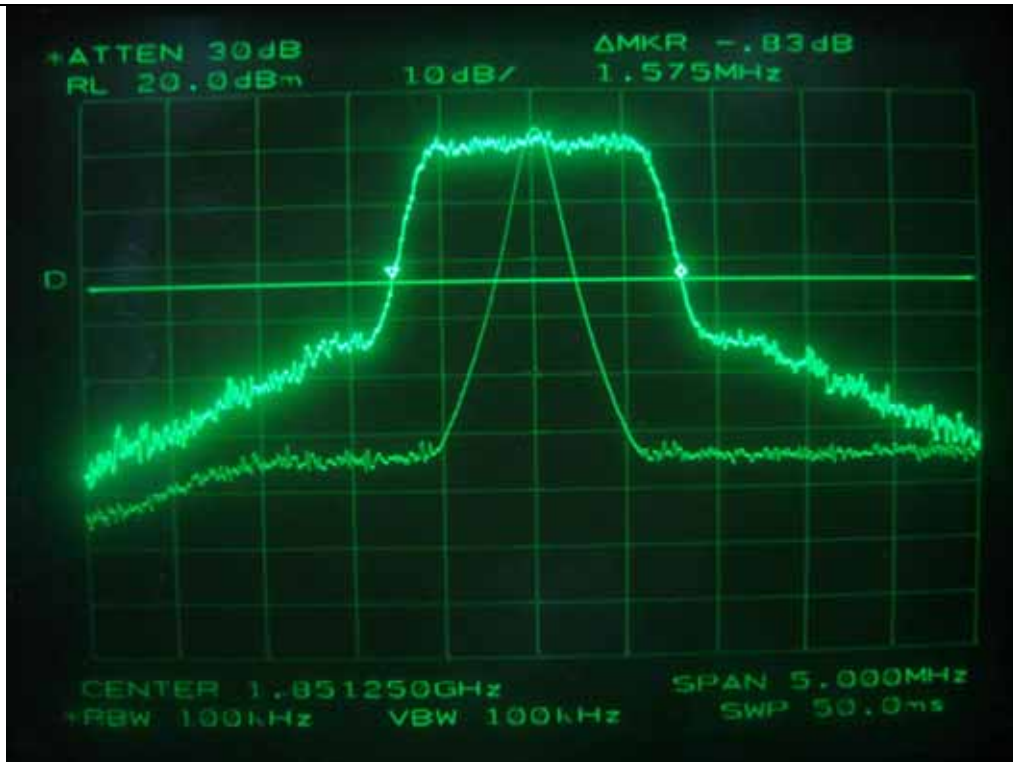

CDMA 2000 - 26dB Bandwidth



CDMA 2000 – Input Signal

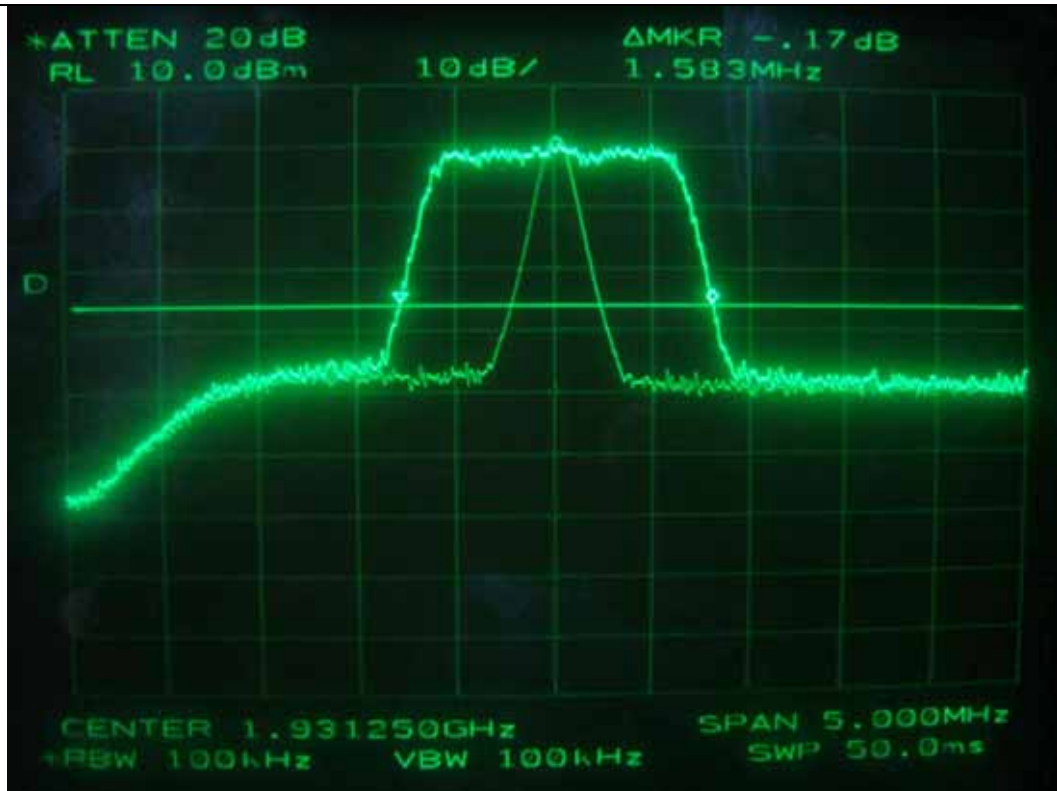

1x EVDO - 26dB Bandwidth



1x EVDO – Input Signal


8. SPURIOUS EMISSION AT ANTENNA TERMINAL

8.1 Operating environment

Temperature : 24 °C
Relative humidity : 48.2 %R.H.

8.2 Test set-up for conducted measurement

The RF output port of the EUT was connected to the input of the spectrum analyzer. The resolution bandwidth and video bandwidth of the spectrum analyzer was set at 1 MHz and sufficient scans were taken to show any out of band emissions up to 20 GHz. The software for RF control on the notebook PC was set to zero

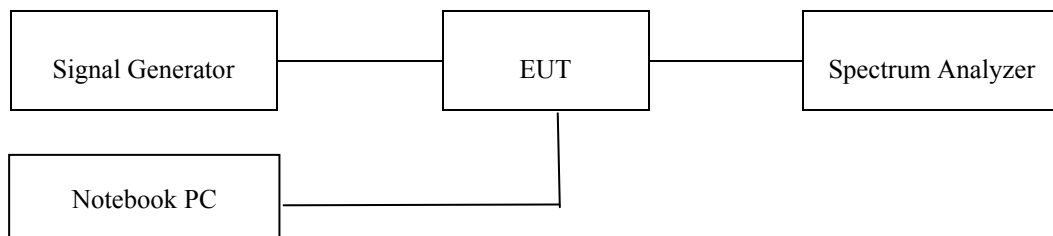

8.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	8564E	HP	Spectrum Analyzer	3650A00756	June 16, 2008
■ -	E4432B	HP	Signal Generator	US38440950	June 16, 2008
■ -	SMU 100A	R/S	Vector Signal Generator	101037	June 19, 2007
□ -	FSP	R/S	Spectrum Analyzer	100017	Mar. 15, 2008

All test equipment used is calibrated on a regular basis.


8.4 Test data

-. Test Date : June 18, 2008
-. Frequency range : 30 MHz ~ 20 GHz
-. Result : PASS


8.4.1 Test result for Cellular Band

Mode	Modulation	Harmonic Frequency (MHz)		Measured Value (dBm)	Cable Loss (dB)	Total (dBm)	Limit (dBm)	Margin (dB)
Uplink	IS-95 CDMA	Low	1890.00	-36.33	0.67	-35.66	-13.0	-22.66
		Middle	1890.00	-35.67	0.67	-35.00		-22.00
		High	1890.00	-35.83	0.67	-35.16		-22.16
	CDMA2000	Low	1890.00	-36.67	0.67	-36.00	-13.0	-23.00
		Middle	1890.00	-36.00	0.67	-35.33		-22.33
		High	1890.00	-36.17	0.67	-35.50		-22.50
	1xEVDO	Low	1890.00	-36.50	0.67	-35.83	-13.0	-22.83
		Middle	1890.00	-36.83	0.67	-36.16		-23.16
		High	1890.00	-36.83	0.67	-36.16		-23.16
Downlink	IS-95 CDMA	Low	1940.00	-32.83	0.84	-31.99	-13.0	-18.99
		Middle	1940.00	-32.67	0.84	-31.83		-18.83
		High	1940.00	-32.17	0.84	-31.33		-18.33
	CDMA2000	Low	1940.00	-33.00	0.84	-32.16	-13.0	-19.16
		Middle	1940.00	-32.50	0.84	-31.66		-18.66
		High	1940.00	-33.33	0.84	-32.49		-19.49
	1xEVDO	Low	1940.00	-33.67	0.84	-32.83	-13.0	-19.83
		Middle	1940.00	-32.33	0.84	-31.49		-18.49
		High	1940.00	-32.00	0.84	-31.16		-18.16

According to the rule, out of band emission shall be attenuated by $43 + 10 \log (P)$ dBc, equates to -13.0dBm.




Tested by: Ki-Hong, Nam / Project Engineer

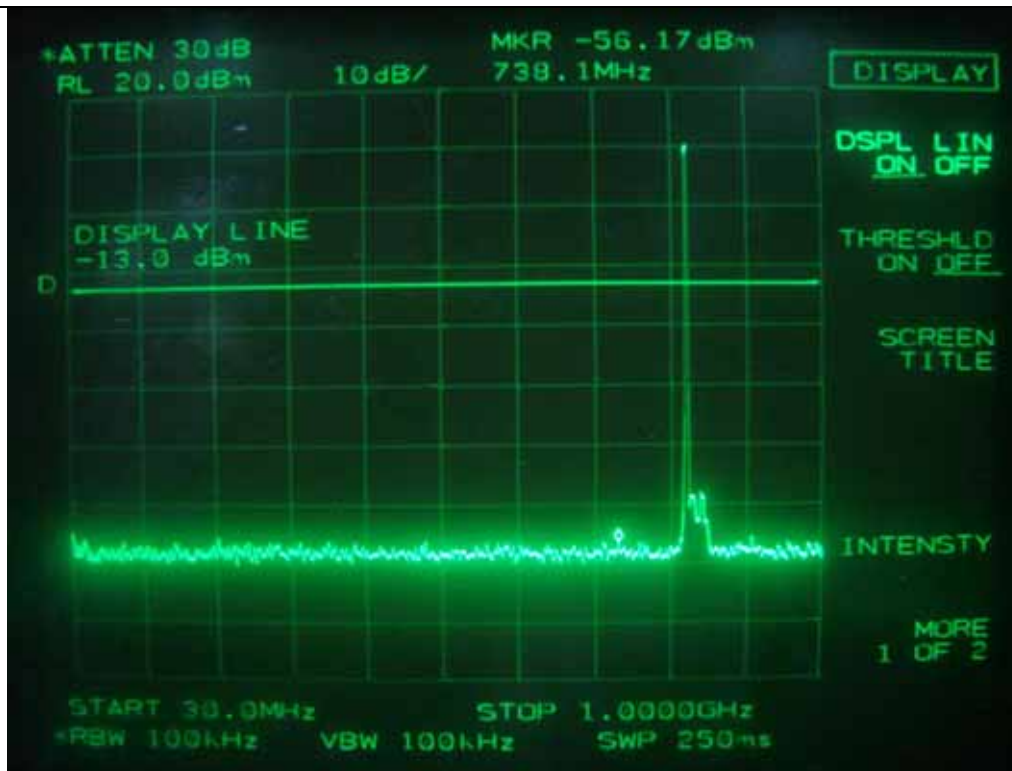


Uplink: IS-95 CDMA - Low Channel



Uplink: IS-95 CDMA - Low Channel

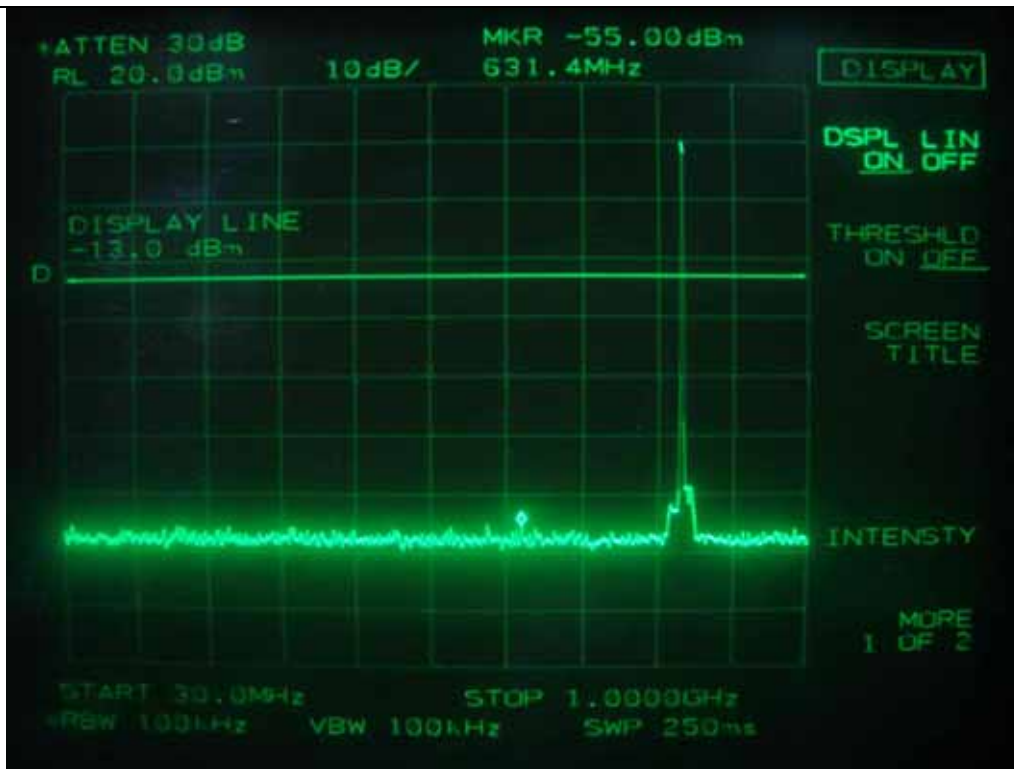


Uplink: IS-95 CDMA - Middle Channel

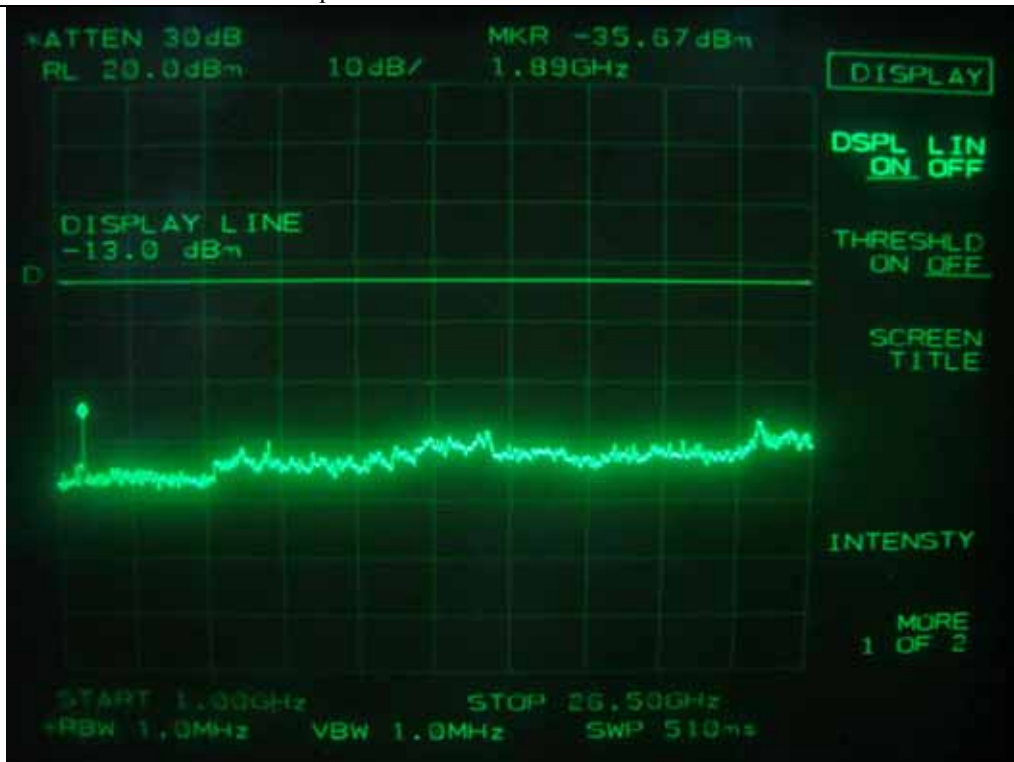

Uplink: IS-95 CDMA - Middle Channel




Uplink: IS-95 CDMA - High Channel

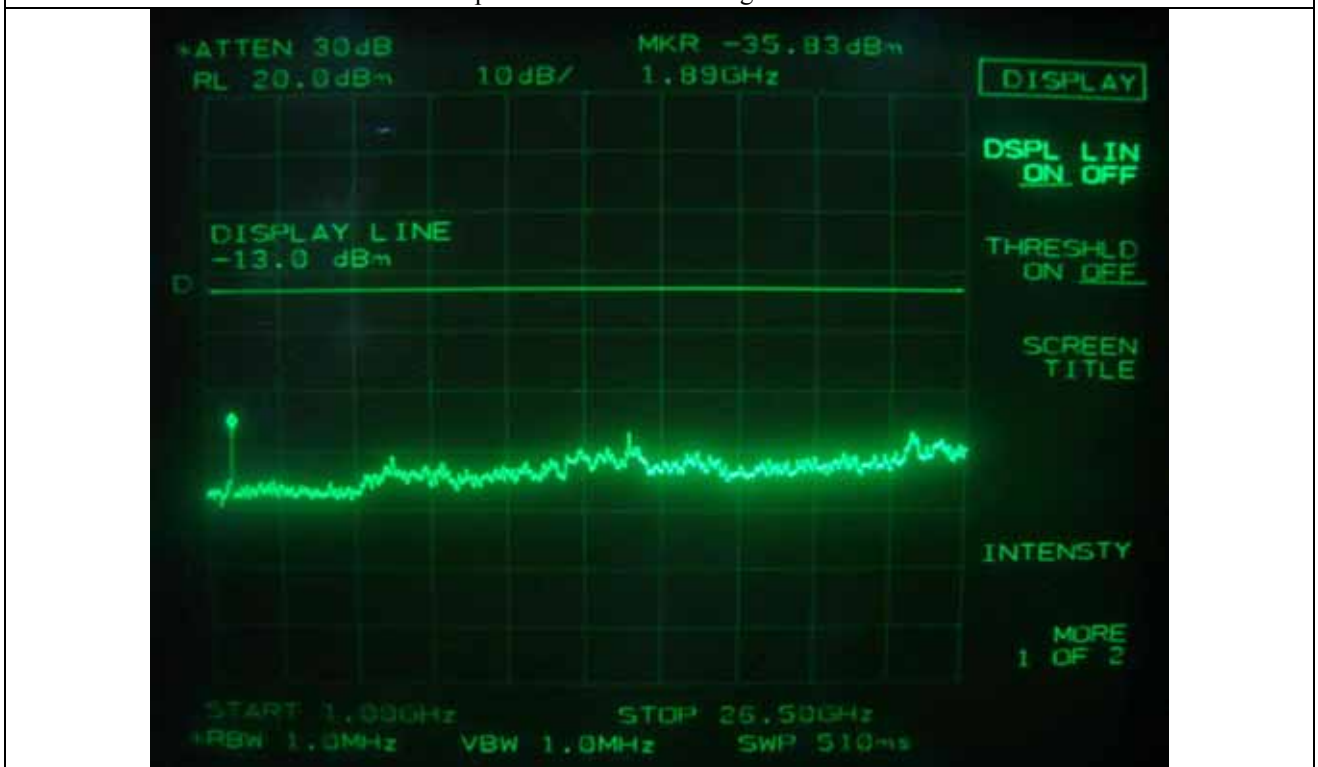

Uplink: IS-95 CDMA - High Channel




Uplink: CDMA 2000- Low Channel

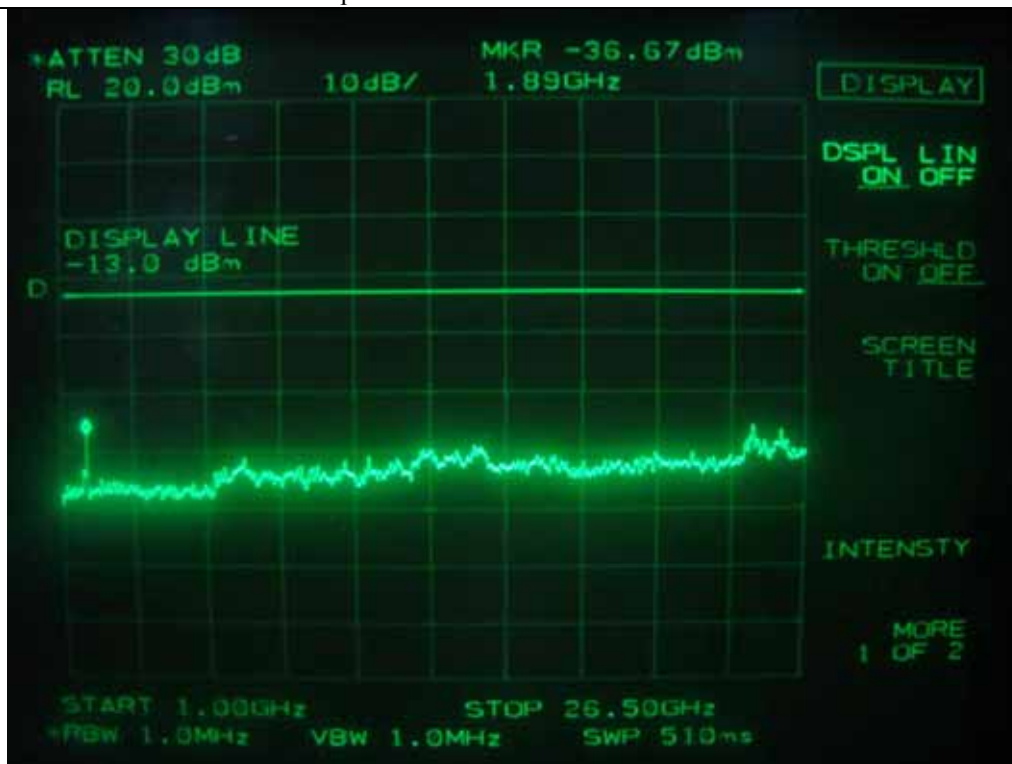


Uplink: CDMA 2000- Low Channel




Uplink: CDMA 2000- Middle Channel

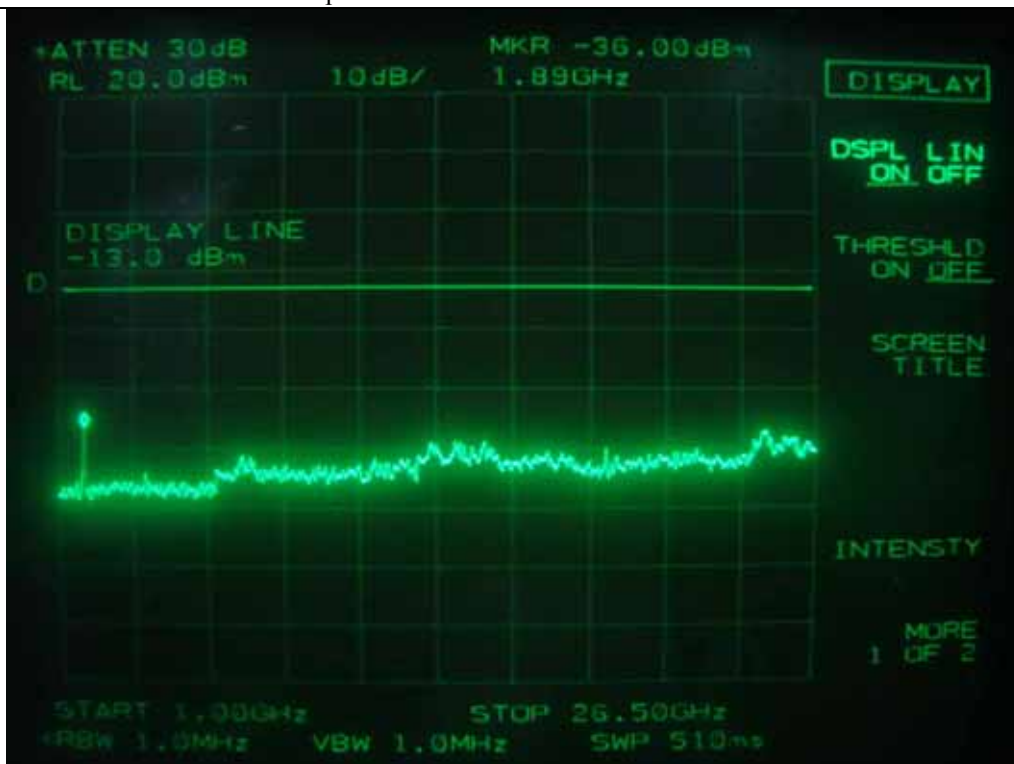


Uplink: CDMA 2000- Middle Channel

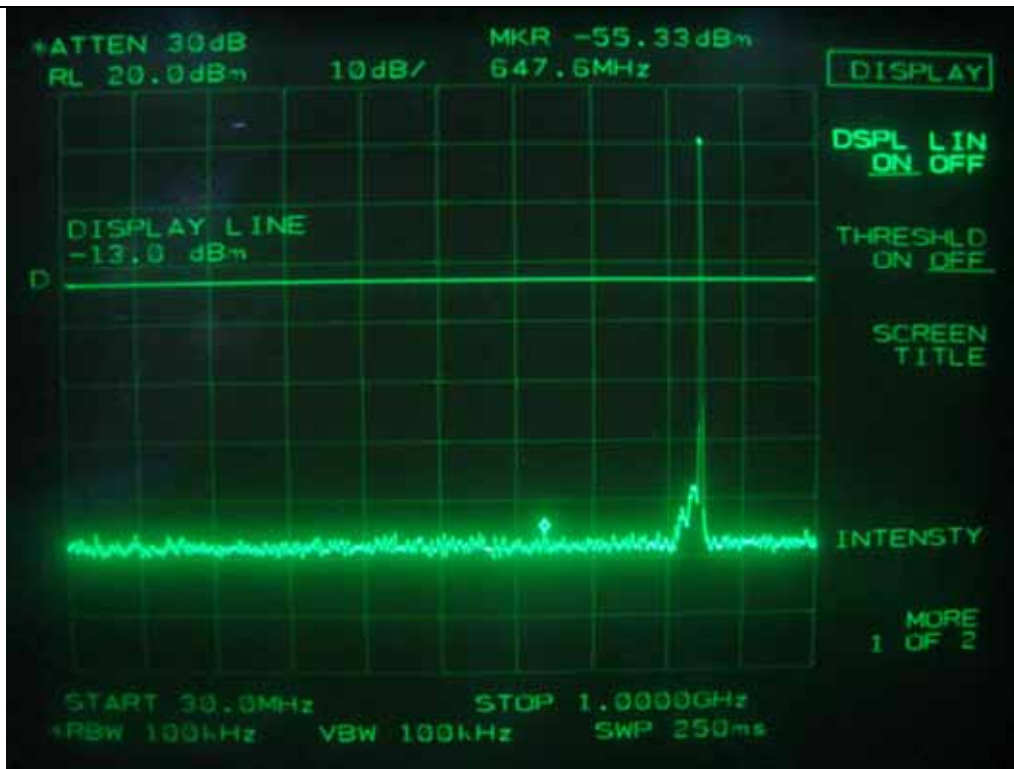


Uplink: CDMA 2000- High Channel

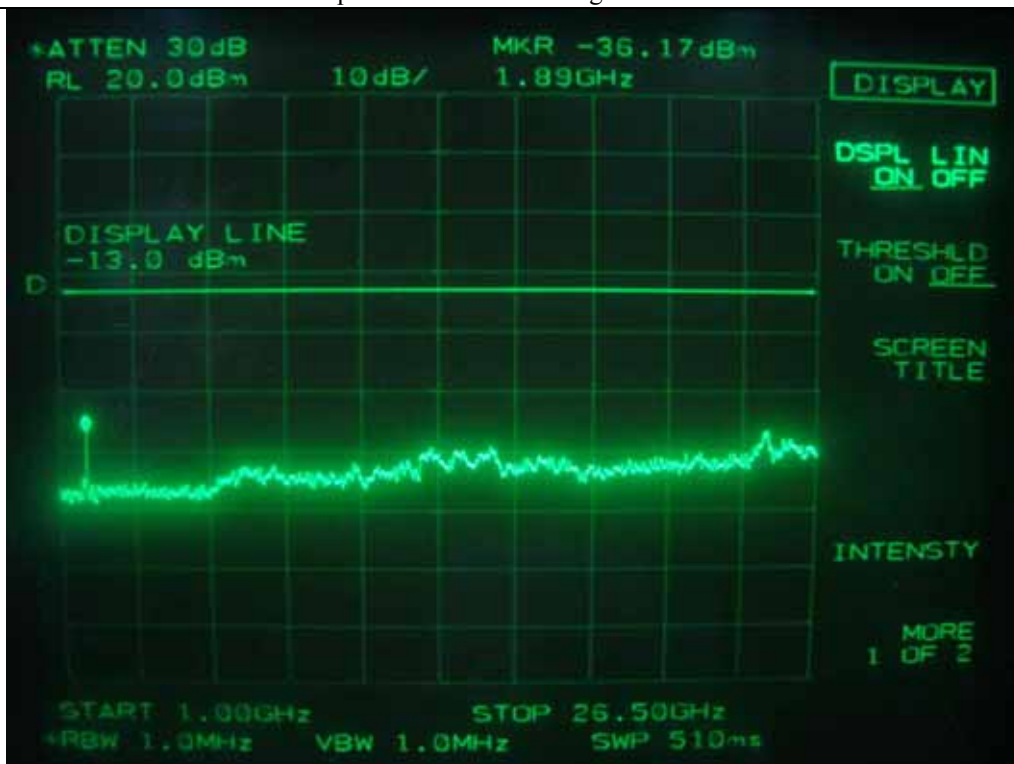

Uplink: CDMA 2000- High Channel

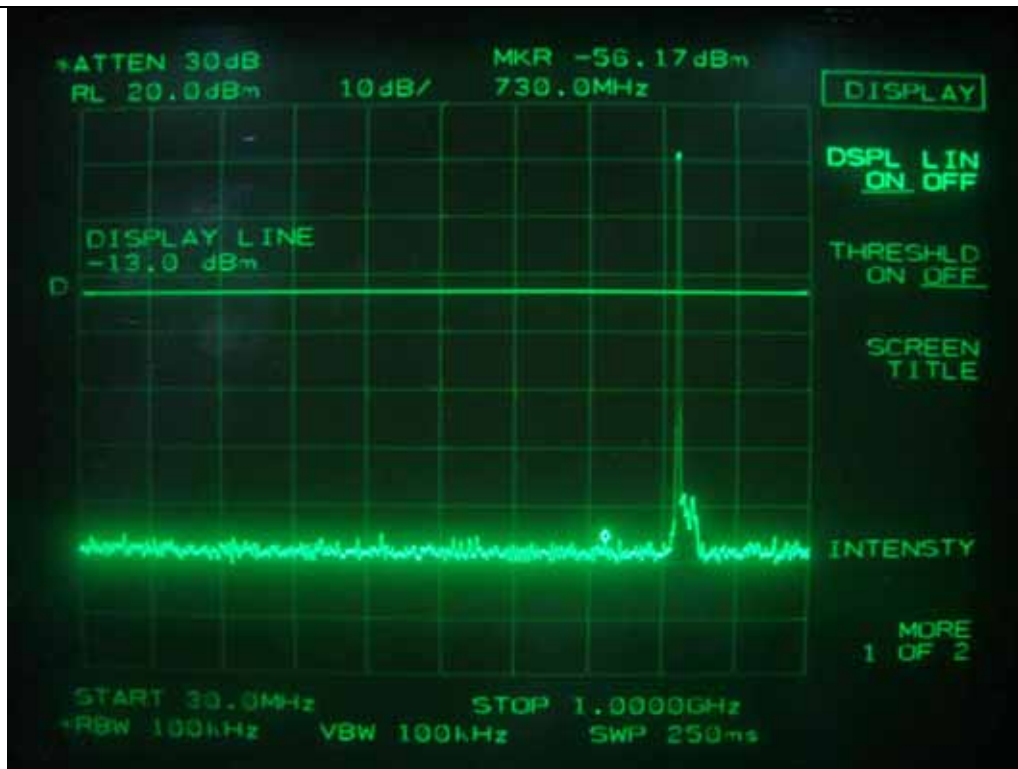


Uplink: 1xEVDO - Low Channel

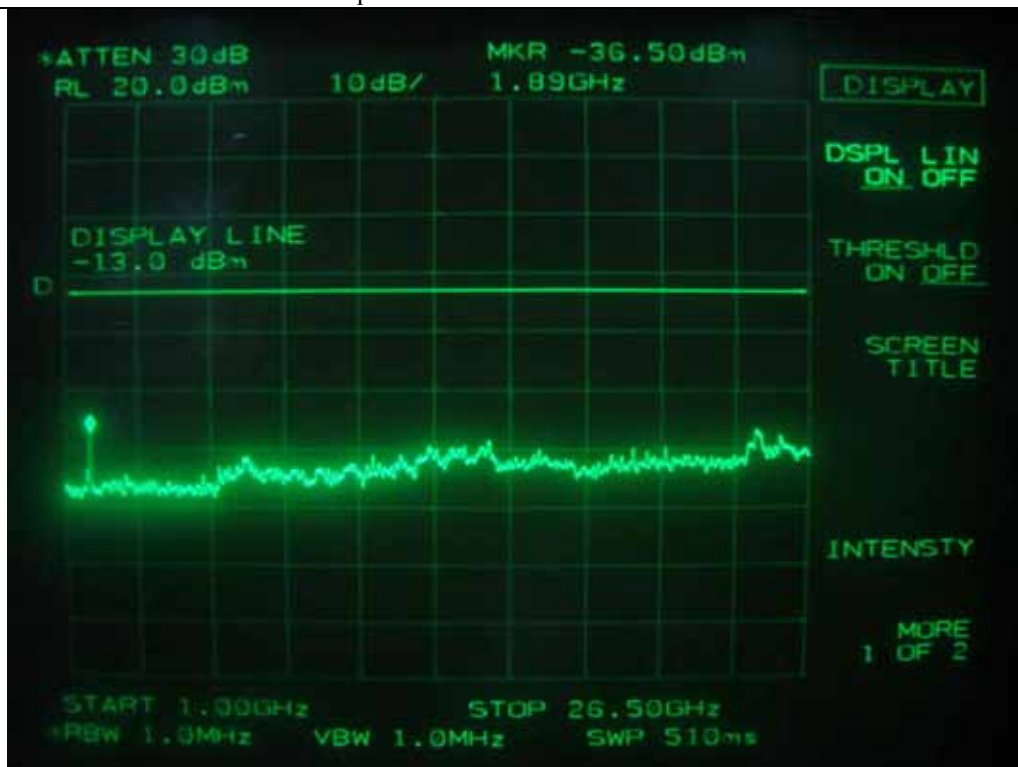


Uplink: 1xEVDO - Low Channel




Uplink: 1xEVDO - Middle Channel

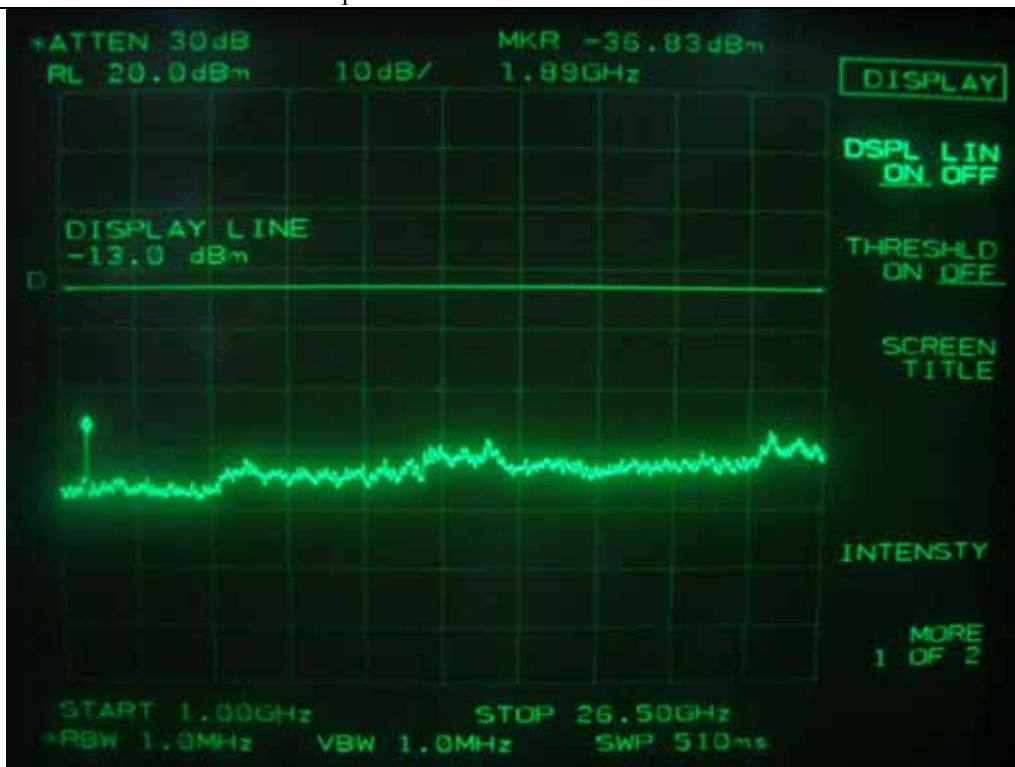


Uplink: 1xEVDO - Middle Channel

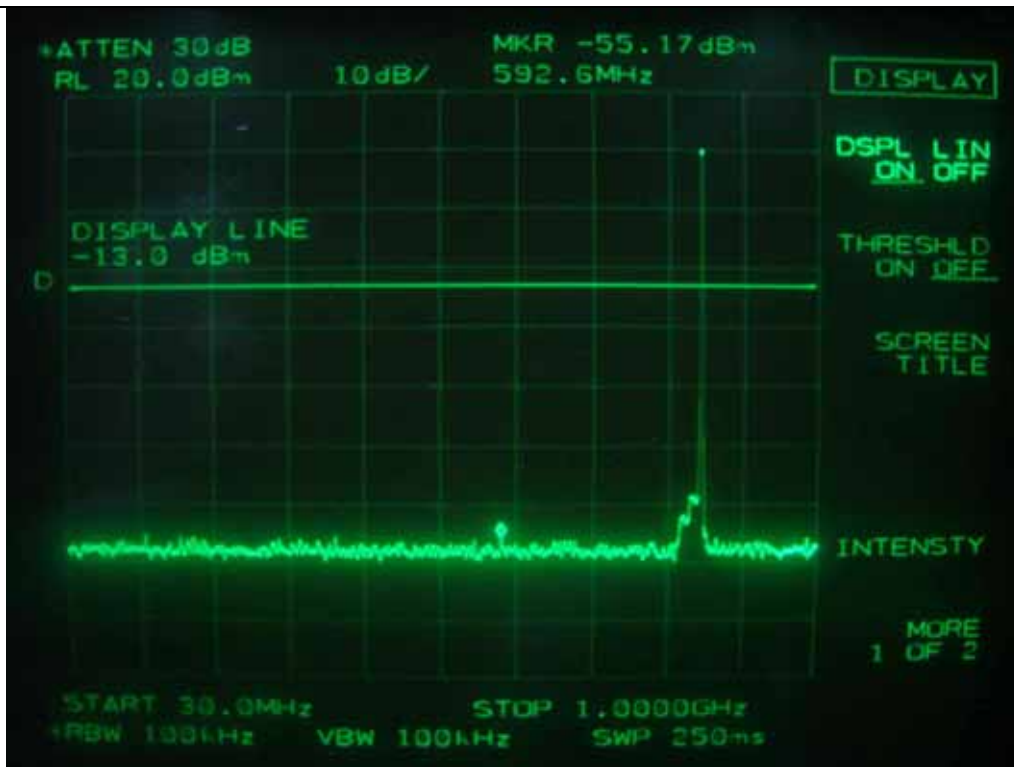


Uplink: 1xEVDO - High Channel

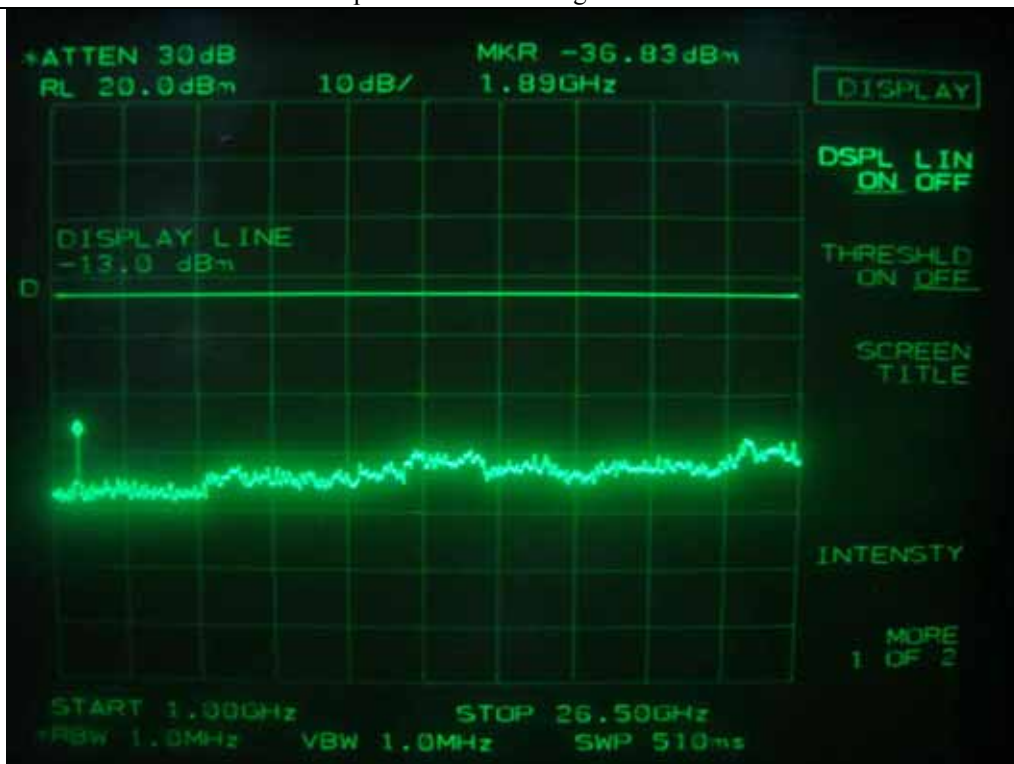


Uplink: 1xEVDO - High Channel

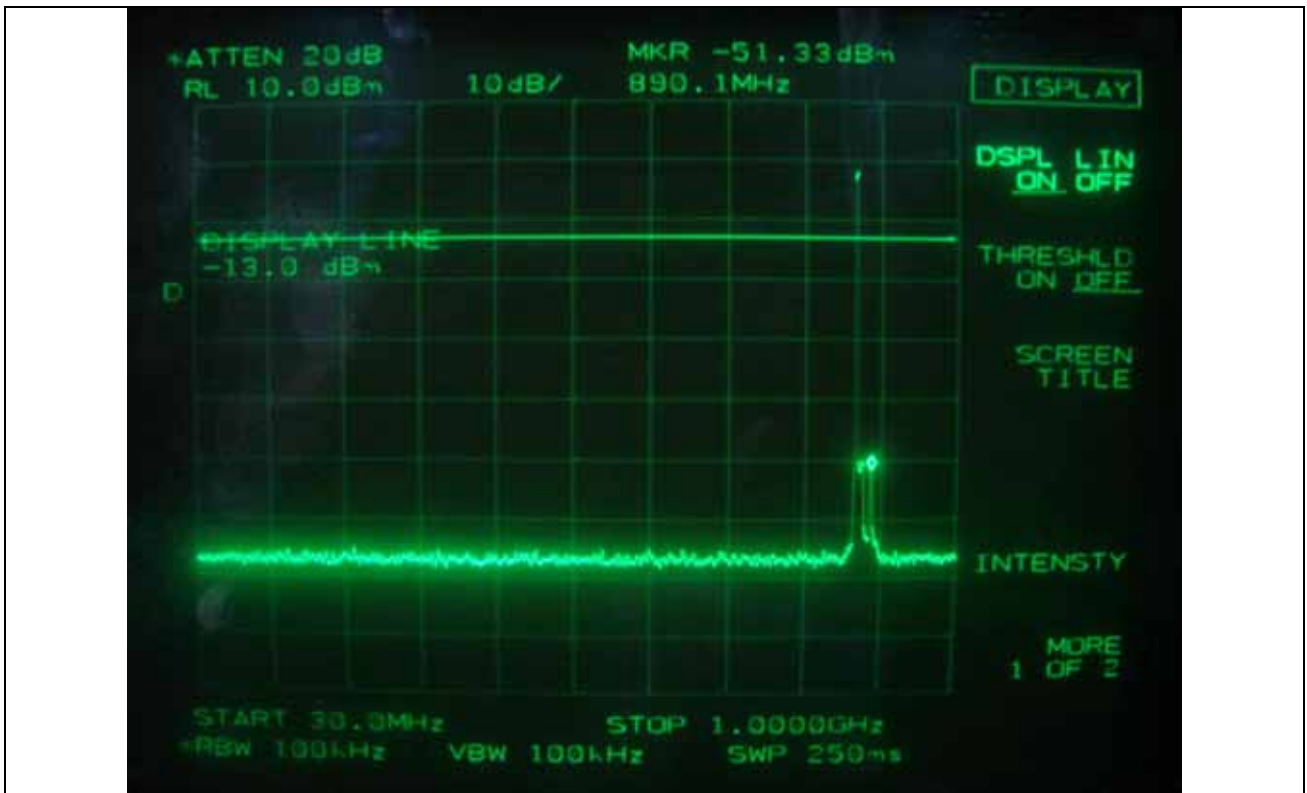


Downlink: IS-95 CDMA - Low Channel

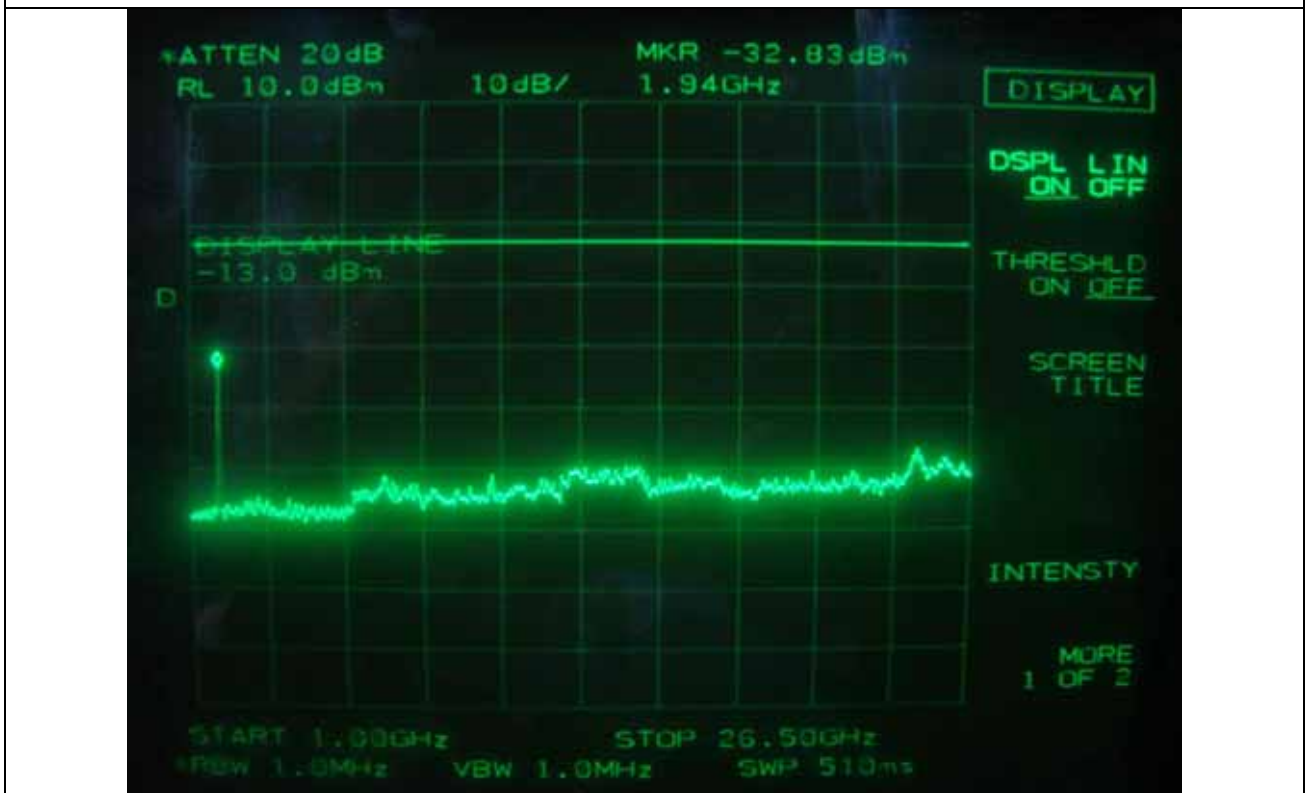


Downlink: IS-95 CDMA - Low Channel

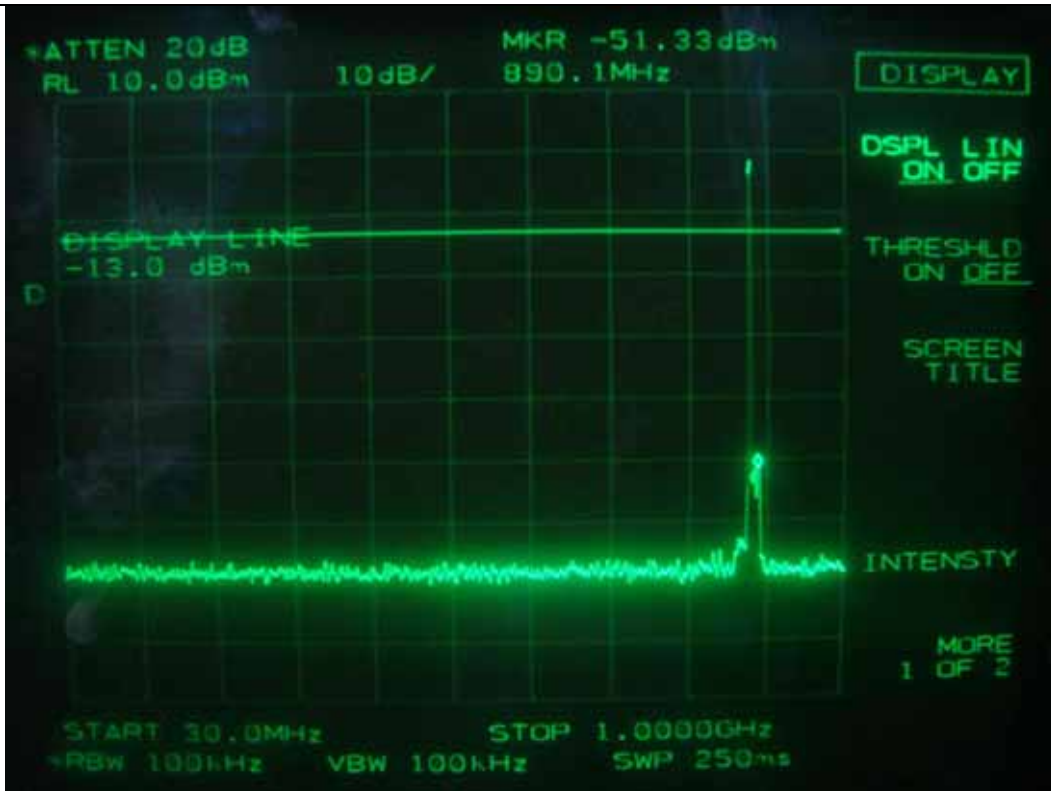


Downlink: IS-95 CDMA - Middle Channel

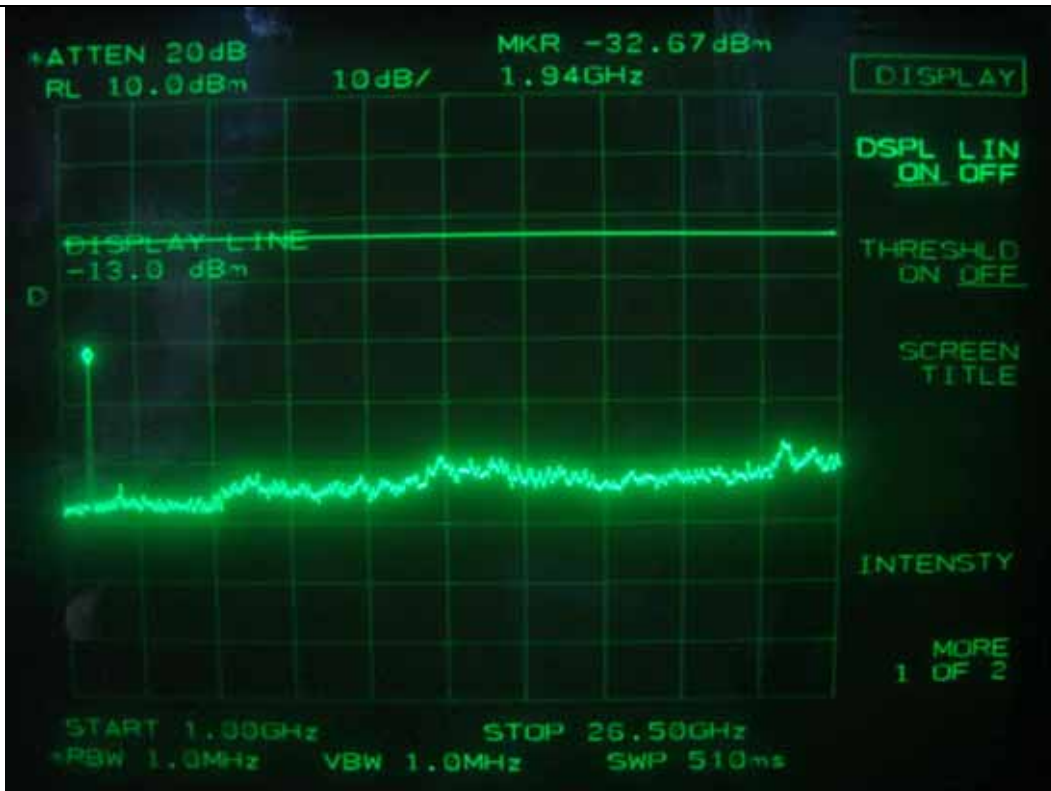


Downlink: IS-95 CDMA - Middle Channel

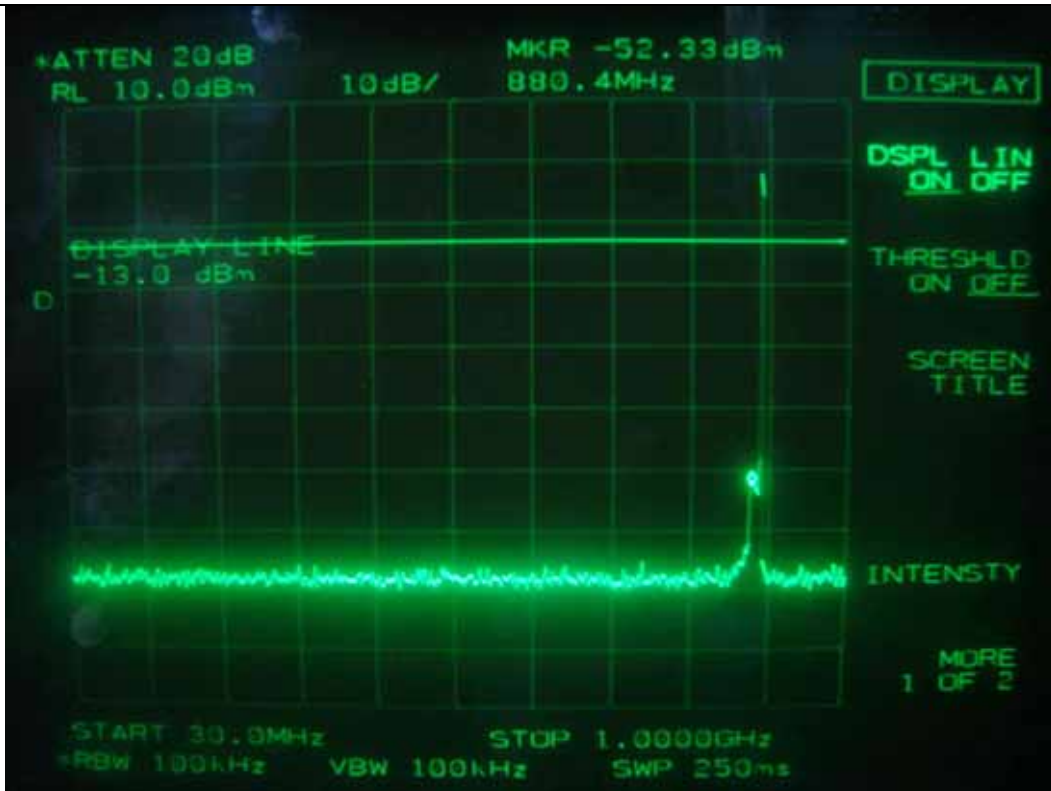


Downlink: IS-95 CDMA - High Channel

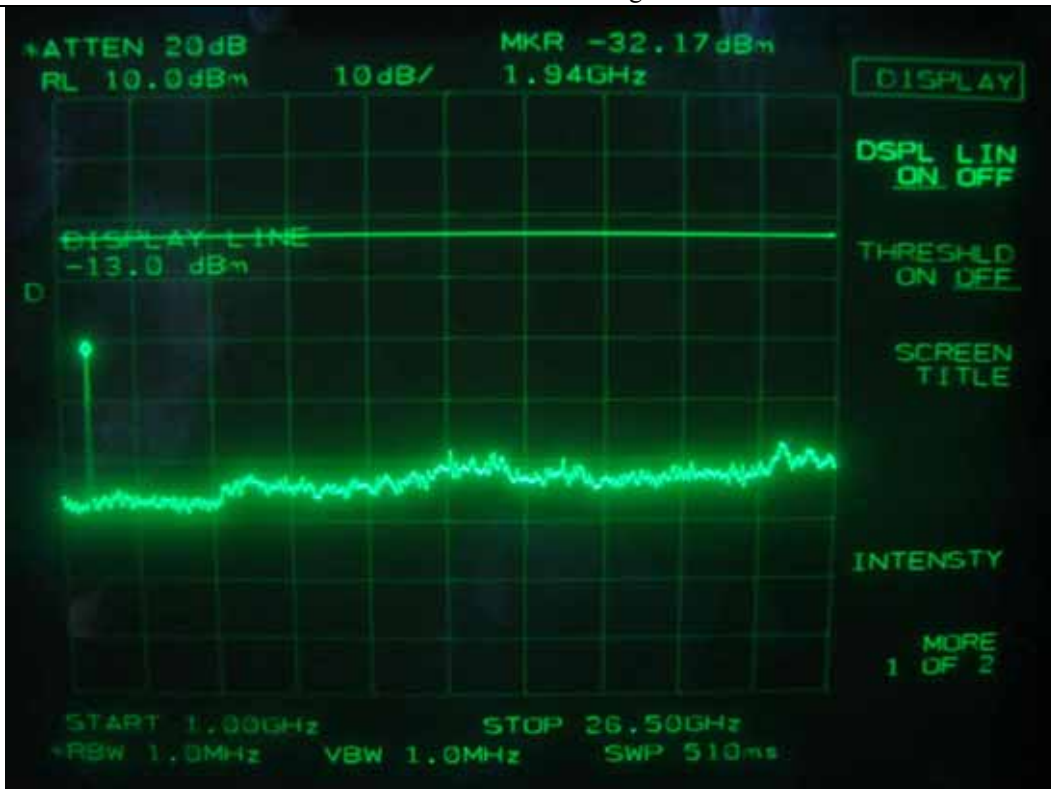


Downlink: IS-95 CDMA - High Channel

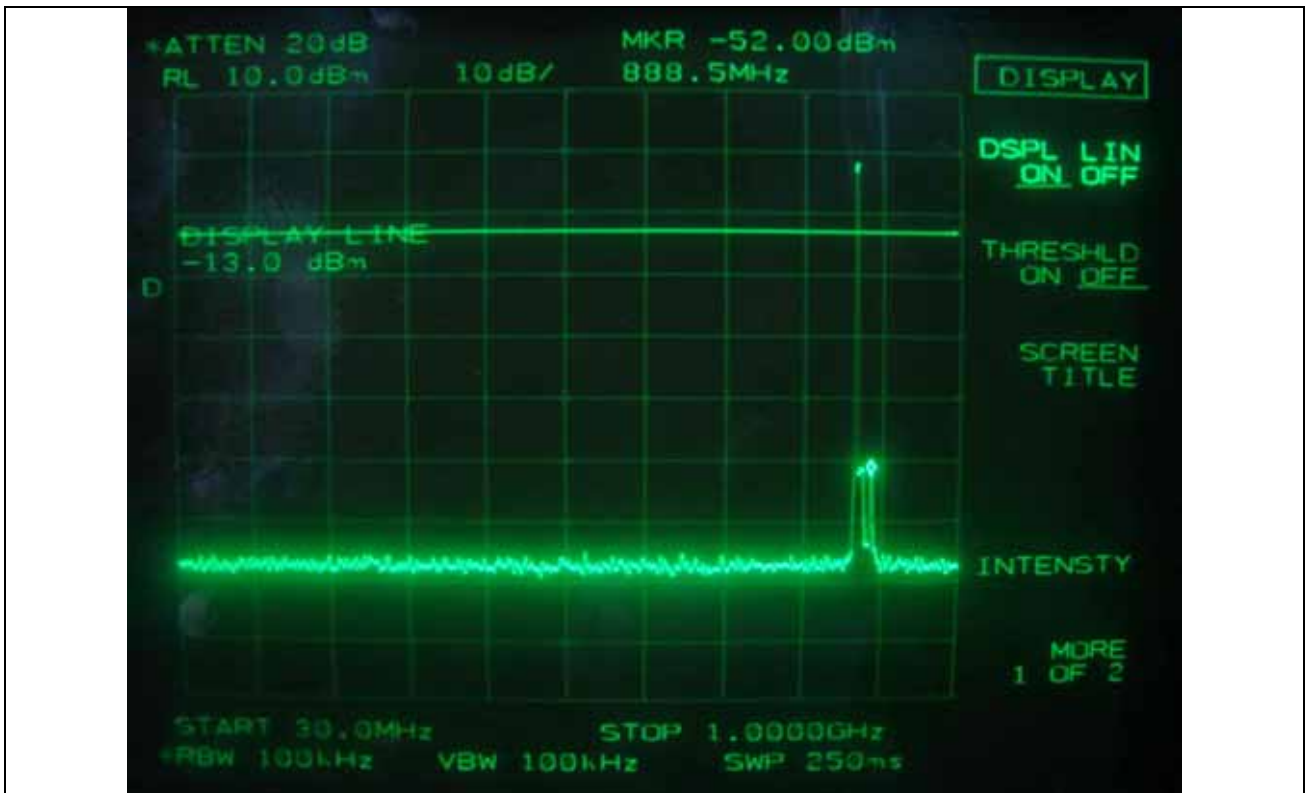


Downlink: CDMA 2000- Low Channel

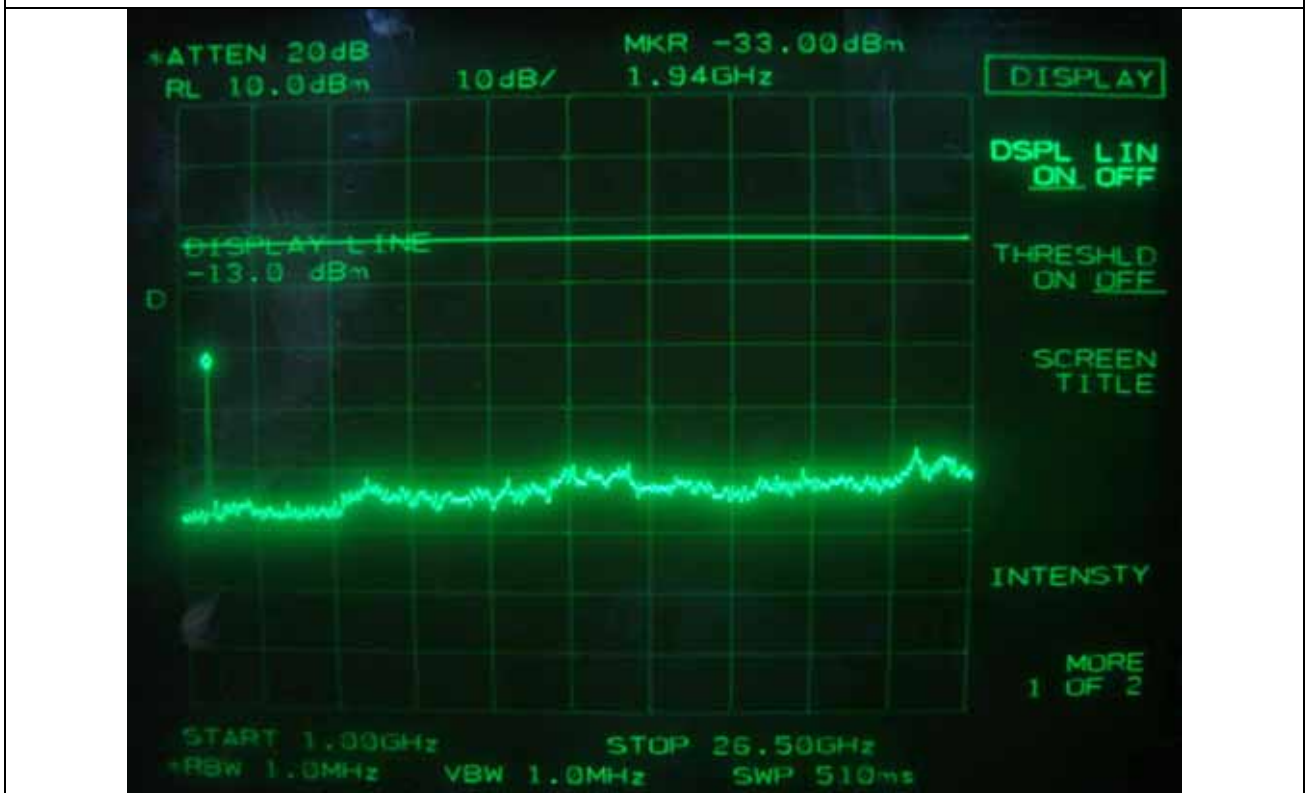


Downlink: CDMA 2000- Low Channel

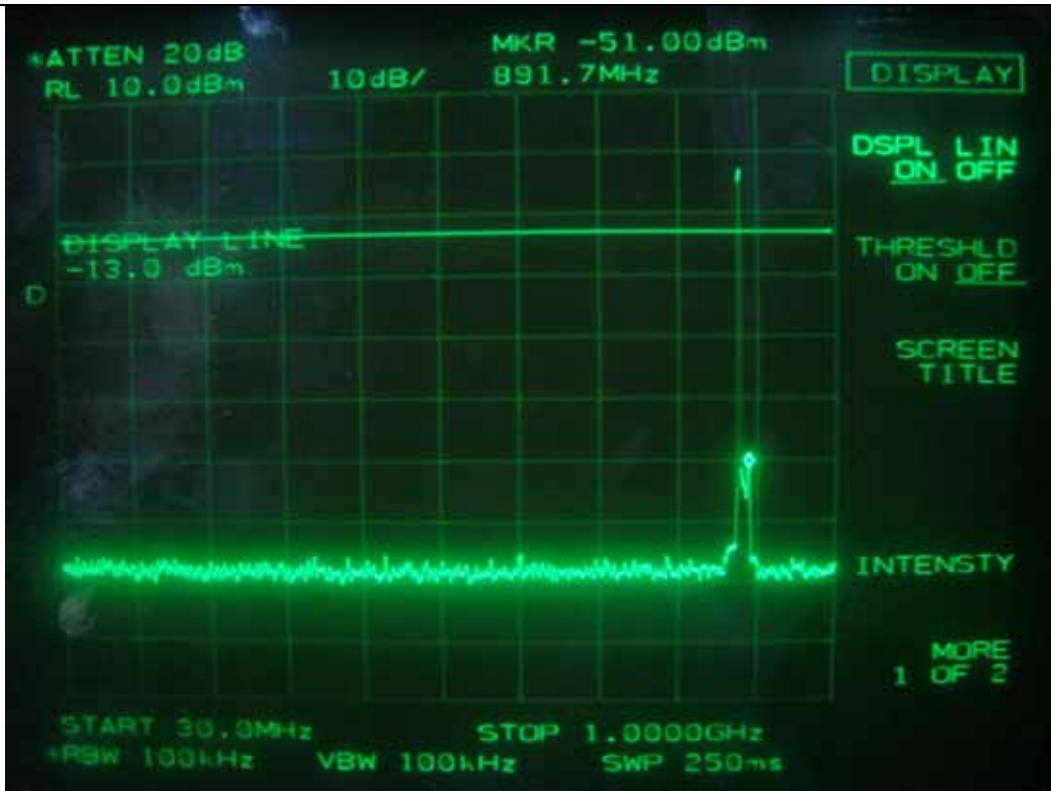


Downlink: CDMA 2000- Middle Channel

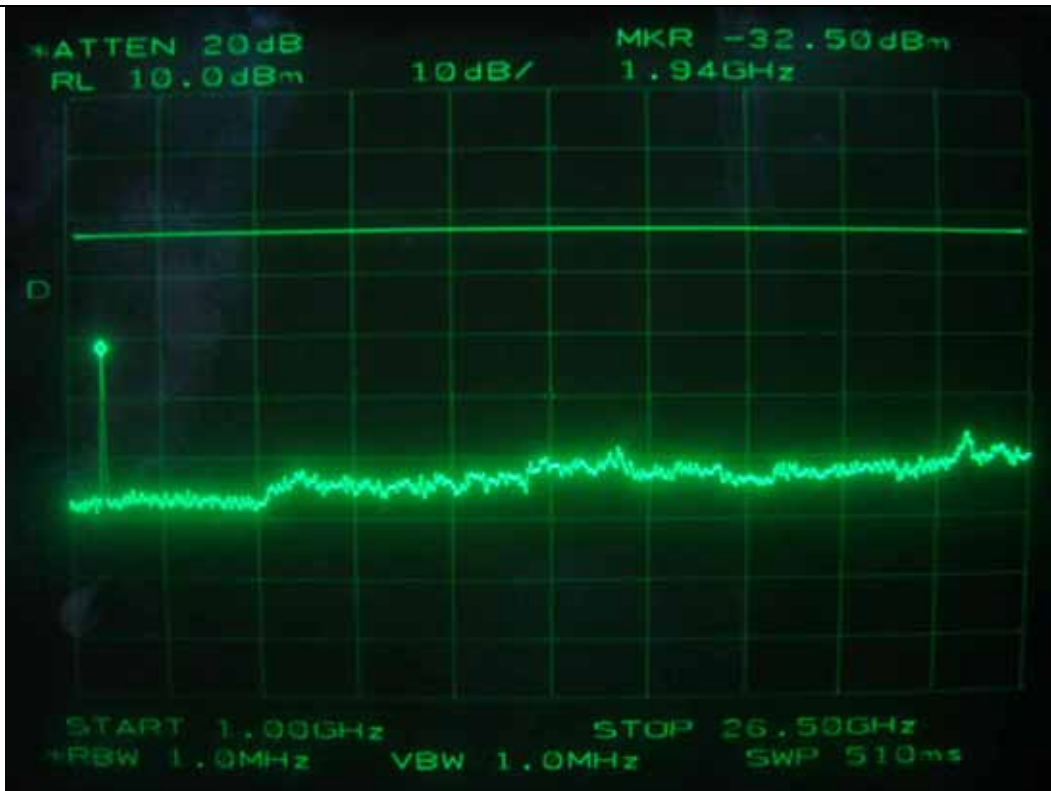


Downlink: CDMA 2000- Middle Channel

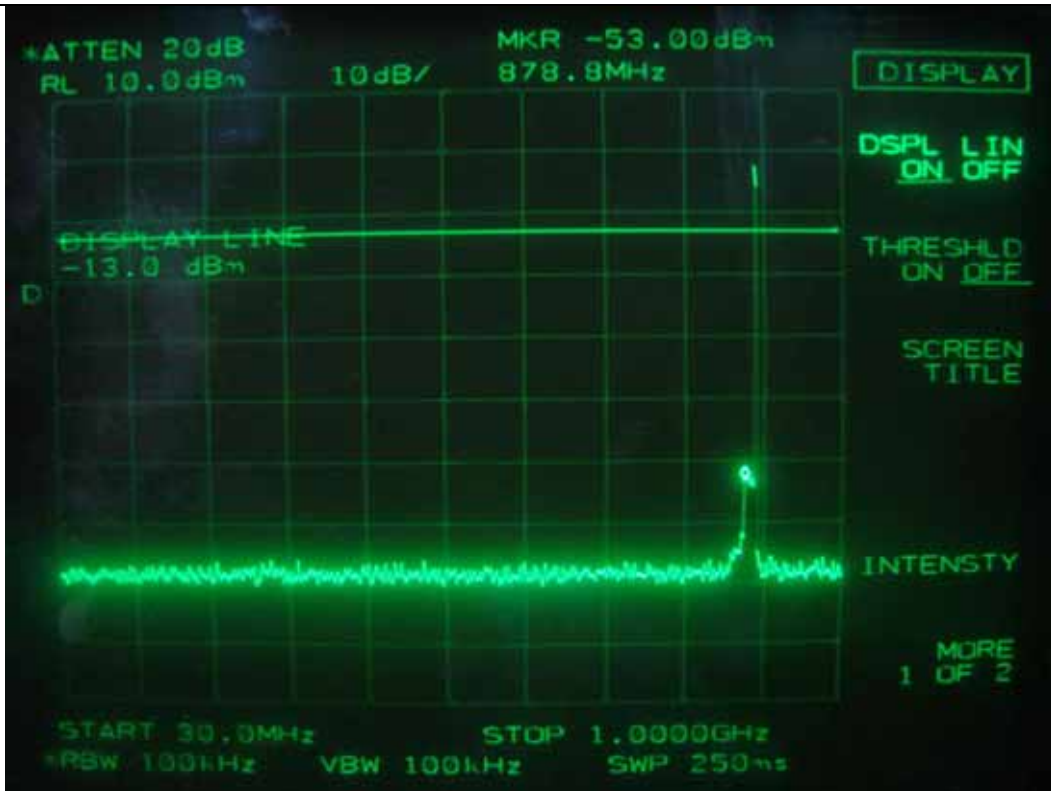


Downlink: CDMA 2000- High Channel

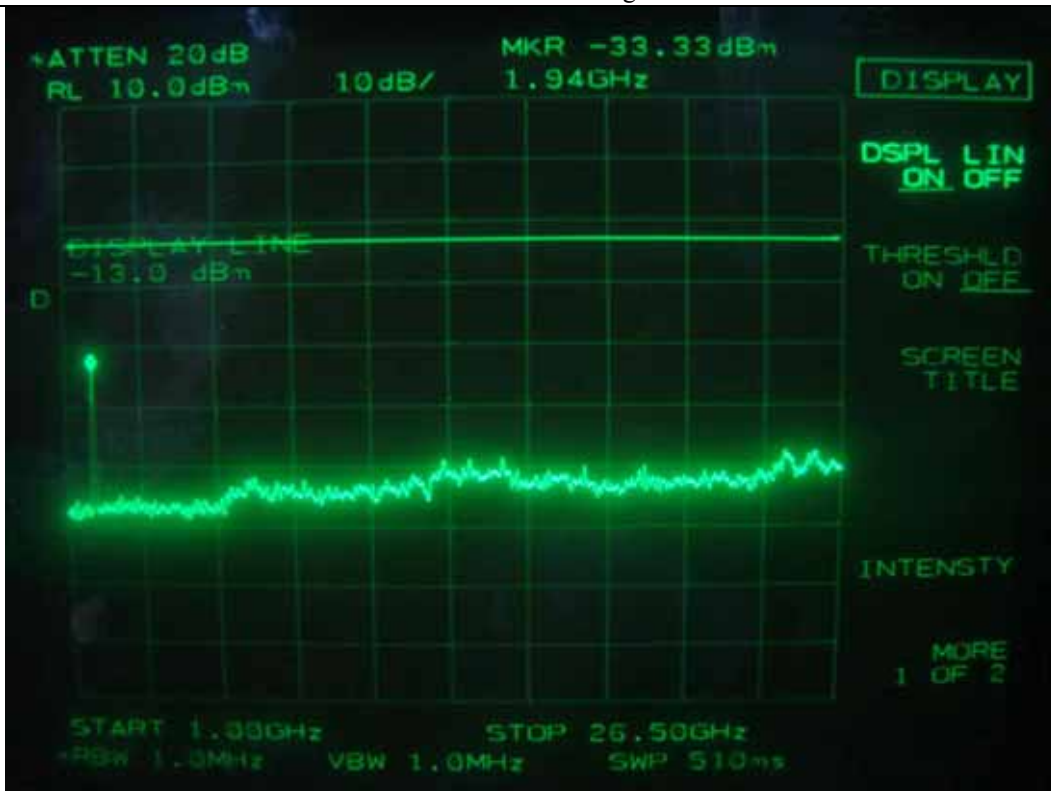


Downlink: CDMA 2000- High Channel

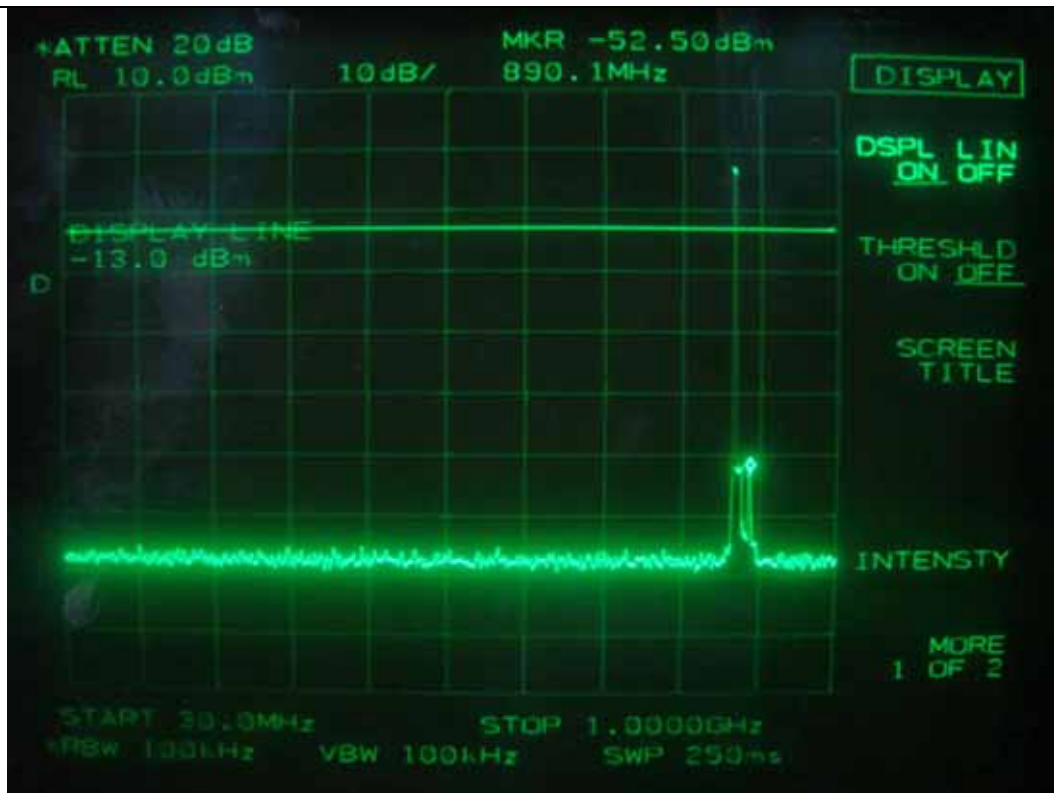


Downlink: 1xEVDO - Low Channel

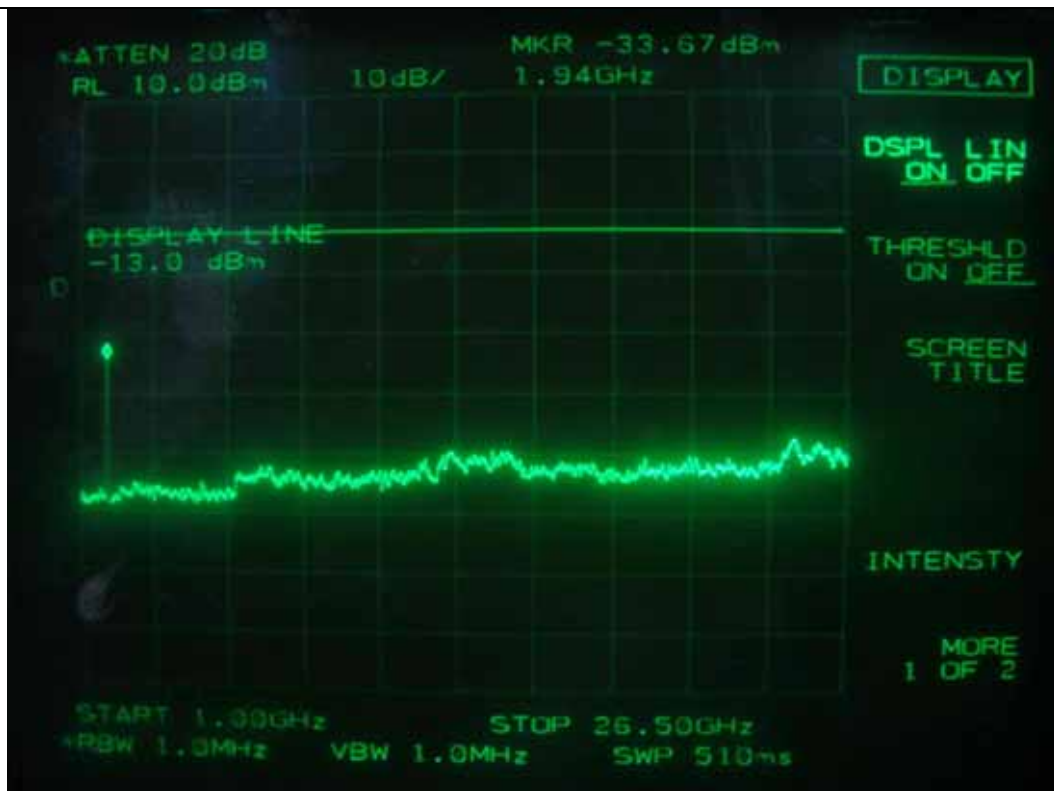


Downlink: 1xEVDO - Low Channel

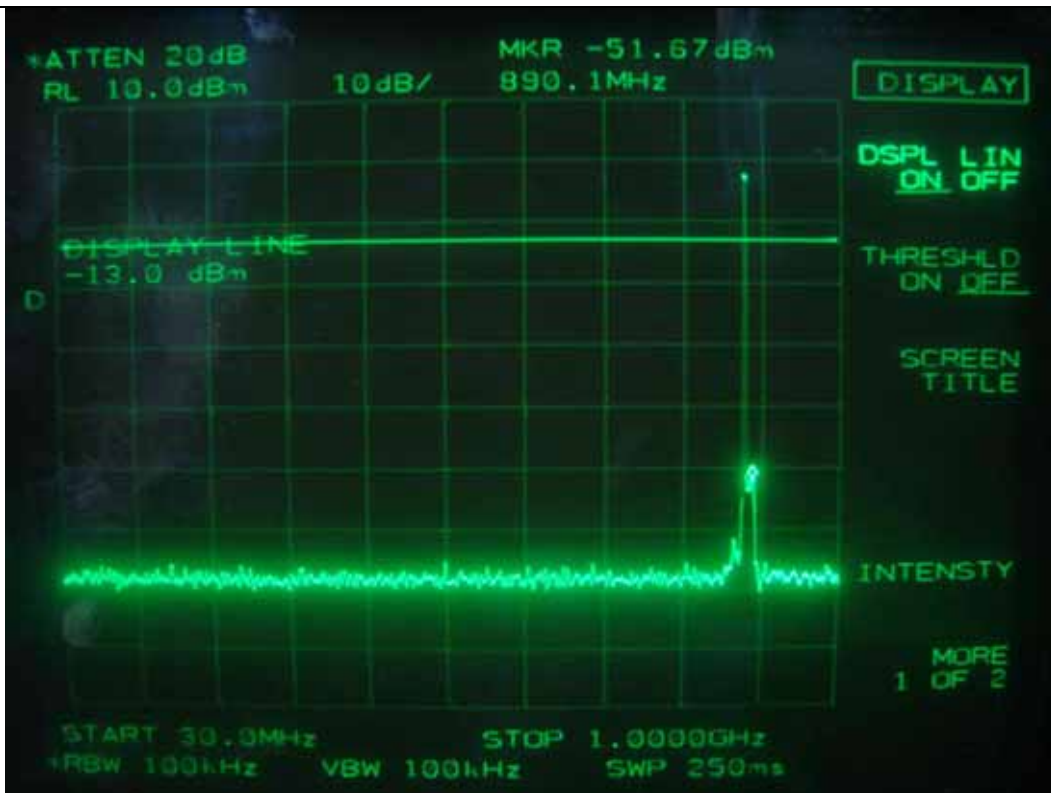

Downlink: 1xEVDO - Middle Channel

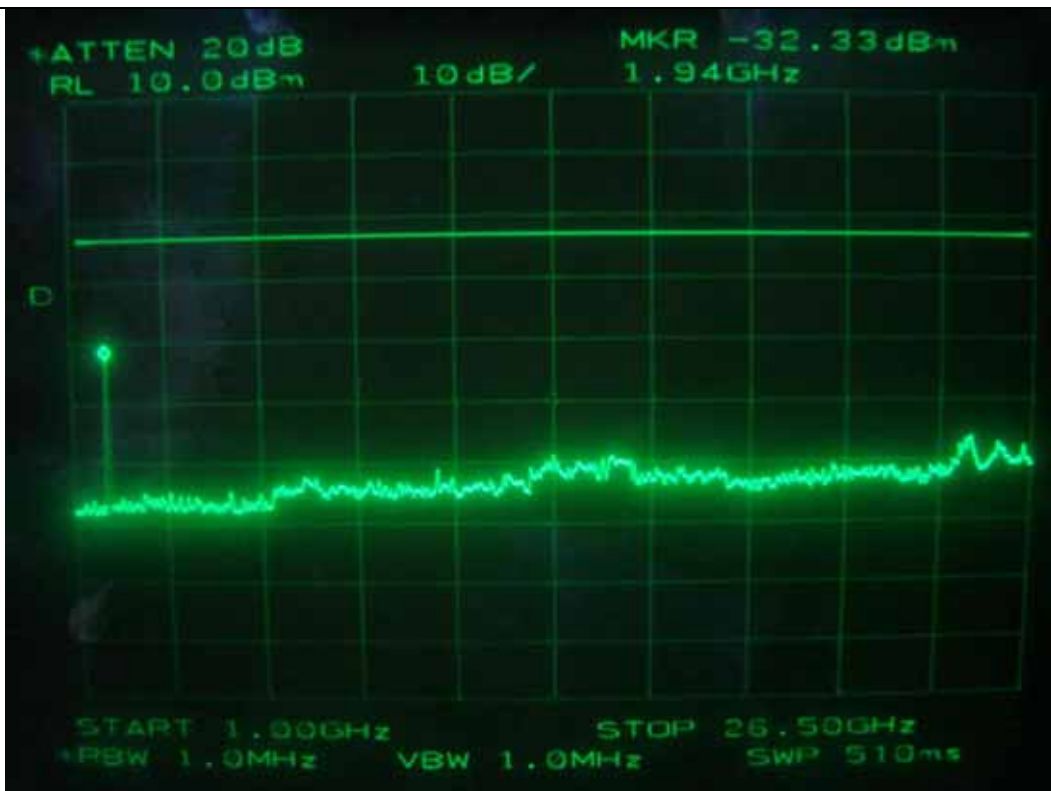

Downlink: 1xEVDO - Middle Channel

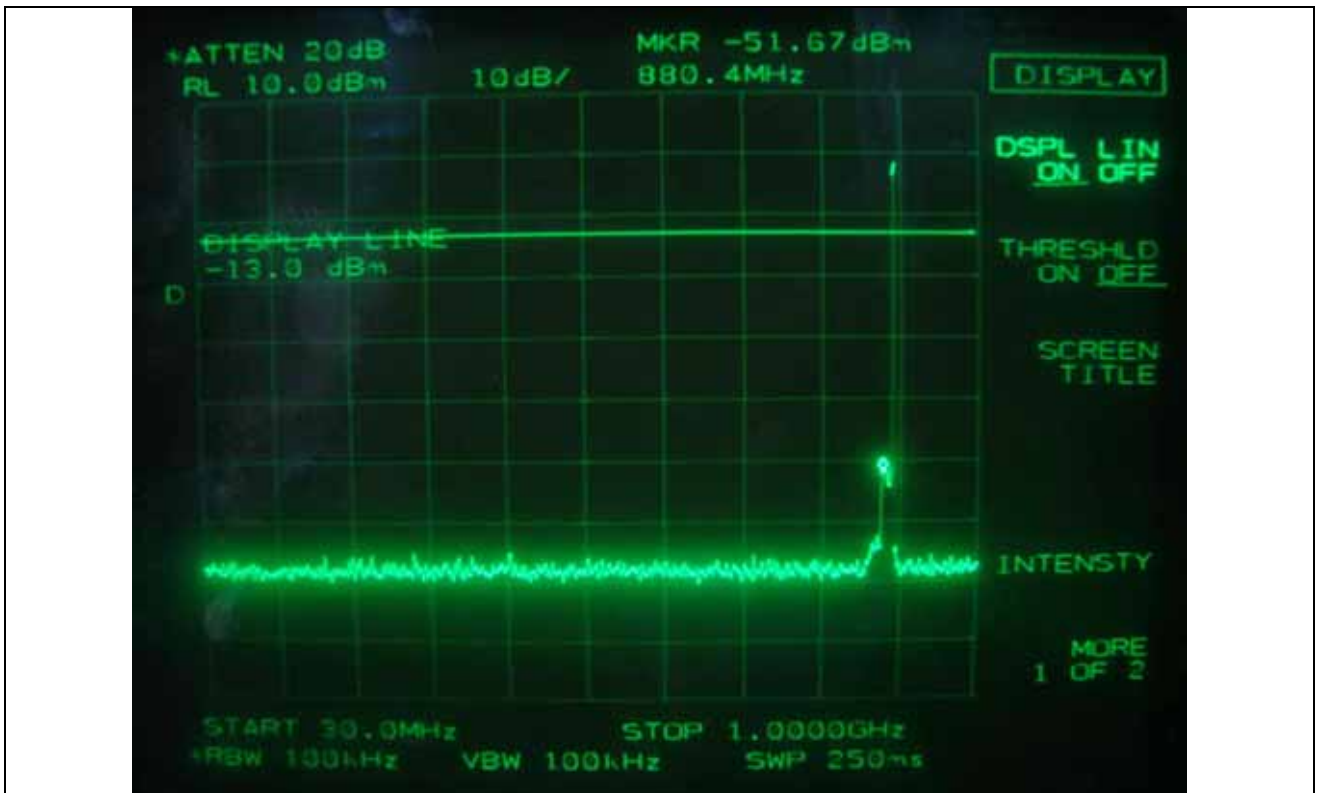

Downlink: 1xEVDO - High Channel




Downlink: 1xEVDO - High Channel


8.4.2 Test result for PCS Band

Mode	Modulation	Harmonic Frequency (MHz)		Measured Value (dBm)	Cable Loss (dB)	Total (dBm)	Limit (dBm)	Margin (dB)
Uplink	IS-95 CDMA	Low	836.70	-47.83	0.50	-47.33	-13.0	-34.33
		Middle	841.60	-48.50	0.50	-48.00		-35.00
		High	836.70	-48.67	0.50	-48.17		-35.17
	CDMA2000	Low	848.00	-47.67	0.50	-47.17	-13.0	-34.17
		Middle	841.60	-48.33	0.50	-47.83		-34.83
		High	836.70	-48.83	0.50	-48.33		-35.33
	1xEVDO	Low	848.00	-47.00	0.50	-46.50	-13.0	-33.50
		Middle	835.10	-48.00	0.50	-47.50		-34.50
		High	848.00	-47.33	0.50	-46.83		-33.83
Downlink	IS-95 CDMA	Low	891.70	-51.00	0.50	-50.50	-13.0	-37.50
		Middle	891.70	-52.00	0.50	-51.50		-38.50
		High	890.10	-51.83	0.50	-51.33		-38.33
	CDMA2000	Low	890.10	-51.17	0.50	-50.67	-13.0	-37.67
		Middle	885.20	-51.50	0.50	-51.00		-38.00
		High	890.10	-51.67	0.50	-51.17		-38.17
	1xEVDO	Low	882.00	-51.67	0.50	-51.17	-13.0	-38.17
		Middle	886.80	-51.67	0.50	-51.17		-38.17
		High	891.70	-51.00	0.50	-50.50		-37.50


According to the rule, out of band emission shall be attenuated by $43 + 10 \log (P)$ dBc, equates to -13.0dBm.



Tested by: Ki-Hong, Nam / Project Engineer

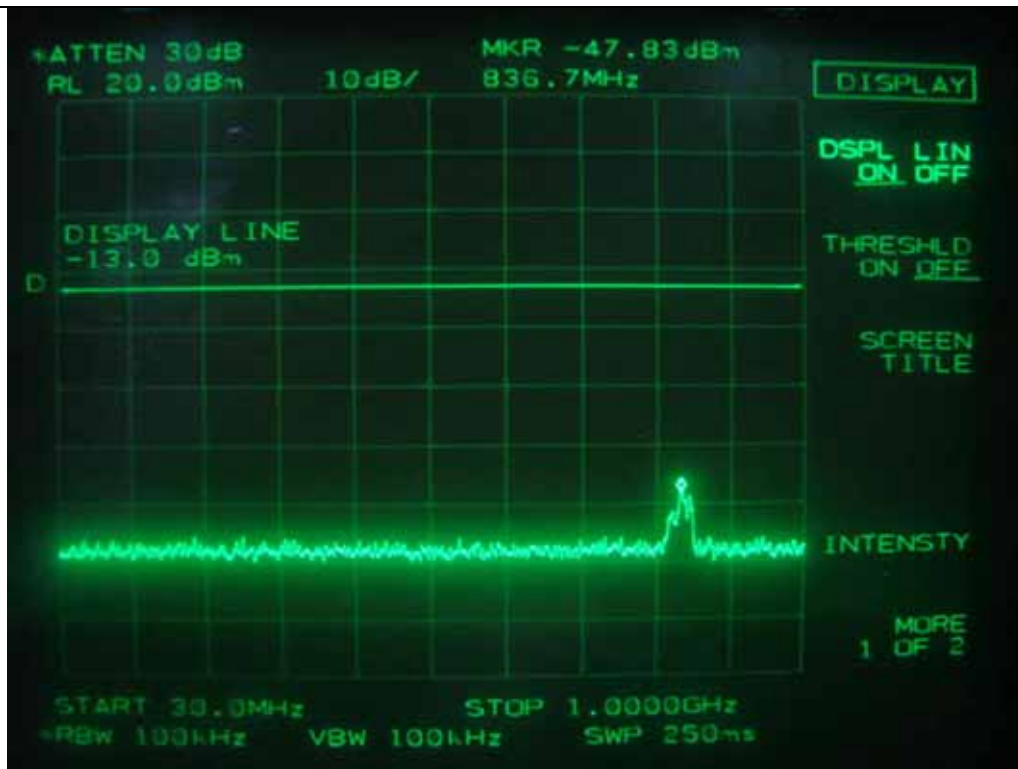


Uplink: IS-95 CDMA - Low Channel

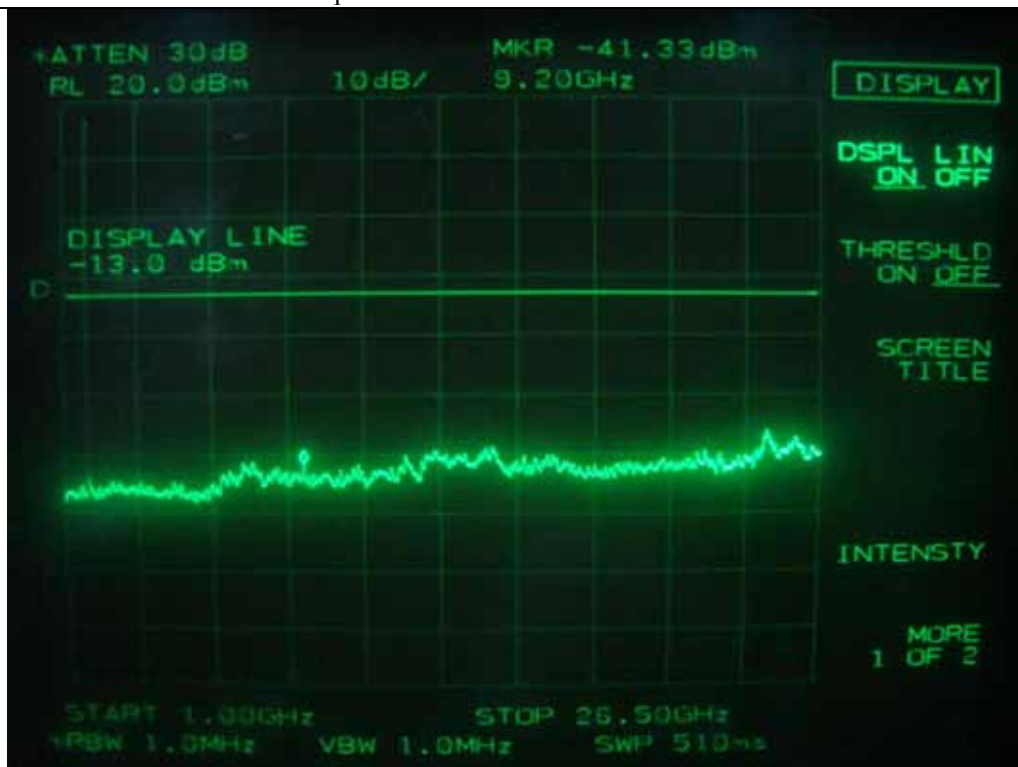

Uplink: IS-95 CDMA - Low Channel



Uplink: IS-95 CDMA - Middle Channel

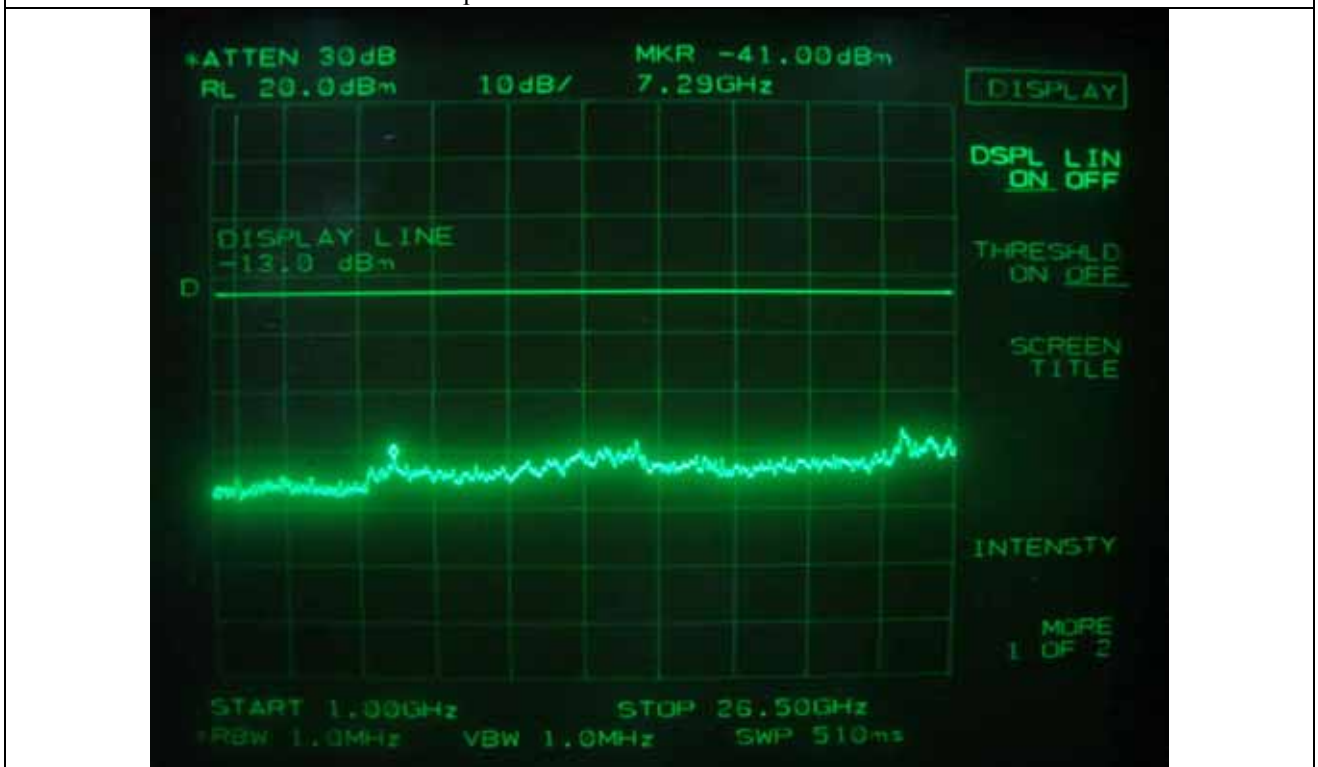


Uplink: IS-95 CDMA - Middle Channel




Uplink: IS-95 CDMA - High Channel




Uplink: IS-95 CDMA - High Channel

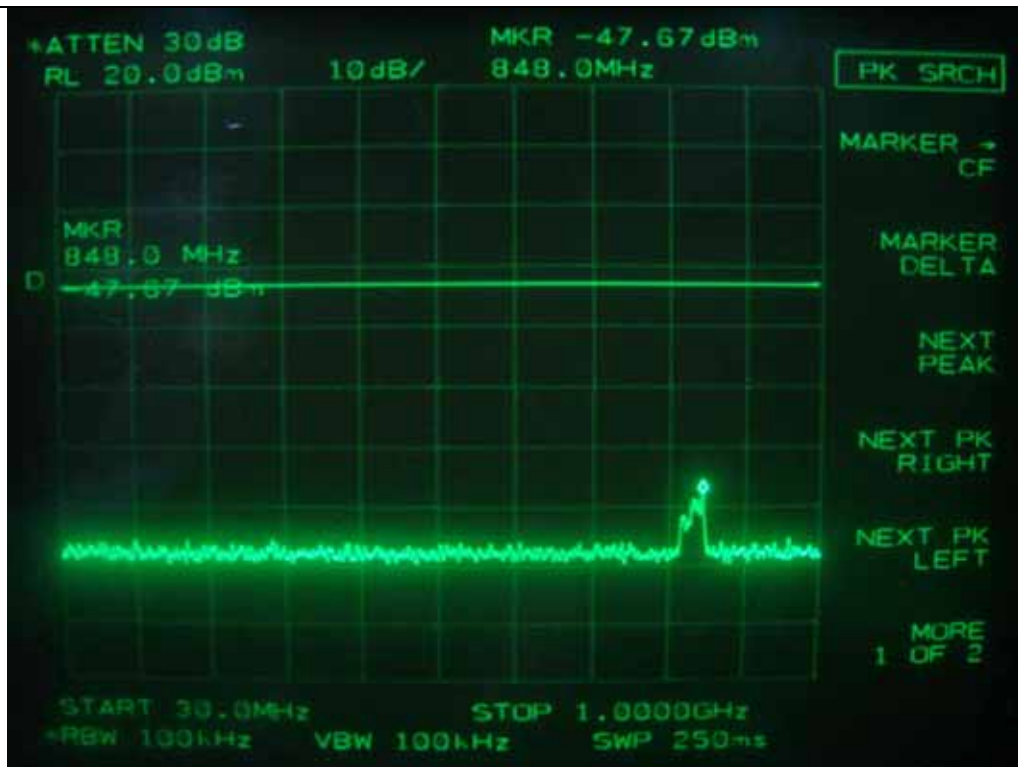


Uplink: CDMA 2000- Low Channel

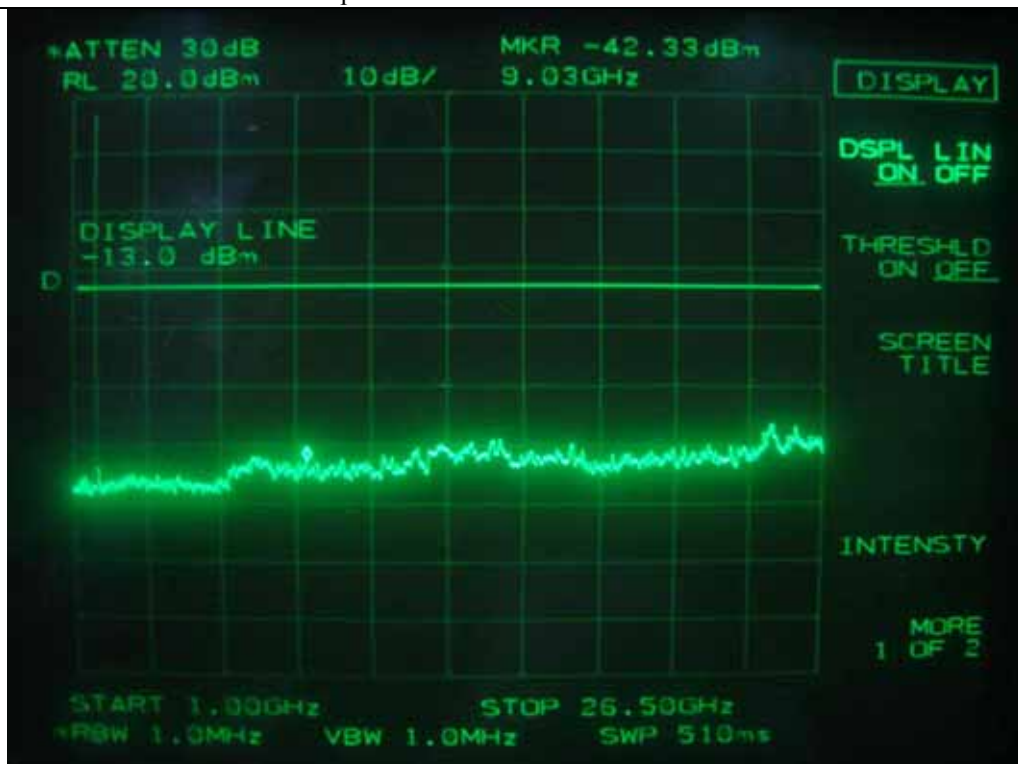


Uplink: CDMA 2000- Low Channel

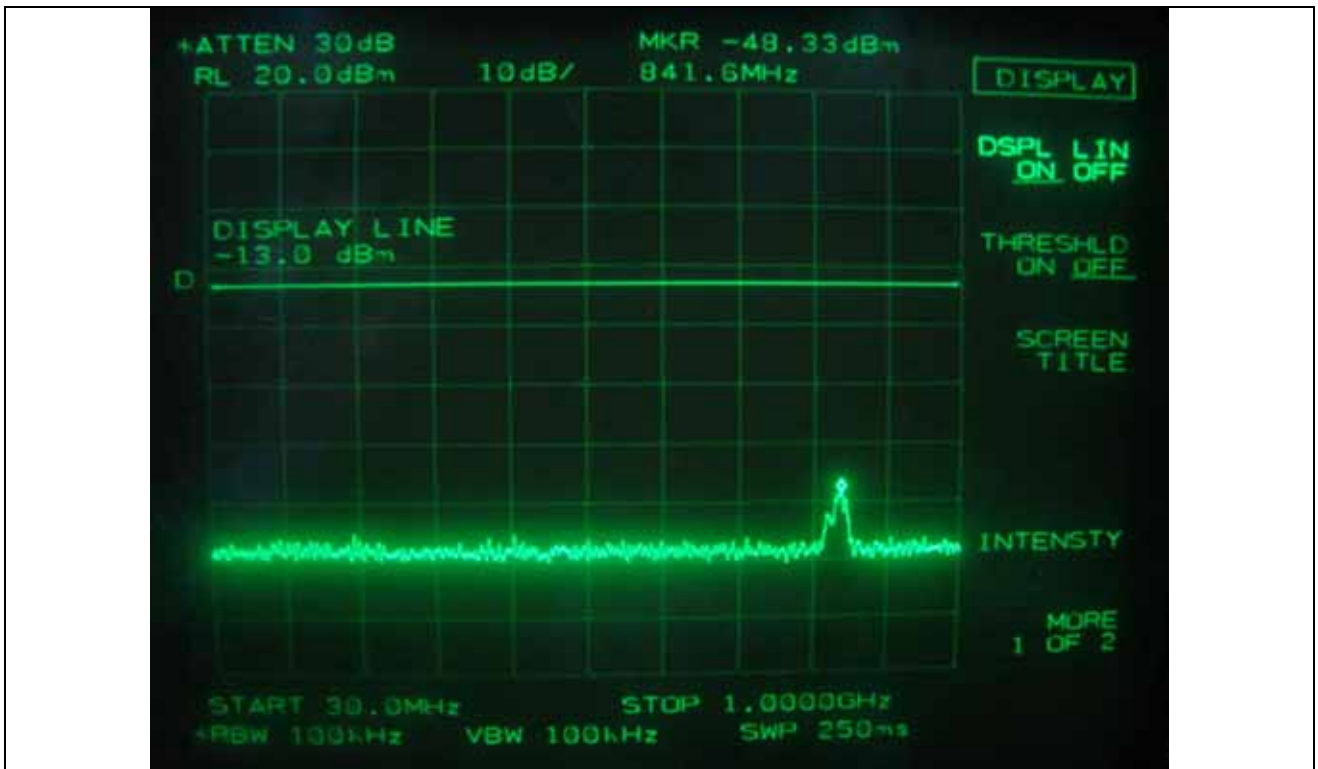

Uplink: CDMA 2000- Middle Channel

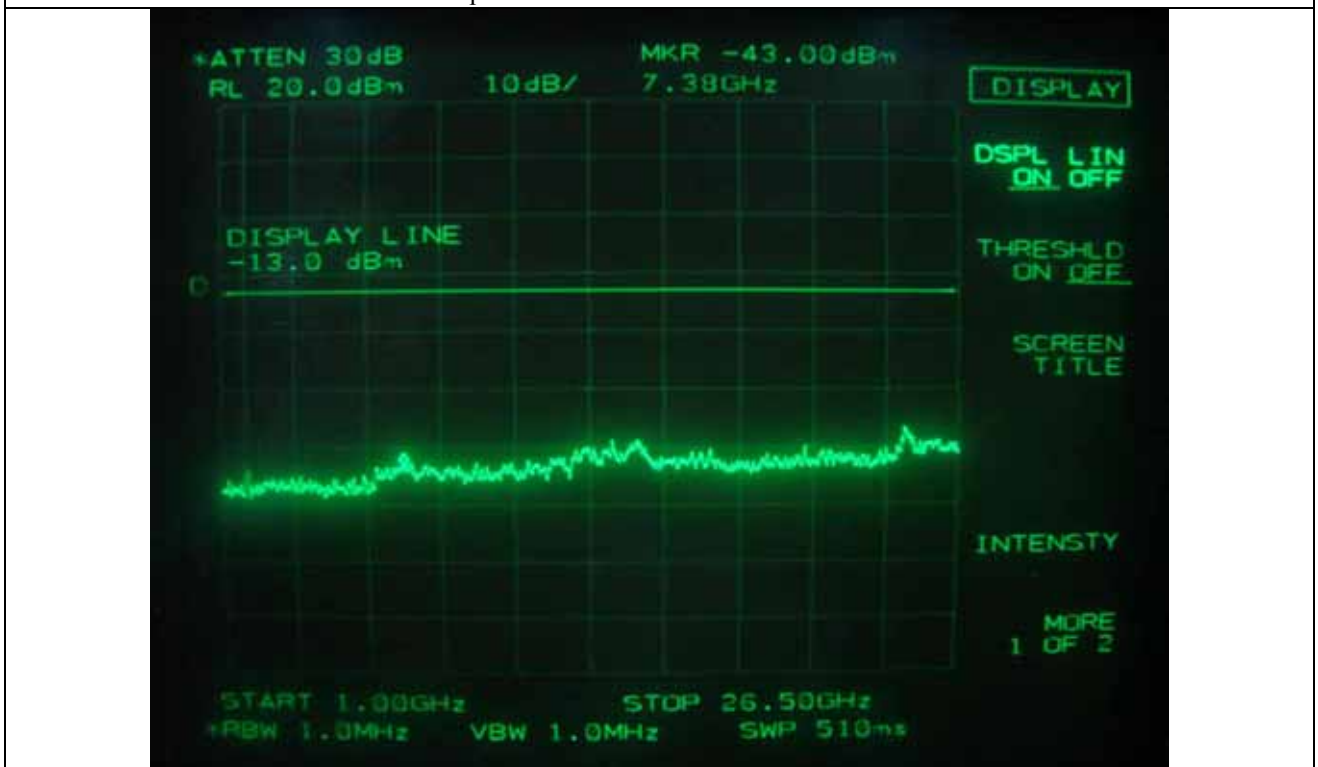


Uplink: CDMA 2000- Middle Channel

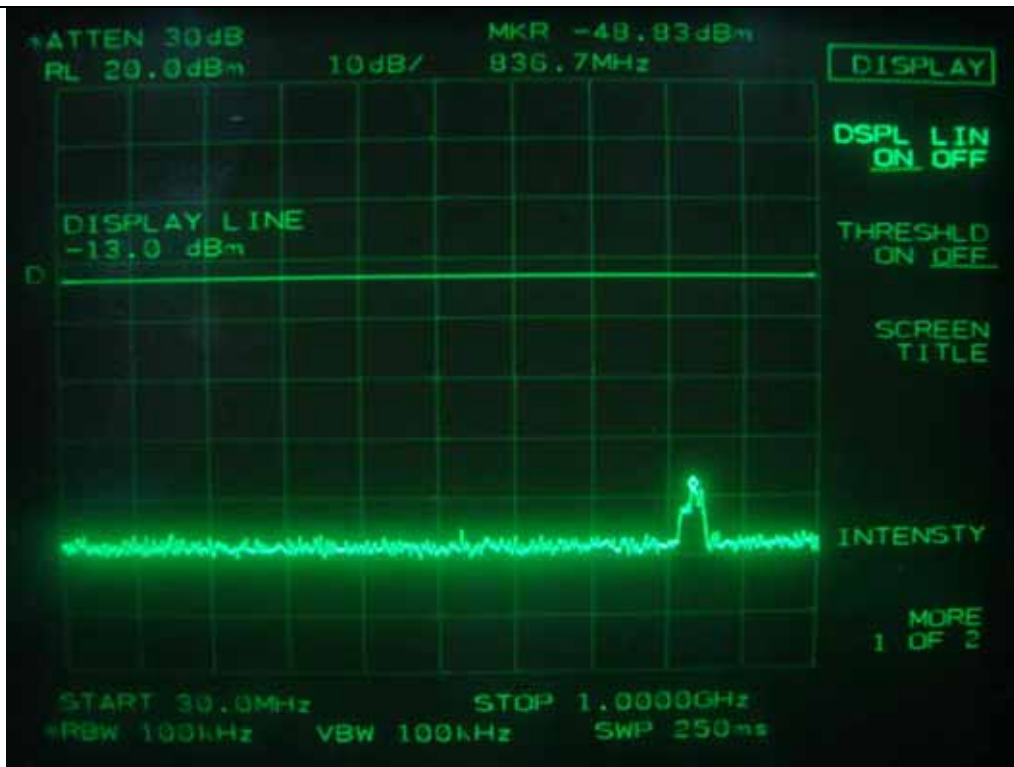


Uplink: CDMA 2000- High Channel



Uplink: CDMA 2000- High Channel

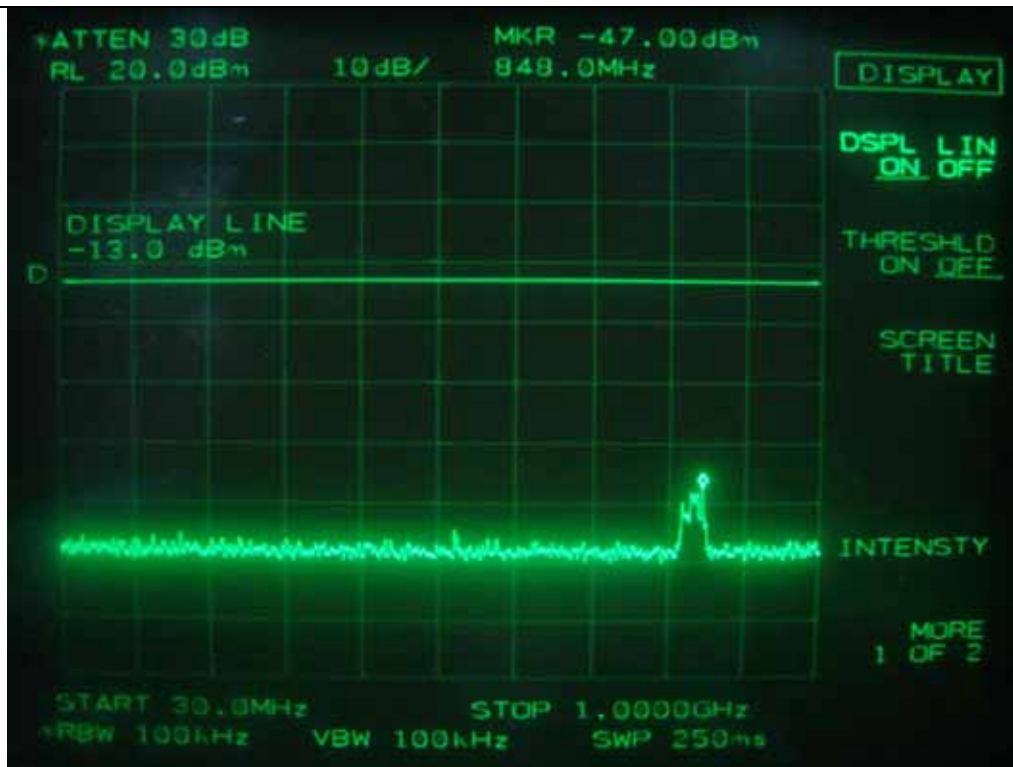

Uplink: 1xEVDO - Low Channel

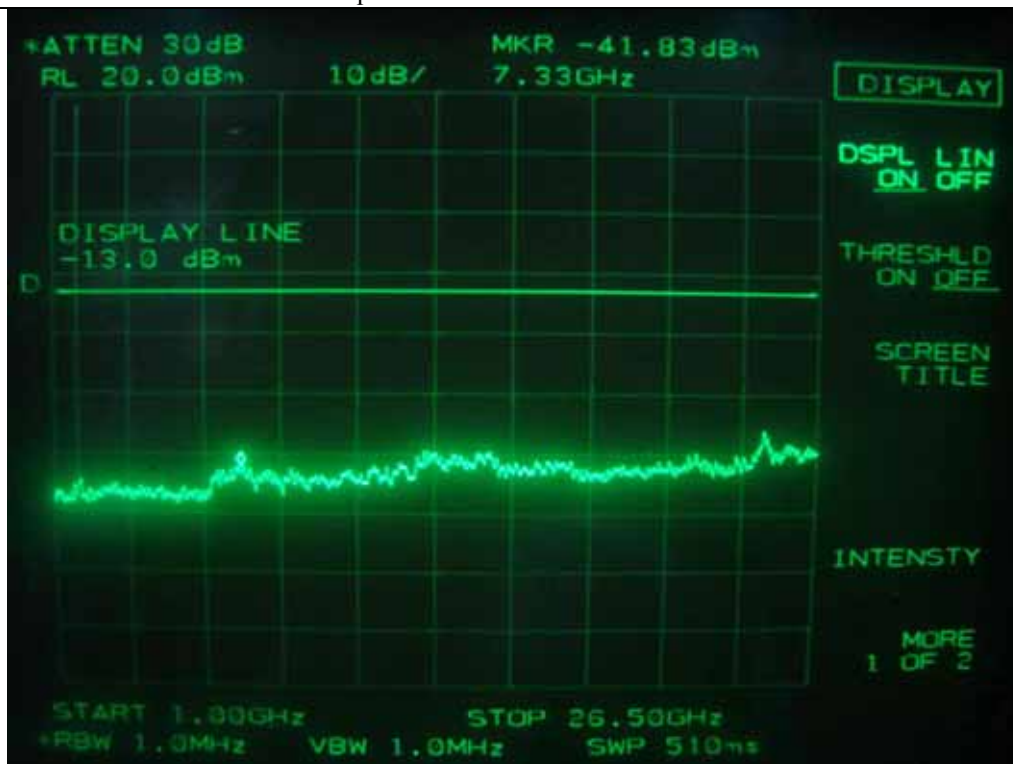


Uplink: 1xEVDO - Low Channel




Uplink: 1xEVDO - Middle Channel




Uplink: 1xEVDO - Middle Channel

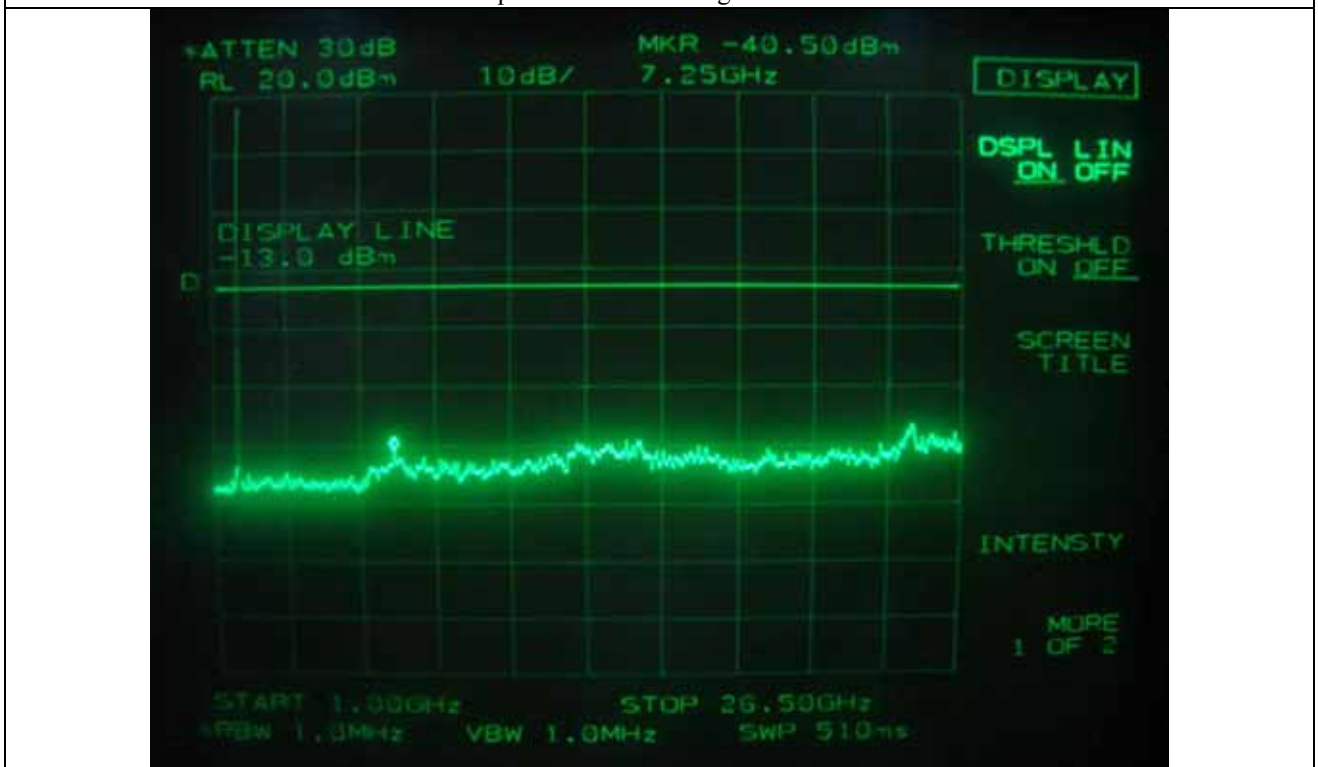


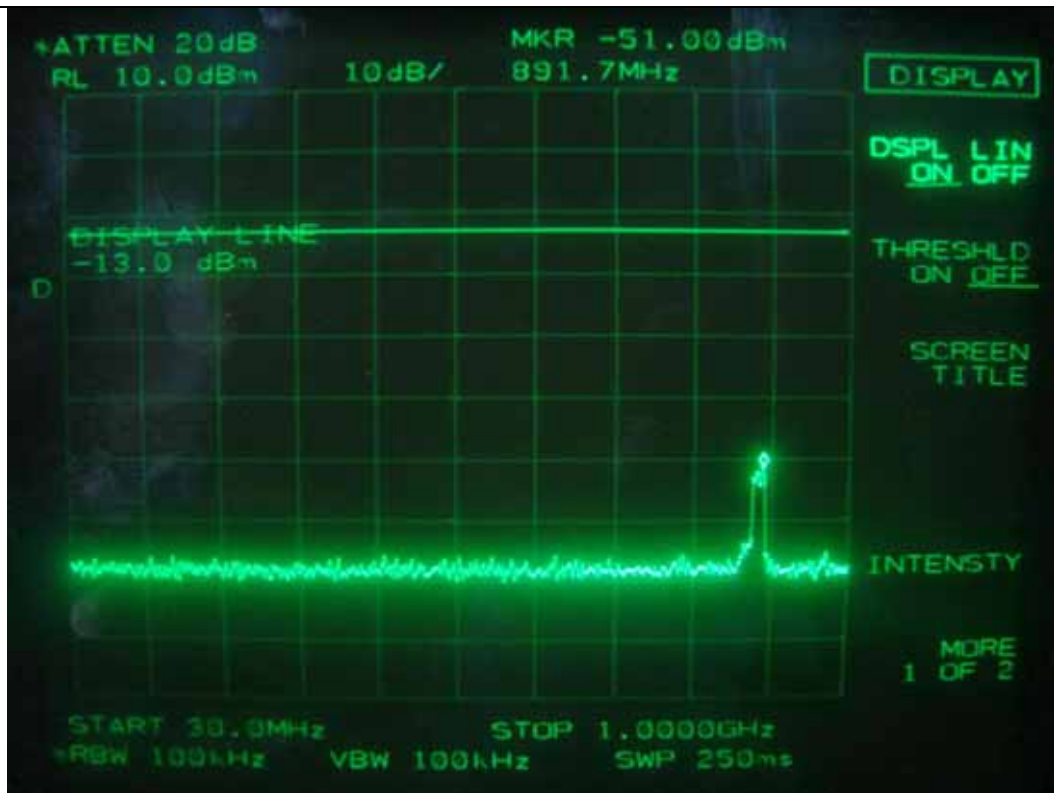


Downlink: IS-95 CDMA - Low Channel

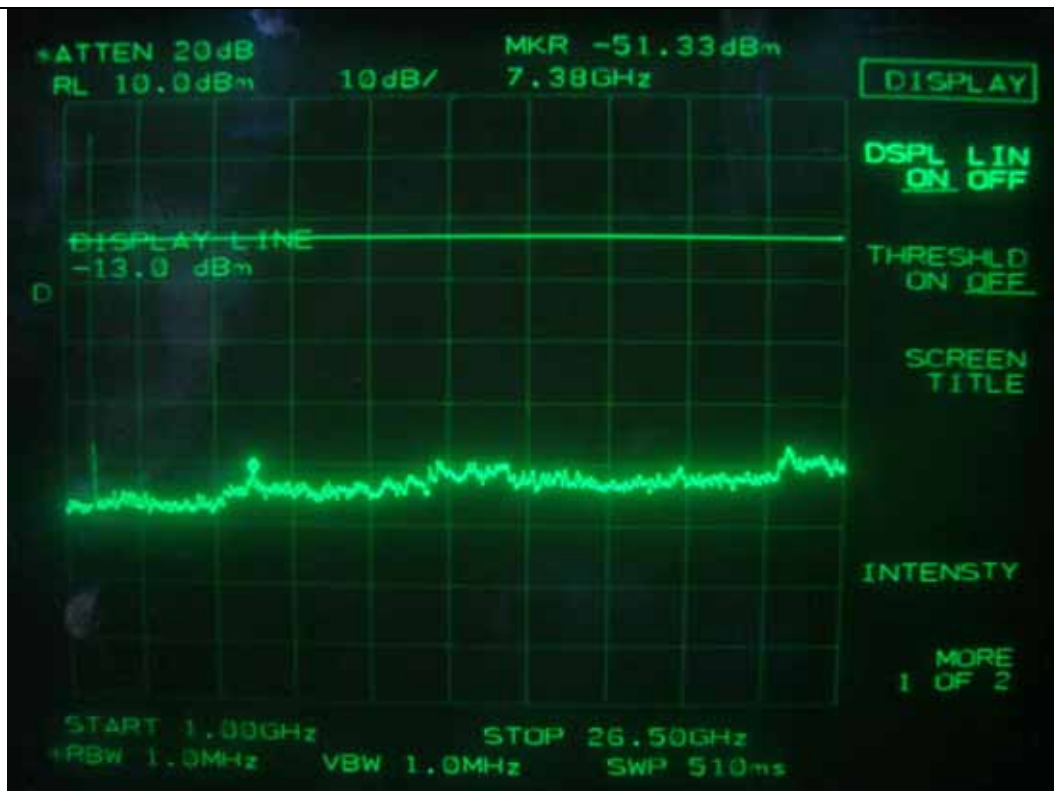


Downlink: IS-95 CDMA - Low Channel

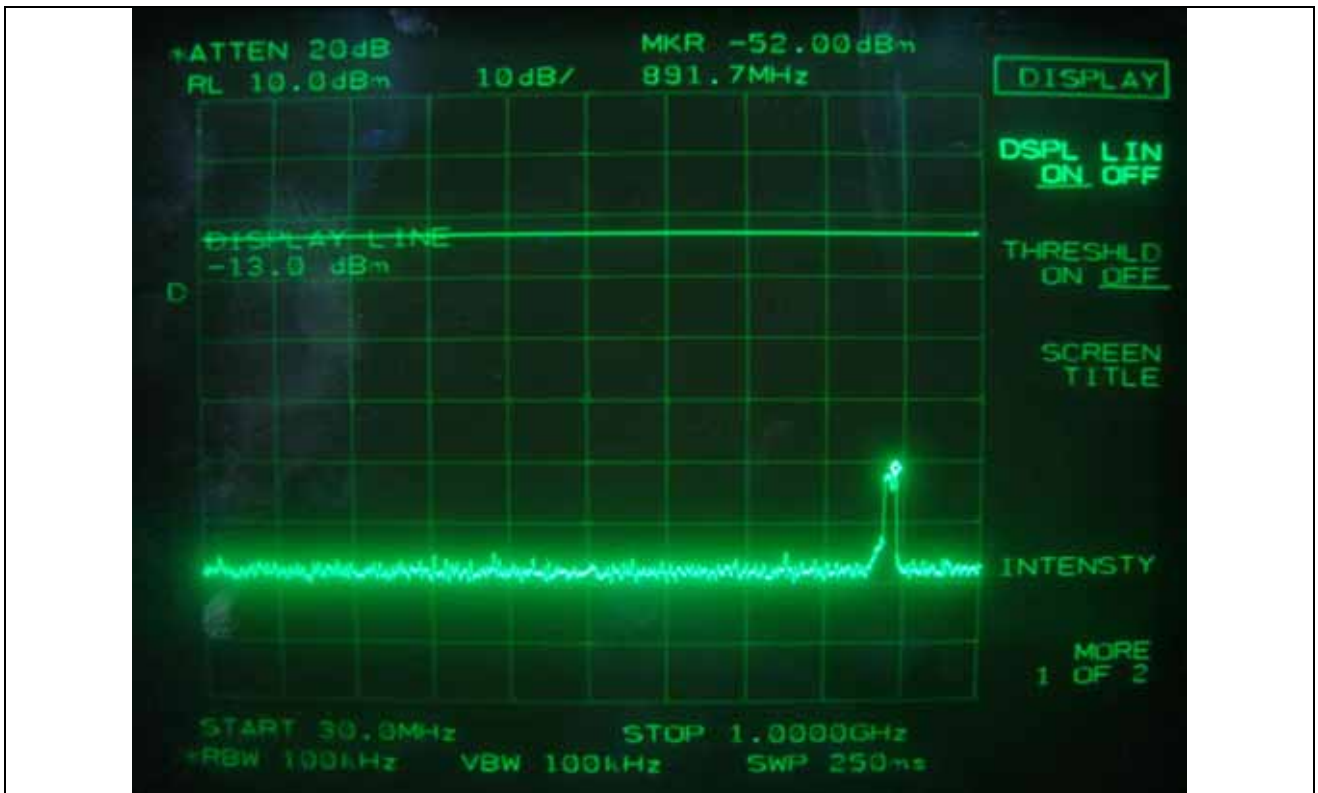


Downlink: IS-95 CDMA - Middle Channel

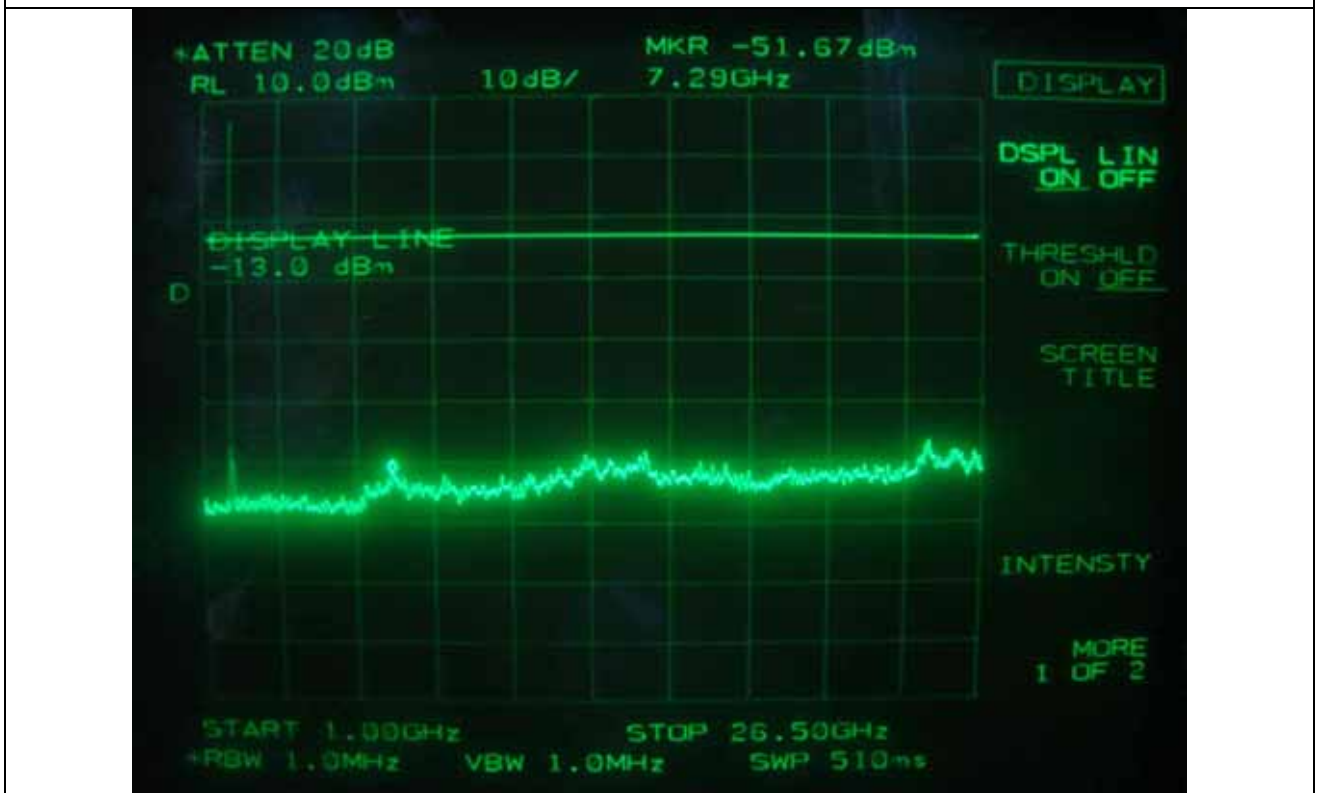

Downlink: IS-95 CDMA - Middle Channel

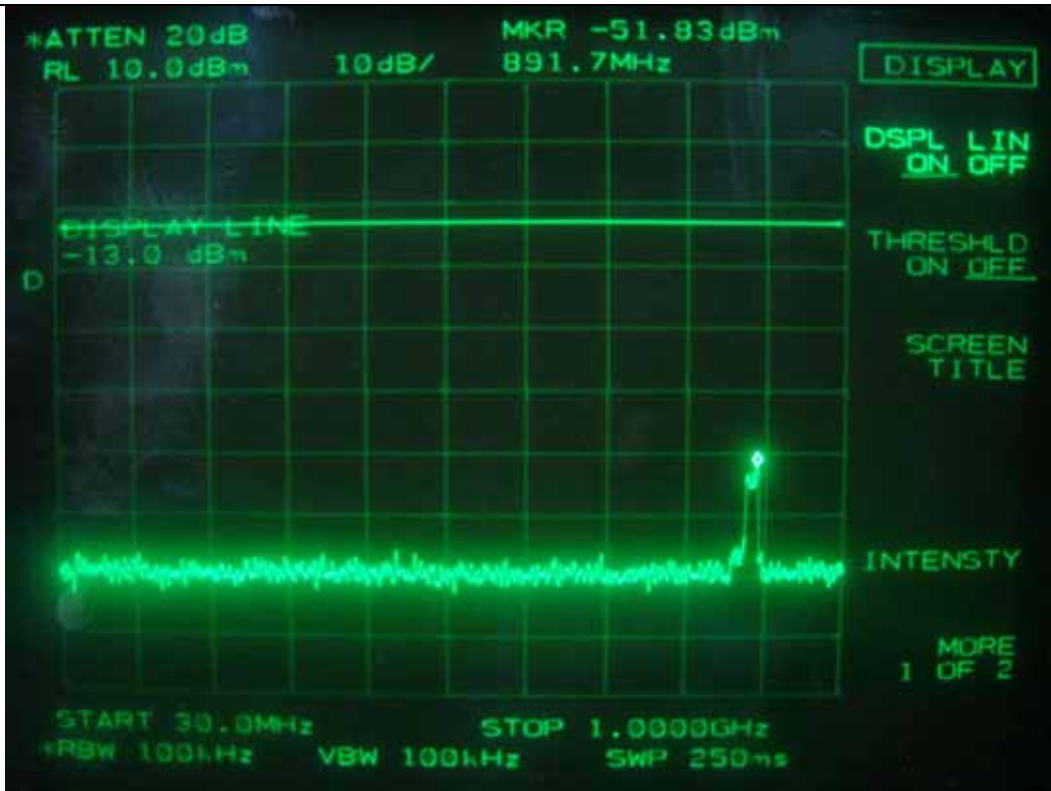


Downlink: IS-95 CDMA - High Channel

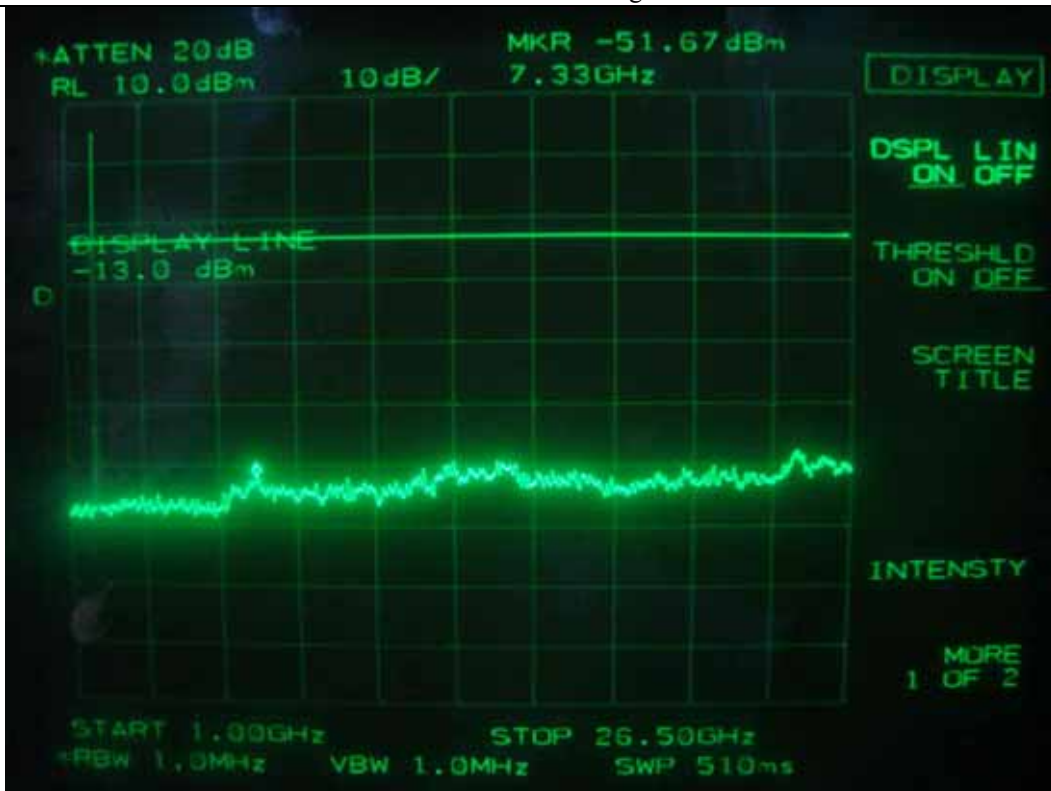


Downlink: IS-95 CDMA - High Channel




Downlink: CDMA 2000- Low Channel

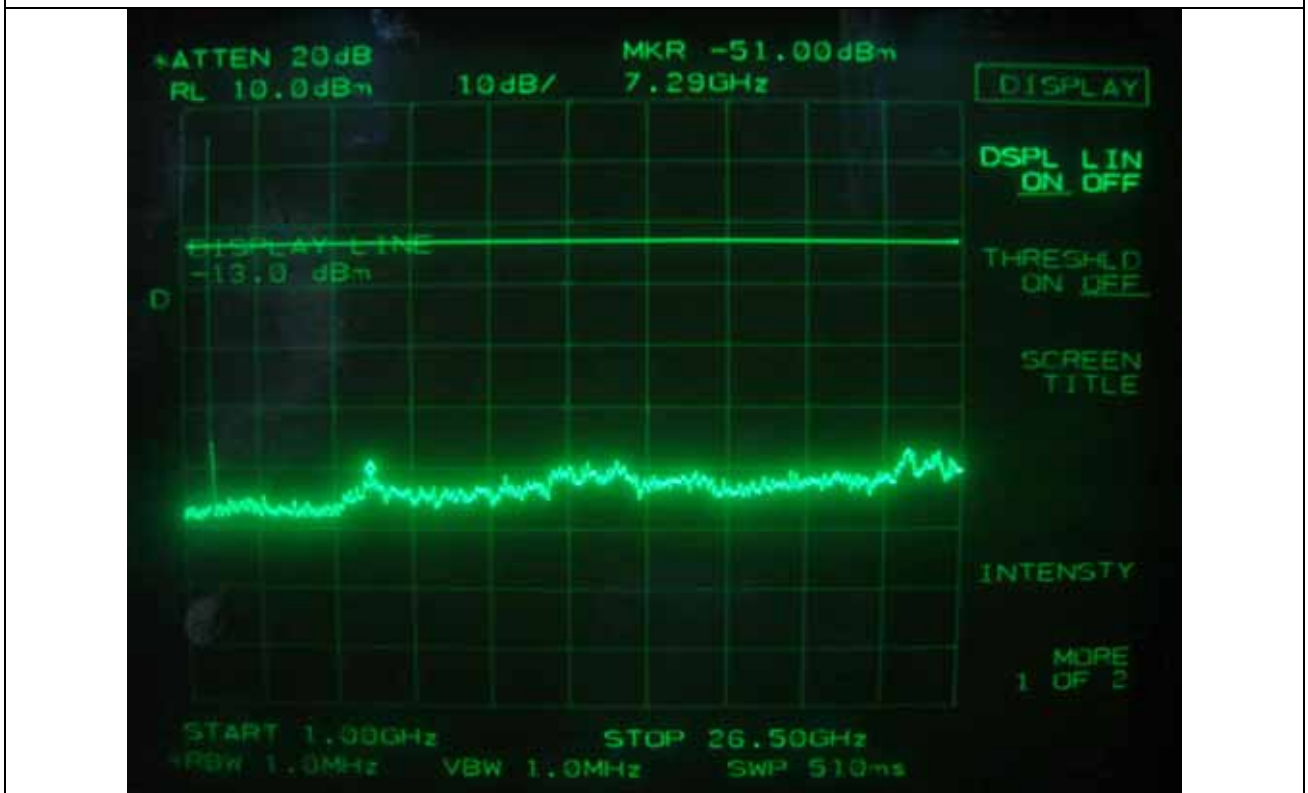


Downlink: CDMA 2000- Low Channel

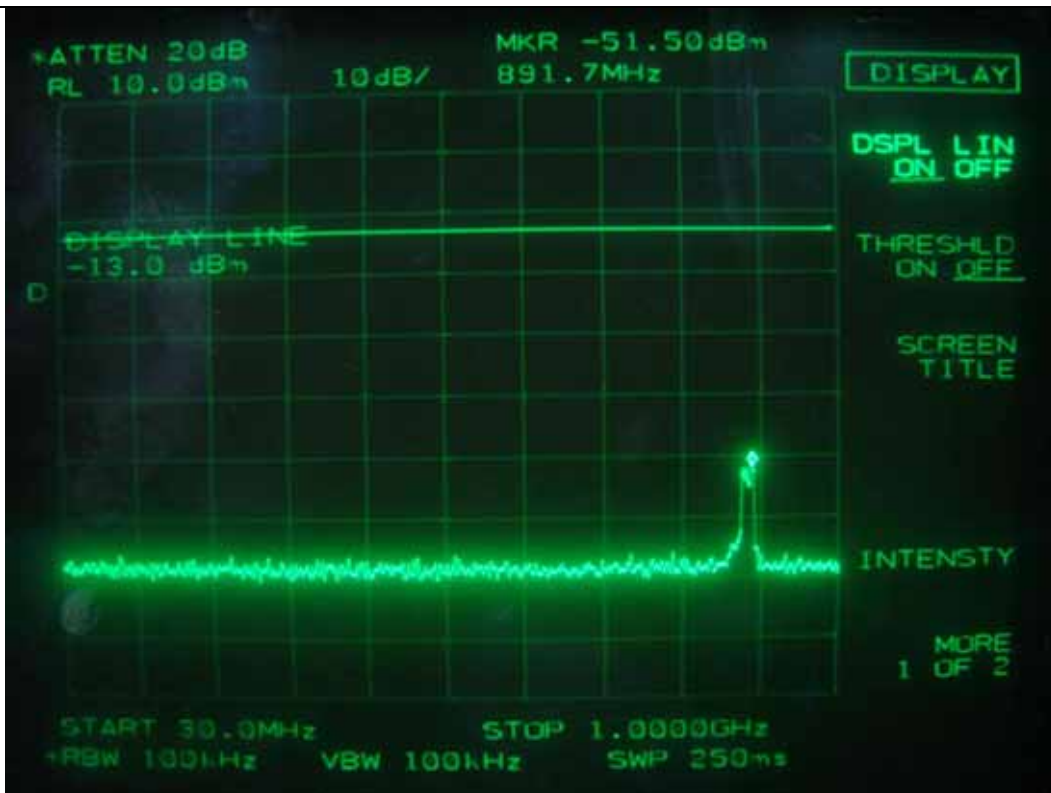

Downlink: CDMA 2000- Middle Channel

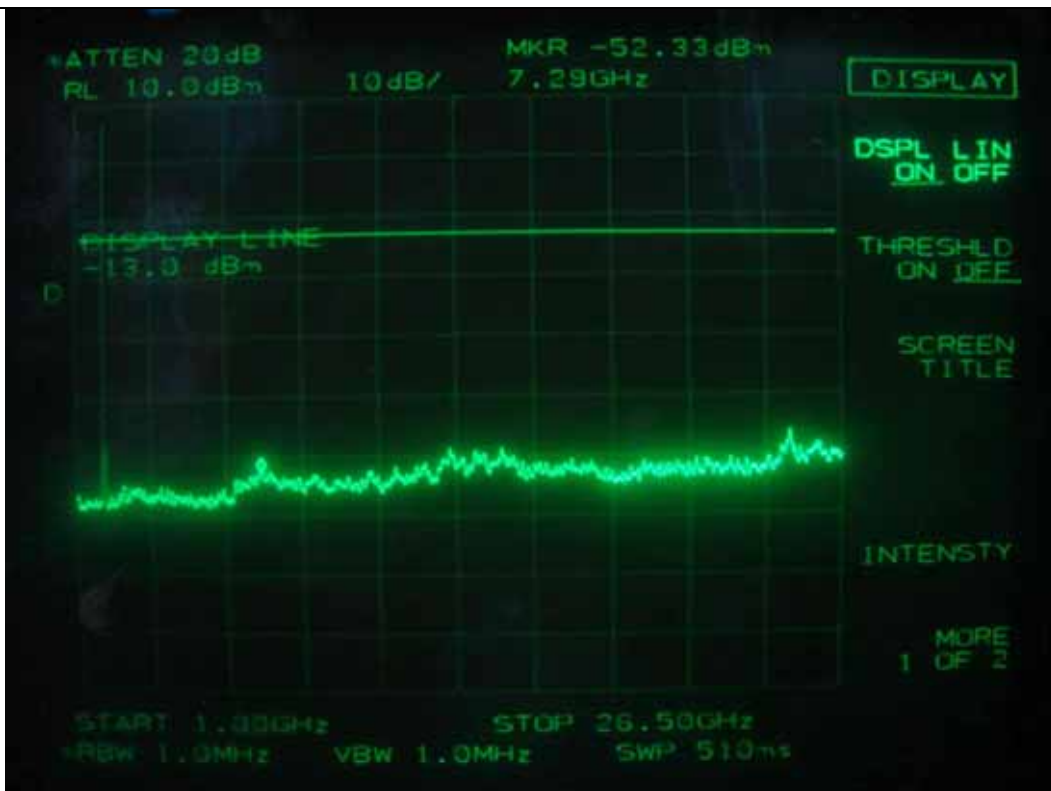


Downlink: CDMA 2000- Middle Channel

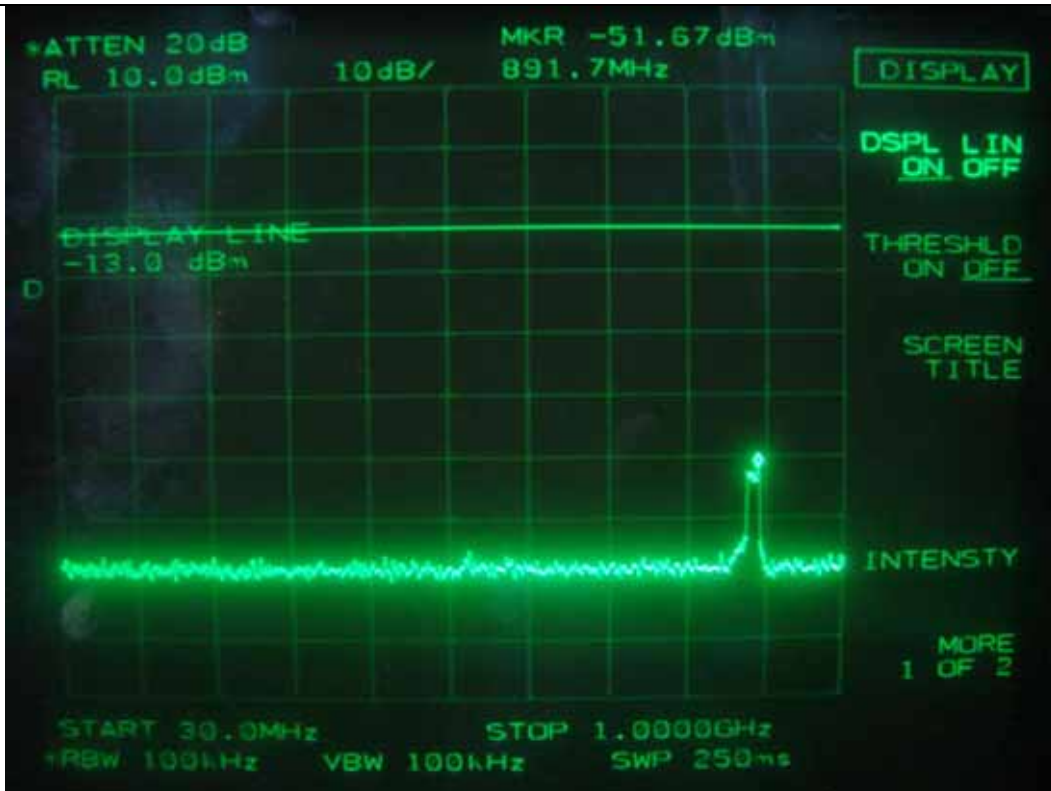

Downlink: CDMA 2000- High Channel




Downlink: CDMA 2000- High Channel

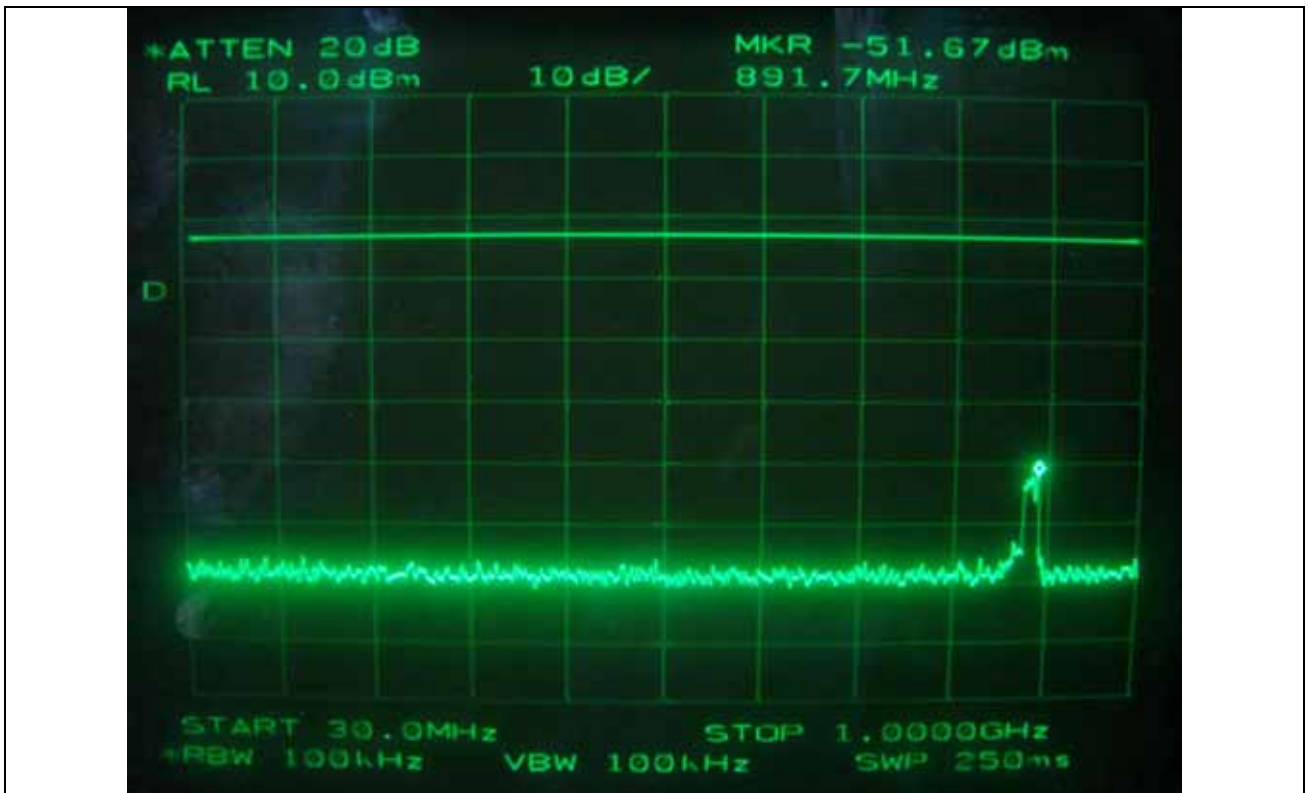


Downlink: 1xEVDO - Low Channel




Downlink: 1xEVDO - Low Channel

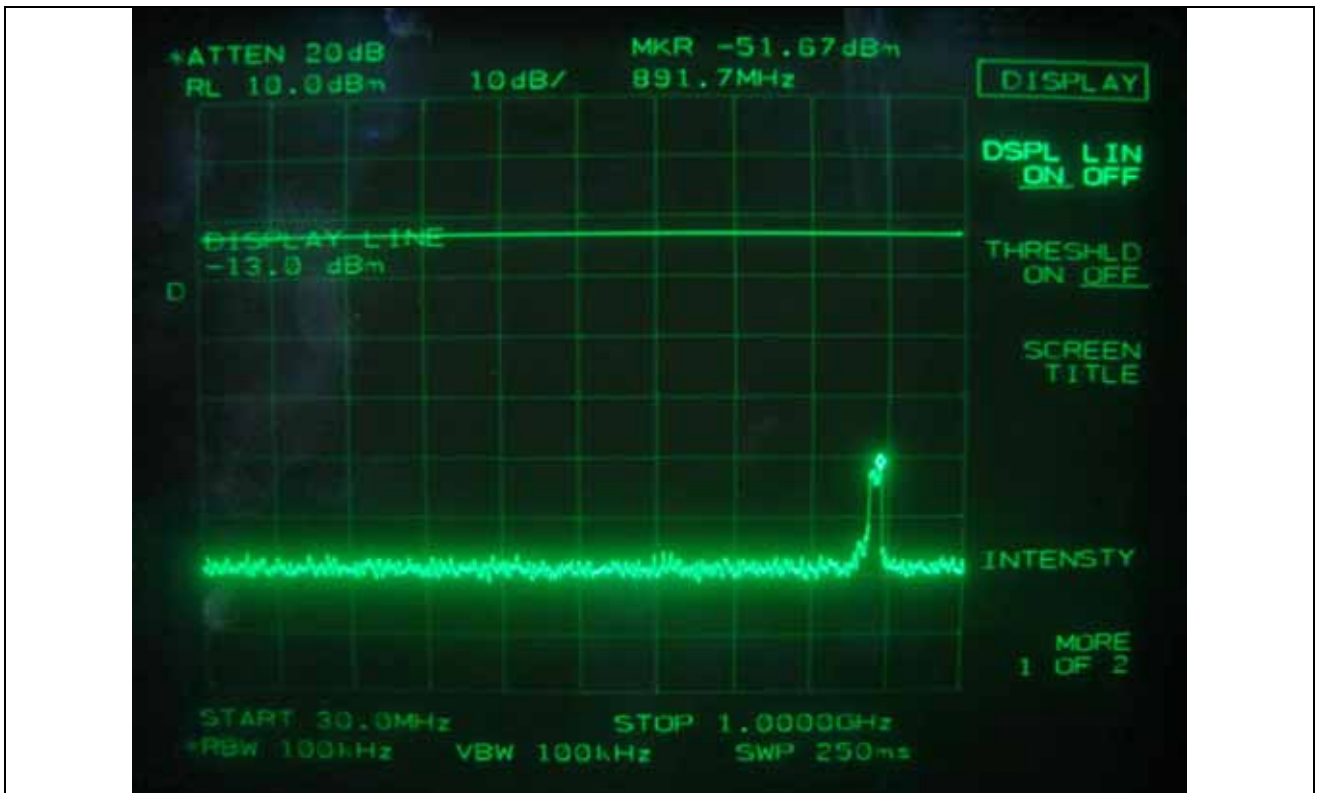


Downlink: 1xEVDO - Middle Channel

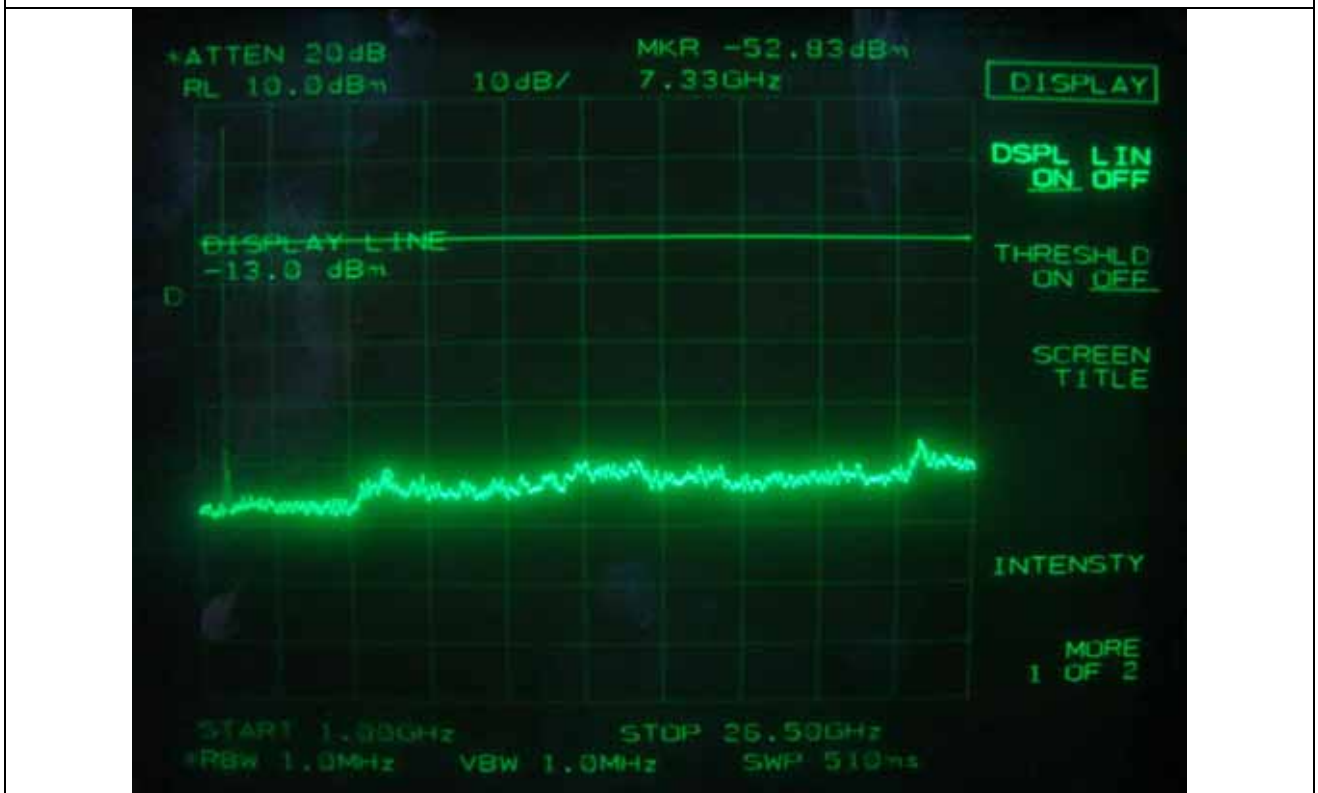

Downlink: 1xEVDO - Middle Channel

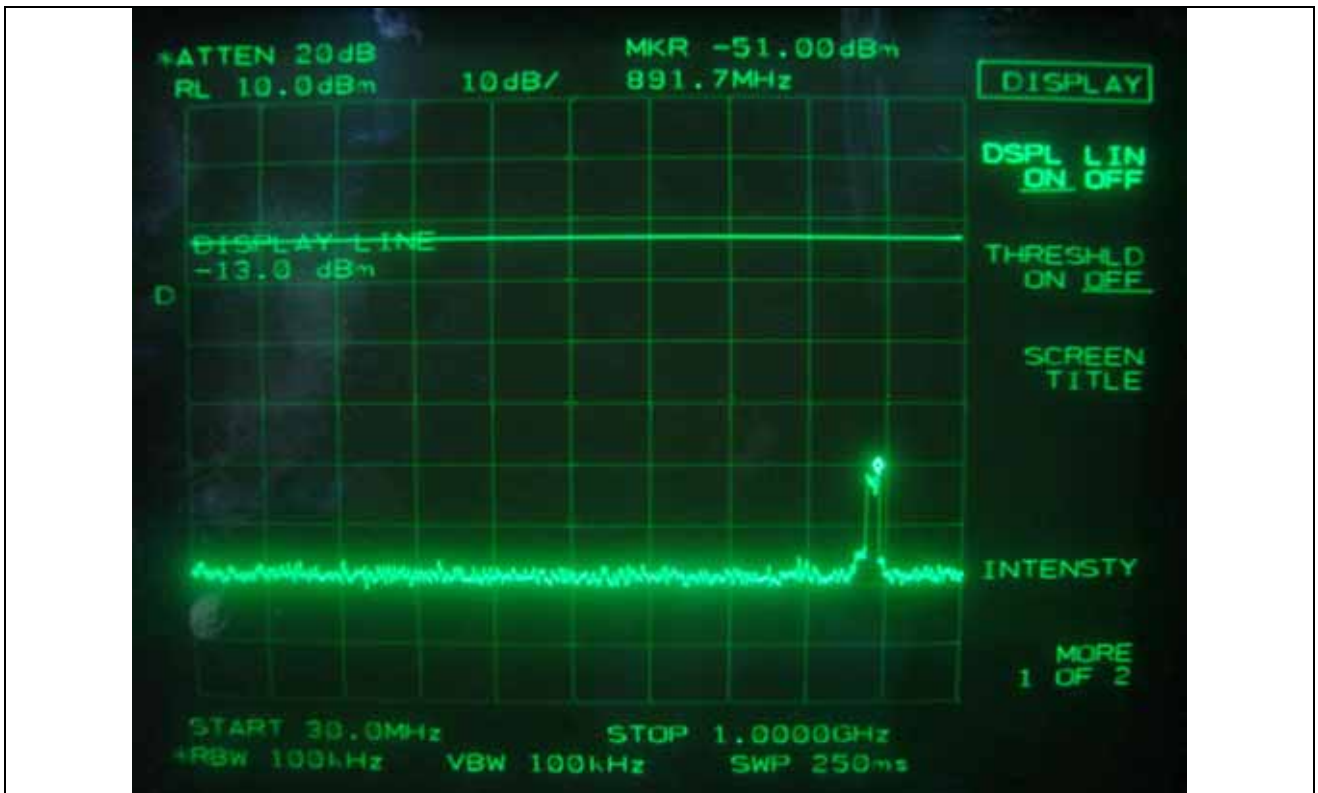

Downlink: 1xEVDO - High Channel

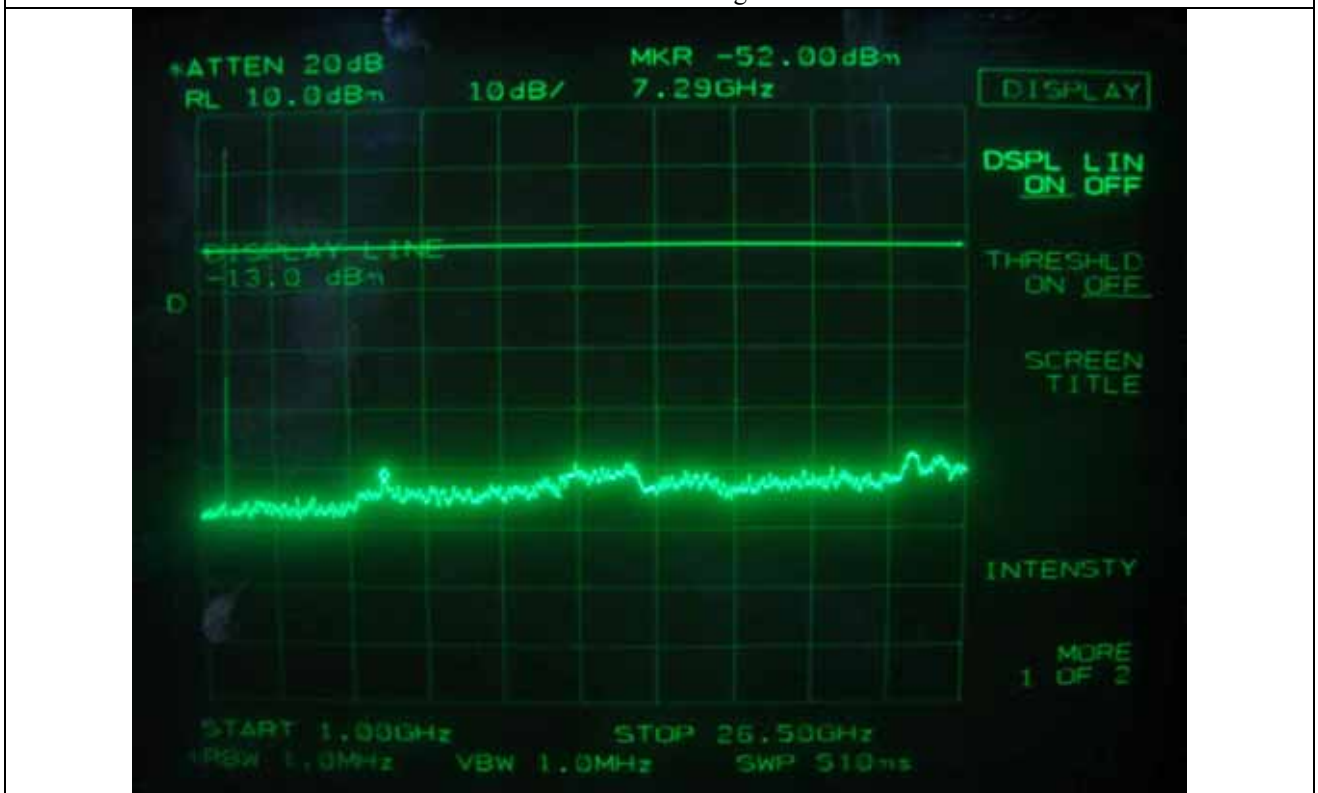

Downlink: 1xEVDO - High Channel


9. SPURIOUS EMISSION AT ANTENNA TERMINAL AT BLOCK EDGES ± 1 MHz

9.1 Operating environment

Temperature : 24 °C
Relative humidity : 48.2 %R.H.

9.2 Test set-up for conducted measurement

The RF output port of the EUT was connected to the input of the spectrum analyzer. The software for RF control on the notebook PC was set to transmit maximum signal gain and bandwidth. The test was performed at three frequencies (low, middle, and high channels).

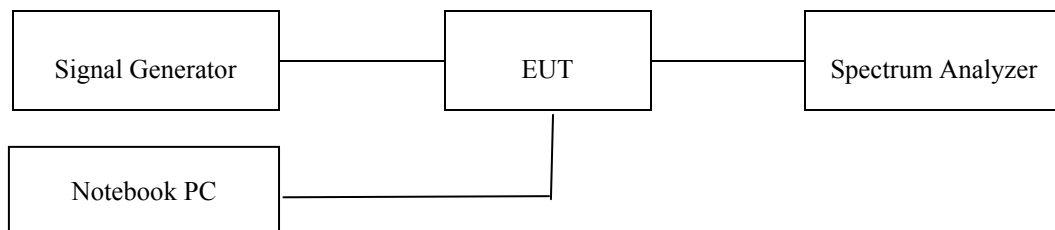

9.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
□ -	8564E	HP	Spectrum Analyzer	3650A00756	June 16, 2008
■ -	E4432B	HP	Signal Generator	US38440950	June 16, 2008
■ -	SMJ 100A	R/S	Vector Signal Generator	101037	June 19, 2007
■ -	FSP	R/S	Spectrum Analyzer	100017	Mar. 15, 2008

All test equipment used is calibrated on a regular basis.


9.4 Test data

-. Test Date : June 18, 2008
-. Result : PASS


9.4.1 Test result for Cellular Band

Mode	Modulation	Channel	Measured Frequency (MHz)	Max. Measured Value (dBm)	Limit (dBm)
Uplink	IS-95 CDMA	Low	824.86	-38.51	-13.0
		High	849.56	-38.31	
	CDMA2000	Low	824.86	-38.03	
		High	849.56	-38.51	
	1xEVDO	Low	824.86	-37.93	
		High	849.56	-38.32	
Downlink	IS-95 CDMA	Low	869.86	-59.11	-13.0
		High	894.56	-63.55	
	CDMA2000	Low	869.86	-58.33	
		High	894.56	-63.86	
	1xEVDO	Low	869.86	-58.98	
		High	894.56	-64.48	


According to the rule, out of band emission shall be attenuated by $43 + 10 \log (P)$ dBc, equates to -13.0dBm.




Tested by: Ki-Hong, Nam / Project Engineer

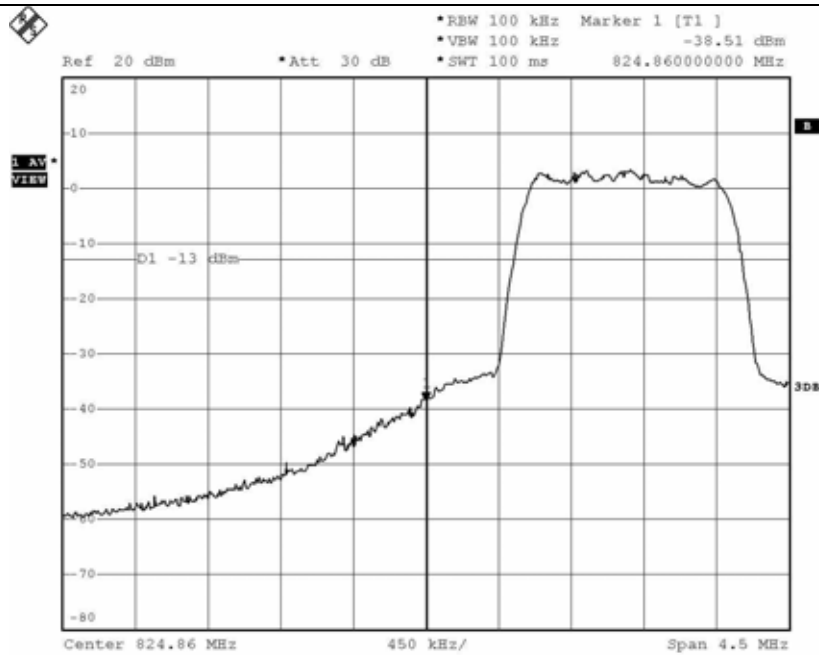


Uplink: IS-95 CDMA - Band Edge-Low Channel

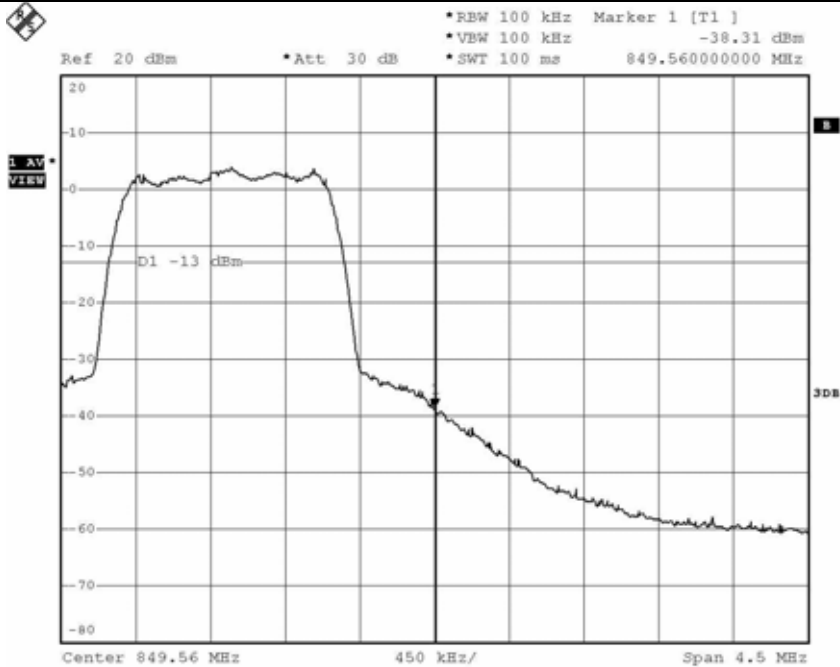


Uplink: IS-95 CDMA - Band Edge-High Channel

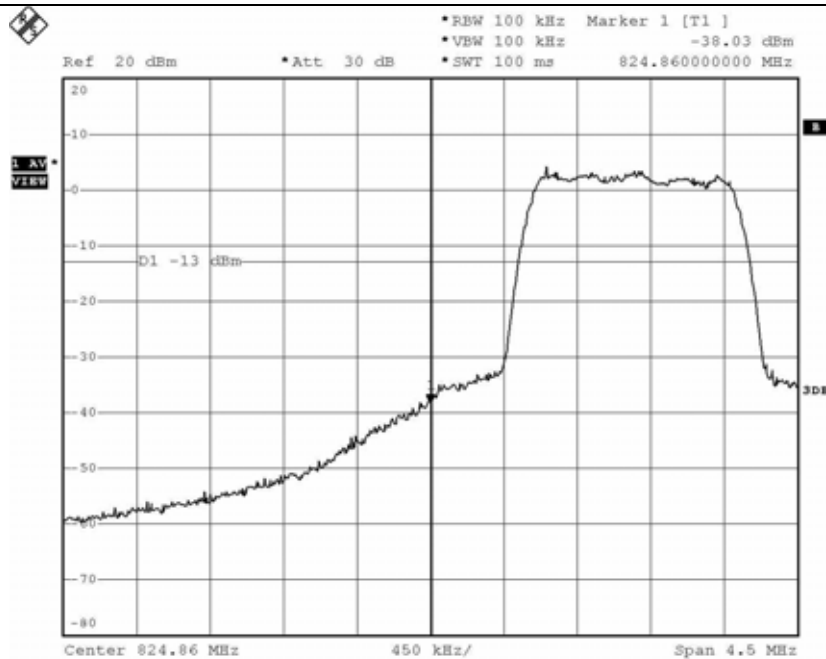


Uplink: CDMA2000 - Band Edge-Low Channel

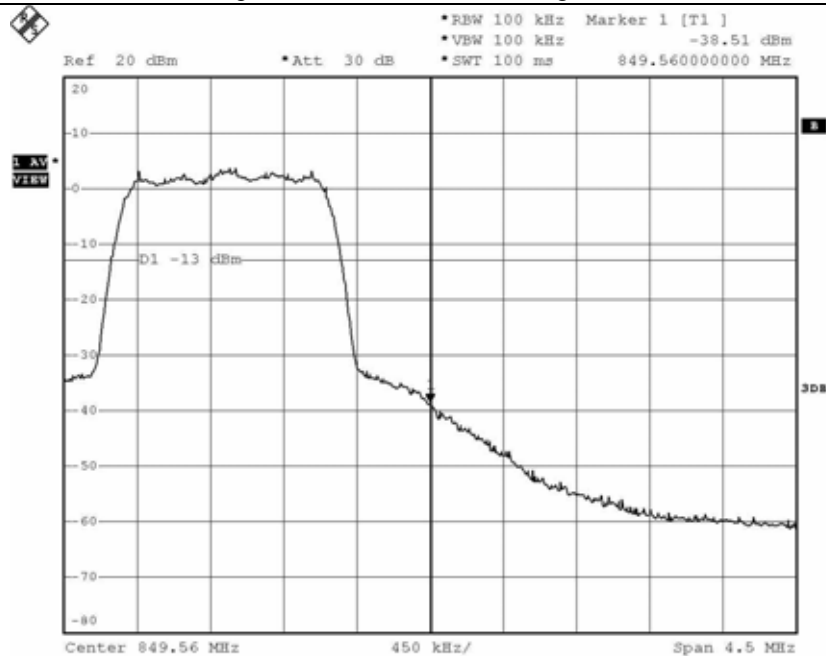


Uplink: CDMA2000 - Band Edge-High Channel

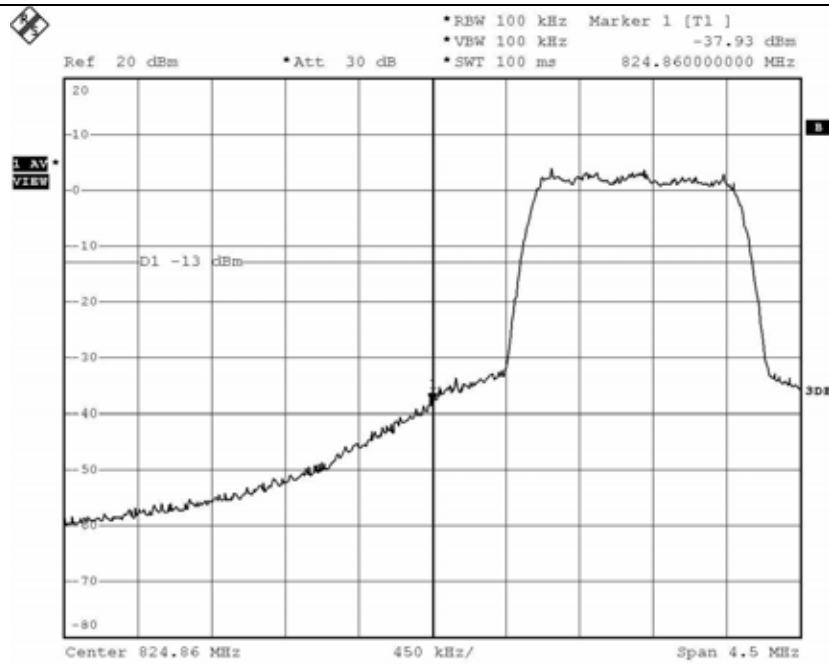


Uplink: 1xEVDO – Band Edge-Low Channel

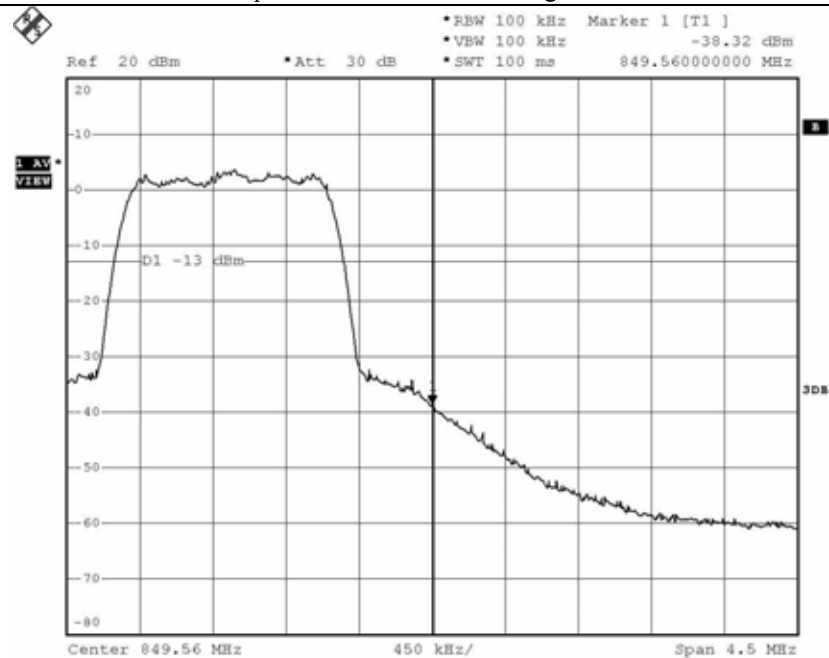


Uplink: 1xEVDO – Band Edge-High Channel

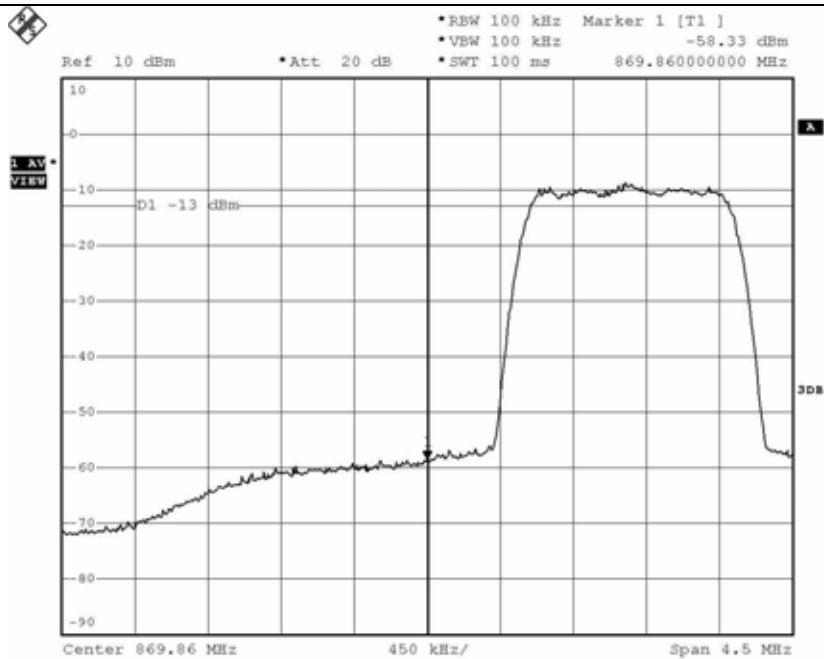


Downlink: IS-95 CDMA - Band Edge-Low Channel

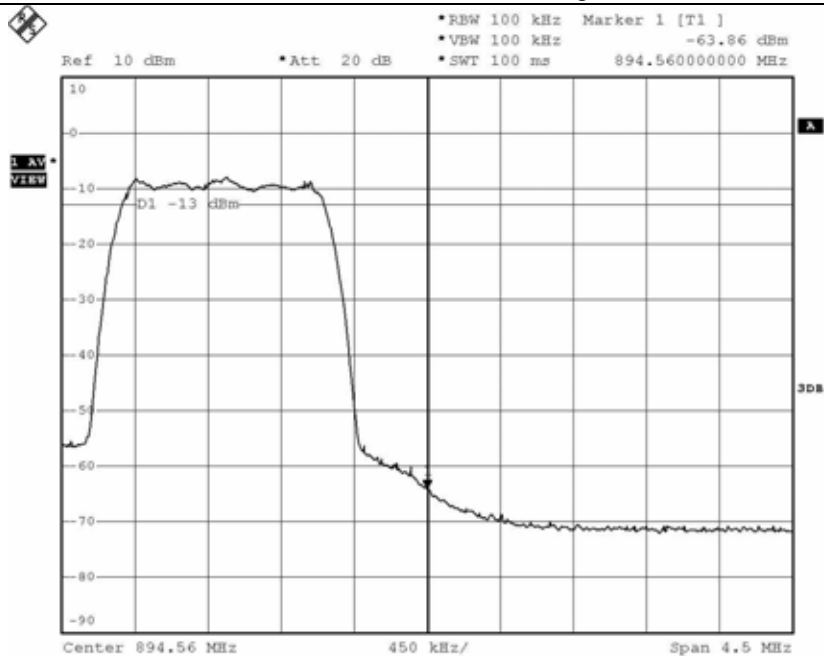


Downlink: IS-95 CDMA - Band Edge-High Channel

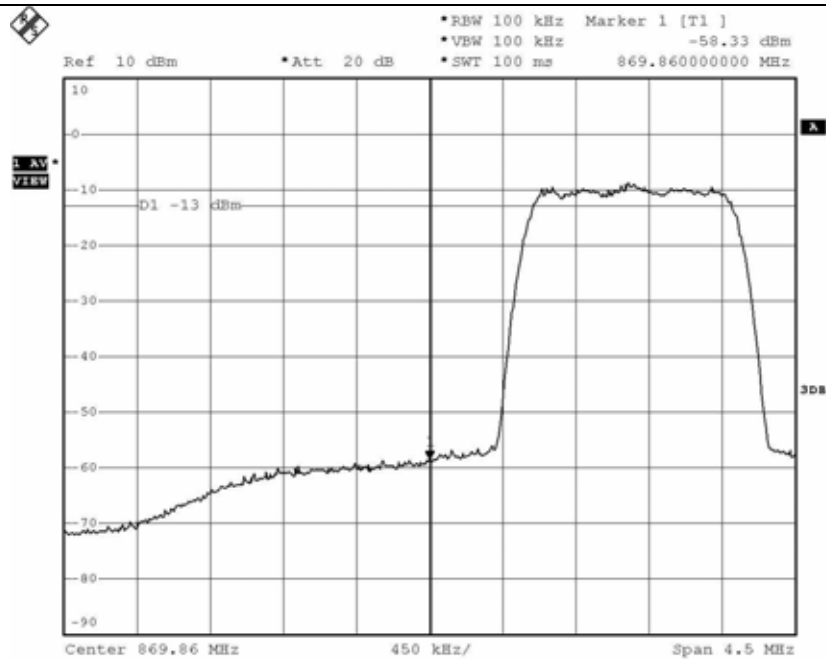


Downlink: CDMA2000 - Band Edge-Low Channel

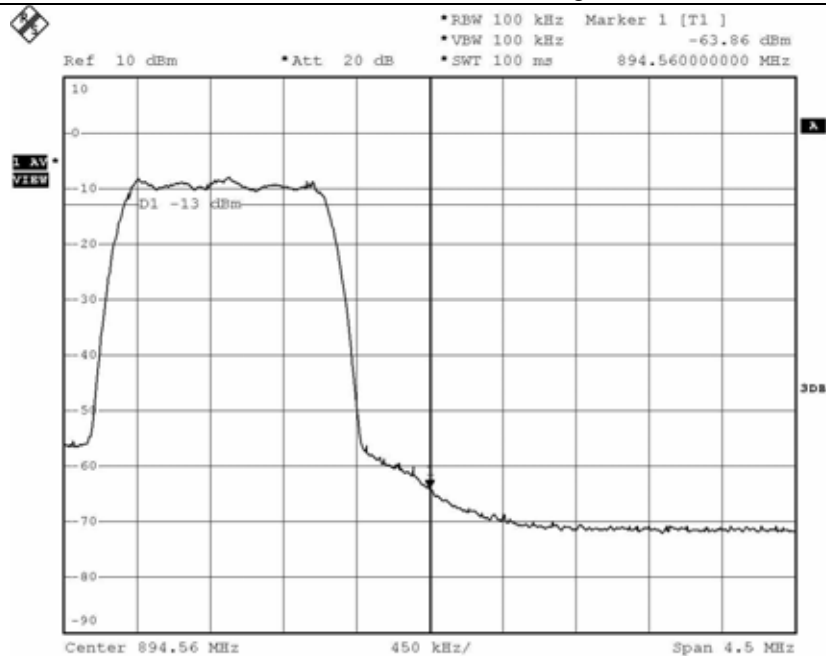

Downlink: CDMA2000 - Band Edge-High Channel

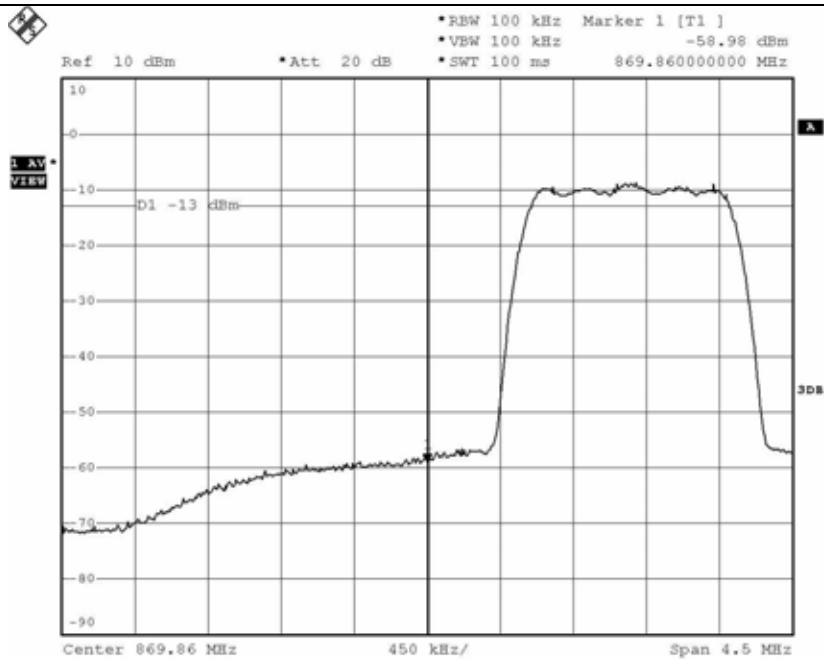

Downlink: 1xEVDO – Band Edge-Low Channel

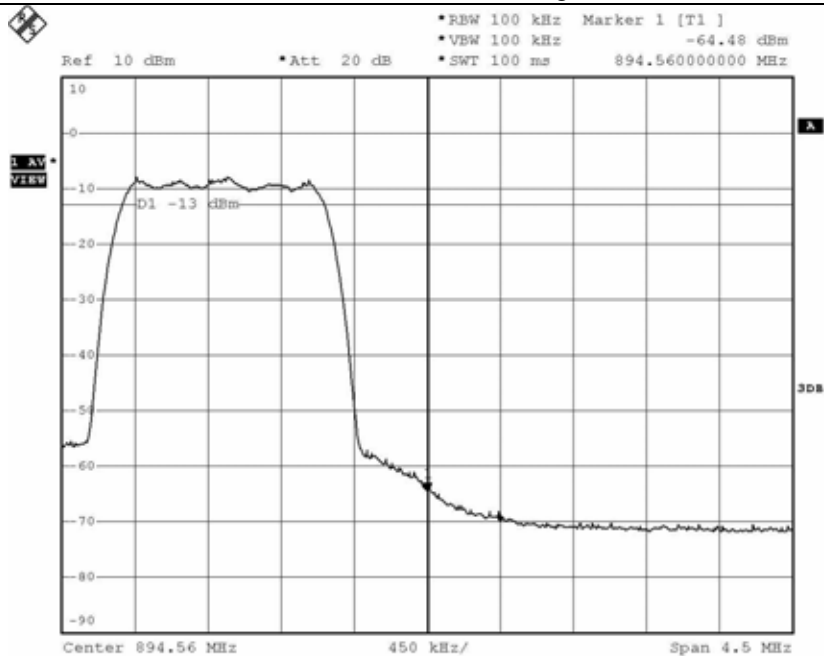


Downlink: 1xEVDO – Band Edge-High Channel


9.4.2 Test result for PCS Band

Mode	Modulation	Channel	Measured Frequency (GHz)	Max. Measured Value (dBm)	Limit (dBm)
Uplink	IS-95 CDMA	Low	1.850	-35.85	-13.0
		High	1.910	-38.11	
	CDMA2000	Low	1.850	-37.04	-13.0
		High	1.910	-38.14	
	1xEVDO	Low	1.850	-37.73	
		High	1.910	-37.96	
Downlink	IS-95 CDMA	Low	1.930	-43.61	-13.0
		High	1.990	-48.69	
	CDMA2000	Low	1.930	-43.12	-13.0
		High	1.990	-48.73	
	1xEVDO	Low	1.930	-44.01	
		High	1.990	-48.51	


According to the rule, out of band emission shall be attenuated by $43 + 10 \log (P)$ dBc, equates to -13.0dBm.




Tested by: Ki-Hong, Nam / Project Engineer

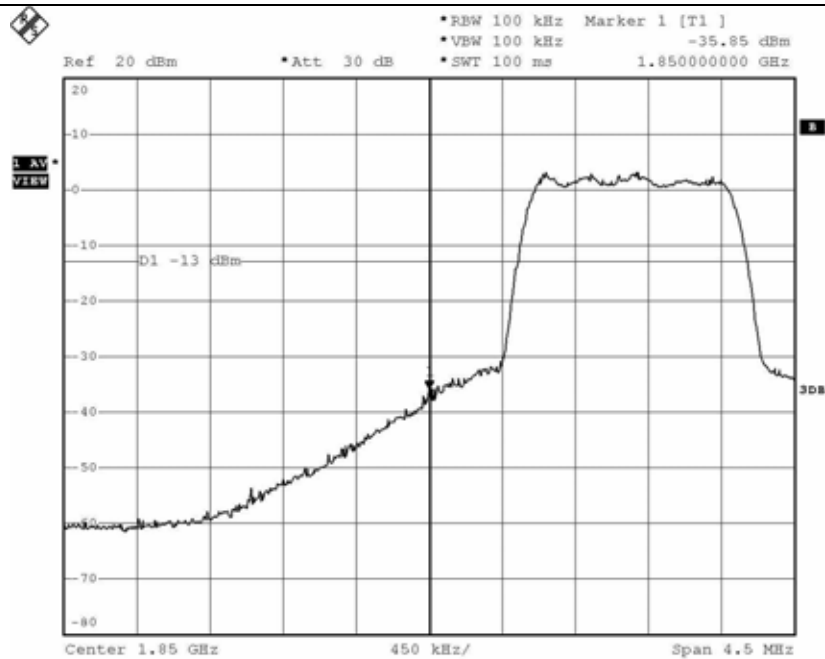


Uplink: IS-95 CDMA - Band Edge-Low Channel

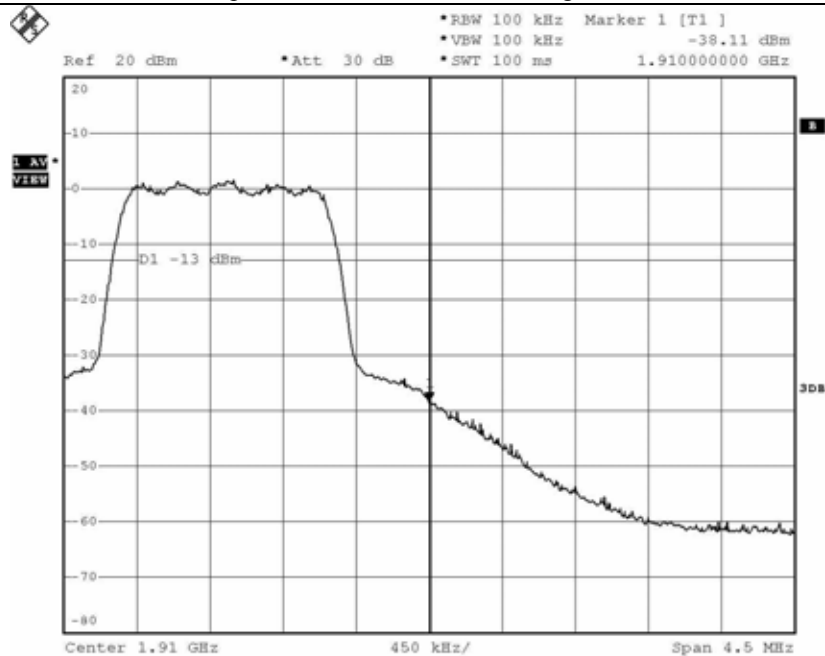


Uplink: IS-95 CDMA - Band Edge-High Channel

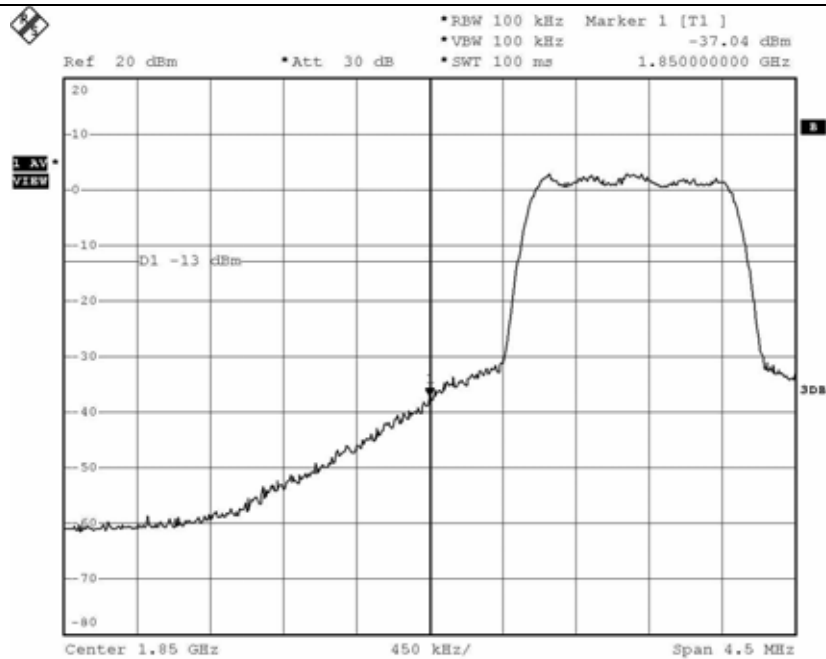


Uplink: CDMA2000 - Band Edge-Low Channel

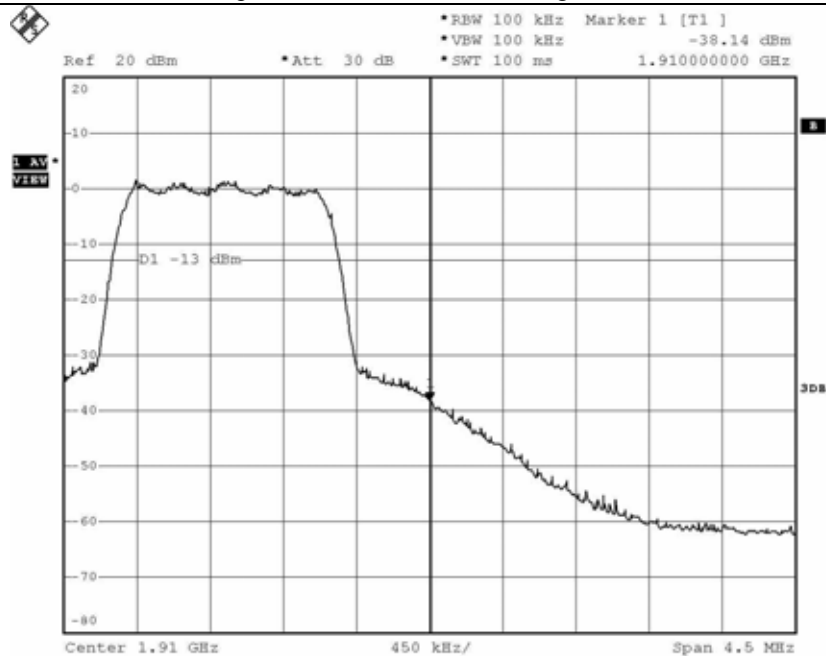


Uplink: CDMA2000 - Band Edge-High Channel

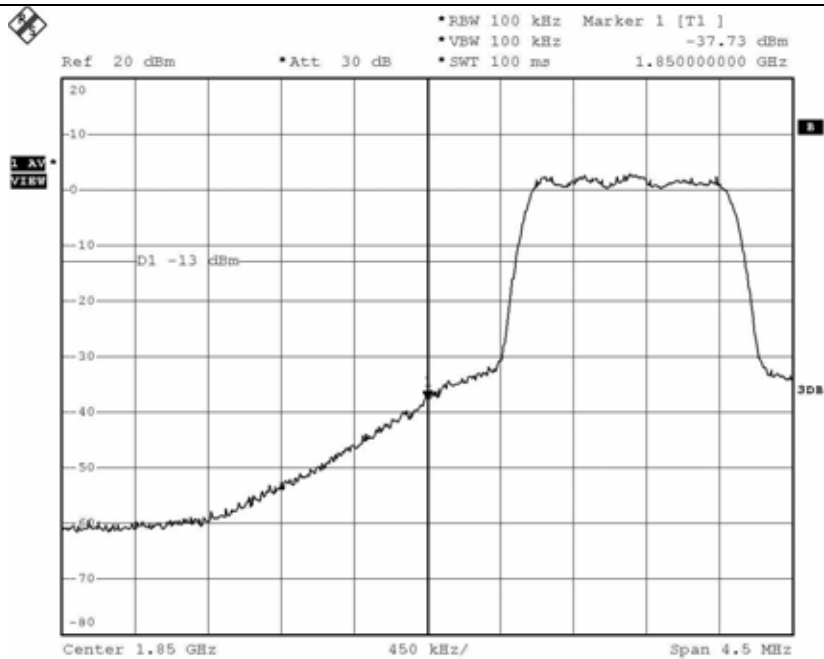


Uplink: 1xEVDO – Band Edge-Low Channel

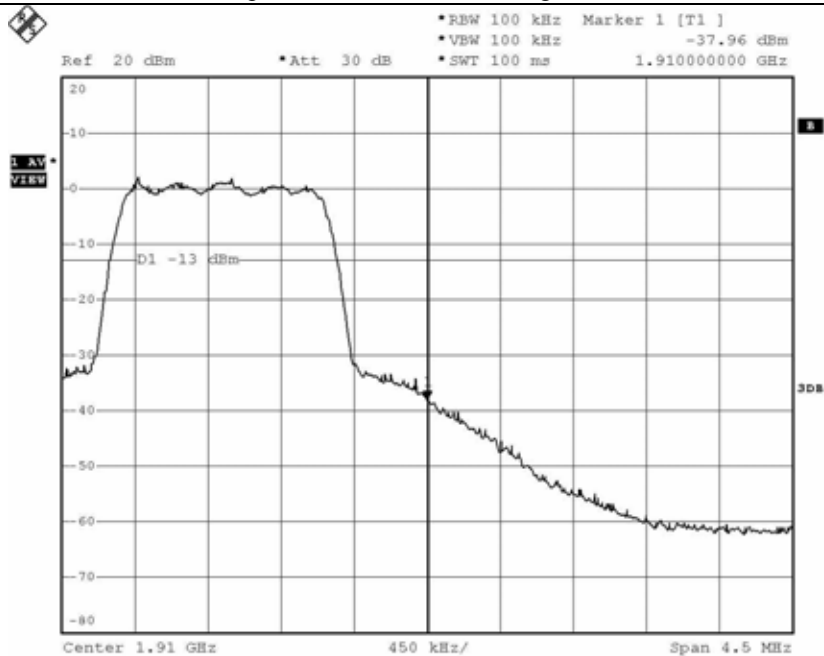


Uplink: 1xEVDO – Band Edge-High Channel

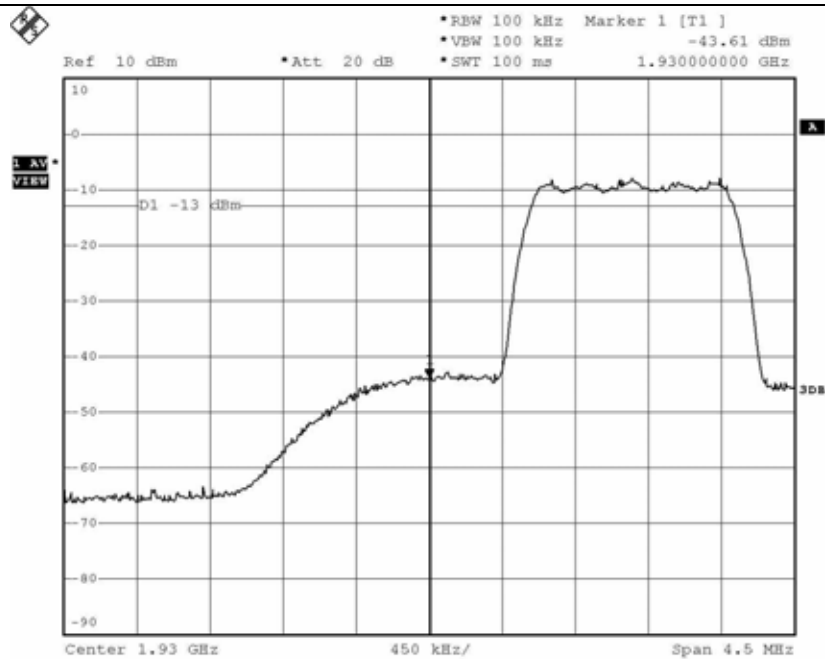


Downlink: IS-95 CDMA - Band Edge-Low Channel

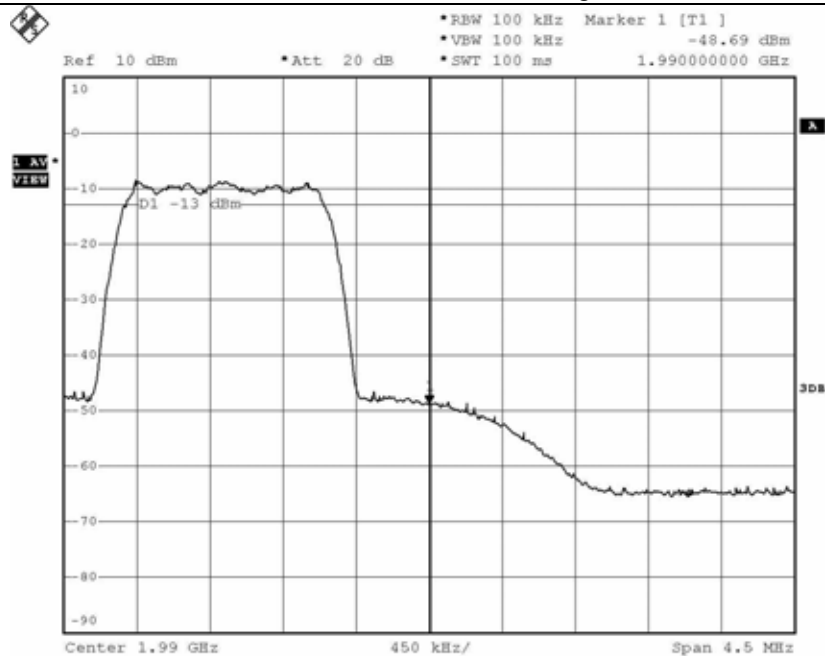


Downlink: IS-95 CDMA - Band Edge-High Channel

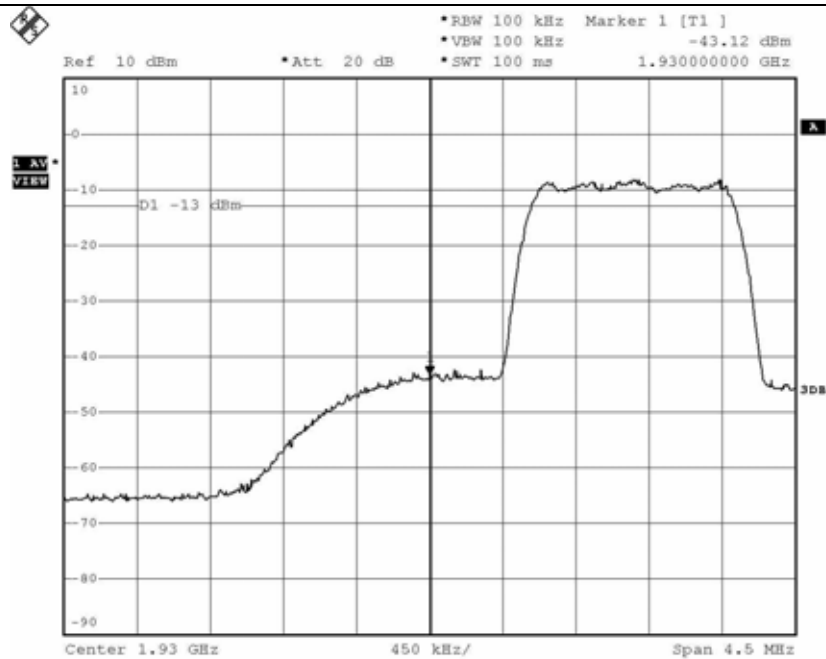


Downlink: CDMA2000 - Band Edge-Low Channel

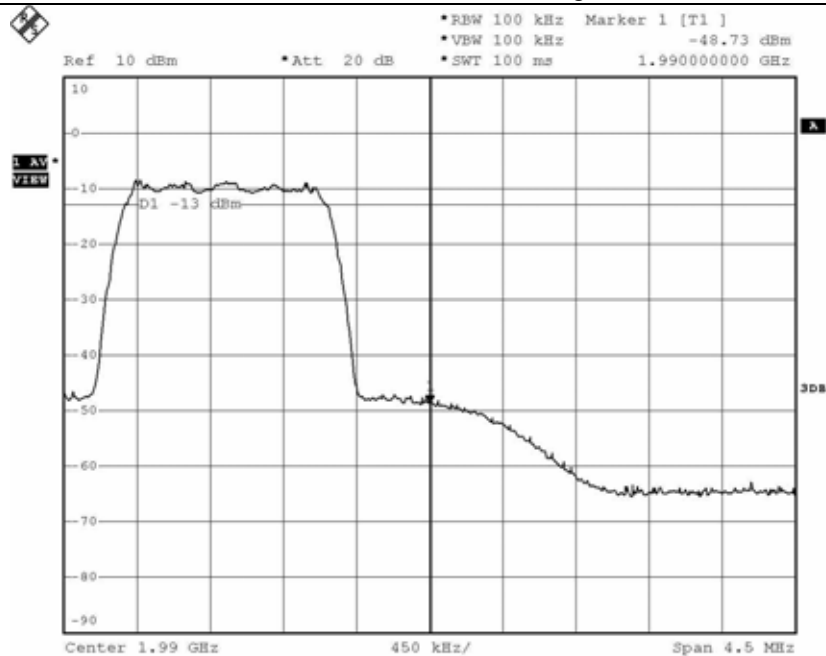

Downlink: CDMA2000 - Band Edge-High Channel

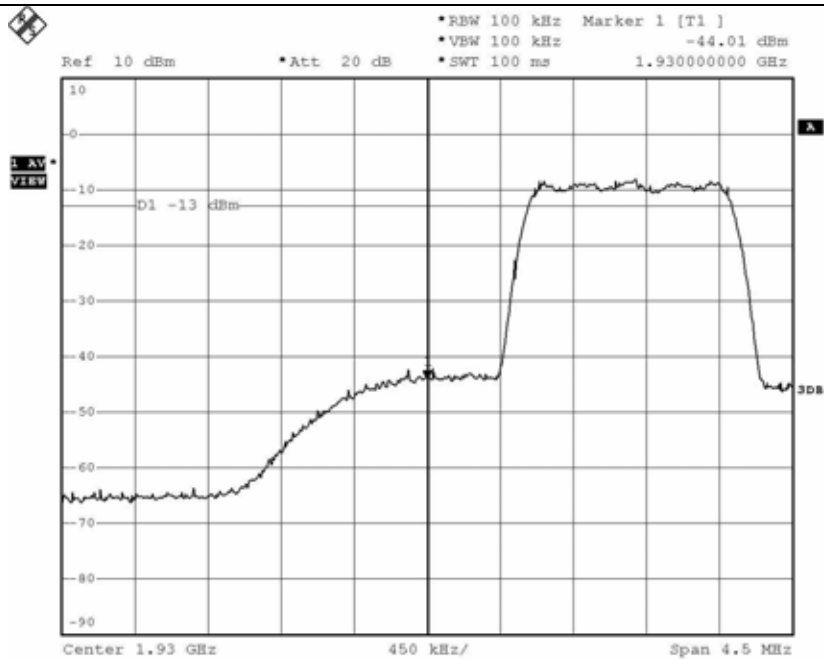

Downlink: 1xEVDO – Band Edge-Low Channel

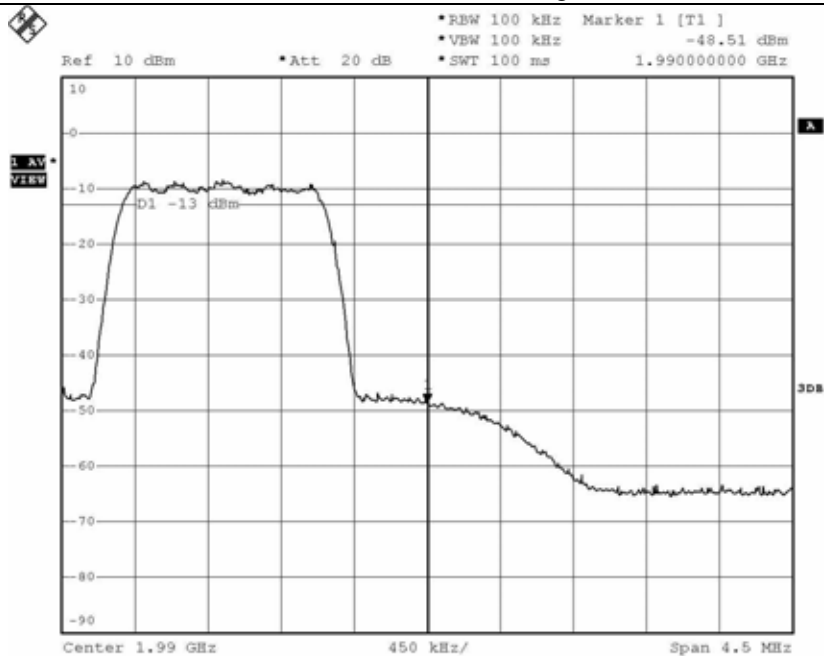

Downlink: 1xEVDO – Band Edge-High Channel


10. INTERMODULATION TEST

10.1 Operating environment

Temperature : 25.5 °C
Relative humidity : 50.8 %R.H.

10.2 Test set-up

The RF output port of the EUT was connected to the input of the spectrum analyzer. The resolution bandwidth, 100 kHz and video bandwidth, 100 kHz of the spectrum analyzer was set and sufficient scans were taken to show any out of band emissions up to 10th harmonic. The attenuator of the EUT was set to zero by the software for RF control on the notebook PC. Two input signals are equal in level and were sent to the input of the EUT.

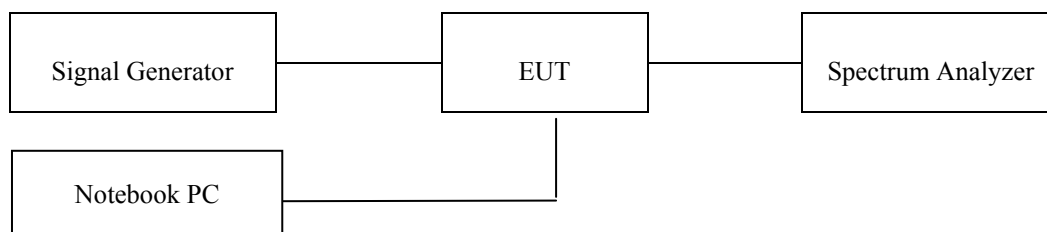

10.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	8564E	HP	Spectrum Analyzer	3650A00756	June 16, 2008
■ -	E4432B	HP	Signal Generator	US38440950	June 16, 2008
■ -	SMJ 100A	R/S	Vector Signal Generator	101037	June 19, 2007
□ -	FSP	R/S	Spectrum Analyzer	100017	Mar. 15, 2008

All test equipment used is calibrated on a regular basis.


10.4 Test data

-. Test Date : June 21, 2008
-. Test Result : PASS



10.4.1 Test result for Cellular Band


Mode	Modulation	Channel	Measured
Uplink	IS-95 CDMA	Low	< -13dBm
		High	< -13dBm
	CDMA2000	Low	< -13dBm
		High	< -13dBm
	1xEVDO	Low	< -13dBm
		High	< -13dBm
Downlink	IS-95 CDMA	Low	< -13dBm
		High	< -13dBm
	CDMA2000	Low	< -13dBm
		High	< -13dBm
	1xEVDO	Low	< -13dBm
		High	< -13dBm

Remark: 1. Intermodulation products must be attenuated below the rated power of the EUT at least $43 + 10\log(P_w)$, equivalent to -13dBm.
2. The emissions from other frequencies except for screen captured in next pages were almost same with spurious emission test data, so the data were not included in this test report.




Tested by: Ki-Hong, Nam / Project Engineer

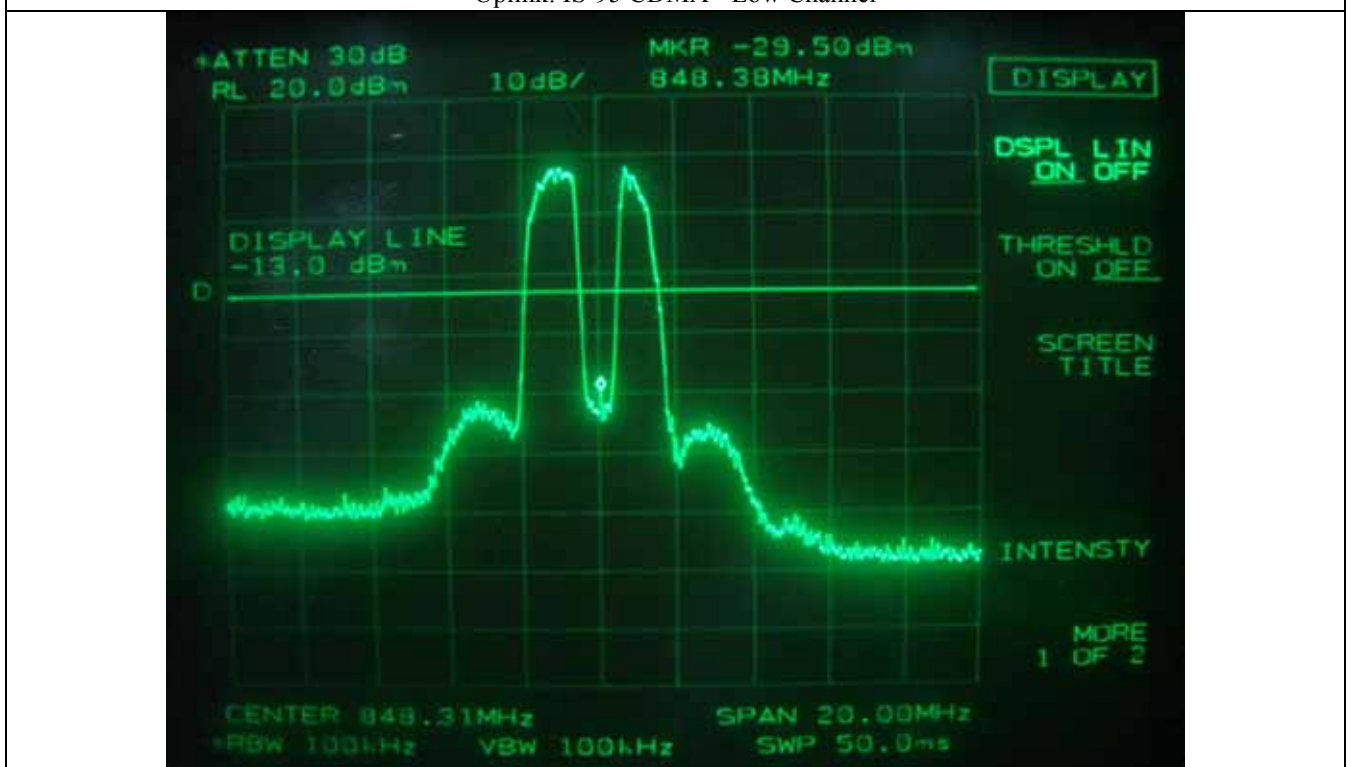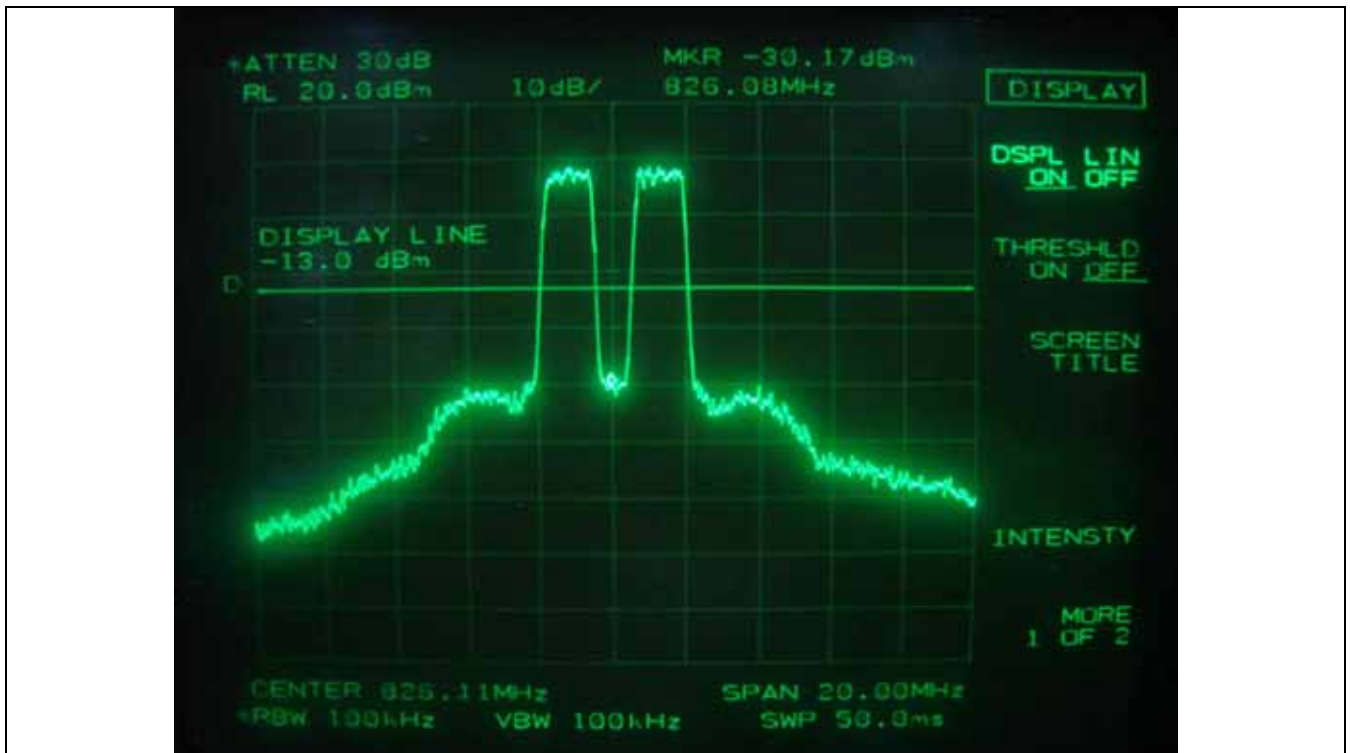


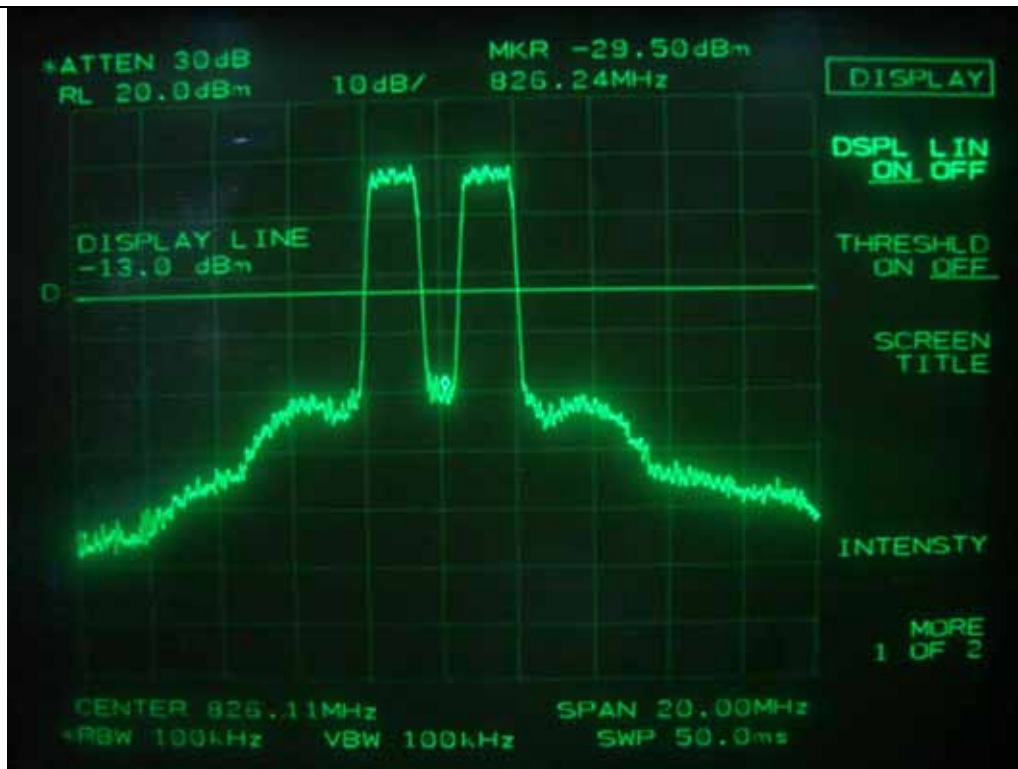


Uplink: CDMA2000 - Low Channel

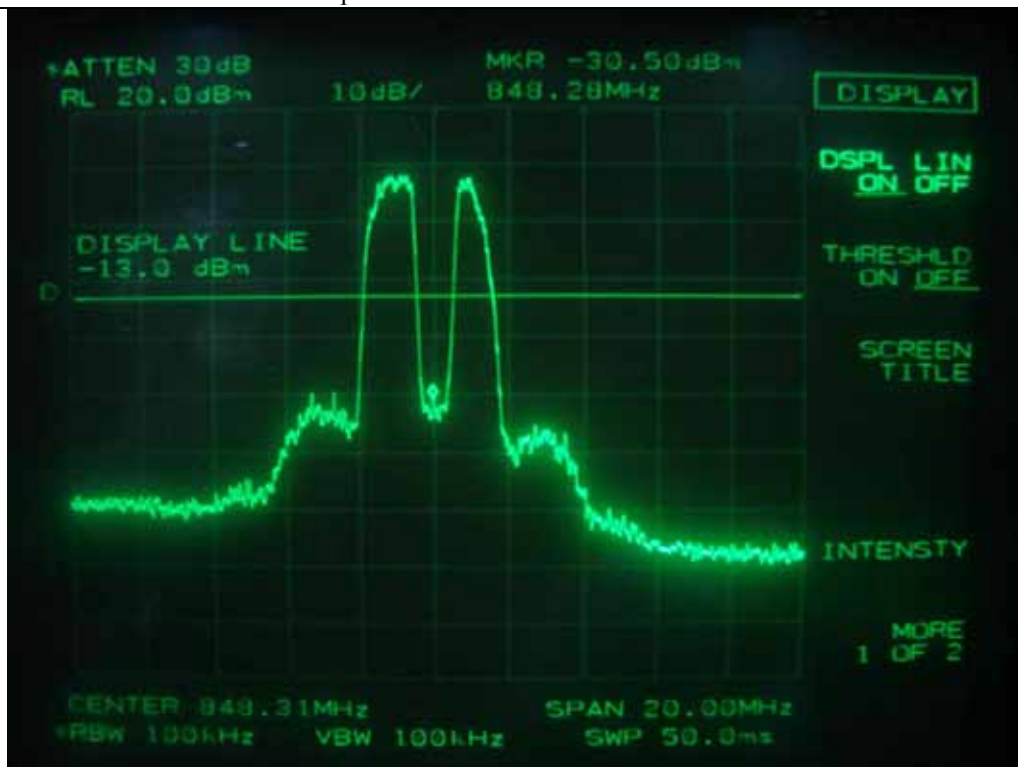


Uplink: CDMA2000 - High Channel

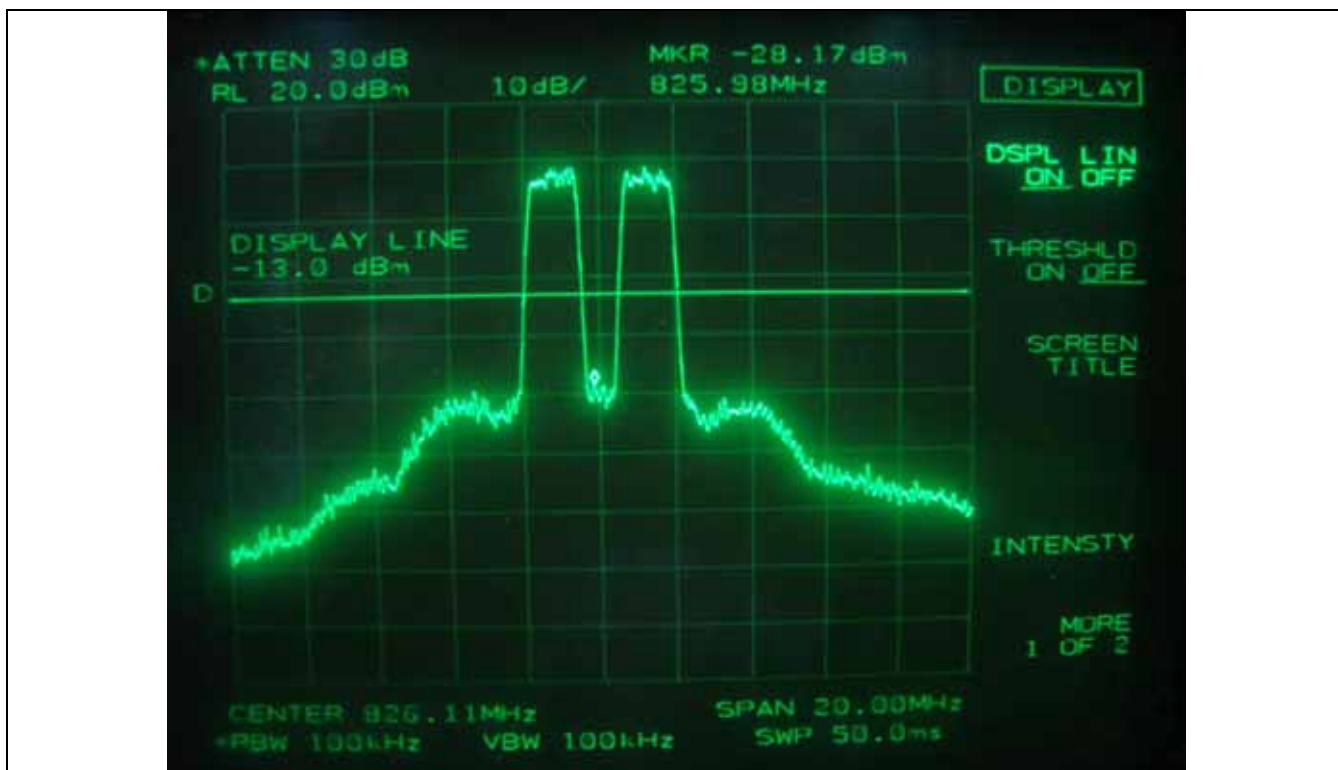


Uplink: 1xEVDO - Low Channel

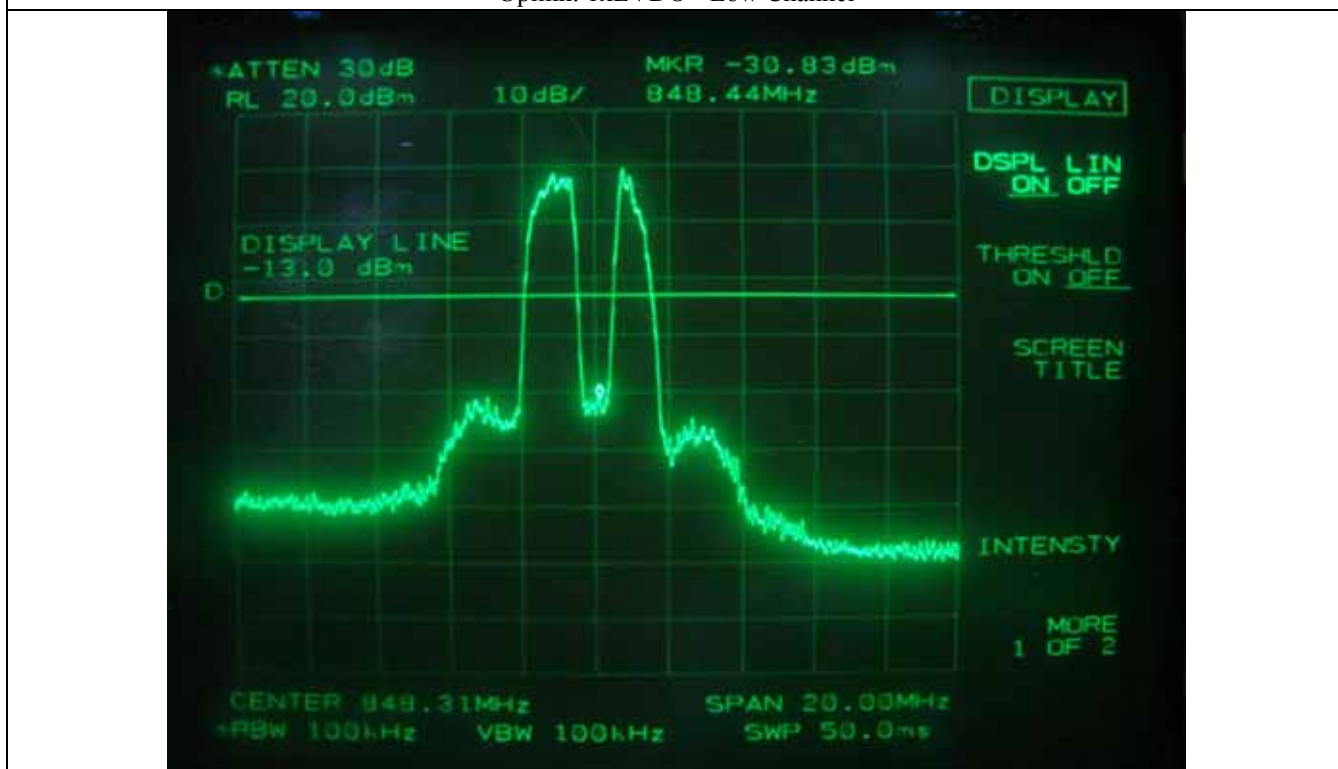


Uplink: 1xEVDO - High Channel

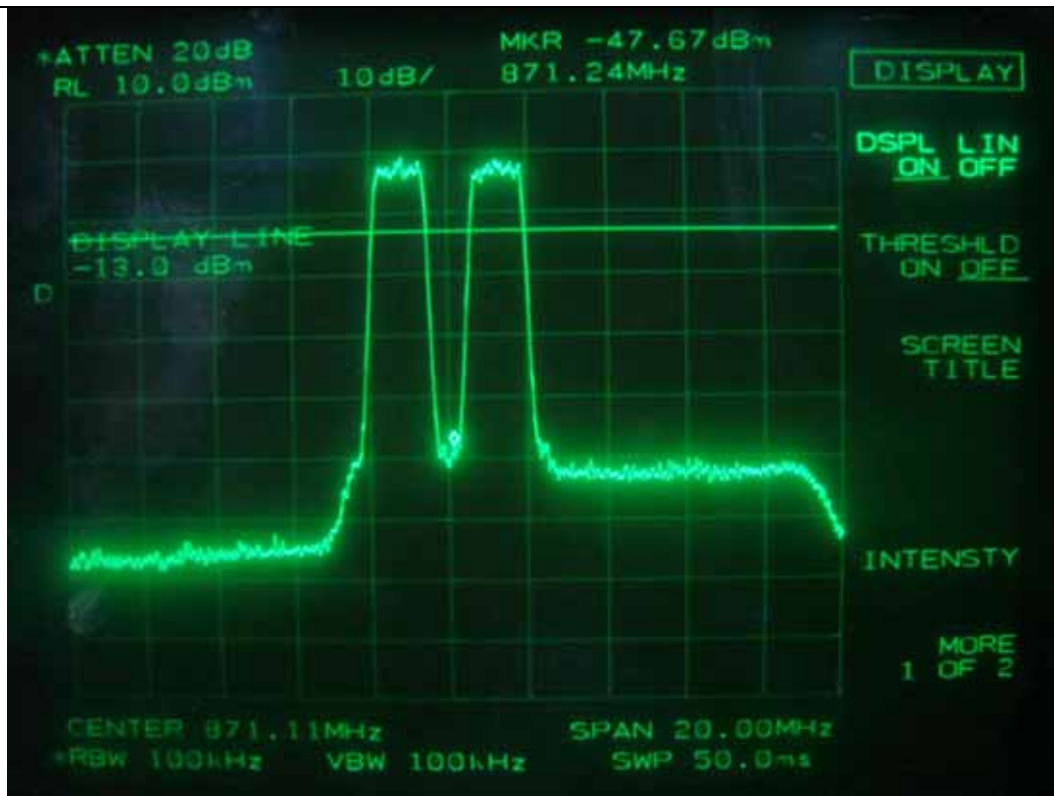


Downlink: IS-95 CDMA - Low Channel

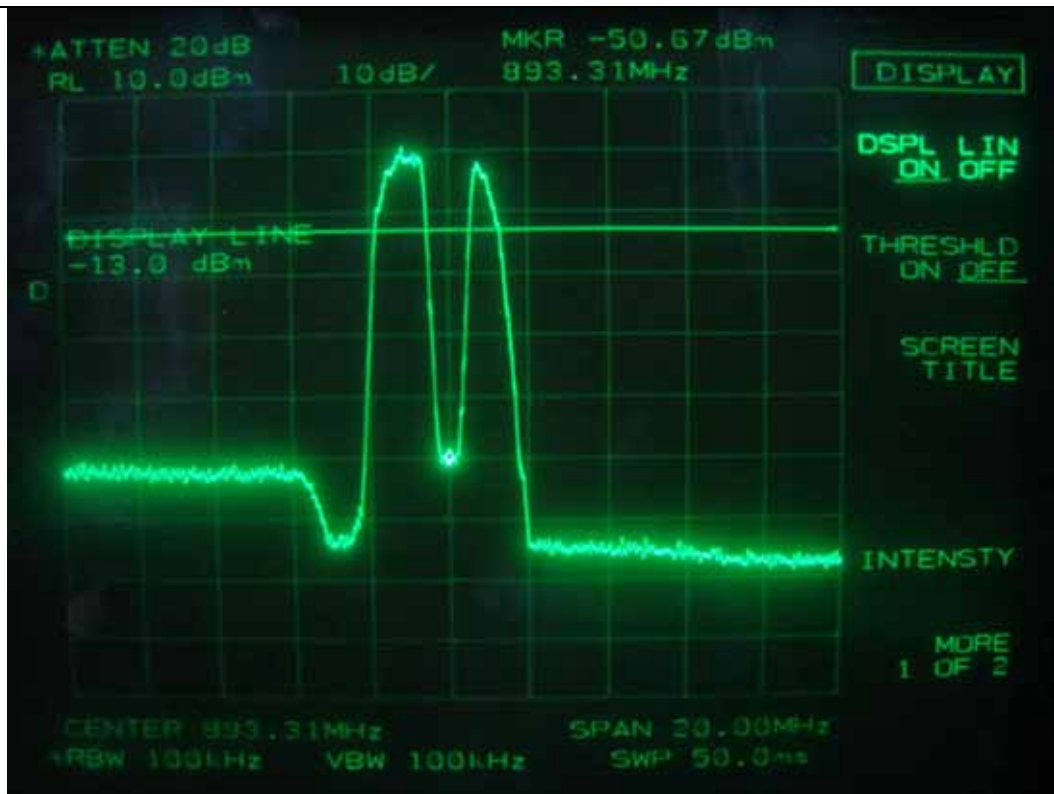


Downlink: IS-95 CDMA - High Channel

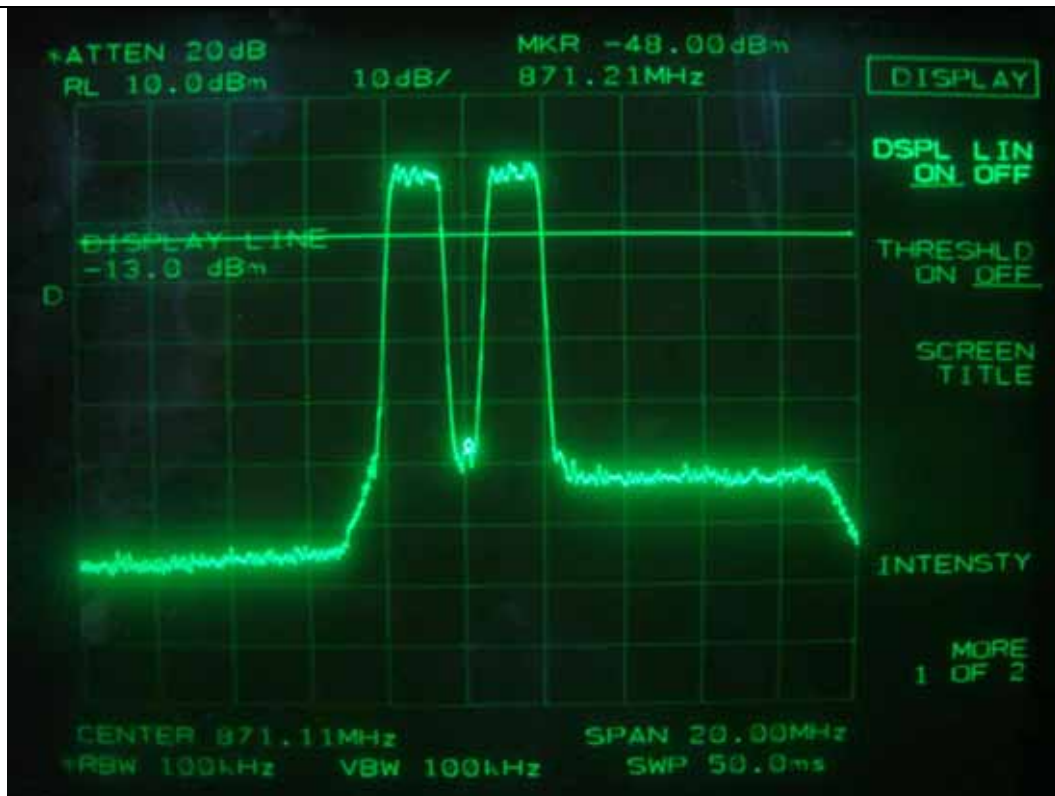


Downlink: CDMA2000 - Low Channel

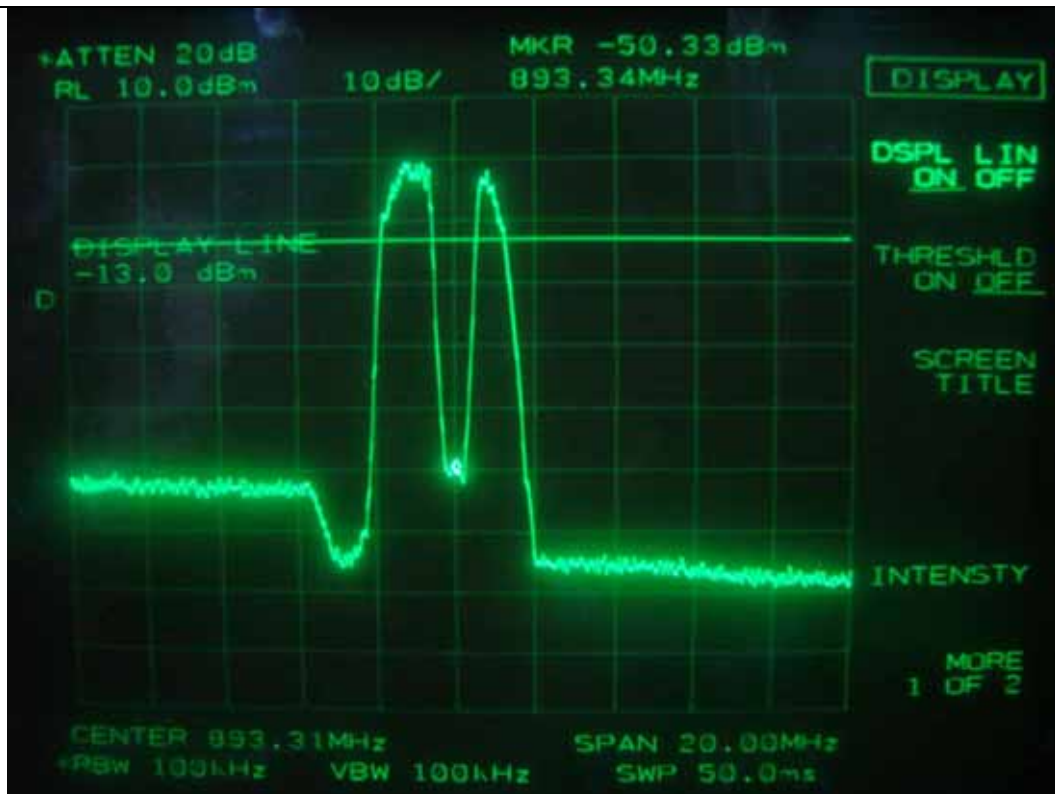

Downlink: CDMA2000 - High Channel

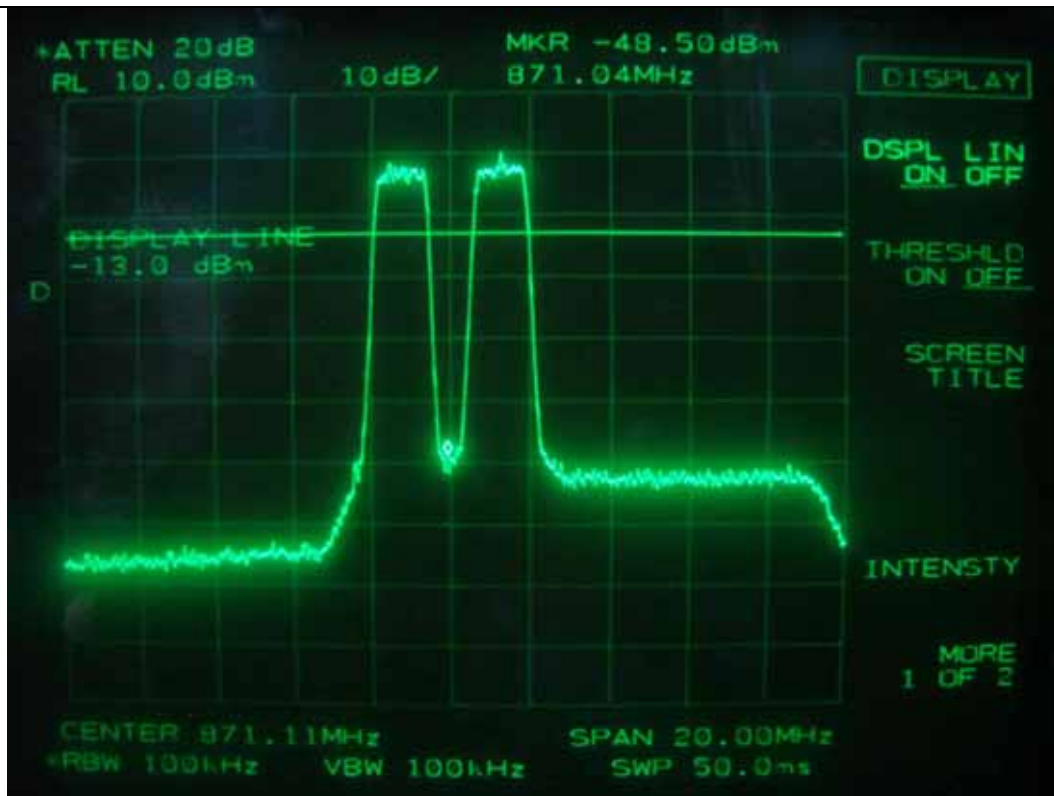

Downlink: 1xEVDO - Low Channel

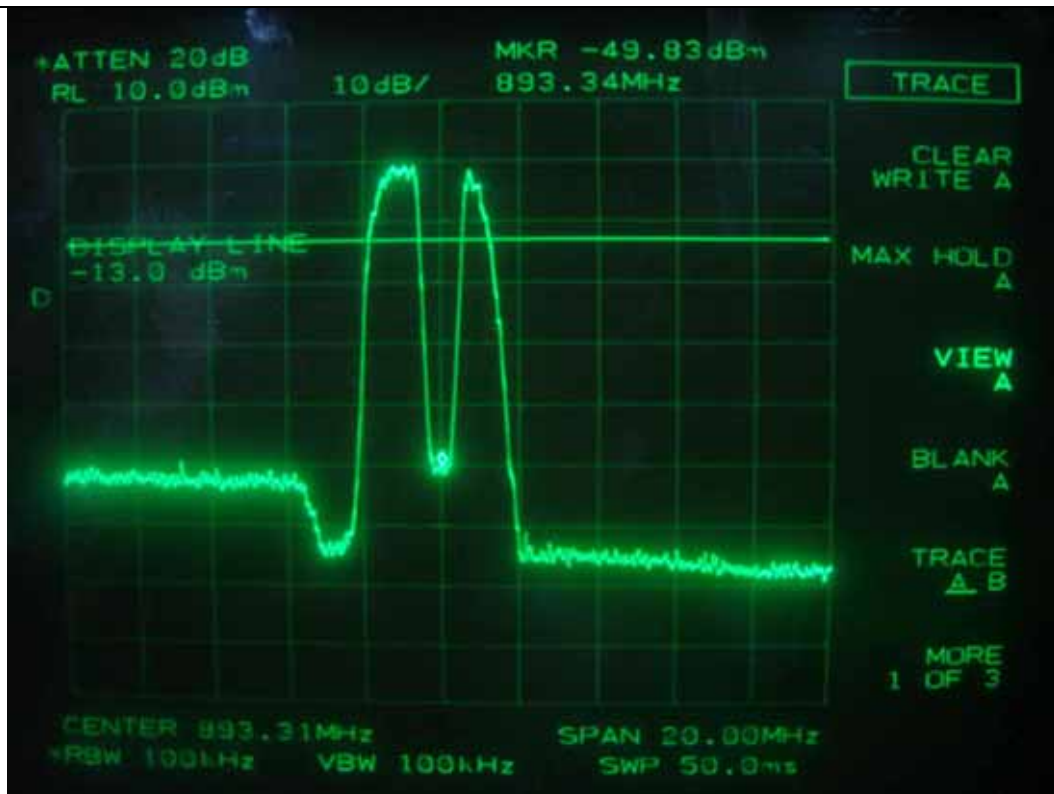


Downlink: 1xEVDO - High Channel

10.4.2 Test result for PCS Band


-. Test Date : June 21, 2008
-. Test Result : PASS

Mode	Modulation	Channel	Measured
Uplink	IS-95 CDMA	Low	< -13dBm
		High	< -13dBm
	CDMA2000	Low	< -13dBm
		High	< -13dBm
	1xEVDO	Low	< -13dBm
		High	< -13dBm
Downlink	IS-95 CDMA	Low	< -13dBm
		High	< -13dBm
	CDMA2000	Low	< -13dBm
		High	< -13dBm
	1xEVDO	Low	< -13dBm
		High	< -13dBm


Remark: 1. Intermodulation products must be attenuated below the rated power of the EUT at least $43 + 10\log(P_w)$, equivalent to -13dBm.
2. The emissions from other frequencies except for screen captured in next pages were almost same with spurious emission test data, so the data were not included in this test report.




Tested by: Ki-Hong, Nam / Project Engineer

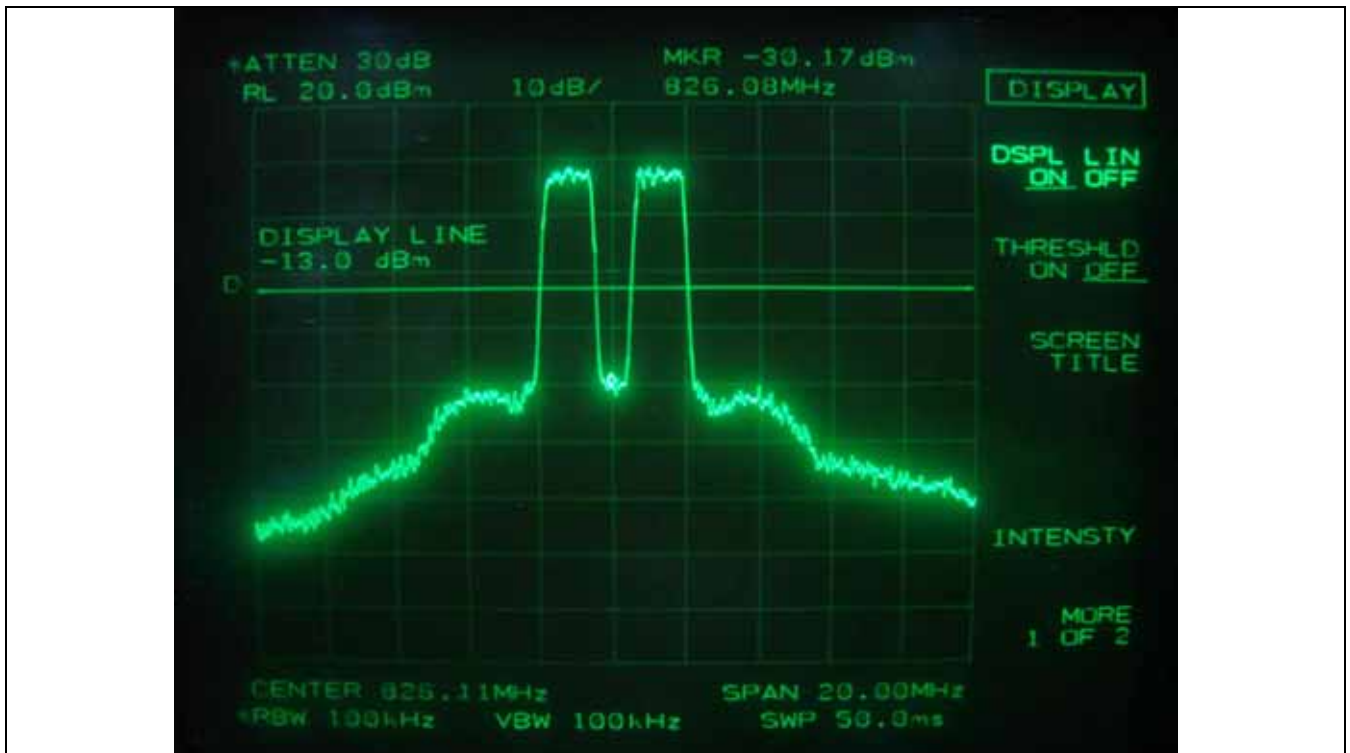


Uplink: IS-95 CDMA - Low Channel

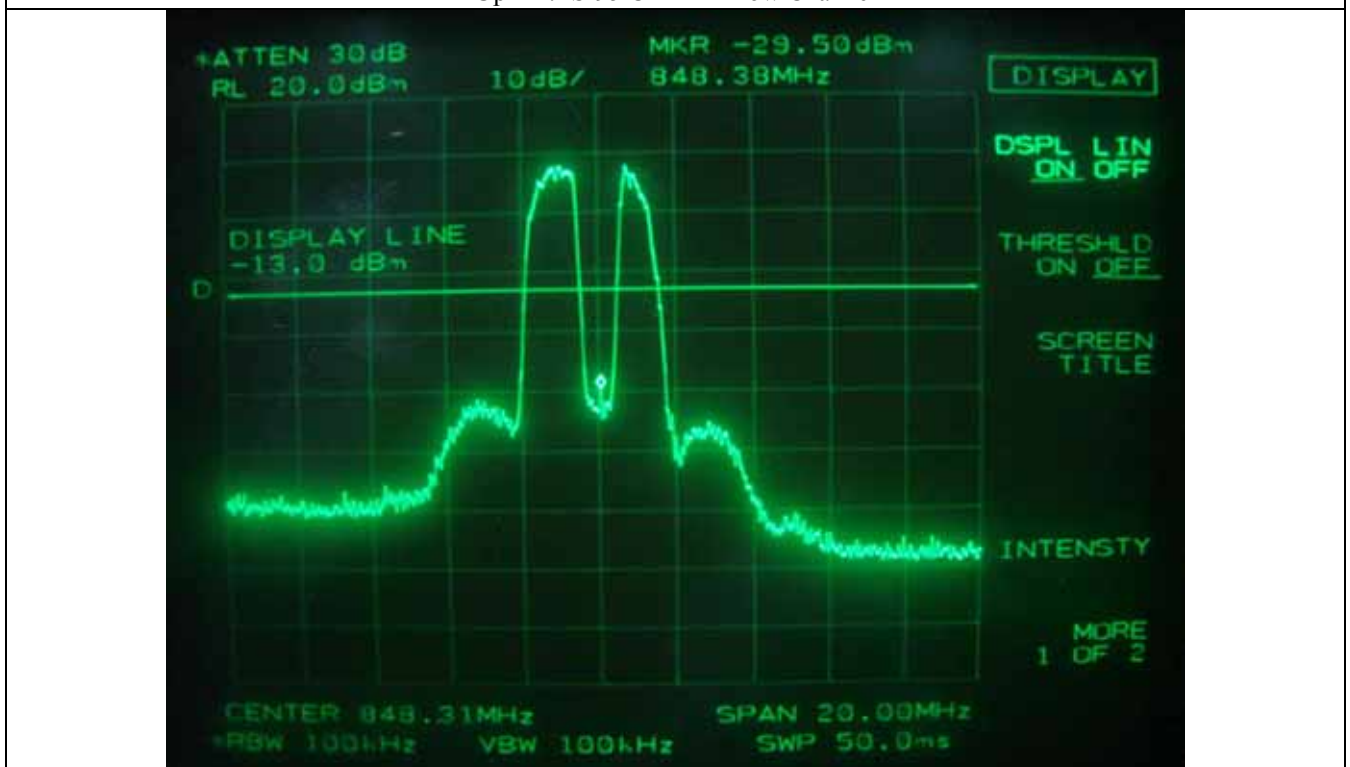

Uplink: IS-95 CDMA - High Channel

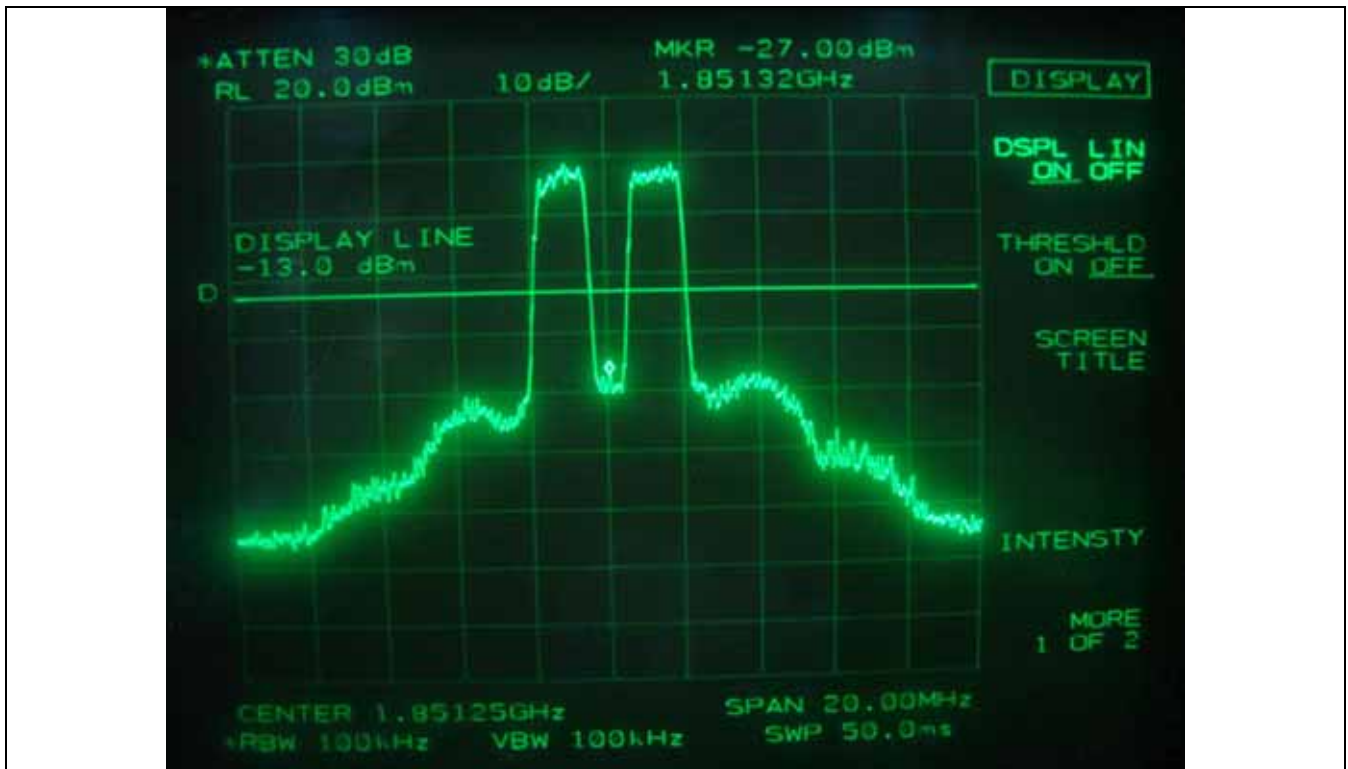


Uplink: CDMA2000 - Low Channel

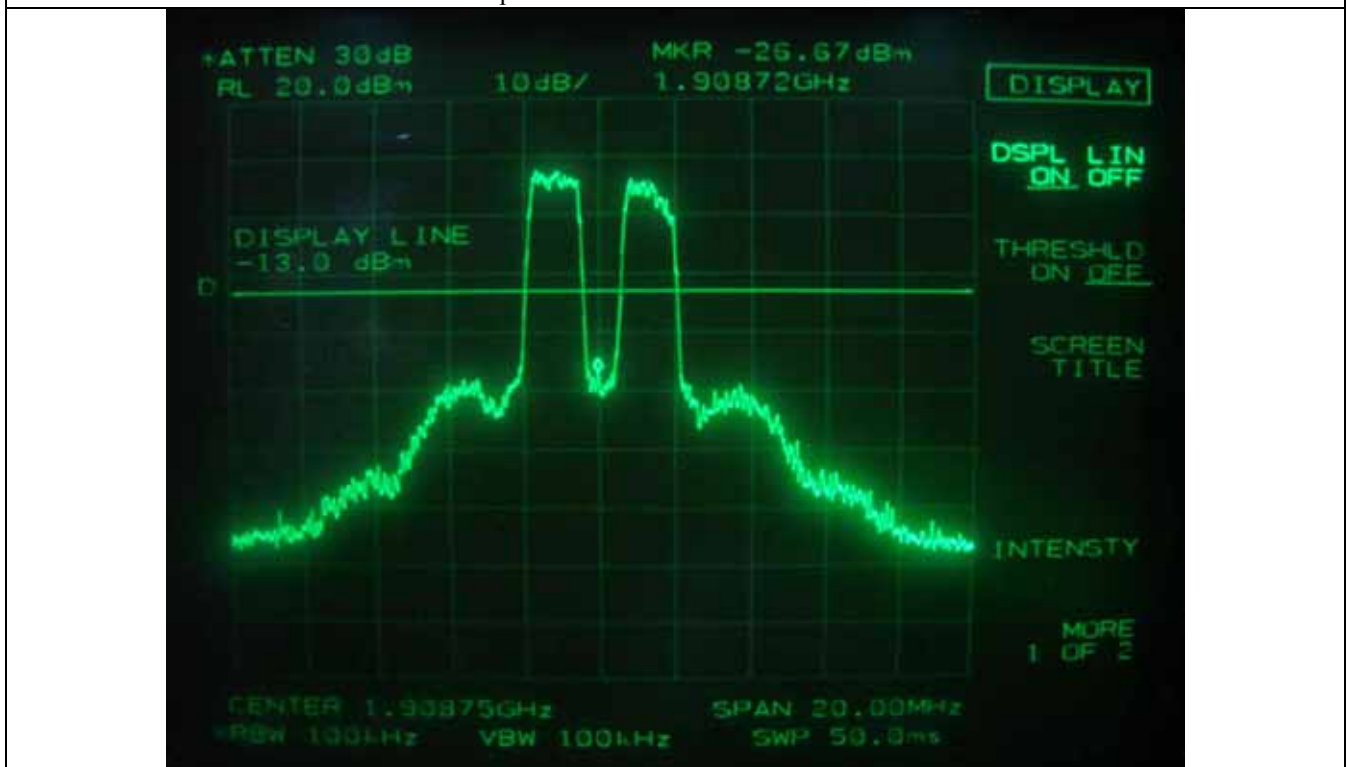


Uplink: CDMA2000 - High Channel




Uplink: 1xEVDO - Low Channel

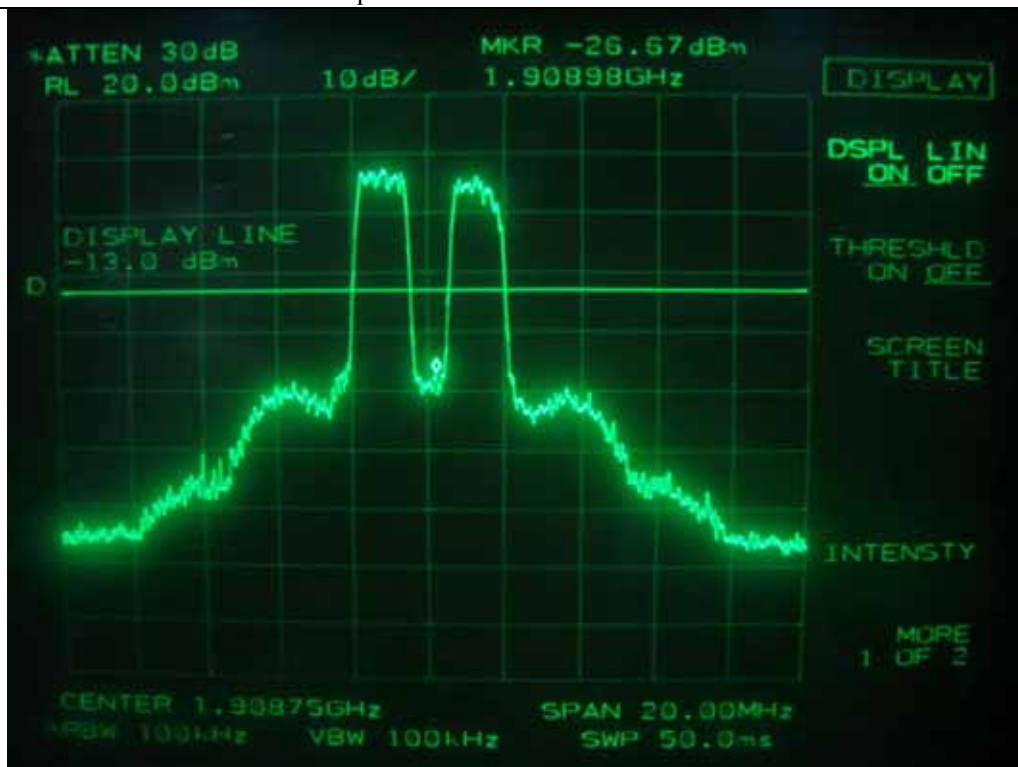


Uplink: 1xEVDO - High Channel

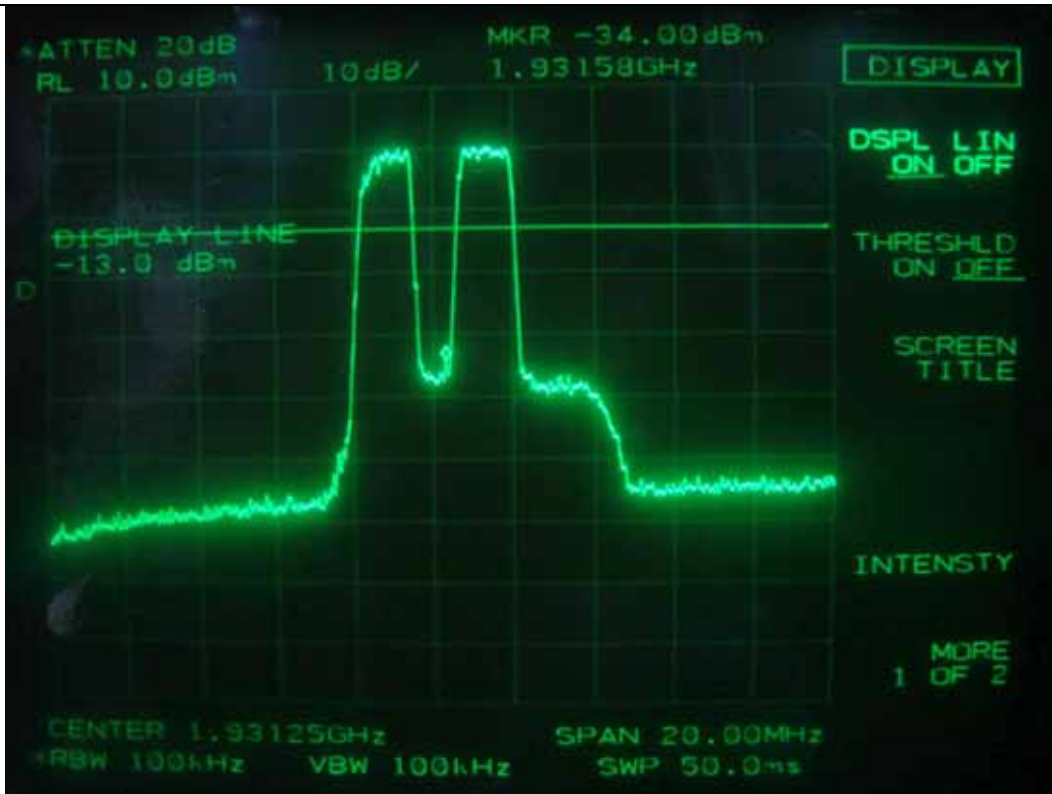


Downlink: IS-95 CDMA - Low Channel

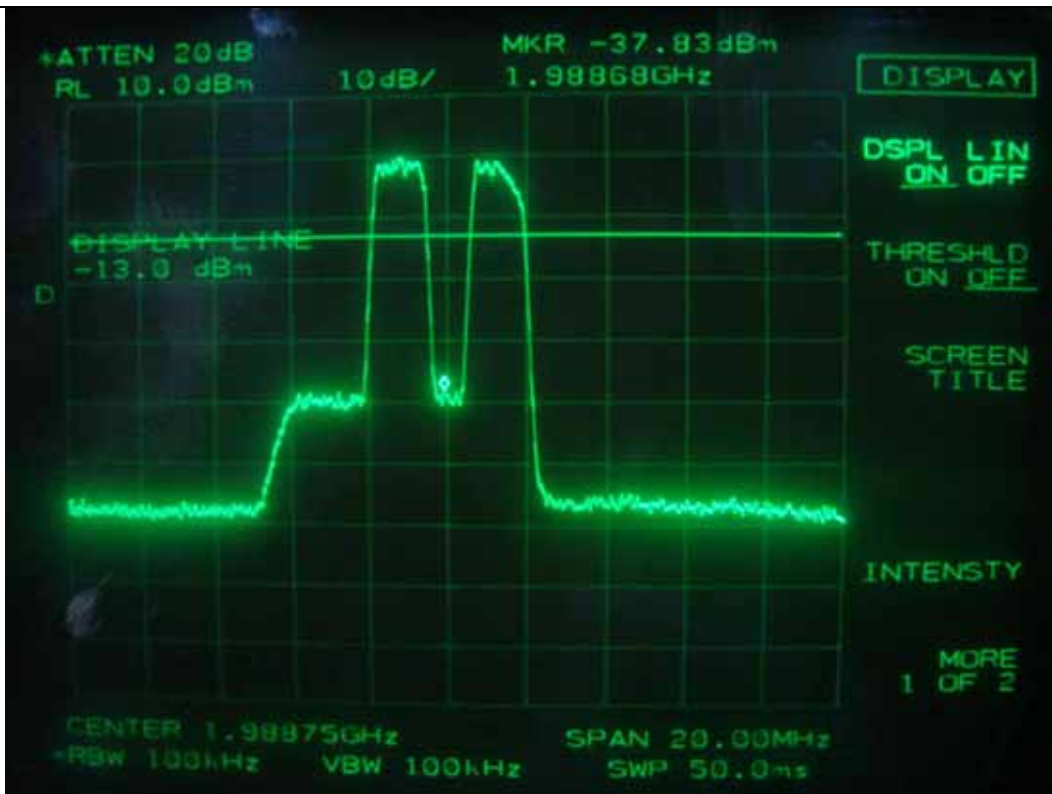


Downlink: IS-95 CDMA - High Channel

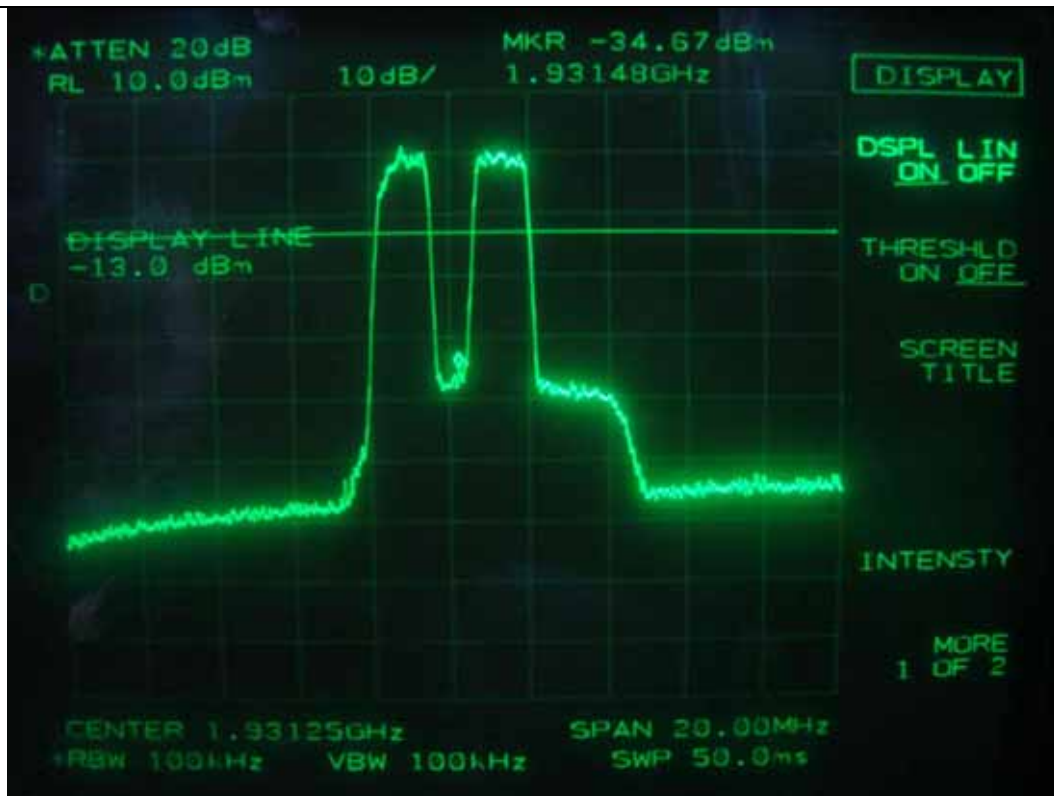


Downlink: CDMA2000 - Low Channel

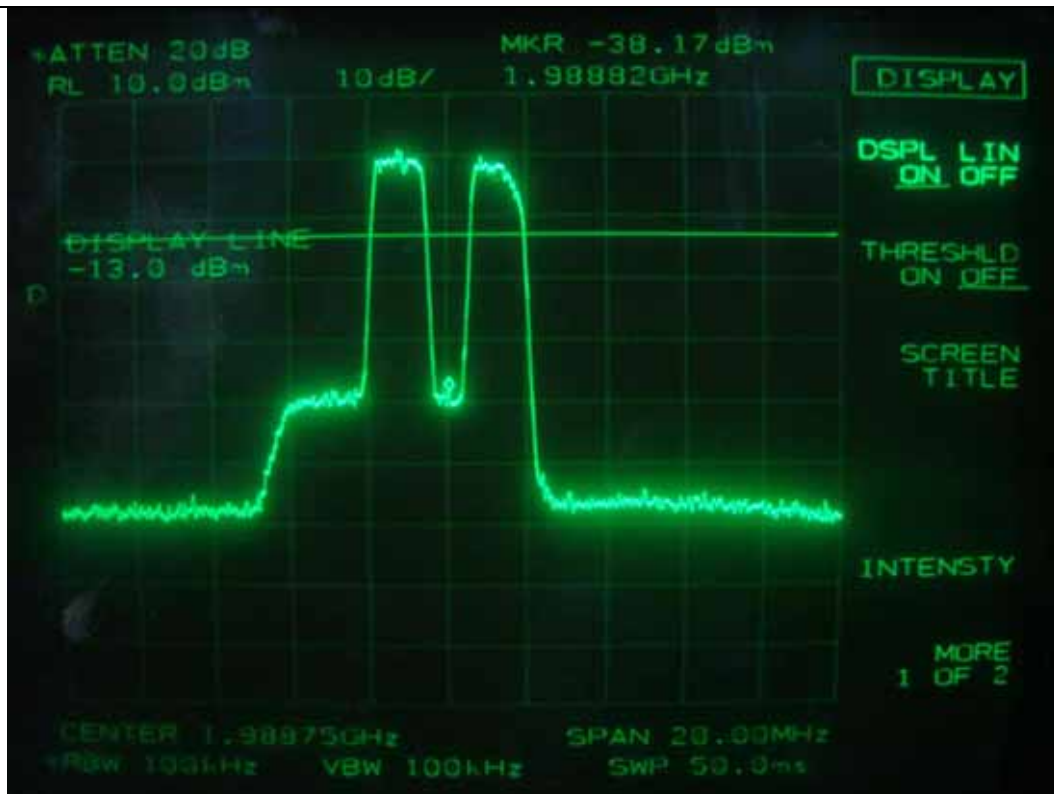

Downlink: CDMA2000 - High Channel

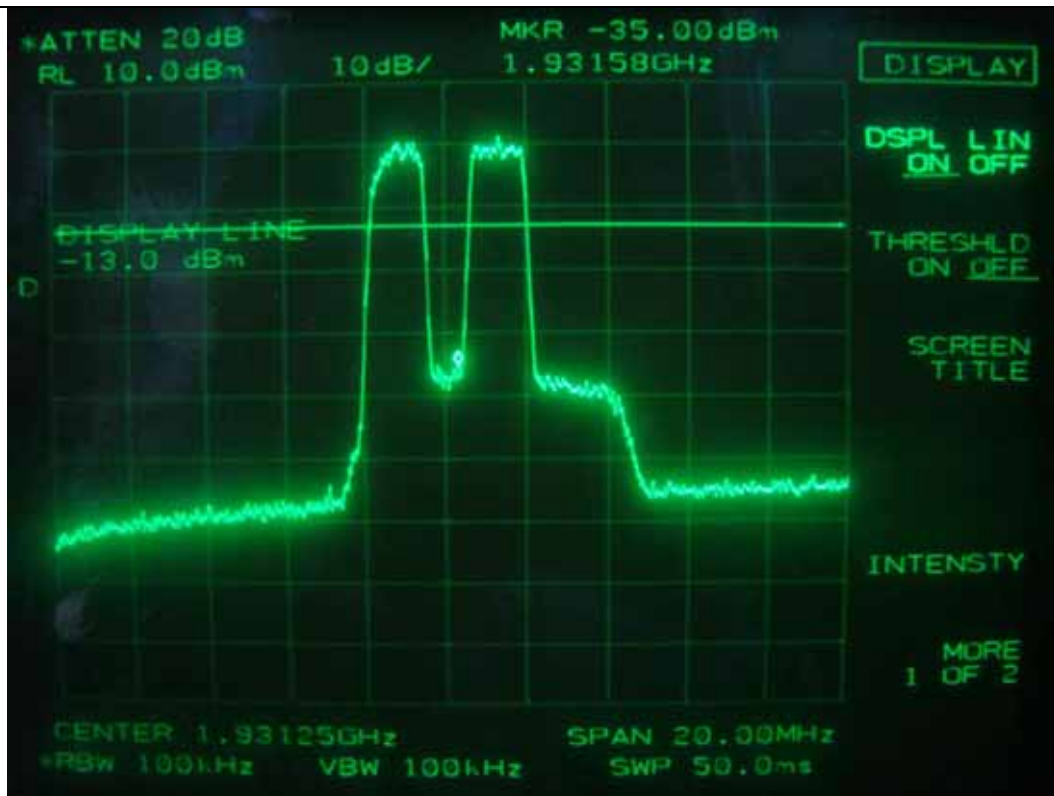

Downlink: 1xEVDO - Low Channel

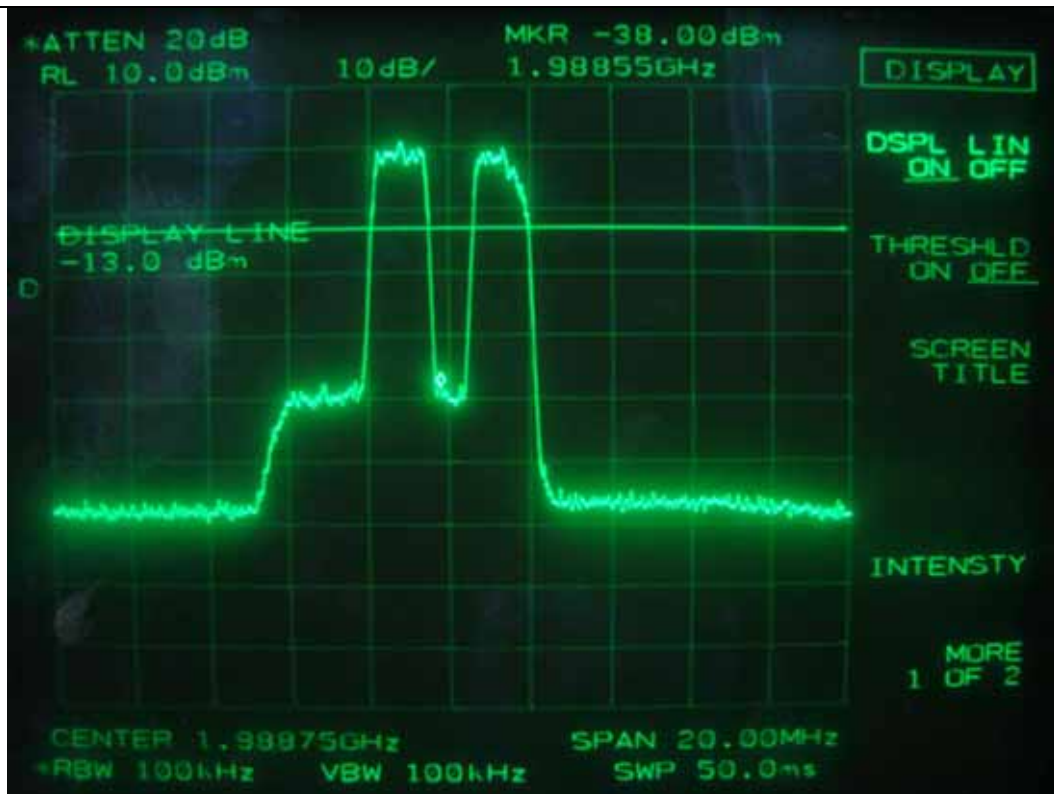

Downlink: 1xEVDO - High Channel

11. FIELD STRENGTH OF SPURIOUS RADIATION

11.1 Operating environment

Temperature : 25.5 °C
Relative humidity : 50.8 %R.H.

11.2 Test set-up

The radiated emissions measurements were on the 3 meters, open-field test site. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30MHz to up to 10th harmonic of the fundamental frequency was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels. The test was performed by placing the EUT on 3-orthogonal axis. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

The maximum radiated emission was recorded and used as reference for the effective radiated power measurement. The EUT was then replaced by a tuned dipole antenna or Horn antenna and was oriented for vertical polarization and then the length was adjusted to correspond to the frequency of the transmitter. The substitution antenna was connected to a signal generator with a coaxial cable. The receiving antenna height was raised and lowered again through the specified range of height until maximum signal level is detected by the measuring receiver. The signal to the substitution antenna was adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the EUT radiated power measured, corrected for the change of input attenuation setting of the measuring receiver. The signal generator level was recorded and corrected by the power loss in the cable between the signal generator and substitution antenna and further corrected for the gain of the dipole antenna or horn antenna used relative to an ideal tuned dipole antenna. The measurement was repeated with the test antenna and the substitution antenna oriented for horizontal polarization. The measure of the effective radiated power is the larger of the two levels recorded.

11.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	ESVS10	Rohde & Schwarz	EMI Test Receiver	827864/005	Dec. 21, 2007
■ -	8568B	Hewlett-Packard	Spectrum Analyzer	3109A05456	June 17, 2008
■ -	8564E	Hewlett-Packard	Spectrum Analyzer	3650A00756	June 16, 2008
■ -	83051A	Agilent	Preamplifier	3950M00201	June 16, 2008
■ -	E4432B	Hewlett-Packard	Signal Generator	US38440950	June 16, 2008
■ -	83650L	Hewlett-Packard	Signal Generator	3844A00415	June 16, 2008
■ -	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D294	July 03, 2006(3Y)
■ -	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	July 04, 2006(3Y)
■ -	SMJ 100A	R/S	Vector Signal Generator	101037	June 19, 2008
■ -	FSP	R/S	Spectrum Analyzer	100017	Mar. 14, 2008

All test equipment used is calibrated on a regular basis.

11.4. Test data for Cellular Band

11.4.1. Test result for Uplink Mode

11.4.1.1. Operating Modulation: IS-95 CDMA

- Test Date : July 21, 2008
- Resolution bandwidth : 1 MHz
- Video bandwidth : 1 MHz
- Frequency range : 1 GHz ~ 20 GHz
- Measurement distance : 3m
- Result : **PASS**

Frequency (GHz)	Spectrum Reading (dBuV)	Generator Reading (dBm)	Ant. Pol. (H/V)	AMP Gain (dB)	Ant. Gain (dBi)	Dipole Gain (dBd)	Cable Loss (dB)	Total (dBm)	Limit (dBm)	Margin (dB)
Test Data for Low Channel										
826.11	68.70	-2.17	H		0.00	0.00	0.33	-1.84		
	83.20	12.33	V					12.66		
1652.22	37.30	-62.47	H	26.1	8.78	6.63	0.50	-59.82	-13.00	-46.82
	37.90	-60.83	V					-58.18	-13.00	-45.18
Test Data for Middle Channel										
836.52	68.80	-2.07	H		0.00	0.00	0.33	-1.74		
	84.00	13.13	V					13.46		
1673.04	38.30	-61.50	H	26.1	8.87	6.72	0.50	-58.85	-13.00	-45.85
	38.00	-60.67	V					-58.02	-13.00	-45.02
Test Data for High Channel										
848.31	68.50	-2.37	H		0.00	0.00	0.33	-2.04		
	82.90	12.03	V					12.36		
1696.62	37.80	-61.83	H	26.1	8.97	6.82	0.50	-59.18	-13.00	-46.18
	37.50	-61.00	V					-58.35	-13.00	-45.35

Tabulated test data for Restricted Band

11.4.1.2. Operating Modulation: CDMA 2000

- . Test Date : July 21, 2008
- . Resolution bandwidth : 1 MHz
- . Video bandwidth : 1 MHz
- . Frequency range : 1 GHz ~ 20 GHz
- . Measurement distance : 3m
- . Result : PASS

Frequency (GHz)	Spectrum Reading (dBuV)	Generator Reading (dBm)	Ant. Pol. (H/V)	AMP Gain (dB)	Ant. Gain (dBi)	Dipole Gain (dBd)	Cable Loss (dB)	Total (dBm)	Limit (dBm)	Margin (dB)
Test Data for Low Channel										
826.11	68.83	-2.04	H		0.00	0.00	0.33	-1.71		
	82.33	11.46	V					11.79		
1652.22	37.50	-62.27	H	26.1	8.78	6.63	0.50	-59.62	-13.00	-46.62
	38.00	-60.73	V					-58.08	-13.00	-45.08
Test Data for Middle Channel										
836.52	68.92	-1.95	H		0.00	0.00	0.33	-1.62		
	84.17	13.30	V					13.63		
1673.04	38.50	-61.30	H	26.1	8.87	6.72	0.50	-58.65	-13.00	-45.65
	38.17	-60.50	V					-57.85	-13.00	-44.85
Test Data for High Channel										
848.31	68.33	-2.54	H		0.00	0.00	0.33	-2.21		
	83.00	12.13	V					12.46		
1696.62	37.50	-62.13	H	26.1	8.97	6.82	0.50	-59.48	-13.00	-46.48
	37.83	-60.67	V					-58.02	-13.00	-45.02

Tabulated test data for Restricted Band

11.4.1.3. Operating Modulation: 1x EVDO

-. Test Date : July 21, 2008
-. Resolution bandwidth : 1 MHz
-. Video bandwidth : 1 MHz
-. Frequency range : 1 GHz ~ 20 GHz
-. Measurement distance : 3m
-. Result : PASS

Frequency (GHz)	Spectrum Reading (dBuV)	Generator Reading (dBm)	Ant. Pol. (H/V)	AMP Gain (dB)	Ant. Gain (dBi)	Dipole Gain (dBd)	Cable Loss (dB)	Total (dBm)	Limit (dBm)	Margin (dB)
Test Data for Low Channel										
826.11	68.83	-2.04	H		0.00	0.00	0.33	-1.71		
	83.50	12.63	V					12.96		
1652.22	37.83	-61.94	H	26.1	8.78	6.63	0.50	-59.29	-13.00	-46.29
	37.50	-61.23	V					-58.58	-13.00	-45.58
Test Data for Middle Channel										
836.52	68.90	-1.97	H		0.00	0.00	0.33	-1.64		
	84.17	13.30	V					13.63		
1673.04	38.50	-61.30	H	26.1	8.87	6.72	0.50	-58.65	-13.00	-45.65
	38.33	-60.34	V					-57.69	-13.00	-44.69
Test Data for High Channel										
848.31	68.33	-2.54	H		0.00	0.00	0.33	-2.21		
	82.83	11.96	V					12.29		
1696.62	37.92	-61.95	H	26.1	8.97	6.82	0.50	-59.30	-13.00	-46.30
	37.33	-61.17	V					-58.52	-13.00	-45.52

Tabulated test data for Restricted Band



Tested by: Ki-Hong, Nam / Project Engineer

11.4.2. Test result for Downlink Mode

11.4.2.1. Operating Modulation: IS-95 CDMA

- Test Date : July 21, 2008
- Resolution bandwidth : 1 MHz
- Video bandwidth : 1 MHz
- Frequency range : 1 GHz ~ 20 GHz
- Measurement distance : 3m
- Result : **PASS**

Frequency (GHz)	Spectrum Reading (dBuV)	Generator Reading (dBm)	Ant. Pol. (H/V)	AMP Gain (dB)	Ant. Gain (dBi)	Dipole Gain (dBd)	Cable Loss (dB)	Total (dBm)	Limit (dBm)	Margin (dB)
Test Data for Low Channel										
871.11	65.33	-3.67	H		0.00	0.00	0.33	-3.34		
	66.50	-3.16	V					-2.83		
1742.22	37.67	-61.33	H	26.1	9.15	7.00	0.50	-58.68	-13.00	-45.68
	37.17	-61.33	V					-58.68	-13.00	-45.68
Test Data for Middle Channel										
881.52	65.17	-4.03	H		0.00	0.00	0.33	-3.70		
	66.33	-2.30	V					-1.97		
1763.04	37.50	-62.13	H	26.1	9.23	7.08	0.50	-59.48	-13.00	-46.48
	37.10	-61.40	V					-58.75	-13.00	-45.75
Test Data for High Channel										
893.31	65.50	-3.50	H		0.00	0.00	0.33	-3.17		
	66.67	-1.67	V					-1.34		
1786.62	37.25	-62.25	H	26.1	9.32	7.17	0.50	-59.60	-13.00	-46.60
	37.67	-60.66	V					-58.01	-13.00	-45.01

Tabulated test data for Restricted Band

11.4.2.2. Operating Modulation: CDMA 2000

-. Test Date : July 21, 2007
-. Resolution bandwidth : 1 MHz
-. Video bandwidth : 1 MHz
-. Frequency range : 1 GHz ~ 20 GHz
-. Measurement distance : 3m
-. Result : PASS

Frequency (GHz)	Spectrum Reading (dBuV)	Generator Reading (dBm)	Ant. Pol. (H/V)	AMP Gain (dB)	Ant. Gain (dBi)	Dipole Gain (dBd)	Cable Loss (dB)	Total (dBm)	Limit (dBm)	Margin (dB)
Test Data for Low Channel										
871.11	65.67	-3.33	H		0.00	0.00	0.33	-3.00		
	66.83	-1.83	V					-1.50		
1744.22	37.50	-61.84	H	26.1	9.15	7.00	0.50	-59.19	-13.00	-46.19
	37.33	-61.67	V					-59.02	-13.00	-46.02
Test Data for Middle Channel										
881.52	65.33	-3.87	H		0.00	0.00	0.33	-3.54		
	66.50	-2.13	V					-1.80		
1763.04	37.67	-61.96	H	26.1	9.23	7.08	0.50	-59.31	-13.00	-46.31
	37.83	-60.67	V					-58.02	-13.00	-45.02
Test Data for High Channel										
893.31	65.42	-3.58	H		0.00	0.00	0.33	-3.25		
	66.50	-1.84	V					-1.51		
1786.62	37.33	-62.17	H	26.1	9.32	7.17	0.50	-59.52	-13.00	-46.52
	37.50	-60.83	V					-58.18	-13.00	-45.18


Tabulated test data for Restricted Band

11.4.2.3. Operating Modulation: 1x EVDO

-. Test Date : July 21, 2008
-. Resolution bandwidth : 1 MHz
-. Video bandwidth : 1 MHz
-. Frequency range : 1 GHz ~ 20 GHz
-. Measurement distance : 3m
-. Result : PASS

Frequency (GHz)	Spectrum Reading (dBuV)	Generator Reading (dBm)	Ant. Pol. (H/V)	AMP Gain (dB)	Ant. Gain (dBi)	Dipole Gain (dBd)	Cable Loss (dB)	Total (dBm)	Limit (dBm)	Margin (dB)
Test Data for Low Channel										
871.11	65.33	-3.67	H		0.00	0.00	0.33	-3.34		
	66.50	-2.16	V					-1.83		
1742.22	37.17	-61.83	H	26.1	9.15	7.00	0.50	-59.18	-13.00	-46.18
	37.50	-61.00	V					-58.35	-13.00	-45.35
Test Data for Middle Channel										
881.52	65.67	-3.53	H		0.00	0.00	0.33	-3.20		
	66.83	-1.80	V					-1.47		
1763.04	37.33	-60.96	H	26.1	9.23	7.08	0.50	-58.31	-13.00	-45.31
	37.67	-60.83	V					-58.18	-13.00	-45.18
Test Data for High Channel										
893.31	65.50	-3.50	H		0.00	0.00	0.33	-3.17		
	66.50	-1.84	V					-1.51		
1786.62	37.17	-62.33	H	26.1	9.32	7.17	0.50	-59.68	-13.00	-46.68
	37.42	-60.91	V					-58.26	-13.00	-45.26

Tabulated test data for Restricted Band

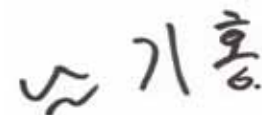

Tested by: Ki-Hong, Nam / Project Engineer

11.5. Test data for PCS Band

11.5.1. Test result for Uplink Mode

11.5.1.1. Operating Modulation: IS-95 CDMA

- Test Date : July 21, 2008
- Resolution bandwidth : 1 MHz
- Video bandwidth : 1 MHz
- Frequency range : 1 GHz ~ 20 GHz
- Measurement distance : 3m
- Result : **PASS**

Frequency (GHz)	Spectrum Reading (dBuV)	Generator Reading (dBm)	Ant. Pol. (H/V)	AMP Gain (dB)	Ant. Gain (dBi)	Dipole Gain (dBd)	Cable Loss (dB)	Total (dBm)	Limit (dBm)	Margin (dB)
Test Data for Low Channel										
1851.25	78.50	4.83	H		9.69	7.54	0.50	7.48		
	81.60	11.10	V					13.75		
3702.50	38.33	-62.44	H	26.1	11.66	9.51	0.84	-59.45	-13.00	-46.45
	38.50	-60.43	V					-57.44	-13.00	-44.44
Test Data for Middle Channel										
1877.50	78.20	4.87	H		9.80	7.65	0.50	7.52		
	81.40	10.73	V					13.38		
3755.00	38.83	-60.44	H	26.1	11.73	9.58	0.84	-57.45	-13.00	-44.45
	38.50	-60.27	V					-57.28	-13.00	-44.28
Test Data for High Channel										
1908.75	78.40	5.07	H		9.93	7.78	0.50	7.72		
	82.50	10.50	V					13.15		
3817.50	38.67	-60.43	H	26.1	11.82	9.67	0.84	-57.44	-13.00	-44.44
	38.33	-60.10	V					-57.11	-13.00	-44.11

Tabulated test data for Restricted Band

11.5.1.2. Operating Modulation: CDMA 2000

-. Test Date : July 21, 2008
-. Resolution bandwidth : 1 MHz
-. Video bandwidth : 1 MHz
-. Frequency range : 1 GHz ~ 20 GHz
-. Measurement distance : 3m
-. Result : PASS

Frequency (GHz)	Spectrum Reading (dBuV)	Generator Reading (dBm)	Ant. Pol. (H/V)	AMP Gain (dB)	Ant. Gain (dBi)	Dipole Gain (dBd)	Cable Loss (dB)	Total (dBm)	Limit (dBm)	Margin (dB)
Test Data for Low Channel										
181.25	78.83	5.16	H		9.69	7.54	0.50	7.81		
	81.83	11.33	V					13.98		
3702.50	39.00	-61.77	H	26.1	11.66	9.51	0.84	-58.78	-13.00	-45.78
	39.17	-59.76	V					-56.77	-13.00	-43.77
Test Data for Middle Channel										
1877.50	78.50	5.17	H		9.80	7.65	0.50	7.82		
	81.83	11.16	V					13.81		
3755.00	38.50	-60.77	H	26.1	11.73	9.58	0.84	-57.78	-13.00	-44.78
	38.83	-59.94	V					-56.95	-13.00	-43.95
Test Data for High Channel										
1908.75	78.50	5.17	H		9.93	7.78	0.80	7.82		
	82.17	10.17	V					12.82		
3817.50	38.50	-60.60	H	26.1	11.82	9.67	0.84	-57.61	-13.00	-44.61
	38.83	-59.60	V					-56.61	-13.00	-43.61


Tabulated test data for Restricted Band

11.5.1.3. Operating Modulation: 1x EVDO

- Test Date : July 21, 2008
- Resolution bandwidth : 1 MHz
- Video bandwidth : 1 MHz
- Frequency range : 1 GHz ~ 20 GHz
- Measurement distance : 3m
- Result : PASS

Frequency (GHz)	Spectrum Reading (dBuV)	Generator Reading (dBm)	Ant. Pol. (H/V)	AMP Gain (dB)	Ant. Gain (dBi)	Dipole Gain (dBd)	Cable Loss (dB)	Total (dBm)	Limit (dBm)	Margin (dB)
Test Data for Low Channel										
1851.25	78.67	5.00	H		9.69	7.54	0.50	7.65		
	81.50	11.00	V					13.65		
3702.50	38.50	-62.27	H	26.1	11.66	9.51	0.84	-59.28	-13.00	-46.28
	38.67	-60.26	V					-57.27	-13.00	-44.27
Test Data for Middle Channel										
1877.50	78.33	5.00	H		9.80	7.65	0.50	7.65		
	81.67	11.00	V					13.65		
3755.00	38.50	-60.77	H	26.1	11.73	9.58	0.84	-57.78	-13.00	-44.78
	39.00	-59.77	V					-56.78	-13.00	-43.78
Test Data for High Channel										
1908.75	78.50	5.17	H		9.93	9.78	0.50	7.82		
	82.33	10.33	V					12.98		
3817.50	38.50	-60.60	H	26.1	11.82	9.67	0.84	-57.61	-13.00	-44.61
	38.78	-59.65	V					-56.66	-13.00	-43.66

Tabulated test data for Restricted Band

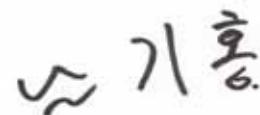

Tested by: Ki-Hong, Nam / Project Engineer

11.5.2. Test result for Downlink Mode

11.5.2.1. Operating Modulation: IS-95 CDMA

- Test Date : July 21, 2008
- Resolution bandwidth : 1 MHz
- Video bandwidth : 1 MHz
- Frequency range : 1 GHz ~ 20 GHz
- Measurement distance : 3m
- Result : **PASS**

Frequency (GHz)	Spectrum Reading (dBuV)	Generator Reading (dBm)	Ant. Pol. (H/V)	AMP Gain (dB)	Ant. Gain (dBi)	Dipole Gain (dBd)	Cable Loss (dB)	Total (dBm)	Limit (dBm)	Margin (dB)
Test Data for Low Channel										
1931.25	64.83	-8.29	H		10.03	7.88	0.50	-5.64		
	70.92	-0.05	V					2.60		
3862.50	38.33	-62.72	H	26.1	11.88	9.73	0.84	-59.73	-13.00	-46.73
	38.17	-60.83	V					-57.84	-13.00	-44.84
Test Data for Middle Channel										
1957.50	64.72	-8.95	H		10.14	7.99	0.50	-6.30		
	71.00	0.03	V					2.68		
3915.00	38.50	-62.10	H	26.1	11.95	9.80	0.84	-59.11	-13.00	-46.11
	38.45	-59.55	V					-56.56	-13.00	-43.56
Test Data for High Channel										
1988.75	64.78	-8.06	H		10.27	9.12	0.50	-5.41		
	71.33	-0.50	V					2.15		
3977.50	38.10	-64.08	H	26.1	12.04	9.89	0.84	-61.09	-13.00	-48.09
	38.67	-59.35	V					-56.36	-13.00	-43.36

Tabulated test data for Restricted Band

11.5.2.2. Operating Modulation: CDMA 2000

-. Test Date : July 21, 2008
-. Resolution bandwidth : 1 MHz
-. Video bandwidth : 1 MHz
-. Frequency range : 1 GHz ~ 20 GHz
-. Measurement distance : 3m
-. Result : PASS

Frequency (GHz)	Spectrum Reading (dBuV)	Generator Reading (dBm)	Ant. Pol. (H/V)	AMP Gain (dB)	Ant. Gain (dBi)	Dipole Gain (dBd)	Cable Loss (dB)	Total (dBm)	Limit (dBm)	Margin (dB)
Test Data for Low Channel										
1931.25	64.67	-8.45	H		10.03	7.88	0.50	-5.80		
	70.83	-0.14	V					2.51		
3862.50	38.50	-62.55	H	26.1	11.88	9.73	0.84	-59.56	-13.00	-46.56
	38.78	-60.22	V					-57.23	-13.00	-44.23
Test Data for Middle Channel										
1957.50	65.33	-8.34	H		10.14	7.99	0.50	-5.69		
	70.92	-0.05	V					2.60		
3915.00	38.67	-61.93	H	26.1	11.95	9.80	0.84	-58.94	-13.00	-45.94
	38.83	-59.17	V					-56.18	-13.00	-43.18
Test Data for High Channel										
1988.75	64.92	-7.92	H		10.27	8.12	0.50	-5.27		
	71.17	-0.66	V					1.99		
3977.50	38.33	-63.85	H	26.1	12.04	9.89	0.84	-60.86	-13.00	-47.86
	38.50	-59.52	V					-56.53	-13.00	-43.53


Tabulated test data for Restricted Band

11.5.2.3. Operating Modulation: 1x EVDO

-. Test Date : July 21, 2008
-. Resolution bandwidth : 1 MHz
-. Video bandwidth : 1 MHz
-. Frequency range : 1 GHz ~ 20 GHz
-. Measurement distance : 3m
-. Result : PASS

Frequency (GHz)	Spectrum Reading (dBuV)	Generator Reading (dBm)	Ant. Pol. (H/V)	AMP Gain (dB)	Ant. Gain (dBi)	Dipole Gain (dBd)	Cable Loss (dB)	Total (dBm)	Limit (dBm)	Margin (dB)
Test Data for Low Channel										
1931.25	64.78	-8.34	H		10.03	7.88	0.50	-5.69		
	70.83	-0.14	V					2.51		
3862.50	38.50	-62.55	H	26.1	11.88	9.73	0.84	-59.56	-13.00	-46.56
	38.33	-60.67	V					-57.68	-13.00	-44.68
Test Data for Middle Channel										
1957.50	64.83	-8.84	H		10.14	7.99	0.50	-6.19		
	70.83	0.06	V					2.71		
3915.00	38.25	-62.35	H	26.1	11.95	9.80	0.84	-59.36	-13.00	-46.36
	38.50	-59.46	V					-56.47	-13.00	-43.47
Test Data for High Channel										
1988.75	64.90	-7.94	H		10.27	8.12	0.50	-5.29		
	71.00	-0.83	V					1.82		
3977.50	38.25	-63.93	H	26.1	12.04	9.89	0.84	-60.94	-13.00	-47.94
	38.50	-59.52	V					-56.53	-13.00	-43.53

Tabulated test data for Restricted Band

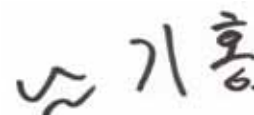

Tested by: Ki-Hong, Nam / Project Engineer

12. FREQUENCY STABILITY WITH TEMPERATURE VARIATION

12.1 Operating environment

Temperature : 24 °C
Relative humidity : 48.2 %R.H.

12.2 Test set-up

The RF output port of the EUT was connected to the input of the spectrum analyzer. The software for RF control on the notebook PC was set to transmit maximum signal gain and bandwidth. The test was performed at center frequency.

Turn EUT off and set chamber temperature to -30 °C and then allow sufficient time (approximately 20 to 30 minutes after chamber reach the assigned temperature) for EUT to stabilize. Turn ON EUT and measure the EUT operating frequency and then turn off the EUT after the measurement. The temperature in the chamber was raised 10 °C step from -30 °C to +50 °C. Repeat above method for frequency measurements every 10 °C step and then record all measured frequencies on each temperature step.

12.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 16, 2008
■ - 53152A	HP	Frequency Counter	US39270295	Dec. 7, 2007
■ - SSE-43-CI-A	Samkun Tech Develop.	Chamber	N/A	July 11, 2008
■ - SMJ 100A	R/S	Vector Signal Generator	101037	June 19, 2007
■ - FSP	R/S	Spectrum Analyzer	100017	Mar. 14, 2008

All test equipment used is calibrated on a regular basis.

12.4 Test data for Cellular Band

-. Test Date : July 18 ~ 19, 2008
-. Result : PASS

12.4.1 Test result for Uplink Mode

Temperature (°C)	Input Freq. (Hz)	Measured Freq. (Hz)	Result (PPM)	Limit
-30	826110000	826109995	-0.006 1	Within the Authorized Frequency block
-20		826109994	-0.007 3	
-10		826109993	-0.008 5	
0		826109994	-0.007 3	
10		826109995	-0.006 1	
20		826109996	-0.004 8	
30		826109994	-0.007 3	
40		826109994	-0.007 3	
50		826109995	-0.006 1	

12.4.2 Test result for Downlink Mode

Temperature (°C)	Input Freq. (Hz)	Measured Freq. (Hz)	Result (PPM)	Limit
-30	871110000	871109991	-0.010 3	Within the Authorized Frequency block
-20		871109991	-0.010 3	
-10		871109993	-0.008	
0		871109994	-0.006 9	
10		871109993	-0.008	
20		871109994	-0.006 9	
30		871109994	-0.006 9	
40		871109995	-0.005 7	
50		871109995	-0.005 7	

기홍

Tested by: Ki-Hong, Nam / Project Engineer

12.5 Test data for PCS Band

-. Test Date : July 18 ~ 19, 2008
-. Result : PASS

12.5.1 Test result for Uplink Mode

Temperature (°C)	Input Freq. (Hz)	Measured Freq. (Hz)	Result (PPM)	Limit
-30	1851250000	1851249986	-0.007 6	Within the Authorized Frequency block
-20		1851249987	-0.007	
-10		1851249987	-0.007	
0		1851249988	-0.006 5	
10		1851249987	-0.007 0	
20		1851249986	-0.007 6	
30		1851249988	-0.006 5	
40		1851249987	-0.007	
50		1851249986	-0.007 6	

12.5.2 Test result for Downlink Mode

Temperature (°C)	Input Freq. (Hz)	Measured Freq. (Hz)	Result (PPM)	Limit
-30	1931250000	1931249984	-0.008 3	Within the Authorized Frequency block
-20		1931249985	-0.007 8	
-10		1931249985	-0.007 8	
0		1931249986	-0.007 2	
10		1931248886	-0.576 8	
20		1931249987	-0.006 7	
30		1931249987	-0.006 7	
40		1931249988	-0.575 8	
50		1931249989	-0.005 7	

기홍

Tested by: Ki-Hong, Nam / Project Engineer

13. FREQUENCY STABILITY WITH VOLTAGE VARIATION

13.1 Operating environment

Temperature : 24 °C
Relative humidity : 48.2 %R.H.

13.2 Test set-up

The RF output port of the EUT was connected to the input of the spectrum analyzer. The signal generator was set to 1931.25 MHz with an unmodulated signal. The voltage of EUT set to 115 % of the nominal value and then was reduced to 85% of nominal voltage. The output frequency was recorded at each step.

13.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - 8564E	HP	Spectrum Analyzer	3650A00756	June 16, 2008
■ - 53152A	HP	Frequency Counter	US39270295	Dec. 7, 2007
■ - SSE-43-CI-A	Samkun Tech Develop.	Chamber	N/A	July 11, 2008
■ - SMJ 100A	R/S	Vector Signal Generator	101037	June 19, 2007
■ - FSP	R/S	Spectrum Analyzer	100017	Mar. 14, 2008

All test equipment used is calibrated on a regular basis.

13.4 Test data for Cellular Band


-. Test Date : July 18 ~ 19, 2008
-. Rated Supply Voltage : 110 Vac
-. Result : PASS

13.4.1 Test result for Uplink Mode

Voltage (Vac)	Input Freq. (Hz)	Measured Freq. (Hz)	Result (PPM)	Limit
126.5 (115 %)	826110000	826109993	-0.008 5	Within the Authorized Frequency block
110 (100 %)		826109994	-0.007 3	
93.5 (85 %)		826109994	-0.007 3	

13.4.2 Test result for Downlink Mode

Voltage (Vac)	Input Freq. (Hz)	Measured Freq. (Hz)	Result (PPM)	Limit
126.5 (115 %)	871110000	871109994	-0.006 9	Within the Authorized Frequency block
110 (100 %)		871109994	-0.006 9	
93.5 (85 %)		871109995	-0.005 7	

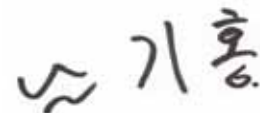

Tested by: Ki-Hong, Nam / Project Engineer

13.5 Test data for PCS Band

-. Test Date : July 18 ~ 19, 2008
-. Rated Supply Voltage : 110 Vac
-. Result : PASS

13.5.1 Test result for Uplink Mode

Voltage (Vac)	Input Freq. (Hz)	Measured Freq. (Hz)	Result (PPM)	Limit
126.5 (115 %)	1851250000	1851249987	-0.007	Within the Authorized Frequency block
110 (100 %)		1851249988	-0.006 5	
93.5 (85 %)		1851249988	-0.006 5	

13.5.2 Test result for Downlink Mode

Voltage (Vac)	Input Freq. (Hz)	Measured Freq. (Hz)	Result (PPM)	Limit
126.5 (115 %)	1931250000	1931249987	-0.006 7	Within the Authorized Frequency block
110 (100 %)		1931249987	-0.006 7	
93.5 (85 %)		1931249988	-0.006 2	

기홍

Tested by: Ki-Hong, Nam / Project Engineer

14. RADIATED EMISSION TEST FOR GENERAL REQUIREMENT

14.1 Operating environment

Temperature : 25.5 °C
Relative humidity : 50.8 %R.H.

14.2 Test set-up

The radiated emissions measurements were on the 3 meters, open-field test site. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 1 000 MHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

The test set-up photos are included in appendix VI.

14.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	ESVS10	Rohde & Schwarz	EMI Test Receiver	827864/005	Dec. 21, 2007
■ -	SMJ 100A	R/S	Vector Signal Generator	101037	June 16, 2008
■ -	FSP	R/S	Spectrum Analyzer	100017	Mar. 14, 2008
■ -	8447D	Hewlett Packard	Amplifier	2727A04987	June 16, 2008
■ -	MA240	HD GmbH	Antenna Master	N/A	N/A
■ -	HD100	HD GmbH	Position Controller	N/A	N/A
■ -	DS420S	HD GmbH	Turn Table	N/A	N/A
■ -	VHA9103	Schwarzbeck	Biconical Antenna	91031852	Feb. 13, 2008
■ -	9108-A(494)	Schwarzbeck	Log Periodic Antenna	62281001	Feb. 13, 2008

All test equipment used is calibrated on a regular basis.

14.4 Test data for Cellular Band

14.4.1 Test result for Uplink Mode


- . Test Date : July 21, 2008
- . Resolution bandwidth : 100 kHz
- . Video bandwidth : 300 kHz
- . Frequency range : 30 MHz ~ 1 000 MHz
- . Measurement distance : 3 m
- . Result : PASS

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
104.62	19.20	V	11.04	2.20	32.44	43.52	-11.08
118.18	15.50	V	12.78	2.12	30.40	43.52	-13.12
134.65	18.30	V	14.20	2.50	35.00	43.52	-8.52
202.5	17.92	H	16.37	3.03	37.32	43.52	-6.20
375.95	15.00	H	15.02	3.86	33.88	46.02	-12.14
753.86	12.50	H	20.68	5.82	39.00	46.02	-7.02

Tabulated test data for Radiated Electromagnetic Field

Remark: "H": Horizontal, "V": Vertical

Low, Middle and High channels for IS-95CDMA, CDMA2000 and 1xEVDO modes were tested, but the worst emissions levels were recorded in this test report.



Tested by: Ki-Hong, Nam / Project Engineer

14.4.2 Test result for Downlink Mode


- Test Date : July 21, 2008
- Resolution bandwidth : 100 kHz
- Video bandwidth : 300 kHz
- Frequency range : 30 MHz ~ 1 000 MHz
- Measurement distance : 3 m
- Result : **PASS**

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
105.50	20.33	V	11.15	2.20	33.68	43.52	-9.84
120.00	17.67	V	13.01	2.10	32.78	43.52	-10.74
135.30	16.83	V	14.25	2.50	33.58	43.52	-9.94
202.50	14.50	H	16.37	3.03	33.90	43.52	-9.62
376.17	15.92	H	15.01	3.86	34.79	46.02	-11.23
754.00	11.67	H	20.68	5.82	38.17	46.02	-7.85

Tabulated test data for Radiated Electromagnetic Field

Remark: "H": Horizontal, "V": Vertical

Low, Middle and High channels for IS-95CDMA, CDMA2000 and 1xEVDO modes were tested, but the worst emissions levels were recorded in this test report.



Tested by: Ki-Hong, Nam / Project Engineer

14.5 Test data for PCS Band

14.5.1 Test result for Uplink Mode

- . Test Date : July 21, 2008
- . Resolution bandwidth : 100 kHz
- . Video bandwidth : 300 kHz
- . Frequency range : 30 MHz ~ 1 000 MHz
- . Measurement distance : 3 m
- . Result : PASS

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
104.62	19.33	V	11.04	2.20	32.57	43.52	-10.95
118.18	15.67	V	12.78	2.12	30.57	43.52	-12.95
134.65	18.00	V	14.20	2.50	34.70	43.52	-8.82
202.5	17.67	H	16.37	3.03	37.07	43.52	-6.45
375.95	14.83	H	15.02	3.86	33.71	46.02	-12.31
753.86	12.17	H	20.68	5.82	38.67	46.02	-7.35

Tabulated test data for Radiated Electromagnetic Field

Remark: "H": Horizontal, "V": Vertical

Low, Middle and High channels for IS-95CDMA, CDMA2000 and 1xEVDO modes were tested, but the worst emissions levels were recorded in this test report.

기홍

Tested by: Ki-Hong, Nam / Project Engineer

14.5.2 Test result for Downlink Mode


- Test Date : July 21, 2008
- Resolution bandwidth : 100 kHz
- Video bandwidth : 300 kHz
- Frequency range : 30 MHz ~ 1 000 MHz
- Measurement distance : 3 m
- Result : **PASS**

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
105.50	20.50	V	11.15	2.20	33.85	43.52	-9.67
120.00	17.33	V	13.01	2.10	32.44	43.52	-11.08
135.30	17.00	V	14.25	2.50	33.75	43.52	-9.77
202.50	14.10	H	16.37	3.03	33.50	43.52	-10.02
376.17	16.00	H	15.01	3.86	34.87	46.02	-11.15
754.00	11.50	H	20.68	5.82	38.00	46.02	-8.02

Tabulated test data for Radiated Electromagnetic Field

Remark: "H": Horizontal, "V": Vertical

Low, Middle and High channels for IS-95CDMA, CDMA2000 and 1xEVDO modes were tested, but the worst emissions levels were recorded in this test report.



Tested by: Ki-Hong, Nam / Project Engineer

15. CONDUCTED EMISSION TEST

15.1 Operating environment

Temperature : 23.5 °C
Relative humidity : 52.1 %R.H.

15.2 Test set-up

The EUT was placed on a wooden table, 0.8 meters height above the floor. The EUT was connected to adaptor and the power line of adaptor was fed through a 50 ohm/ 50 uH + 5ohm Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

15.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	ESHS10	Rohde & Schwarz	EMI Test Receiver	834467/007	May 13, 2008
■ -	NSLK 8126	Schwarzbeck	AMN	8126-404	June 16, 2007
■ -	3825/2	EMCO	AMN	9109-1867	June 16, 2007
■ -	SMJ 100A	R/S	Vector Signal Generator	101037	June 19, 2008
■ -	FSP	R/S	Spectrum Analyzer	100017	Mar. 14, 2008

All test equipment used is calibrated on a regular basis.

15.4 Test data for Cellular Band

15.4.1 Test result for Uplink Mode

- Test Date : June 9, 2008
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Result : **PASSED BY -23.19 dB at 0.30 MHz**

Frequency (MHz)	Line	Peak (dBuV)			Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	Detector Mode	Limits		Emission level	Limits	
0.18	H	39.85	P	64.49	-24.64	-	-	-
0.24	H	37.41	P	61.92	-24.51	-	-	-
0.30	H	36.92	P	60.11	-23.19	-	-	-
0.37	N	29.99	P	58.50	-28.51	-	-	-
3.25	N	26.11	P	56.00	-29.89	-	-	-
3.46	H	24.93	P	56.00	-31.07	-	-	-


Line Conducted Emissions Tabulated Data

Remark : "H": Hot Line, "N": Neutral line, "P": Peak detector.


Average mode was not measured, because peak values were under the Average limit.

The test of IS-95 CDMA, CDMA2000 and 1xEVDO modes were performed, but the worst data was recorded in this report.


See next page for an overview sweep performed with peak detector.



Tested by: Ki-Hong, Nam / Project Engineer

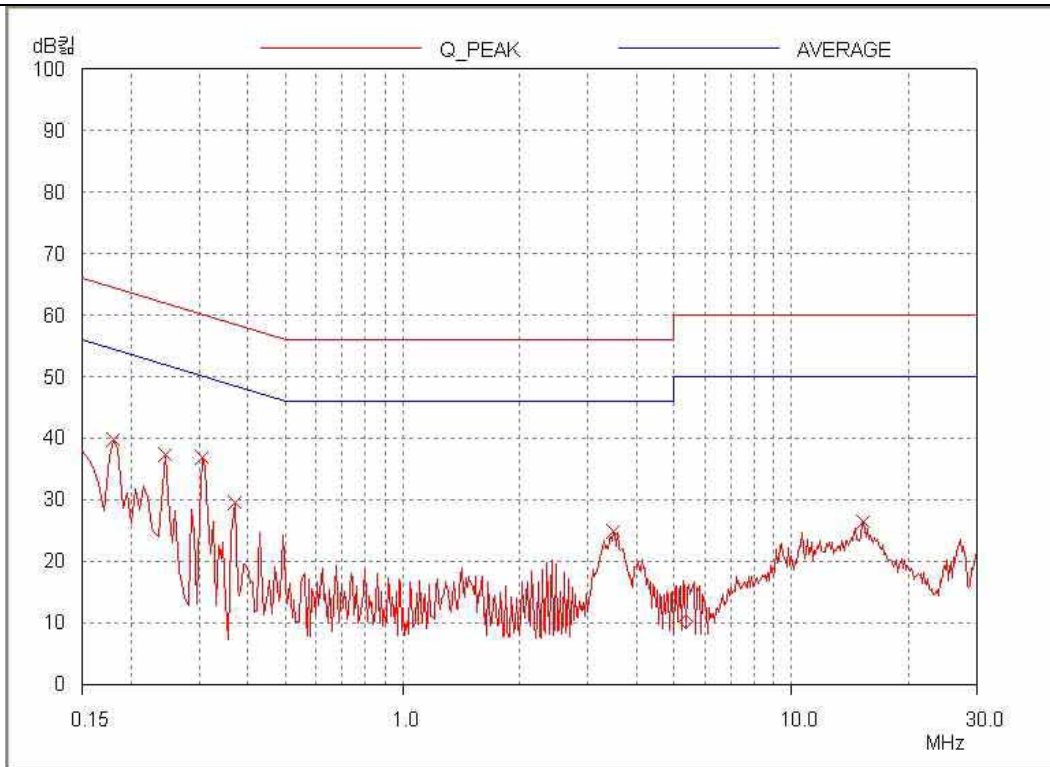

HOT LINE

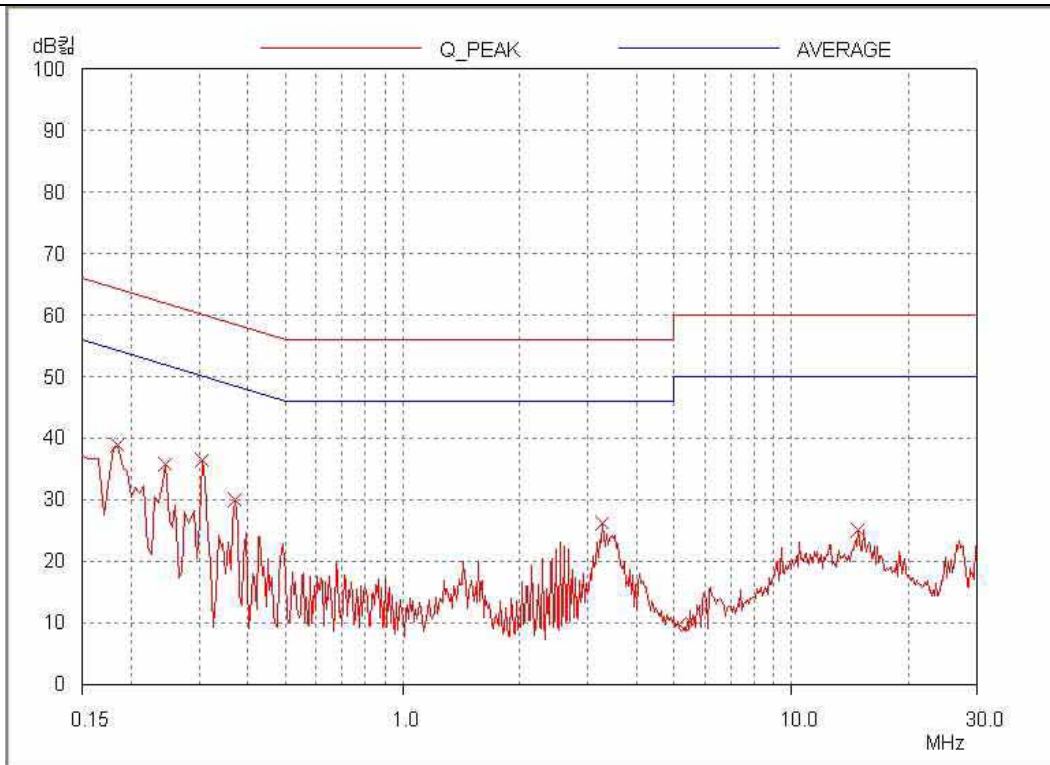

NEUTRAL LINE

15.4.2 Test result for Downlink Mode

- Test Date : July 19, 2008
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Result : **PASSED BY -18.35 dB at 0.18 MHz**

Frequency (MHz)	Line	Peak (dBuV)			Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	Detector Mode	Limits		Emission level	Limits	
0.18	H	45.91	P	64.26	-18.35	-	-	-
0.24	N	38.55	P	61.92	-23.37	-	-	-
0.30	N	37.13	P	60.11	-22.98	-	-	-
0.37	H	35.96	P	58.50	-22.54	-	-	-
0.43	N	27.75	P	57.25	-29.50	-	-	-
12.39	H	30.00	P	60.00	-30.00	-	-	-


Line Conducted Emissions Tabulated Data

Remark : "H": Hot Line, "N": Neutral line, "P": Peak detector.


Average mode was not measured, because peak values were under the Average limit.

The test of IS-95 CDMA, CDMA2000 and 1xEVDO modes were performed, but the worst data was recorded in this report.


See next page for an overview sweep performed with peak detector.



Tested by: Ki-Hong, Nam / Project Engineer

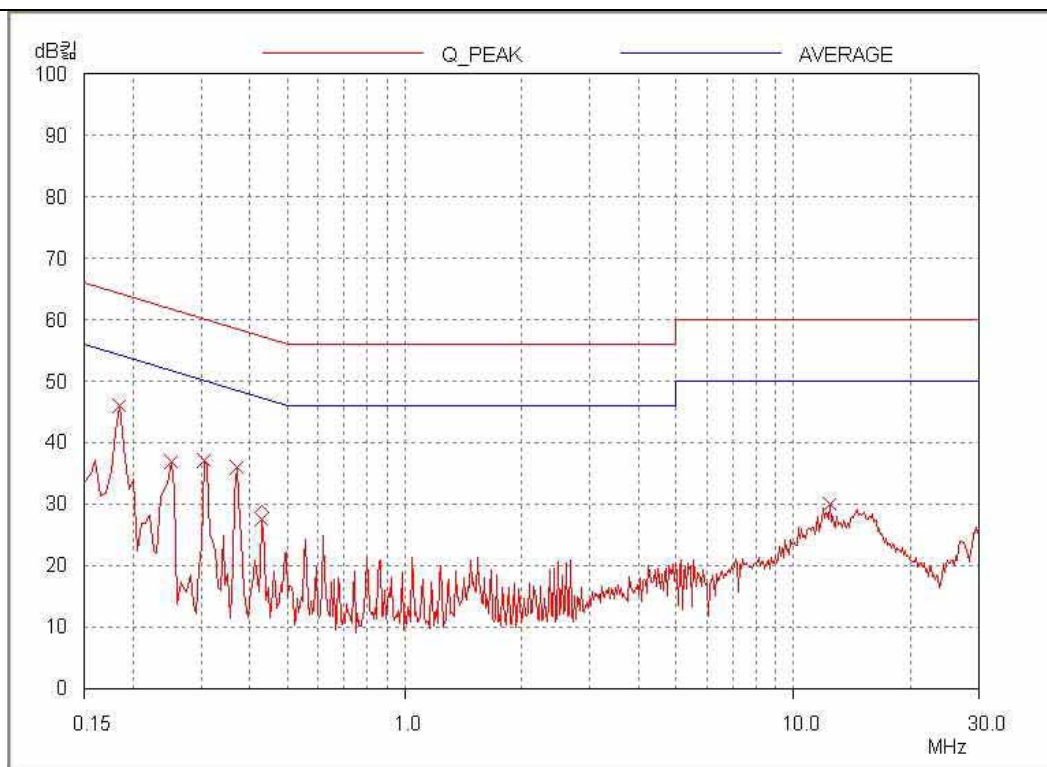

HOT LINE

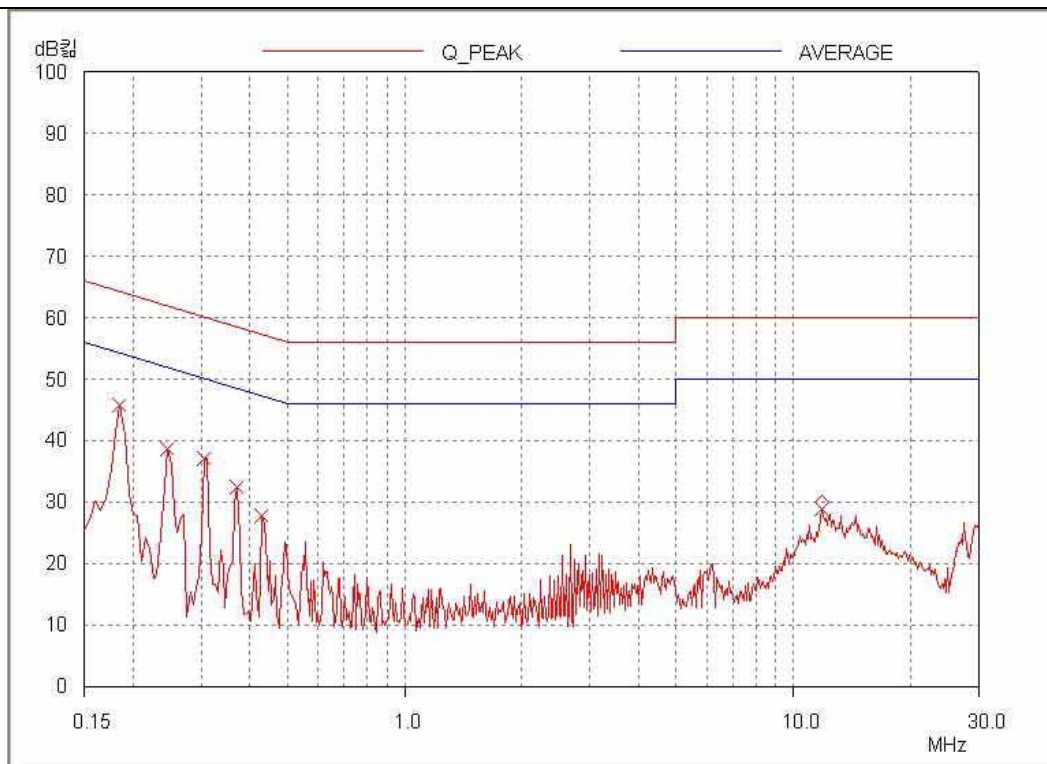

NEUTRAL LINE

15.5 Test data for PCS Band

15.5.1 Test result for Uplink Mode

- Test Date : June 09, 2008
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Result : **PASSED BY -23.74 dB at 0.31 MHz**

Frequency (MHz)	Line	Peak (dBuV)			Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	Detector Mode	Limits		Emission level	Limits	
0.18	H	40.28	P	64.26	-23.98	-	-	-
0.24	H	37.06	P	61.92	-24.86	-	-	-
0.31	H	36.23	P	59.97	-23.74	-	-	-
0.37	H	28.89	P	58.50	-29.61	-	-	-
3.32	N	25.28	P	56.00	-30.72	-	-	-
3.46	H	26.52	P	56.00	-29.48	-	-	-


Line Conducted Emissions Tabulated Data

Remark : "H": Hot Line, "N": Neutral line, "P": Peak detector.


Average mode was not measured, because peak values were under the Average limit.

The test of IS-95 CDMA, CDMA2000 and 1xEVDO modes were performed, but the worst data was recorded in this report.


See next page for an overview sweep performed with peak detector.



Tested by: Ki-Hong, Nam / Project Engineer

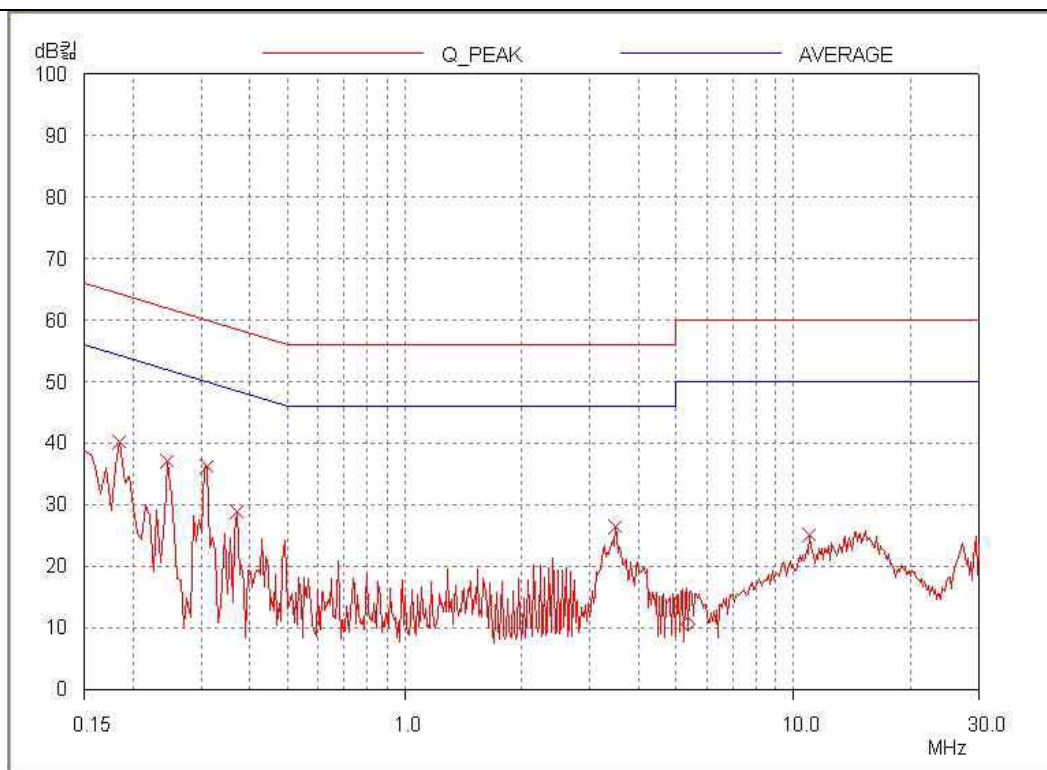

HOT LINE

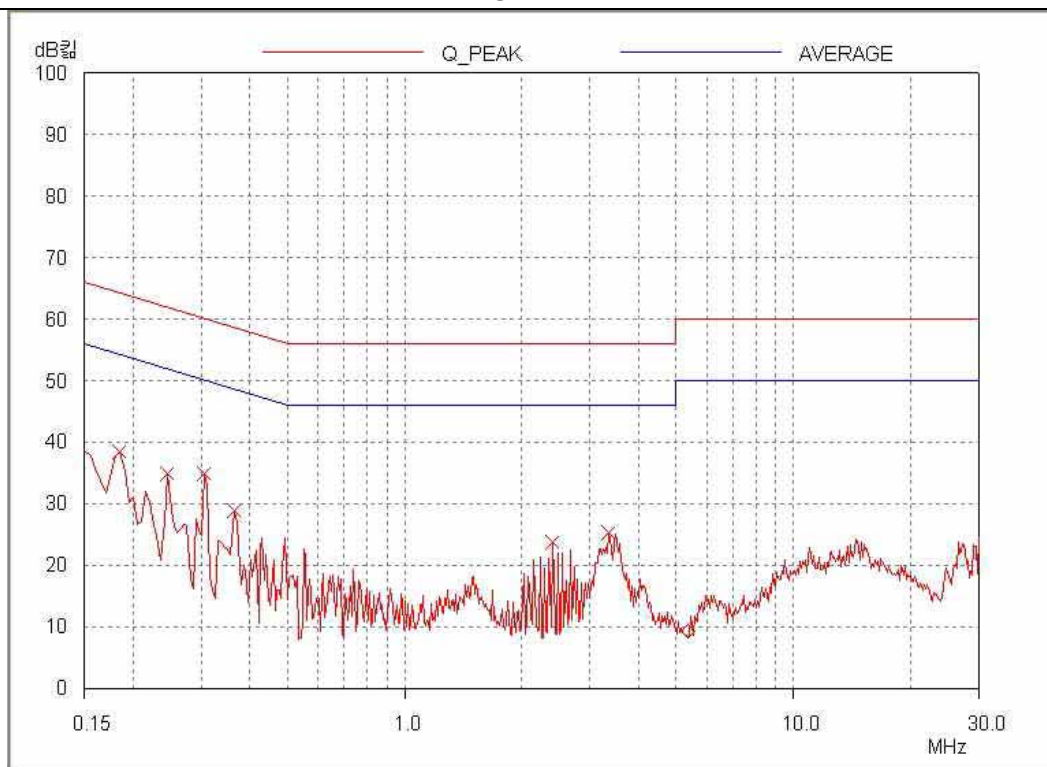

NEUTRAL LINE

15.5.2 Test result for Downlink Mode

- Test Date : July 19, 2008
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Result : **PASSED BY -20.04 dB at 0.18 MHz**

Frequency (MHz)	Line	Peak (dBuV)			Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	Detector Mode	Limits		Emission level	Limits	
0.15	H	39.92	P	66.00	-26.08	-	-	-
0.18	N	44.22	P	64.26	-20.04	-	-	-
0.24	H	38.07	P	61.92	-23.85	-	-	-
0.30	H	37.67	P	60.11	-22.44	-	-	-
0.37	H	36.18	P	58.50	-22.32	-	-	-
12.44	H	29.88	P	60.00	-30.12	-	-	-


Line Conducted Emissions Tabulated Data

Remark : "H": Hot Line, "N": Neutral line, "P": Peak detector.


Average mode was not measured, because peak values were under the Average limit.

The test of IS-95 CDMA, CDMA2000 and 1xEVDO modes were performed, but the worst data was recorded in this report.


See next page for an overview sweep performed with peak detector.



Tested by: Ki-Hong, Nam / Project Engineer

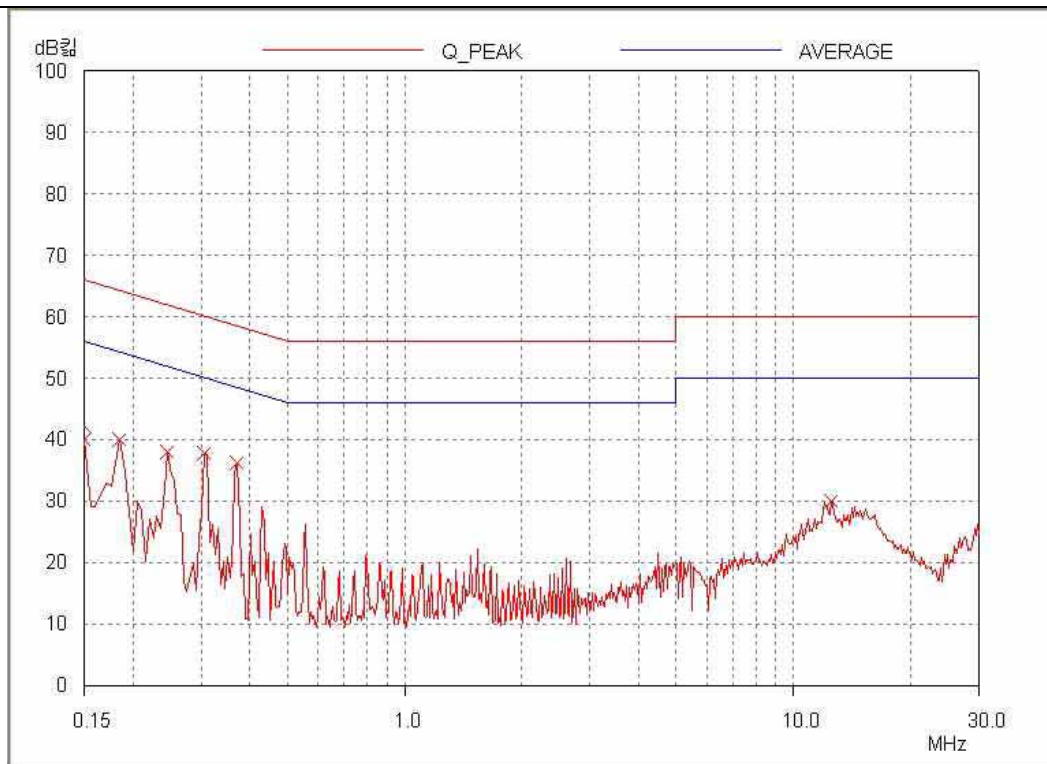

HOT LINE

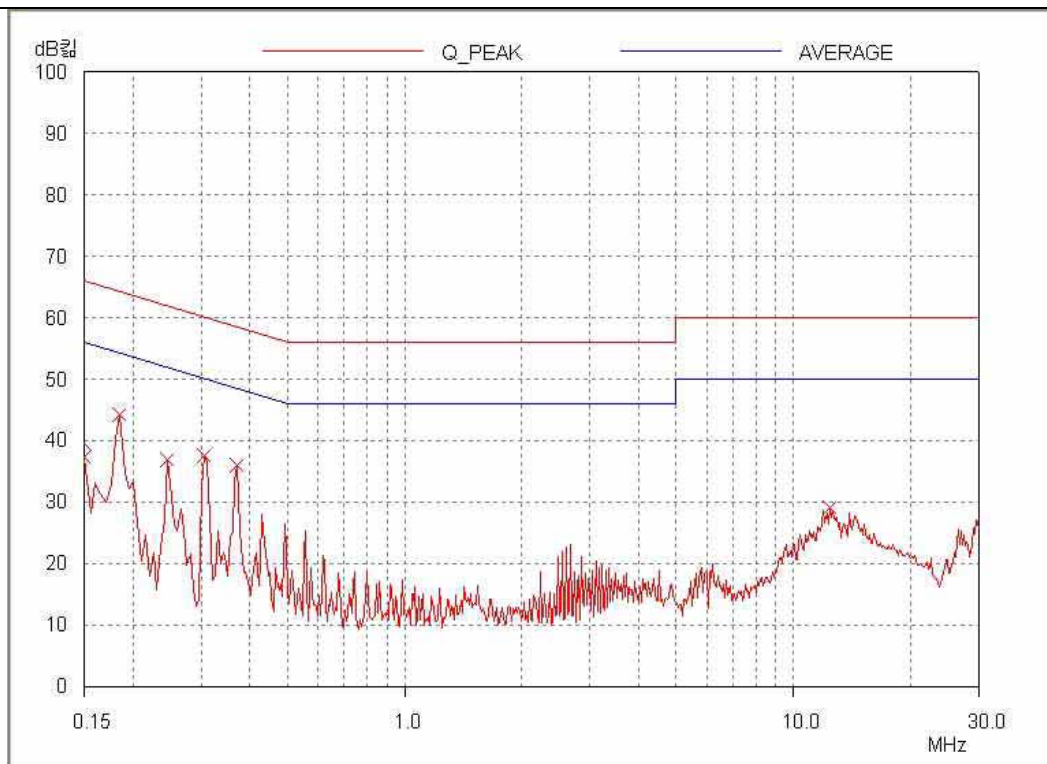

NEUTRAL LINE

16. MAXIMUM PERMISSIBLE EXPOSURE

16.1 RF Exposure Calculation

According to the FCC rule 1.1310 table 1B, the limit for the maximum permissible RF exposure for an uncontrolled environment is 1 mW/cm² for PCS Band and 0.579 mW/cm² for Cellular Band.

The electric field generated for a 1mW/cm² exposure is calculated as follows:

$$E = \sqrt{(30 * P * G) / d}, \text{ and } S = E^2 / Z = E^2 / 377, \text{ because } 1\text{mW} / \text{cm}^2 = 10\text{W} / \text{m}^2$$

Where

S = Power density in mW/cm², Z = Impedance of free space, 377Ω

E = Electric field strength in Volts/m, G = Numeric antenna gain, and d = distance in meter

Combining equations and rearranging the terms to express the distance as a function of the remaining variable

$$d = \sqrt{(30 * P * G) / (377 * S)}$$

Changing to units of mW and cm, using P (mW) = P (W) / 1000, d (cm) = 100 * d (m)

$$d = 0.282 * \sqrt{(P * G) / S}, \quad S = 0.282 * \sqrt{(P * G) / d}$$

Where

d = distance in cm, P = Power in mW, G = Numeric antenna gain, and S = Power density in mW/cm²

16.2 Calculated MPE Safe Distance

According to above equation, the following result was obtained.

Kind of Antenna	Peak Output Power		Antenna Gain		Power Density (mW/cm ²)
	(dBm)	(mW)	Log	Linear	
LINK Antenna	15.0	31.62	10.0	10.0	0.561 @ 80 cm Separation
Coverage Antenna	4.0	25.12	1.0	1.26	0.355 @ 20 cm Separation

According to above table,

$$\text{The power density for Link Antenna, } S = 0.282 * \sqrt{31.62 * 10.0 / 80} = 0.561$$

$$\text{The power density for Coverage Antenna, } S = 0.282 * \sqrt{25.12 * 1.26 / 20} = 0.3547$$

Following Caution on the manual will be described.

“CAUTION: Exposure to Radio Frequency Radiation.

Antenna shall be mounted in such a manner to minimize the potential for human contact during normal operation. The antenna should not be contacted during operation to avoid the possibility of exceeding the FCC radio frequency exposure limit.”