



MET Laboratories, Inc. Safety Certification - EMI - Telecom Environmental Simulation

914 WEST PATAPSCO AVENUE ! BALTIMORE, MARYLAND 21230-3432 ! PHONE (410) 354-3300 ! FAX (410) 354-3313



NVLAP
NRTL

August 1, 2002

Mobicom Corporation.
960 Holmdel Road, Bldg. II
Holmdel, NJ 07733

Reference: GSM PCS Phone C6288I
FCC ID: P8D-C6288I

Dear Mr. Murphy:

Enclosed is the EMC Test Report for the Mobicom Corporation GSM PCS Phone C6288I . The Mobicom Corporation GSM PCS Phone C6288I was tested to the requirements of the FCC Rules and Regulations, Part 24 Subpart E, of Title 47 of the CFR, for a Broadband PCS device.

Thank you for using the testing services of MET Laboratories. If you have any questions regarding these results or if MET can be of further assistance to you, please feel free to contact me. We appreciate your business and look forward to working with you again soon.

Kindest Regards,
MET LABORATORIES, INC.

Marianne T. Bosley
EMC Administrator

Enclosures: (\Mobicom Corporation\EMC12385-FCC24.rpt)

DOCTEM-23 Jan 02

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. While use of the National Voluntary Laboratory Accreditation Program (NVLAP) letters or the NVLAP Logo in this report reflects the MET Accreditation under the NVLAP Program, these letters, logo, or Statements do not claim product endorsement by NVLAP or any Agency of the U.S. Government.

**Electro-Magnetic Compatibility
Test Report**

for the
Mobicom Corporation
GSM PCS Phone C6288I

Tested Under

FCC Part 24, Subpart E
Title 47 of the CFR
for Broadband PCS Devices

MET REPORT: EMC12385-FCC24

June 11, 2002

PREPARED FOR:

Mobicom Corporation
960 Holmdel Road, Bldg. II
Holmdel, NJ 07733

PREPARED BY:

MET Laboratories, Inc.
914 West Patapsco Avenue
Baltimore, Maryland 21230-3432

Copyright 2002, MET Laboratories, Inc.

This report shall not be reproduced except in full, without the express written consent of MET Laboratories, Inc., nor shall this report, or any copy thereof be provided to a competitor of MET Laboratories, Inc.

**Electro-Magnetic Compatibility
Test Report
for the**

**Mobicom
GSM PCS Phone C6288I**

Tested Under

FCC Part 24 Subpart E

Title 47 of the CFR

for Broadband PCS Devices

MET REPORT: **EMC12385-FCC24**

PREPARED FOR:

Mobicom Corporation
960 Holmdel Road, Bldg. II
Holmdel, NJ 07733



Christopher R. Harvey, Director
Electromagnetic Compatibility Testing



Marianne T. Bosley
EMC Administrator

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 24, Subpart E, of the FCC Rules under normal use and maintenance.



Liming Xu
Project Engineer

REPORT STATUS SHEET

Revision	Report/ Revision Date	Reason for Revision
i	August 15, 2002	Initial Draft Issue.
1	September 4, 2002	Second Draft Issue

TABLE OF CONTENTS

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II	General	3
	A. Test Site	4
	B. Description of Test Sample	4
	C. General Test Setup	4
	D. Mode of Operation	4
	E. Antenna Specifications	7
	F. Modifications	7
	G. Disposition of Test Sample	7
III.	RF Power Output Requirements	8
	E.I.R.P. Measurements	10
IV.	Occupied Bandwidth Requirements	12
V.	Emissions Requirements	14
	Radiated Emissions	15
VI.	Test Equipment	16
VII.	Certification Label & User's Manual Information	18
	A. Certification Information	19
	B. Label and User's Manual Information	22

List of Tables

Table 1.	Summary of Test Results	vi
Table 2.	Summary of Test Data	vi
Table 3.	References	2
Table 4.	E.I.R.P. Measurements	10
Table 5.	Test Equipment List	17

List of Figures

Figure 1.	Test Configuration	5
Figure 2.	Test Setup Photo for Part 24 Tests	11

List of Terms and Abbreviations

AC	Alternating Current
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dBFA	Decibels above one microamp
dBFV	Decibels above one microvolt
dBFA/m	Decibels above one microamp per meter
dBFV/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
CISPR	Comite International Special des Perturbations Radioelectriques (International Special Committee on Radio Interference)
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
FH	microhenry
FF	microfarad
fs	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

Summary of Test Results

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 24, Subpart E. All tests were conducted using measurement procedure ANSI C63.4-1992.

Type of Submission/ Rule Part:	Part 24 Class II Permissive Change
EUT:	Mobicom Corporation GSM PCS Phone C6288I
FCC ID:	P8D-C6288I
Type of Emissions:	243KGXW (GSM)
RF Power Output:	GSM conducted output power 0.65 W, EIRP 0.5 Watt for all Channels
Frequency Range (MHz):	1850.2-1909.8
Frequency Stability:	+/- 50 Hz

Table 1.

Summary of Test Data

Name of Test	FCC Rule Part/Section	Results
RF Power Output	2.1046; 24.232 (a), (c)	Complies
Modulation Characteristics	2.1047 (a)	Not required for Permissive Change
Occupied Bandwidth	2.1049	Complies
Spurious Emissions at Antenna Terminals	2.1051; 24.238 (a)	Not required for Permissive Change
Spurious Emissions at Antenna Terminals Frequency Block Edges	2.1051; 24.238 (b)	Complies
Radiated Spurious Emissions	2.1053; 24.238 (a)	Complies
Frequency Stability over temperature variations	2.1055 (a) (1)	Not required for Permissive Change
Frequency Stability over battery power	2.1055 (d) (2)	Not required for Permissive Change
Frequency Stability over supply voltage variations	2.1055 (d) (1)	Not required for Permissive Change

Table 2.

I. Executive Summary

Executive Summary

A. Purpose of Test

An EMC evaluation to determine compliance of the GSM PCS phone with the requirements of Part 24, Subpart E, was conducted. (All references are to the most current version of Title 47 of the Code of Federal Regulations in effect). In accordance with §2.1033, the following data is presented in support of the Certification of the GSM PCS phone. Mobicom Corporation, should retain a copy of this document, and it should be kept on file for at least five years after the manufacturing of the GSM PCS phone has been **permanently** discontinued.

B. Executive Summary

The EUT, as supplied to MET Laboratories, complied with the requirements stated in this test report.

References	Description
ANSI-C63.4:1992	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz
FCC 47CFR, Chapter 1, Part 2	Title 47 Code of Federal Regulations Part 2 - Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
FCC 47CFR, Chapter 1, Part 15	Title 47 Code of Federal Regulations Part 15 - Radio Frequency Devices
FCC 47CFR, Chapter 1, Part 24	Title 47 Code of Federal Regulations Part 24E

Table 3. References

II. General

A. Test Site

All testing was conducted at MET Laboratories, Inc., 914 West Patapsco Avenue, Baltimore, Maryland 21230-3432. Radiated Emissions measurements were performed inside of a three-meter Semi Anechoic Chamber (equivalent to an Open Area Test Site, OATS). In accordance with §2.948(a)(2), a complete site description is filed with the Commission's Laboratory in Columbia, Maryland. MET Laboratories has been accredited by the National Voluntary Laboratory Accreditation Program (Lab Code: 100273-0).

B. Description of Test Sample

The GSM PCS phone is has the capability of sending and receiving voice and data in the form of individual packets of data.

C. General Test Setup

The Mobicom Corporation GSM PCS phone was configured with a fully charged battery, an external GSM service test set, and PCS interface to program the GSM PCS phone to output a GMSK Modulation type PCS RF signal. The GSM PCS phone was configured for maximum signal gain and bandwidth. There were two setups used during the course of testing. One, which measured the RF output directly, and one, which measured radiated fields indirectly. These are outlined in figures one and two.

D. Mode of Operation

The Mobicom Corporation GSM PCS Phone C6288I was configured in accordance with the manufacturer's instructions to communicate continuous packets of information to the CMU-200 GPRS/GSM test set. The test set was used to ensure that the EUT was operating at its' maximum output RF level during testing and to continuously monitor the integrity of the link. The parameters included output power, received/transmitted packets, and other pertinent characteristics of the transmitted waveform. This configuration was considered the worst case scenario since the unit would normally transmit and receive packets on an on demand basis. This mode of operation was the same regardless of the test configuration.

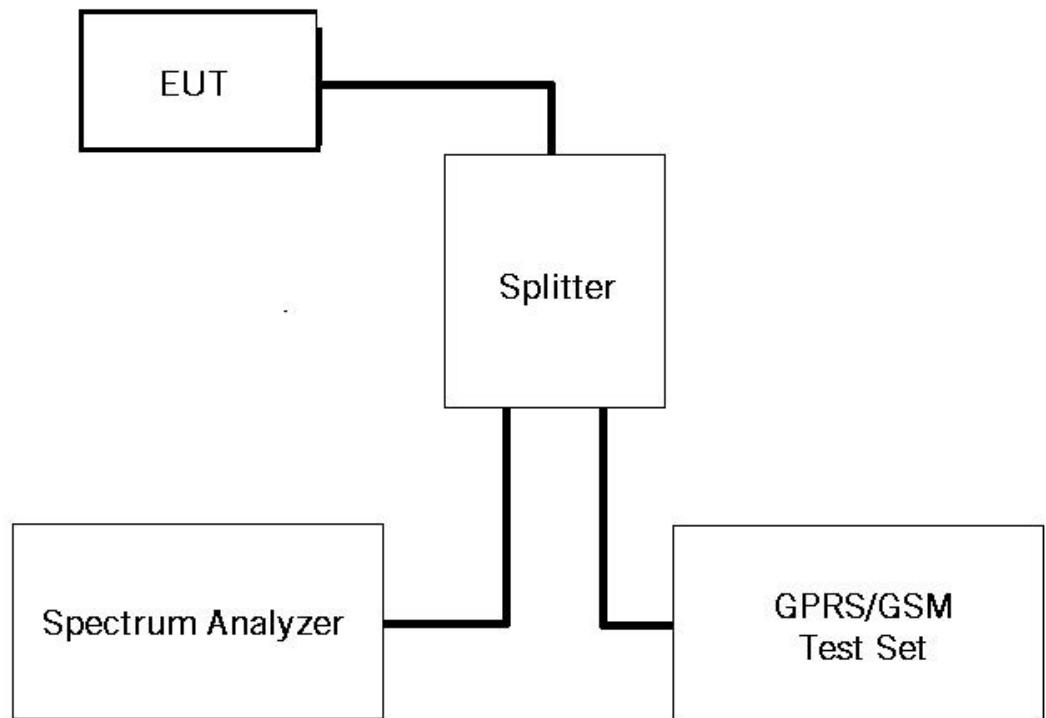


Figure 1
Direct Measurement Configuration

EUT and Support Equipment

Reference to Test Configuration	Description/ Nomenclature	Model #	Serial #	Revision
A	GSM PCS Phone	C6288I	-----	-----

Cards, Modules or Removable PCBs

Slot # or Reference to Card / Module Identification	Name of Module, Card or PCB	Model #	Serial #	Revision
	No removable modules			

E. Antenna Specifications:

Antenna is an integral, fixed Helical structure

F. Modifications:

No modifications were made during testing.

G. Disposition of Test Sample:

Mobicom Corporation
960 Holmdel Road, Bldg. II
Holmdel, NJ 07733

III. Electromagnetic Compatibility RF Power Output Requirements

Test Type: RF Power Output

Technical Specifications: §2.1046 and §24.232(a), (c)

Measurement Procedures:

As required by 47 CFR 2.1046, *RF power output measurements* were made at the RF output terminals using an attenuator and spectrum analyzer. This test was performed with carrier modulated by a GMSK modulated signal.

Results:

Equipment complies with 47CFR 2.1046 and 24.232(a), (c). The **GSM PCS phone** conducted power does not exceed limit at the carrier frequency.

All RF Power output measurements were conducted peak envelope power with instrument set RBW=1 or 2 MHz; the results are the same, which verified by a digital power meter (HP436A power meter and HP8481B power sensor).

Substitution Equivalent Isotropic Radiated Power (E.I.R.P)**Procedure:**

Radiated Measurements were made on a GSM 1900Mhz phone. The GSM PCS phone was placed on a 0.8-m high wooden table inside a shielded enclosure. An Antenna was placed 1meter from the GSM PCS phone and measurements were made for frequencies and amplitude of field strengths in three channel settings (Low, Mid and High). For EIRP Substitution method GSM PCS phone was replaced with a horn antenna, which was driven by a signal generator whose level, were adjusted to obtain the same level as received via the radiated method. EIRP is calculated by adding the gain of the horn antenna to the level on the signal generator.

Measurements were made according to the Substitution Method of ANSI/TIA/EIA-603-A.

Configuration:

Measurement were made with the GSM 1900MHz phone.

Result:

Below is the data taken from the Mobicom Phone model # 6288I (Pink/white) FCC ID P8D-C6288I.

Frequency (MHz)	Conducted Level (dBm)	EIRP (dBm)	EIRP (W)
1850.2	28.17	27.1	0.5
1869.8	28.17	27.1	0.5
1909.8	27.83	26.6	0.48

Table 4. EIRP Measurements



Figure 2. Photograph of Part 24 Tests Setup

Test Engineer: Liming Xu

Test Date: June 21, 2002


IV. Electromagnetic Compatibility Occupied Bandwidth Requirements

Test Type: Occupied Bandwidth

Technical Specifications: §2.1049

Measurement Procedures: As required by §2.1049 of CFR 47, occupied bandwidth measurements were made on the EUT. The GSM PCS phone was configured to transmit a GMSK modulated carrier signal. Using an IF bandwidth of 10KHz, we determined the occupied bandwidth of the emission at the center of the selectable channel range.

Results: Equipment complies with Section 2.1049. Plots of the occupied bandwidth, as measured at the RF output port follow:

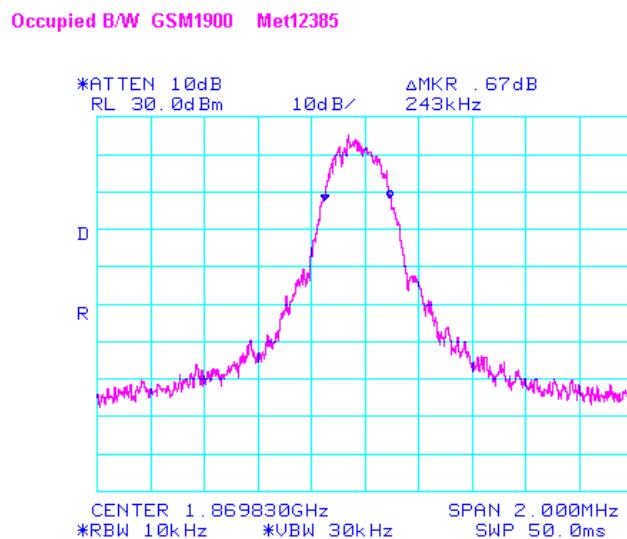

Test Engineer: Liming Xu

Test Date: June 28, 2002

V. Electromagnetic Compatibility Emissions Requirements

Radiated Emissions

Technical Specifications: §2.1053 and §24.238(a)

Measurement Procedures: As required by §2.1053, *field strength of spurious radiation measurements* were made in accordance with the general procedures of ANSI C63.4-1992 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". Preliminary radiated emission measurements were performed inside a shielded chamber with all digital signal generators on and terminated. The frequency list from the preliminary measurements was used as a guide for making final measurements in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). The unit was scanned over the frequency range of the lowest system oscillator value to 20 GHz.

The Radiated Spurious Emissions *Limit* is obtained by the following:

Based on an output power (as measured at the output of the Amplifier) of 0.5 watts:

$$P_o = 0.5W$$

the radiated power level of all spurious emissions must be attenuated by at least $43 + 10\log(P_o)$ below P_o , yielding:

$$Po - [43 + 10\log(Po)] = -13dBm$$

Results:

All of the measurable radiated emissions are related to the digital device portion of the EUT, and thus are compared to the 47CFR 15 Class B field strength limit. Mathematical calculations indicate that these field strengths yield radiated power levels greater than 30 dB below the -13 dBm limit for spurious emissions from the transmitter portion of the GSM PCS phone calculated above. There were no observable radiated emissions from the transmitter portion of the EUT.

The Spurious Radiated Emissions were measured from 1GHz to 20 Ghz for the Transceiver Module. There were no detectable spurious emissions in that frequency range. The device complies with 47 CFR 2.1053; 24.238(a).

VI. Test Equipment

Test Equipment	Manufacturer	Model #	Met Asset #	Cal Date	Cal Due
Receiver	HP	8546A	1T4302	08/17/02	08/17/03
Receiver	HP	8564E	1T4316	10/18/01	10/18/02
Antenna	Schaffner	CBL6140A	1T4303	03/27/02	03/27/03
Test Room	ETS	Chamber 1	1T4300	08/17/01	08/17/02

Table 5. Test Equipment List

VII. Certification Label & User's Manual Information

A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
 - (i) Compliance testing;
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production stages; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service

wherein the equipment is to be operated.¹ In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.

- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, or the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant, whichever is applicable.

§ 2.907 Certification.

- A. Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
 - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
 - (i) If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.
 - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
 - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

¹In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart C (of Part 15), which deals with intentional radiators.

B. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:

(ii) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(ii) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(ii) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

(a) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

End of Report