


GP-24-3 (3-deg downtilt)

2.4GHz Omnidirectional Base Antenna

Specifications

- 2400-2500MHz
- 3-degree downtilt
- VSWR: Less than 1.5:1
- Gain: 12dBi
- Length: 5 ft 10 inches
- Weight: 2 lbs 9 oz
- -3dB Beam-width: 5 degrees
- Cross polar rejection: 14dB+
- Max Power: 100 watts
- Max Wind Survival: 135MPH
- Wind Load: 35.3 sq in (245 sq ft)
- Mast Required: 1.25-2.5 inches
- Connector: Integral N-female
- Radome: One piece white UV stabilized fiberglass.
- Extruded aluminum/rainless steel mounting hardware included

Vertical radiation pattern

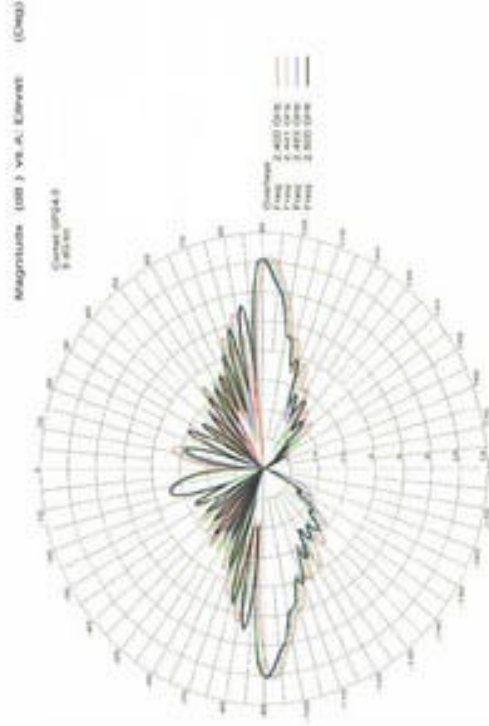

NCG Company

1275 N. Grove St.
Anaheim, CA 92806-2114

Phone: 800.962.2611

Fax: 714.630.7024

Email: micks@natcommgroup.com

FEATURES

- Extremely high gain omnidirectional pattern for long range point-to-multipoint applications.
- Heavy duty fiberglass radome, 134+ MPH wind survival.
- Extruded aluminum mounting brackets, stainless steel U-bolts/hardware.
- Mounting pipe acts as a shroud to protect the coax to antenna connection from the weather.
- Ideal for the license free 2.4GHz ISM band, spread spectrum radios, WLAN, Wireless Internet Point Of Presence, WCS systems.