



**FCC CFR47 PART 15 SUBPART C  
CERTIFICATION**

**TEST REPORT**

**FOR**

**802.11 b/g OUTDOOR WI-FI CELLULAR BASE STATION**

**MODEL SERIES: 52102100, 52102200, 52103000, 52103100**

**FCC ID: P9J-52101000**

**REPORT NUMBER: 04U3022-1**

**ISSUE DATE: OCTOBER 20, 2004**

*Prepared for*  
**TROPOS NETWORKS**  
**555 DEL REY AVENUE**  
**SUNNYVALE, CA 94085**  
**U.S.A.**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES**  
**561F MONTEREY ROAD,**  
**MORGAN HILL, CA 95037, USA**  
**TEL: (408) 463-0885**  
**FAX: (408) 463-0888**

*\*Details of specific model(s) tested and model differences shall be identified in body of report*



Revision History

Rev.	Revisions	Revised By
001	Took out the PSD & Conducted Spurious plots and data for 12dBi Antenna	Yan Zheng
002	Added three models to the EUT	Danielle Zhan
003	Added one Omni antenna with a max. gain of 9.9dBi	Danielle Zhan

## TABLE OF CONTENTS

<b>1. TEST RESULT DECLARATION .....</b>	<b>4</b>
<b>2. EUT DESCRIPTION.....</b>	<b>5</b>
2.1. <i>Model difference .....</i>	5
<b>3. TEST METHODOLOGY .....</b>	<b>6</b>
<b>4. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>5. CALIBRATION AND UNCERTAINTY.....</b>	<b>7</b>
5.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	7
5.2. <i>MEASUREMENT UNCERTAINTY.....</i>	7
5.3. <i>TEST AND MEASUREMENT EQUIPMENT.....</i>	8
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>9</b>
<b>7. APPLICABLE LIMITS AND TEST RESULTS .....</b>	<b>11</b>
7.1. <i>CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND .....</i>	<i>11</i>
7.1.1. 6 dB BANDWIDTH .....	11
7.1.2. 99% BANDWIDTH.....	18
7.1.3. PEAK OUTPUT POWER .....	25
7.1.4. MAXIMUM PERMISSIBLE EXPOSURE.....	39
7.1.5. AVERAGE POWER.....	42
7.1.6. PEAK POWER SPECTRAL DENSITY .....	44
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	51
7.2. <i>RADIATED EMISSIONS.....</i>	<i>64</i>
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS .....	64
7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND WITH 7.4dBi OMNI ANTENNA.....	67
7.2.3. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND WITH 12dBi OMNI ANTENNA .....	85
7.2.4. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND WITH 12dBi SECTOR ANTENNA .....	103
7.2.5. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH 7.4dBi OMNI ANTENNA .....	121
7.2.6. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH 12dBi OMNI ANTENNA .....	125
7.2.7. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH 12dBi SECTOR ANTENNA .....	129
7.3. <i>POWERLINE CONDUCTED EMISSIONS .....</i>	<i>133</i>
<b>8. SETUP PHOTOS .....</b>	<b>137</b>

## 1. TEST RESULT DECLARATION

**COMPANY NAME:** TROPOS NETWORKS  
 555 DEL REY AVENUE  
 SUNNYVALE, CA 94085, U.S.A.

**EUT DESCRIPTION:** 802.11b/g OUTDOOR WI-FI CELLULAR BASE STATION

**MODEL TESTED:** 52102100, 52102200, 52103000, 52103100

**DATE TESTED:** OCTOBER 11 - 18, 2004

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:

---

YAN ZHENG  
 EMC SUPERVISOR  
 COMPLIANCE CERTIFICATION SERVICES

Tested By:

---

CHIN PANG, DAVID GARCIA, NEELESH RAJ  
 EMC ENGINEER  
 COMPLIANCE CERTIFICATION SERVICES

## 2. EUT DESCRIPTION

The EUT is an 802.11b/g outdoor Wi-Fi cellular base station.

The device has a maximum peak conducted output power as follows:

7.4 dBi Antenna

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	28.54	714.50
2412 - 2462	802.11g	27.16	520.00

9.9dBi & 12 dBi Antennas

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	23.98	250.03
2412 - 2462	802.11g	23.96	248.89

The radio utilizes four antennas for diversity, each with a maximum gain of 7.4dBi (Omni Antenna), 9.9dBi (Omni Antenna), 12dBi (Omni Antenna) and 12dBi (Sector Patch type Antenna).

### 2.1. Model difference

The EUT model number was changed after testing commenced. All data in this report is applicable to the model tested documented in Section 1 above. The model tested is one version within the 5100xx00 model series. The following table shows the model differences.

Model Series	5100xx00
Model Name	xx: 21, 22, 30, 31
Model Difference	52102100 – Tropos 5210 AC powered, N connectors, antennas not included; 52102200 – Tropos 5210 AC powered, with Battery Backup, N connectors, antennas not included; 52103000 – Tropos 5210 AC powered, 7.4dBi antennas unit attached; 52103100 – Tropos 5210 AC powered, with Battery Backup, 7.4dBi antennas unit attached

### 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/2001, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

### 4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.



No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

## 5. CALIBRATION AND UNCERTAINTY

### 5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

### 5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Spectrum Analyzer 20 Hz ~ 44 GHz	Agilent	E4446A	US42070220	1/13/2005
Amplifier 1-26GHz	MITEQ	NSP2600-SP	924342	8/17/05
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	2/4/05
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/20/04
RF Filter Section	HP	85420E	3705A00256	11/20/04
EMI Test Receiver	R & S	ESHS 20	827129/006	10/22/05
Line Filter	Lindgren	LMF-3489	497	CNR
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	10/13/05
AC Power Source, 10KVA	ACS	AFC-10K-AFC-2	J1568	CNR
4.6GHz HPF	MiLCROWAVE	4570-9SS	3	CNR
Peak / Average Power Sensor	Agilent	E9327A	US40440755	11/7/04
10dB Attenuator	MCE/WEINSCHEL	56-10	K6158	CNR

## 6. SETUP OF EQUIPMENT UNDER TEST

### SUPPORT EQUIPMENT


PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Dell	PP10L	NA	QDS-BRCM1005-D
AC Adapter	Dell	HP0Q065B83	NA	DoC

### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	5m	N/A
2	Mgt	1	RJ45	Shielded	5m	Connected to Laptop

### TEST SETUP

The EUT is a standalone unit and is connected to a laptop computer via an RJ45 cable during the tests. Test software exercised the radio.

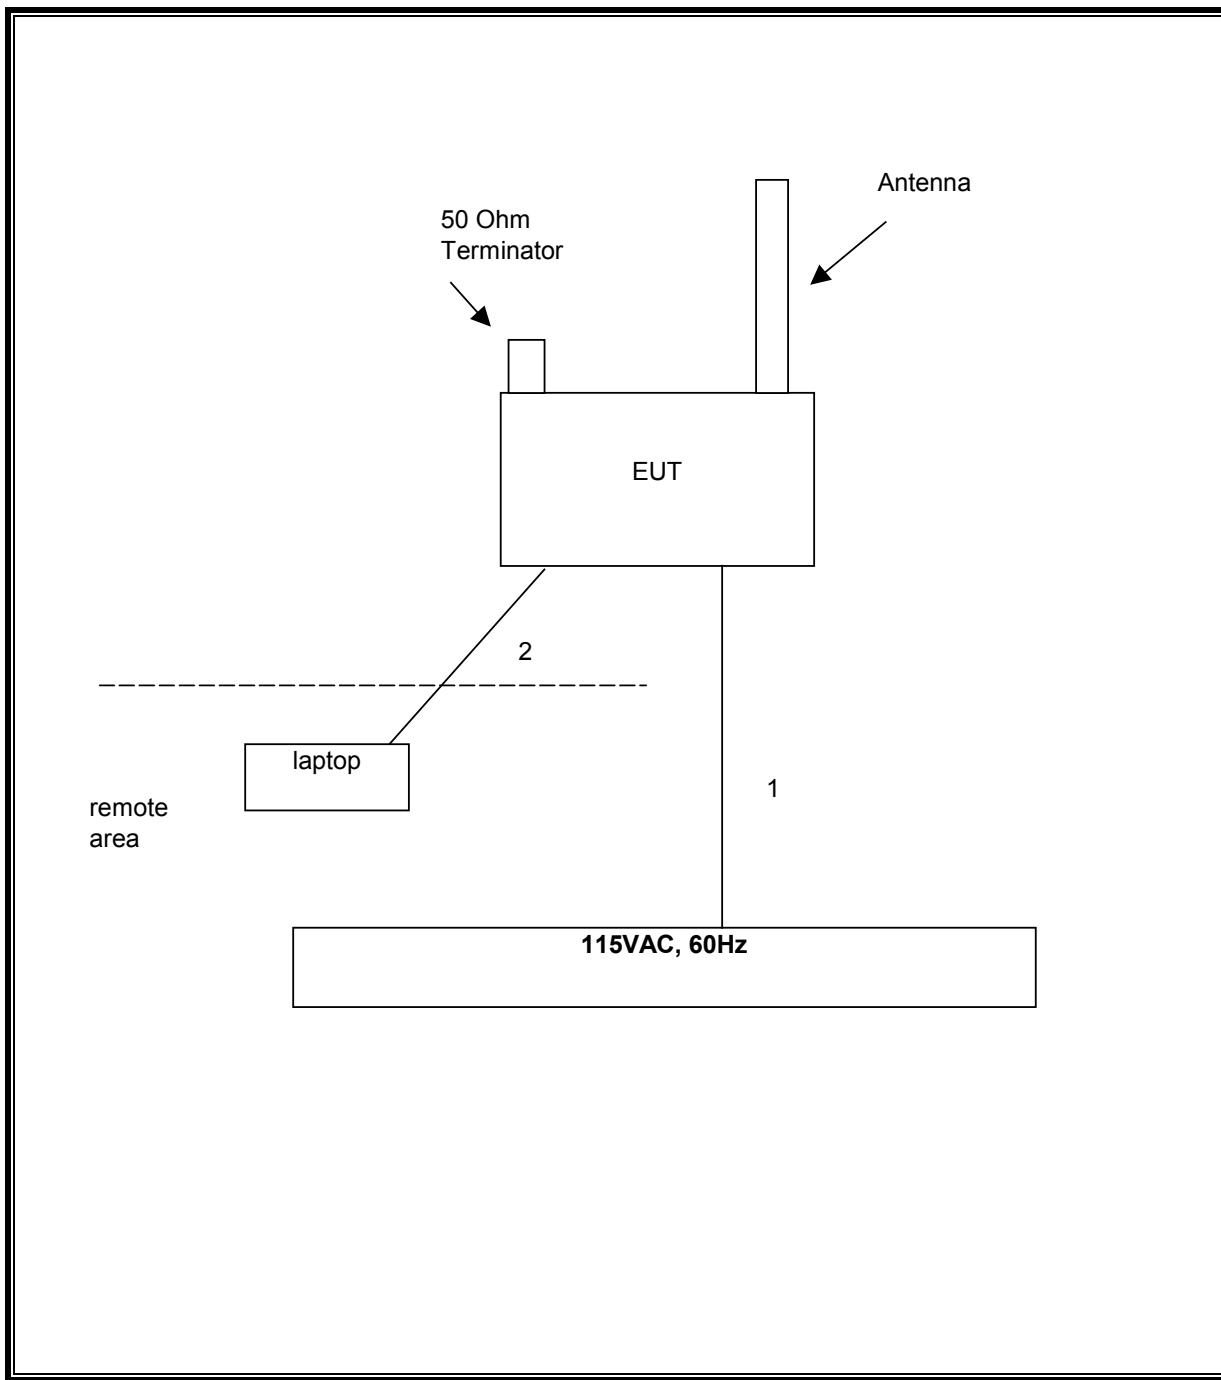**SETUP DIAGRAM FOR TESTS**

## 7. APPLICABLE LIMITS AND TEST RESULTS

### 7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND

#### 7.1.1. 6 dB BANDWIDTH

##### LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

##### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

##### RESULTS


No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	12030	500	11530
Middle	2437	12000	500	11500
High	2462	11570	500	11070


802.11g Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16580	500	16080
Middle	2437	16670	500	16170
High	2462	16500	500	16000

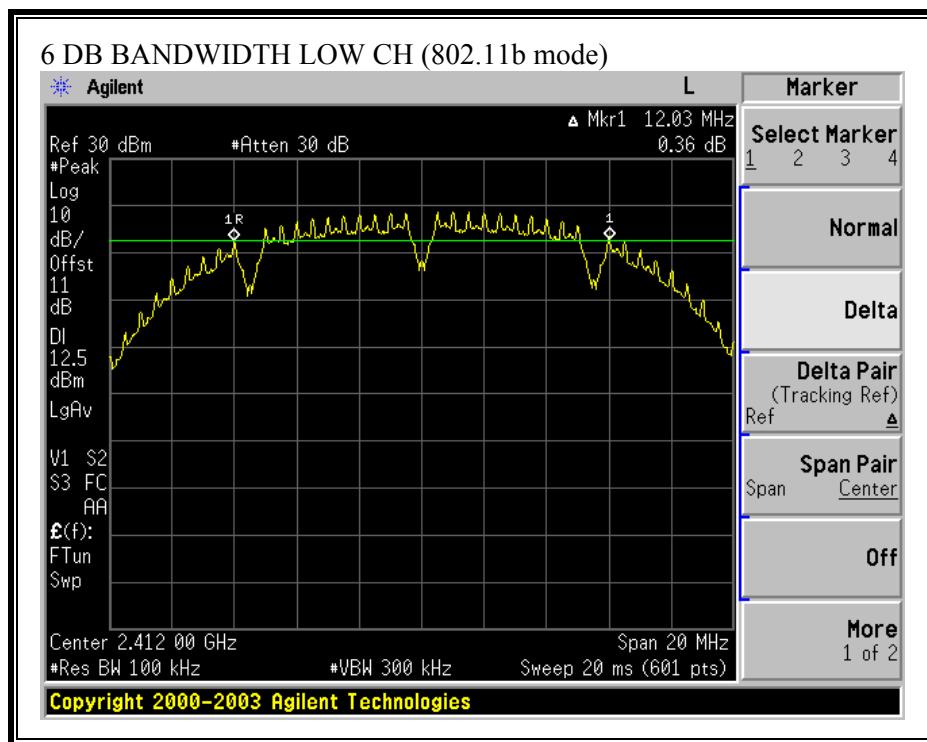
**6 DB BANDWIDTH (802.11b MODE)**

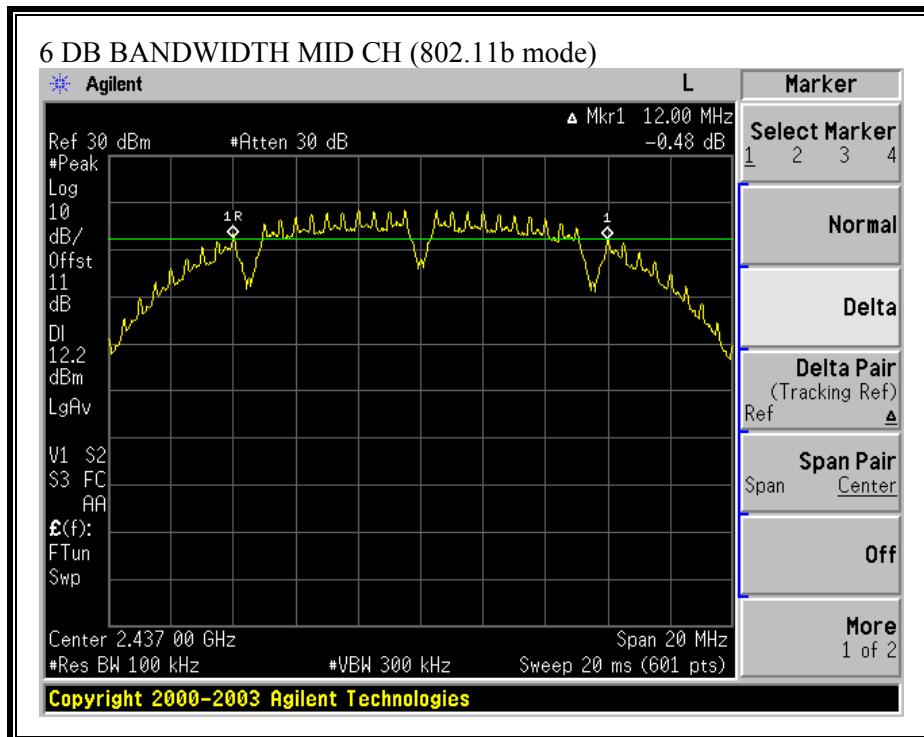

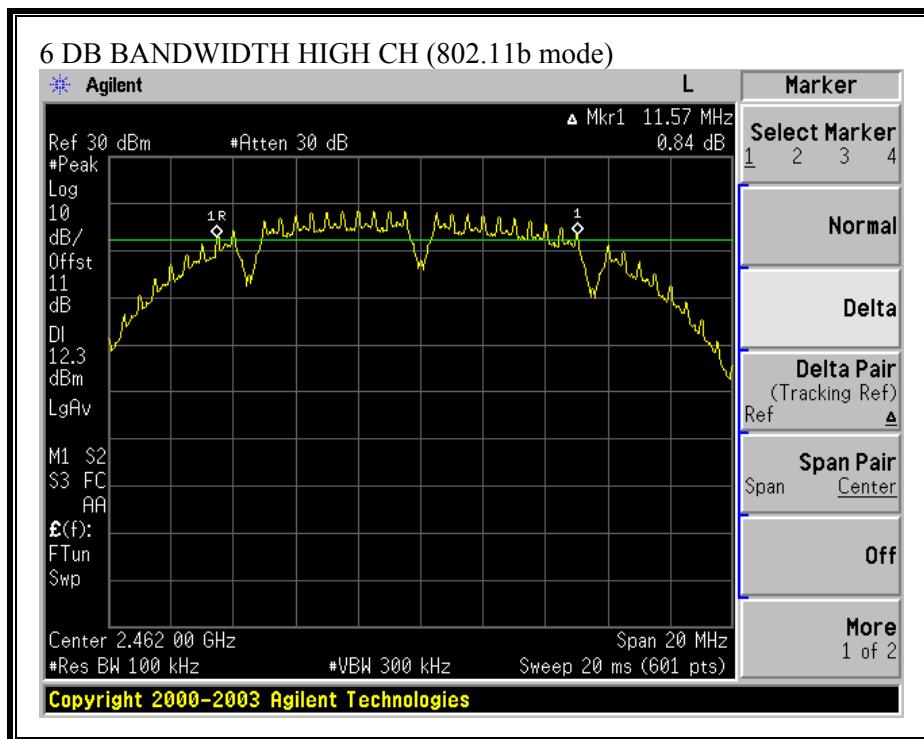

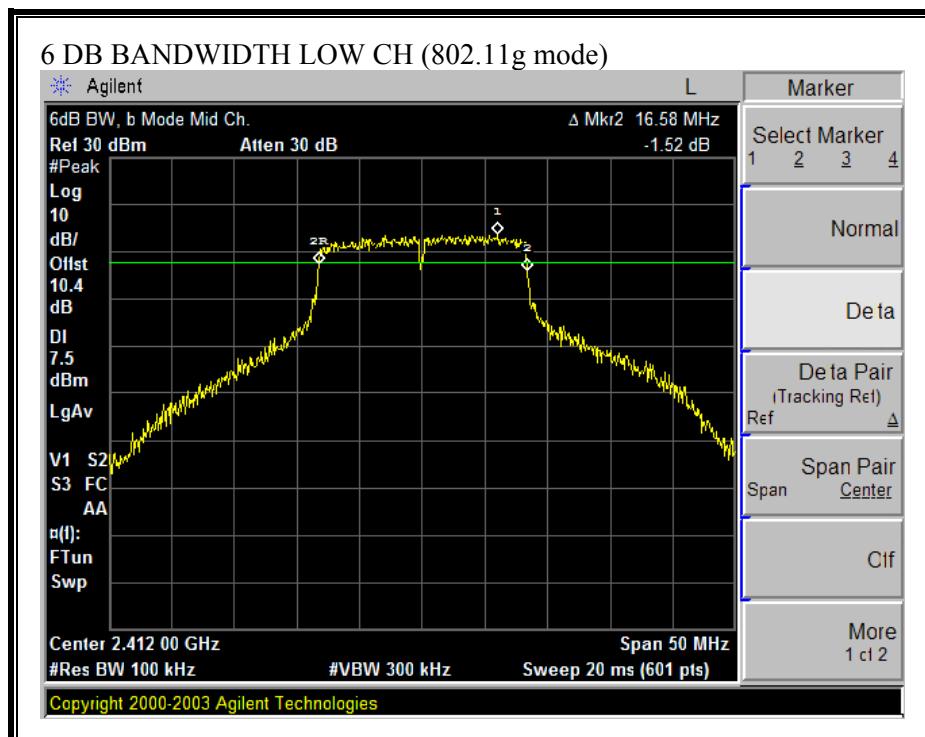**6 DB BANDWIDTH (802.11g MODE)**

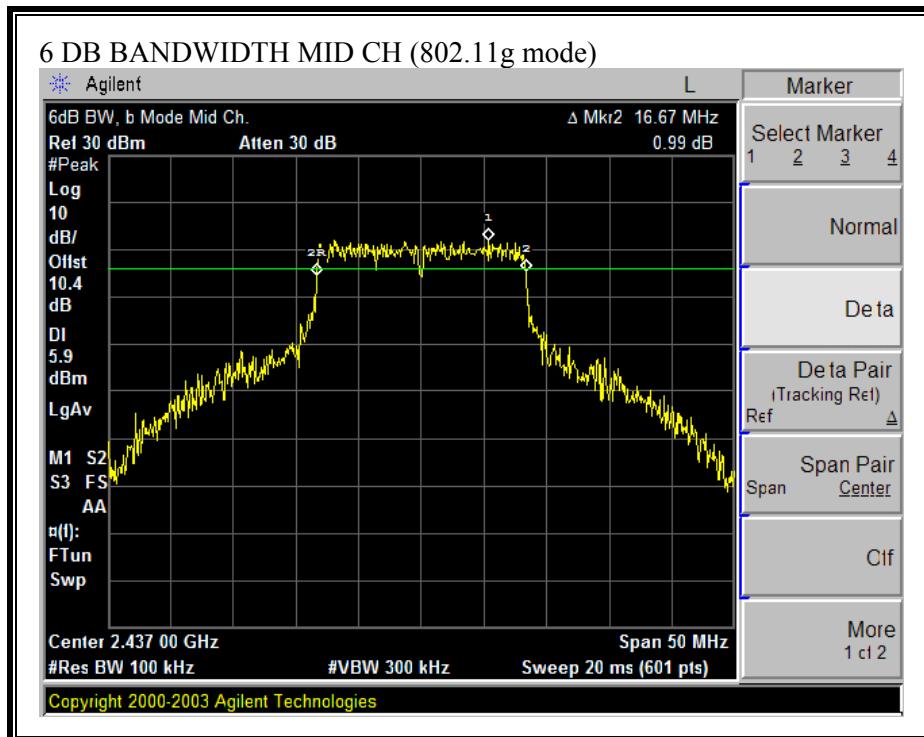

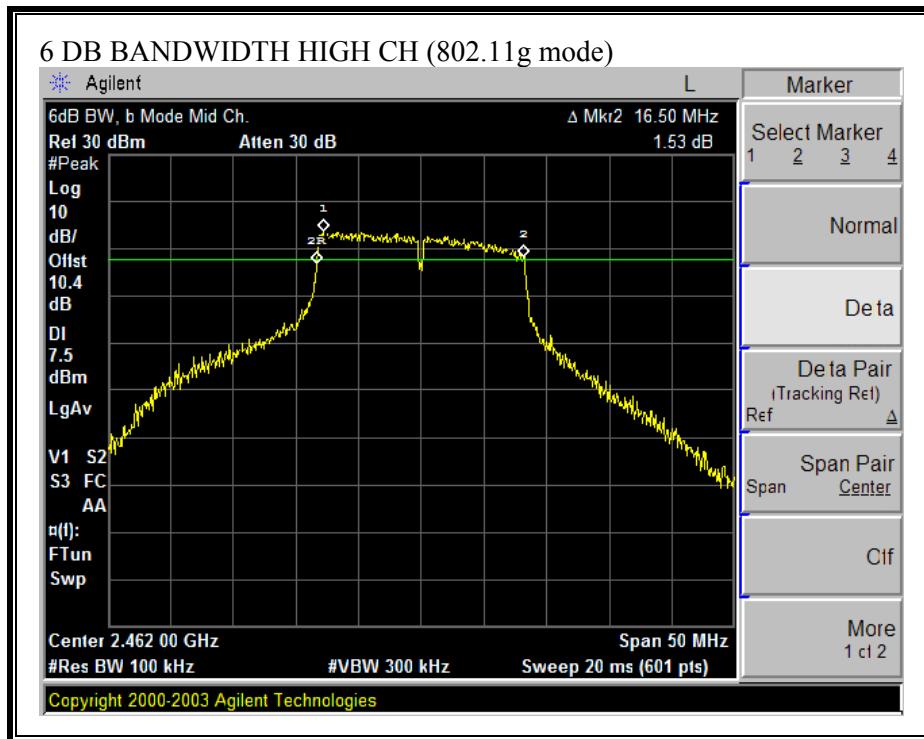

### 7.1.2. 99% BANDWIDTH

#### LIMIT

None: for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

#### RESULTS


No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	15.5124
Middle	2437	15.9130
High	2462	15.5645


802.11g Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.4704
Middle	2437	16.5498
High	2462	16.4743

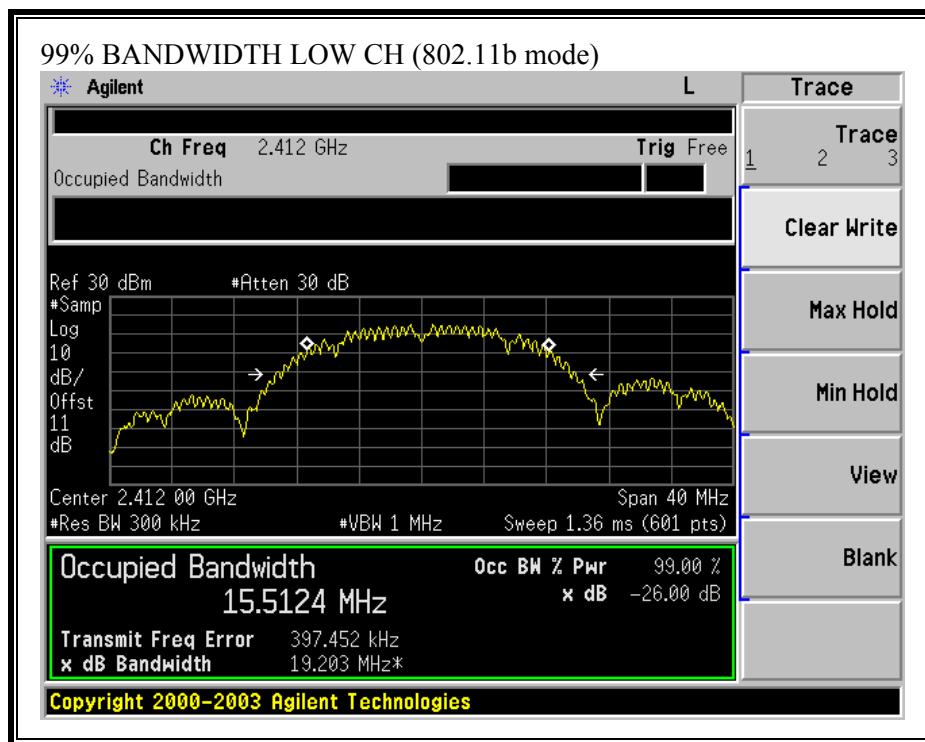
**99% BANDWIDTH (802.11b MODE)**

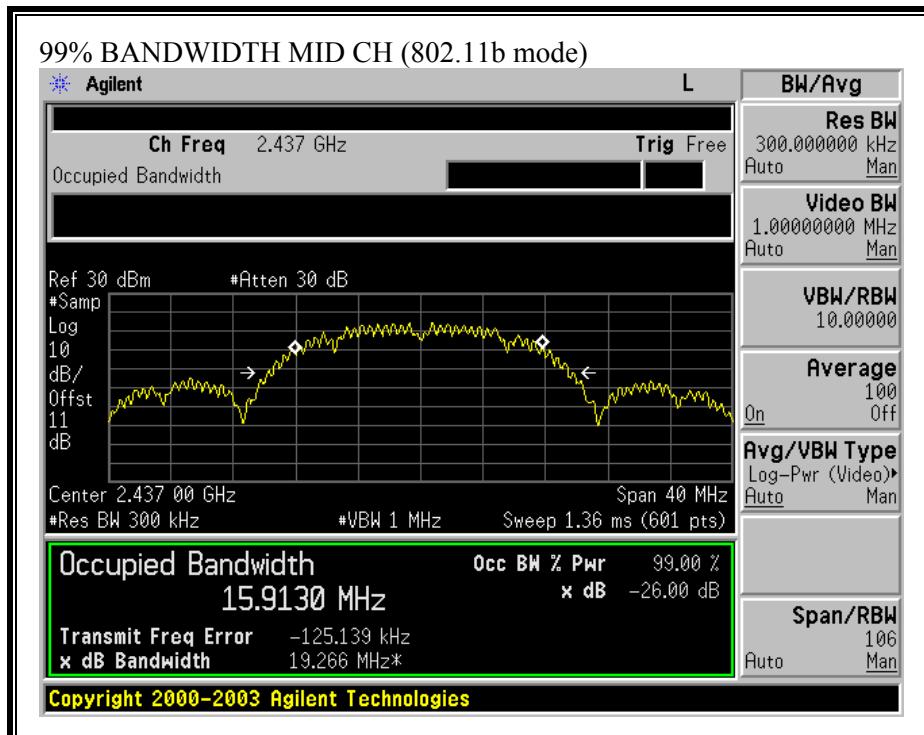

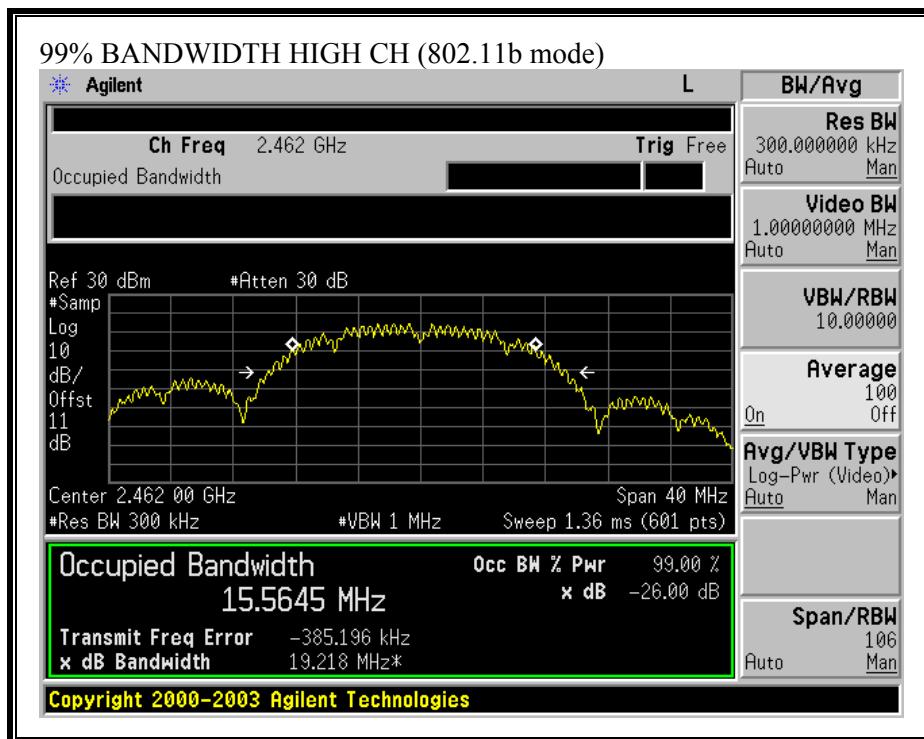

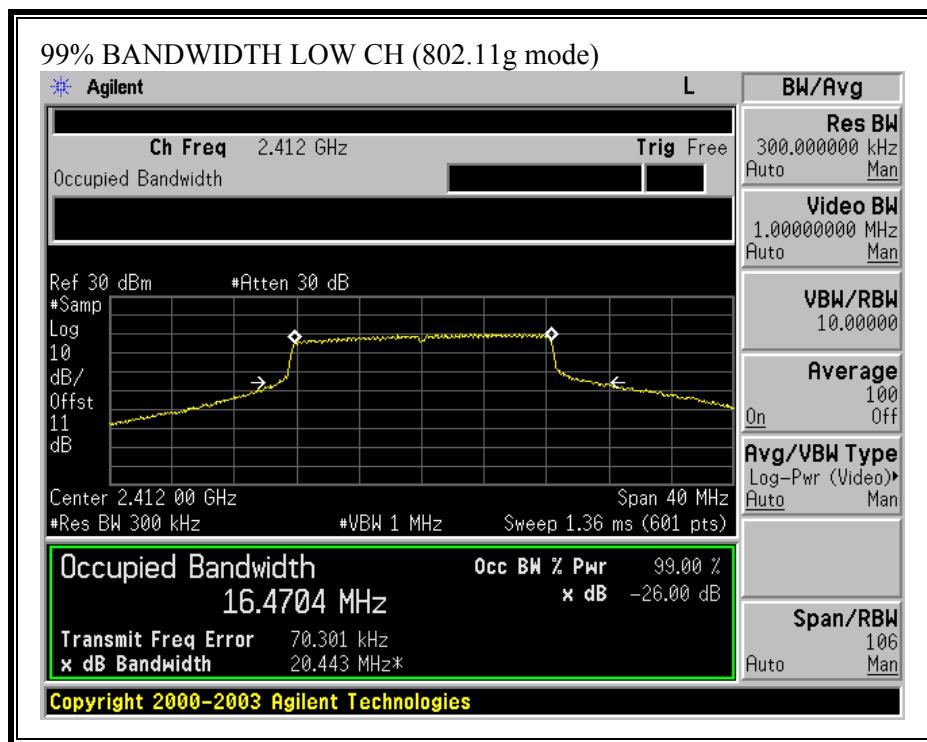**99% BANDWIDTH (802.11g MODE)**

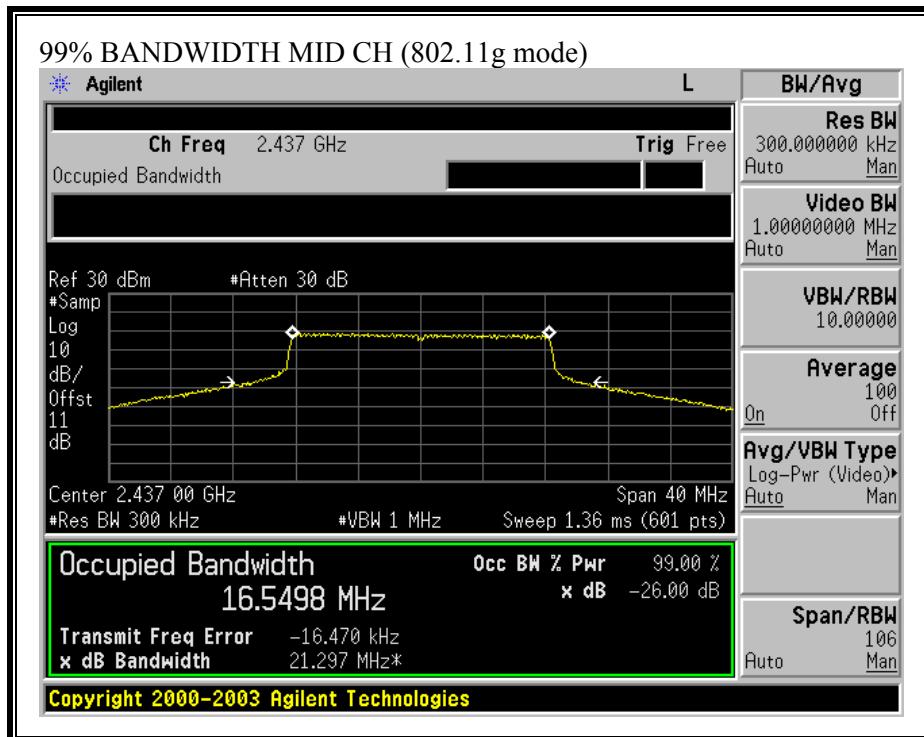

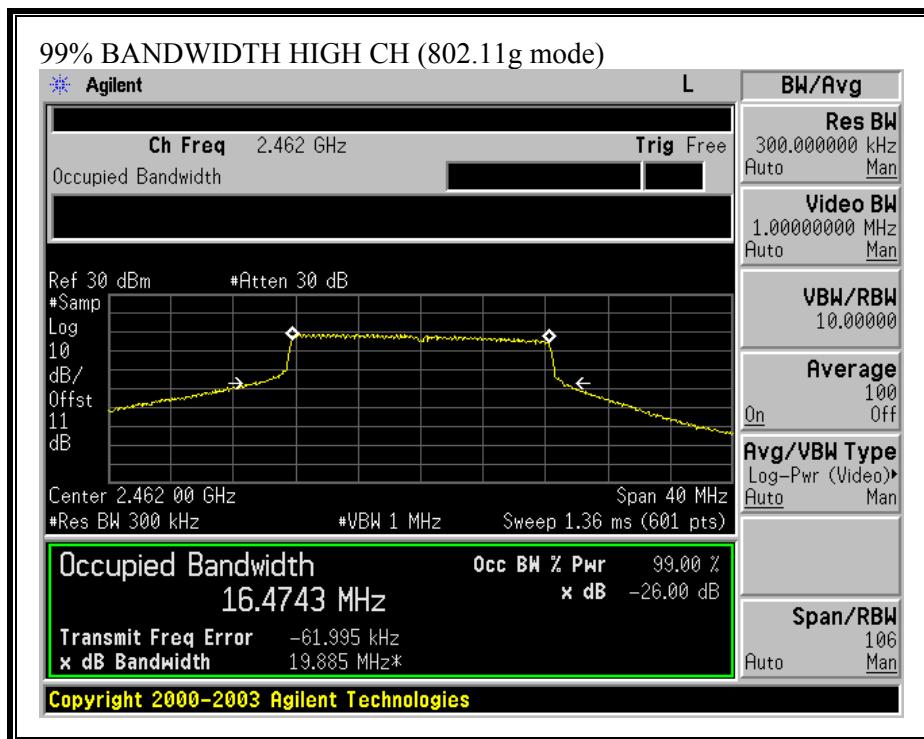

### 7.1.3. PEAK OUTPUT POWER

#### PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator should not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(4) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

This is not fixed, point-to-point operation system. Therefore, for the maximum antenna gain of 7.4dBi, the limit is 28.6dBm; and for the maximum antenna gain of 12dBi, the limit is 24dBm.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 26dB bandwidth.

**RESULTS**

No non-compliance noted:

**For 7.4dBi Antenna**

## 802.11b Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	28.54	28.6	-0.06
Middle	2437	28.15	28.6	-0.45
High	2462	28.39	28.6	-0.21

## 802.11g Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	27.16	28.6	-1.44
Middle	2437	26.69	28.6	-1.91
High	2462	26.66	28.6	-1.94


**For 9.9dBi & 12dBi Antennas**


## 802.11b Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	23.98	24	-0.02
Middle	2437	23.98	24	-0.02
High	2462	23.76	24	-0.24


## 802.11g Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	23.96	24	-0.04
Middle	2437	23.95	24	-0.05
High	2462	23.85	24	-0.15

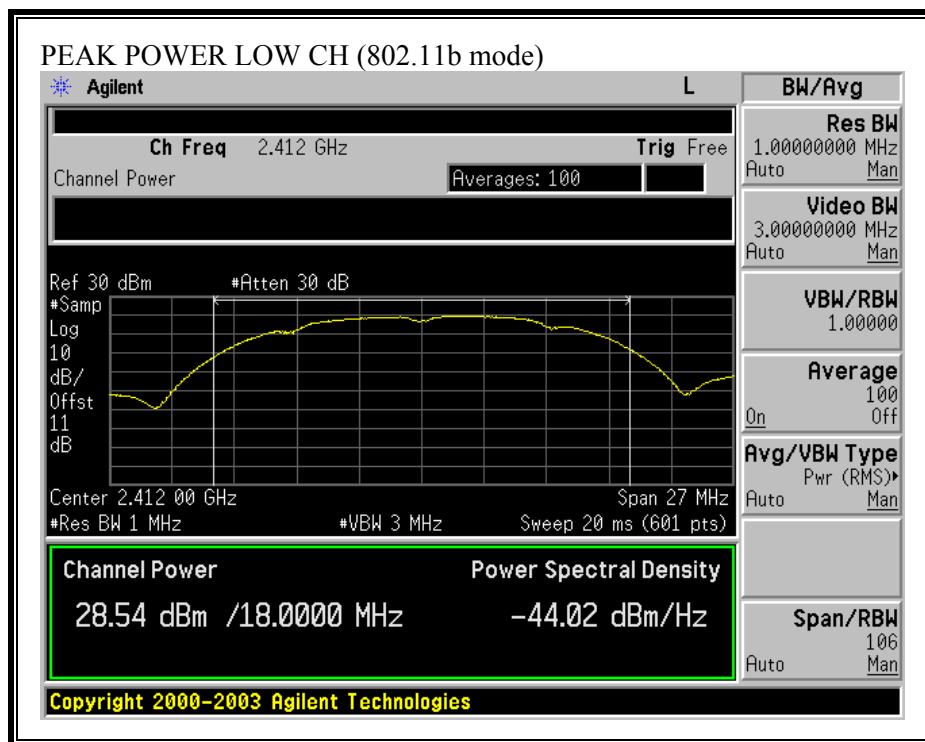
**For 7.4dBi Antenna****OUTPUT POWER (802.11b MODE), 7.4dBi OMNI ANTENNA**

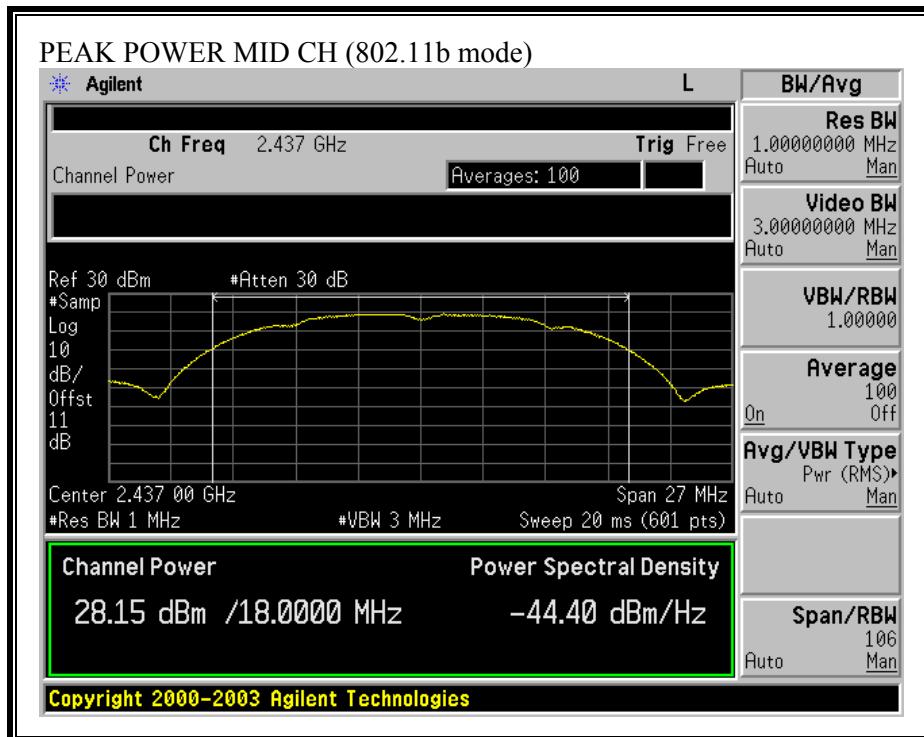


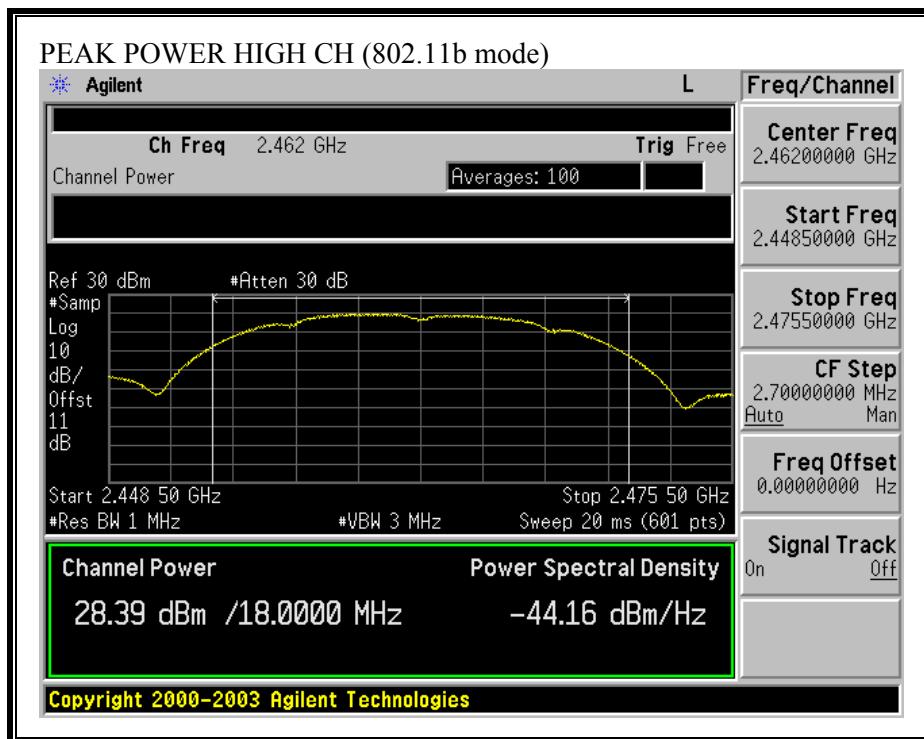


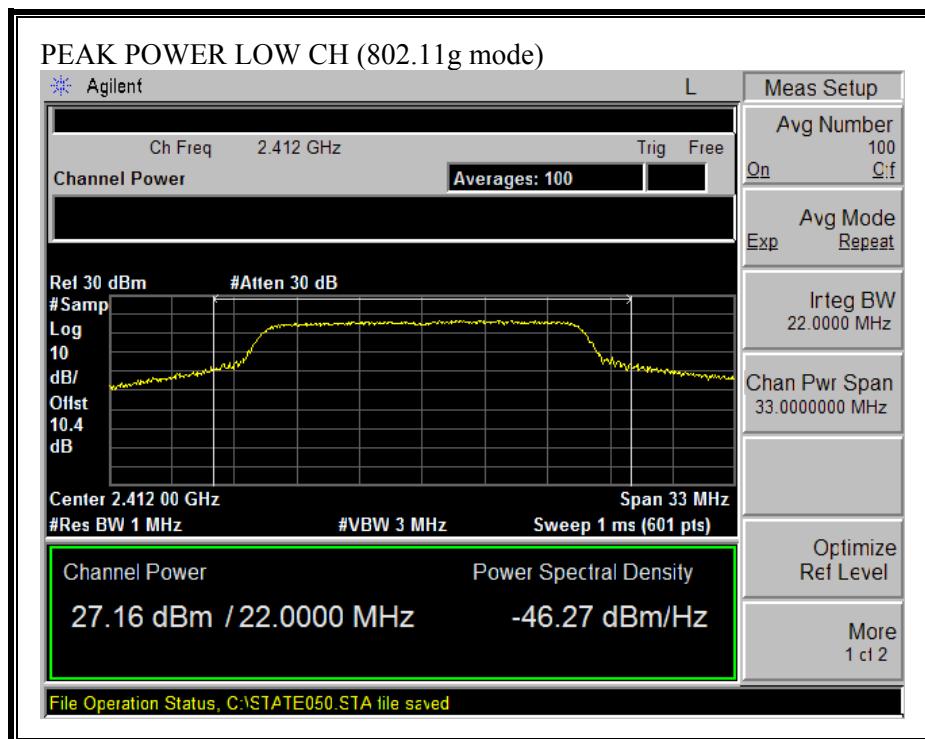
OUTPUT POWER (802.11g MODE) 7.4dBi OMNI ANTENNA

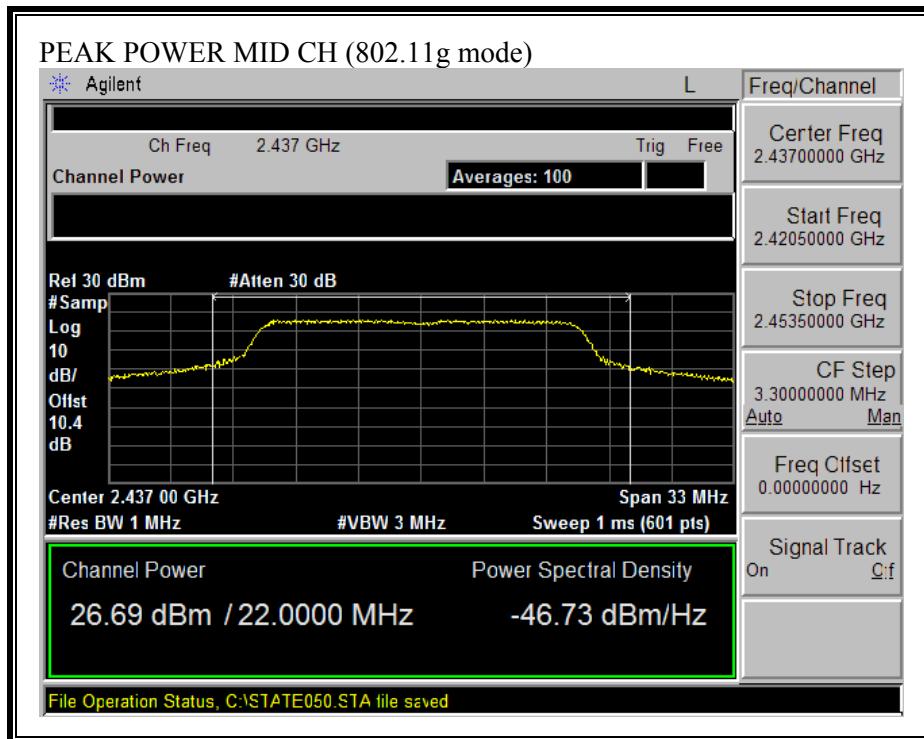


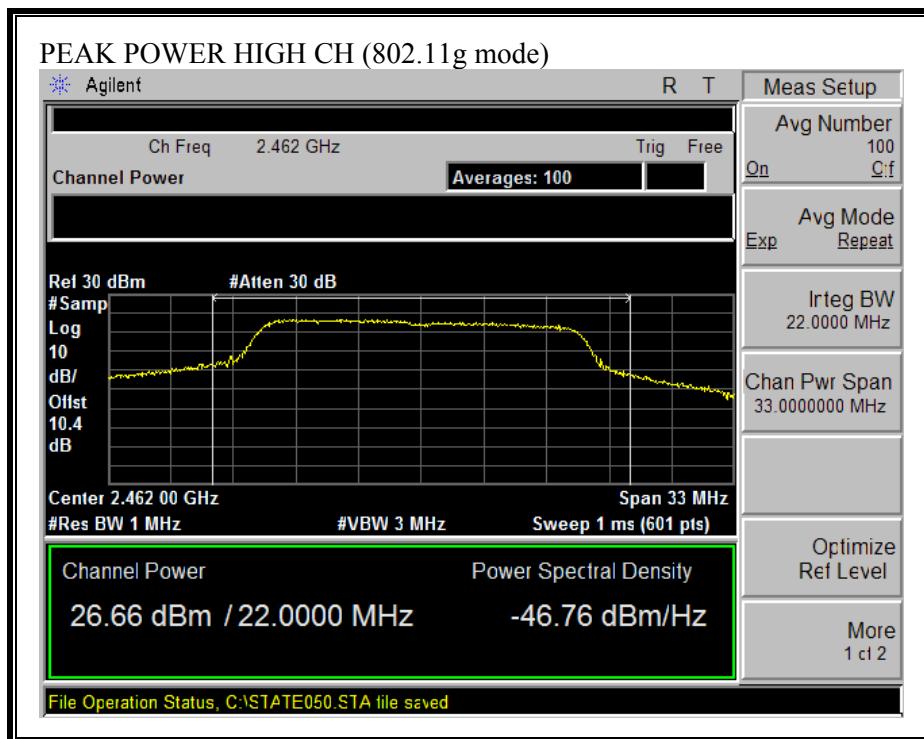


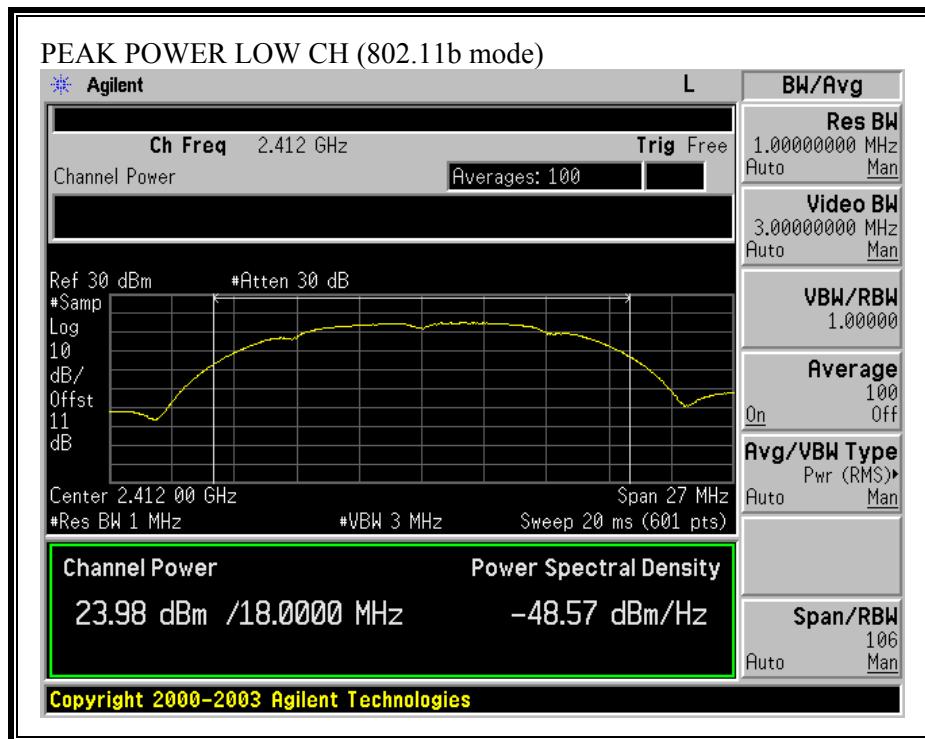
**For 12dBi Antenna****OUTPUT POWER (802.11b MODE), 12dBi ANTENNA**

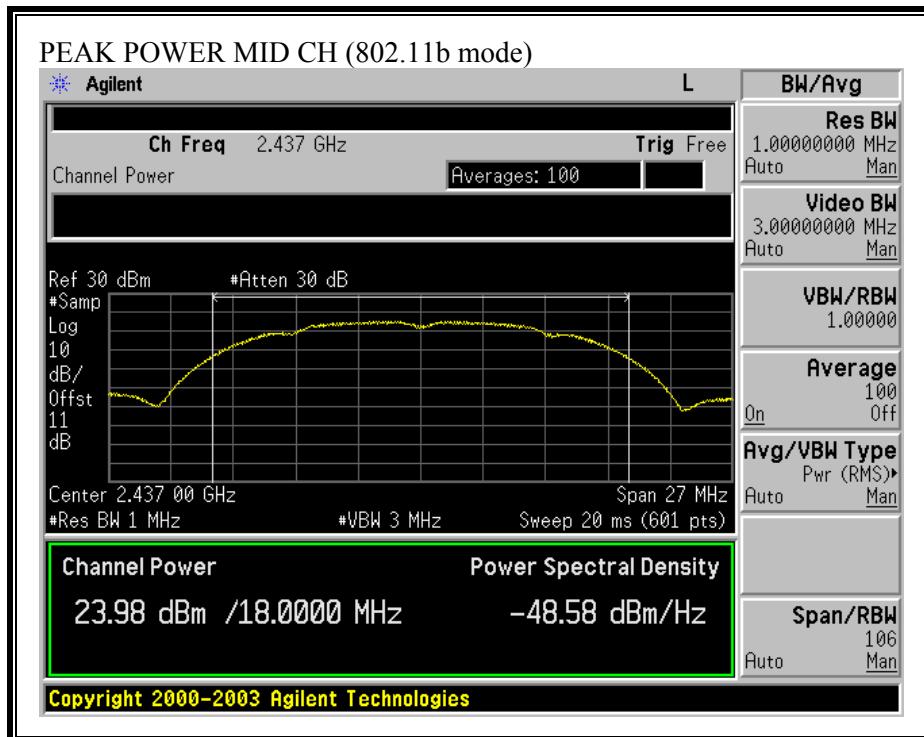

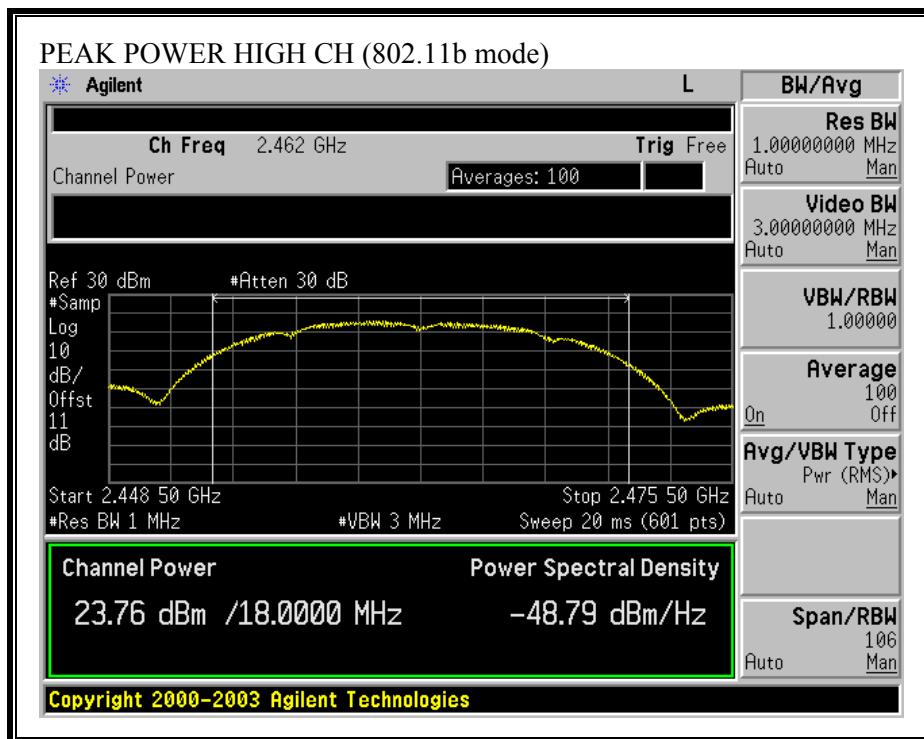

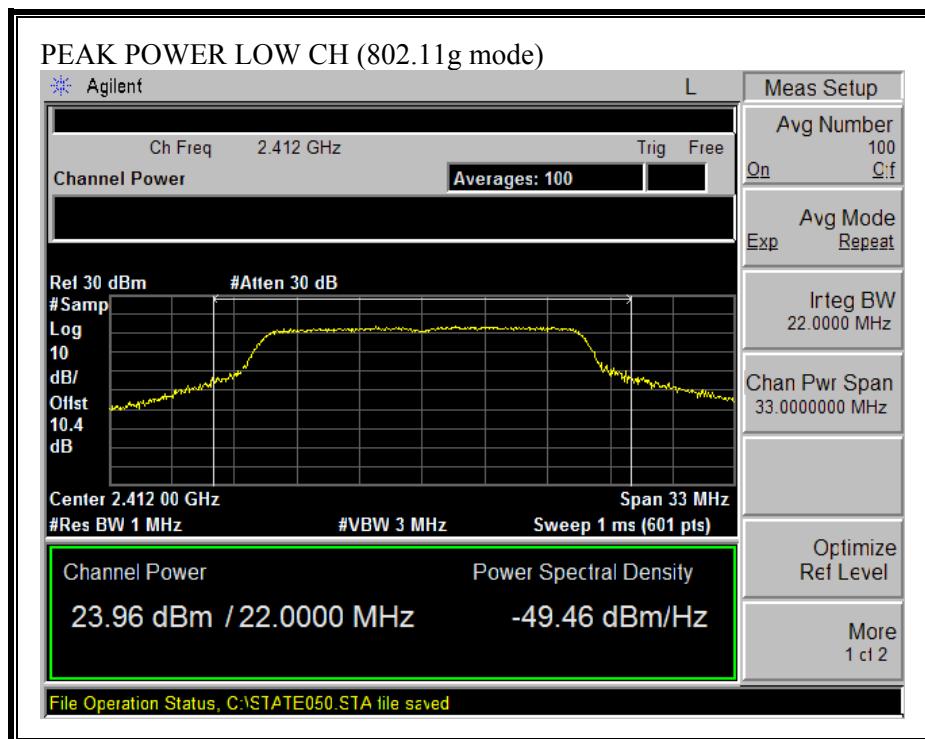OUTPUT POWER (802.11g MODE) 12dBi ANTENNA

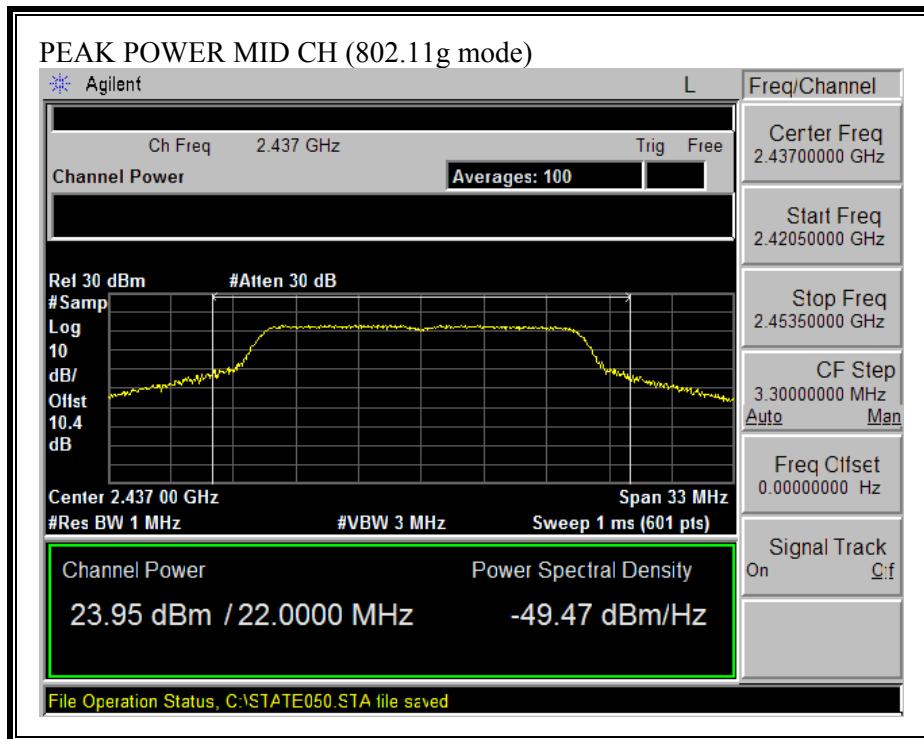

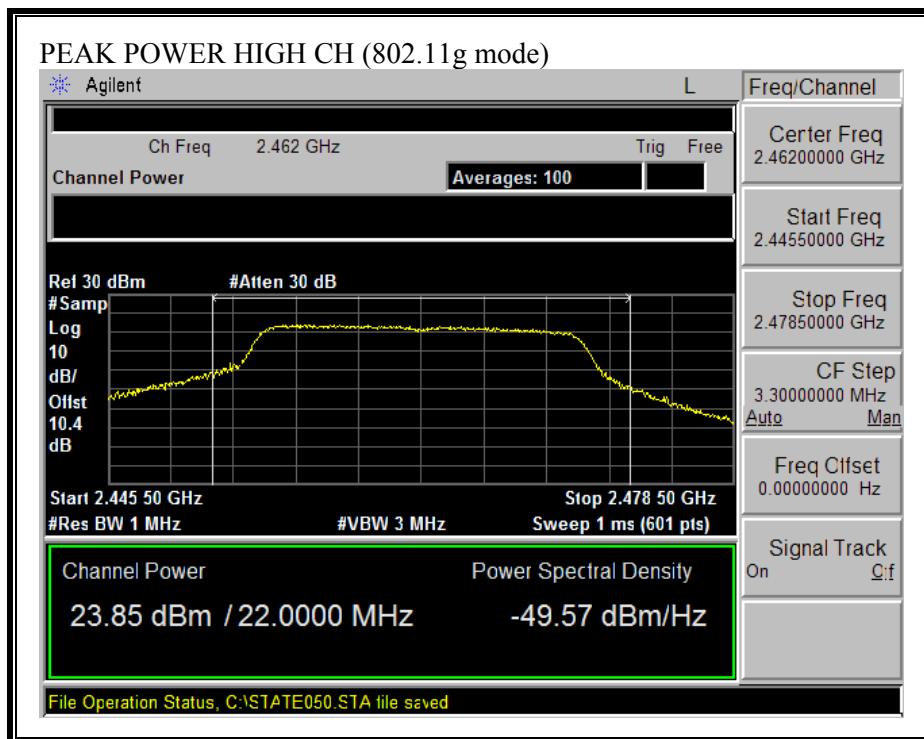

### 7.1.4. MAXIMUM PERMISSIBLE EXPOSURE

#### LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

**CALCULATIONS**

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{(30 * P * G) / (3770 * S)}$$

Changing to units of Power to mW and Distance to cm, using:

$$P (\text{mW}) = P (\text{W}) / 1000 \text{ and}$$

$$d (\text{cm}) = 100 * d (\text{m})$$

yields

$$d = 100 * \sqrt{(30 * (P / 1000) * G) / (3770 * S)}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P (\text{mW}) = 10^{(P (\text{dBm}) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (\text{dBi}) / 10)}$$

yields

$$d = 0.282 * 10^{(P + G) / 20} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

Equation (1) and the measured peak power is used to calculate the MPE distance.

**LIMITS**

From §1.1310 Table 1 (B), S = 1.0 mW/cm<sup>2</sup>

**RESULTS**

No non-compliance noted:

**7.4dBi Omni Antenna**

Mode	Power Density Limit (mW/cm <sup>2</sup> )	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11b	1.0	28.54	7.40	17.67
802.11g	1.0	27.16	7.40	15.07

**9.9dBi & 12dBi Antennas**

Mode	Power Density Limit (mW/cm <sup>2</sup> )	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11b	1.0	23.98	12.00	17.75
802.11g	1.0	23.96	12.00	17.71

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

### 7.1.5. AVERAGE POWER

#### AVERAGE POWER LIMIT

None: for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10 dB (including 10 dB pad and 0.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

**For 7.4dBi Antenna**

802.11b Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	28.50
Middle	2437	28.20
High	2462	28.20

802.11g Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	27.20
Middle	2437	26.70
High	2462	26.70

**For 9.9dBi & 12dBi Antennas**

802.11b Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	23.90
Middle	2437	23.80
High	2462	23.90

802.11g Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	23.90
Middle	2437	23.90
High	2462	23.90

### 7.1.6. PEAK POWER SPECTRAL DENSITY

#### LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

#### RESULTS

No non-compliance noted:


The test was performed with the worst-case, which is higher power level (the power was applied to 7.4dBi antenna).


##### 802.11b Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	4.74	8	-3.26
Middle	2437	4.78	8	-3.22
High	2462	6.41	8	-1.59


##### 802.11g Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	3.64	8	-4.36
Middle	2437	2.33	8	-5.67
High	2462	3.77	8	-4.23

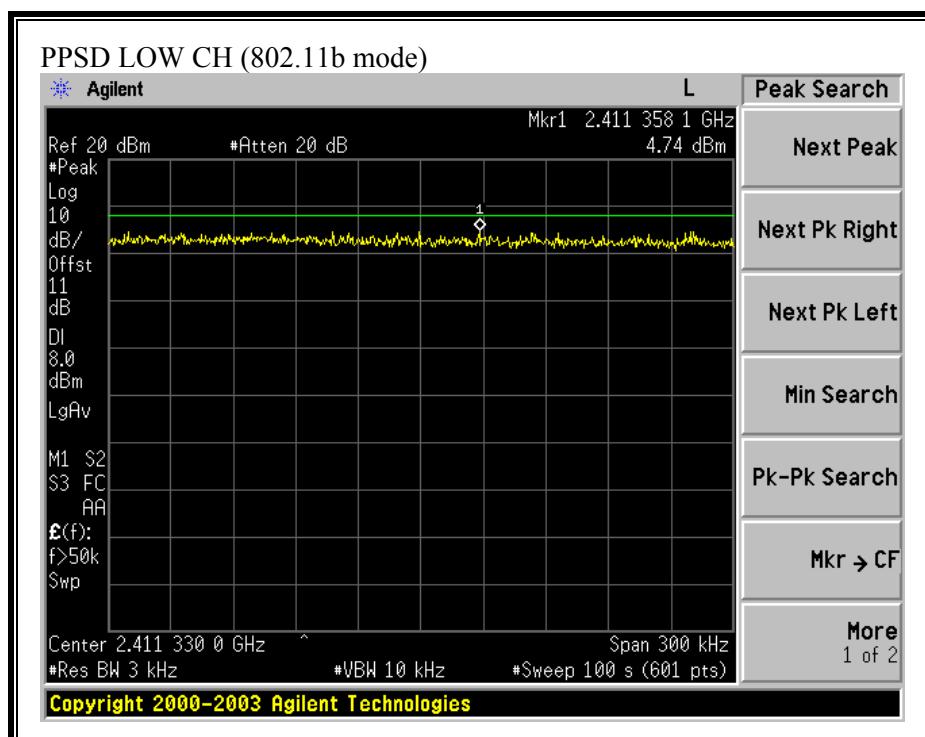
**PEAK POWER SPECTRAL DENSITY (802.11b MODE)**

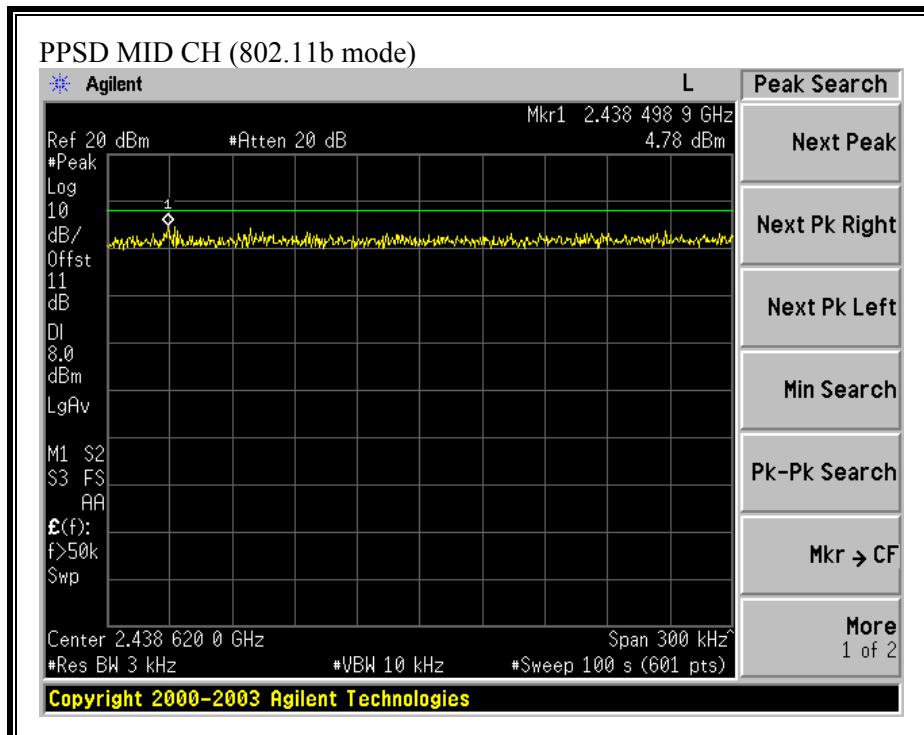

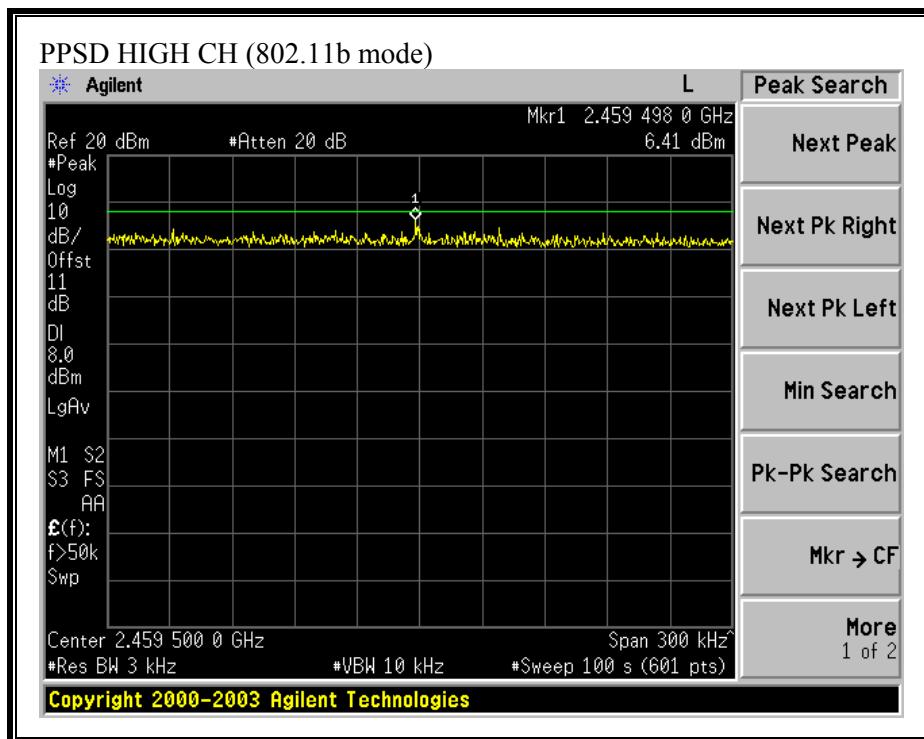

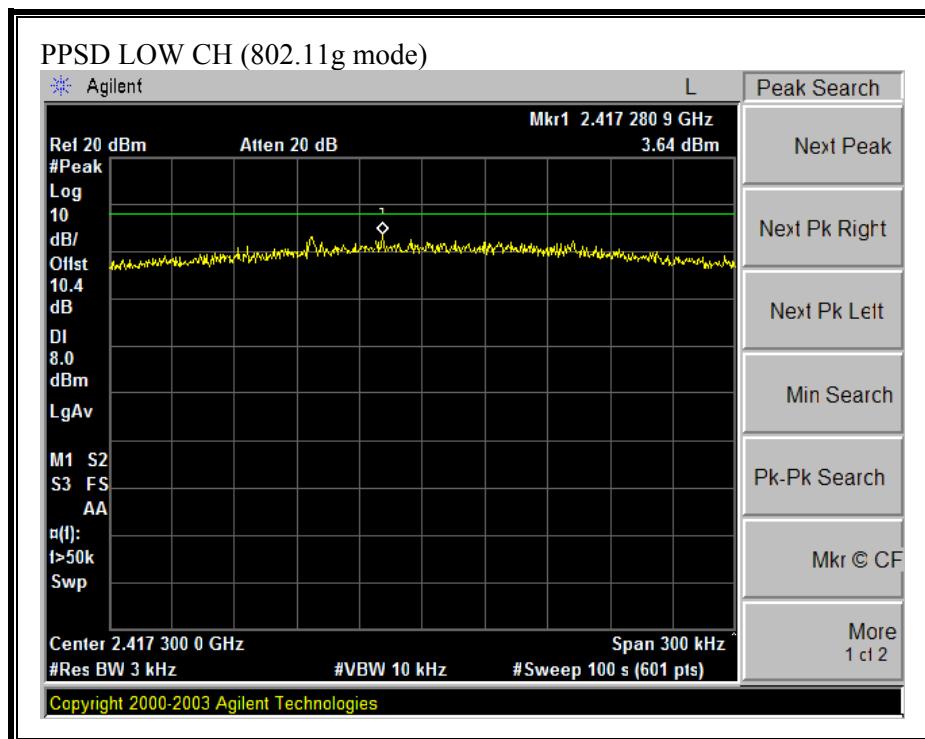**PEAK POWER SPECTRAL DENSITY (802.11g MODE)**

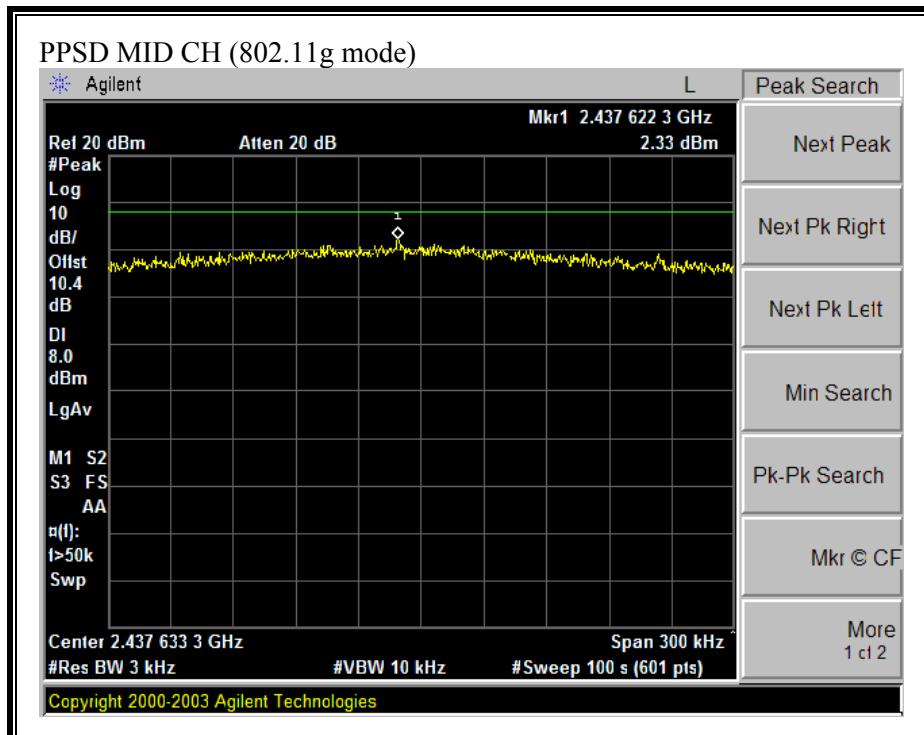

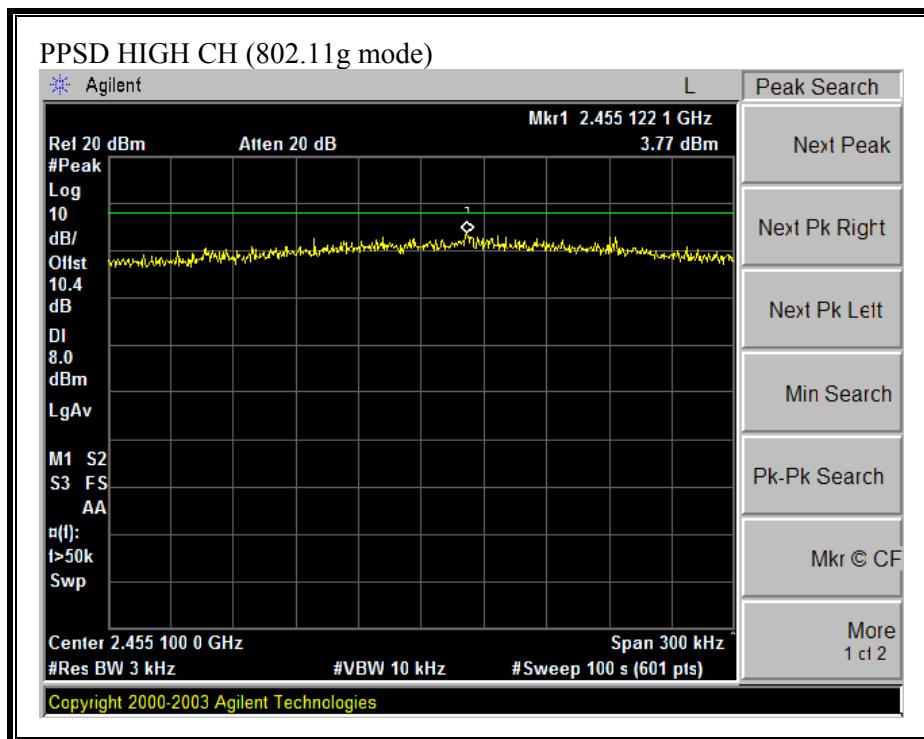

### 7.1.7. CONDUCTED SPURIOUS EMISSIONS

#### LIMITS

§15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions, which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Due to the conducted power was measured based on the use of RMS averaging over a time interval, the attenuation required here shall be 30 dB instead of 20 dB.

#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


#### RESULTS


No non-compliance noted:


The test was performed with the worst-case, which is higher power level (the power was applied to 7.4dBi antenna).

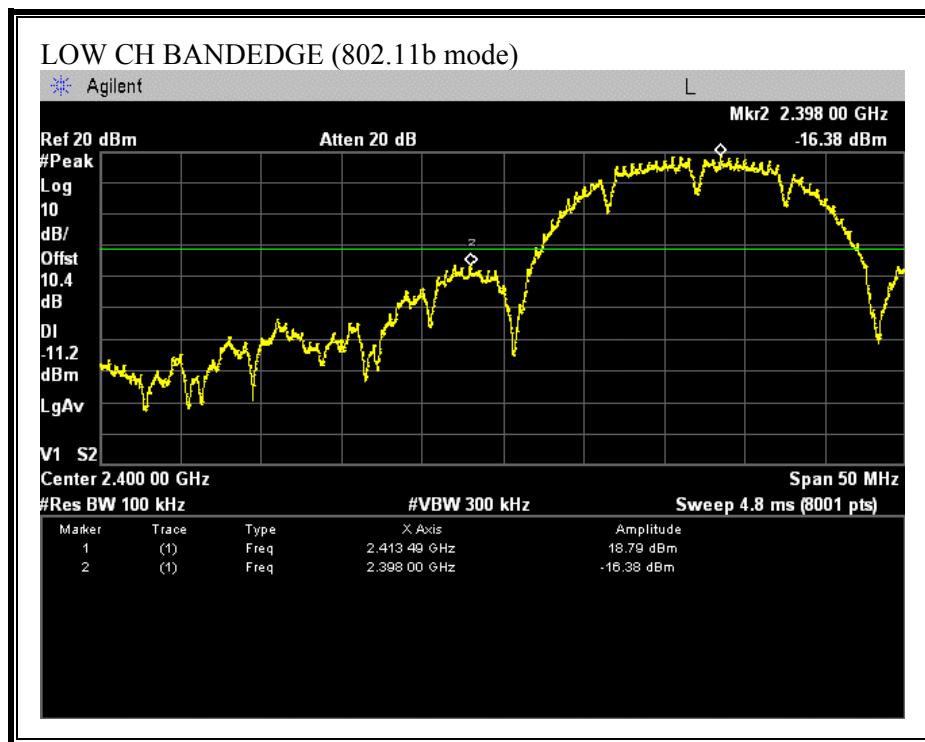
**SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)**

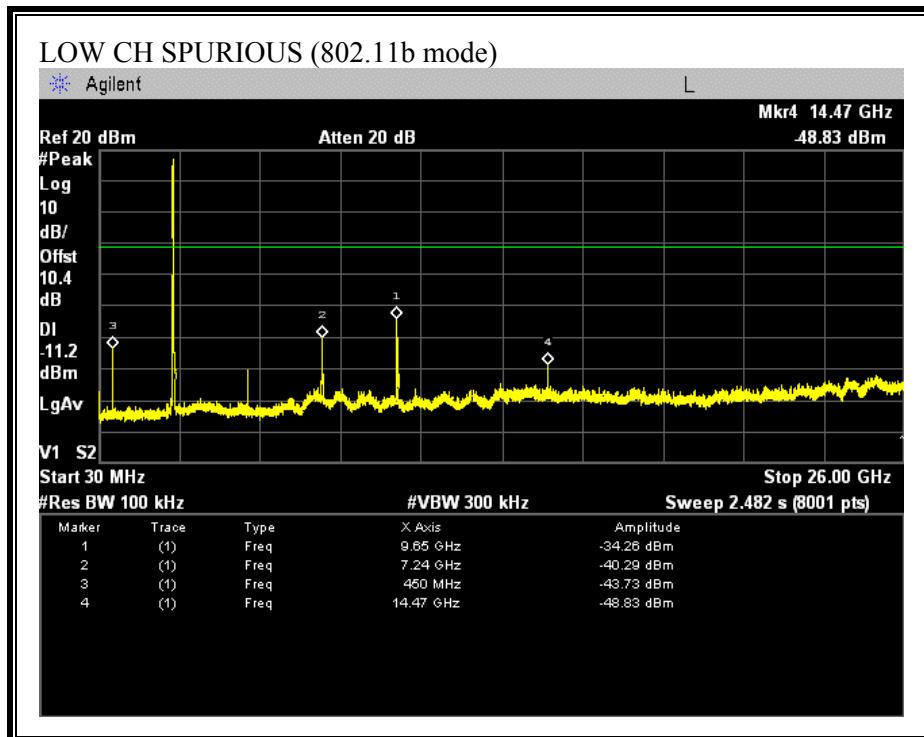


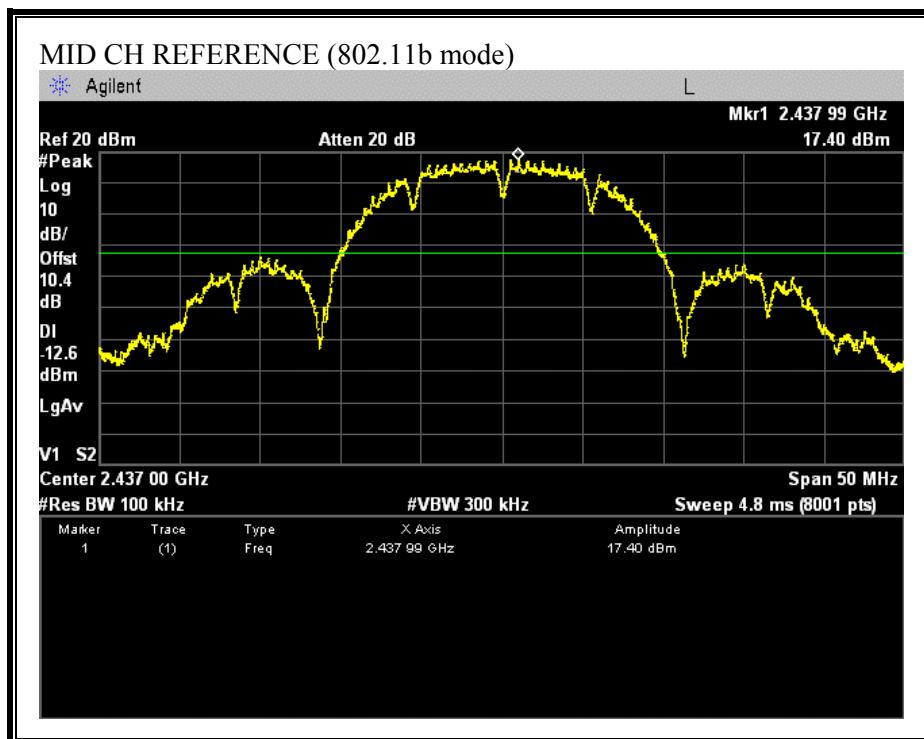
**SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)**

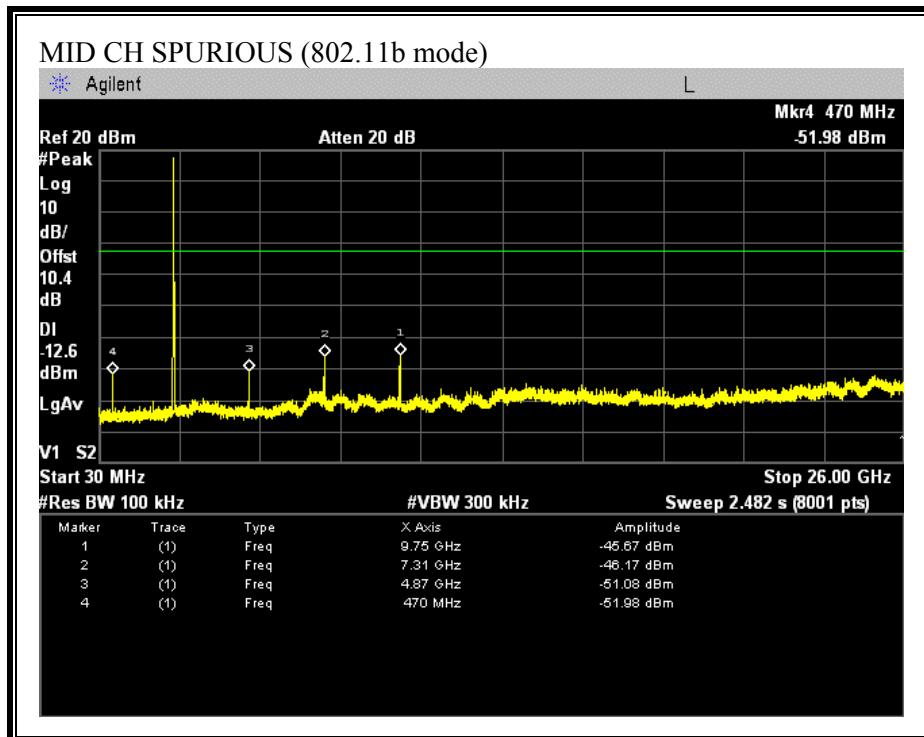


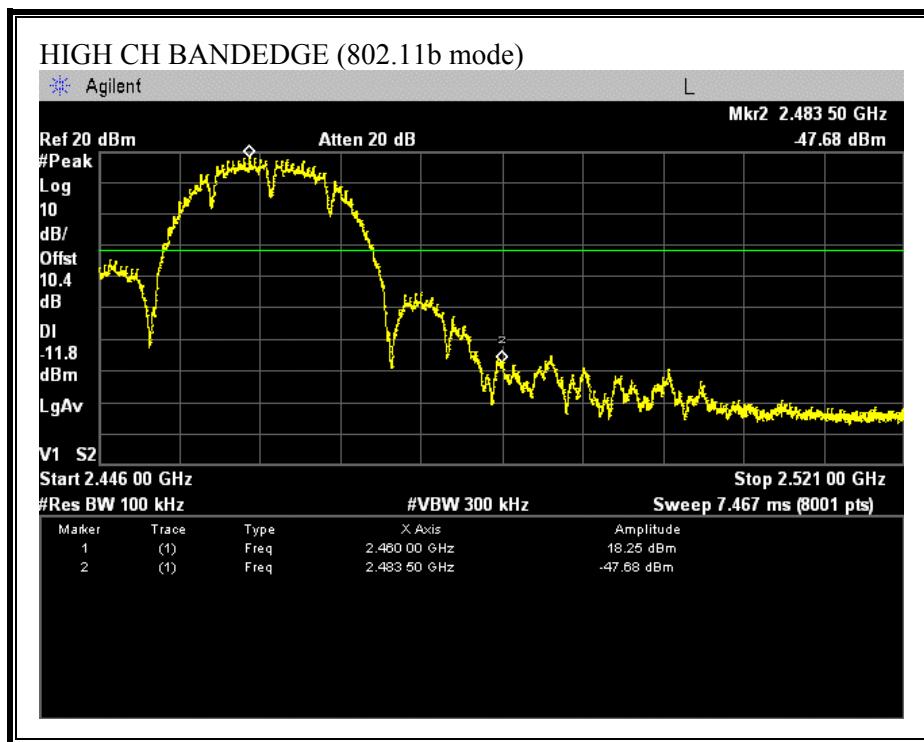
**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)**

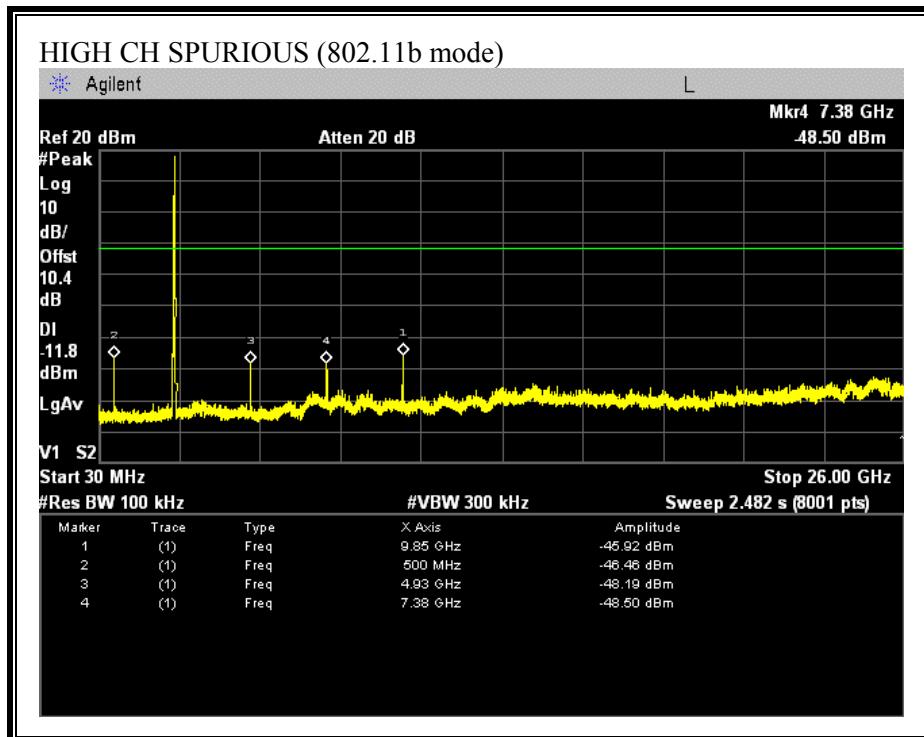


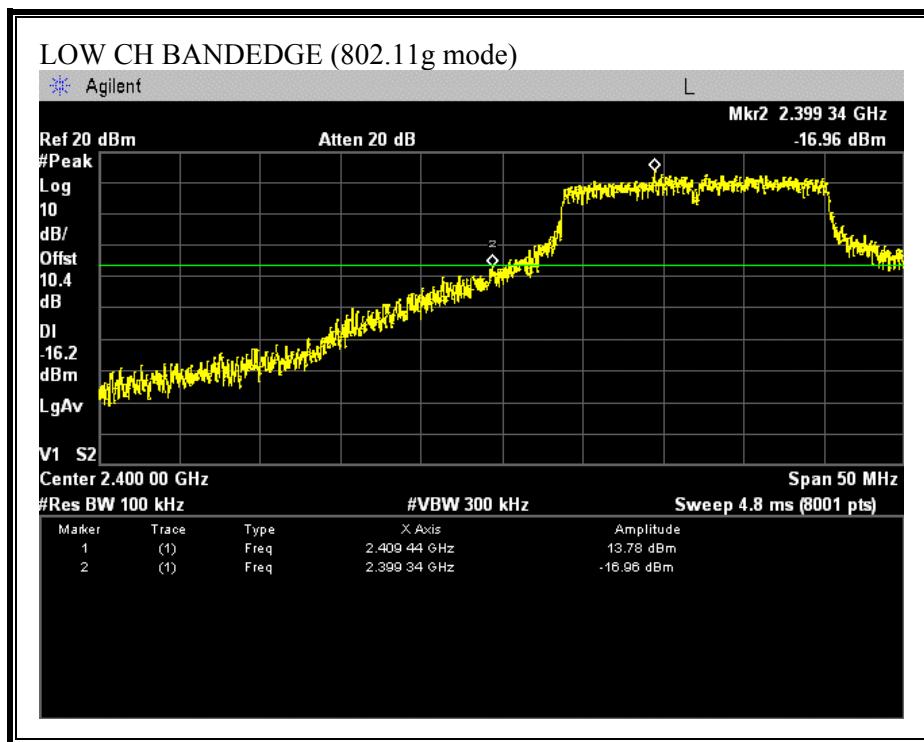
**SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)**

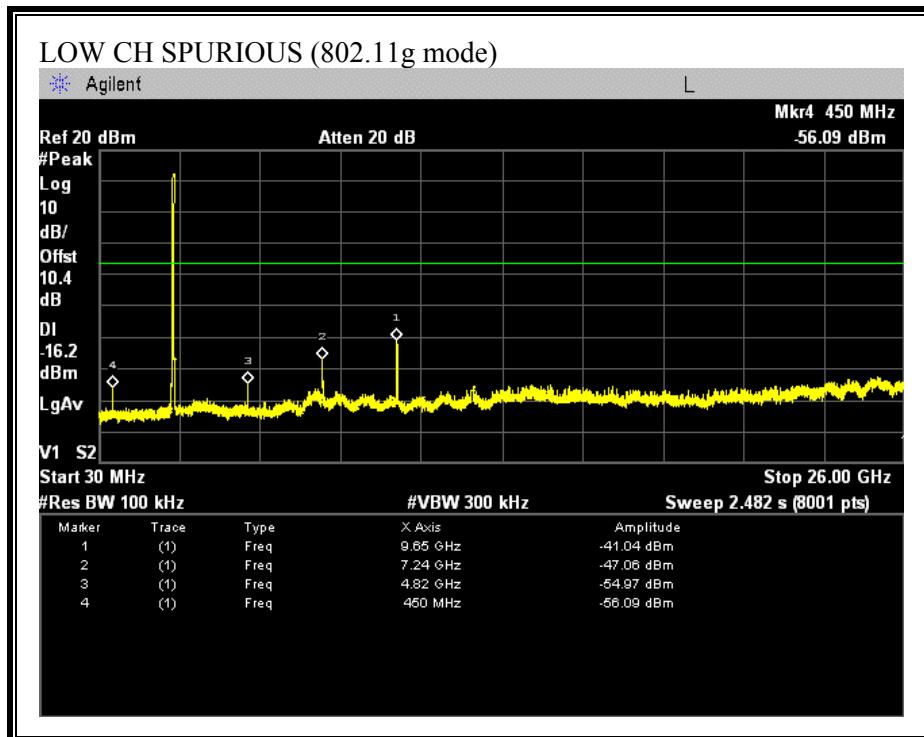

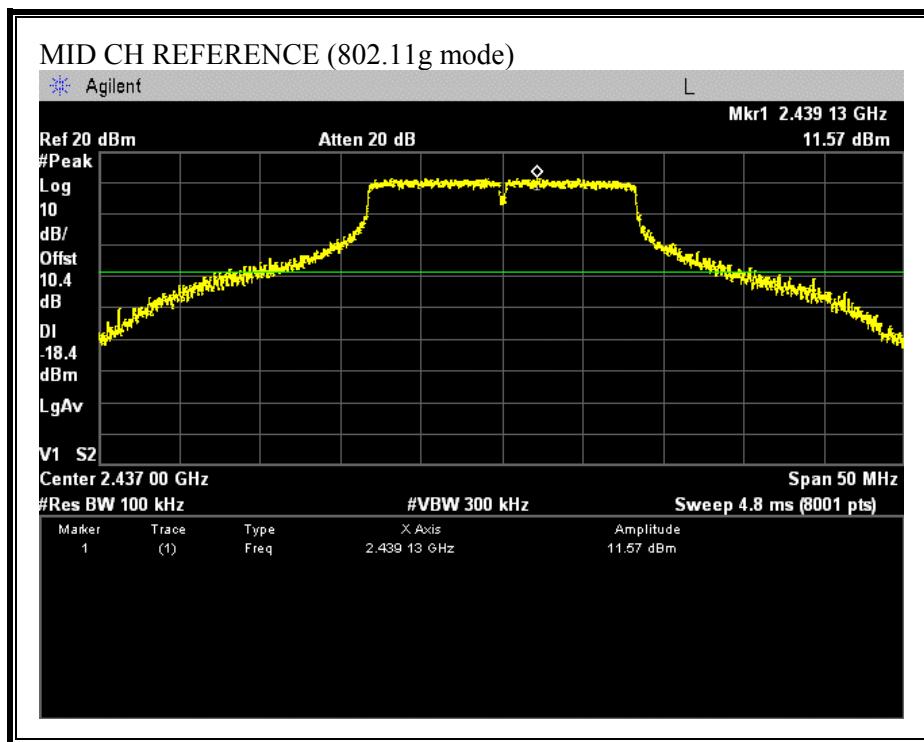**SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)**

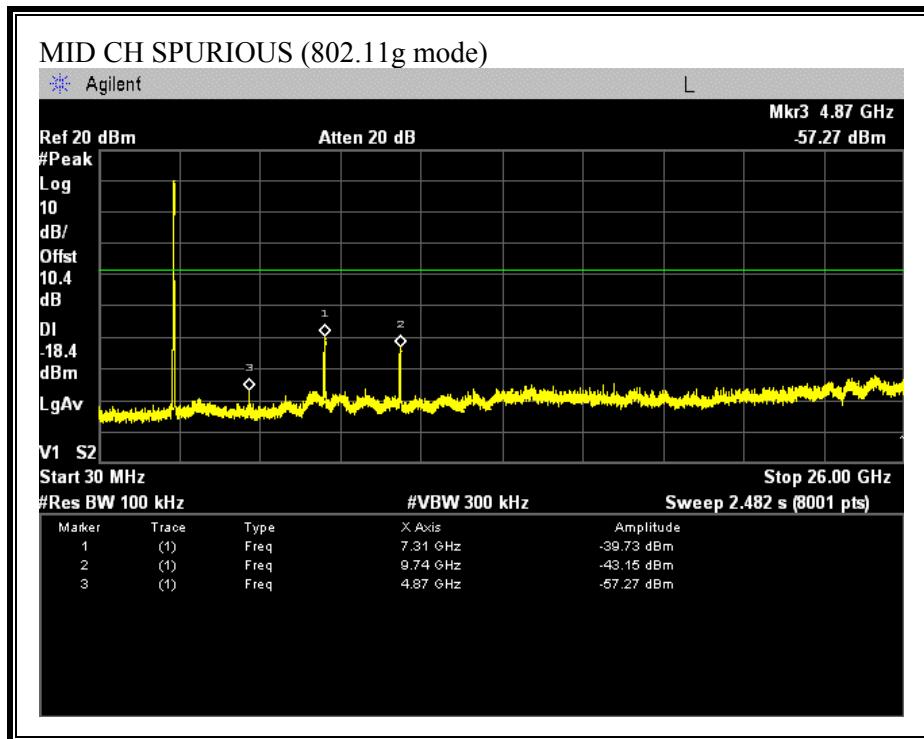

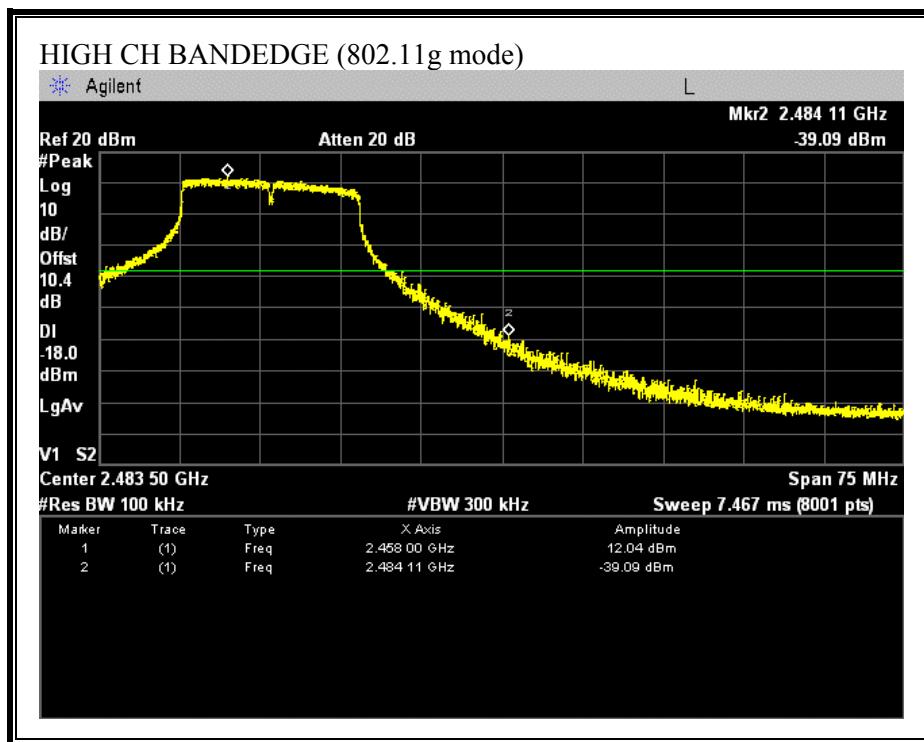**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)**

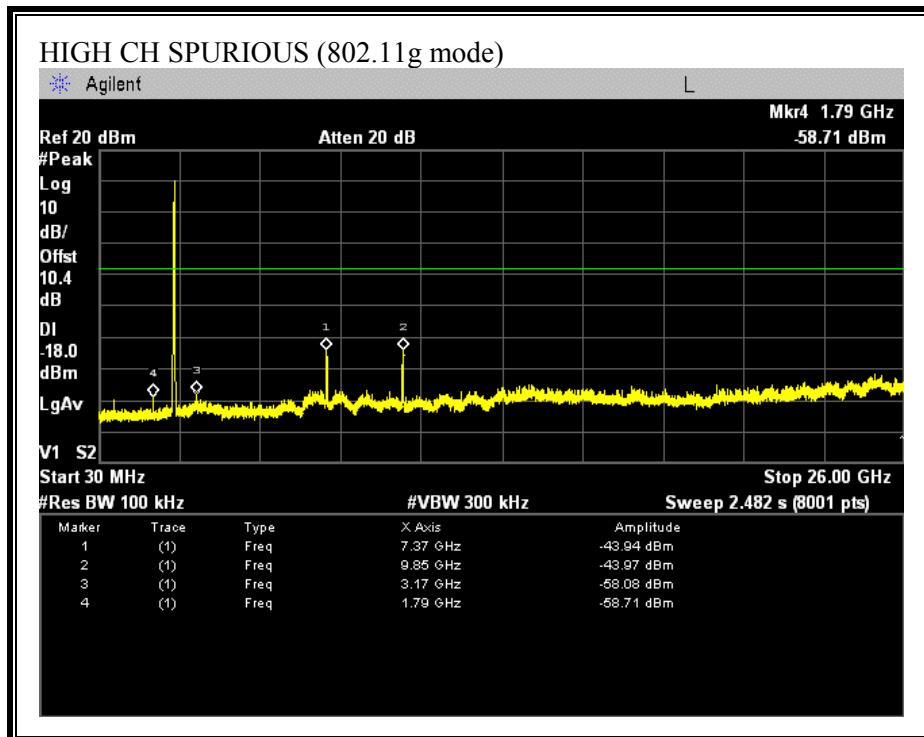

## 7.2. RADIATED EMISSIONS

### 7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

#### LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

**TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


## 7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND WITH 7.4dBi OMNI ANTENNA


### RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

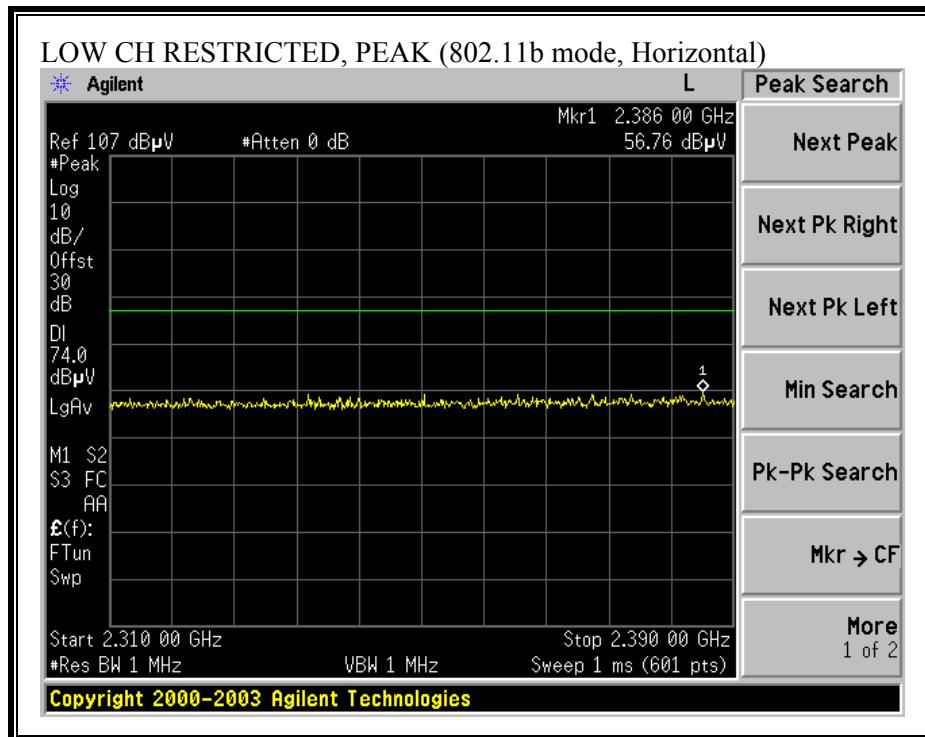


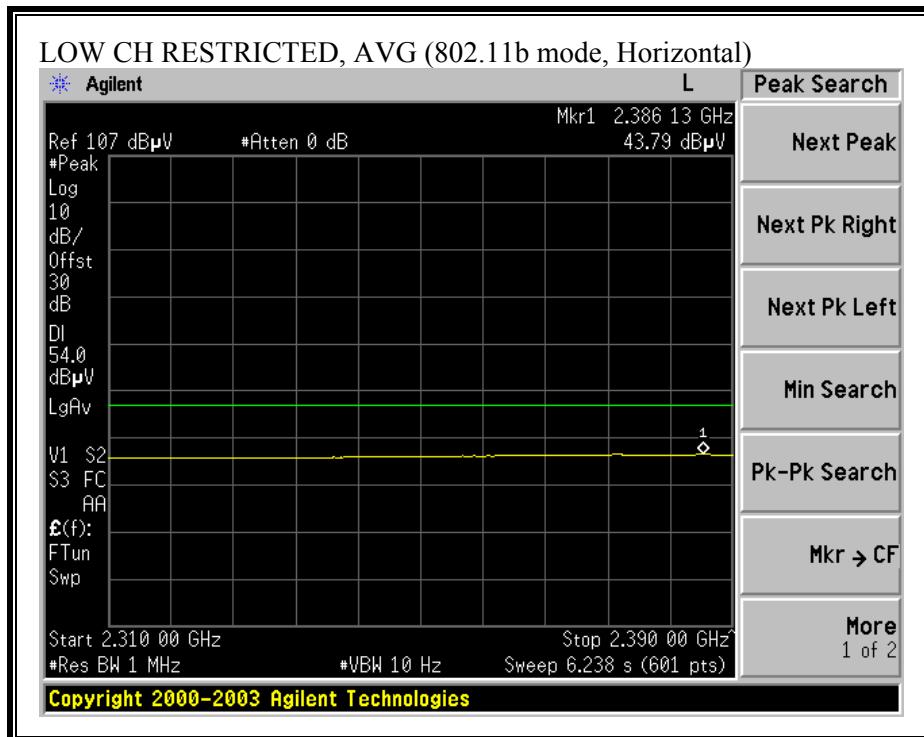


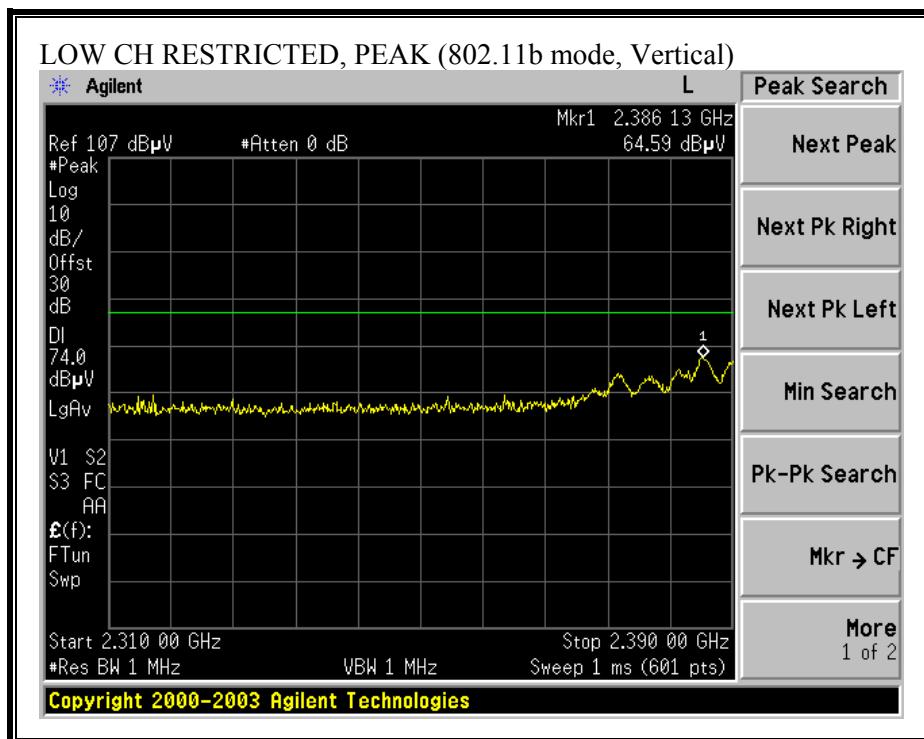
**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)**

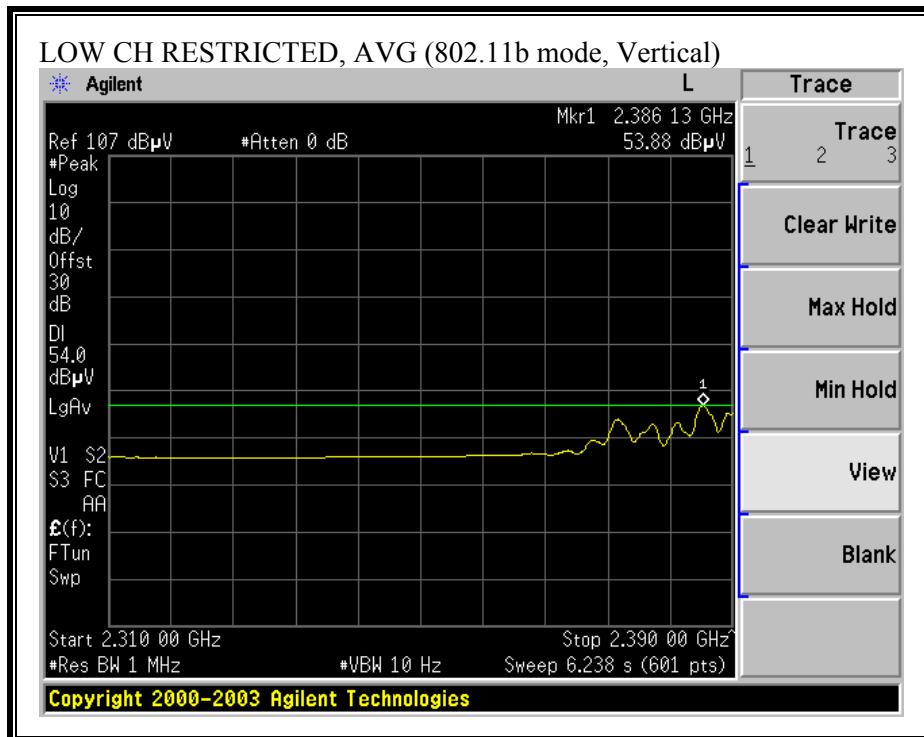

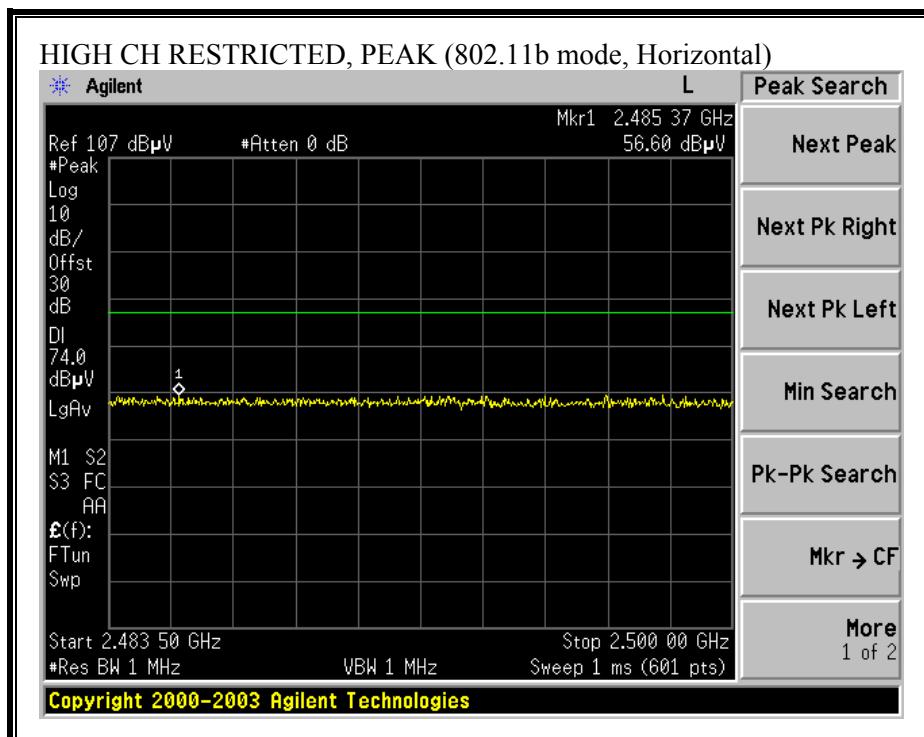**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)**

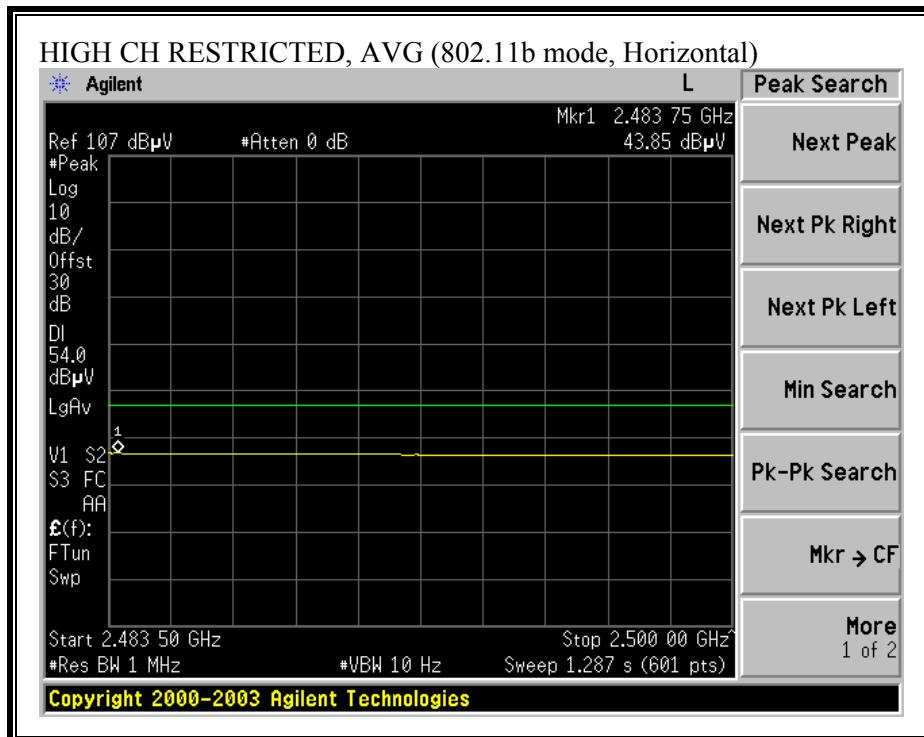


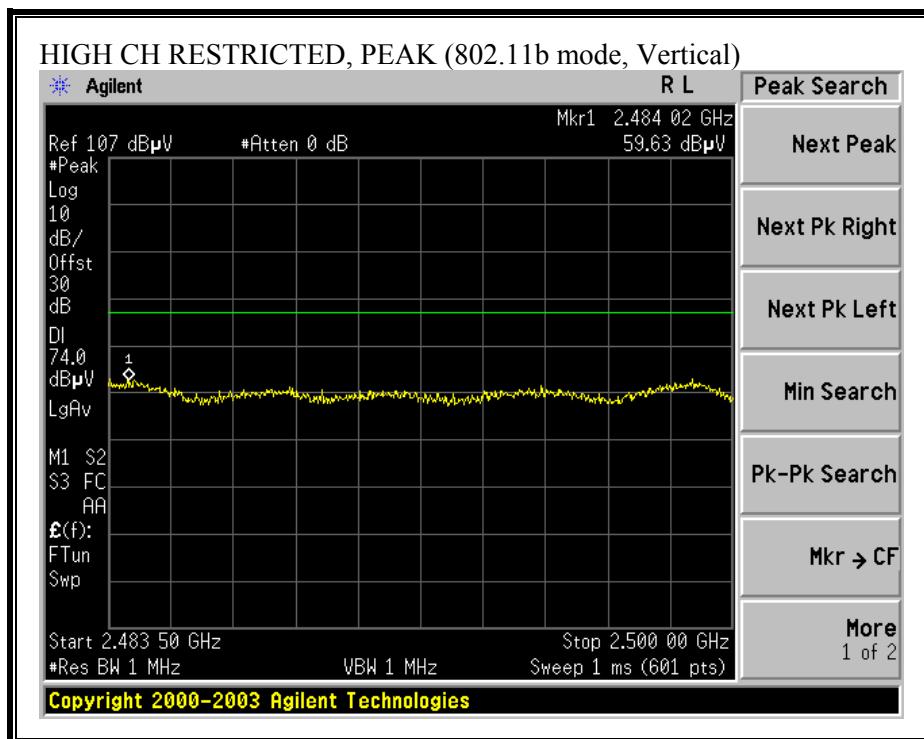
**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)**

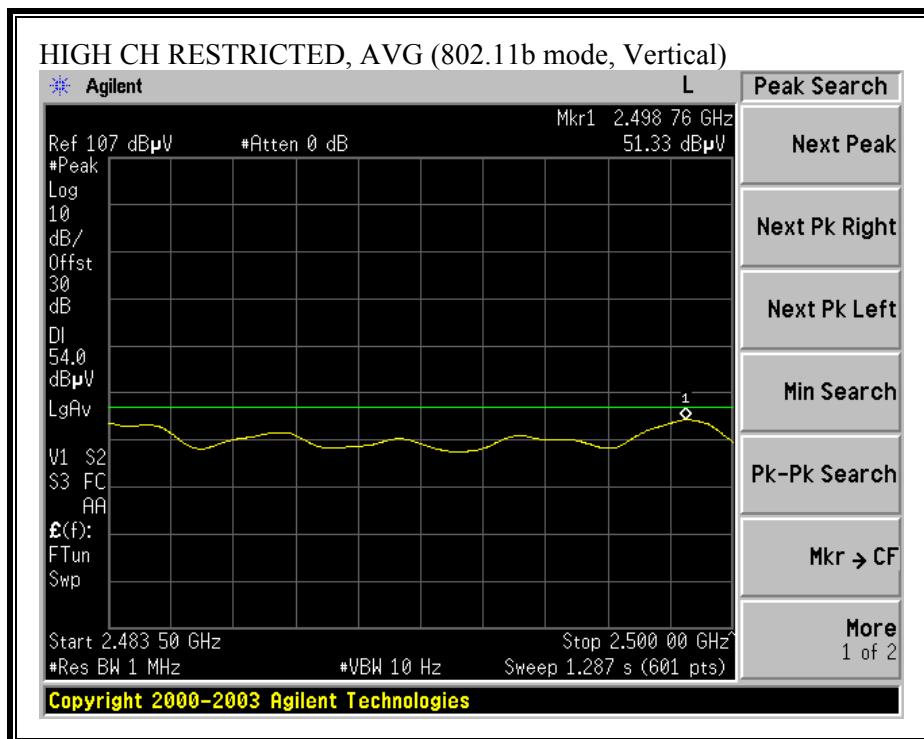



**HARMONICS AND SPURIOUS EMISSIONS (b MODE)**


10/14/04 High Frequency Measurement																																												
Compliance Certification Services, Morgan Hill Open Field Site																																												
Test Engr:Chin Pang Project #:04U3022-1 Company:Tropos Networks EUT Descrip.:802.11 b/g Outdoor Wi-Fi Cellular Base Station EUT M/N:TROPOS 5210 Test Target:FCC Class B Mode Oper:Tx, b mode, 7.4dBi																																												
<b>Test Equipment:</b> <table border="1"> <tr> <td>EMCO Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td colspan="3">Horn &gt; 18GHz</td> </tr> <tr> <td>T73; S/N: 67117 @3m</td> <td>T87 Miteq 924342</td> <td></td> <td colspan="3"></td> </tr> <tr> <td>Hi Frequency Cables</td> <td></td> <td></td> <td colspan="3"></td> </tr> <tr> <td>2 foot cable</td> <td>3 foot cable</td> <td>4 foot cable</td> <td>12 foot cable</td> <td>HPF</td> <td>Reject Filter</td> </tr> <tr> <td></td> <td></td> <td>4_Thanh</td> <td>12_Vien</td> <td>HPF_4.6GHz</td> <td></td> </tr> </table>															EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz			T73; S/N: 67117 @3m	T87 Miteq 924342					Hi Frequency Cables						2 foot cable	3 foot cable	4 foot cable	12 foot cable	HPF	Reject Filter			4_Thanh	12_Vien	HPF_4.6GHz	
EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz																																									
T73; S/N: 67117 @3m	T87 Miteq 924342																																											
Hi Frequency Cables																																												
2 foot cable	3 foot cable	4 foot cable	12 foot cable	HPF	Reject Filter																																							
		4_Thanh	12_Vien	HPF_4.6GHz																																								
<b>Peak Measurements</b> RBW=VBW=1MHz																																												
<b>Average Measurements</b> RBW=1MHz ; VBW=10Hz																																												
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																													
Transmitting at low ch																																												
4.824	3.0	50.3	43.0	32.9	3.6	-39.6	0.0	2.4	49.6	42.3	74	54	-24.4	-11.7	V																													
12.060	3.0	45.0	33.0	38.8	6.9	-39.2	0.0	0.7	52.3	40.3	74	54	-21.7	-13.7	V																													
4.824	3.0	47.0	35.4	32.9	3.6	-39.6	0.0	2.4	46.3	34.7	74	54	-27.7	-19.3	H																													
12.060	3.0	45.3	33.0	38.8	6.9	-39.2	0.0	0.7	52.6	40.3	74	54	-21.4	-13.7	H																													
Transmitting at mid ch																																												
4.874	3.0	48.9	37.0	32.9	3.6	-39.6	0.0	2.5	48.3	36.4	74	54	-25.7	-17.6	V																													
7.311	3.0	57.0	51.7	35.8	4.6	-40.3	0.0	1.4	58.5	53.2	74	54	-15.5	-0.8	V																													
12.185	3.0	45.3	33.2	38.8	6.9	-39.3	0.0	0.7	52.5	40.4	74	54	-21.5	-13.6	V																													
4.874	3.0	47.7	35.0	32.9	3.6	-39.6	0.0	2.5	47.1	34.4	74	54	-26.9	-19.6	H																													
7.311	3.0	56.2	51.8	35.8	4.6	-40.3	0.0	1.4	57.7	53.3	74	54	-16.3	-0.7	H																													
12.185	3.0	45.3	33.2	38.8	6.9	-39.3	0.0	0.7	52.5	40.4	74	54	-21.5	-13.6	H																													
Transmitting at high ch																																												
4.924	3.0	49.0	38.8	33.0	3.7	-39.7	0.0	2.5	48.4	38.2	74	54	-25.6	-15.8	V																													
7.386	3.0	57.7	51.8	36.0	4.6	-40.3	0.0	1.4	59.4	53.5	74	54	-14.6	-0.5	V																													
12.310	3.0	45.6	33.4	38.8	6.9	-39.4	0.0	0.7	52.7	40.5	74	54	-21.3	-13.5	V																													
4.924	3.0	47.3	34.8	33.0	3.7	-39.7	0.0	2.5	46.7	34.2	74	54	-27.3	-19.8	H																													
7.386	3.0	56.7	51.5	36.0	4.6	-40.3	0.0	1.4	58.4	53.2	74	54	-15.6	-0.8	H																													
12.310	3.0	44.5	33.0	38.8	6.9	-39.4	0.0	0.7	51.6	40.1	74	54	-22.4	-13.9	H																													
Note: No other emissions were detected above the system noise floor.																																												
f	Measurement Frequency			Amp	Preamp Gain				Avg Lim	Average Field Strength Limit																																		
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit																																			
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit																																			
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit																																			
CL	Cable Loss			HPF	High Pass Filter																																							

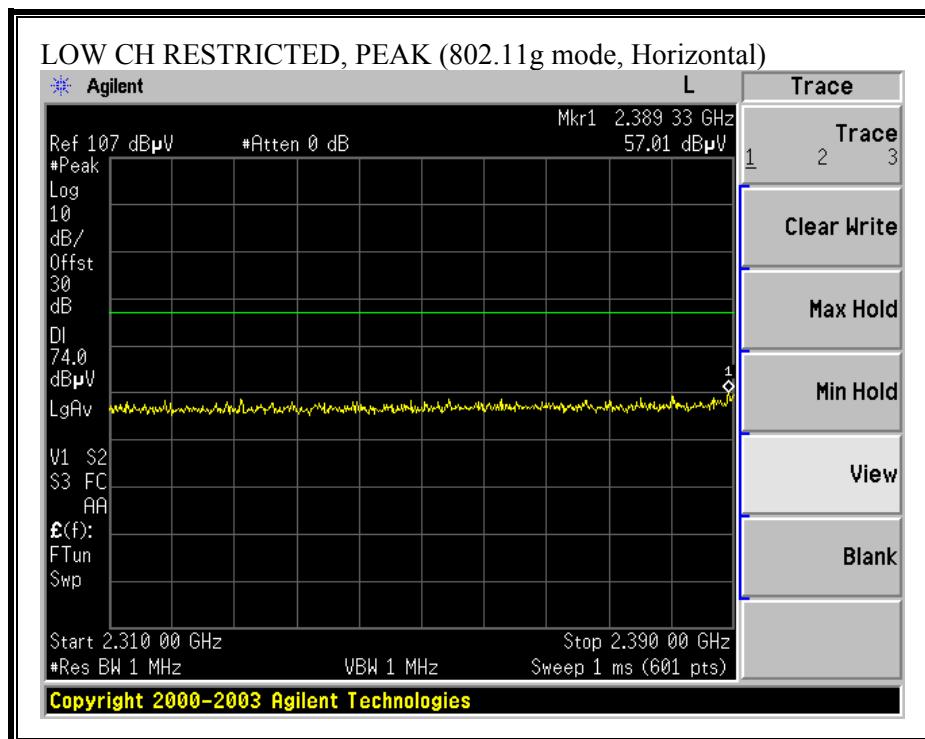
**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)**

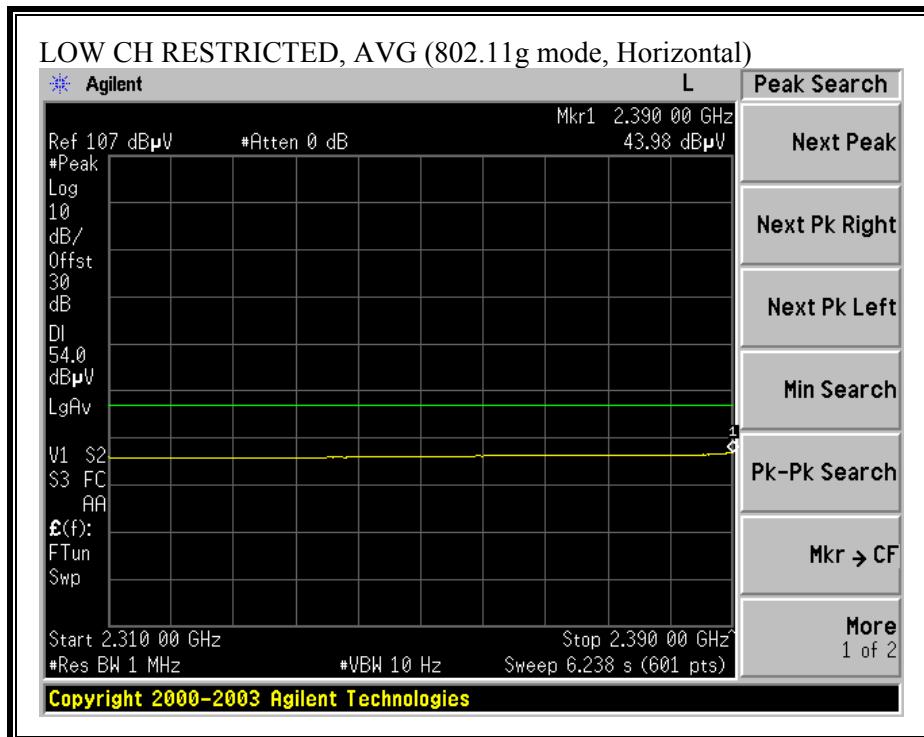


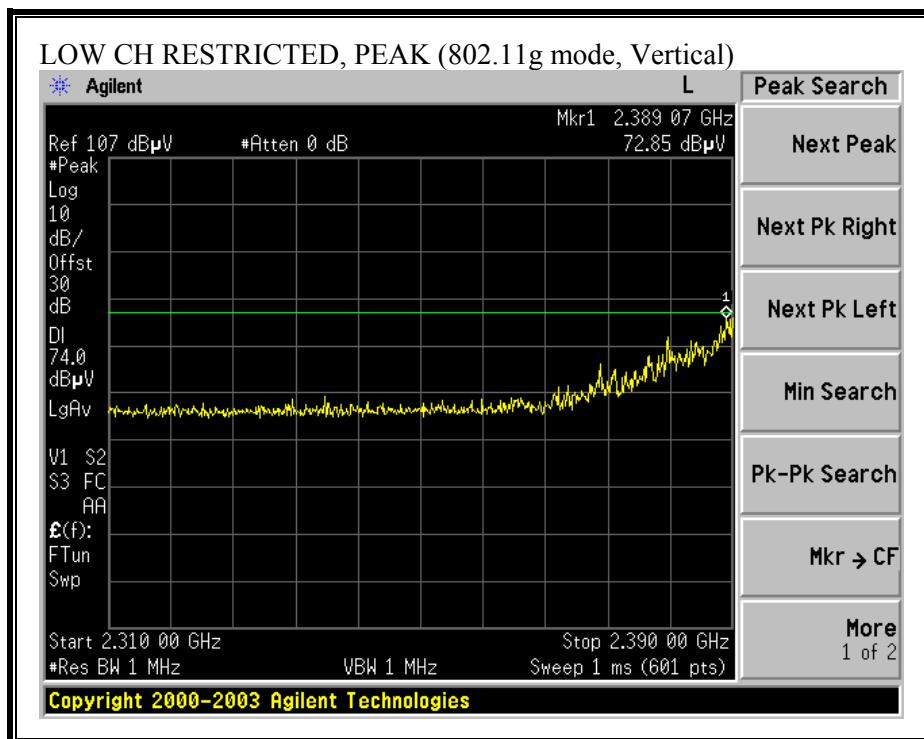
**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)**

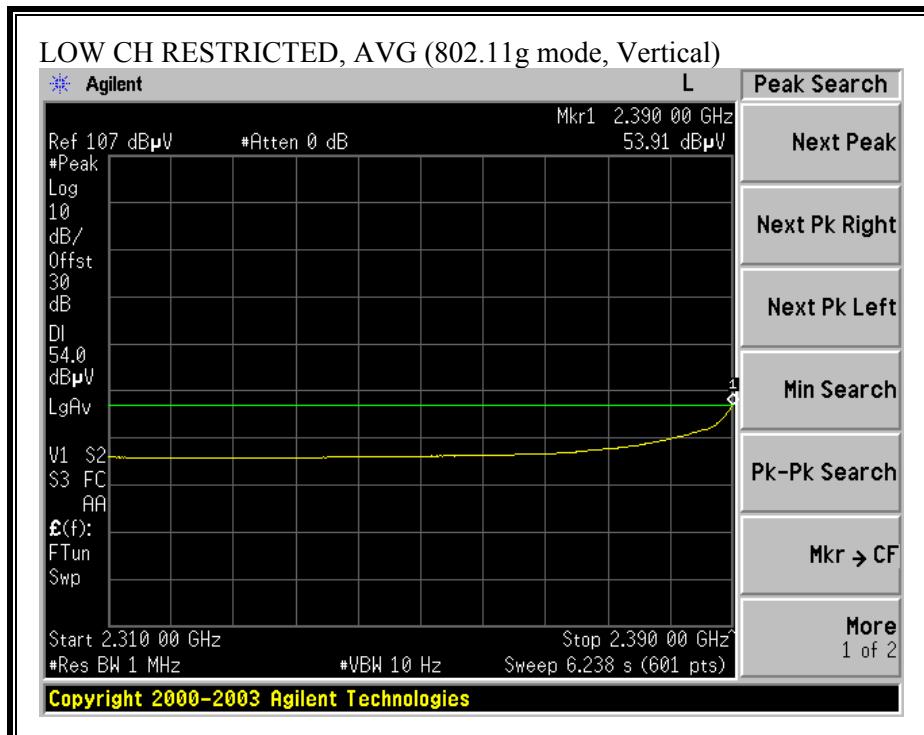

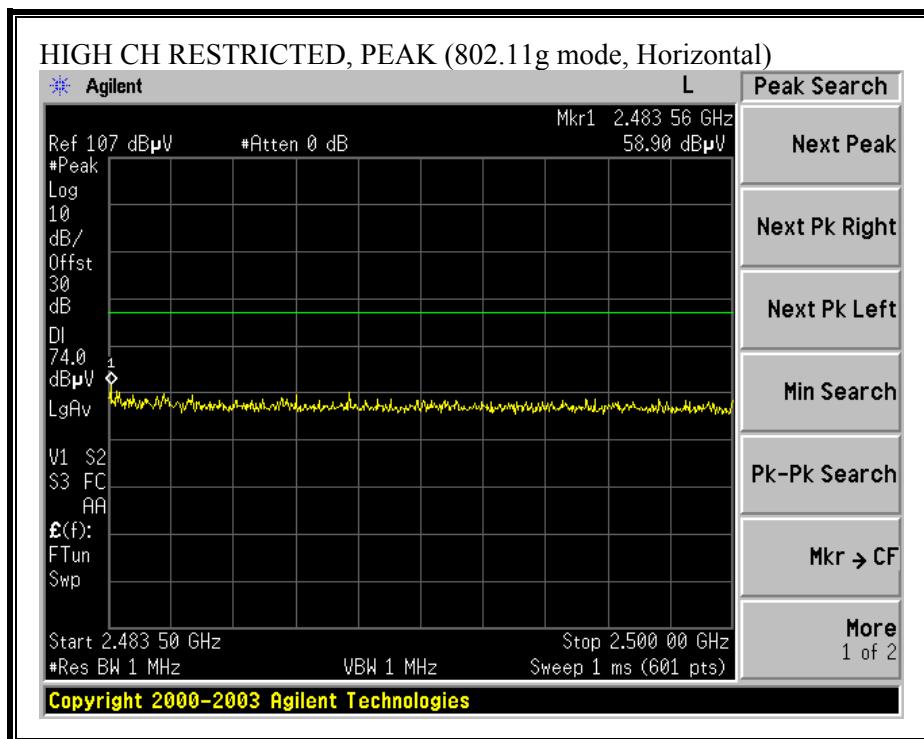**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)**

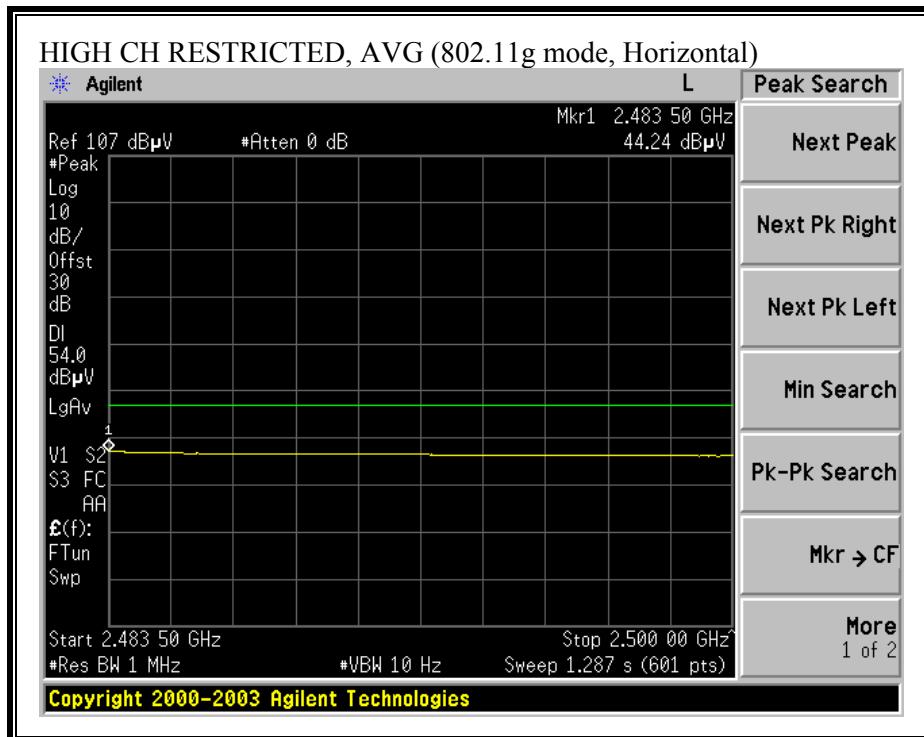

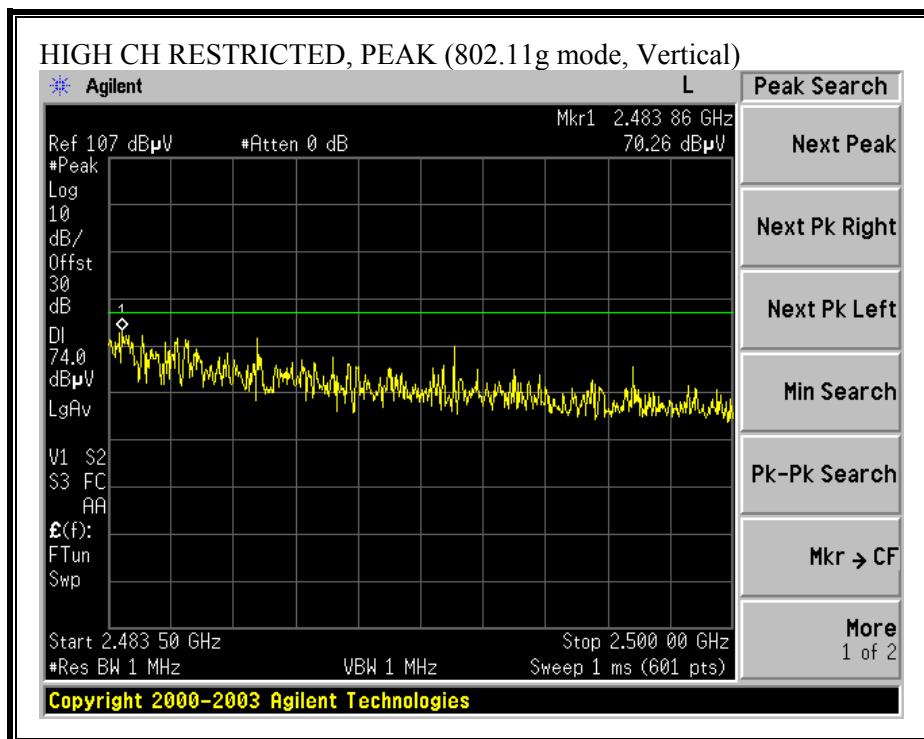**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)**

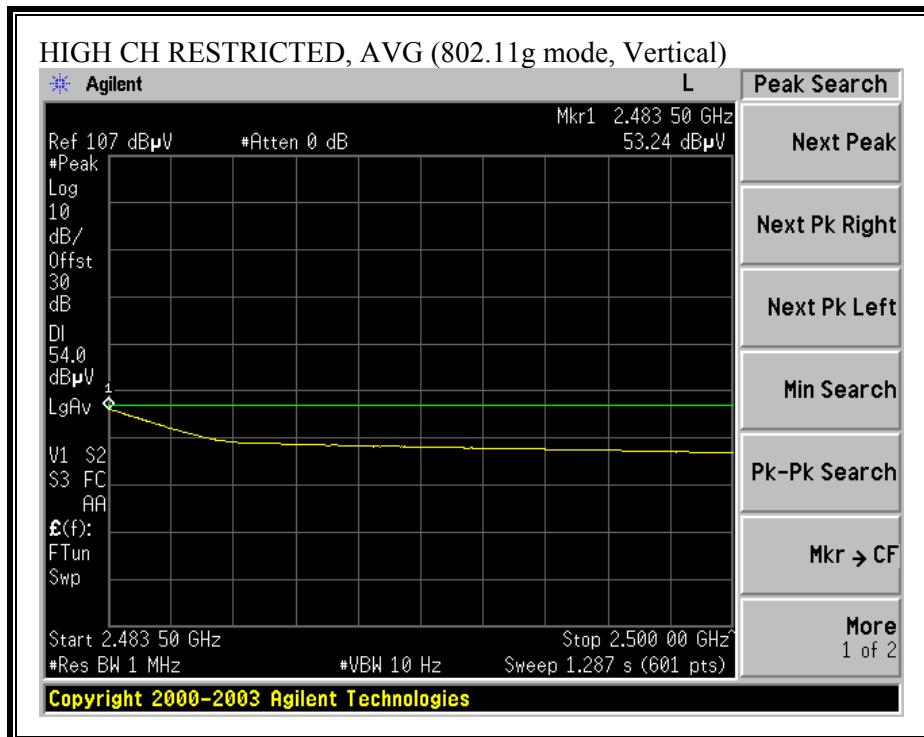



**HARMONICS AND SPURIOUS EMISSIONS (g MODE)**


10/14/04 High Frequency Measurement																																																											
Compliance Certification Services, Morgan Hill Open Field Site																																																											
Test Engr:Chin Pang Project #:04U3022-1 Company:Tropos Networks EUT Descrip.:802.11 b/g Outdoor Wi-Fi Cellular Base Station EUT M/N:TROPOS 5210 Test Target:FCC Class B Mode Oper:Tx, g mode, 7.4dBi																																																											
<b>Test Equipment:</b> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;">EMCO Horn 1-18GHz</td> <td style="width: 25%;">Pre-amplifier 1-26GHz</td> <td style="width: 25%;">Pre-amplifier 26-40GHz</td> <td style="width: 25%;">Horn &gt; 18GHz</td> </tr> <tr> <td>T73; S/N: 6717 @3m</td> <td>T87 Miteq 924342</td> <td></td> <td></td> </tr> <tr> <td colspan="4">Hi Frequency Cables</td> </tr> <tr> <td>2 foot cable</td> <td>3 foot cable</td> <td>4 foot cable</td> <td>12 foot cable</td> </tr> <tr> <td></td> <td></td> <td>4_Thanh</td> <td>12_Vien</td> </tr> <tr> <td colspan="4"></td> </tr> <tr> <td colspan="4"></td> <td style="width: 25%;">HPF</td> <td style="width: 25%;">Reject Filter</td> <td colspan="9" rowspan="2"> <b>Peak Measurements</b>          RBW=VBW=1MHz       </td> </tr> <tr> <td colspan="4"></td> <td>HPF_4.6 GHz</td> <td></td> </tr> </table>															EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz	T73; S/N: 6717 @3m	T87 Miteq 924342			Hi Frequency Cables				2 foot cable	3 foot cable	4 foot cable	12 foot cable			4_Thanh	12_Vien									HPF	Reject Filter	<b>Peak Measurements</b> RBW=VBW=1MHz													HPF_4.6 GHz	
EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz																																																								
T73; S/N: 6717 @3m	T87 Miteq 924342																																																										
Hi Frequency Cables																																																											
2 foot cable	3 foot cable	4 foot cable	12 foot cable																																																								
		4_Thanh	12_Vien																																																								
				HPF	Reject Filter	<b>Peak Measurements</b> RBW=VBW=1MHz																																																					
				HPF_4.6 GHz																																																							
<b>Average Measurements</b> RBW=1MHz ; VBW=10Hz																																																											
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																												
<b>Transmitting at low ch</b>																																																											
4.824	3.0	47.6	36.0	32.9	3.6	-39.6	0.0	2.4	46.9	35.3	74	54	-27.1	-18.7	V																																												
12.060	3.0	45.5	33.3	38.8	6.9	-39.2	0.0	0.7	52.8	40.6	74	54	-21.2	-13.4	V																																												
4.824	3.0	57.0	35.6	32.9	3.6	-39.6	0.0	2.4	56.3	34.9	74	54	-17.7	-19.1	H																																												
12.060	3.0	45.0	33.1	38.8	6.9	-39.2	0.0	0.7	52.3	40.4	74	54	-21.7	-13.6	H																																												
<b>Transmitting at mid ch</b>																																																											
4.874	3.0	48.9	37.0	32.9	3.6	-39.6	0.0	2.5	48.3	36.4	74	54	-25.7	-17.6	V																																												
7.311	3.0	61.7	44.0	35.8	4.6	-40.3	0.0	1.4	63.2	45.5	74	54	-10.8	-8.5	V																																												
12.185	3.0	45.5	33.3	38.8	6.9	-39.3	0.0	0.7	52.7	40.5	74	54	-21.3	-13.5	V																																												
4.874	3.0	47.0	35.0	32.9	3.6	-39.6	0.0	2.5	46.4	34.4	74	54	-27.6	-19.6	H																																												
7.311	3.0	57.1	45.2	35.8	4.6	-40.3	0.0	1.4	58.6	46.7	74	54	-15.4	-7.3	H																																												
12.185	3.0	45.0	33.0	38.8	6.9	-39.3	0.0	0.7	52.2	40.2	74	54	-21.8	-13.8	H																																												
<b>Transmitting at high ch</b>																																																											
4.924	3.0	49.0	38.8	33.0	3.7	-39.7	0.0	2.5	48.4	38.2	74	54	-25.6	-15.8	V																																												
7.386	3.0	62.0	44.2	36.0	4.6	-40.3	0.0	1.4	63.7	45.9	74	54	-10.3	-8.1	V																																												
12.310	3.0	45.6	33.4	38.8	6.9	-39.4	0.0	0.7	52.7	40.5	74	54	-21.3	-13.5	V																																												
4.924	3.0	47.3	34.8	33.0	3.7	-39.7	0.0	2.5	46.7	34.2	74	54	-27.3	-19.8	H																																												
7.386	3.0	57.8	45.5	36.0	4.6	-40.3	0.0	1.4	59.5	47.2	74	54	-14.5	-6.8	H																																												
12.310	3.0	45.5	33.3	38.8	6.9	-39.4	0.0	0.7	52.6	40.4	74	54	-21.4	-13.6	H																																												
Note: No other emissions were detected above the system noise floor.																																																											
f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss				Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter				Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit																																																			


**7.2.3. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND WITH  
12dBi OMNI ANTENNA**


**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)**

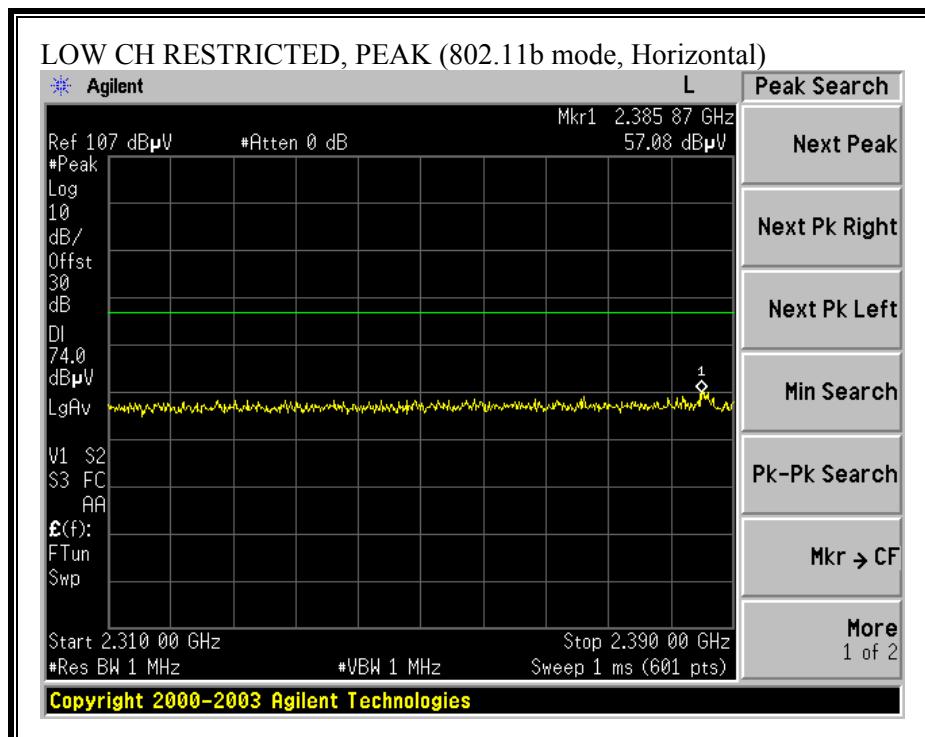


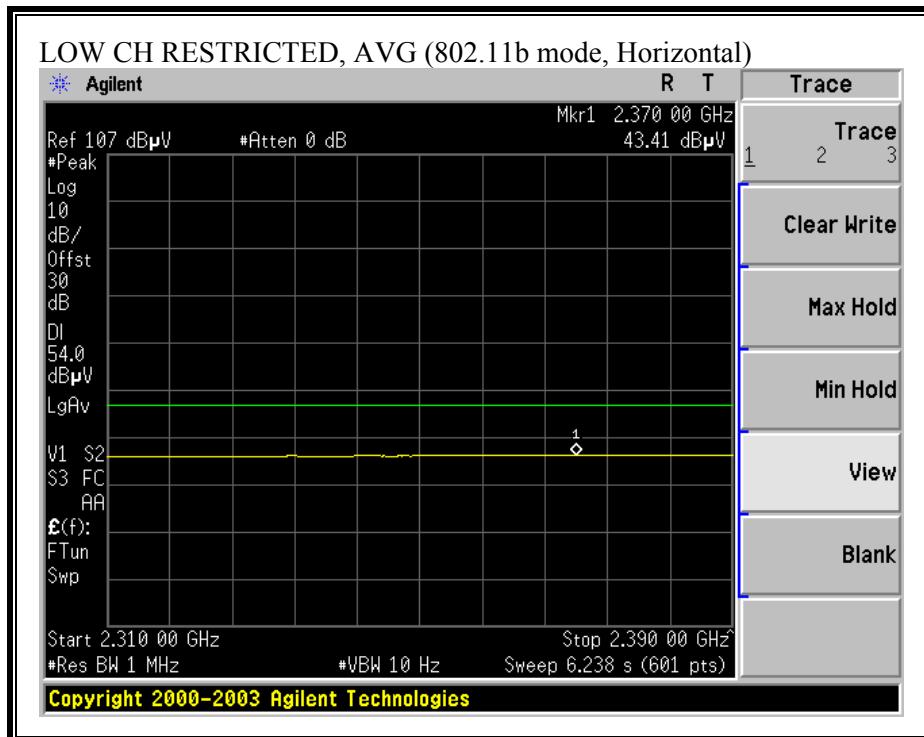


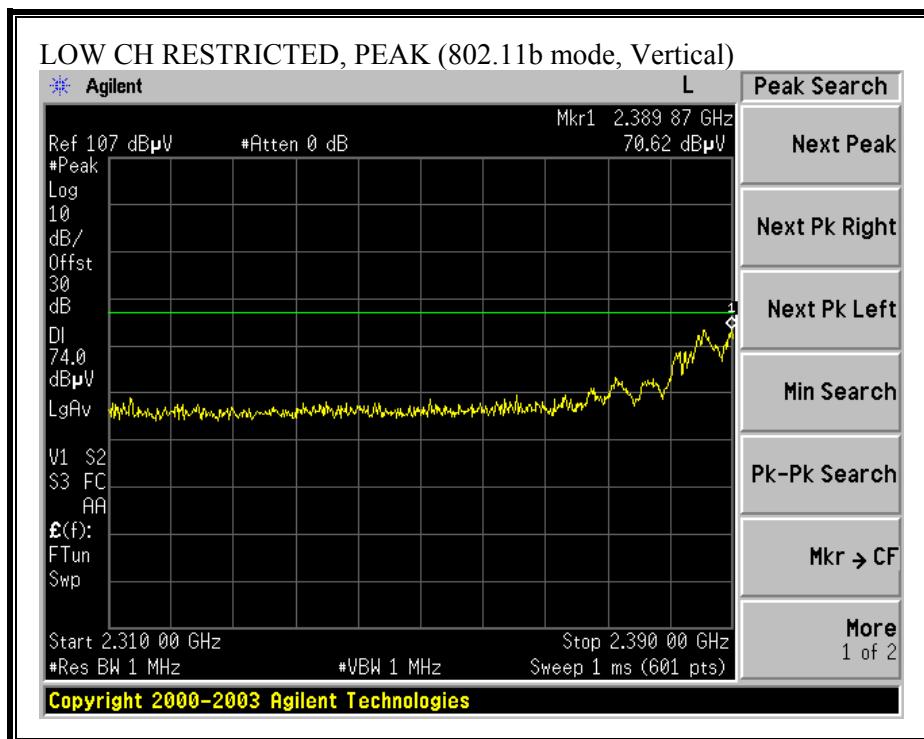
**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)**

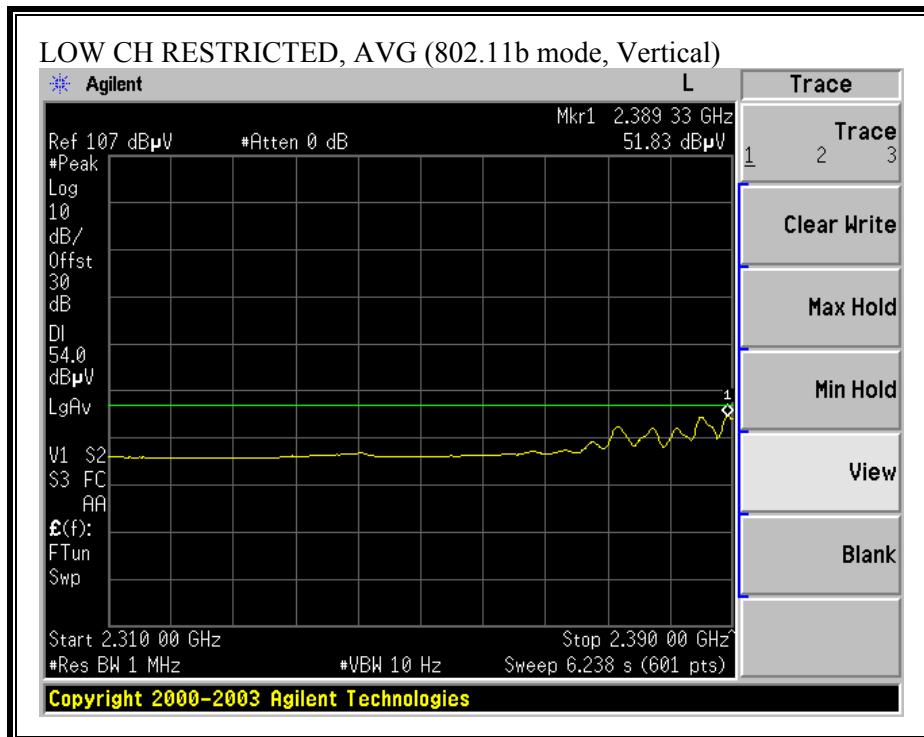

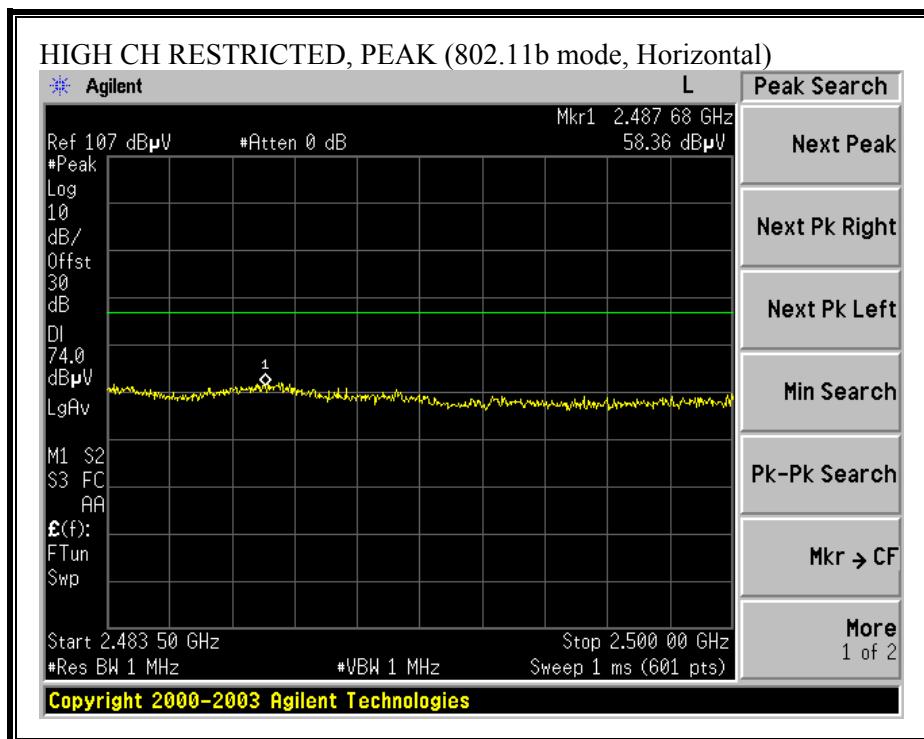**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)**

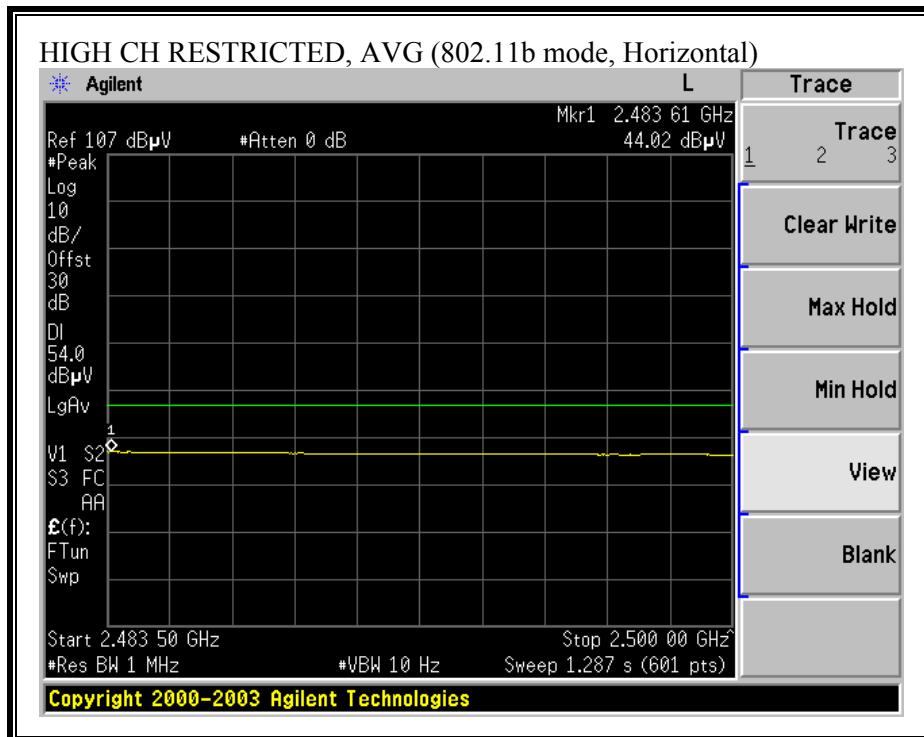


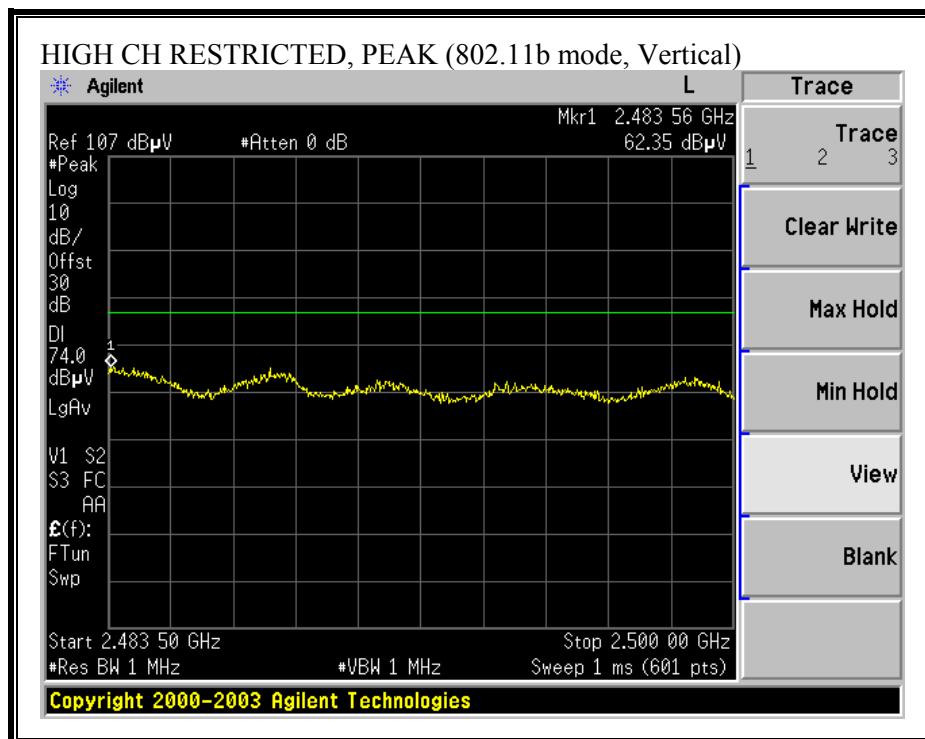
**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)**

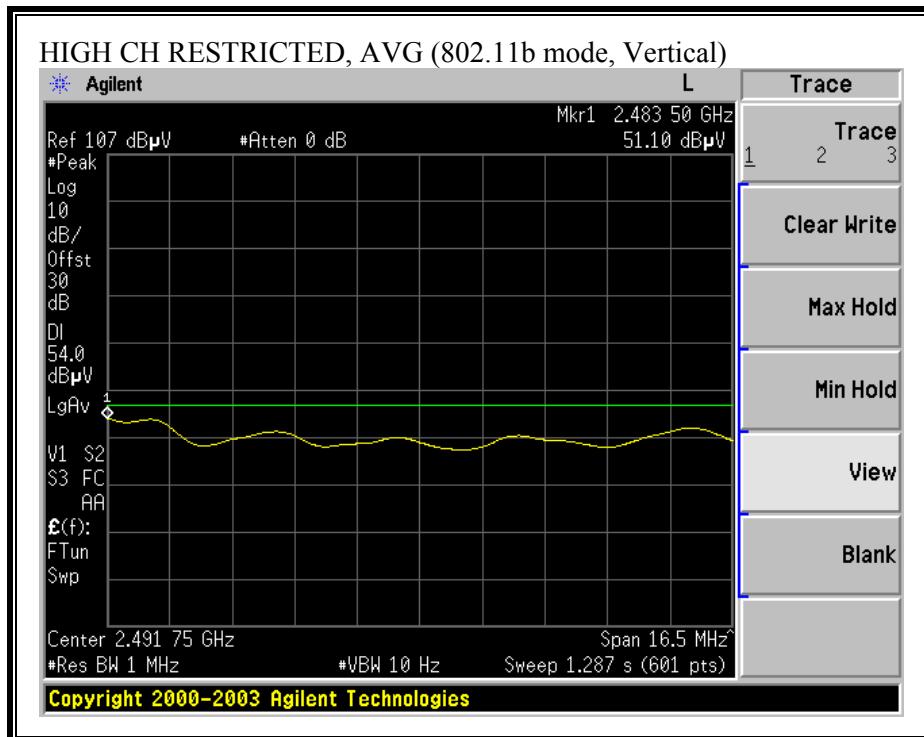



**HARMONICS AND SPURIOUS EMISSIONS (b MODE)**


10/13/04 High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr:Chin Pang Project #:04U3022-1 Company:Tropos Networks EUT Descrip.:802.11 b/g Outdoor Wi-Fi Cellular Base Station EUT M/N:TROPOS 5210 Test Target:FCC Class B Mode Oper:Tx, b mode, 12dBi Omni																
<b>Test Equipment:</b>																
EMCO Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz							
T73; S/N: 6717 @3m			T87 Miteq 924342													
Hi Frequency Cables 2 foot cable      3 foot cable      4 foot cable      12 foot cable _____ _____      _____      _____      _____ _____      _____      _____      _____																
HPF      Reject Filter HPF_4.6 GHz      _____																
<b>Peak Measurements</b> RBW=VBW=1MHz																
<b>Average Measurements</b> RBW=1MHz ; VBW=10Hz																
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
<b>Transmitting at low ch</b>																
4.824	3.0	48.0	34.6	32.9	3.6	-39.6	0.0	2.4	47.3	33.9	74	54	-26.7	-20.1	V	
12.060	3.0	46.2	33.5	38.8	6.9	-39.2	0.0	0.7	53.5	40.8	74	54	-20.5	-13.2	V	
4.824	3.0	47.3	34.3	32.9	3.6	-39.6	0.0	2.4	46.6	33.6	74	54	-27.4	-20.4	H	
12.060	3.0	45.0	33.0	38.8	6.9	-39.2	0.0	0.7	52.3	40.3	74	54	-21.7	-13.7	H	
<b>Transmitting at mid ch</b>																
4.874	3.0	48.3	34.8	32.9	3.6	-39.6	0.0	2.5	47.7	34.2	74	54	-26.3	-19.8	V	
7.311	3.0	47.7	36.0	35.8	4.6	-40.3	0.0	1.4	49.2	37.5	74	54	-24.8	-16.5	V	
12.185	3.0	45.0	33.5	38.8	6.9	-39.3	0.0	0.7	52.2	40.7	74	54	-21.8	-13.3	V	
4.874	3.0	46.3	34.0	32.9	3.6	-39.6	0.0	2.5	45.7	33.4	74	54	-28.3	-20.6	H	
7.311	3.0	47.0	35.2	35.8	4.6	-40.3	0.0	1.4	48.5	36.7	74	54	-25.5	-17.3	H	
12.185	3.0	45.3	33.3	38.8	6.9	-39.3	0.0	0.7	52.5	40.5	74	54	-21.5	-13.5	H	
<b>Transmitting at high ch</b>																
4.924	3.0	47.8	34.4	33.0	3.7	-39.7	0.0	2.5	47.2	33.8	74	54	-26.8	-20.2	V	
7.386	3.0	47.3	35.7	36.0	4.6	-40.3	0.0	1.4	49.0	37.4	74	54	-25.0	-16.6	V	
12.310	3.0	44.8	33.6	38.8	6.9	-39.4	0.0	0.7	51.9	40.7	74	54	-22.1	-13.3	V	
4.924	3.0	46.5	34.0	33.0	3.7	-39.7	0.0	2.5	45.9	33.4	74	54	-28.1	-20.6	H	
7.386	3.0	47.4	35.0	36.0	4.6	-40.3	0.0	1.4	49.1	36.7	74	54	-24.9	-17.3	H	
12.310	3.0	44.5	33.4	38.8	6.9	-39.4	0.0	0.7	51.6	40.5	74	54	-22.4	-13.5	H	
Note: No other emissions were detected above the system noise floor.																
f      Measurement Frequency Dist      Distance to Antenna Read      Analyzer Reading AF      Antenna Factor CL      Cable Loss					Amp      Preamp Gain D Corr      Distance Correct to 3 meters Avg      Average Field Strength @ 3 m Peak      Calculated Peak Field Strength HPF      High Pass Filter					Avg Lim      Average Field Strength Limit Pk Lim      Peak Field Strength Limit Avg Mar      Margin vs. Average Limit Pk Mar      Margin vs. Peak Limit						

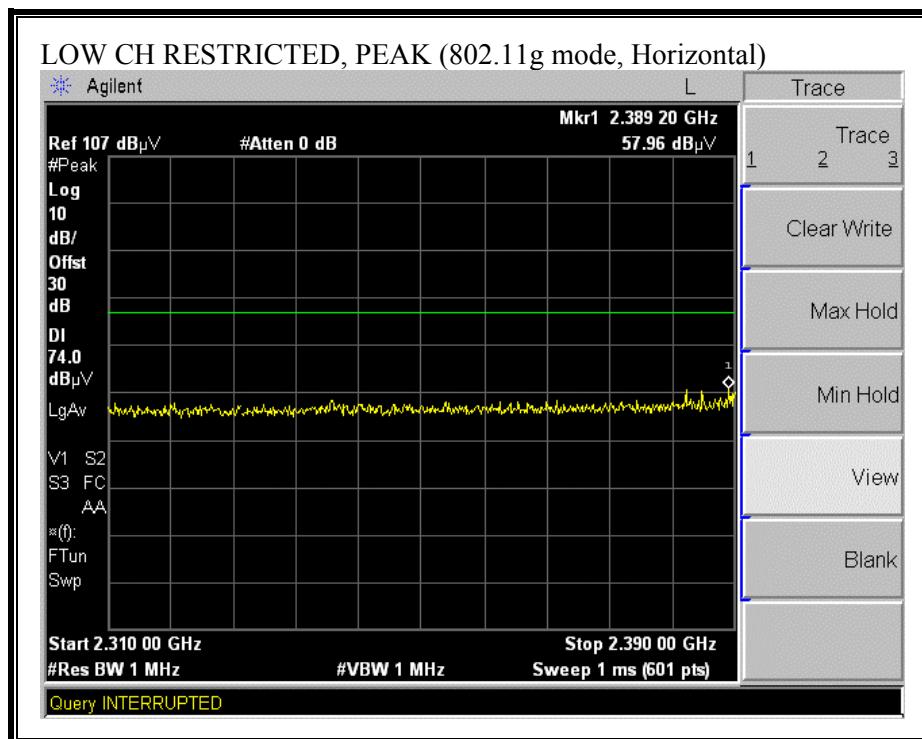
**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)**

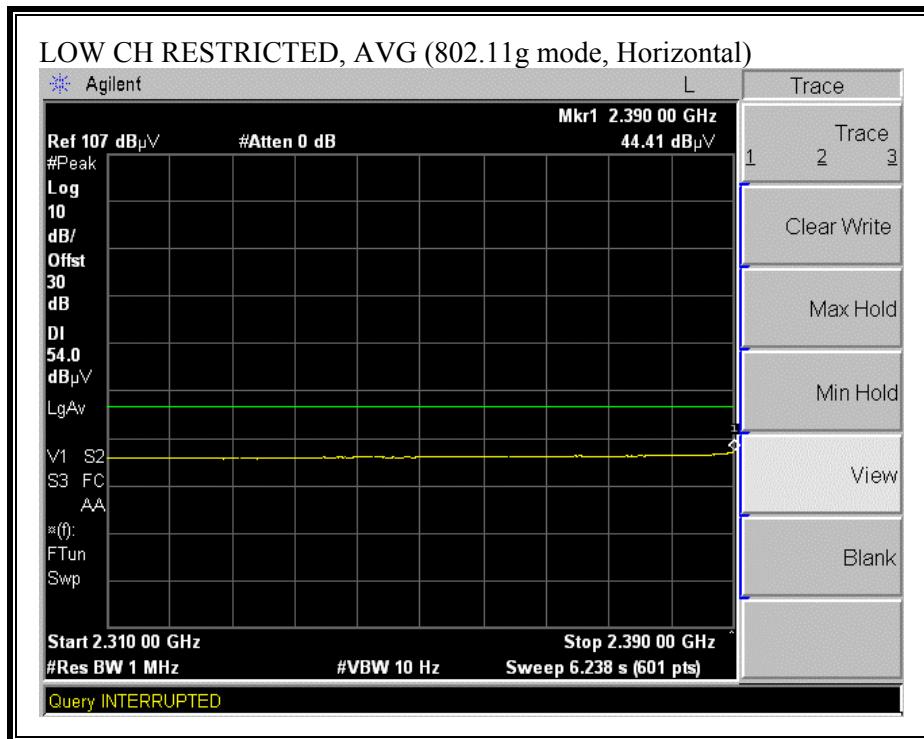


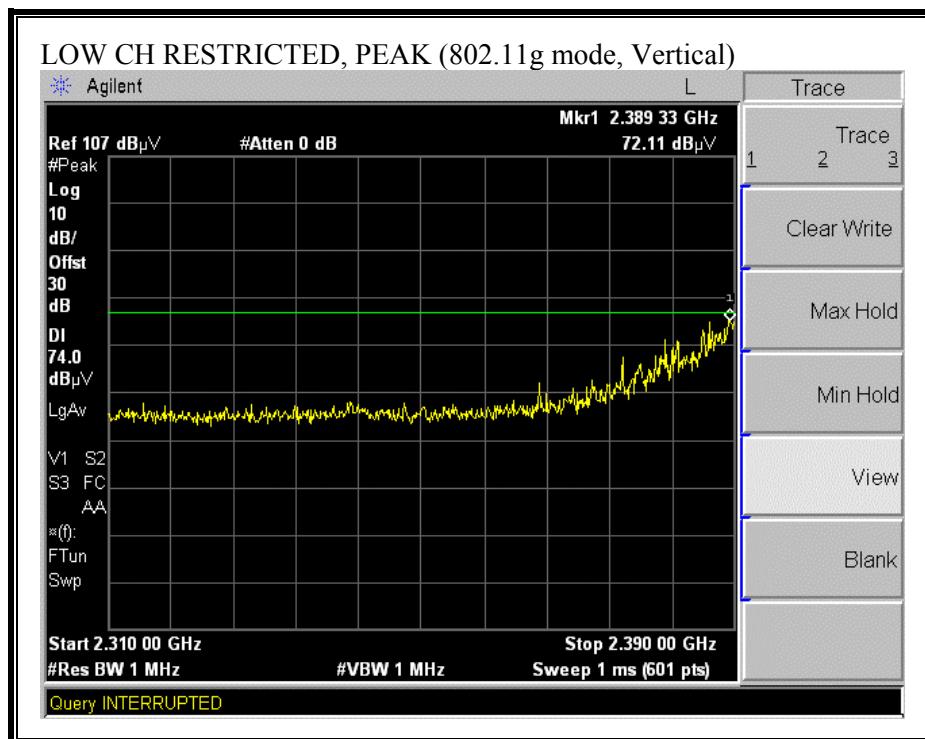
**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)**

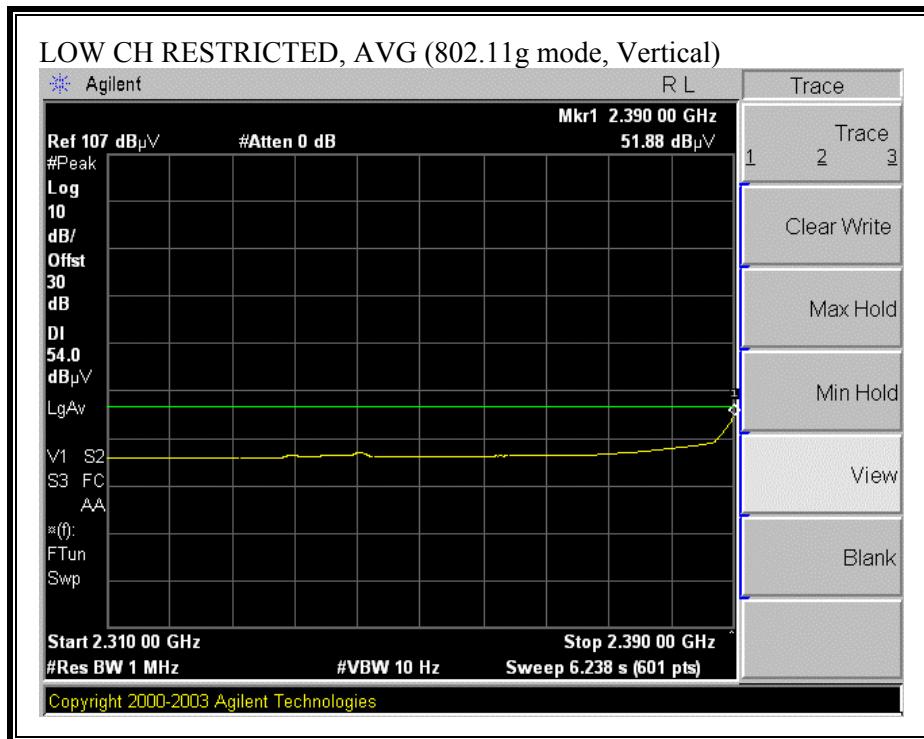

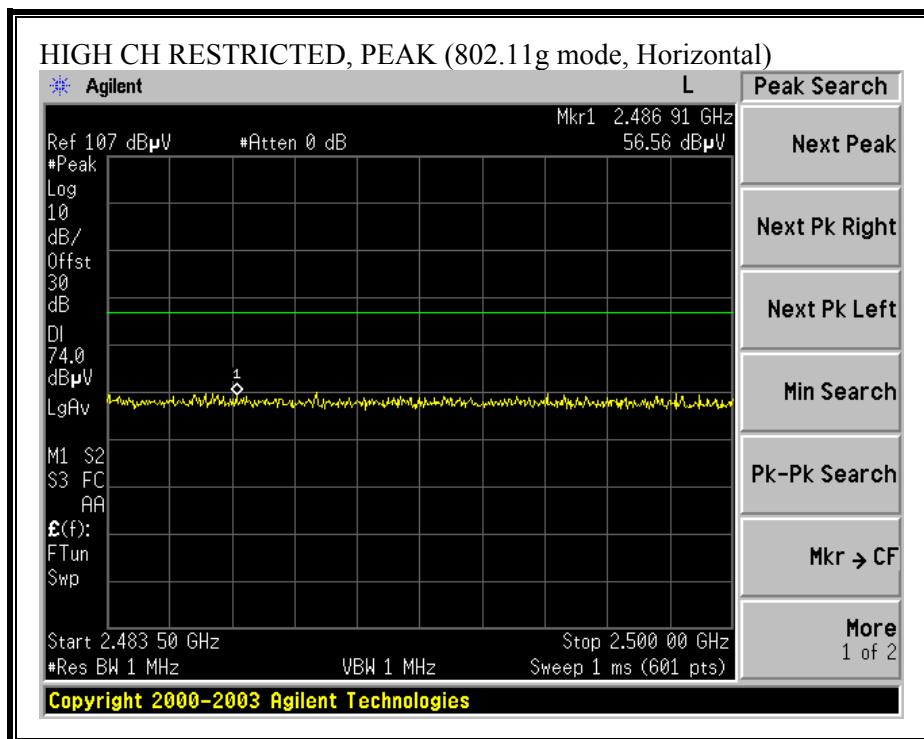**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)**

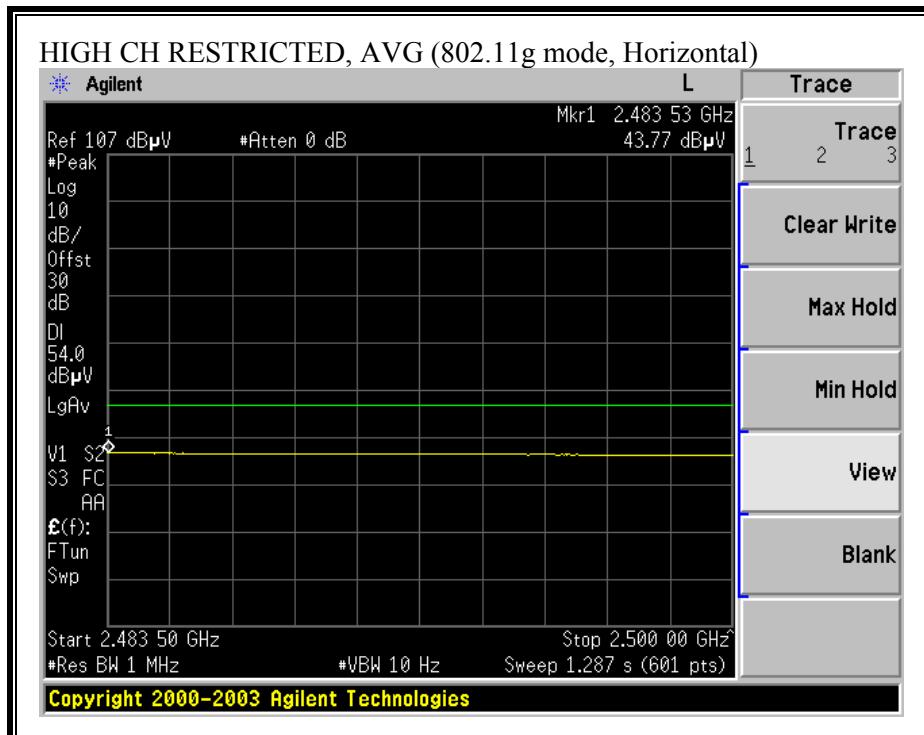

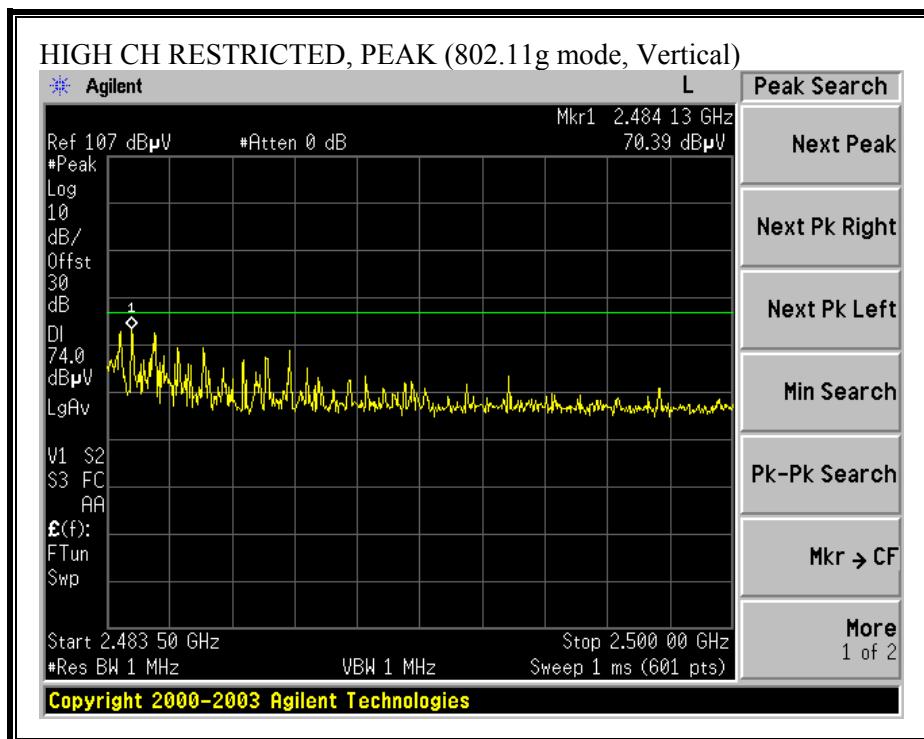**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)**

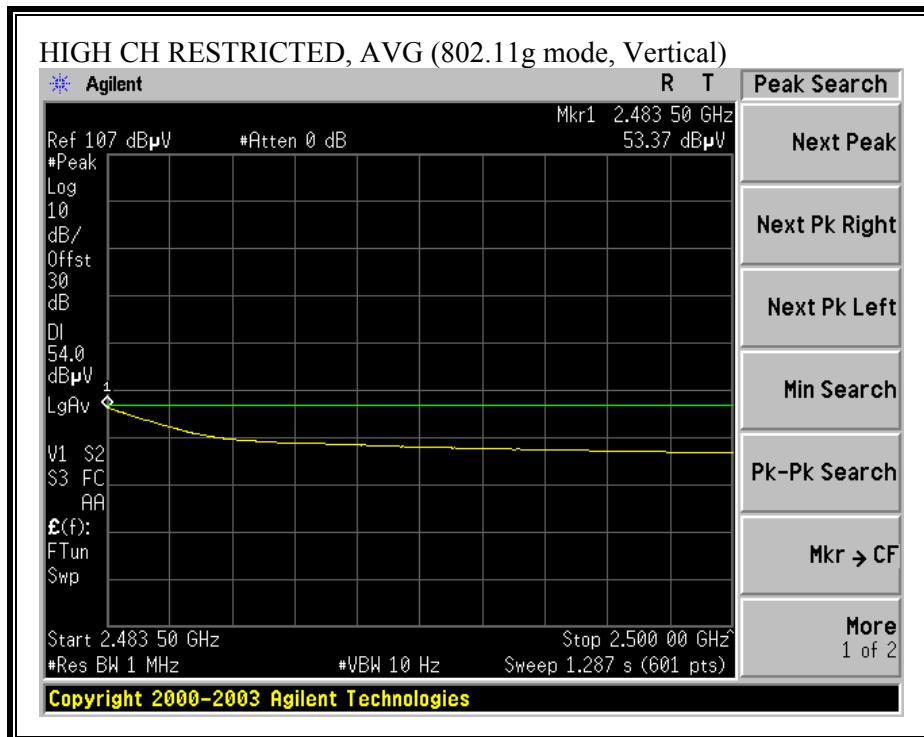



**HARMONICS AND SPURIOUS EMISSIONS (g MODE)**


10/13/04 High Frequency Measurement																																																								
Compliance Certification Services, Morgan Hill Open Field Site																																																								
Test Engr:Chin Pang Project #:04U3022-1 Company:Tropos Networks EUT Descrip.:802.11 b/g Outdoor Wi-Fi Cellular Base Station EUT M/N:TROPOS 5210 Test Target:FCC Class B Mode Oper:Tx, g mode, 12dBi Omni																																																								
<b>Test Equipment:</b> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;">EMCO Horn 1-18GHz</td> <td style="width: 25%;">Pre-amplifier 1-26GHz</td> <td style="width: 25%;">Pre-amplifier 26-40GHz</td> <td style="width: 25%;">Horn &gt; 18GHz</td> </tr> <tr> <td>T73; S/N: 6717 @3m</td> <td>T87 Miteq 924342</td> <td></td> <td></td> </tr> <tr> <td colspan="4">Hi Frequency Cables</td> </tr> <tr> <td>2 foot cable</td> <td>3 foot cable</td> <td>4 foot cable</td> <td>12 foot cable</td> <td>HPF</td> <td>Reject Filter</td> <td colspan="9"> <b>Peak Measurements</b>          RBW=VBW=1MHz       </td> </tr> <tr> <td></td> <td></td> <td>4_Thanh</td> <td>12_Vien</td> <td>HPF_4.6 GHz</td> <td></td> <td colspan="9"> <b>Average Measurements</b>          RBW=1MHz ; VBW=10Hz       </td> </tr> </table>															EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz	T73; S/N: 6717 @3m	T87 Miteq 924342			Hi Frequency Cables				2 foot cable	3 foot cable	4 foot cable	12 foot cable	HPF	Reject Filter	<b>Peak Measurements</b> RBW=VBW=1MHz											4_Thanh	12_Vien	HPF_4.6 GHz		<b>Average Measurements</b> RBW=1MHz ; VBW=10Hz								
EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz																																																					
T73; S/N: 6717 @3m	T87 Miteq 924342																																																							
Hi Frequency Cables																																																								
2 foot cable	3 foot cable	4 foot cable	12 foot cable	HPF	Reject Filter	<b>Peak Measurements</b> RBW=VBW=1MHz																																																		
		4_Thanh	12_Vien	HPF_4.6 GHz		<b>Average Measurements</b> RBW=1MHz ; VBW=10Hz																																																		
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																									
<b>Transmitting at low ch</b>																																																								
4.824	3.0	48.3	34.8	32.9	3.6	-39.6	0.0	2.4	47.6	34.1	74	54	-26.4	-19.9	V																																									
12.060	3.0	45.4	33.4	38.8	6.9	-39.2	0.0	0.7	52.7	40.7	74	54	-21.3	-13.3	V																																									
4.824	3.0	47.3	34.3	32.9	3.6	-39.6	0.0	2.4	46.6	33.6	74	54	-27.4	-20.4	H																																									
12.060	3.0	45.0	33.0	38.8	6.9	-39.2	0.0	0.7	52.3	40.3	74	54	-21.7	-13.7	H																																									
<b>Transmitting at mid ch</b>																																																								
4.874	3.0	47.8	34.5	32.9	3.6	-39.6	0.0	2.5	47.2	33.9	74	54	-26.8	-20.1	V																																									
7.311	3.0	47.5	35.3	35.8	4.6	-40.3	0.0	1.4	49.0	36.8	74	54	-25.0	-17.2	V																																									
12.185	3.0	44.6	33.5	38.8	6.9	-39.3	0.0	0.7	51.8	40.7	74	54	-22.2	-13.3	V																																									
4.874	3.0	47.0	34.3	32.9	3.6	-39.6	0.0	2.5	46.4	33.7	74	54	-27.6	-20.3	H																																									
7.311	3.0	47.4	35.0	35.8	4.6	-40.3	0.0	1.4	48.9	36.5	74	54	-25.1	-17.5	H																																									
12.185	3.0	45.0	33.3	38.8	6.9	-39.3	0.0	0.7	52.2	40.5	74	54	-21.8	-13.5	H																																									
<b>Transmitting at high ch</b>																																																								
4.924	3.0	48.0	35.0	33.0	3.7	-39.7	0.0	2.5	47.4	34.4	74	54	-26.6	-19.6	V																																									
7.386	3.0	47.1	34.8	36.0	4.6	-40.3	0.0	1.4	48.8	36.5	74	54	-25.2	-17.5	V																																									
12.310	3.0	44.3	33.4	38.8	6.9	-39.4	0.0	0.7	51.4	40.5	74	54	-22.6	-13.5	V																																									
4.924	3.0	47.2	34.1	33.0	3.7	-39.7	0.0	2.5	46.6	33.5	74	54	-27.4	-20.5	H																																									
7.386	3.0	47.4	35.0	36.0	4.6	-40.3	0.0	1.4	49.1	36.7	74	54	-24.9	-17.3	H																																									
12.310	3.0	46.0	33.8	38.8	6.9	-39.4	0.0	0.7	53.1	40.9	74	54	-20.9	-13.1	H																																									
Note: No other emissions were detected above the system noise floor.																																																								
f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss				Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter				Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit																																																


**7.2.4. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND WITH  
12dBi SECTOR ANTENNA**


**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)**

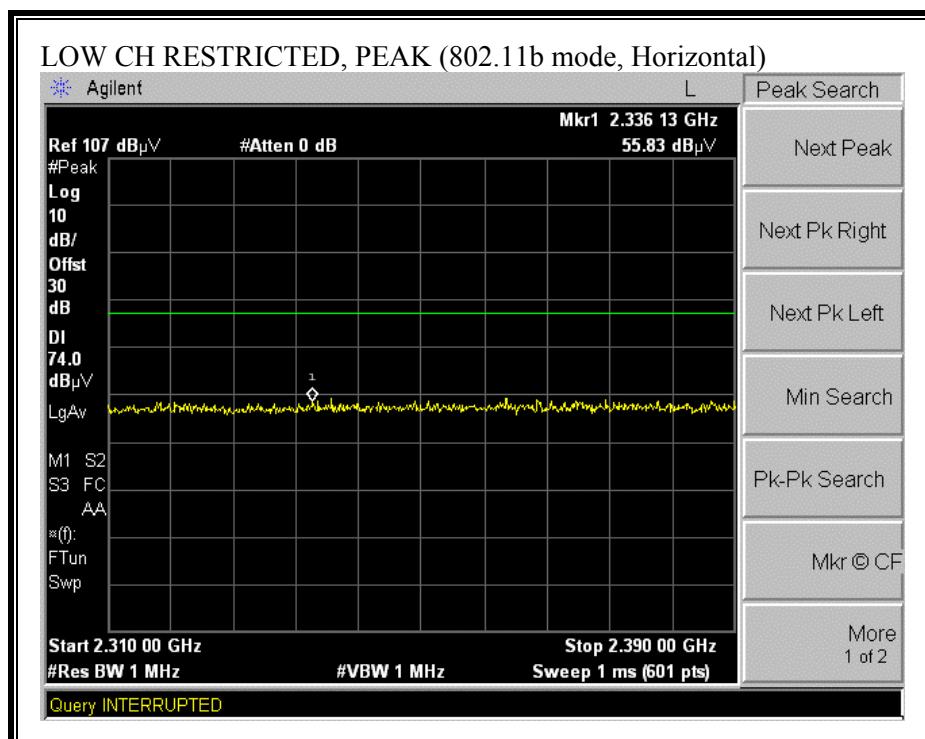


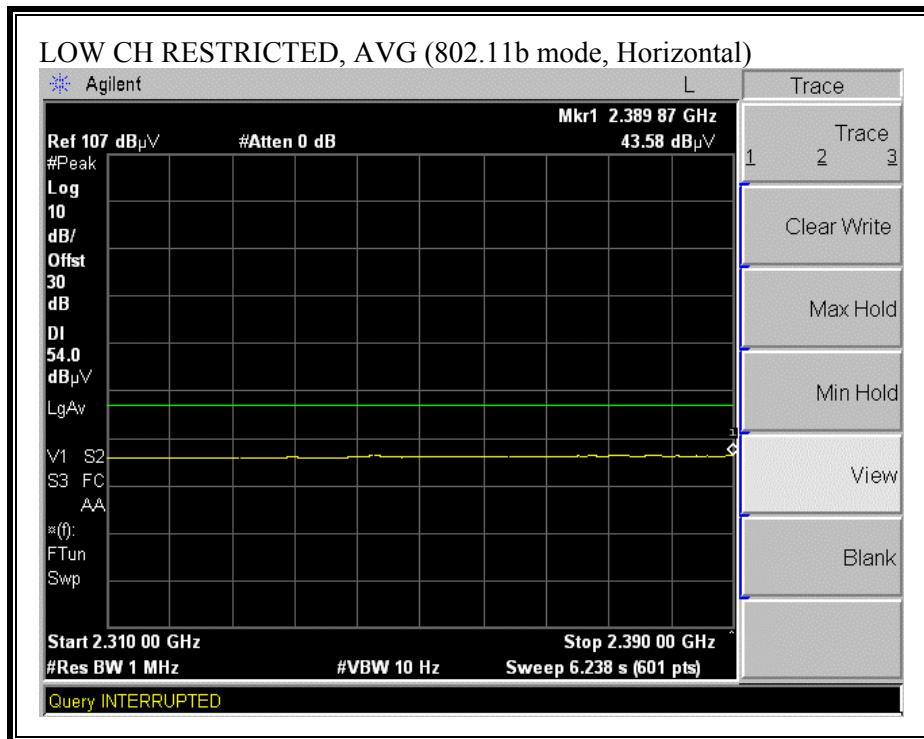


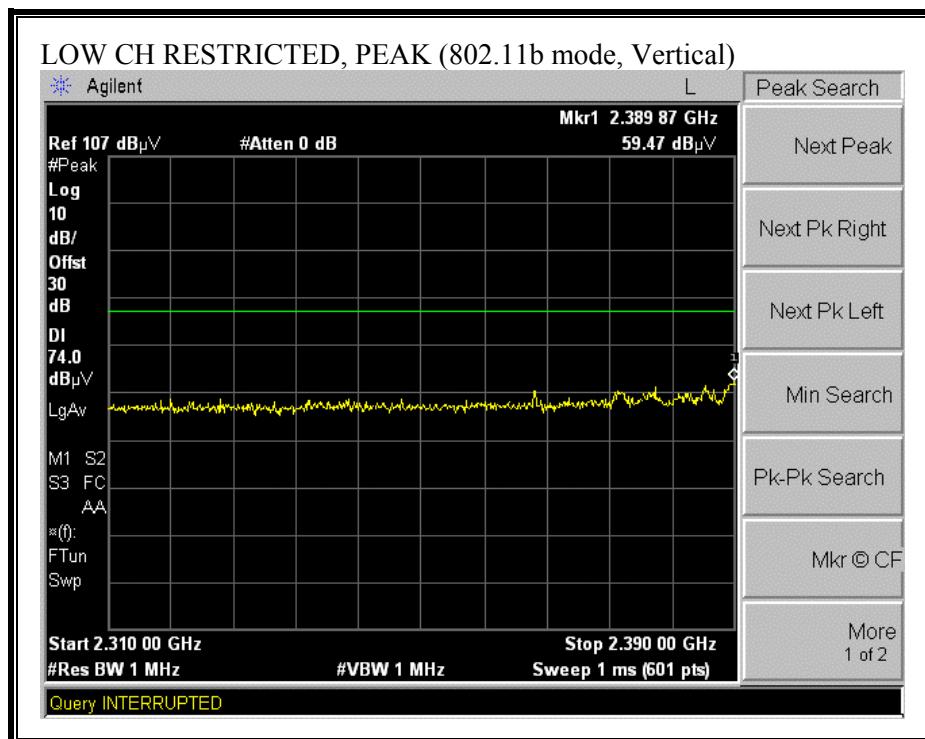
**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)**

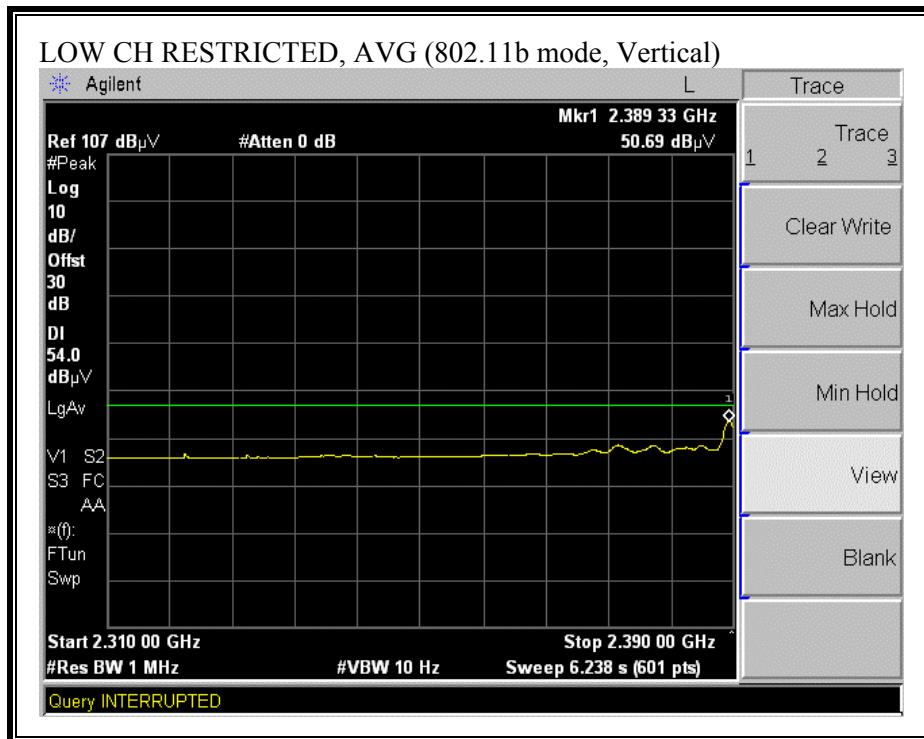

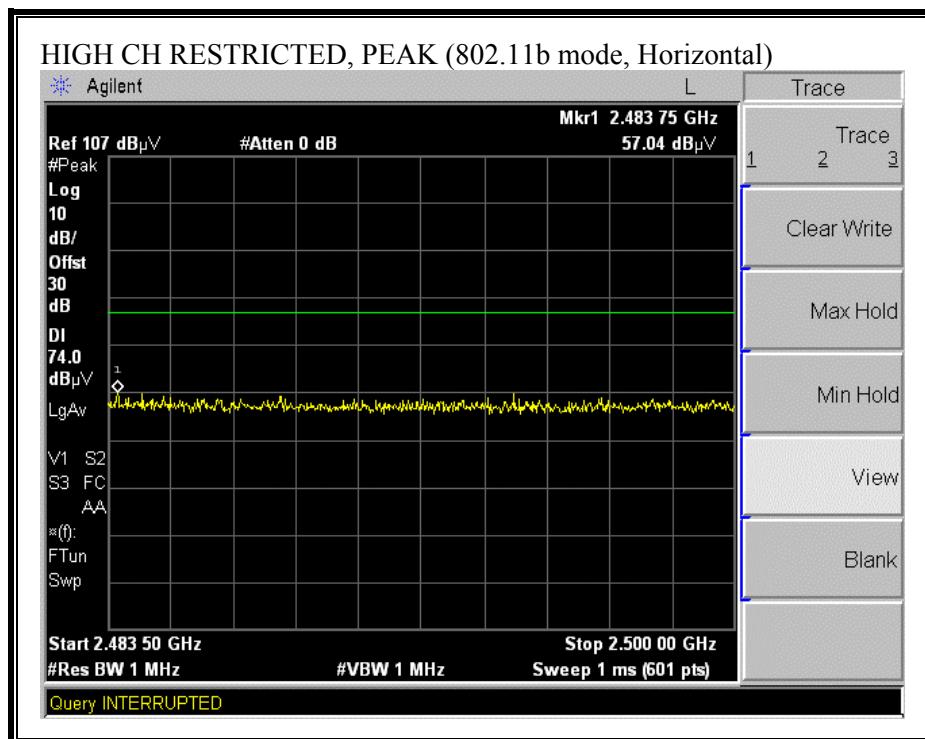**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)**

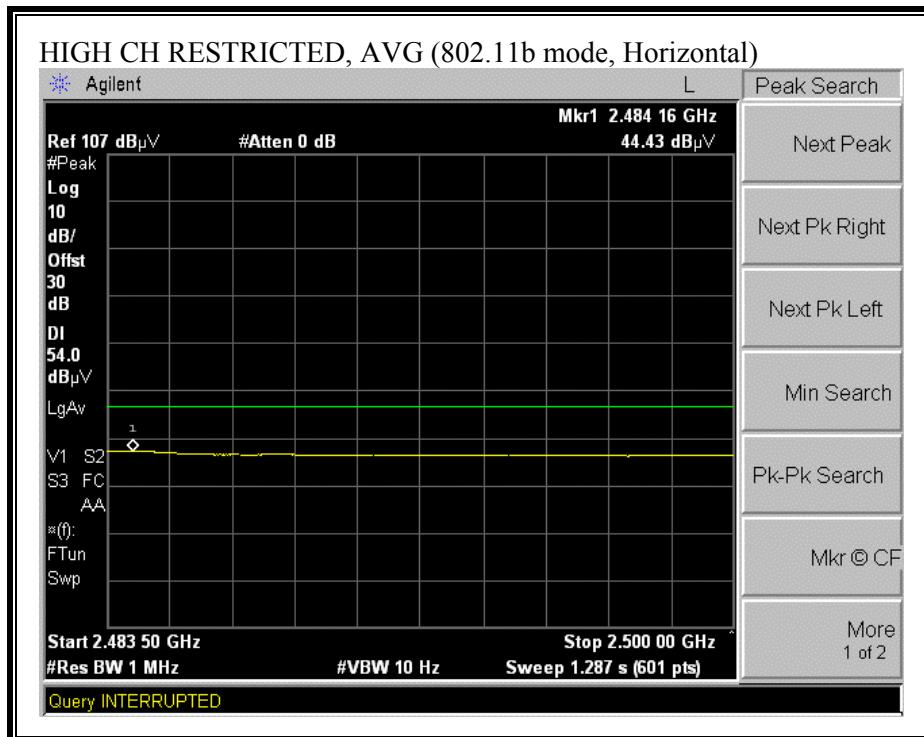


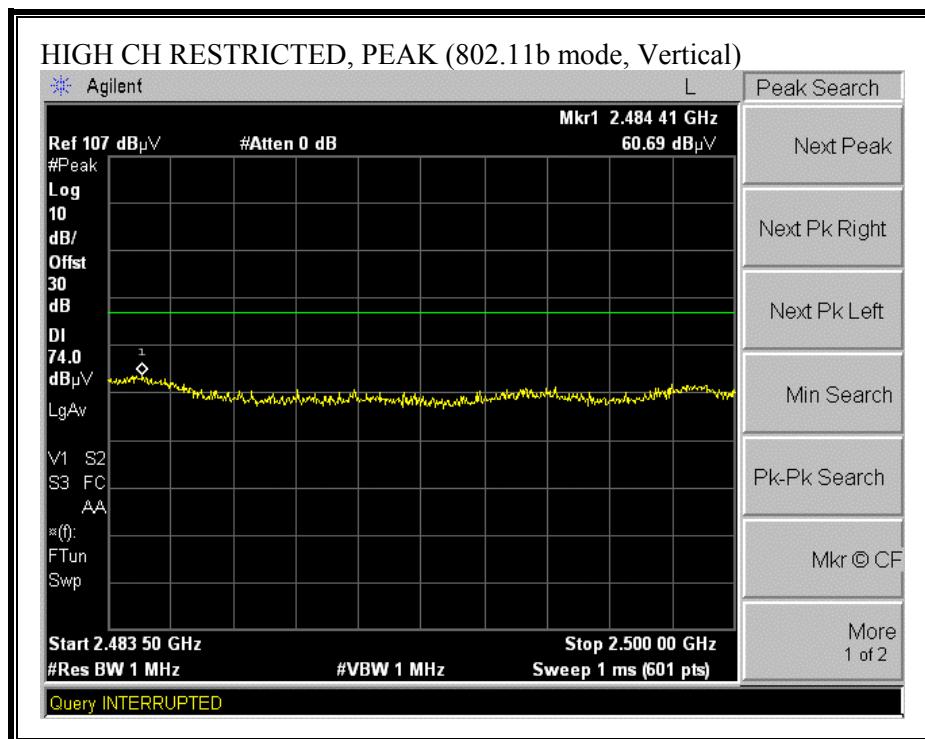
**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)**

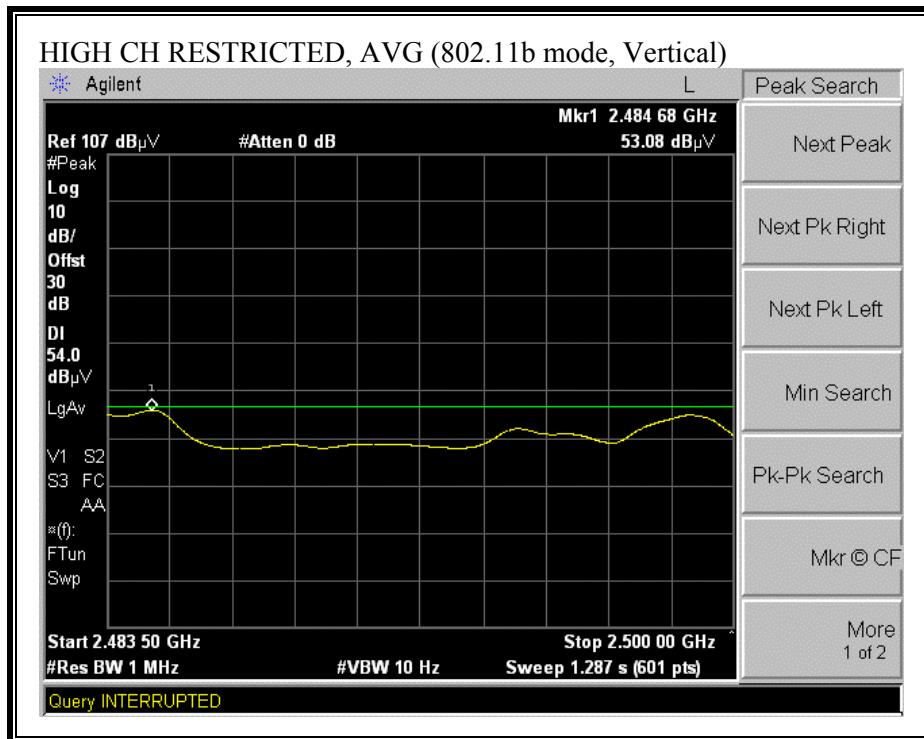



**HARMONICS AND SPURIOUS EMISSIONS (b MODE)**


10/13/04 High Frequency Measurement															
Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr:Chin Pang Project #:04U3022-1 Company:Tropos Networks EUT Descrip.:802.11 b/g Outdoor Wi-Fi Cellular Base Station EUT M/N:TROPOS 5210 Test Target:FCC Class B Mode Oper:Tx, b mode, 12dBi Sector															
<b>Test Equipment:</b>															
<b>EMCO Horn 1-18GHz</b> T73; S/N: 6717 @3m				<b>Pre-amplifier 1-26GHz</b> T87 Miteq 924342				<b>Pre-amplifier 26-40GHz</b> 12_Vien				<b>Horn &gt; 18GHz</b> 4_Thanh			
Hi Frequency Cables 2 foot cable      3 foot cable      4 foot cable      12 foot cable 12_Vien      4_Thanh															
<b>Peak Measurements</b> RBW=VBW=1MHz															
<b>Average Measurements</b> RBW=1MHz ; VBW=10Hz															
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Transmitting at low ch</b>															
4.824	3.0	47.3	37.0	32.9	3.6	-39.6	0.0	2.4	46.6	36.3	74	54	-27.4	-17.7	V
12.060	3.0	43.5	33.0	38.8	6.9	-39.2	0.0	0.7	50.8	40.3	74	54	-23.2	-13.7	V
4.824	3.0	47.5	35.0	32.9	3.6	-39.6	0.0	2.4	46.8	34.3	74	54	-27.2	-19.7	H
12.060	3.0	43.4	33.0	38.8	6.9	-39.2	0.0	0.7	50.7	40.3	74	54	-23.3	-13.7	H
<b>Transmitting at mid ch</b>															
4.874	3.0	47.8	34.0	32.9	3.6	-39.6	0.0	2.5	47.2	33.4	74	54	-26.8	-20.6	V
7.311	3.0	52.5	47.0	35.8	4.6	-40.3	0.0	1.4	54.0	48.5	74	54	-20.0	-5.5	V
12.185	3.0	44.8	33.4	38.8	6.9	-39.3	0.0	0.7	52.0	40.6	74	54	-22.0	-13.4	V
4.874	3.0	47.6	33.4	32.9	3.6	-39.6	0.0	2.5	47.0	32.8	74	54	-27.0	-21.2	H
7.311	3.0	52.2	45.6	35.8	4.6	-40.3	0.0	1.4	53.7	47.1	74	54	-20.3	-6.9	H
12.185	3.0	44.6	33.4	38.8	6.9	-39.3	0.0	0.7	51.8	40.6	74	54	-22.2	-13.4	H
<b>Transmitting at high ch</b>															
4.924	3.0	49.5	43.2	33.0	3.7	-39.7	0.0	2.5	48.9	42.6	74	54	-25.1	-11.4	V
7.386	3.0	55.2	49.0	36.0	4.6	-40.3	0.0	1.4	56.9	50.7	74	54	-17.1	-3.3	V
12.310	3.0	44.0	33.5	38.8	6.9	-39.4	0.0	0.7	51.1	40.6	74	54	-22.9	-13.4	V
4.924	3.0	47.3	37.5	33.0	3.7	-39.7	0.0	2.5	46.7	36.9	74	54	-27.3	-17.1	H
7.386	3.0	55.9	50.2	36.0	4.6	-40.3	0.0	1.4	57.5	51.9	74	54	-16.5	-2.1	H
12.310	3.0	44.6	33.5	38.8	6.9	-39.4	0.0	0.7	51.7	40.6	74	54	-22.3	-13.4	H
Note: No other emissions were detected above the system noise floor.															
f      Measurement Frequency Dist      Distance to Antenna Read      Analyzer Reading AF      Antenna Factor CL      Cable Loss				Amp      Preamp Gain D Corr      Distance Correct to 3 meters Avg      Average Field Strength @ 3 m Peak      Calculated Peak Field Strength HPF      High Pass Filter				Avg Lim      Average Field Strength Limit Pk Lim      Peak Field Strength Limit Avg Mar      Margin vs. Average Limit Pk Mar      Margin vs. Peak Limit							

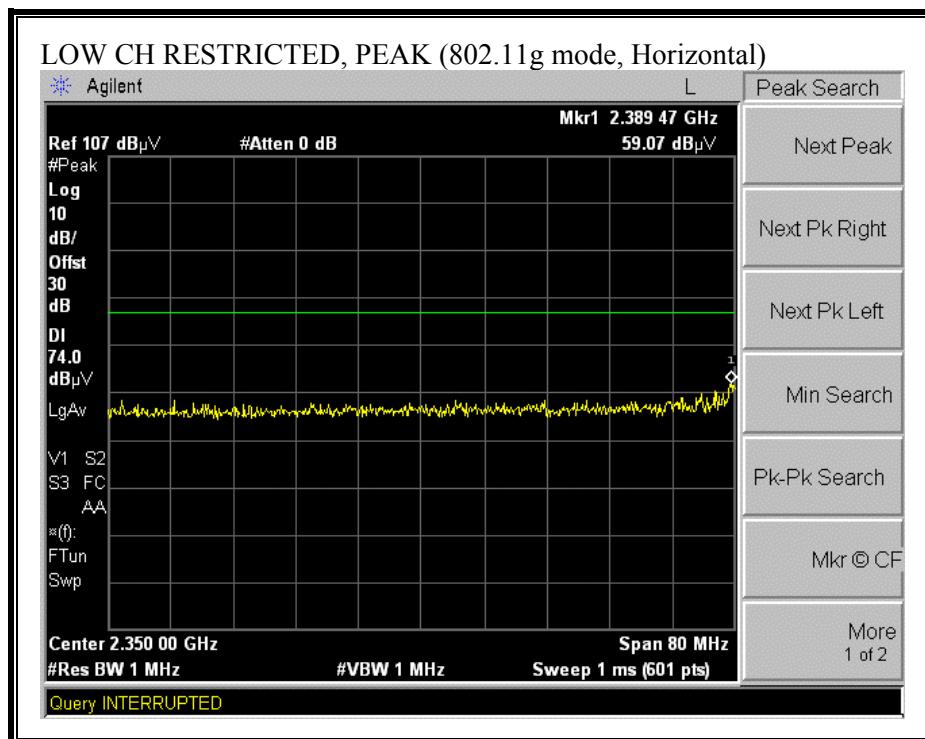
**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)**

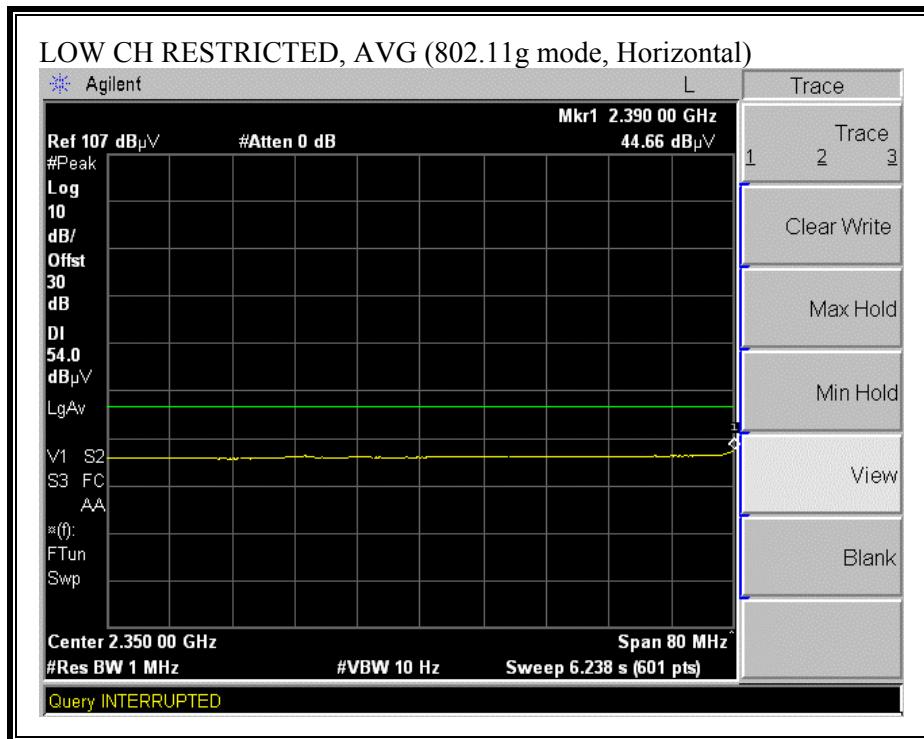


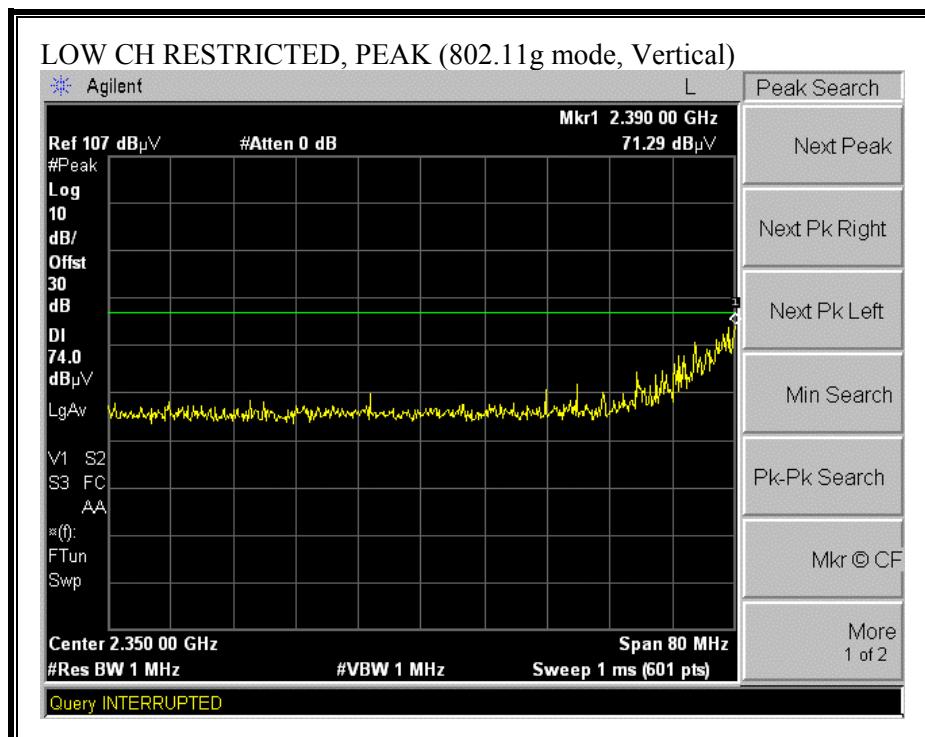
**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)**

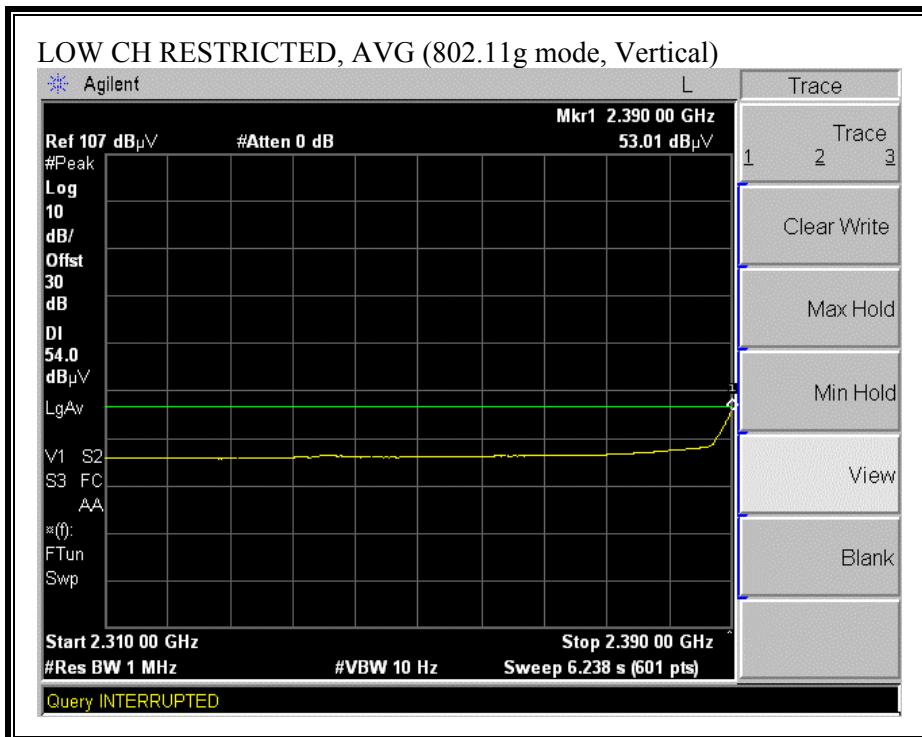

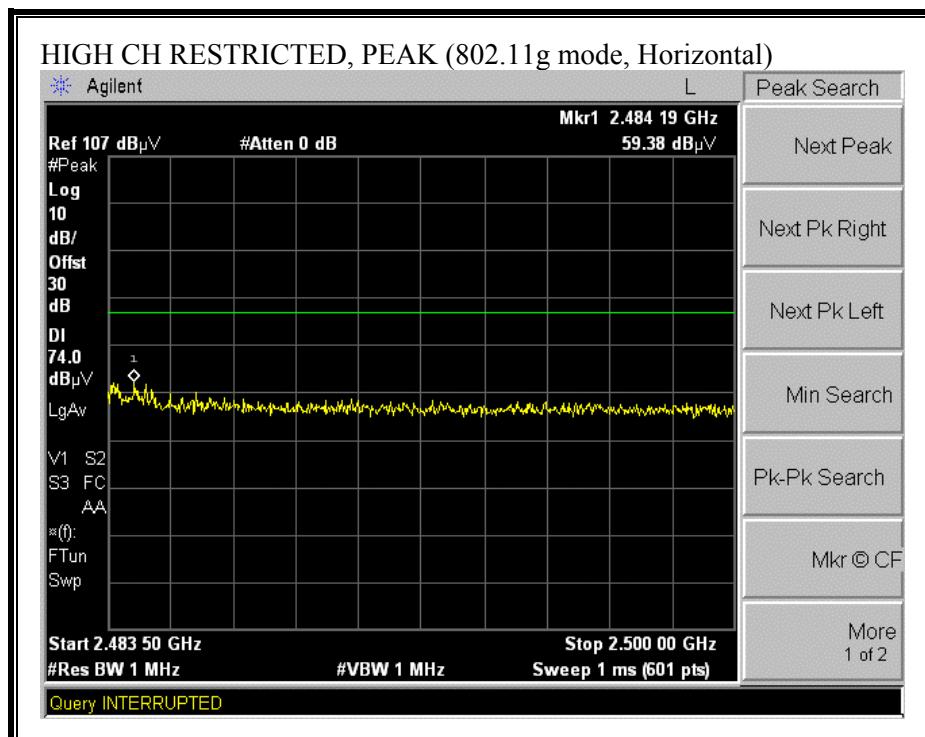**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)**

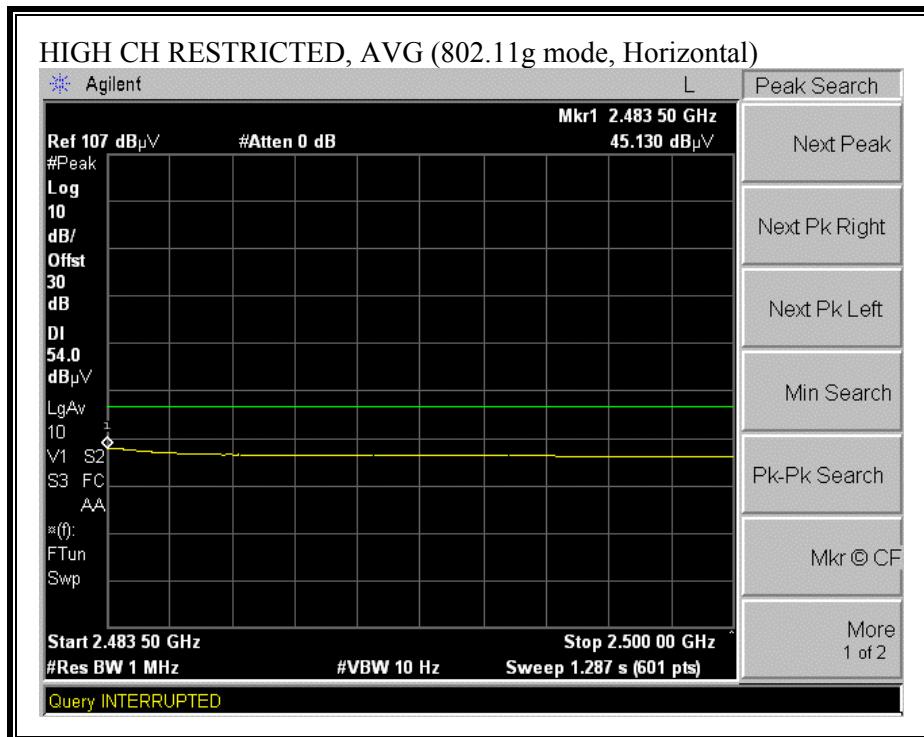

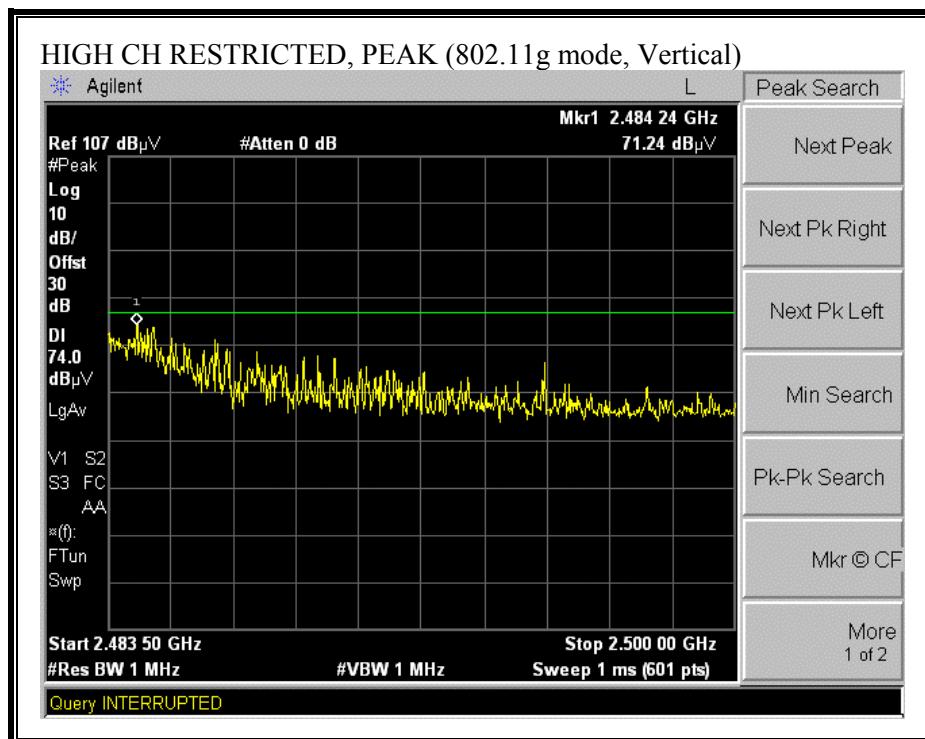**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)**

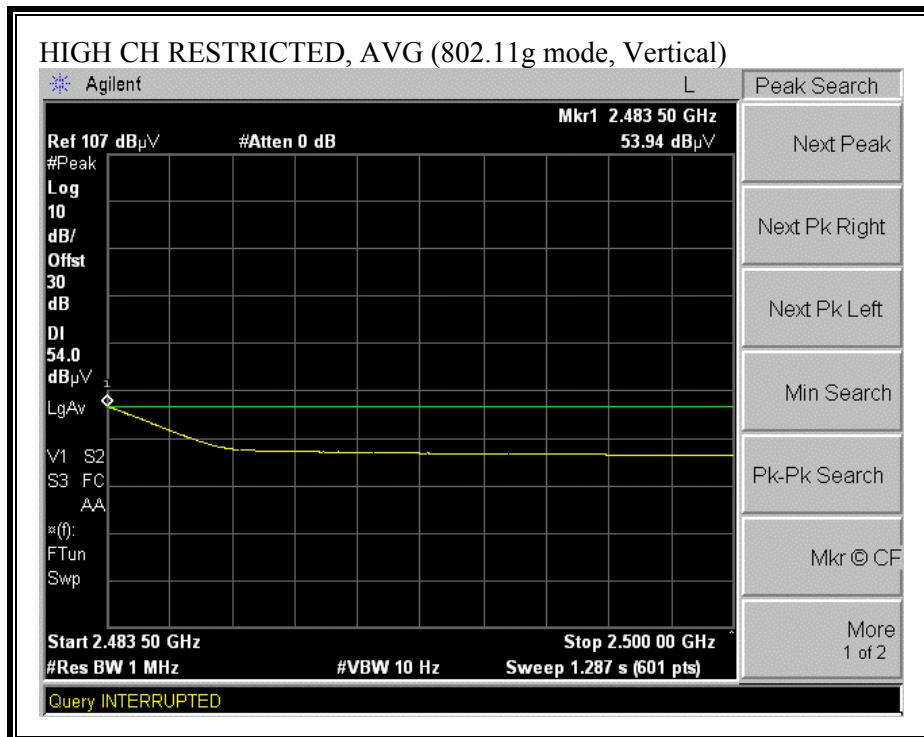

**HARMONICS AND SPURIOUS EMISSIONS (g MODE)**

10/13/04 High Frequency Measurement															
Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr:Chin Pang Project #:04U3022-1 Company:Tropos Networks EUT Descrip.:802.11 b/g Outdoor Wi-Fi Cellular Base Station EUT M/N:TROPOS 5210 Test Target:FCC Class B Mode Oper:Tx, g mode, 12dBi Sector															
<b>Test Equipment:</b>															
EMCO Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz			
T73; S/N: 6717 @3m				T87 Miteq 924342											
Hi Frequency Cables 2 foot cable      3 foot cable      4 foot cable      12 foot cable _____ 4_Thanh      12_Vien															
HPF      Reject Filter HPF_4.6 GHz      _____															
<b>Peak Measurements</b> RBW=VBW=1MHz															
<b>Average Measurements</b> RBW=1MHz ; VBW=10Hz															
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Transmitting at low ch</b>															
4.824	3.0	47.8	34.3	32.9	3.6	-39.6	0.0	2.4	47.1	33.6	74	54	-26.9	-20.4	V
12.060	3.0	45.0	34.4	38.8	6.9	-39.2	0.0	0.7	52.3	41.7	74	54	-21.7	-12.3	V
4.824	3.0	46.6	34.1	32.9	3.6	-39.6	0.0	2.4	45.9	33.4	74	54	-28.1	-20.6	H
12.060	3.0	44.0	33.0	38.8	6.9	-39.2	0.0	0.7	51.3	40.3	74	54	-22.7	-13.7	H
<b>Transmitting at mid ch</b>															
4.874	3.0	48.4	34.8	32.9	3.6	-39.6	0.0	2.5	47.8	34.2	74	54	-26.2	-19.8	V
7.311	3.0	57.0	42.3	35.8	4.6	-40.3	0.0	1.4	58.5	43.8	74	54	-15.5	-10.2	V
12.185	3.0	45.0	33.5	38.8	6.9	-39.3	0.0	0.7	52.2	40.7	74	54	-21.8	-13.3	V
4.874	3.0	47.0	33.5	32.9	3.6	-39.6	0.0	2.5	46.4	32.8	74	54	-27.6	-21.2	H
7.311	3.0	58.0	42.5	35.8	4.6	-40.3	0.0	1.4	59.5	44.0	74	54	-14.5	-10.0	H
12.185	3.0	44.0	33.2	38.8	6.9	-39.3	0.0	0.7	51.2	40.4	74	54	-22.8	-13.6	H
<b>Transmitting at high ch</b>															
4.924	3.0	48.4	34.9	33.0	3.7	-39.7	0.0	2.5	47.8	34.3	74	54	-26.2	-19.7	V
7.386	3.0	57.0	41.2	36.0	4.6	-40.3	0.0	1.4	58.7	42.9	74	54	-15.3	-11.1	V
12.310	3.0	44.2	33.4	38.8	6.9	-39.4	0.0	0.7	51.3	40.5	74	54	-22.7	-13.5	V
4.924	3.0	45.0	34.1	33.0	3.7	-39.7	0.0	2.5	44.4	33.5	74	54	-29.6	-20.5	H
7.386	3.0	59.7	44.9	36.0	4.6	-40.3	0.0	1.4	61.4	46.6	74	54	-12.6	-7.4	H
12.310	3.0	44.0	33.0	38.8	6.9	-39.4	0.0	0.7	51.1	40.1	74	54	-22.9	-13.9	H
Note: No other emissions were detected above the system noise floor.															
f      Measurement Frequency Dist      Distance to Antenna Read      Analyzer Reading AF      Antenna Factor CL      Cable Loss				Amp      Preamp Gain D Corr      Distance Correct to 3 meters Avg      Average Field Strength @ 3 m Peak      Calculated Peak Field Strength HPF      High Pass Filter				Avg Lim      Average Field Strength Limit Pk Lim      Peak Field Strength Limit Avg Mar      Margin vs. Average Limit Pk Mar      Margin vs. Peak Limit							

### 7.2.5. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH 7.4dBi OMNI ANTENNA


#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)7.4dBi OMNI ANTENNA

##### HORIZONTAL PLOT



561F Monterey Road  
Morgan Hill, CA 95037  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 18 File#: Tropos TX.EMI Date: 10-13-2004 Time: 10:10:07

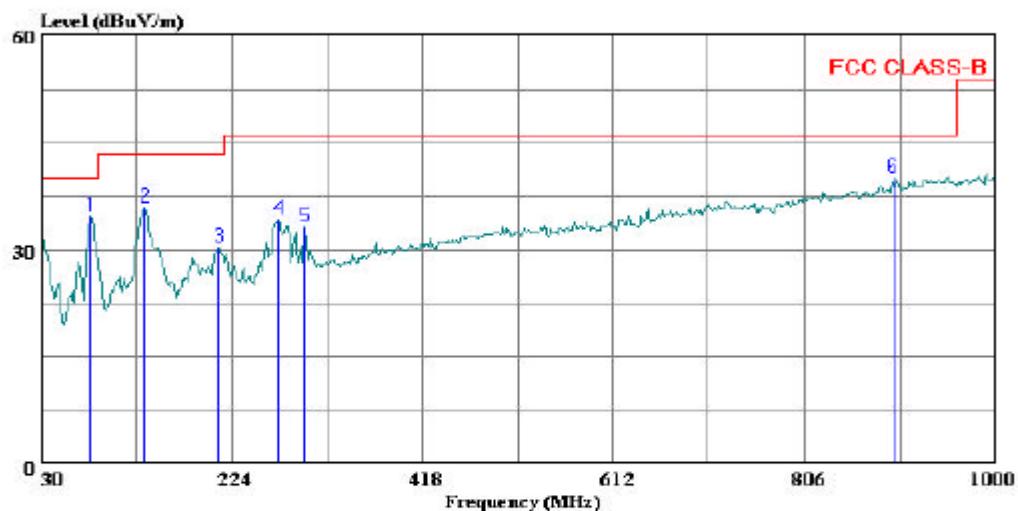

(Audit ATC)

Trace: 17

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL  
Test Operator: : Chin Pang  
Project #: : 04U3022-1  
Company: : Tropos Networks  
EUT: : 802.11b/g Outdoor Wi-Fi Cellular Base  
: Station  
Model No: : TROPOS 5210  
Configuration: : EUT/ 7.4dBi Omni antenna  
Target of Test: : FCC Class B  
Mode of Operation: b mode, Tx, ( Worst Case )

## HORIZONTAL DATA

Freq	Remark	Read		Level	Limit	Over	Page: 1
		Level	Factor				
MHz		dBuV	dB	dBuV/m	dBuV/m	dB	
1	80.440	Peak	24.95	9.69	34.64	40.00	-5.36
2	135.730	Peak	20.12	15.76	35.88	43.50	-7.62
3	211.390	Peak	17.10	13.22	30.32	43.50	-13.18
4	271.530	Peak	18.64	15.52	34.16	46.00	-11.84
5	298.690	Peak	16.96	16.28	33.23	46.00	-12.77
6	895.240	Peak	13.55	26.49	40.04	46.00	-5.96


**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL) 7.4dBi OMNI ANTENNA**

## VERTICAL PLOT



561F Monterey Road  
Morgan Hill, CA 95037  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 20 File#: Tropos TX.EMI Date: 10-13-2004 Time: 10:13:59

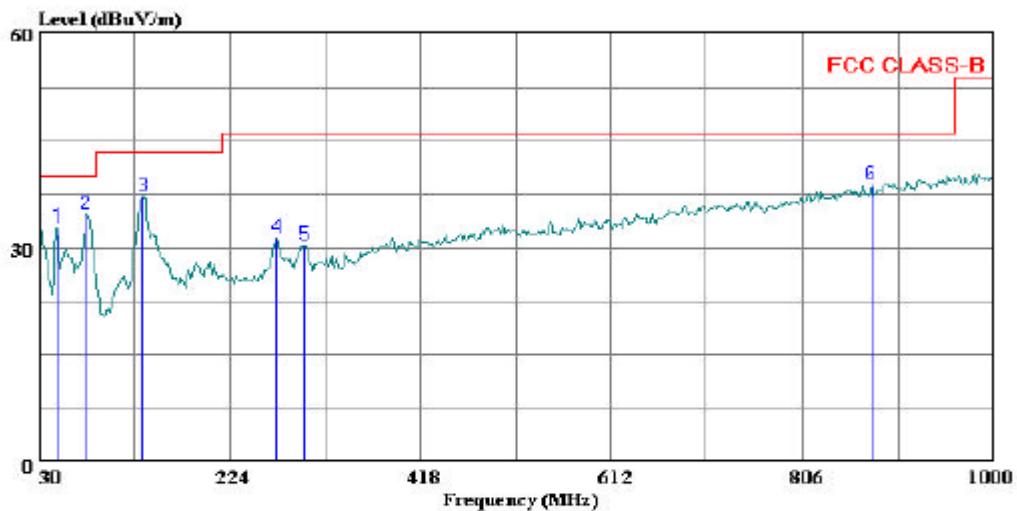

(Audit ATC)

Trace: 19

Ref Trace:

Condition: FCC CLASS-B VERTICAL  
Test Operator: : Chin Pang  
Project #: : 04U3022-1  
Company: : Tropos Networks  
EUT: : 802.11b/g Outdoor Wi-Fi Cellular Base  
: Station  
Model No: : TROPOS 5210  
Configuration: : EUT/ 7.4dBi Omni antenna  
Target of Test: : FCC Class B  
Mode of Operation: b mode, Tx, ( Worst Case )

## VERTICAL DATA

Page: 1

Freq	Remark	Read	Limit		Over	
		Level	Factor	Level		Line
MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	48.430 Peak	21.92	10.97	32.89	40.00	-7.11
2	77.530 Peak	24.99	9.71	34.70	40.00	-5.30
3	135.730 Peak	21.41	15.76	37.17	43.50	-6.33
4	271.530 Peak	15.79	15.52	31.31	46.00	-14.69
5	299.660 Peak	14.00	16.29	30.29	46.00	-15.71
6	875.840 Peak	12.80	26.10	38.90	46.00	-7.10

### 7.2.6. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH 12dBi OMNI ANTENNA


#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL (12dBi OMNI ANTENNA )

##### HORIZONTAL PLOT



561F Monterey Road  
Morgan Hill, CA 95037  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 16 File#: Tropos TX.EMI Date: 10-13-2004 Time: 10:03:22

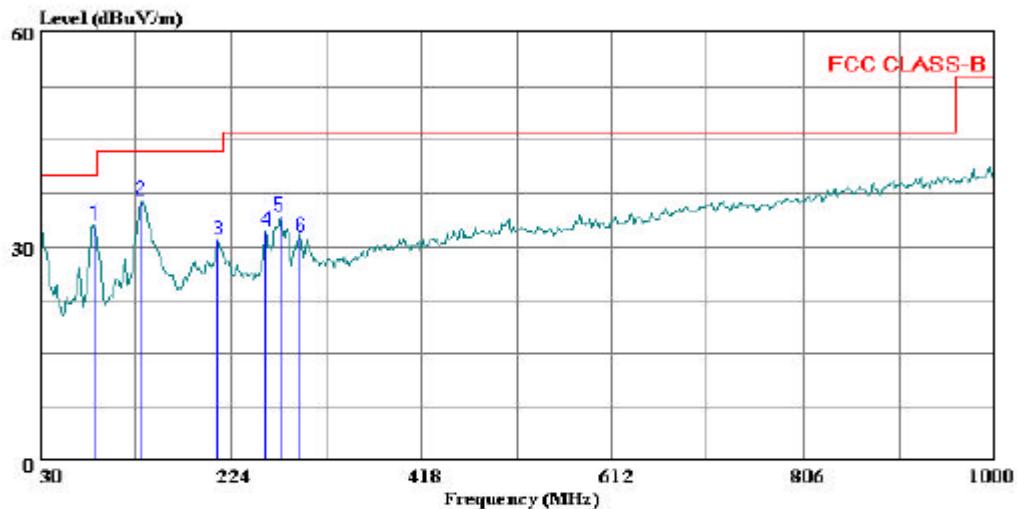

(Audit ATC)

Trace: 15

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL  
Test Operator: : Chin Pang  
Project #: : 04U3022-1  
Company: : Tropos Networks  
EUT: : 802.11b/g outdoor Wi-Fi Cellular Base  
: Station  
Model No: : TROPOS 5210  
Configuration: : EUT/ 12 dBi Omni antenna  
Target of Test: : FCC Class B  
Mode of Operation: b mode, Tx, ( Worst Case )

## HORIZONTAL DATA

Page: 1

Freq	Remark	Read		Limit	Over	Line	Limit
		Level	Factor				
1	85.290 Peak	23.57	9.45	33.02	40.00	-6.98	
2	133.790 Peak	20.71	15.85	36.56	43.50	-6.94	
3	211.390 Peak	17.63	13.22	30.85	43.50	-12.65	
4	259.890 Peak	17.31	14.93	32.24	46.00	-13.76	
5	274.440 Peak	18.56	15.64	34.20	46.00	-11.80	
6	294.810 Peak	15.16	16.18	31.34	46.00	-14.67	


**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL) (12dBi OMNI ANTENNA )**

## VERTICAL PLOT



561F Monterey Road  
Morgan Hill, CA 95037  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 14 File#: Tropos TX.EMI Date: 10-13-2004 Time: 09:59:05

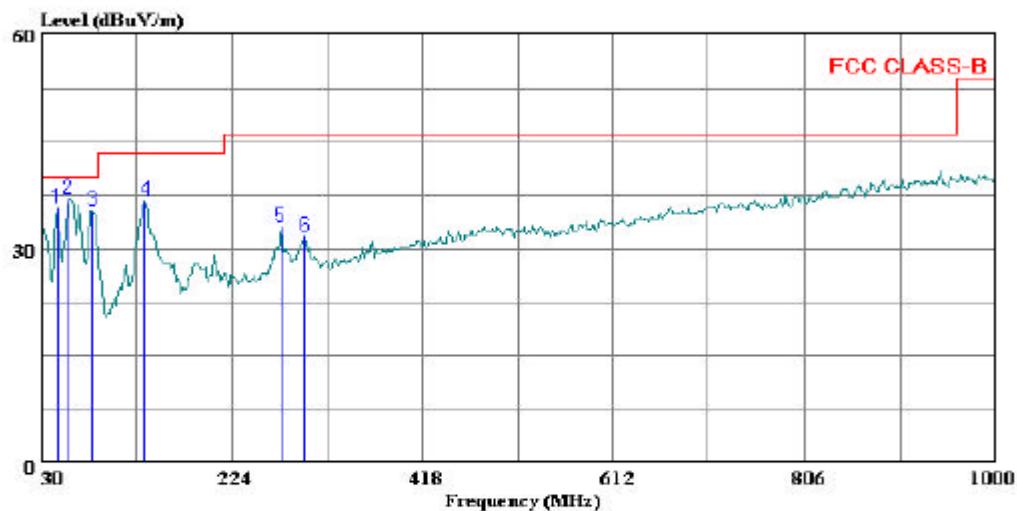

(Audit ATC)  
Trace: 13

Ref Trace:

Condition: FCC CLASS-B VERTICAL  
Test Operator: : Chin Pang  
Project #: : 04U3022-1  
Company: : Tropos Networks  
BUT: : 802.11b/g Outdoor Wi-Fi Cellular Base  
: Station  
Model No: : TROPOS 5210  
Configuration: : EUT/ 12 dBi Omni antenna  
Target of Test: : FCC Class B  
Mode of Operation: b mode, Tx, ( Worst Case )

## VERTICAL DATA

Page: 1

Freq	Remark	Read	Level	Factor	Limit	Over	
		Level			Line		Limit
MHz		dBuV	dB	dBuV/m	dBuV/m	dB	
1	46.490	Peak	23.04	12.68	35.72	40.00	-4.28
2	58.130	Peak	27.95	9.10	37.05	40.00	-2.95
3	82.380	Peak	25.75	9.60	35.35	40.00	-4.65
4	135.730	Peak	21.06	15.76	36.82	43.50	-6.68
5	274.440	Peak	17.33	15.64	32.97	46.00	-13.03
6	298.690	Peak	15.50	16.28	31.78	46.00	-14.23

### 7.2.7. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH 12dBi SECTOR ANTENNA


#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL) ( 12dBi SECTOR ANTENNA )

##### HORIZONTAL PLOT



561F Monterey Road  
Morgan Hill, CA 95037  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 10 File#: Tropos TX.EMI Date: 10-13-2004 Time: 09:44:55

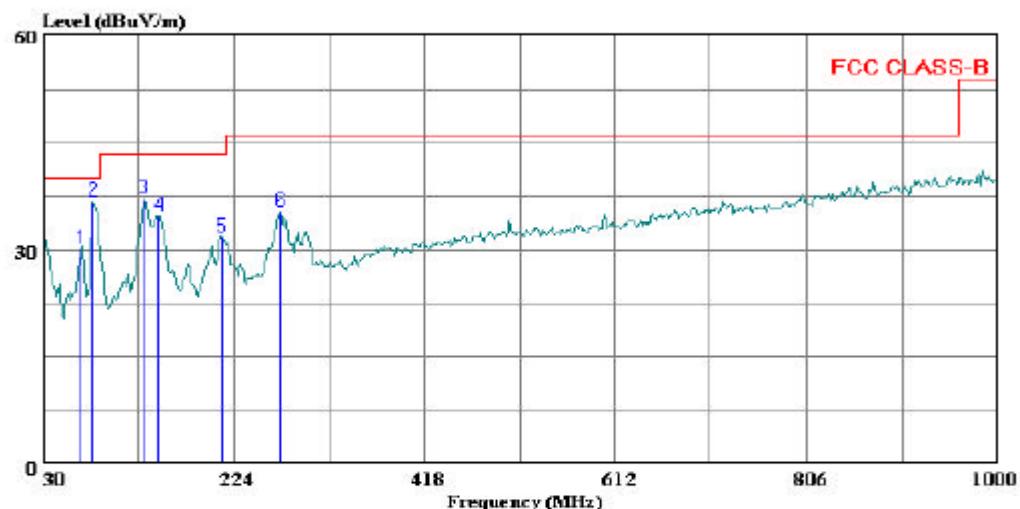

(Audit ATC)

Trace: 9

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL  
Test Operator: : Chin Pang  
Project #: : 04U3022-1  
Company: : Tropos Networks  
BUT: : 802.11b/g Outdoor Wi-Fi Cellular Base  
: Station  
Model No: : TROPOS 5210  
Configuration: : EUT/ 12 dBi Sector antenna  
Target of Test: : FCC Class B  
Mode of Operation: b mode, Tx, ( Worst Case )

## HORIZONTAL DATA

Page: 1

Freq	Remark	Read		Limit		Over Limit
		Level	Factor	Level	Line	
MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	68.800 Peak	20.30	9.74	30.04	40.00	-9.96
2	80.440 Peak	27.05	9.69	36.74	40.00	-3.26
3	133.790 Peak	21.25	15.85	37.10	43.50	-6.40
4	147.370 Peak	19.70	14.94	34.64	43.50	-8.86
5	212.360 Peak	18.61	13.22	31.83	43.50	-11.67
6	271.530 Peak	19.75	15.52	35.27	46.00	-10.73


**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL) ( 12dBi SECTOR ANTENNA )**

## VERTICAL PLOT



561F Monterey Road  
Morgan Hill, CA 95037  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 12 File#: Tropos TX.EMI Date: 10-13-2004 Time: 09:51:10

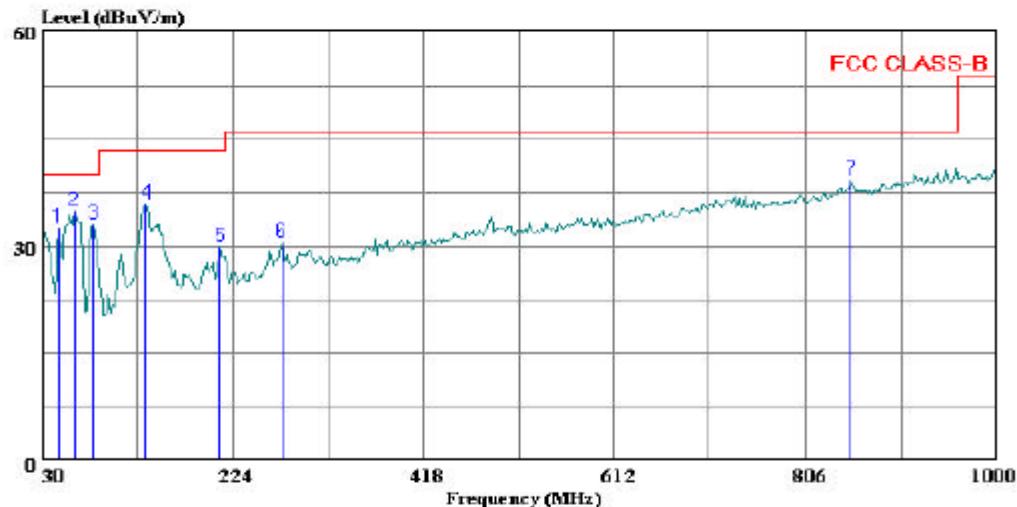

(Audix ATC)

Trace: 11

Ref Trace:

Condition: FCC CLASS-B VERTICAL  
Test Operator: : Chin Pang  
Project #: : 04U3022-1  
Company: : Tropos Networks  
BUT: : 802.11b/g Outdoor Wi-Fi Cellular Base  
: Station  
Model No: : TROPOS 5210  
Configuration: : EUT/ 12 dBi Sector antenna  
Target of Test: : FCC Class B  
Mode of Operation: b mode, Tx, ( Worst Case )

## VERTICAL DATA

Page: 1

Freq	Remark	Read	Factor	Limit	Over	
		Level		Line		Limit
MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	46.490 Peak	19.93	12.68	32.61	40.00	-7.39
2	62.980 Peak	25.41	9.47	34.88	40.00	-5.12
3	82.380 Peak	23.45	9.60	33.05	40.00	-6.95
4	135.730 Peak	20.14	15.76	35.90	43.50	-7.60
5	211.390 Peak	16.63	13.22	29.85	43.50	-13.65
6	274.440 Peak	14.97	15.64	30.61	46.00	-15.39
7	851.590 Peak	13.27	25.89	39.16	46.00	-6.84

### 7.3. POWERLINE CONDUCTED EMISSIONS

#### LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 <sup>*</sup>	56 to 46 <sup>*</sup>
0.5-5	56	46
5-30	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


Line conducted data is recorded for both NEUTRAL and HOT lines.


#### RESULTS

No non-compliance noted:

**6 WORST EMISSIONS**


CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Closs (dB)	Limit QP	EN_B AV	Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)				QP (dB)	AV (dB)	
0.26	56.86	--	43.52	0.00	62.80	52.80	-5.94	-9.28	L1
0.39	51.86	--	36.34	0.00	59.06	49.06	-7.20	-12.72	L1
26.84	50.58	--	34.44	0.00	60.00	50.00	-9.42	-15.56	L1
0.26	58.04	--	44.24	0.00	62.80	52.80	-4.76	-8.56	L2
0.39	51.88	--	37.00	0.00	59.06	49.06	-7.18	-12.06	L2
9.50	46.00	--	35.56	0.00	60.00	50.00	-14.00	-14.44	L2
6 Worst Data									

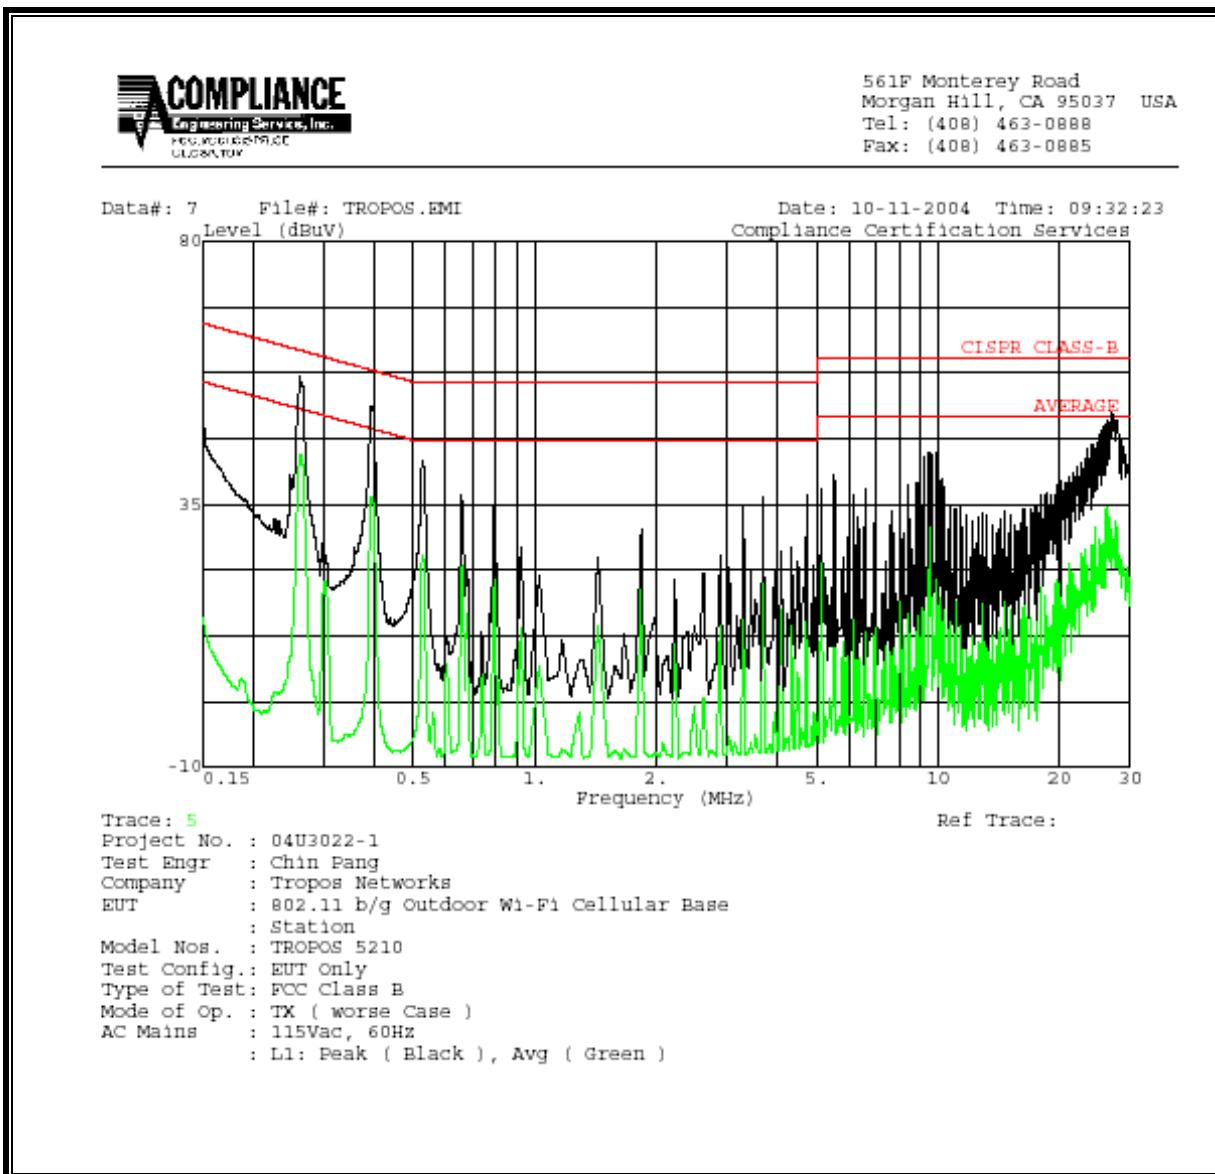**LINE 1 RESULTS**

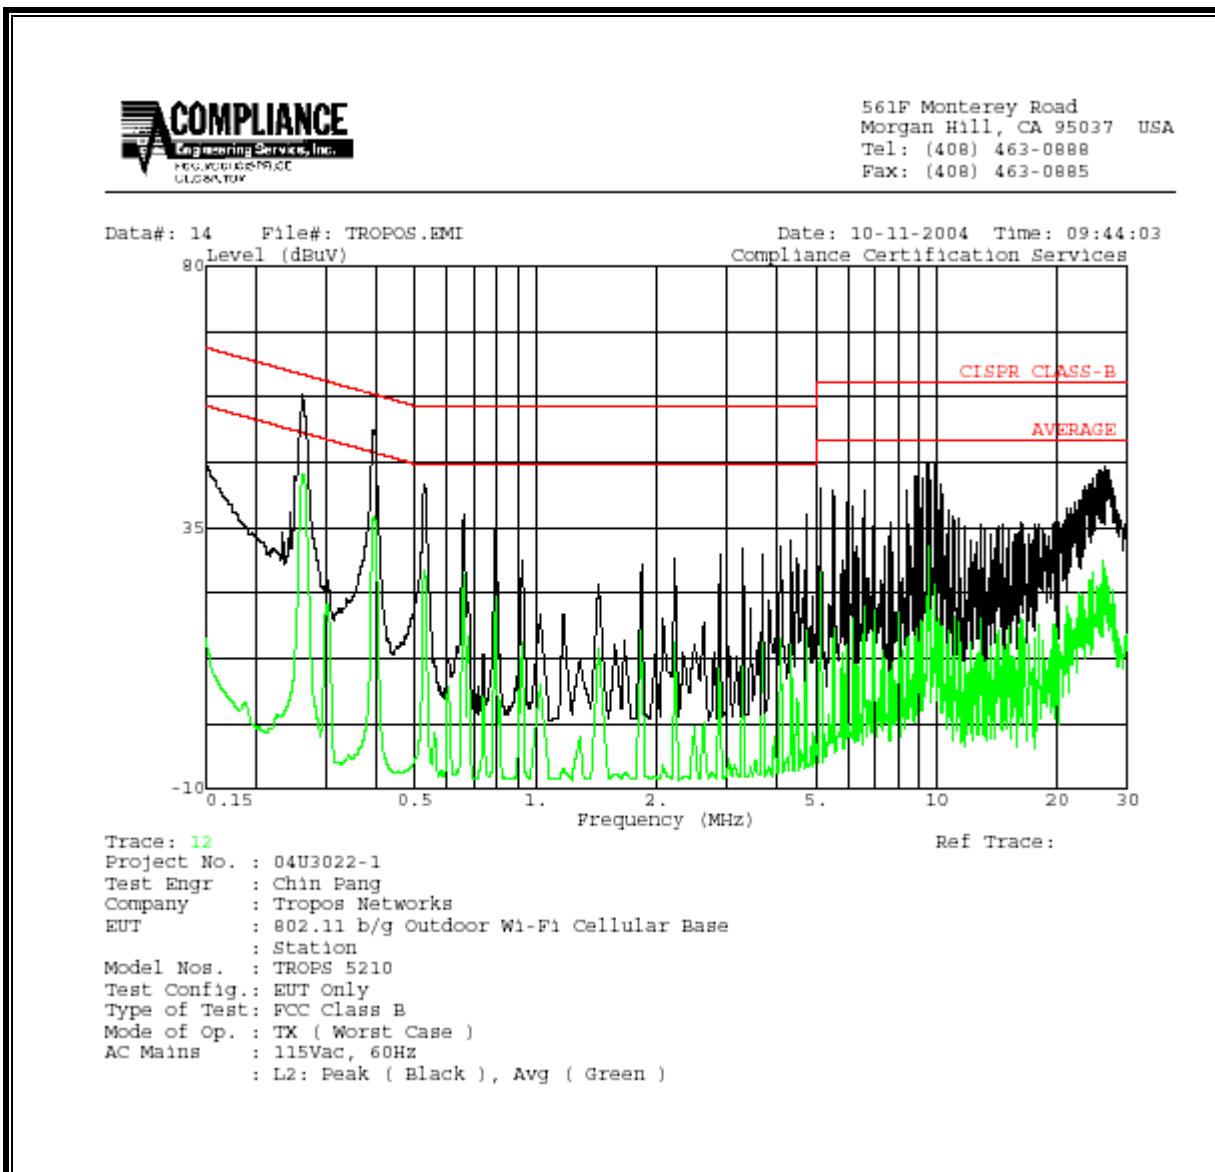**LINE 2 RESULTS**

## 8. SETUP PHOTOS

### ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

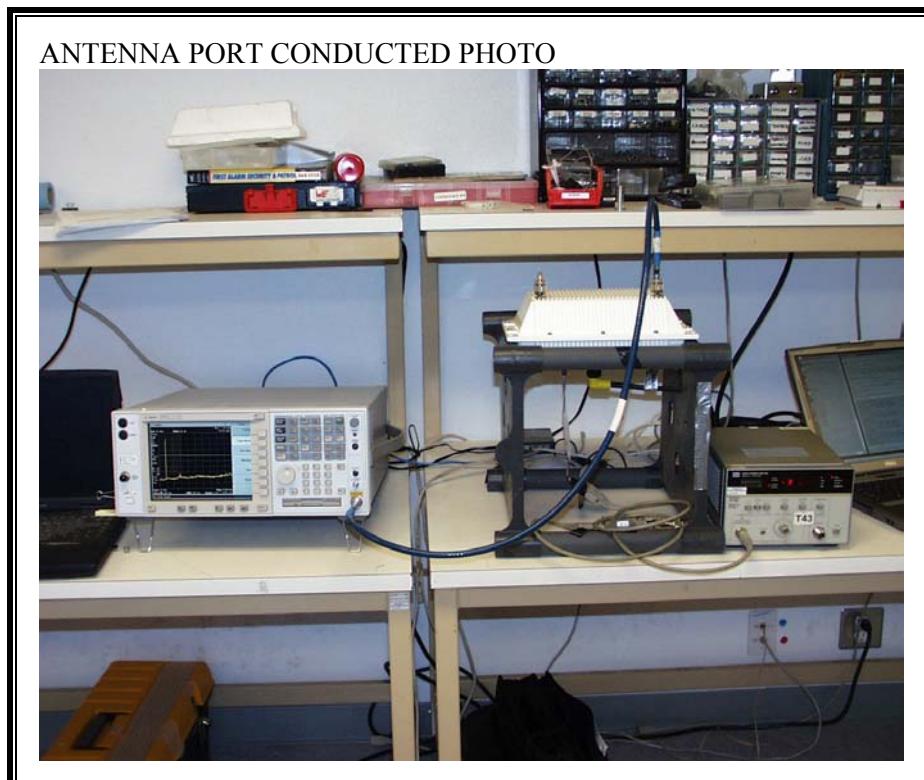


**RADIATED RF MEASUREMENT SETUP 7.4dBi OMNI ANTENNA**

RADIATED FRONT PHOTO



RADIATED BACK PHOTO

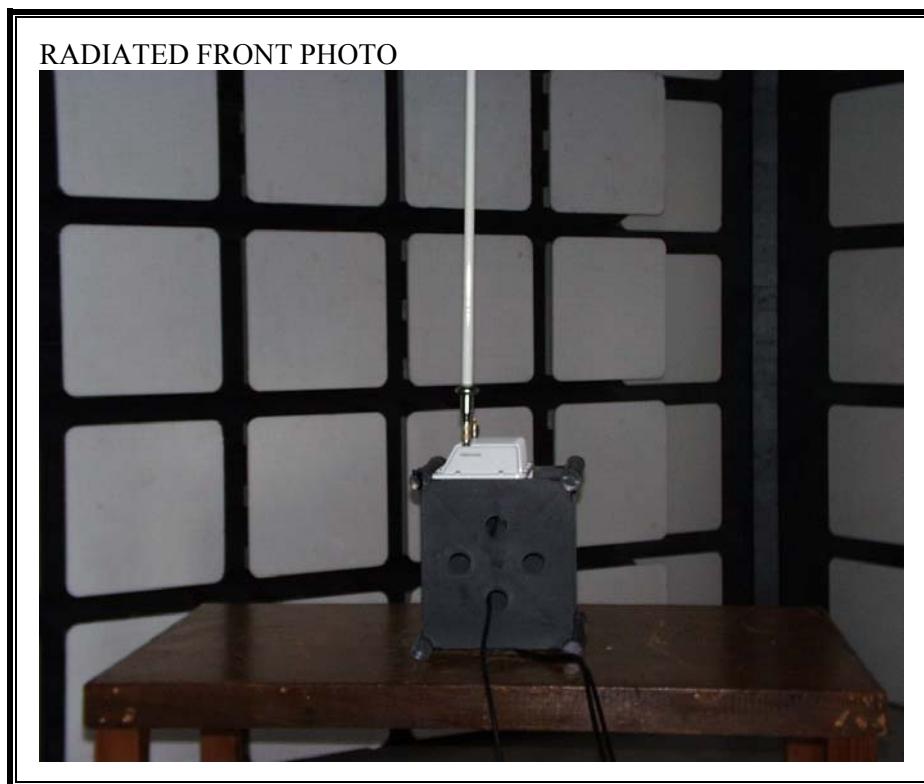

**RADIATED RF MEASUREMENT SETUP 12dBi OMNI ANTENNA**

RADIATED BACK PHOTO




**RADIATED RF MEASUREMENT SETUP 124dBi SECTOR ANTENNA**

RADIATED FRONT PHOTO




RADIATED BACK PHOTO

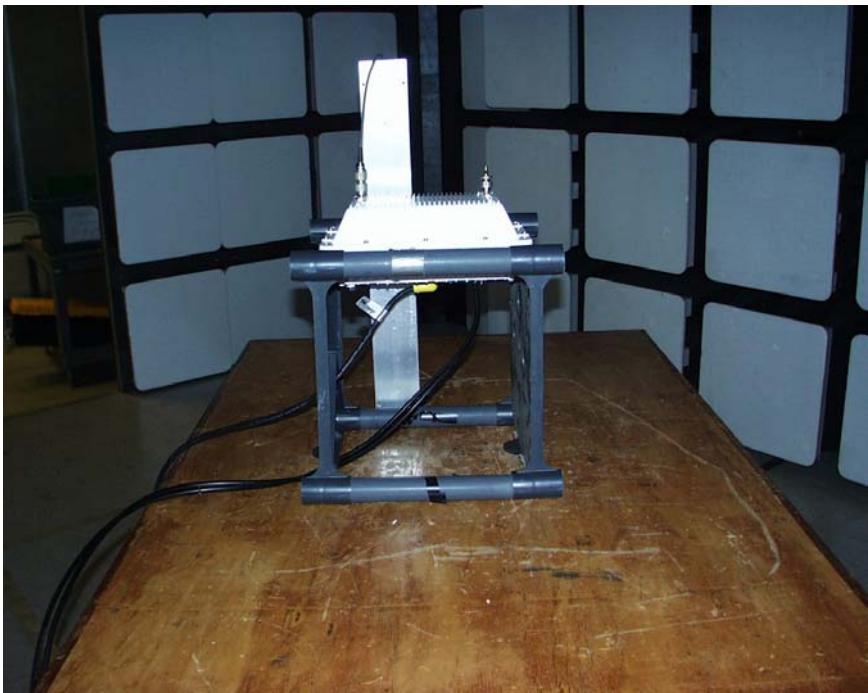

**POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP**

LINE CONDUCTED FRONT PHOTO

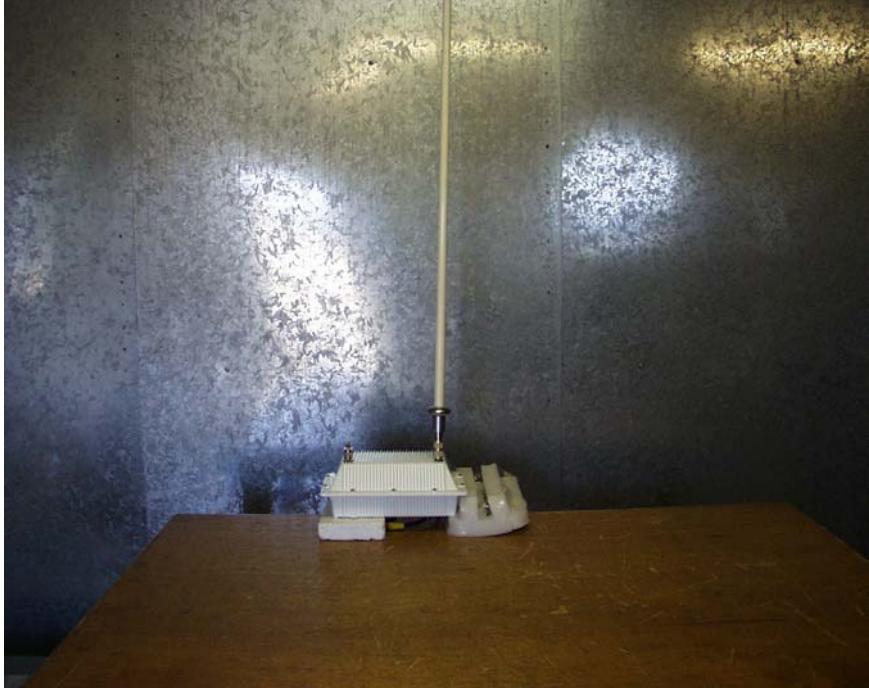

LINE CONDUCTED BACK PHOTO

**END OF REPORT**