



FCC CFR47 PART 15 CERTIFICATION

TEST REPORT

FOR

802.11b WIRELESS ACCESS POINT

MODEL: WMR530-01-00BC-C-N-XX

FCC ID: P9JWMR530-01-00BC

REPORT NUMBER: 02U1263-1

ISSUE DATE: MAY 14, 2002

Prepared for
FHP WIRELESS INC.
1710 SOUTH AMPHLETT BOULEVARD
SAN MATEO, CA 94402
USA

Prepared by
COMPLIANCE CERTIFICATION SERVICES
561 F MONTEREY ROAD
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888

TABLE OF CONTENT

| | |
|---|-----------|
| 1. TEST RESULT CERTIFICATION..... | 3 |
| 2. EUT DESCRIPTION..... | 4 |
| 3. TEST METHODOLOGY..... | 4 |
| 4. TEST FACILITY..... | 4 |
| 5. ACCREDITATION AND LISTING..... | 4 |
| 5.1. LABORATORY ACCREDITATIONS AND LISTINGS | 5 |
| 6. CALIBRATION AND UNCERTAINTY..... | 6 |
| 6.1. MEASURING INSTRUMENT CALIBRATION..... | 6 |
| 6.2. MEASUREMENT UNCERTAINTY..... | 6 |
| 6.3. TEST AND MEASUREMENT EQUIPMENT | 7 |
| 7. SUPPORT EQUIPMENT / EUT SETUP..... | 7 |
| 8. APPLICABLE RULES AND BRIEF TEST RESULT..... | 10 |
| 9. TEST SETUP, PROCEDURE AND RESULT..... | 15 |
| 9.1. PEAK POWER OUTPUT | 15 |
| 9.2. 6 dB BANDWIDTH MEASUREMENT..... | 22 |
| 9.3. CONDUCTED SPURIOUS EMISSION..... | 29 |
| 9.4. PEAK POWER SPECTRAL DENSITY..... | 36 |
| 9.5. PROCESSING GAIN | 43 |
| 9.6. RESTRICTED BAND EDGE MEASUREMENT..... | 44 |
| 9.7. RADIATED EMISSION..... | 49 |
| 9.7.1. RADIATED EMISSION AND RESTRICTED BANDS..... | 49 |
| 9.8. POWER LINE CONDUCTED EMISSION..... | 57 |
| 9.9. SETUP PHOTOS | 59 |

1. TEST RESULT CERTIFICATION

COMPANY NAME: FHP WIRELESS INC.
1710 SOUTH AMPHLETT BOULEVARD
SAN MATEO, CA 94402 USA

CONTACT PERSON: THOMAS BLAIS / DIRECTOR OF HARDWARE ENGINEER

TELEPHONE NO: (650) 655-4979

EUT DESCRIPTION: 802.11B WIRELESS ACCESS POINT

MODEL NUMBER: WMR530-01-00BC-C-N-XX

DATE TESTED: APRIL 24 – MAY 8, 2002

| | |
|-----------------------|-------------------------------|
| TYPE OF EQUIPMENT | INTENTIONAL RADIATOR |
| EQUIPMENT TYPE | 2.4GHz TRANSCEIVER |
| MEASUREMENT PROCEDURE | ANSI 63.4 / 1992, TIA/EIA 603 |
| PROCEDURE | CERTIFICATION |
| FCC RULE | CFR 47 PART 15 Subpart C |

Compliance Certification Services, Inc. tested the above equipment for compliance with the requirement set forth in CFR 47, PART 15 Subpart C. The equipment in the configuration described in this report, shows the measured emission levels emanating from the equipment do not exceed the specified limit.


Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:



MIKE HECKROTTE
CHIEF EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

Tested By:



KERWIN CORPUZ
ASSOCIATE EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. EUT DESCRIPTION

The SmartPoint is a Direct Sequence Spread Spectrum 802.11b wireless access point with mesh routing capabilities. Unlike conventional access point deployments, which require a wired backbone, FHP's technology can be used to create large networks with wired connections to only a few of the access points. Units without wired connections will automatically detect other SmartPoints and wirelessly route data traffic through the optimal multihop path back to a wired SmartPoint. There are two antennas on the unit, for both transmit and receive diversity. Both antennas are identical externally mounted OMNI with 7.4 dBi gain for each antenna. Additional antenna is a OMNI with 1.5 dBi gain.

3. TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures documented on chapter 13 of ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057.

4. TEST FACILITY

The open area test sites and conducted measurement facilities used to collect the radiated data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5. ACCREDITATION AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200065-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (reference no: 31040/SIT (1300B3) and 31040/SIT (1300F2))

5.1. Laboratory Accreditations and Listings

| Country | Agency | Scope of Accreditation | Logo |
|---------|-----------------|---|--|
| USA | NVLAP* | FCC Part 15, CISPR 22, AS/NZS 3548, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11, CNS 13438 |  200065-0 |
| USA | FCC | 3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements |  1300 |
| Japan | VCCI | CISPR 22 Two OATS and one conducted Site |  R-1014, R-619, C-640 |
| Norway | NEMKO | EN50081-1, EN50081-2, EN50082-1, EN50082-2, IEC61000-6-1, IEC61000-6-2, EN50083-2, EN50091-2, EN50130-4, EN55011, EN55013, EN55014-1, EN55104, EN55015, EN61547, EN55022, EN55024, EN61000-3-2, EN61000-3-3, EN60945, EN61326-1 |  ELA 117 |
| Norway | NEMKO | EN60601-1-2 and IEC 60601-1-2, the Collateral Standards for Electro-Medical Products. MDD, 93/42/EEC, AIMD 90/385/EEC |  ELA-171 |
| Taiwan | BSMI | CNS 13438 |  SL2-IN-E-1012 |
| Canada | Industry Canada | RSS210 Low Power Transmitter and Receiver |  IC2324 A,B,C, and F |

*No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government

6. CALIBRATION AND UNCERTAINTY

6.1. Measuring Instrument Calibration

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

6.2. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Radiated Emission | |
|--------------------------------------|-------------|
| 30MHz – 200 MHz | +/- 3.3dB |
| 200MHz – 1000MHz | +4.5/-2.9dB |
| 1000MHz – 2000MHz | +4.6/-2.2dB |
| Power Line Conducted Emission | |
| 150kHz – 30MHz | +/-2.9 |

Any results falling within the above values are deemed to be marginal.

6.3. Test and Measurement Equipment


The following test and measurement equipment was utilized for the tests documented in this report:

| TEST AND MEASUREMENT EQUIPMENT LIST | | | | |
|-------------------------------------|-----------------------------|------------------|---------------|----------------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due Date |
| Spectrum Analyzer | HP | 8593EM | 3710A00205 | 6/20/02 |
| Preamplifier | HP | 8447D | 2944A06589 | 8/10/02 |
| Bilog Antenna | Chase | CBL6112B | 2586 | 8/2/02 |
| Line Filter | Lindgren | LMF-3489 | 497 | N.C.R. |
| LISN | Fisher Custom Communication | LISN-50/250-25-2 | 2023 | 8/2/02 |
| EMI Test Receiver | Rohde & Schwarz | ESHS 20 | 827129/006 | 4/17/03 |
| Preamplifier (1 - 26.5GHz) | MITEQ | NSP2600-44 | 646456 | 4/26/03 |
| Horn Antenna (1 - 18GHz) | EMCO | 3115 | 6739 | 1/31/03 |
| Horn Antenna (18 - 26GHz) | Antenna Research Associates | MWH 1826/B | 1013 | 7/26/02 |
| High Pass Filter (4.57GHz) | FSY Microwave | FM-4570-9SS | 003 | N.C.R. |


7. SUPPORT EQUIPMENT / EUT SETUP

The following peripheral support equipment was utilized to operate the equipment under test:

| PERIPHERAL SUPPORT EQUIPMENT LIST | | | | |
|-----------------------------------|--------------|-------------------|---------------|--------|
| Device Type | Manufacturer | Model | Serial Number | FCC ID |
| PC Laptop | Toshiba | P/N:PS170U-0008YH | 1128878CU-1 | DoC |
| | | | | |

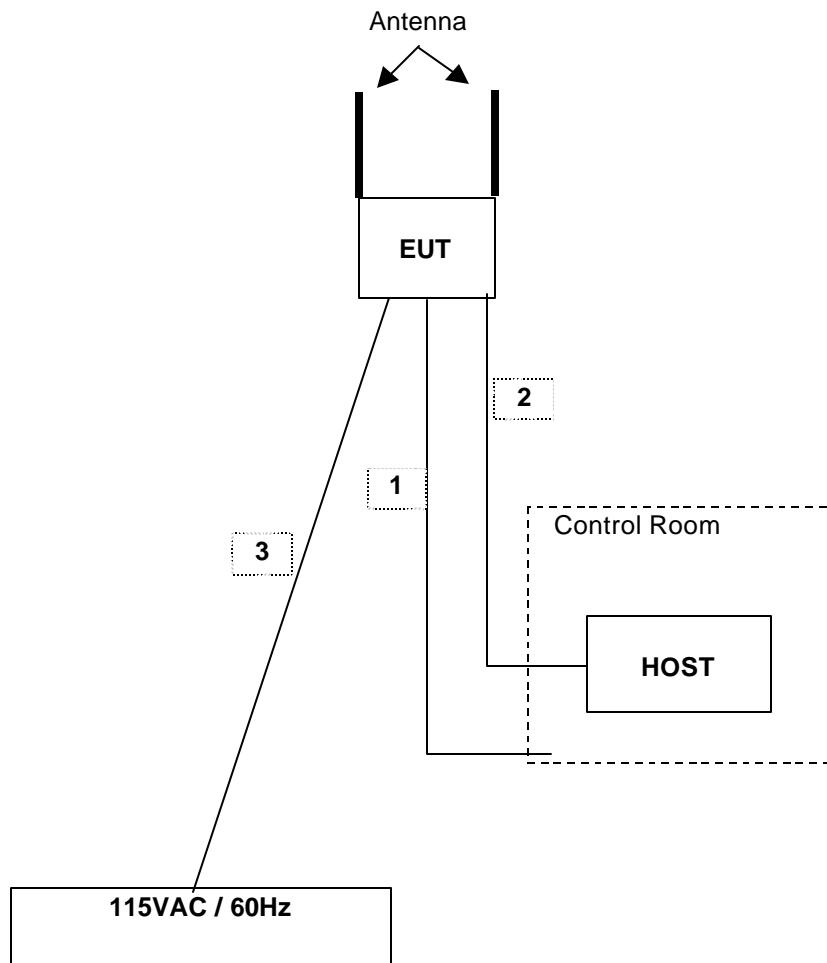

SETUP BELOW 1 GHz TEST

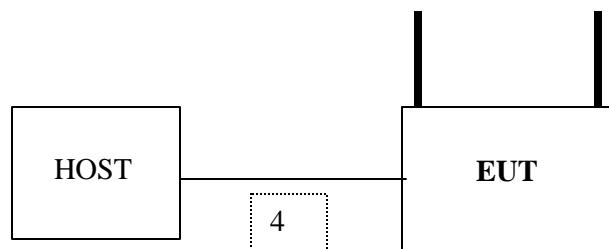

SETUP ABOVE 1 GHz TEST

I/O CABLES

| TEST I/O CABLES | | | | | | | | |
|-----------------|------------|---------------|----------------|---------------|--------------|--------------|---------|---------------------------------|
| Cable No | I/O Port | # of I/O Port | Connector Type | Type of Cable | Cable Length | Data Traffic | Bundled | Remark |
| 1 | LAN | 1 | RJ45 | Shielded | 30m | No | No | Dummy Cable |
| 2 | Management | 1 | RJ45 | Shielded | 30m | Yes | No | N/A |
| 3 | AC/DC | 1 | DC type | Un-shielded | 2m | No | Yes | Ferrite Core at DC connector |
| 4 | Management | 1 | RJ45 | Un-shielded | 1.5m | Yes | No | use above 1GHz measurement only |

8. APPLICABLE RULES AND BRIEF TEST RESULT

§15.247 (a) (2) - BANDWIDTH LIMITATION

(a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

Spec limit: > 500 kHz.

Test result: No non-compliance noted.

| Antenna Port | Frequency (MHz) | Bandwidth (MHz) |
|--------------|-----------------|-----------------|
| R (right) | 2412 | 9.92 |
| R (right) | 2437 | 9.82 |
| R (right) | 2462 | 9.86 |
| L (left) | 2412 | 9.94 |
| L (left) | 2437 | 9.88 |
| L (left) | 2462 | 9.86 |

§15.247 (b) (1) - POWER OUTPUT

(b) The maximum peak output power of the intentional radiator shall not exceed the following:
(1) For frequency hopping systems operating in the 2400-2483.5 MHz or 5725-5850 MHz band, and all direct sequence systems: 1 watt.

Spec limit: As specified above, 1W maximum.

Test result: No non-compliance noted.

Peak Power = measured power + 10logB; where B is measured bandwidth

| Antenna Port | Frequency (MHz) | Peak Power (watts) |
|--------------|-----------------|--------------------|
| R (right) | 2412 | 0.0718 (18.56 dBm) |
| R (right) | 2437 | 0.0798 (19.02 dBm) |
| R (right) | 2462 | 0.0682 (18.34 dBm) |
| L (left) | 2412 | 0.0571 (17.57 dBm) |
| L (left) | 2437 | 0.0638 (18.04 dBm) |
| L (left) | 2462 | 0.0542 (17.34 dBm) |

§15.247 (c) – SPURIOUS EMISSION

(c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test result: No non-compliance noted. See section 9.5 and 9.7.

§15.247 (d) - PEAK POWER SPECTRAL DENSITY

(d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Spec limit: < 8dBm.

Test result: No non-compliance noted.

| Antenna Port | Frequency (MHz) | Results (dBm) |
|--------------|-----------------|---------------|
| R (right) | 2412 | -8.90 |
| R (right) | 2437 | -8.70 |
| R (right) | 2462 | -9.40 |
| L (left) | 2412 | -10.2 |
| L (left) | 2437 | -9.80 |
| L (left) | 2462 | -10.4 |

§15.247 (e) - PROCESSING GAIN

(e) The processing gain of a direct sequence system shall be at least 10 dB.

Spec limit: >10 dBm.

Test result: No non-compliance noted.

§15.205- RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

Spec limit: As specified above,

Test result: No non-compliance noted. See section 9.7 Radiated Emission.

§15.207- CONDUCTED LIMITS

(a) For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 450 kHz to 30 MHz shall not exceed 250 microvolts. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

FCC 15.207

| FREQUENCY RANGE | FIELD STRENGTH (Microvolts) | FIELD STRENGTH (dBuV)/QP |
|-----------------|--------------------------------|-----------------------------|
| 450kHz-30MHz | 250 | 48 |

Spec limit: As specified above.

Test result: No non-compliance noted.

§15.209- RADIATED EMISSION LIMITS; GENERAL REQUIREMENTS

(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (micro volts/meter) | Measurement Distance (meters) |
|--------------------|---------------------------------------|----------------------------------|
| 30 - 88 | 100 ** | 3 |
| 88 - 216 | 150 ** | 3 |
| 216 - 960 | 200 ** | 3 |
| Above 960 | 500 | 3 |

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(b) In the emission table above, the tighter limit applies at the band edges.

FCC PART 15.209

| MEASURING DISTANCE OF 3 METER | | |
|-------------------------------|----------------------------------|----------------------------|
| FREQUENCY RANGE (MHz) | FIELD STRENGTH (Microvolts/m) | FIELD STRENGTH (dBuV/m) |
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |


Spec limit: As specified above.

Test result: No non-compliance noted.

9. TEST SETUP, PROCEDURE AND RESULT

9.1. PEAK POWER OUTPUT

TEST SETUP



TEST PROCEDURE

The EUT is configured on a test bench as shown above in a continuously transmitting mode. For each channel measured, the highest reading is corrected for the emissions bandwidth of that channel to yield the peak power.


RESULT

No non-compliance noted. See plots below.


Peak Power = measured reading + 10 log (B), B as measured in Section 9.2.

| Antenna Port | Frequency (MHz) | B (MHz) | Peak Power |
|--------------|-----------------|---------|----------------------|
| R (right) | 2412 | 9.92 | 0.0718 W (18.56 dBm) |
| R (right) | 2437 | 9.82 | 0.0798 W (19.02 dBm) |
| R (right) | 2462 | 9.86 | 0.0682 W (18.34 dBm) |
| L (left) | 2412 | 9.94 | 0.0571 W (17.57 dBm) |
| L (left) | 2437 | 9.88 | 0.0638 W (18.04 dBm) |
| L (left) | 2462 | 9.86 | 0.0542 W (17.34 dBm) |


LOW ANTENNA-RIGHT

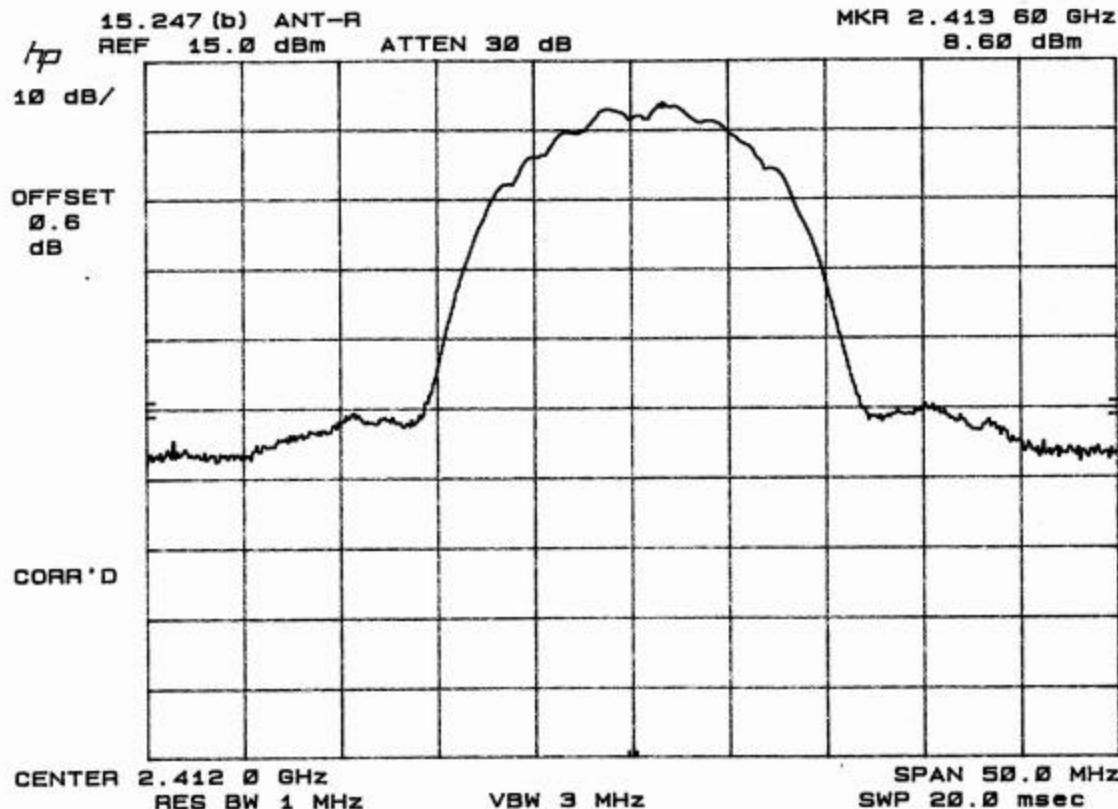


MID ANTENNA-RIGHT

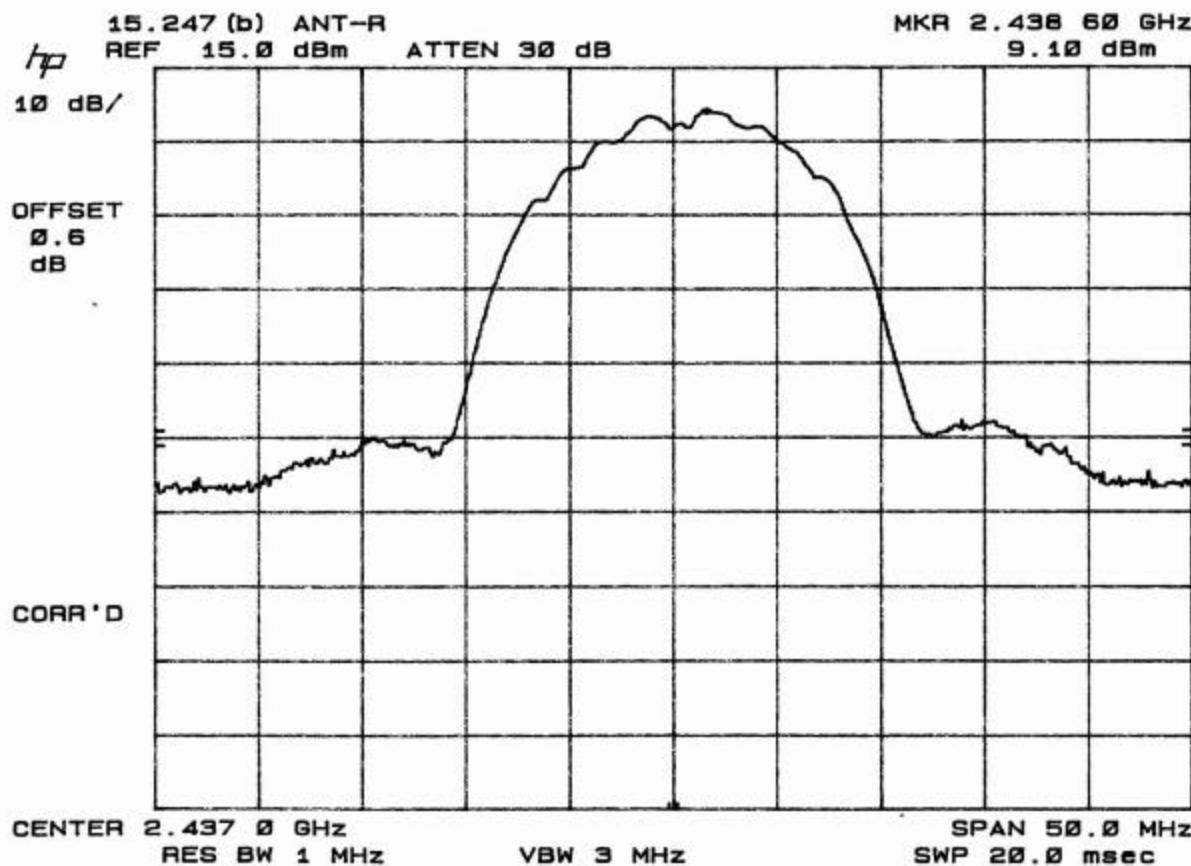


HIGH ANTENNA-RIGHT

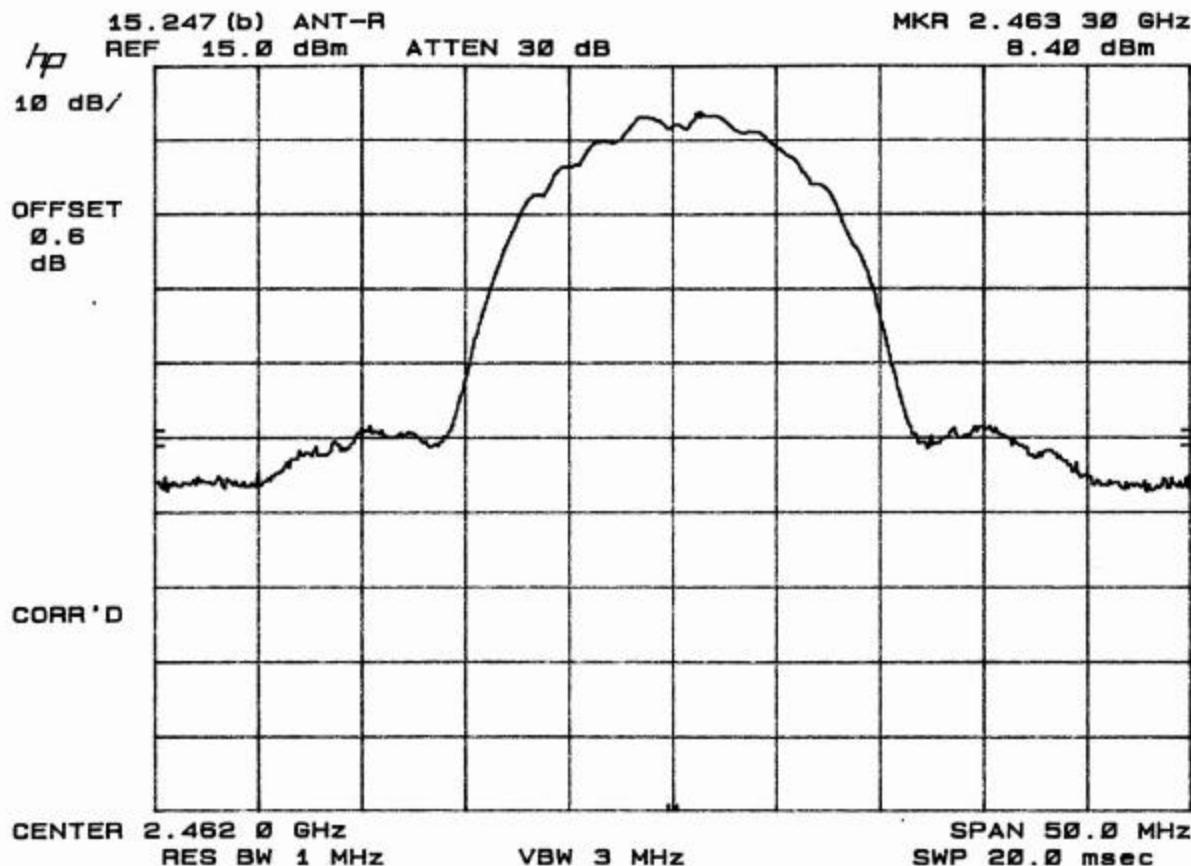


LOW ANTENNA-LEFT

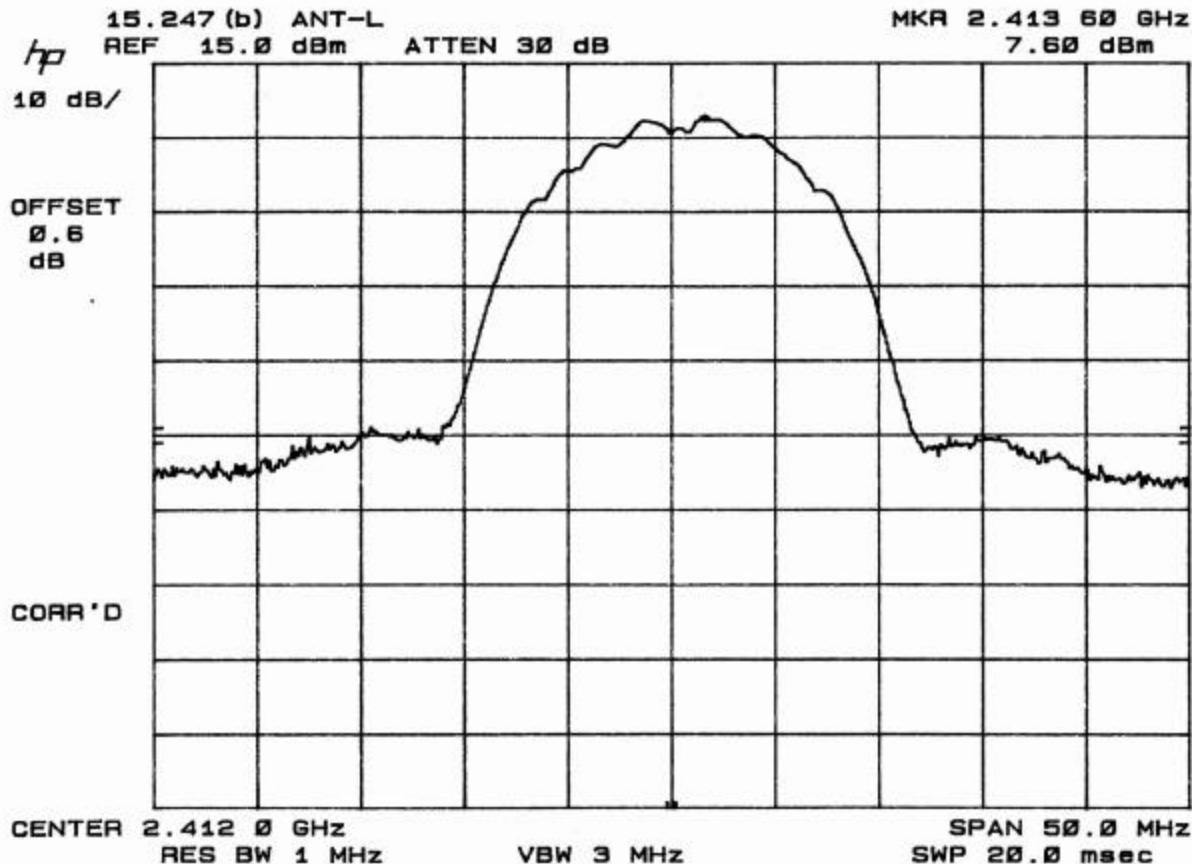

MID ANTENNA-LEFT

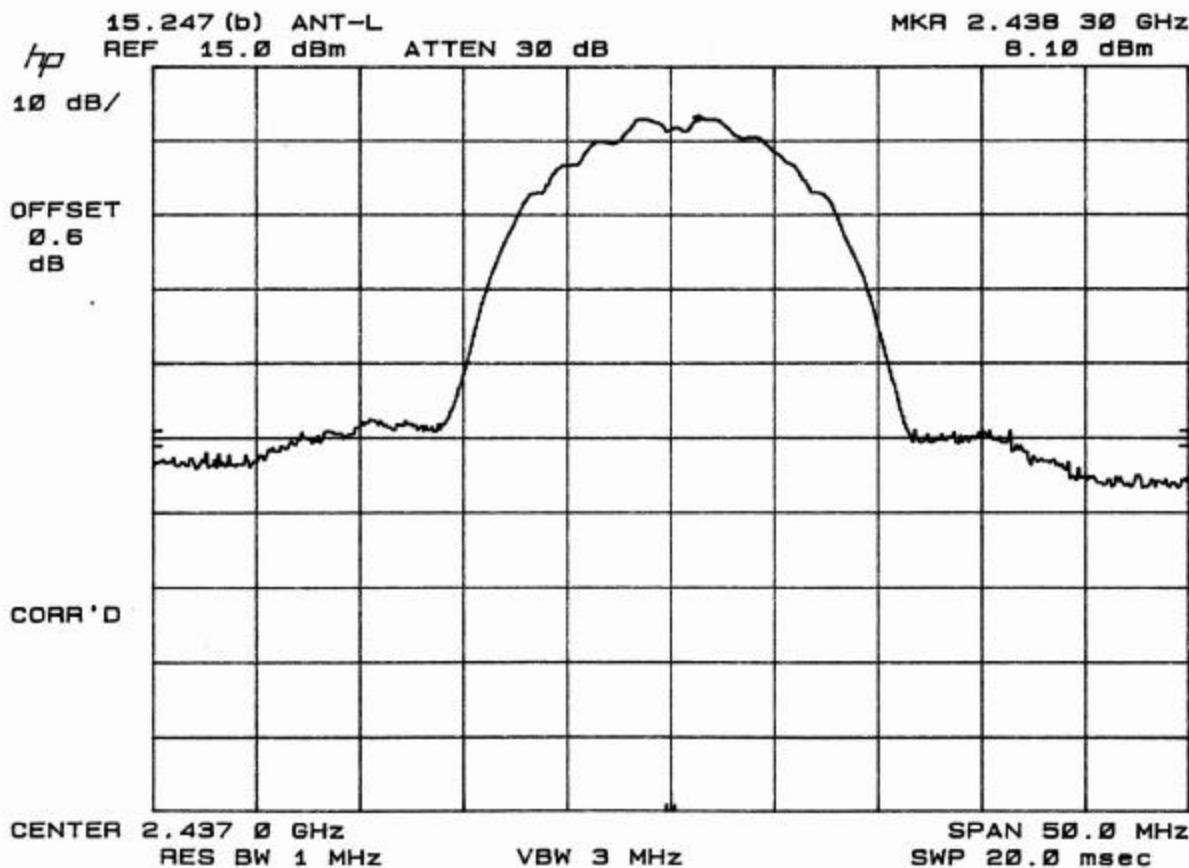

HIGH ANTENNA LEFT

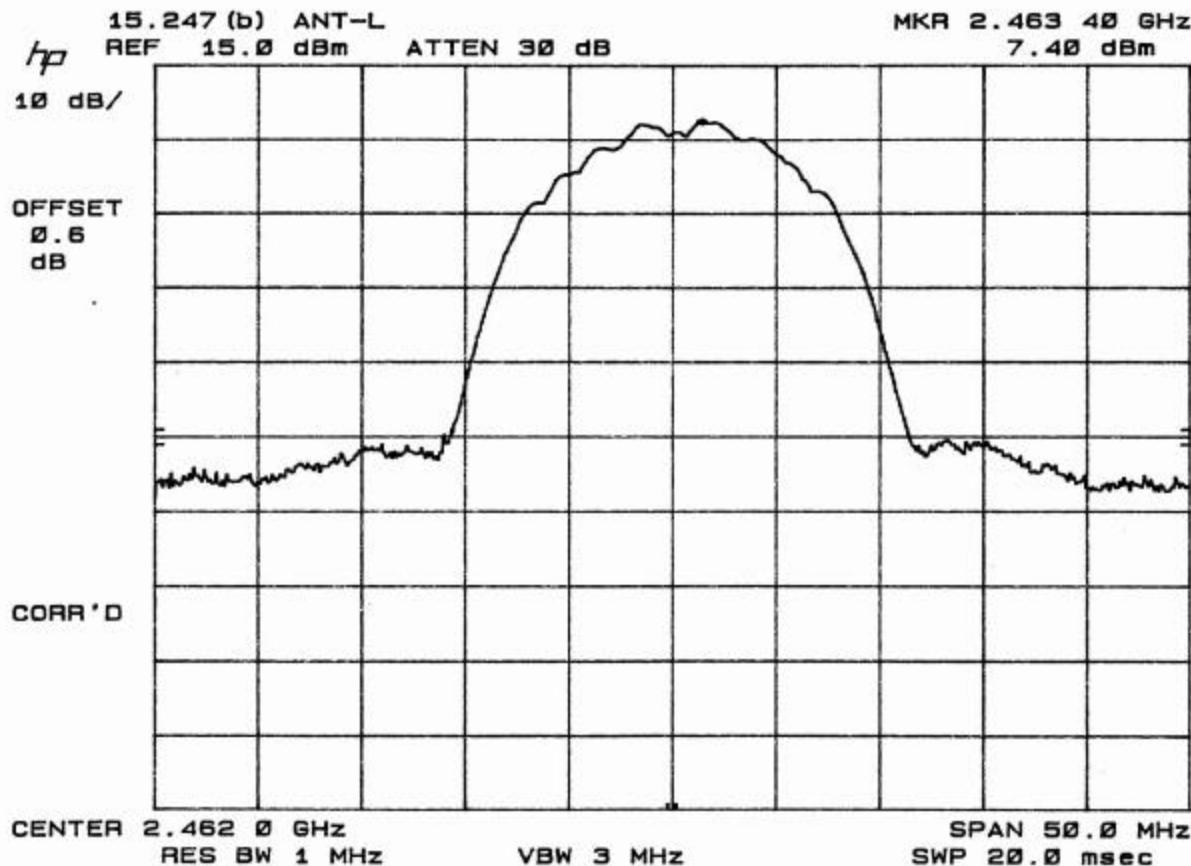


9.2. 6 dB BANDWIDTH MEASUREMENT

TEST SETUP

Detector Function Setting of Test Receiver

| Frequency Range (MHz) | Detector Function | Resolution Bandwidth | Video Bandwidth |
|-----------------------|--|---|---|
| Above 1000 | <input checked="" type="checkbox"/> Peak | <input checked="" type="checkbox"/> 100 kHz | <input checked="" type="checkbox"/> 100 kHz |




TEST PROCEDURE

The EUT transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW.


RESULT

No non-compliance noted. See plots below.


ANTENNA-R LOW CHANNEL

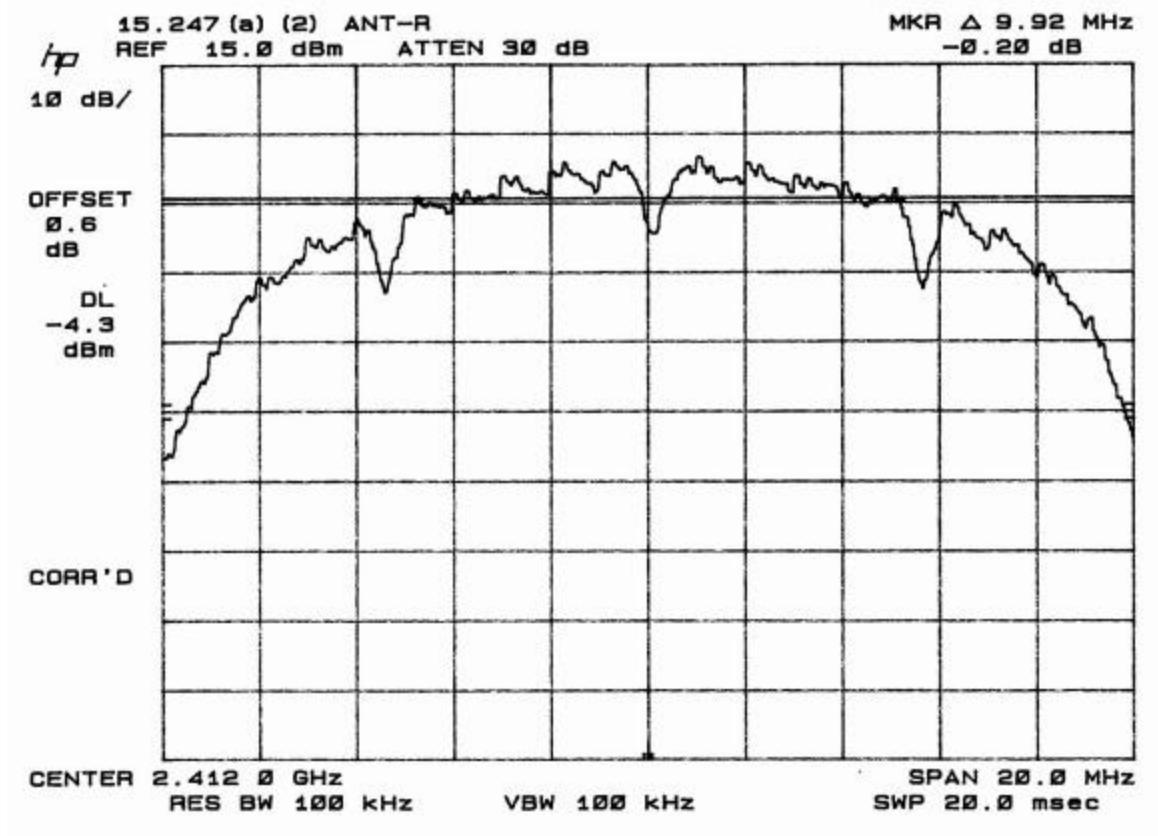


ANTENNAT-R MID CHANNEL

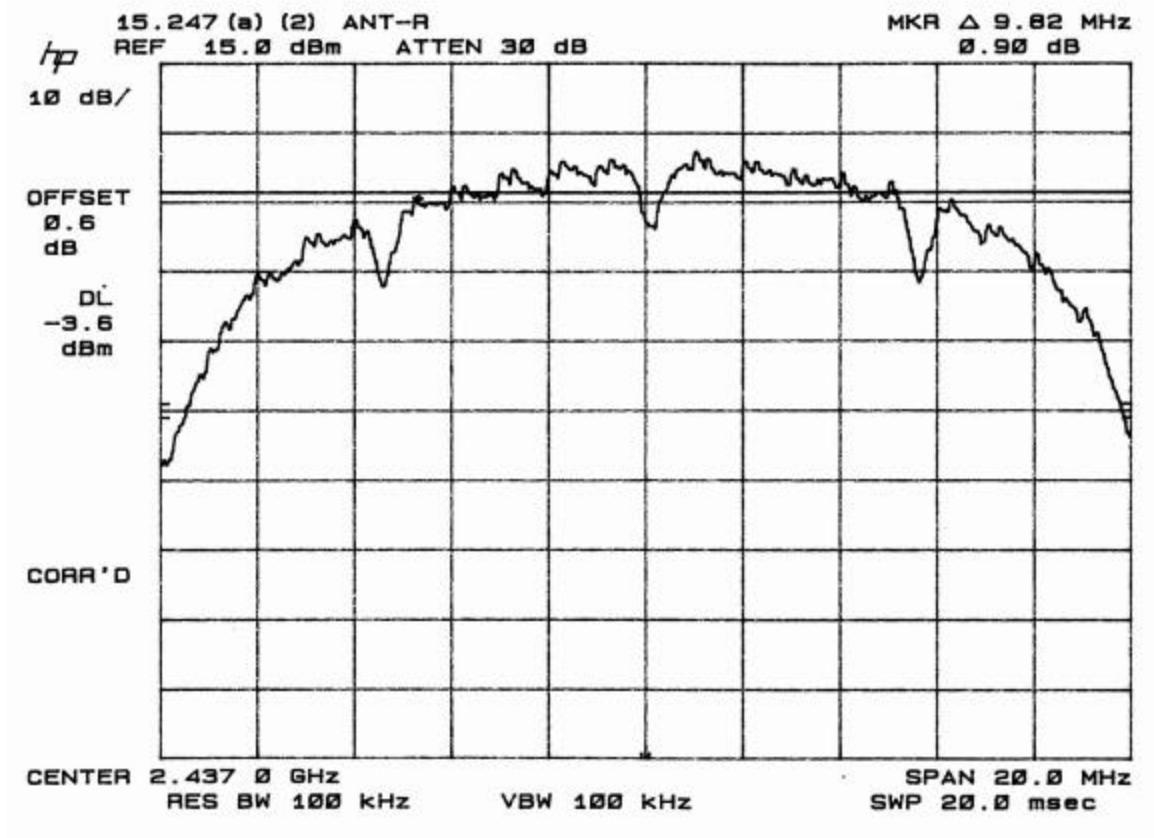


ANTENNA-R HIGH CHANNEL

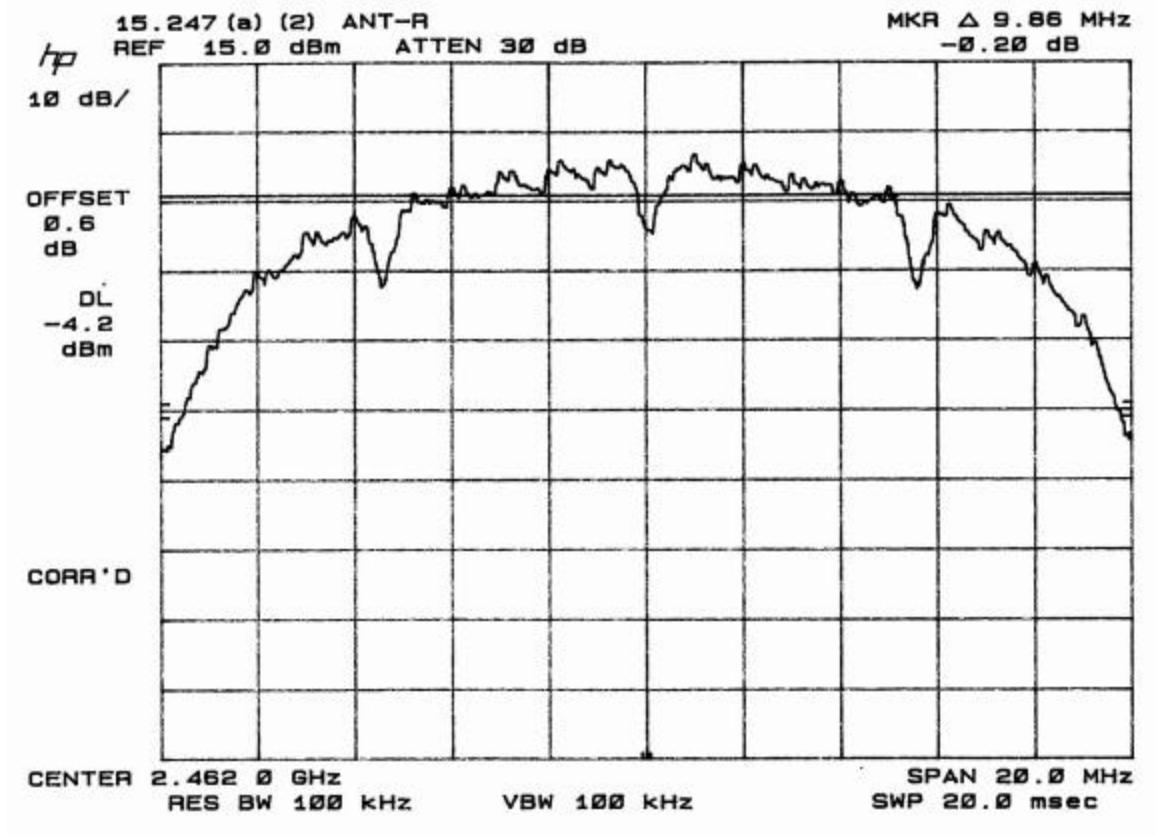


ANTENNA-L LOW CHANNEL

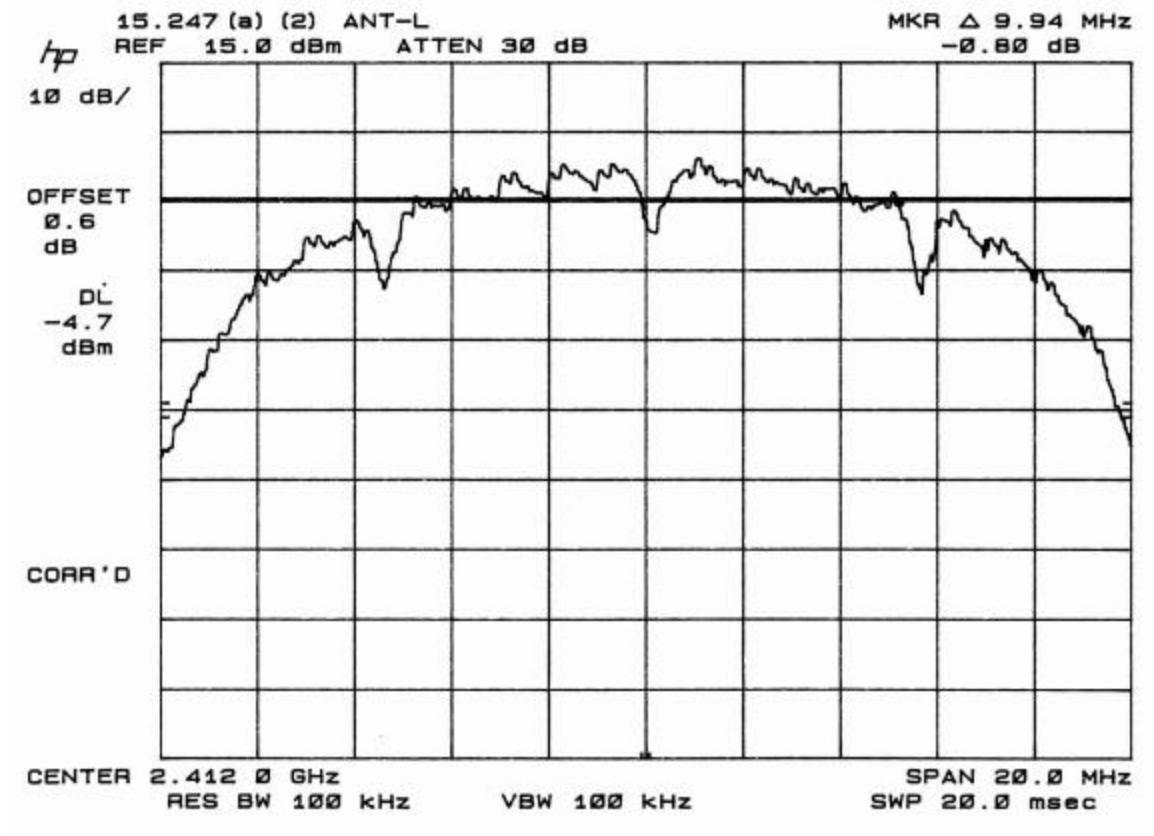

ANTENNA-L MID CHANNEL

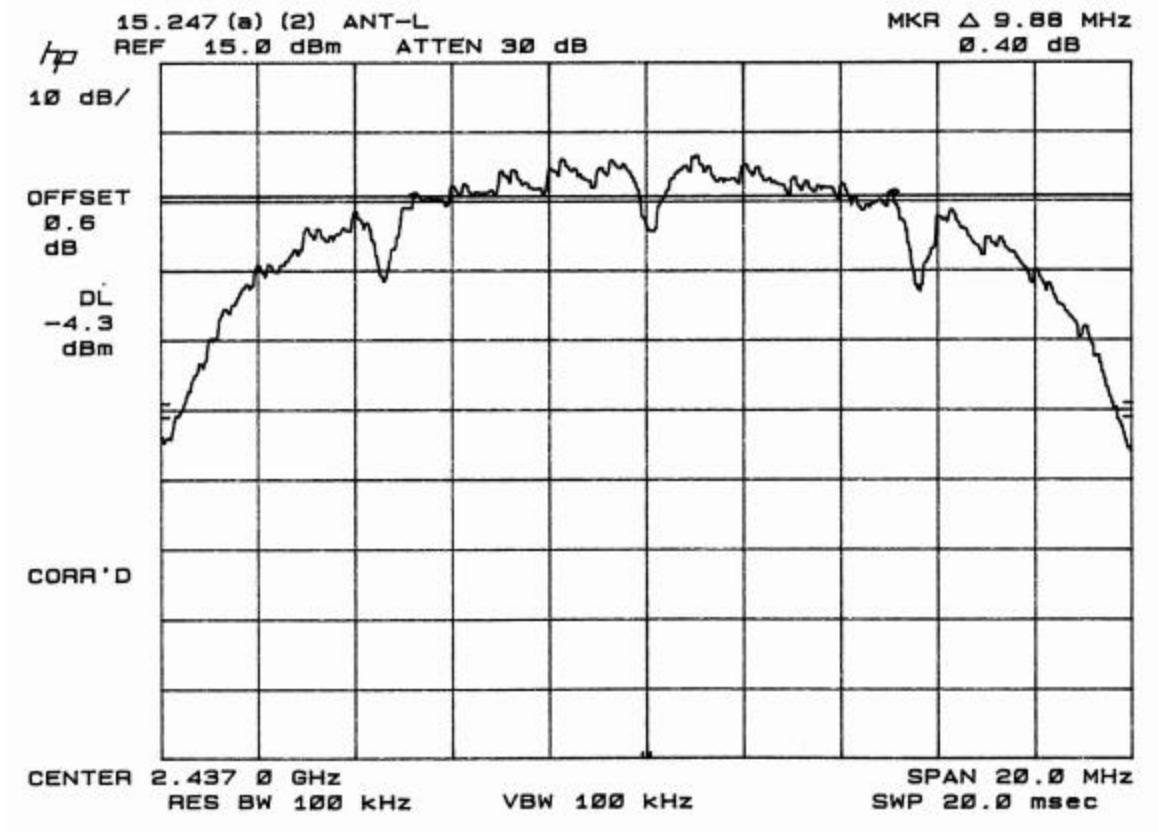

ANTENNA-L HIGH CHANNEL

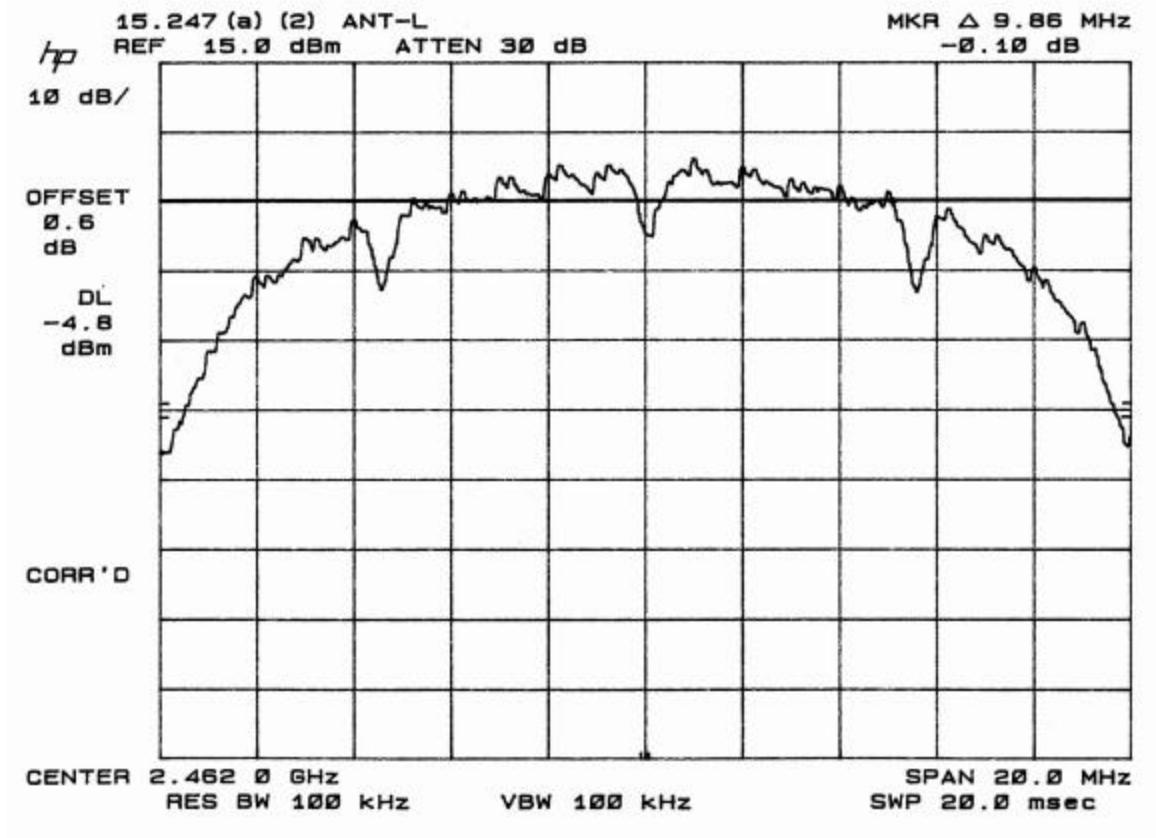


9.3. CONDUCTED SPURIOUS EMISSION

TEST SETUP

Detector Function Setting of Test Receiver

| Frequency Range (MHz) | Detector Function | Resolution Bandwidth | Video Bandwidth |
|-----------------------|--|---|---|
| 30 - 24000 | <input checked="" type="checkbox"/> Peak | <input checked="" type="checkbox"/> 100 kHz | <input checked="" type="checkbox"/> 100 kHz |



TEST PROCEDURE

Connect the Eut's antenna port to the Spectrum Analyzer's input port.
Investigate the entire frequency of the carrier frequency, up to the tenth harmonic.

RESULT

No non-compliance noted. See below plots for ANTENNA-R and L; LOW, MID, HIGH channels.

ANTENNA-R LOW CHANNEL

