

ALTAIR iD DOCK
Test stand

MSA
The Safety Company

SSSSSSSSSSSSSSSS YYYYY/MM KKKKKK

SN KEY

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This Class A digital apparatus complies with Canadian ICES-003.

Temperature Range 10°C to 35°C (50°F to 95°F)
USE ONLY MSA POWER MODULE 10216495.
Cranberry Twp, Pennsylvania U.S.A. 16066 Product of U.S. MSAafety.com

WARNING
Read and understand user instructions before use. Only use the ALTAIR iD DOCK in non-hazardous environments free of combustible concentrations of gases and vapors. Failure to follow these warnings can result in serious personal injury or death.

ALTAIR iD DOCK
Cylinder holder

MSA
The Safety Company

SSSSSSSSSSSSSSSS YYYYY/MM

FCC ID: P9R-10208141 IC: 324C-10208141 HVIN: 10208141


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This Class A digital apparatus complies with Canadian ICES-003, Receiver Class 3.

Cranberry Twp, Pennsylvania U.S.A. 16066 Product of U.S. MSAafety.com

WARNING
Read and understand user instructions before use. Only use the ALTAIR iD DOCK Cylinder holder in non-hazardous environments free of combustible concentrations of gases and vapors. Failure to follow these warnings can result in serious personal injury or death.



Label Locations: Note each cylinder holder has its own label.

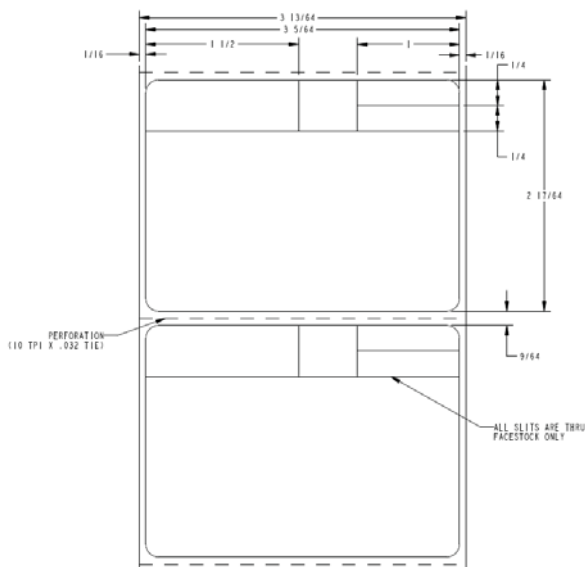

NOTES:

1. LABELS PER ROLL: 2625
ROLL LENGTH:
PRESS COUNT ACTUAL FT.
632 PC 527 FT.
2. UNWIND: OUTSIDE
SIZE OF ROLL: 7.9"
3. MATERIAL:
- WHITE POLYESTER, THERMAL TRANSFER (Z-ULTIMATE 3000)
- GLOSS FINISH
- PERMANENT PRESSURE SENSITIVE ACRYLIC ADHESIVE
4. SUPPLIERS AUTHORIZED IDENTIFICATION TO PRECEDE DATE/REVISION CODE AND TO BE CLEARLY MARKED ON OUTSIDE PACKAGE.