



ETS Dr.GenZ Taiwan PS Co., LTD.

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679

Accredited Testing Laboratory

A2LA Cert.No.: 2300.01

TEST - REPORT

FCC RULES PART 15 / SUBPART B

Test report no.: J10M20504-0003-P-15B

FCC

ETS DR.GENZ TAIWAN PS CO., LTD.

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU, TAIPEI 114, TAIWAN, R.O.C.

PHONE 886-2-66068877

FAX 886-2-66068879

TABLE OF CONTENTS

1	General Information	2
1.1	Notes	2
1.2	Tester	4
1.3	Testing laboratory	5
1.3.1	Location	5
1.3.2	Details of accreditation status	5
1.3.3	Test location, where different from ETS	5
1.4	Details of applicant	6
1.5	Application details	6
1.6	Test item	6
1.6.1	Description of test item	6
1.6.2	Manufacturer (if different from applicant in point 1.4)	7
1.6.3	Frequency behavior	7
1.7	Test standards	7
2	Technical test	8
2.1	Summary of test results	8
2.2	Test environment	8
2.3	Test equipment utilized	9
2.4	Test results	13
2.4.1	Conducted Emission	14
2.4.2	Radiated Emission	15
2.5	Test protocols	16
3	Normative references	23

Annex : Pictures and diagrams

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The tests were carried out and passed in accordance to the standards:

FCC part 15 : July 2003

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has Passed all the relevant tests conforms to a specification (only telecommunication products).

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.6.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the ETS DR.GENZ TAIWAN PS CO., LTD.



Important Notes:

Proper labeling is required for each device. Devices shall be labeled in accordance with labeling requirements pursuant to section 15.19 and section 2.1074 of the FCC rules.

Devices subject to a Declaration of Conformity shall be uniquely identified by the responsible party.

This identification shall not be of a format which could be confused with the FCC Identifier required on certified, notified type accepted or type approved equipment.

The responsible party shall maintain adequate identification records to facilitate positive identification for each device.

The user manual or instruction manual shall included also a warning statement that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Reference Section 15.21

Furthermore an information to the user regarding to the interference potential of the device and about simple measures that can be taken to correct interference is required.


Reference Section 15.105

The responsible party must warrant that each unit of equipment marketed under a Declaration of Conformity is identical to the unit tested and found acceptable with the standards and that the records maintained by the responsible party continue to reflect the equipment being produced under the Declaration of Conformity within the variation that can be expected due to quantity production and testing on a statistical basis.




Registration number: J10M20504-0003-P-15B

1.2 Tester

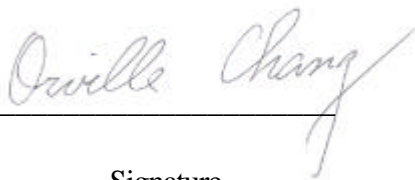27.06.2005		Orville Chang	
Date	ETS-Lab.	Test Engineer	Signature

Technical responsibility for area of testing:

27.06.2005		Steven Chuang	
Date	ETS	Name	Signature



Registration number: J10M20504-0003-P-15B

1.3 Testing laboratory

1.3.1 Location

OATS

No.5-1, Shuang Sing Village,
LiShuei Rd., Wanli Township,
Taipei County 207, Taiwan (R.O.C.)

Company

ETS DR. GENZ TAIWAN PS CO., LTD.
6F, NO. 58, LANE 188, RUEY-KUANG RD.
NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

1.3.2 Details of accreditation status

Accredited testing laboratory

A2LA-registration number: 2300.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679

1.3.3 Test location, where different from ETS

Name:	./.
Street:	./.
Town:	./.
Country:	./.
Telephone:	./.
Fax:	./.
Teletex:	./.



Registration number: J10M20504-0003-P-15B

1.4 Details of applicant

Name : Eastman Kodak Company
Street : Rochester
Town : 14650 New York
Country : U.S.A.
Telephone : +585-724-9027
Fax : +585-781-9722
Teletex : ./.
Contact : Richard Stearns
Telephone : +585-724-9027


1.5 Application details

Date of receipt of application : 27.04.2005
Date of receipt of test item : 27.04.2005
Date of test : 28.04.2005 to 27.06.2005

1.6 Test item

1.6.1 Description of test item

Type of product : Photo Printer
Type identification : Kodak EasyShare printer dock plus series 3
Trade Name : Kodak
Serial number : without
Photos : Please find in Appendix.



Registration number: «Registriernummer»-P-15B

1.6.2 Manufacturer (if different from applicant in point 1.4)

Name : ALPS ELECTRIC CO., LTD. PERIPHERAL PRODUCTS DIVISION
Street : 41-25 AZA YANAGI-MACHI NODA ONAHAMA
Town : 971-8615 IWAKI-CITY, FUKUSHIMA
Country : Japan
Contact : MR. SHIGETO OZAKI
Phone : +81-246-76-0151

1.6.3 Frequency behavior

Highest clock Frequency	<200 MHz
-------------------------	----------

1.7 Test standards

FCC part 15 : July 2003

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

Or

The deviations as specified in 2.4 were ascertained in the course of the tests performed.

2.2 Test environment

Temperature:	18 ... 25 °C
Relative humidity content	20 ... 75 %
Air pressure:	860 ... 1030 hPa
Details of power supply:	120VAC
Other parameters:	without

2.3 Test equipment utilized

No.	Test equipment	Type	Serial No.	Manufacturer	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2005/11/8
ETSTW-CE 002	PREREULATOR MODE DC POWER SUPPLY				
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2006/11/8
ETSTW-CE 005	Line-Impedance Stabilisation Network	NNBM 8126D	137	Schwarzbeck	2006/11/3
ETSTW-CE 006	IMPULS-BEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2006/11/10
ETSTW-CE 007	SPECTRUM ANALYZER 5GHz	FSB	849670/001	R&S	
ETSTW-CE 008	ABSORBING CLAMP	MDS 21	3469	ABSORPTION S-MESSWANDLER-ZANGE	2006/11/4
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2005/5/10
ETSTW-CE 010	Comb Generator-conducted			ETS	
ETSTW-CE 011	Power Line Conducted Emission Only			ETS	
ETSTW-CE 012	Dual-Phase-V-Network	NNB-2/16Z	03/10201	Telemeter	2006/4/11
ETSTW-CS 001	SIGNAL GENERATOR	SMX	849254/003	R&S	2005/10/31
ETSTW-CS 002	COUPLING AND DECOUPLING NETWORK	CDN S751	19263	CHAFFNER	2006/11/3
ETSTW-CS 003	COUPLING AND DECOUPLING NETWORK	CDN T400	19820	CHAFFNER	2006/11/3
ETSTW-CS 004	COUPLING AND DECOUPLING NETWORK	CDN M016	20053	CHAFFNER	2006/11/3
ETSTW-CS 005	RF Power Amplifier	100A250A	306547	AR	2005/11/3
ETSTW-CS 006	Terminal 500 Load	50T-116 M		JFW	
ETSTW-CS 007	Terminal 500 Load	50T-116 F		JFW	
ETSTW-CS 008	6 dB Attenuator	HFP-5100-3/06 N M/F	2010876106		
ETSTW-RE 001	Controller	CD 1000	C01000/154/867/004/L	Heinrich Deisel	
ETSTW-RE 002	Function Generator	33220A	MY43004982	Agilent	2005/11/3
ETSTW-RE 003	EMI TEST RECEIVER	ESI	831438/001	R&S	2005/11/16
ETSTW-RE 004	EMI TEST RECEIVER	ESI	831459/012	R&S	2005/11/9
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2005/11/1

ETSTW-RE 008	Controller	HD100	C0100-L/047/ 6670703/L	Heinrich Deisel	
ETSTW-RE 009	Controller	HD100	100/341	Heinrich Deisel	
ETSTW-RE 010	PROGRAMMABLE LINEAR POWER SUPPLY	LPS-305	30503070181	MOTECH	
ETSTW-RE 011	PROGRAMMABLE LINEAR POWER SUPPLY	LPS-305	30503070165	MOTECH	
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0036	397	K&L	
ETSTW-RE 014	DUAL TRACKING WITH 5V FIXED	GPC-3030D		GW	
ETSTW-RE 015	ANTENNA	HK116	841489/003	R&S	
ETSTW-RE 016	ANTENNA	HL223	848953/006	R&S	
ETSTW-RE 017	ANTENNA	HL025	352886/001	R&S	
ETSTW-RE 018	ANTENNA	AT4560	27212	AR	2006/11/7
ETSTW-RE 019	ANTENNA , HORN	22240-25	121074	FM	
ETSTW-RE 020	MICROWAVE HORN ANTENNA	AT4002A	306915	AR	
ETSTW-RE 021	SWEEP GENERATOR	SWM05	835130/010	R&S	2005/11/10
ETSTW-RE 022	AMPLIFIER	8447D	2944A09837	Agilent	2005/11/1
ETSTW-RE 023	Shielded room	SR 1		Frankonia	
ETSTW-RE 024	Anechoic Chamber	CHC 1		Frankonia	
ETSTW-RE 025	Anechoic Chamber	CHC 2		Frankonia	
ETSTW-RE 026	Open Area Test Site	10m		ETS	
ETSTW-RE 027	Passive Loop Antenna	6512	34563	EMCO	2006/6/29
ETSTW-RE 028	Log-Periodic DipoleArray Antenna	3148	34429	EMCO	2006/6/14
ETSTW-RE 029	Biconical Antenna	3109	33524	EMCO	2006/6/16
ETSTW-RE 030	Double-Ridged Waveguide Horn Antenna	3117	35224	EMCO	2006/5/4
ETSTW-RE 031	Comb Generator-radiated			ETS	
ETSTW-RE 032	Millivoltmeter	URV 55	849086/013	R&S	2005/11/17
ETSTW-RE 033	4CH 1GHz 5GS/s DSO	WAVERUNNER 6100A	LCRY0604P14508	LeCory	
ETSTW-RE 034	Power Sensor	URV5-Z4	839313/006	R&S	2005/11/17
ETSTW-RE 035	1.5GHz Active Voltage Probe	HFP1500	2332	LeCory	
ETSTW-RE 036	100MHz High Voltage Diff Probe	ADP305	3305	LeCory	
ETSTW-RE 037	Log-Periodic DipoleArray Antenna	3148	00034546	EMCO	2006/11/17
ETSTW-RE 038	Log-Periodic DipoleArray Antenna	3148	00034547	EMCO	2006/11/17
ETSTW-RE 039	Biconical Antenna	3110B	41760	EMCO	2006/11/17

ETSTW-RE 040	Biconical Antenna	3110B	41761	EMCO	2006/11/17
ETSTW-RE 041	Anechoic Chamber	CHC 3		Frankonia	
ETSTW-RE 042	ANTENNA	HK116	100172	R&S	2007/1/13
ETSTW-RE 043	ANTENNA	HL223	100166	R&S	2006/4/15
ETSTW-RE 044	ANTENNA	HL050	100094	R&S	
ETSTW-RE 048	Triple Loop Antenna	HXYZ 9170	HXYZ 9170-134	Schwarzbeck	2006/3/21
ETSTW-EMI 001	HARMONICS 1000	HAR1000-1P	93	EMC-PARTNER	2005/11/17
ETSTW-EMS 001	Clamp BASELSTRASSE 160 CH-4242 LAUFEN	CN-EFT1000	354	EMC-PARTNER	2005/11/1
ETSTW-EMS 002	Frequency Converter	YF-6020	0308014		
ETSTW-EMS 003	EMC Immunity Test System	TRA2000IN6	579	EMC-PARTNER	2005/11/1
ETSTW-EMS 004	ESD generator minizap	ESD2000	016	EMC-PARTNER	2005/11/1
ETSTW-EMS 005	Attenautor (500)	VERI50	051	EMC-PARTNER	2006/8/30
ETSTW-EMS 006	Attenautor (1 KO)	VERI1K	019	EMC-PARTNER	2006/10/20
ETSTW-EMS 007	20GO Divider	ESD-VERI-V	021	EMC-PARTNER	2006/3/16
ETSTW-RS 001	14" COLOR VIDEO MONITOR	TP-1480HR	P009799	TOPICA	
ETSTW-RS 002	14" COLOR VIDEO MONITOR	TP-1480HR	P009814	TOPICA	
ETSTW-RS 003	RF Power Amplifier	30S1G3	306933	AR	
ETSTW-RS 004	RF Power Amplifier	150W1000	307009	AR	2005/11/18
ETSTW-RS 005	Electric Field Probe Type 8.3	EMR-20	BN 2244/20	GW	2005/9/3
ETSTW-RS 006	SIGNAL GENERATOR	SML03	101551	R&S	2005/11/15
ETSTW-RS 007	AUDIO ANALYZER	UPA3	843458/029	R&S	2005/11/15
ETSTW-EMS 008	Safety Test Solutions	ELT-400	E-0039	Narda	2006/1/4
ETSTW-EMS 009	Magnetic Field Antenna	MF1000-1	104	EMC-PARTNER	2006/12/2
ETSTW-GSM 01	SIM Simulator	IT3	B2004-50106	ORGA Testsystems GmBh	
ETSTW-GSM 02	Universal Radio Communication Tester	CMU 200	103489	R&S	
ETSTW-GSM 03	Agilent 8960 Test Set 1	E5515C	GB44052675	Agilent	2006/7/14
ETSTW-GSM 04	Agilent 8960 Test Set 2	E5515C	GB44052665	Agilent	2006/7/14
ETSTW-GSM 05	Agilent 8960 Test Set 3	E5515C	GB44052852	Agilent	2006/7/17
ETSTW-GSM 06	Agilent 8960 Test Set 4	E5515C	GB44052984	Agilent	2006/7/16
ETSTW-GSM 07	Agilent 8960 Test Set 5	E5515C	GB44052658	Agilent	2006/7/14



Registration number: J10M20504-0003-P-15B

ETSTW-GSM 08	Agilent 8960 Test Set 6	E5515C	GB44052666	Agilent	2006/7/16
ETSTW-GSM 09	Controler PC	Dell GX 270	700F61J	Dell	
ETSTW-GSM 10	Combiner Wessex / Anite	B4605/100	053	Wessex / Anite	07.06
ETSTW-GSM 11	GSM 850,900,1800,1900 Test system	TS8950G		Rohde & Schwarz	11.05
ETSTW-GSM 12	Acoustical Calibrator	4231	2463874	Brüel&Kjær	
ETSTW-GSM 13	Conditioning Amplifier	2690--0S2	2437856	Brüel&Kjær	
ETSTW-GSM 14	Telephone Test Head	4602B	2465324	Brüel&Kjær	2005/11/17
ETSTW-GSM 15	Mouth Simulator	4227	2462516	Brüel&Kjær	
ETSTW-GSM 16	TEMP.&HUMIDITY CHAMBER	GTH-120-40-1P-U	MAA0501002	GIANT FORCE	12/290/2005
ETSTW-GSM 17	ANTENNT COPLER	CMU-Z10	100988	R&S	



2.4 Test results

1st test
 test after modification
 production test

Test Emission / Immunity			Done	Test passed	Test failed
Emission	Conducted Emission	FCC part 15.107	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Emission	Radiated Emission	FCC part 15.109	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

2.4.1 Conducted Emission

2.4.1.1 Test Equipment

a) Artificial mains (ESH3-Z5)

For your reference please find it in our test equipment list at page 9 to 12 as number : ETSTW-CE 004

b) Test receiver (ESHS10)

For your reference please find it in our test equipment list at page 9 to 12 as number : ETSTW-CE 001

c) Shielded room

For your reference please find it in our test equipment list at page 9 to 12 as number : ETSTW-RE 023

- Test configuration

The test configuration is contained inside of a shielded chamber and corresponds to the standard CISPR 22. The equipment under test is placed in the facility on a wooden table 0.8m high. The equipment under test is connected with the artificial mains network (AMN) in a distance of 0,8m and also 0,8m from other subassembly and metallic area. The measurement receiver are placed in a special room adjacent to the chamber. The observation of the equipment under test is realized by 3 video cameras and by a microphone.

- **Test parameters and marginal conditions**

The test are carried out with a nominal impedance by $50\Omega / 50\mu\text{H}$ of the AMN in a frequency range 150 kHz to 30 MHz. This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector,

Further information please find in test report.



2.4.2 Radiated Emission

2.4.2.1 Test Equipment

a) Antenna (HK116)

For your reference please find it in our test equipment list at page 9 to 12 as number : ETSTW-RE 015

b) Antenna (HL223)

For your reference please find it in our test equipment list at page 9 to 12 as number : ETSTW-RE 016

c) Antenna (HL025)

For your reference please find it in our test equipment list at page 9 to 12 as number : ETSTW-RE 017

d) Generator SMX (R&S)

For your reference please find it in our test equipment list at page 9 to 12 as number : ETSTW-CS 001

e) Semi Anechoic (OATS 10m)

For your reference please find it in our test equipment list at page 9 to 12 as number : ETSTW-RE 026

f) ESI-26

For your reference please find it in our test equipment list at page 9 to 12 as number : ETSTW-RE 003

g) Anechoic Chamber

For your reference please find it in our test equipment list at page 9 to 12 as number : ETSTW-RE 025

2.4.2.2 Test Procedures

- Test configuration

The test configuration corresponds to the standard CISPR 22. The equipment under test is placed on a non metallic table with 0,8m height. The power supply and the RF connection points are close to the equipment under test at the floor inside a connection box. The cables to this connection box are shielded and below the double floor. The receiving antenna is placed in a height at 1,0 to 4,0m, in a distance of 10m. The measurement receiver are placed in a special room. The observation of the equipment under test is realized by 3 video cameras and by a microphone.

- Test parameters and marginal conditions

The test are carried out with horizontal and vertical polarization of the antenna in a frequency range of 30 MHz to 5000 MHz . Further information please find in the test protocol.



Registration number: J10M20504-0003-P-15B

2.5 Test protocols

Conducted Emission

Emission

Standard : FCC part 15B

Reg.-no. : J10M20504-0003-P-15B

Device : Kodak EasyShare printer dock plus series 3

Date : 27.06.2005

Operator : *Quille Chang*

Class : B

Temperature : 24 °C
 Pressure : 969 hPa
 Rel. humidity : 60 %

Frequency Range	Limit Db μ V		Passed	Failed	Number of rechecks
	Quasi-peak	Average			
150 kHz – 500 kHz AC	66 to 56*	56 to 46*	<input checked="" type="checkbox"/>	<input type="checkbox"/>	0
500 kHz – 5 MHz AC	56	46	<input checked="" type="checkbox"/>	<input type="checkbox"/>	0
5 MHz – 30 MHz AC	60	50	<input checked="" type="checkbox"/>	<input type="checkbox"/>	0

*Decreases with logarithm of the frequency

Comment: See attached diagrams



Registration number: J10M20504-0003-P-15B

Standard : FCC part 15B

Reg.-no. : J10M20504-0003-P-15B

Device : Kodak EasyShare printer dock plus series 3

Date : 27.06.2005

Operator : *Quille Chang*

Class : B

Temperature : 24 °C
 Pressure : 969 hPa
 Rel. humidity : 60 %

Measurement Result: “_ Fin AV”

Frequency Marker [MHz]	Type	Corrected Reading [dBuV]	Compliance AVLimit [dBuV]	BW [MHz]	Margin(AV)
0.395	N	22.3	49	0,01	26.7
3.245	N	9.9	46	0,01	36.1
3.78	N	20.4	46	0,01	25.6
4.215	N	15.6	46	0,01	30.4
4.955	N	16.1	46	0,01	29.9
5.455	N	18.4	50	0,01	31.6
9.135	N	14.9	50	0,01	35.1

Frequency Marker [MHz]	Type	Corrected Reading [dBuV]	Compliance AVLimit [dBuV]	BW [MHz]	Margin(AV)
0.395	L1	25.6	49	0,01	23.4
3.245	L1	18.7	46	0,01	27.3
3.78	L1	17.6	46	0,01	28.4
4.215	L1	18.1	46	0,01	27.9
4.955	L1	8.7	46	0,01	37.3
5.455	L1	13.8	50	0,01	36.2
9.135	L1	12.9	50	0,01	37.1



Registration number: J10M20504-0003-P-15B

Standard : FCC part 15B

Reg.-no. : J10M20504-0003-P-15B

Device : Kodak EasyShare printer dock plus series 3

Date : 27.06.2005

Operator : *Quille Chang*

Class : B

Temperature : 24 °C
 Pressure : 969 hPa
 Rel. humidity : 60 %

Measurement Result: “_ Fin QP”

Frequency Marker [MHz]	Type	Corrected Reading [dBuV]	Compliance QPLimit [dBuV]	BW [MHz]	Margin(QP)
0.395	N	34.5	59	0,01	24.5
3.245	N	19.7	56	0,01	36.3
3.78	N	31.3	56	0,01	24.7
4.215	N	34.4	56	0,01	21.6
4.955	N	34.7	56	0,01	21.3
5.455	N	34.2	60	0,01	25.8
9.135	N	26.6	60	0,01	33.4

Frequency Marker [MHz]	Type	Corrected Reading [dBuV]	Compliance QPLimit [dBuV]	BW [MHz]	Margin(QP)
0.395	L1	38.1	59	0,01	20.9
3.245	L1	30.1	56	0,01	25.9
3.78	L1	30	56	0,01	26
4.215	L1	31.9	56	0,01	24.1
4.955	L1	26.6	56	0,01	29.4
5.455	L1	27.1	60	0,01	32.9
9.135	L1	23.8	60	0,01	36.2



Registration number: J10M20504-0003-P-15B

Radio Noise Field Strength

Emission

Standard : FCC part 15B

Reg.-no. : J10M20504-0003-P-15B

Device : Kodak EasyShare printer dock plus series 3

Date : 27.06.2005

Operator : *Dwille Chang*

Class : B

Temperature	: 24 °C
Pressure	: 969 hPa
Rel. humidity	: 60 %

Frequency Range Polarization	Limit $\mu\text{V/m}$	Passed	Failed	Number of rechecks
30 MHz – 88 MHz	100	<input checked="" type="checkbox"/>	<input type="checkbox"/>	0
88 MHz – 216 MHz	150	<input checked="" type="checkbox"/>	<input type="checkbox"/>	0
216 MHz – 960 MHz	200	<input checked="" type="checkbox"/>	<input type="checkbox"/>	0
960 MHz – 1000 MHz	500	<input checked="" type="checkbox"/>	<input type="checkbox"/>	0

Comment: See attached diagrams



Registration number: J10M20504-0003-P-15B

Standard : FCC part 15B

Reg.-no. : J10M20504-0003-P-15B

Device : Kodak EasyShare printer dock plus series 3

Date : 27.06.2005

Operator : *Orville Chang*

Class : B

Temperature : 24 °C
 Pressure : 969 hPa
 Rel. humidity : 60 %

Summary table with radiated data of the test plots

Freq.	Used Ch.	Frequency Marker [MHz]	Polarization	corrections dB	Corrected Reading [dBuV/m]	Compliance Limit [dBuV/m]	Detec-tor	BW [MHz]	Margin
1		54.897	H		27.43	40	PK	0.1	12.57
1		54.897	V		34.38	40	PK	0.1	5.62
1		108.016	H		31.06	43.5	PK	0.1	12.44
1		108.016	V		32.10	43.5	PK	0.1	11.4
1		122.655	H		36.43	43.5	PK	0.1	7.07
1		122.655	V		36.18	43.5	PK	0.1	7.32
1		144.128	H		37.15	43.5	PK	0.1	6.35
1		144.128	V		32.56	43.5	PK	0.1	10.94
1		156.052	H		30.86	43.5	PK	0.1	12.64
1		156.052	V		34.65	43.5	PK	0.1	8.85
1		192.164	H		35.79	43.5	PK	0.1	7.71
1		192.164	V		33.28	43.5	PK	0.1	10.22
2		244.890	H		37.12	46	PK	0.1	8.88
2		244.890	V		40.88	46	PK	0.1	5.12
2		304.208	H		50.93	66	PK	0.1	15.07
2		304.208	H		30.72	46	QP	0.1	15.28
2		304.208	V		35.44	46	PK	0.1	10.56
2		352.305	H		29.91	46	PK	0.1	16.09
2		352.305	V		46.42	66	PK	0.1	19.58
2		352.305	V		31.24	46	QP	0.1	14.76
2		361.924	H		46.40	66	PK	0.1	19.6
2		361.924	H		28.88	46	QP	0.1	17.12
2		361.924	V		33.22	46	PK	0.1	12.78
2		410.020	H		27.59	46	PK	0.1	18.41
2		410.020	V		51.35	66	PK	0.1	14.65
2		410.020	V		36.33	46	QP	0.1	9.67
2		424.449	H		53.02	66	PK	0.1	12.98



Registration number: J10M20504-0003-P-15B

2		424.449	H		33.12	46	QP	0.1	12.88
2		424.449	V		45.82	46	PK	0.1	0.18
2		430.862	H		55.44	66	PK	0.1	10.56
2		430.862	H		36.17	46	QP	0.1	9.83
2		430.862	V		35.43	46	PK	0.1	10.57
2		517.435	H		48.91	66	PK	0.1	17.09
2		517.435	H		27.59	46	QP	0.1	18.41
2		517.435	V		32.22	46	PK	0.1	13.78
2		533.467	H		34.08	46	PK	0.1	11.92
2		533.467	V		44.64	46	PK	0.1	1.36
2		571.944	H		55.04	66	PK	0.1	10.96
2		571.944	H		35.14	46	QP	0.1	10.86
2		571.944	V		42.14	46	PK	0.1	3.86
2		595.992	H		55.05	66	PK	0.1	10.95
2		595.992	H		32.11	46	QP	0.1	13.89
2		595.992	V		33.29	46	PK	0.1	12.71
2		628.056	H		55.21	66	PK	0.1	10.79
2		628.056	H		36.14	46	QP	0.1	9.86
2		628.056	V		38.12	46	PK	0.1	7.88
2		631.263	H		40.32	46	PK	0.1	5.68
2		631.263	V		46.36	66	PK	0.1	19.64
2		631.263	V		35.33	46	QP	0.1	10.67
2		679.359	H		56.62	66	PK	0.1	9.38
2		679.359	H		34.33	46	QP	0.1	11.67
2		679.359	V		39.13	46	PK	0.1	6.87
2		698.597	H		56.26	66	PK	0.1	9.74
2		698.597	H		32.88	46	QP	0.1	13.12
2		698.597	V		32.14	46	PK	0.1	13.86
2		738.677	H		36.52	46	PK	0.1	9.48
2		738.677	V		51.72	66	PK	0.1	14.28
2		738.677	V		33.66	46	QP	0.1	12.34
2		789.980	H		52.08	66	PK	0.1	13.92
2		789.980	H		31.79	46	QP	0.1	14.21
2		789.980	V		35.12	46	PK	0.1	10.88
2		950.301	H		34.98	46	PK	0.1	11.02
2		950.301	V		48.94	66	PK	0.1	17.06
2		950.301	V		31.23	46	QP	0.1	14.77
2		961.523	H		45.03	54	PK	0.1	8.97
2		961.523	V		42.51	54	PK	0.1	11.49



Registration number: J10M20504-0003-P-15B

2.6 Equipment Modification

No modification was made to pass all tests.



3 Normative references

- /1/ FCC part 15
Radio Frequency Devices

- /2/ CISPR 22
Limits and Methods of Measurement of Radio Interference Characteristics of Information
Technology Equipment



Appendix

- A Radiated Emissions
- B AC conducted Emissions
- C Pictures




Appendix A

Radiated Emissions

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Photo Printer
MODEL NO.: Kodak EasyShare printer dock plus series 3
Approval Holder: Eastman Kodak Company
Test Site / Operator: ETS / Orville Chang
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC (ac / dc Adaptor)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq:122.665MHz Emax:36.18dBµV/m RBW: 100 kHz

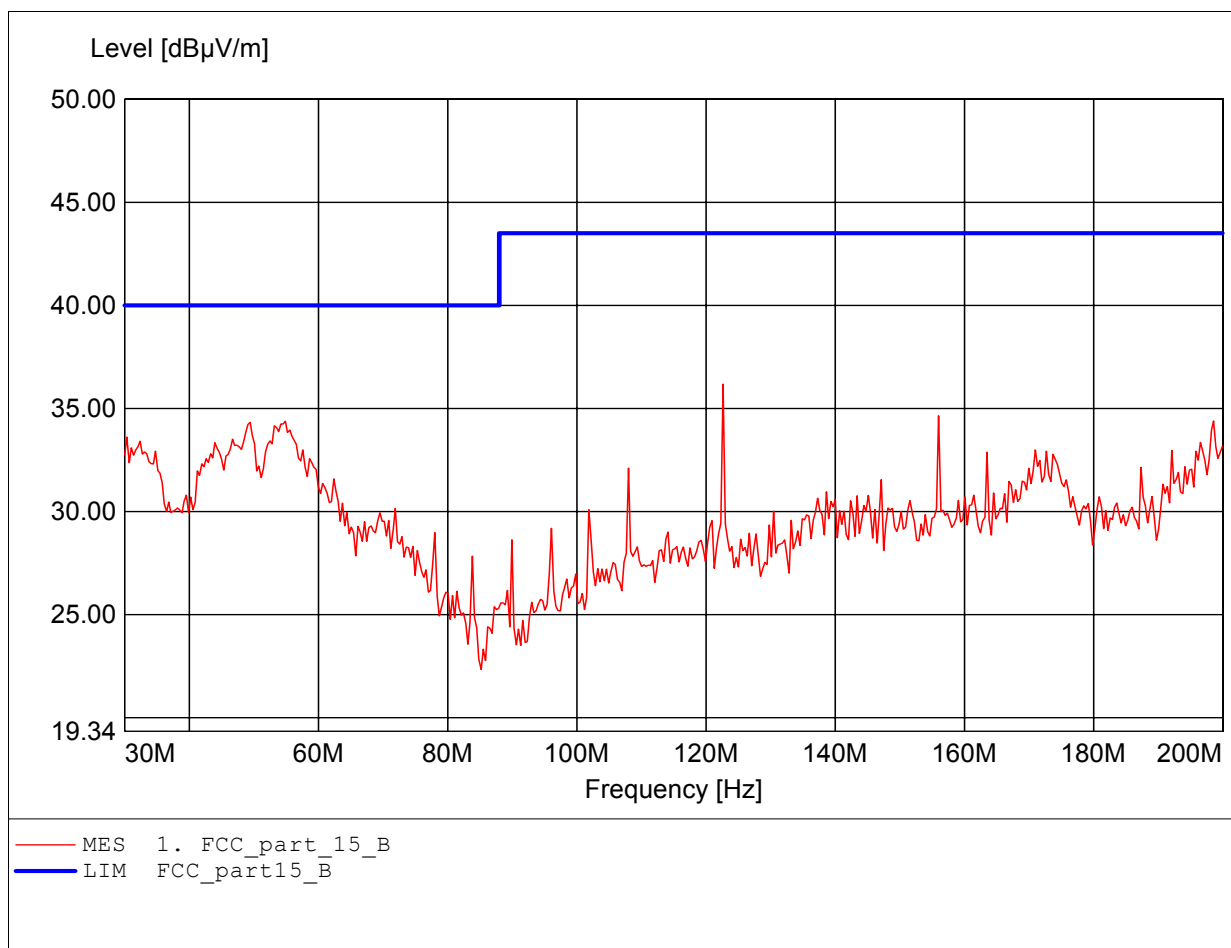

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Photo Printer
MODEL NO.: Kodak EasyShare printer dock plus series 3
Approval Holder: Eastman Kodak Company
Test Site / Operator: ETS / Orville Chang
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC (ac / dc Adaptor)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq:144.128MHz Emax:37.15dBµV/m RBW: 100 kHz

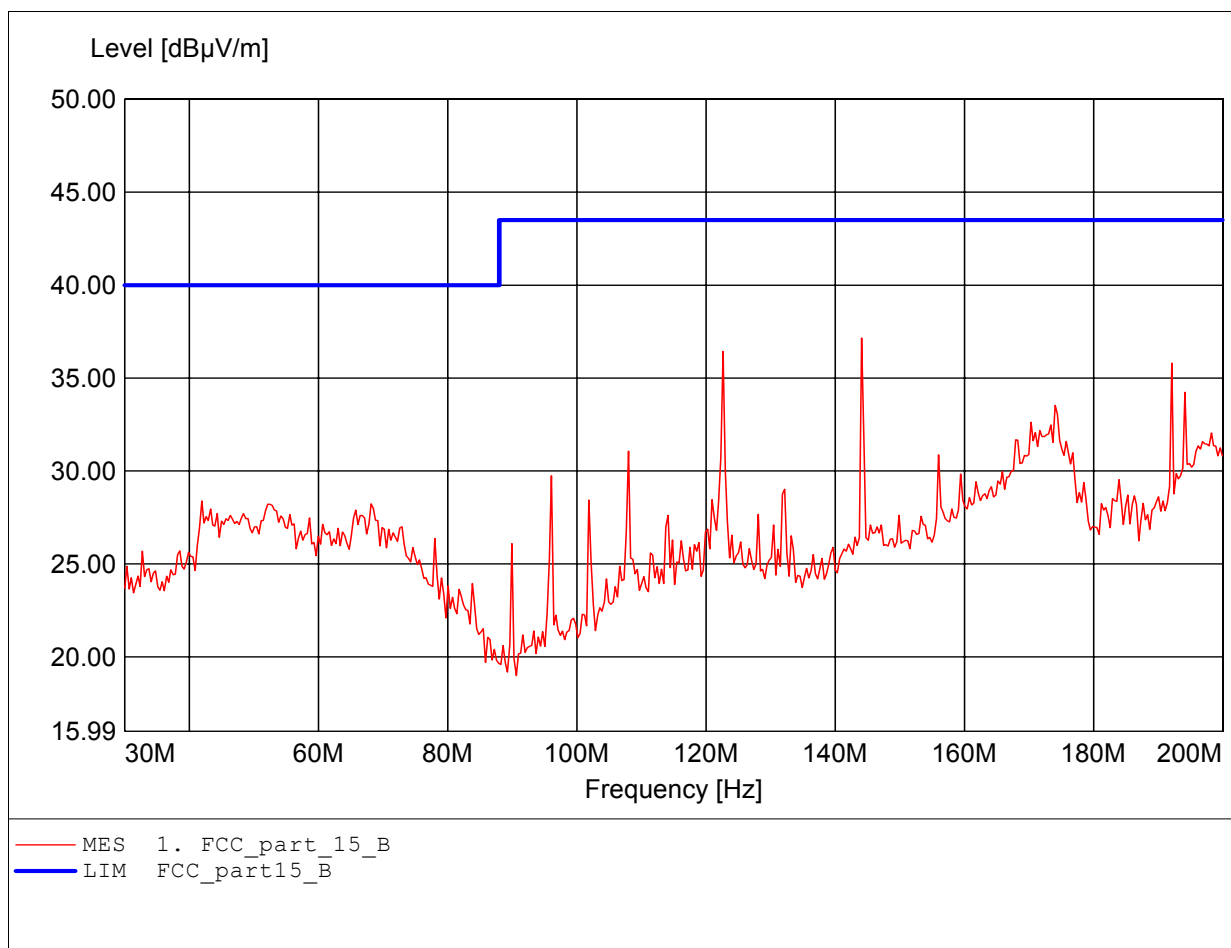

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B

EUT: Photo Printer
MODEL NO.: Kodak EasyShare printer dock plus series 3
Approval Holder: Eastman Kodak Company
Test Site / Operator: ETS / Orville Chang
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC (ac / dc Adaptor)
Test Specification: according to subpart B
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq:738.677MHz Emax:51.72dBµV/m RBW: 100 kHz

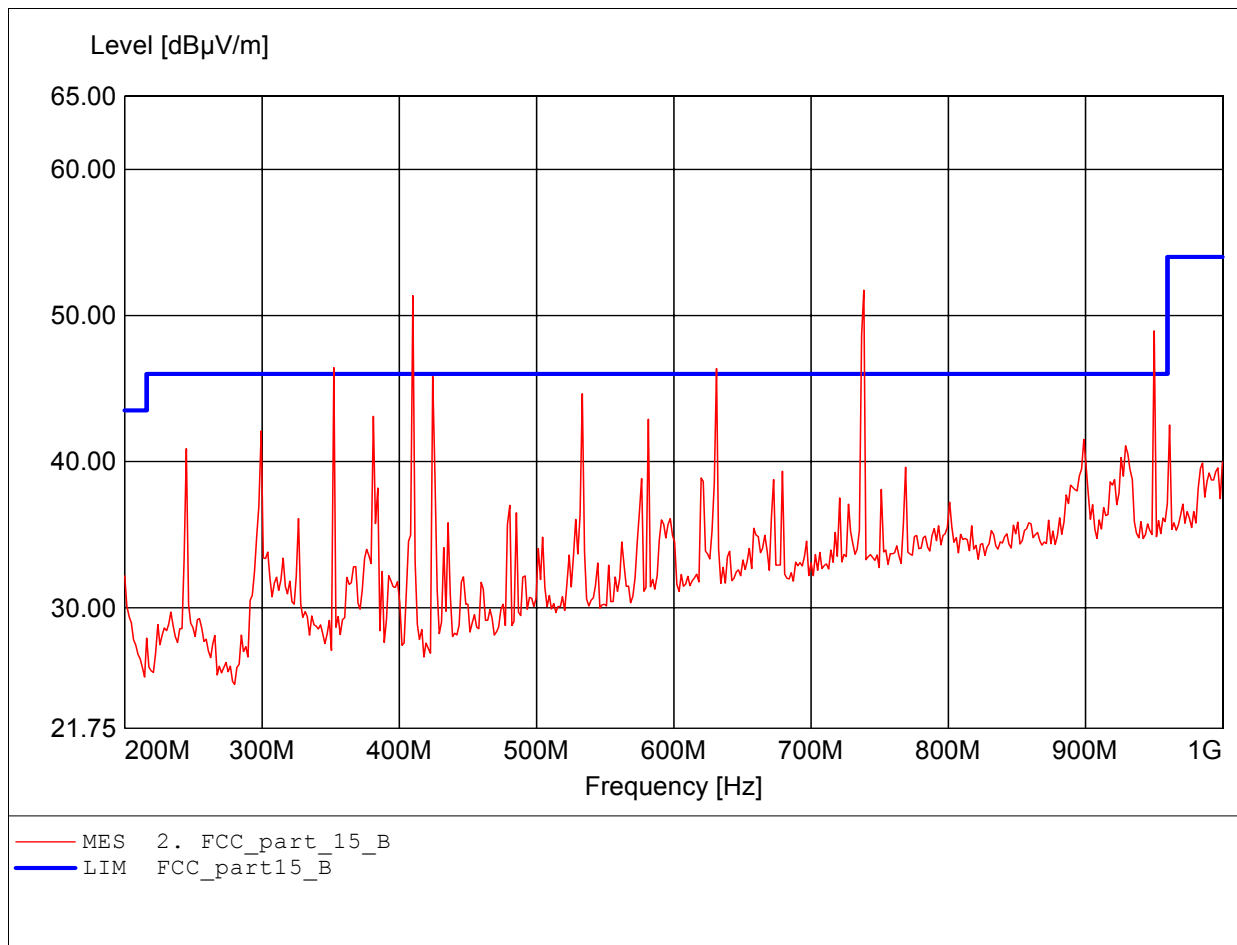


MEASUREMENT RESULT:

Frequency MHz	Level dBµV	Limit dBµV	Margin dB	Detector
352.30461	31.24	46.0	14.76	QP
410.02004	36.33	46.0	9.67	QP
631.26253	35.33	46.0	10.67	QP
738.69936	33.66	46.0	12.34	QP
950.30060	31.23	46.0	14.77	QP

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B

EUT: Photo Printer
 MODEL NO.: Kodak EasyShare printer dock plus series 3
 Approval Holder: Eastman Kodak Company
 Test Site / Operator: ETS / Orville Chang
 Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC (ac / dc Adaptor)
 Test Specification: according to subpart B
 Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
 Freq:679.359MHz Emax:56.62dBµV/m RBW: 100 kHz

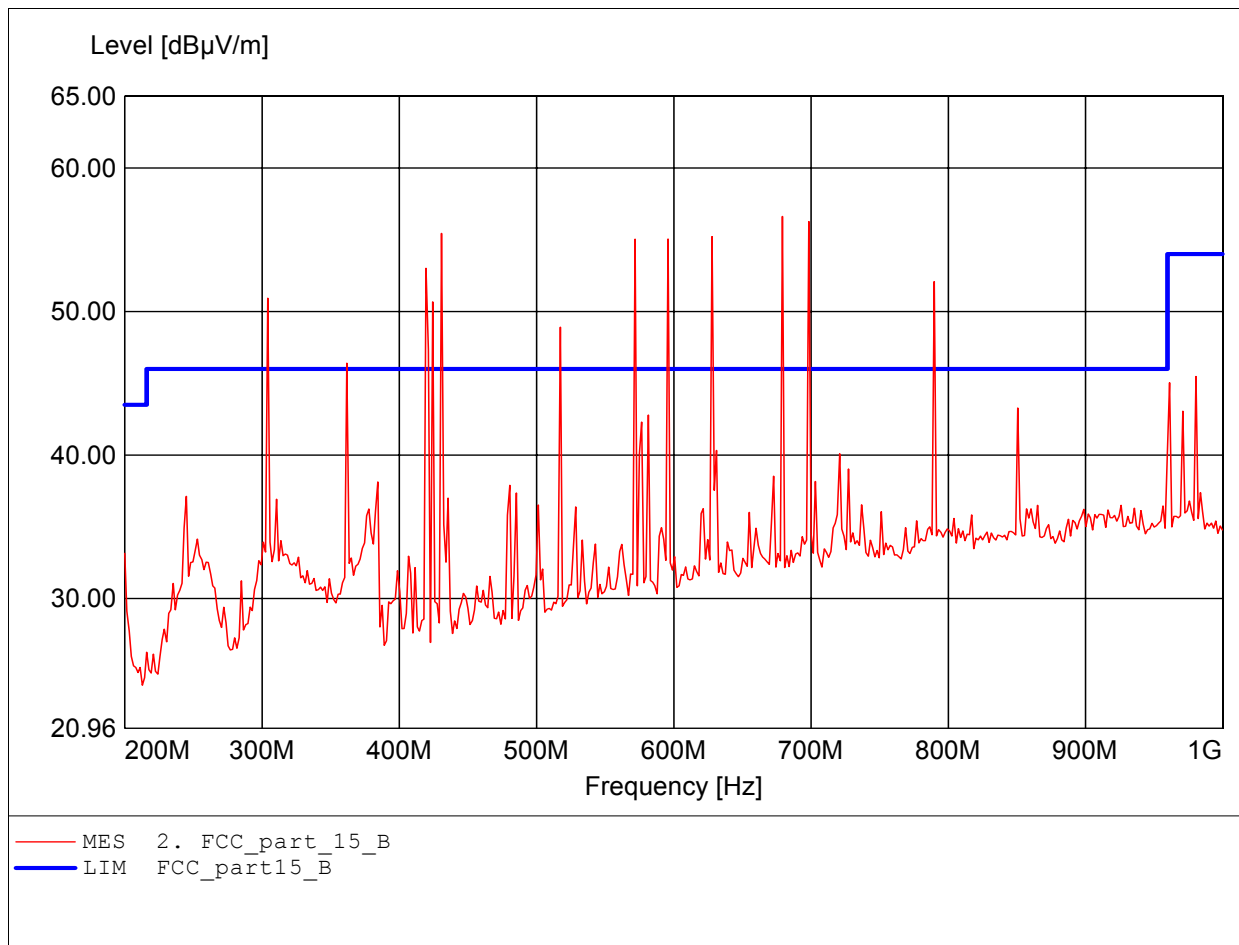

MEASUREMENT RESULT:

Frequency MHz	Level dBµV	Limit dBµV	Margin dB	Detector
304.20841	30.72	46.0	15.28	QP
361.92384	28.88	46.0	17.12	QP
430.86172	36.17	46.0	9.83	QP
517.43487	27.59	46.0	18.41	QP
571.94388	35.14	46.0	10.86	QP
595.99198	32.11	46.0	13.89	QP
628.05611	36.14	46.0	9.86	QP
679.35872	34.33	46.0	11.67	QP
698.59719	32.88	46.0	13.12	QP
789.97996	31.79	46.0	14.21	QP




Appendix B

AC conducted Emissions

EMI voltage test in the ac-mains according to FCC Part 15

Class B


EUT: Photo Printer
Approval Hold: Eastman Kodak Company
Operating Condition: Unom: 120VAC (ac / dc Adaptor) , Tnom: 23°C
Test Site: ETS
Operator: Orville Chang
Test Specification: V-network: ESH3-Z5 N
Comment : model: Kodak EasyShare printer dock plus series 3 mode: active

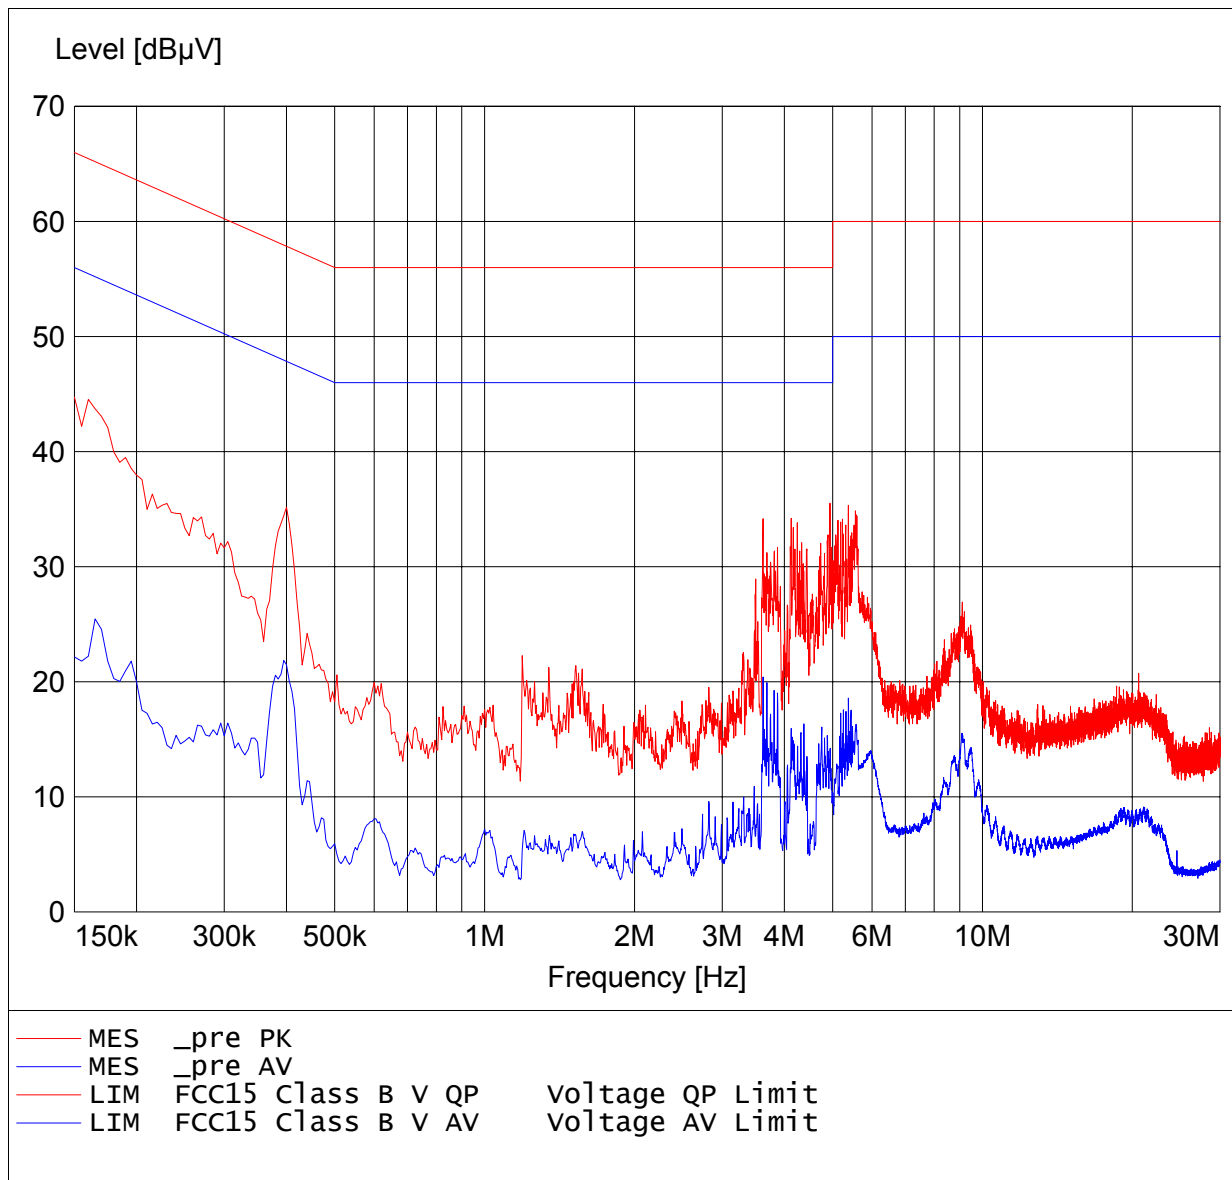

EMI voltage test in the ac-mains according to FCC Part 15

Class B

EUT: Photo Printer
Approval Hold: Eastman Kodak Company
Operating Condition: Unom: 120VAC (ac / dc Adaptor) , Tnom: 23°C
Test Site: ETS
Operator: Orville Chang
Test Specification: V-network: ESH3-Z5 L1
Comment : model: Kodak EasyShare printer dock plus series 3 mode: active

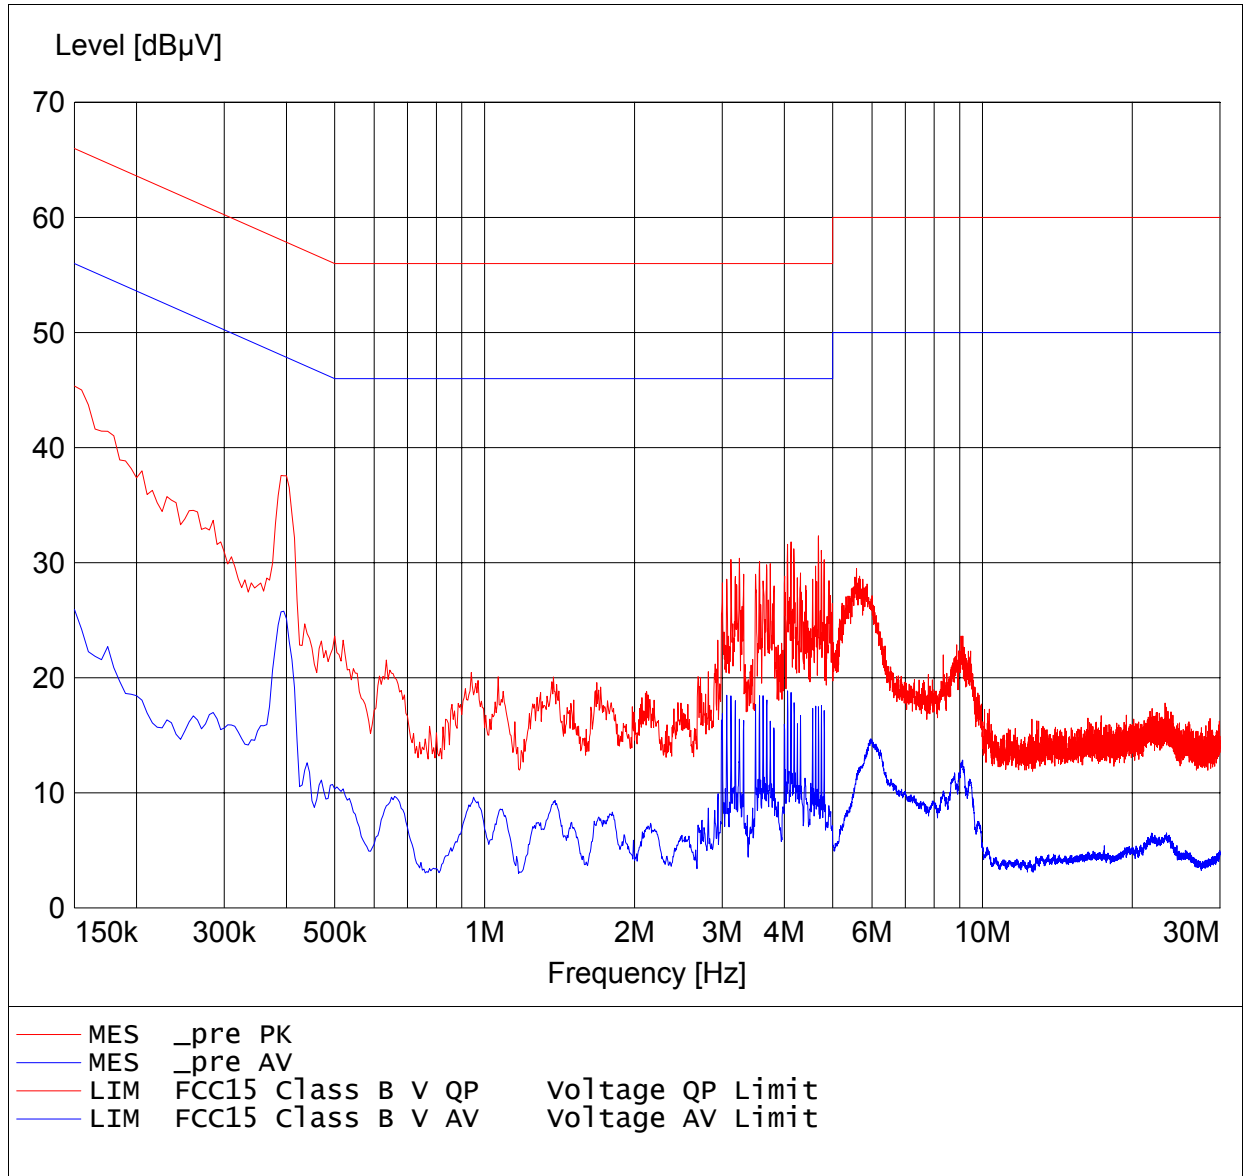



Appendix C

Pictures