



Cadence Pod 2

Quick Start Guide


Thank You!

Thank you for purchasing the Wahoo Cadence Pod! If you have an questions please visit:


support.wahoofitness.com

Installation:

The cadence pod should be mounted on the inside of your left crank arm (non-drive side).



There are two mounting options: (a) Double Sided 3M Tape or (b) a silicone mount with zip-ties.

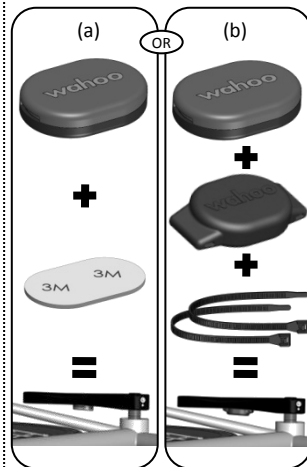

Getting Started:

1. Spin your cranks to wake up the Cadence Pod.
2. Choose your App:
www.wahoofitness.com/apps
3. Pair the Cadence Pod in the App's Settings page.



4. Start Riding!

Learn More:

Technology changes fast and we want to make sure that you have the best information possible about our products and their compatibility. Please see our website for detailed instructions on product installation and use.




www.wahoofitness.com/instructions

Scan QR Code:



Changing the Battery:

Use the included metal tool to open the Cadence Pod. Remove the battery and replace with a new CR2032 Coin Cell Battery. Make sure the o-ring is seated properly before closing the Cadence Pod.



FCC Compliance and Advisory Statement

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device,

according to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try correct the interference by one or more of the following measures:

- 1.Reorient the receiving antenna.
- 2.Increase the separation between the equipment and receiver.
- 3.Connect the equipment into and outlet on a circuit different from that to which the receiver is connected.
- 4.Consult the dealer or an experienced radio/TV technician for help.

Any special accessories needed for compliance must be specified in the instruction manual.

Warning: A shielded-type power cord is required in order to meet FCC emission limits and also to prevent interference to the nearby radio and television reception. It is essential that only the supplied power cord be used. Use only shielded cables to connect I/O devices to this equipment.

CAUTION: Any changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

Required notices to the User of Canada (RSS)

Radio apparatus shall comply with the requirements to include required notices or statements to the user of equipment with each unit of equipment model offered for sale.

The required notices are specified in the RSS documents (including RSS-Gen) applicable to the equipment model. These notices are required to be shown in a conspicuous location in the user manual for the equipment, or to be displayed on the equipment model. If more than one notice is required, the equipment model(s) to which each notice pertains should be identified. Suppliers of radio apparatus shall provide notices and user information in both English and French.

IC statement CAN ICES-3 (B)/NMB-3(B)