

FCC TEST REPORT

for

47 CFR, Part 15, Subpart C

Equipment : Blue Tooth USB Adaptor

Model No. : BT-0230M

FCC ID. : PANBT0230M

Filing Type : Certification

Applicant : CC&C Technologies Inc.
8F, 150, Jian Yi Road, Chung Ho City, Taipei County

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

History of this test reportii

CERTIFICATE OF COMPLIANCE..... 1

1. General Description of Equipment under Test.....2

 1.1. Applicant.....2

 1.2. Manufacturer2

 1.3. Basic Description of Equipment under Test2

 1.4. Feature of Equipment under Test2

2. Test Configuration of Equipment under Test.....4

 2.1. Test Manner4

 2.2. Description of Test System4

 2.3. Connection Diagram of Test System5

3. Test Software6

4. General Information of Test.....7

 4.1. Test Voltage7

 4.2. Standard for Methods of Measurement.....7

 4.3. Test in Compliance with7

 4.4. Frequency Range Investigated7

 4.5. Test Distance7

5. Report of Measurements and Examinations8

 5.1. List of Measurements and Examinations8

 5.2. Hopping Channel Separation8

 5.3. Number of Hopping Frequency10

 5.4. Hopping Channel Bandwidth.....11

 5.5. Dwell Time of Each Frequency within a 30 Seconds Period.....12

 5.6. Output Power13

 5.7. 100KHz Bandwidth of Frequency Band Edges15

 5.8. Test of Conducted Emission16

 5.9. Test of Radiated Emission20

6. Antenna Requirements40

7. EMI Suppression Component List.....41

8. Antenna Factor & Cable Loss42

9. List of Measuring Equipments Used43

10. Uncertainty of Test Site44

History of this test report

Original Report Issue Date: Jul. 02, 2003

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE


for

47 CFR, Part 15, Subpart C

Equipment : Blue Tooth USB Adaptor
Model No. : BT-0230M
FCC ID. : PANBT0230M
Filing Type : Certification
Applicant : **CC&C Technologies Inc.**
8F, 150, Jian Yi Road, Chung Ho City, Taipei County

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the equipment under test was **passed** all test items required in FCC Part 15 subpart C, relative to the equipment under test. Testing was carried out on Jun. 21, 2003 at **SPORTON International Inc. LAB.**



K. J. Lin
Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

CC&C Technologies Inc.
8F, 150, Jian Yi Road, Chung Ho City, Taipei County

1.2. Manufacturer

Same as 1.1

1.3. Basic Description of Equipment under Test

Equipment : Blue Tooth USB Adaptor
Model No. : BT-0230M
Trade Name : CC&C
Power Supply Type : From system
AC Power Input : N/A

1.4. Feature of Equipment under Test

Host/Radio Interface	FHSS			
Type of Modulation	GFSK			
Number of Channels	USA/Canada:	79	European:	79
	Japan:		Other:	
Frequency Band	2.4G ISM band			
Carrier Frequency of each channel	(2402+k) M Hz, k= 0, 1, 2,..., 78			
Bandwidth of each channel	1M			
Antenna of Maximum Output Power	11.88dBm			
IF & L.O. frequency	Near Zero IF			
Type of Antenna Connector	NA			
Type of Antenna	Print Antenna			
Function Type	Transmitter	Yes	Transceiver	Yes
Power Rating (DC/AC , Voltage)	DC 5V			
Antenna Gain	0.5 dBi			
Duty Cycle	< 0.4/30			
Basic function of product	Bluetooth Class 1 USB adapter			
Temperature Range (Operating)	-10~70 degree C			
Humidity	20% ~ 90%			

Channel	Frequency	Channel	Frequency
00	2402	40	2442
01	2403	41	2443
02	2404	42	2444
03	2405	43	2445
04	2406	44	2446
05	2407	45	2447
06	2408	46	2448
07	2409	47	2449
08	2410	48	2450
09	2411	49	2451
10	2412	50	2452
11	2413	51	2453
12	2414	52	2454
13	2415	53	2455
14	2416	54	2456
15	2417	55	2457
16	2418	56	2458
17	2419	57	2459
18	2420	58	2460
19	2421	59	2461
20	2422	60	2462
21	2423	61	2463
22	2424	62	2464
23	2425	63	2465
24	2426	64	2466
25	2427	65	2467
26	2428	66	2468
27	2429	67	2469
28	2430	68	2470
29	2431	69	2471
30	2432	70	2472
31	2433	71	2473
32	2434	72	2474
33	2435	73	2475
34	2436	74	2476
35	2437	75	2477
36	2438	76	2478
37	2439	77	2479
38	2440	78	2480
39	2441		

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with notebook and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. The complete test system included COMPAQ NOTEBOOK, VIEWSONIC Monitor, LOGITECH PS/2 Keyboard, LOGITECH USB Mouse, EPSON Printer and EUT for EMI test.
- c. The following test modes were pretested:
 - Mode 1: CH00 (2402MHz)
 - Mode 2: CH39 (2441MHz)
 - Mode 3: CH78 (2480MHz)
- b. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 24800MHz.

2.2. Description of Test System

Support Unit 1. -- Notebook (COMPAQ)

FCC ID : N/A
 Model No. : PRESARIO 1500
 Power Supply Type : Switching
 Power Cord : Non-Shielded
 Serial No. : SP0039
 Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. -- Monitor (VIEWSONIC)

FCC ID : N/A
 Model No. : VCDTS21553-3P
 Power Supply Type : Switching
 Power Cord : Non-Shielded
 Serial No. : SP0051
 Data Cable : Shielded, 1.7m
 Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 3. -- PS/2 Keyboard (LOGITECH)

FCC ID : N/A
 Model No. : Y-SJ17
 Serial No. : SP0054
 Data Cable : Shielded, 360 degree via metal backshells, 1.7m
 Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.


Support Unit 4. -- USB Mouse (LOGITECH)

FCC ID : N/A
 Model No. : M-BE58
 Serial No. : SP0041
 Data Cable : Shielded, 1.7m
 Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 5. -- Printer (EPSON)

FCC ID : N/A
 Model No. : STYLUS COLOR 680
 Power Supply Type : Linear
 Power Cord : Non-Shielded
 Serial No. : SP0048
 Data Cable : Shielded, 1.35m

2.3. Connection Diagram of Test System

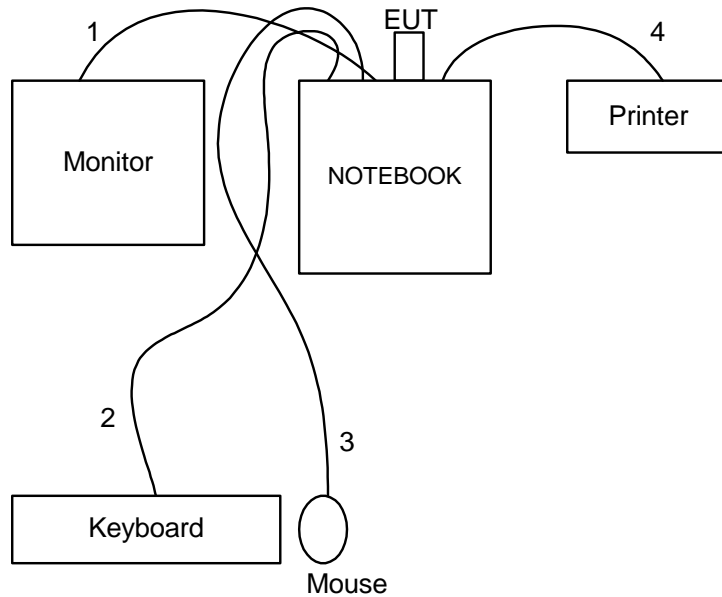

1. The I/O cable is connected from NOTEBOOK to the support unit 2.
2. The I/O cable is connected from NOTEBOOK to the support unit 3.
3. The I/O cable is connected from NOTEBOOK to the support unit 4.
4. The I/O cable is connected from NOTEBOOK to the support unit 5.

3. Test Software

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating "H" pattern was used as the test software.

The program was executed as follows:

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the hard disk drive and runs it.
- c. The PC sends " H" messages to the monitor, and the monitor displays " H" patterns on the screen.
- d. The PC sends " H" messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H" messages to the modem.
- f. The PC sends " H" messages to the internal hard disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from c to f.

At the same time, "my bluetooth place" was executed to keep transmitting signals at fixed frequency.

4. General Information of Test

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055
Test Site No : CO01-HY, 03CH02-HY

4.1. Test Voltage

115V/60Hz

4.2. Standard for Methods of Measurement

ANSI C63.4-2001 for conducted power line test and radiated emission test,
DA 00-705 for test of hopping channel separation
DA 00-705 for test of number of hopping frequency used
DA 00-705 for test of hopping channel bandwidth
DA 00-705 for test of dwell time of each frequency within a 30 second period
DA 00-705 for test of output power
DA 00-705 for test of 100khz bandwidth of frequency band edges

4.3. Test in Compliance with

FCC Part 15, Subpart C

4.4. Frequency Range Investigated

- a. Conduction: from 150 KHz to 30 MHz
- b. Radiation: from 30 MHz to 24800MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

5. Report of Measurements and Examinations

5.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result
<u>15.107/15.207</u>	Conducted Emission	Pass
<u>15.247(a)(1)</u>	Hopping Channel Separation	Pass
<u>15.247(a)(1)(ii)</u>	Number of Hopping Frequency Used	Pass
15.247(a)(1)(ii)	Hopping Channel Bandwidth	Pass
<u>15.247(a)(1)(ii)</u>	Dwell Time of Each Frequency within a 30 Second Period	Pass
<u>15.247(b)</u>	Output Power	Pass
15.247(c)	100KHz Bandwidth of Frequency Band Edges	Pass
<u>15.203</u>	Antenna Requirement	Pass

5.2. Hopping Channel Separation


5.2.1. Measuring Instruments :

As described in chapter 9 of this test report.

5.2.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The Hopping Channel Separation is defined as the channel is separated with the next channel.

5.2.3. Test Setup Layout :

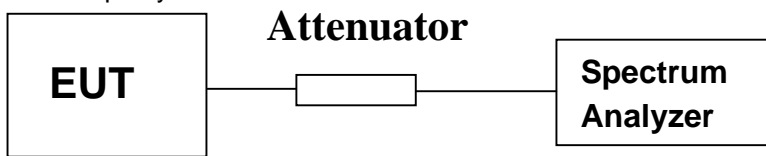


5.2.4. Test Result : The spectrum analyzer plots are attached as below


- Temperature: 26°C
- Relative Humidity: 72 %
- Duty cycle of the equipment during the test X = 100%

Channel	Frequency (MHz)	Hopping Channel Separation (KHz)	Limits (KHz)	Plot Ref. No.
00	2402	1000.0000	25	1
39	2441	1000.0000	25	2
78	2480	1004.0000	25	3


Plot 1 (Channel 00) :

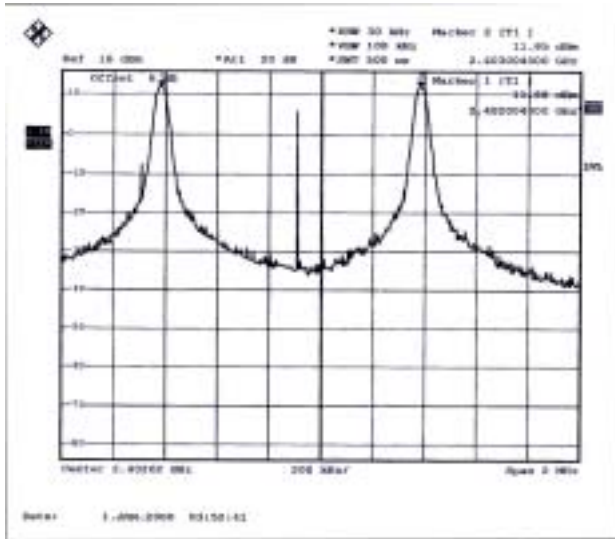

Plot 2 (Channel 39) :

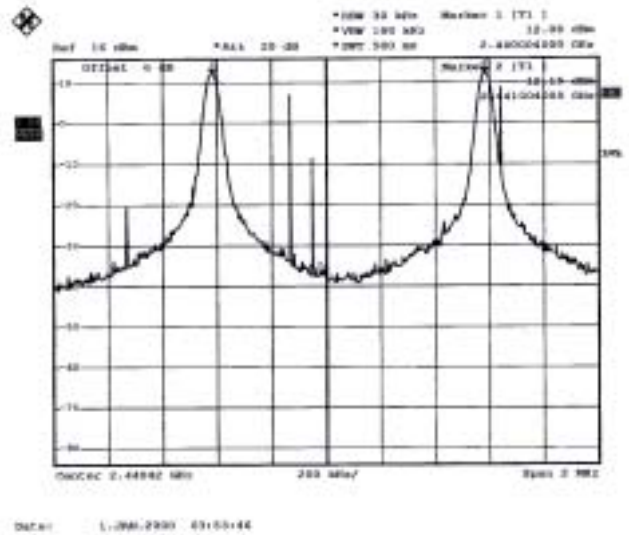

Plot 3 (Channel 78) :

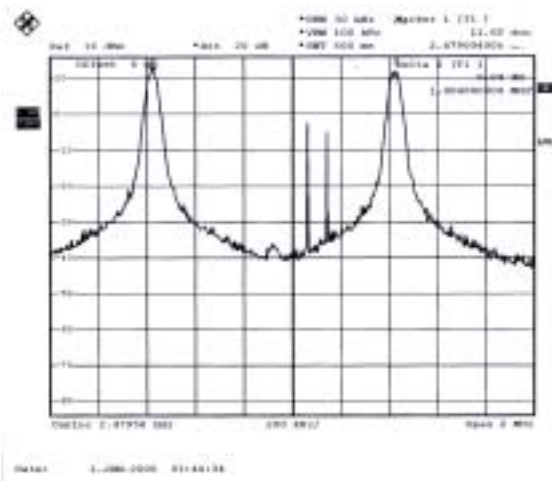

5.2.5. Test Configuration (EUT Operating Condition) :

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies respectively.

5.3. Number of Hopping Frequency


5.3.1. Measuring Instruments :

As described in chapter 9 of this test report.

5.3.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The number of hopping frequency used is defined as the device has the numbers of total channel.

5.3.3. Test Setup Layout :

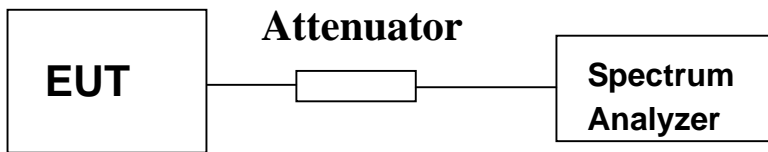


5.3.4. Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 72 %
- Duty cycle of the equipment during the test X = 100%

Number of Hopping Frequency (Channel)	Limits (Channel)	Plot Ref. No.
79	75	1

Plot 1 :

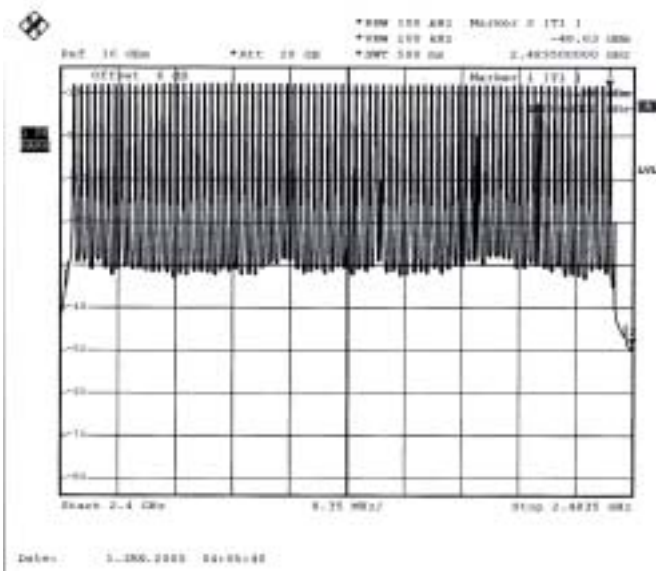

5.4. Hopping Channel Bandwidth


5.4.1. Measuring Instruments :

As described in chapter 9 of this test report.

5.4.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The Hopping Channel bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

5.4.3. Test Setup Layout :




5.4.4. Test Result : See spectrum analyzer plots below


- Temperature: 26°C
- Relative Humidity: 72 %
- Duty cycle of the equipment during the test X = 100%

Channel	Frequency (MHz)	Hopping Channel Bandwidth (MHz)	Limits (MHz)	Plot Ref. No.
00	2402	0.2770	1.0	1
39	2441	0.2710	1.0	2
78	2480	0.2690	1.0	3


Plot 1 (Channel 00)

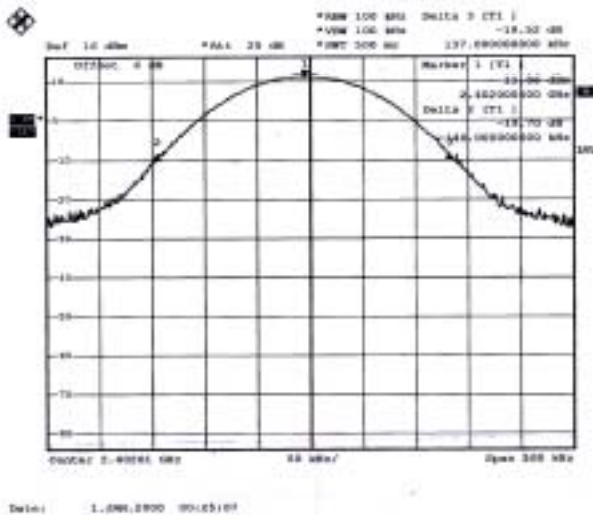

Plot 2 (Channel 39)

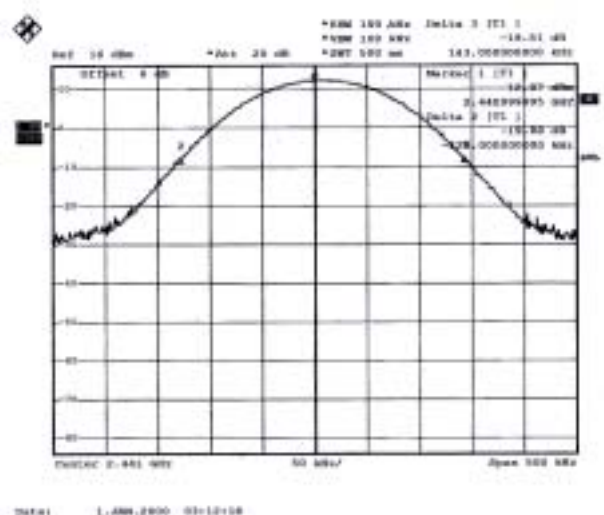

Plot 3 (Channel 78)

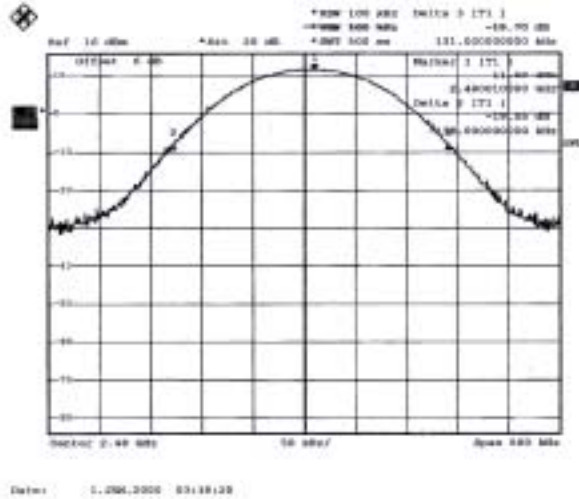

5.4.5. Test Configuration (EUT Operating Condition) :
Same as Section 5.2.5.

5.5. Dwell Time of Each Frequency within a 30 Seconds Period


5.5.1. Measuring Instruments :

As described in chapter 9 of this test report.

5.5.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. Set the center frequency on any frequency would be measure and set the frequency span to zero span.

5.5.3. Test Setup Layout :




5.5.4. Test Result : See spectrum analyzer plots below


- Temperature: 26°C
- Relative Humidity: 72 %
- Duty cycle of the equipment during the test X = 100%

Channel	Frequency (MHz)	Dwell Time (s)	Limits (s)	Plot Ref. No.
00	2402	0.137784250	0.4	1
39	2441	0.138585770	0.4	2
78	2480	0.138188677	0.4	3


Plot 1 (Channel 00)

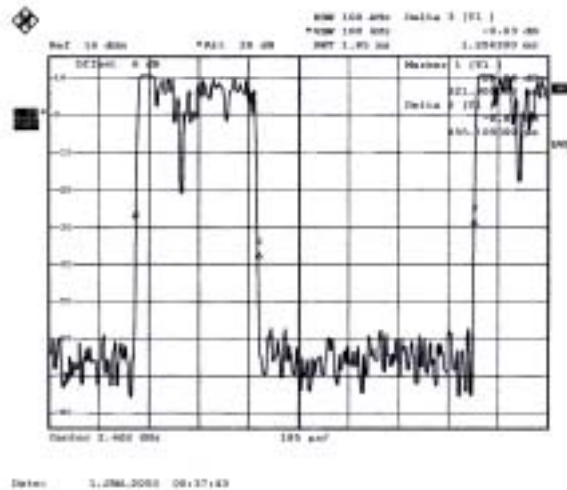

Plot 2 (Channel 39)

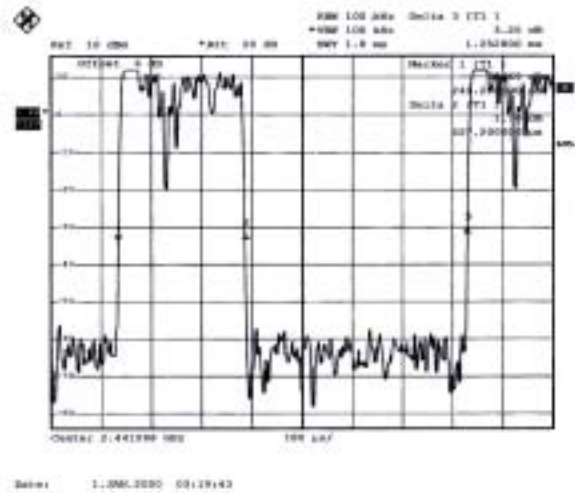

Plot 3 (Channel 78)

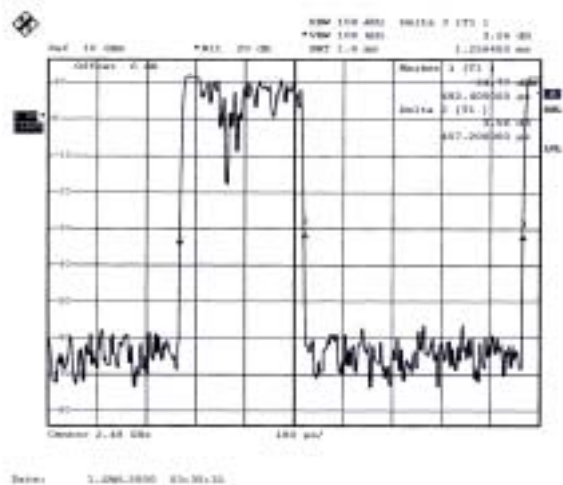

5.5.5. Test Configuration (EUT Operating Condition) :
Same as Section 5.2.5.

5.6. Output Power


5.6.1. Measuring Instruments :

As described in chapter 9 of this test report.

5.6.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The center frequency of the spectrum analyzer was set to the fundamental frequency and set RBW to 1MHz and VBW to 1MHz.

5.6.3. Test Setup Layout :




5.6.4. Test Result : See spectrum analyzer plots below


- Temperature: 26°C
- Relative Humidity: 72 %
- Duty cycle of the equipment during the test X = 100%

Channel	Frequency (MHz)	Measured Output Power (mWatt)	Measured Output Power (dBm)	Limits (Watt/dBm)
00	2402	12.35947433	10.92	1W/30 dBm
39	2441	15.41700453	11.88	1W/30 dBm
78	2480	14.02813705	11.47	1W/30 dBm

Plot 1 (Channel 00)

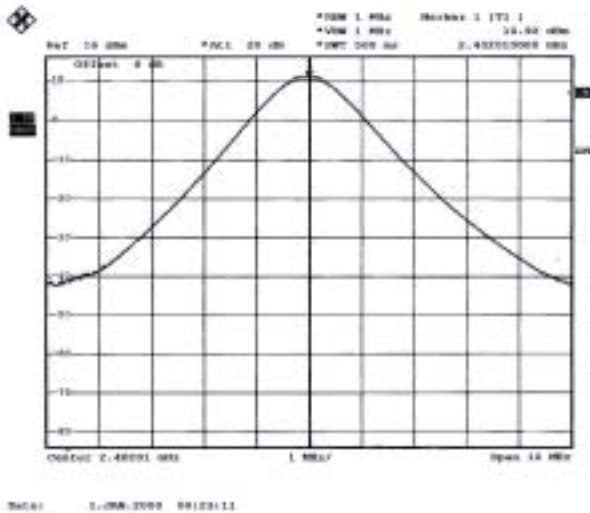

Plot 2 (Channel 39)

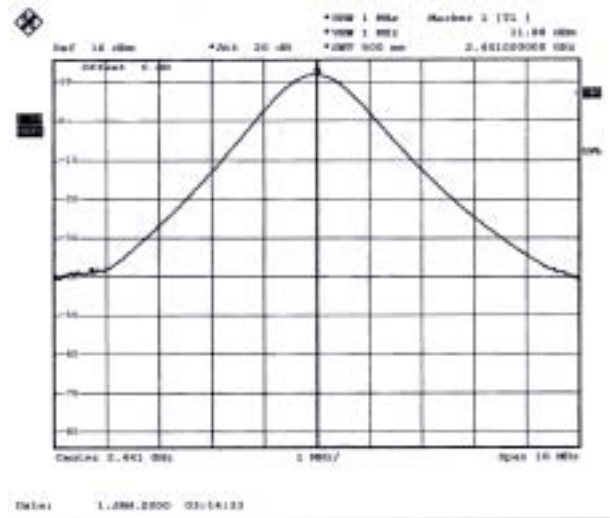

Plot 3 (Channel 78)



5.6.5. Test Configuration (EUT Operating Condition) :
Same as Section 5.2.5.

5.7. 100KHz Bandwidth of Frequency Band Edges

5.7.1. Measuring Instruments :

As described in chapter 9 of this test report.

5.7.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100 KHz bandwidth from band edge.
3. The band edges was measured and recorded.

5.7.3. Test Result :

Test Result in lower band (Channel 00) : Pass
Test Result in higher band(Channel 78) : Pass

5.7.4. Note on Band edge Emission


The band edge emission plot on page 31. shows 58.60dB delta between carrier maximum power and local maximum emission in the restricted band (2.4835GHz).

Polarity	The emission of carrier power strength (dB μ V/m)	The maximum field strength in restrict band (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Result
H	102.78	44.18	74.00	-29.82	Peak	Pass
H	78.31	19.71	54.00	-34.29	Average	Pass
V	103.67	45.07	74.00	-28.93	Peak	Pass
V	79.89	21.29	54.00	-32.71	Average	Pass


* The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band.

The spectrum analyzer plots are attached as below :

Plot 1 (Channel 00) :

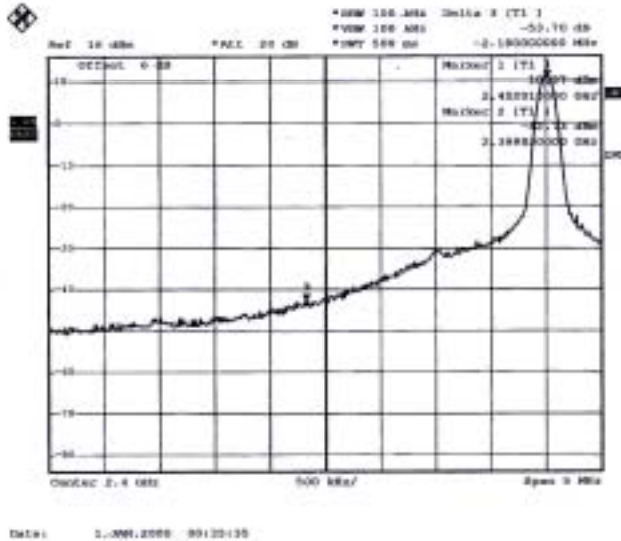

Plot 2 (Channel 78) :

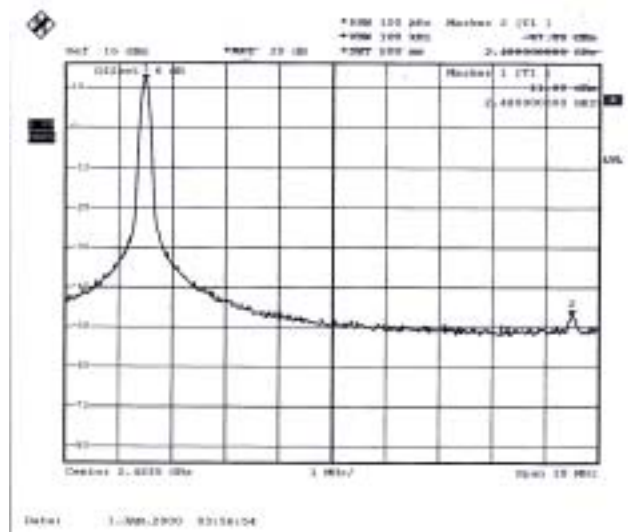

Comments : All emissions in those 100kHz bandwidth are attenuated more than 20dB from carrier maximum power.

5.7.5. Test Configuration (EUT Operating Condition) :

The software provided by client to enable the EUT under transmission condition continuously at lowest, and highest channel frequencies respectively.

5.8. Test of Conducted Emission

Conducted Emissions were measured from 150 KHz to 30 MHz with a bandwidth of 9 KHz and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

5.8.1. Major Measuring Instruments :

Test Receiver	(R&S ESCS 30)
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

5.8.2. Test Procedures :

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.8.3. Test Result of Conducted Emission :

- Test Mode: Mode 1
- Frequency Range of Test: from 150KHz to 30 MHz
- 6dB Bandwidth: 9KHz
- Temperature: 28.6°C
- Relative Humidity: 68 %
- Test Date: 2003-06-21

The test was passed at the minimum margin that marked by a frame in the following data

Site : CO01-HY
 Condition : CISPR CLASS-B 2003 2001/008 LINE
 EUT : BLUE TOOTH USB ADAPTOR
 Power : FROM SYSTEM
 Model : BT-0230M
 Memo : TX CH00 2402MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.163	50.35	-14.96	65.31	50.17	0.10	0.08	QP
2	0.163	44.72	-10.59	55.31	44.54	0.10	0.08	Average
3	0.193	41.01	-12.90	53.91	40.86	0.10	0.05	Average
4	0.193	47.65	-16.26	63.91	47.50	0.10	0.05	QP
5	0.475	31.67	-24.75	56.42	31.51	0.10	0.06	QP
6	0.475	27.85	-18.57	46.42	27.69	0.10	0.06	Average
7	0.755	32.98	-23.02	56.00	32.81	0.10	0.07	QP
8	0.755	25.66	-20.34	46.00	25.49	0.10	0.07	Average
9	1.040	33.03	-22.97	56.00	32.86	0.10	0.07	QP
10	1.040	26.11	-19.89	46.00	25.94	0.10	0.07	Average
11	4.529	24.67	-21.33	46.00	24.44	0.11	0.12	Average
12	4.529	31.62	-24.38	56.00	31.39	0.11	0.12	QP

Site : CO01-HY
 Condition : CISPR CLASS-B 2003 2001/008 NEUTRAL
 EUT : BLUE TOOTH USB ADAPTOR
 Power : FROM SYSTEM
 Model : BT-0230M
 Memo : TX CH00 2402MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.155	51.31	-14.44	65.75	51.12	0.10	0.09	QP
2	0.155	41.20	-14.55	55.75	41.01	0.10	0.09	Average
3	0.186	43.35	-10.86	54.21	43.20	0.10	0.05	Average
4	0.186	48.38	-15.83	64.21	48.23	0.10	0.05	QP
5	0.465	29.96	-26.65	56.61	29.80	0.10	0.06	QP
6	0.465	19.44	-27.17	46.61	19.28	0.10	0.06	Average
7	0.751	23.22	-22.78	46.00	23.05	0.10	0.07	Average
8	0.751	32.92	-23.08	56.00	32.75	0.10	0.07	QP
9	1.049	30.46	-25.54	56.00	30.29	0.10	0.07	QP
10	1.049	18.32	-27.68	46.00	18.15	0.10	0.07	Average
11	4.380	24.95	-21.05	46.00	24.64	0.20	0.11	Average
12	4.380	32.15	-23.85	56.00	31.84	0.20	0.11	QP

Test Engineer: 
 Joke Yang

- Test Mode: Mode 2
- Frequency Range of Test: from 150KHz to 30 MHz
- 6dB Bandwidth: 9KHz
- Temperature: 28.6°C
- Relative Humidity: 68 %
- Test Date: 2003-06-21

The test was passed at the minimum margin that marked by a frame in the following data

Site : C001-HY
 Condition : CISPR CLASS-B 2003 2001/008 LINE
 EUT : BLUE TOOTH USB ADAPTOR
 Power : FROM SYSTEM
 Model : BT-0230M
 Memo : TX CH39 2441MHz

	Freq	Level	Over	Limit	Read	Probe	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
		dBuV	dB	dBuV	dBuV	dB	dB	
1	0.160	51.50	-13.97	65.47	51.32	0.10	0.08	QP
2	0.160	45.63	-9.84	55.47	45.45	0.10	0.08	Average
3	0.190	43.47	-10.59	54.06	43.32	0.10	0.05	Average
4	0.190	49.10	-14.96	64.06	48.95	0.10	0.05	QP
5	0.651	29.70	-26.30	56.00	29.53	0.10	0.07	QP
6	0.651	21.07	-24.93	46.00	20.90	0.10	0.07	Average
7	0.756	23.99	-22.01	46.00	23.82	0.10	0.07	Average
8	0.756	33.50	-22.50	56.00	33.33	0.10	0.07	QP
9	1.045	32.85	-23.15	56.00	32.68	0.10	0.07	QP
10	1.045	25.80	-20.20	46.00	25.63	0.10	0.07	Average
11	4.307	25.71	-20.29	46.00	25.49	0.11	0.11	Average
12	4.307	32.34	-23.66	56.00	32.12	0.11	0.11	QP

Site : C001-HY
 Condition : CISPR CLASS-B 2003 2001/008 NEUTRAL
 EUT : BLUE TOOTH USB ADAPTOR
 Power : FROM SYSTEM
 Model : BT-0230M
 Memo : TX CH39 2441MHz

	Freq	Level	Over	Limit	Read	Probe	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
		dBuV	dB	dBuV	dBuV	dB	dB	
1	0.162	51.35	-14.01	65.36	51.17	0.10	0.08	QP
2	0.162	44.66	-10.70	55.36	44.48	0.10	0.08	Average
3	0.190	41.33	-22.69	64.02	41.18	0.10	0.05	
4	0.190	47.87	-16.15	64.02	47.72	0.10	0.05	QP
5	0.475	31.85	-24.57	56.42	31.69	0.10	0.06	QP
6	0.475	27.71	-18.71	46.42	27.55	0.10	0.06	Average
7	0.756	34.08	-21.92	56.00	33.91	0.10	0.07	QP
8	0.756	28.66	-17.34	46.00	28.49	0.10	0.07	Average
9	1.047	33.73	-22.27	56.00	33.56	0.10	0.07	QP
10	1.047	25.51	-20.49	46.00	25.34	0.10	0.07	Average
11	4.137	24.67	-21.33	46.00	24.36	0.20	0.11	Average
12	4.137	30.69	-25.31	56.00	30.38	0.20	0.11	QP

Test Engineer: 
 Joke Yang

- Test Mode: Mode 3
- Frequency Range of Test: from 150KHz to 30 MHz
- 6dB Bandwidth: 9KHz
- Temperature: 28.6°C
- Relative Humidity: 68 %
- Test Date: 2003-06-21


The test was passed at the minimum margin that marked by a frame in the following data

Site : CO01-HY
 Condition : CISPR CLASS-B 2003 2001/008 LINE
 EUT : BLUE TOOTH USB ADAPTOR
 Power : FROM SYSTEM
 Model : BT-0230M
 Memo : TX CH78 2480MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.159	51.56	-13.96	65.52	51.37	0.10	0.09	QP
2	0.159	41.75	-13.77	55.52	41.56	0.10	0.09	Average
3	0.190	45.81	-8.23	54.04	45.66	0.10	0.05	Average
4	0.190	49.20	-14.84	64.04	49.05	0.10	0.05	QP
5	0.473	31.69	-24.77	56.46	31.53	0.10	0.06	QP
6	0.473	25.23	-21.23	46.46	25.07	0.10	0.06	Average
7	0.755	27.70	-18.30	46.00	27.53	0.10	0.07	Average
8	0.755	33.20	-22.80	56.00	33.03	0.10	0.07	QP
9	1.042	33.41	-22.59	56.00	33.24	0.10	0.07	QP
10	1.042	25.74	-20.26	46.00	25.57	0.10	0.07	Average
11	4.443	25.90	-20.10	46.00	25.67	0.11	0.12	Average
12	4.443	31.84	-24.16	56.00	31.61	0.11	0.12	QP

Site : CO01-HY
 Condition : CISPR CLASS-B 2003 2001/008 NEUTRAL
 EUT : BLUE TOOTH USB ADAPTOR
 Power : FROM SYSTEM
 Model : BT-0230M
 Memo : TX CH78 2480MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.160	51.14	-14.32	65.46	50.96	0.10	0.08	QP
2	0.160	41.50	-13.96	55.46	41.32	0.10	0.08	Average
3	0.189	43.35	-10.74	54.09	43.20	0.10	0.05	Average
4	0.189	48.28	-15.81	64.09	48.13	0.10	0.05	QP
5	0.475	32.33	-24.10	56.43	32.17	0.10	0.06	QP
6	0.475	28.05	-18.38	46.43	27.89	0.10	0.06	Average
7	0.755	26.52	-19.48	46.00	26.35	0.10	0.07	Average
8	0.755	34.50	-21.50	56.00	34.33	0.10	0.07	QP
9	1.041	33.97	-22.03	56.00	33.80	0.10	0.07	QP
10	1.041	26.71	-19.29	46.00	26.54	0.10	0.07	Average
11	4.402	26.09	-19.91	46.00	25.77	0.20	0.12	Average
12	4.402	32.29	-23.71	56.00	31.97	0.20	0.12	QP

Test Engineer: 
 Joke Yang

5.9. Test of Radiated Emission

Radiated emissions from 30 MHz to 24.8 GHz were measured according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand, 0.8 meter above the ground plane, as shown in section 5.9.3 The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

5.9.1. Major Measuring Instruments

- Amplifier (ADVANTEST BB525C)
 - RF Gain 30 dB
 - Signal Input 9 KHz to 3 GHz

- Spectrum analyzer (R&S FSP40)
 - Attenuation 10 dB
 - Start Frequency 1 GHz
 - Stop Frequency 18 GHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 9 KHz to 40 GHz


- Amplifier (MITEQ AFS44)
 - RF Gain 40 dB
 - Signal Input 100 MHz to 26.5GHz

- Test Receiver (SCHAFFNER SCR3501)
 - Resolution Bandwidth 120 KHz
 - Frequency Band 9 K – 1 GHz
 - Quasi-Peak Detector ON for Quasi-Peak Mode
OFF for Peak Mode

5.9.2. Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.9.3. Typical Test Setup Layout of Radiated Emission

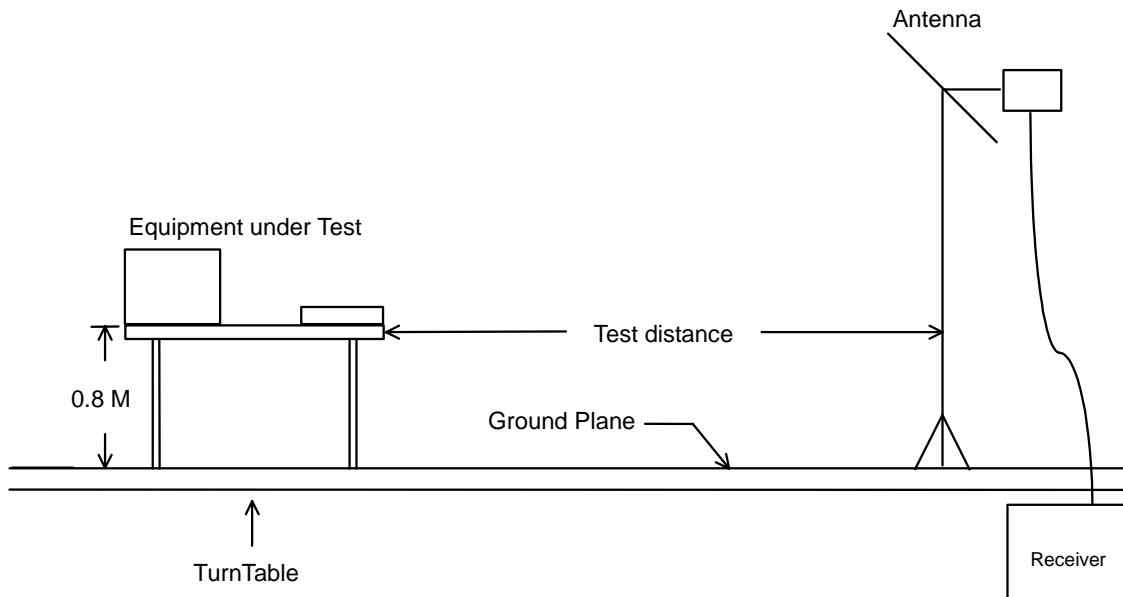

5.9.4. Test Result of Radiated Emission

- Test Mode: Mode 1
- Test Distance: 3 M
- Temperature: 26 °C
- Relative Humidity: 72 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level
- Test Date: 2003-06-09

The test was passed at the minimum margin that marked by the frame in the following test record

■ Spurious Emission

Site : 03CH02-HY
 Condition : 3m CH3-3MAT HORIZONTAL
 EUT : Bluetooth USB Adapter
 Power : For System
 MODEL : BT-0230M
 MEMO : F361001
 : TX CH00 2402MHz

	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
Freq	Level	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		cm	deg
1	33.780	31.68	-8.32	40.00	47.52	14.06	1.14 31.04 Peak	---	---
2	194.970	29.60	-13.90	43.50	48.96	8.86	2.50 30.72 Peak	---	---
3	245.730	30.15	-15.85	46.00	46.35	11.60	2.81 30.61 Peak	---	---

Site : 03CH02-HY
 Condition : 3m CH3-3MAT HORIZONTAL
 EUT : Bluetooth USB Adapter
 Power : For System
 MODEL : BT-0230M
 MEMO : F361001
 : TX CH00 2402MHz

	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
Freq	Level	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		cm	deg
1	397.300	37.31	-8.69	46.00	48.39	15.39	3.93 30.40 Peak	---	---
2	430.200	37.59	-8.41	46.00	48.16	15.83	3.88 30.28 Peak	---	---
3	931.400	38.02	-7.98	46.00	39.72	20.92	6.12 28.74 Peak	---	---

Site : 03CH02-HY
 Condition : 3m CH3-3MAT VERTICAL
 EUT : Bluetooth USB Adapter
 Power : For System
 MODEL : BT-0230M
 MEMO : F361001
 : TX CH00 2402MHz

	Over	Limit	Read	Probe	Cable	Preamp		Ant	Table
Freq	Level	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		cm	deg
1	44.580	29.92	-10.08	40.00	48.17	11.47	1.29 31.01 Peak	---	---
2	100.740	36.95	-7.15	43.50	53.81	11.85	2.18 30.99 Peak	---	---
3	108.300	32.86	-10.64	43.50	50.57	11.28	1.98 30.97 Peak	---	---

Site : 03CH02-HY
 Condition : 3a CH3-3MAT VERTICAL
 EUT : Bluetooth USB Adapter
 Power : For System
 MODEL : BT-0230M
 MEMO : F361001
 : TX CH00 2402MHz

Site : 03CH03-HY
 Condition : 3a HORN-ANT-10094-0417 HORIZONTAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH00 2402MHz
 : F361001

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1462.000	50.78	-23.22	74.00	57.99	26.71	4.60	38.52	Peak	---	---
2	1462.000	36.93	-17.07	54.00	44.14	26.71	4.60	38.52	Average	---	---
3	1590.000	51.10	-22.90	74.00	57.27	27.88	4.80	38.55	Peak	---	---
4	1590.000	37.65	-16.35	54.00	43.82	27.88	4.80	38.55	Average	---	---
5	2212.000	56.55	-17.45	74.00	59.02	30.38	5.71	38.56	Peak	---	---
8 X	2404.000	79.81	25.81	54.00	82.15	30.19	5.97	38.50	Average	---	---
9	2596.000	57.29	-16.71	74.00	59.05	30.08	6.26	38.10	Peak	---	---
10	2596.000	47.74	-6.26	54.00	49.50	30.08	6.26	38.10	Average	---	---

Site : 03CH03-HY
 Condition : 3a HORN-ANT-10094-0417 HORIZONTAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH00 2402MHz
 : F361001

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4804.000	58.04	-15.96	74.00	54.19	33.21	9.15	38.51	Peak	---	---
2	4804.000	48.93	-5.07	54.00	45.08	33.21	9.15	38.51	Average	---	---

Site : 03CH03-HY
 Condition : 3a HORN-ANT-10094-0417 HORIZONTAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH00 2402MHz
 : F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH00 2402MHz
: F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH00 2402MHz
: F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH00 2402MHz
: F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH00 2402MHz
: F361001

Site : 03CH03-HY
Condition : 3m 40G-HORN-02/12/21 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH00 2402MHz
: F361001

Site : 03CH03-HY
Condition : 3m 40G-HORN-02/12/21 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH00 2402MHz
: F361001

FCC TEST REPORT

Report No. : F361001

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 VERTICAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH00 2402MHz
 : F361001

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1588.000	55.27	-18.73	74.00	61.46	27.56	4.80	38.55	Peak	---	---
2	1588.000	38.91	-15.09	54.00	45.10	27.56	4.80	38.55	Average	---	---
3	2212.000	55.97	-18.03	74.00	58.44	30.38	5.71	38.56	Peak	---	---
4	2212.000	45.65	-8.35	54.00	48.12	30.38	5.71	38.56	Average	---	---
7	2596.000	59.81	-14.19	74.00	61.57	30.08	6.26	38.10	Peak	---	---
8	2596.000	49.47	-4.53	54.00	51.23	30.08	6.26	38.10	Average	100	100
9	2644.000	58.53	-15.47	74.00	60.05	30.07	6.34	37.93	Peak	---	---
10	2644.000	46.69	-7.31	54.00	48.21	30.07	6.34	37.93	Average	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 VERTICAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH00 2402MHz
 : F361001

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 VERTICAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH00 2402MHz
 : F361001

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 VERTICAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH00 2402MHz
 : F361001

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 VERTICAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH00 2402MHz
 : F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 VERTICAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH00 2402MHz
: F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 VERTICAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH00 2402MHz
: F361001

Site : 03CH03-HY
Condition : 3m 40G-HORN-02/12/21 VERTICAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH00 2402MHz
: F361001

Site : 03CH03-HY
Condition : 3m 40G-HORN-02/12/21 VERTICAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH00 2402MHz
: F361001

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor	Cable Loss	Reading (dBuV)	Limits (dBuV/m)	Emission (uV/m)	Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
2404.000	H	30.19	5.97	68.11	-	-	104.27	163493.32		Peak
2404.000	H	30.19	5.97	43.65	-	-	79.81	9783.63		A.V.
2404.000	V	30.19	5.97	72.50			108.66	271019.16		Peak
2404.000	V	30.19	5.97	45.68			81.84	12359.47		A.V.
4804.000	H	33.21	9.15	15.68	74.00	5012	58.04	797.99	-15.96	Peak
4804.000	H	33.21	9.15	6.57	54.00	501	48.93	279.58	-5.07	A.V.
4804.000	V	33.21	9.15	20.04	74.00	5012	62.40	1318.26	-11.60	Peak
4804.000	V	33.21	9.15	9.76	54.00	501	52.12	403.65	-1.88	A.V.
7206.000	V/H						-			Peak, A.V.
9608.000	V/H						-			Peak, A.V.
12010.000	V/H						-			Peak, A.V.
14412.000	V/H						-			Peak, A.V.
16814.000	V/H						-			Peak, A.V.
19216.000	V/H						-			Peak, A.V.
21618.000	V/H						-			Peak, A.V.
24020.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer: Jay
Jay Zhong

- Test Mode: Mode 2
- Test Distance: 3 M
- Temperature: 26 °C
- Relative Humidity: 72 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level
- Test Date: 2003-06-09

The test was passed at the minimum margin that marked by the frame in the following test record

■ Spurious Emission

Site : 03CH02-HY
 Condition : 3m CH3-3MAT HORIZONTAL
 EUT : Bluetooth USB Adapter
 Power : For System
 MODEL : BT-0230M
 MEMO : F361001
 : TX CH39 2441MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	194.970	29.76	-13.74	43.50	49.12	8.86	2.50	30.72	Peak	---	---
2	232.800	29.24	-16.76	46.00	46.05	10.78	3.04	30.63	Peak	---	---
3	245.730	29.53	-16.47	46.00	45.73	11.60	2.81	30.61	Peak	---	---

Site : 03CH02-HY
 Condition : 3m CH3-3MAT HORIZONTAL
 EUT : Bluetooth USB Adapter
 Power : For System
 MODEL : BT-0230M
 MEMO : F361001
 : TX CH39 2441MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	786.500	35.03	-10.97	46.00	38.85	20.24	5.20	29.26	Peak	---	---
2	884.500	35.74	-10.26	46.00	38.44	20.75	5.49	28.94	Peak	---	---
3	929.300	35.94	-10.06	46.00	37.67	20.92	6.10	28.75	Peak	---	---

Site : 03CH02-HY
 Condition : 3m CH3-3MAT VERTICAL
 EUT : Bluetooth USB Adapter
 Power : For System
 MODEL : BT-0230M
 MEMO : F361001
 : TX CH39 2441MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	44.850	28.80	-11.20	40.00	47.27	11.25	1.29	31.01	Peak	---	---
2	76.980	28.59	-11.41	40.00	50.58	7.32	1.69	31.00	Peak	---	---
3	165.810	31.54	-11.96	43.50	50.76	9.10	2.48	30.80	Peak	---	---

Site : 03CH02-HY
 Condition : 3m CH3-3MAT VERTICAL
 EUT : Bluetooth USB Adapter
 Power : For System
 MODEL : BT-0230M
 MEMO : F361001
 : TX CH39 2441MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	694.100	37.71	-8.29	46.00	43.32	19.26	4.85	29.72	Peak	---	---
2	786.500	36.55	-9.45	46.00	40.37	20.24	5.20	29.26	Peak	---	---
3	931.400	35.63	-10.37	46.00	37.33	20.92	6.12	28.74	Peak	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 HORIZONTAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH39 2441MHz
 : F361001

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1588.000	37.91	-16.09	54.00	44.10	27.56	4.80	38.55	Average	---	---
2	1588.000	51.66	-22.34	74.00	57.85	27.56	4.80	38.55	Peak	---	---
3	2252.000	46.73	-7.27	54.00	49.17	30.34	5.77	38.55	Average	---	---
4	2252.000	57.98	-16.02	74.00	60.42	30.34	5.77	38.55	Peak	---	---
7	2636.000	56.77	-17.23	74.00	58.33	30.07	6.33	37.96	Peak	---	---
8	2636.000	45.77	-8.23	54.00	47.33	30.07	6.33	37.96	Average	---	---
9	2684.000	57.00	-17.00	74.00	58.31	30.06	6.41	37.78	Peak	---	---
10	2684.000	46.09	-7.91	54.00	47.40	30.06	6.41	37.78	Average	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 HORIZONTAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH39 2441MHz
 : F361001

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 HORIZONTAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH39 2441MHz
 : F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH39 2441MHz
: F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH39 2441MHz
: F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH39 2441MHz
: F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH39 2441MHz
: F361001

Site : 03CH03-HY
Condition : 3m 40G-HORN-02/12/21 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH39 2441MHz
: F361001

Site : 03CH03-HY
Condition : 3m 40G-HORN-02/12/21 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH39 2441MHz
: F361001

FCC TEST REPORT

Report No. : F361001

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 VERTICAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH39 2441MHz
 : F361001

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1326.000	50.21	-23.79	74.00	58.12	26.15	4.40	38.46	Peak	---	---
2	1326.000	36.49	-17.51	54.00	44.40	26.15	4.40	38.46	Average	---	---
3	1590.000	56.18	-17.82	74.00	62.35	27.58	4.80	38.55	Peak	---	---
4	1590.000	39.55	-14.45	54.00	45.72	27.58	4.80	38.55	Average	---	---
5	2246.000	58.45	-15.55	74.00	60.89	30.35	5.76	38.55	Peak	---	---
6	2246.000	43.28	-10.72	54.00	45.72	30.35	5.76	38.55	Average	---	---
9	2636.000	58.05	-15.95	74.00	59.61	30.07	6.33	37.96	Peak	---	---
10	2636.000	47.71	-6.29	54.00	49.27	30.07	6.33	37.96	Average	100	109

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 VERTICAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH39 2441MHz
 : F361001

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 VERTICAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH39 2441MHz
 : F361001

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 VERTICAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH39 2441MHz
 : F361001

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 VERTICAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH39 2441MHz
 : F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 VERTICAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH39 2441MHz
: F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 VERTICAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH39 2441MHz
: F361001

Site : 03CH03-HY
Condition : 3m 40G-HORN-02/12/21 VERTICAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH39 2441MHz
: F361001

Site : 03CH03-HY
Condition : 3m 40G-HORN-02/12/21 VERTICAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH39 2441MHz
: F361001

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor	Reading (dBuV)	Limits (dBuV/m)	Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode
2438.000	H	30.15	37.77	-	-	73.94	4977.37	Peak
2438.000	H	30.15	66.26	-	-	102.43	132281.77	A.V.
2444.000	H	30.15	70.78	-	-	106.95	222587.10	Peak
2444.000	H	30.15	49.88	-	-	86.05	20067.81	A.V.
4884.000	V	33.46	23.03	74.00	5012	65.67	1920.88	-8.33 Peak
4884.000	V	33.46	6.69	54.00	501	49.33	292.75	-4.67 A.V.
4884.000	V	33.46	25.69	74.00	5012	68.33	2609.16	-5.67 Peak
4884.000	V	33.46	9.54	54.00	501	52.18	406.44	-1.82 A.V.
7323.000	V/H					-		Peak, A.V.
9764.000	V/H					-		Peak, A.V.
12205.000	V/H					-		Peak, A.V.
14646.000	V/H					-		Peak, A.V.
17087.000	V/H					-		Peak, A.V.
19528.000	V/H					-		Peak, A.V.
21969.000	V/H					-		Peak, A.V.
24410.000	V/H					-		Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer: Jay
Jay Zhong

- Test Mode: Mode 3
- Test Distance: 3 M
- Temperature: 26 °C
- Relative Humidity: 72 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level
- Test Date: 2003-06-09

The test was passed at the minimum margin that marked by the frame in the following test record

■ Spurious Emission

Site : 03CH02-HY
 Condition : 3m CH3-3MAT HORIZONTAL
 EUT : Bluetooth USB Adapter
 Power : For System
 MODEL : BT-0230M
 MEMO : F361001
 : TX CH78 2480MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	39.780	27.29	-12.71	40.00	43.13	14.06	1.14	31.04	Peak	---	---
2	165.810	32.29	-11.21	43.50	51.51	9.10	2.48	30.80	Peak	---	---
3	194.970	31.93	-11.57	43.50	51.29	8.86	2.50	30.72	Peak	---	---

Site : 03CH02-HY
 Condition : 3m CH3-3MAT HORIZONTAL
 EUT : Bluetooth USB Adapter
 Power : For System
 MODEL : BT-0230M
 MEMO : F361001
 : TX CH78 2480MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	397.300	39.74	-6.26	46.00	50.82	15.39	3.93	30.40	Peak	---	---
2	786.500	35.57	-10.43	46.00	39.39	20.24	5.20	29.26	Peak	---	---
3	931.400	37.16	-8.84	46.00	38.86	20.92	6.12	28.74	Peak	---	---

Site : 03CH02-HY
 Condition : 3m CH3-3MAT VERTICAL
 EUT : Bluetooth USB Adapter
 Power : For System
 MODEL : BT-0230M
 MEMO : F361001
 : TX CH78 2480MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	44.850	29.04	-10.96	40.00	47.51	11.25	1.29	31.01	Peak	---	---
2	77.250	28.59	-11.41	40.00	50.50	7.38	1.71	31.00	Peak	---	---
3	165.810	30.74	-12.76	43.50	49.96	9.10	2.48	30.80	Peak	---	---

Site : 03CH02-HY
 Condition : 3a CH3-3MAT VERTICAL
 EUT : Bluetooth USB Adapter
 Power : For System
 MODEL : BT-0230M
 MEMO : F361001
 : TX CH78 2480MHz

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	396.600	36.02	-9.98	46.00	47.13	15.38	3.91	30.40	Peak	---	---
2	696.200	35.91	-10.09	46.00	41.53	19.28	4.81	29.71	Peak	---	---
3	932.100	36.81	-9.19	46.00	38.49	20.93	6.13	28.74	Peak	---	---

Site : 03CH03-HY
 Condition : 3a HORN-ANT-10094-0417 HORIZONTAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH78 2480MHz
 : F361001

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1590.000	52.74	-21.26	74.00	58.91	27.58	4.80	38.55	Peak	---	---
2	1590.000	37.43	-16.57	54.00	43.60	27.58	4.80	38.55	Average	---	---
3	2238.000	56.70	-17.30	74.00	59.16	30.35	5.75	38.56	Peak	---	---
4	2238.000	43.90	-10.10	54.00	46.36	30.35	5.75	38.56	Average	---	---
5	2286.000	58.21	-15.79	74.00	60.64	30.30	5.81	38.54	Peak	---	---
6	2286.000	46.59	-7.41	54.00	49.02	30.30	5.81	38.54	Average	---	---
7 X	2478.000	102.78	28.78	74.00	105.08	30.11	6.06	38.47	Peak	---	---
10	2670.000	45.29	-8.71	54.00	46.68	30.06	6.39	37.04	Average	---	---

Site : 03CH03-HY
 Condition : 3a HORN-ANT-10094-0417 HORIZONTAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH78 2480MHz
 : F361001

Site : 03CH03-HY
 Condition : 3a HORN-ANT-10094-0417 HORIZONTAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH78 2480MHz
 : F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH78 2480MHz
: F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH78 2480MHz
: F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH78 2480MHz
: F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH78 2480MHz
: F361001

Site : 03CH03-HY
Condition : 3m 40G-HORN-02/12/21 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH78 2480MHz
: F361001

Site : 03CH03-HY
Condition : 3m 40G-HORN-02/12/21 HORIZONTAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH78 2480MHz
: F361001

FCC TEST REPORT

Report No. : F361001

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 VERTICAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH78 2480MHz
 : F361001

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1596.000	55.52	-18.48	74.00	61.64	27.62	4.81	38.55	Peak	---	---
2	1596.000	39.74	-14.26	54.00	45.86	27.62	4.81	38.55	Average	---	---
3	2238.000	56.29	-17.71	74.00	58.75	30.35	5.75	38.56	Peak	---	---
4	2238.000	44.87	-9.13	54.00	47.33	30.35	5.75	38.56	Average	---	---
5	2286.000	58.38	-15.62	74.00	60.81	30.30	5.81	38.54	Peak	---	---
6	2286.000	47.95	-6.05	54.00	50.38	30.30	5.81	38.54	Average	100	105
9	2670.000	58.70	-15.30	74.00	60.09	30.06	6.39	37.84	Peak	---	---
10	2670.000	47.79	-6.21	54.00	49.18	30.06	6.39	37.84	Average	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 VERTICAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH78 2480MHz
 : F361001

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 VERTICAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH78 2480MHz
 : F361001

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 VERTICAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH78 2480MHz
 : F361001

Site : 03CH03-HY
 Condition : 3m HORN-ANT-10094-0417 VERTICAL
 EUT : Blue Tooth USB Adapter
 Power : From system
 MODEL : BT-0230M
 MEMO : TX CH78 2480MHz
 : F361001

FCC TEST REPORT

Report No. : F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 VERTICAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH78 2480MHz
: F361001

Site : 03CH03-HY
Condition : 3m HORN-ANT-10094-0417 VERTICAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH78 2480MHz
: F361001

Site : 03CH03-HY
Condition : 3m 40G-HORN-02/12/21 VERTICAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH78 2480MHz
: F361001

Site : 03CH03-HY
Condition : 3m 40G-HORN-02/12/21 VERTICAL
EUT : Blue Tooth USB Adapter
Power : From system
MODEL : BT-0230M
MEMO : TX CH78 2480MHz
: F361001

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor	Cable Loss	Reading (dBuV)	Limits (dBuV/m)	Emission (uV/m)	Level (dBuV/m)	Margin (uV/m)	Detect (dB)	Mode
2478.000	H	30.11	6.06	66.61	-	-	102.78	137720.95		Peak
2478.000	H	30.11	6.06	42.14	-	-	78.31	8231.90		A.V.
2478.000	H	30.11	6.06	67.50	-	-	103.67	152580.84		Peak
2478.000	H	30.11	6.06	43.72	-	-	79.89	9874.16		A.V.
4964.000	V	33.72	9.21	17.54	74.00	5012	60.47	1055.60	-13.53	Peak
4964.000	V	33.72	9.21	7.02	54.00	501	49.95	314.41	-4.5	A.V.
4958.000	V	33.70	9.21	25.11	74.00	5012	68.02	2517.68	-5.98	Peak
4958.000	V	33.70	9.21	7.60	54.00	501	50.51	335.35	-3.49	A.V.
7440.000	V/H						-			Peak, A.V.
9920.000	V/H						-			Peak, A.V.
12400.000	V/H						-			Peak, A.V.
14880.000	V/H						-			Peak, A.V.
17360.000	V/H						-			Peak, A.V.
19840.000	V/H						-			Peak, A.V.
22320.000	V/H						-			Peak, A.V.
24800.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer: Jay
Jay Zhong

6. Antenna Requirements

The EUT use a undetachable antenna. It is considered meet antenna requirement of FCC.

6.1.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

6.1.2. Antenna Connected Construction

The maximum Gain antenna used in this product is dipole antenna.

7. EMI Suppression Component List

No EMI suppression components.

8. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	15.35	1.00	1000	24.30	3.89
35	13.63	1.08	2000	31.10	5.41
40	11.11	1.18	3000	29.60	6.92
45	10.59	1.24	4000	30.80	8.24
50	6.47	1.30	5000	34.20	9.22
55	5.83	1.38	6000	33.30	10.25
60	5.18	1.44	7000	37.80	11.61
65	4.81	1.52	8000	39.40	11.78
70	4.43	1.59	9000	38.40	12.59
75	5.10	1.68	10000	38.90	13.84
80	5.91	1.75	11000	41.10	14.64
85	7.33	1.77	12000	42.70	14.12
90	8.74	1.83	13000	43.90	16.01
95	9.05	1.85	14000	43.70	13.76
100	9.36	1.90	15000	43.40	14.30
110	9.65	2.01	16000	40.90	15.16
120	9.97	2.06	17000	44.40	15.88
130	10.51	2.16	18000	47.10	16.09
140	10.32	2.24	19000	37.60	16.98
150	9.42	2.34	20000	37.30	16.21
160	8.09	2.42	21000	37.00	20.13
170	7.43	2.56	22000	38.00	19.24
180	7.60	2.62	23000	38.70	19.64
190	7.43	2.67	24000	38.60	20.54
200	7.26	2.76	25000	38.90	20.14
220	9.11	2.92	14000	43.70	13.76
240	10.88	3.09	15000	43.40	14.30
260	11.75	3.23	16000	40.90	15.16
280	11.55	3.38	17000	44.40	15.88
300	11.36	3.51	18000	47.10	16.09
320	12.03	3.63	19000	37.60	16.98
340	12.69	3.73	20000	37.30	16.21
360	13.33	4.03	21000	37.00	20.13
380	14.00	4.00	22000	38.00	19.24
400	14.63	4.09	23000	38.70	19.64
450	15.33	4.31	24000	38.60	20.54
500	16.03	4.64	25000	38.90	20.14
550	16.65	5.09			
600	17.29	5.49			
650	17.64	5.82			
700	18.00	5.94			
750	18.39	6.16			
800	18.79	6.58			
850	19.10	6.72			
900	19.42	6.81			
950	19.58	7.10			
1000	19.75	7.41			

9. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9 KHz – 2.75 GHz	Jun. 12, 2003	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001-008	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001-009	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450 Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 ~ 60 Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9KHz~30MHz	Jan. 07, 2003	Conduction (CO01-HY)
50 ohm BNC type Terminal	NOBLE	50ohm	TM009	50 ohm	Apr. 24, 2003	Conduction (CO01-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz~1GHz 3m	Jun. 14, 2003	Radiation (03CH02-HY)
Spectrum Analyzer	R&S	FSP7	838858/039	9KHz – 7GHz	Jan. 20, 2003	Radiation (03CH02-HY)
Receiver	SCHAFFNER	SCR 3501	416	9 KHz –1GHz	Feb. 19, 2003	Radiation (03CH02-HY)
Amplifier	ADVANTEST	BB525C	CH300001	9KHz – 3GHz	Nov. 18, 2002	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2681	30MHz –2GHz	Dec. 21, 2002	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0 ~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB020	30MHz~1GHz	Jan. 02, 2003	Radiation (03CH02-HY)
Horn Antenna	COM-POWER	AH-118	10094	1GHz – 18GHz	Apr. 10, 2003	Radiation
Spectrum analyzer	R&S	FSP40	100004/040	9KHZ~40GHZ	Aug. 07, 2002	Radiation
Amplifier	MITEQ	AFS44	879981	100MHz~26.5GHz	Aug. 12, 2002	Radiation
RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Mar. 14, 2003	Radiation
Power meter	R&S	NRVS	100444	DC~40GHz	May 28, 2003	Conducted
Power sensor	R&S	NRV-Z55	100049	DC~40GHz	May 28, 2003	Conducted
Power Sensor	R&S	NRV-Z32	100057	30MHz-6GHz	May 28, 2003	Conducted
AC power source	HPC	HPA-500W	HPA-9100024	AC 0~300V	May 27, 2003	Conducted
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 2, 2002	Conducted

Calibration Interval of instruments listed above is one year.

10. Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement

Contribution	Probability Distribution	3m
Antenna factor calibration	normal(k=2)	±1
cable loss calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
Antenna Directivity	rectangular	±3
Antenna Factor V.S. Height	rectangular	±2
Antenna Factor Interpolation for Frequency	rectangular	±0.25
site imperfection	rectangular	±2
Mismatch Receiver VSWR $\Gamma_1=0.09$ Antenna VSWR $\Gamma_2=0.67$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	±0.54
combined standard uncertainty $U_e(y)$	normal	±2.7
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	±5.4

$U = \{((1/2)^2+(0.3/2)^2+(2^2+0.5^2+2^2+0.25^2+2^2)/3+(0.54)^2/2)\}^{1/2}=2.2$ for 10m test distance

$U = \{((1/2)^2+(0.3/2)^2+(2^2+3^2+2^2+0.25^2+2^2)/3+(0.54)^2/2)\}^{1/2}=2.7$ for 3m test distance

Uncertainty of Conducted Emission Measurement

Contribution	Probability Distribution	150KHz – 30MHz
Cable and I/P attenuator calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
LISN coupling specification	rectangular	±1.5
Transducer factor frequency interpolation	rectangular	±0.2
Mismatch Receiver VSWR $\Gamma_1=0.09$ LISN VSWR $\Gamma_2=0.33$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	0.2
combined standard uncertainty $U_e(y)$	normal	±1.66
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	±3.32

$U = \{(0.3/2)^2 + (2^2+1.5^2+0.2^2)/3+(0.2)^2/2\}^{1/2}=1.66$