



FCC TEST REPORT

REPORT NO.: RF911007R01

MODEL NO.: WL-1201M

RECEIVED: Oct. 07, 2002

TESTED: Dec. 24, 2002 ~ Jan. 27, 2003

APPLICANT: CC&C TECHNOLOGIES INC.

ADDRESS: 8F, 150, JIAN YI ROAD. CHUNG HO CITY,
TAIPEI COUNTRY, TAIWAN 235, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei, Taiwan,
R.O.C.

This test report consists of 58 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0



Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS.....	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST PROCEDURES.....	10
4.1.4	DEVIATION FROM TEST STANDARD.....	10
4.1.5	TEST SETUP	11
4.1.6	EUT OPERATING CONDITIONS.....	12
4.1.7	TEST RESULTS	13
4.2	RADIATED EMISSION MEASUREMENT.....	19
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	19
4.2.2	TEST INSTRUMENTS	20
4.2.3	TEST PROCEDURES.....	21
4.2.4	DEVIATION FROM TEST STANDARD.....	21
4.2.5	TEST SETUP	22
4.2.6	EUT OPERATING CONDITIONS.....	22
4.2.7	TEST RESULTS (A).....	23
4.2.8	TEST RESULTS (A).....	24
4.2.9	TEST RESULTS (B).....	27
4.2.10	TEST RESULTS (B).....	28
4.2.11	TEST RESULTS (C)	31
4.2.12	TEST RESULTS (C)	32
4.3	6dB BANDWIDTH MEASUREMENT.....	35
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	35
4.3.2	TEST INSTRUMENTS	35
4.3.3	TEST PROCEDURE.....	36
4.3.4	DEVIATION FROM TEST STANDARD.....	36
4.3.5	TEST SETUP	36



4.3.6	EUT OPERATING CONDITIONS.....	36
4.3.7	TEST RESULTS.....	37
4.4	MAXIMUM PEAK OUTPUT POWER.....	41
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	41
4.4.2	TEST INSTRUMENTS	41
4.4.3	TEST PROCEDURES.....	42
4.4.4	DEVIATION FROM TEST STANDARD.....	42
4.4.5	TEST SETUP	42
4.4.6	EUT OPERATING CONDITIONS.....	42
4.4.7	TEST RESULTS.....	43
4.5	POWER SPECTRAL DENSITY MEASUREMENT	44
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	44
4.5.2	TEST INSTRUMENTS	44
4.5.3	TEST PROCEDURE.....	45
4.5.4	DEVIATION FROM TEST STANDARD.....	45
4.5.5	TEST SETUP	45
4.5.6	EUT OPERATING CONDITIONS.....	45
4.5.7	TEST RESULTS.....	46
4.6	BAND EDGES MEASUREMENT	50
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	50
4.6.2	TEST INSTRUMENTS	50
4.6.3	TEST PROCEDURE.....	50
4.6.4	DEVIATION FROM TEST STANDARD.....	50
4.6.5	EUT OPERATING CONDITION.....	51
4.6.6	TEST RESULTS.....	51
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	54
6	INFORMATION ON THE TESTING LABORATORIES.....	58



1 CERTIFICATION

PRODUCT : WLAN USB Module
MODEL NO. : WL-1201M
BRAND : CC&C
APPLICANT : CC&C TECHNOLOGIES INC.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Dec. 24, 2002 ~ Jan. 27, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY: Kelsey Chang **DATE:** Jan. 28, 2003
Kelsey Chang

APPROVED BY: Dr. Alan Lane for **DATE:** Jan. 28, 2003
Dr. Alan Lane
Manager



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission Limit: 48dBuV	PASS	Meet the requirement of limit Minimum passing margin is -17.36dBuV at 0.170MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -2.00dBuV at 288.00 MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	WLAN USB Module
MODEL NO.	WL-1201M
POWER SUPPLY	5VDC from host equipment
MODULATION TYPE	BPSK, QPSK, CCK
RADIO TECHNOLOGY	DSSS
TRANSFER RATE	1/2/5.5/11Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	6.36dBm
ANTENNA TYPE	*Please refer to note 1
DATA CABLE	NA
I/O PORTS	USB
ASSOCIATED DEVICES	NA

NOTE:

1. There are three antennas provided to this EUT so there are 3 test results in this report for each antenna which details as following:

	ANTENNA TYPE	ANTENNA GAIN	TEST RESULT
1	Inverted F	1.5dBi	A
2	Patch	1.5dBi	B
3	Dipole	1.45dBi	C

2. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a WLAN USB Module. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 15, Subpart C. (15.247)

ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	Dell	PP01L	TW-09C748-12800-190-B220	FCC DOC APPROVED
2	PRINTER	EPSON	LQ-300+	DCGY017096	FCC DOC APPROVED
3	MODEM	ACEEX	1414	980020569	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS30	847793/022	Mar. 12, 2003
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH2-Z5	828075/003	July 23, 2003
ROHDE & SCHWARZ 200-A Four-line V-Network	ENV4200	830326/018	Oct. 30, 2003
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Nov. 29, 2003
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/018	Nov. 29, 2003
EMCO-L.I.S.N. (for peripheral)	3825/2	90031627	July 23, 2003
Software	Cond-V2M1	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C05.01	July 19, 2003
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-305	Feb. 20, 2003
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-306	Feb. 20, 2003

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. "*" : These equipment are used for conducted telecom port test only (if tested).
 3. The test was performed in ADT Shielded Room No. 5.
 4. The VCCI Site Registration No. is C-1093.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

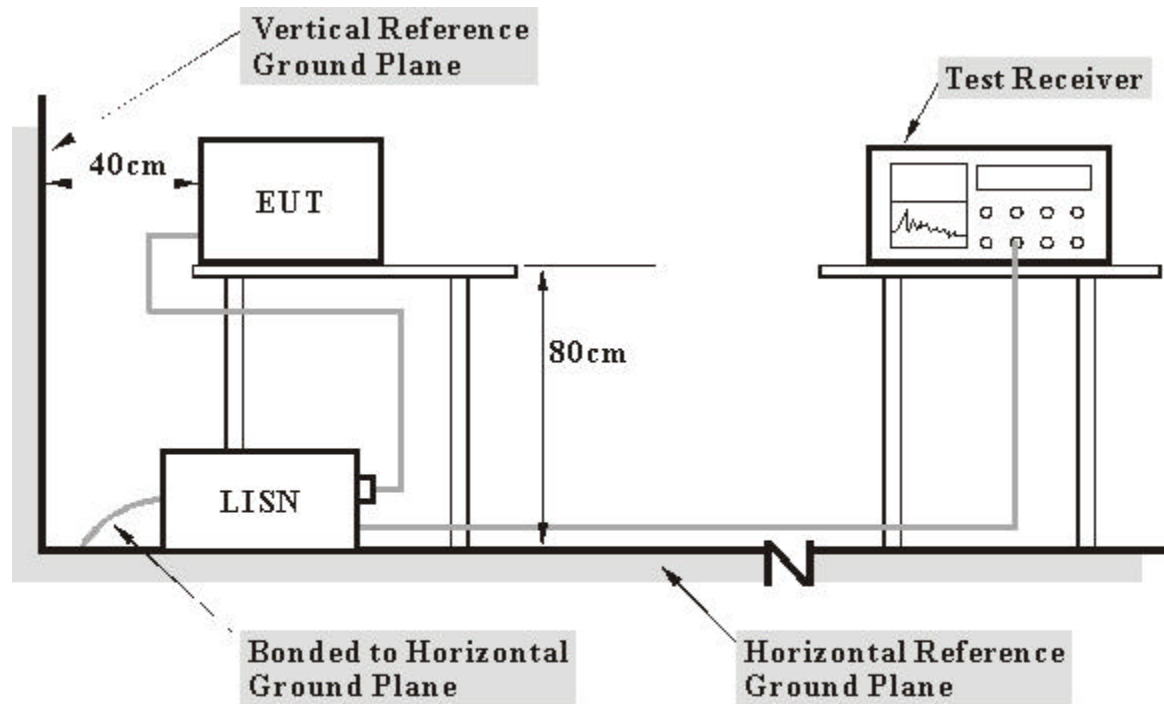

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT to a computer system placed on a testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer and the printer prints them on paper.




4.1.7 TEST RESULTS

EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	47.20	-	47.30	-	64.98	54.98	-17.68	-
2	0.228	0.10	42.08	-	42.18	-	62.52	52.52	-20.34	-
3	0.287	0.10	36.40	-	36.50	-	60.62	50.62	-24.12	-
4	3.770	0.38	27.42	-	27.80	-	56.00	46.00	-28.20	-
5	18.441	1.01	26.47	-	27.48	-	60.00	50.00	-32.52	-
6	23.020	1.16	20.13	-	21.29	-	60.00	50.00	-38.71	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

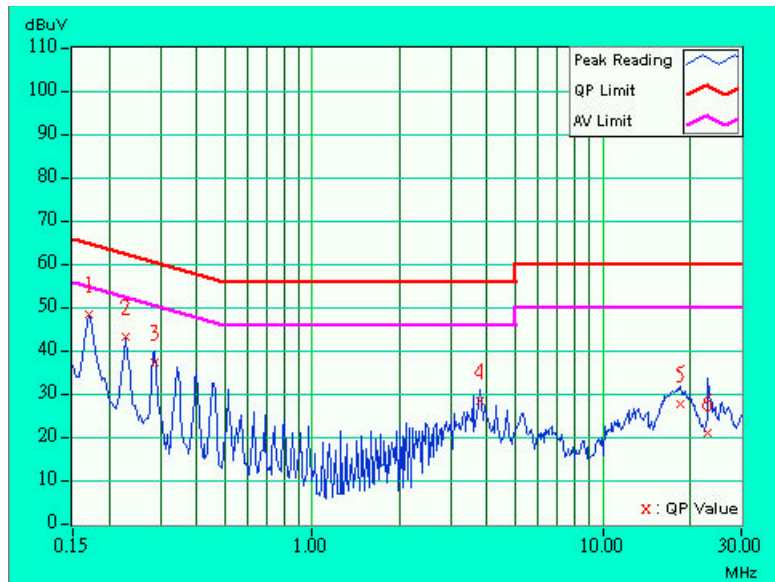




EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	45.96	-	46.06	-	64.79	54.79	-18.73	-
2	0.228	0.10	40.51	-	40.61	-	62.52	52.52	-21.91	-
3	0.287	0.10	33.85	-	33.95	-	60.62	50.62	-26.67	-
4	3.711	0.29	30.21	-	30.50	-	56.00	46.00	-25.50	-
5	17.137	0.63	26.51	-	27.14	-	60.00	50.00	-32.86	-
6	26.375	0.67	19.50	-	20.17	-	60.00	50.00	-39.83	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

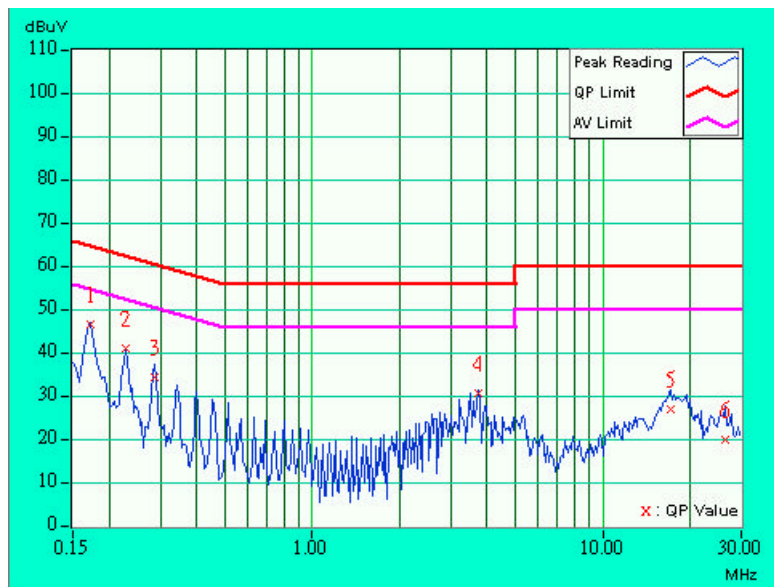




EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	47.05	-	47.15	-	64.79	54.79	-17.64	-
2	0.228	0.10	42.32	-	42.42	-	62.52	52.52	-20.10	-
3	0.287	0.10	36.42	-	36.52	-	60.62	50.62	-24.10	-
4	3.828	0.38	28.45	-	28.83	-	56.00	46.00	-27.17	-
5	13.141	0.73	25.43	-	26.16	-	60.00	50.00	-33.84	-
6	19.098	1.05	26.91	-	27.96	-	60.00	50.00	-32.04	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

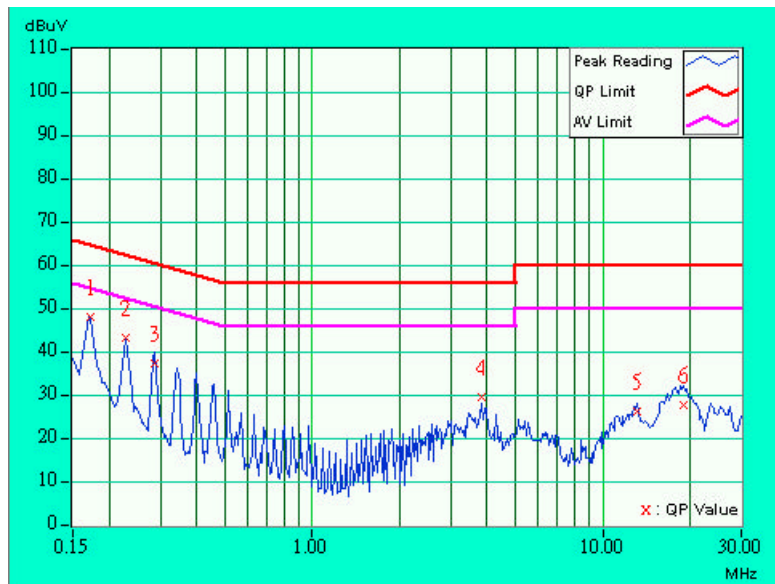




EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (Uv)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	46.53	-	46.63	-	64.98	54.98	-18.35	-
2	0.228	0.10	39.42	-	39.52	-	62.52	52.52	-23.00	-
3	0.287	0.10	36.58	-	36.68	-	60.62	50.62	-23.94	-
4	3.883	0.29	26.60	-	26.89	-	56.00	46.00	-29.11	-
5	18.875	0.73	24.99	-	25.72	-	60.00	50.00	-34.28	-
6	27.543	0.65	19.13	-	19.78	-	60.00	50.00	-40.22	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

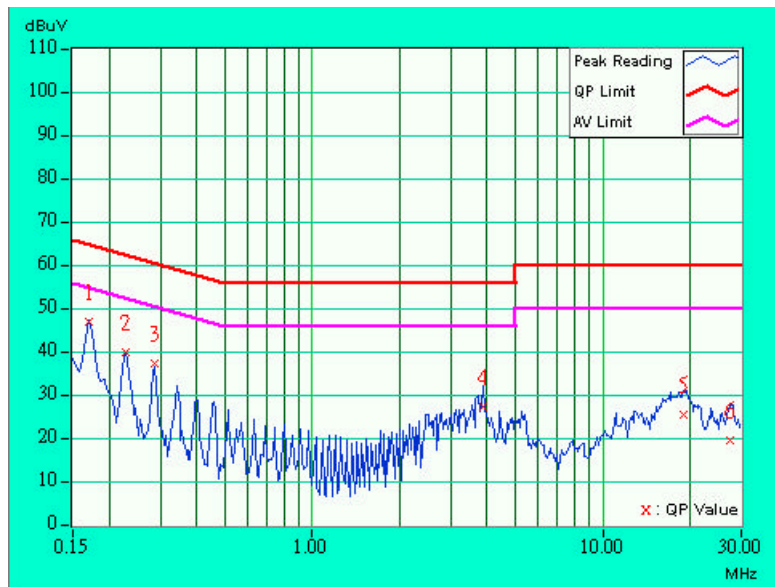




EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	47.52	-	47.62	-	64.98	54.98	-17.36	-
2	0.228	0.10	40.51	-	40.61	-	62.52	52.52	-21.91	-
3	0.287	0.10	36.46	-	36.56	-	60.62	50.62	-24.06	-
4	0.345	0.10	33.25	-	33.35	-	59.07	49.07	-25.72	-
5	3.828	0.38	26.84	-	27.22	-	56.00	46.00	-28.78	-
6	19.277	1.06	28.67	-	29.73	-	60.00	50.00	-30.27	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

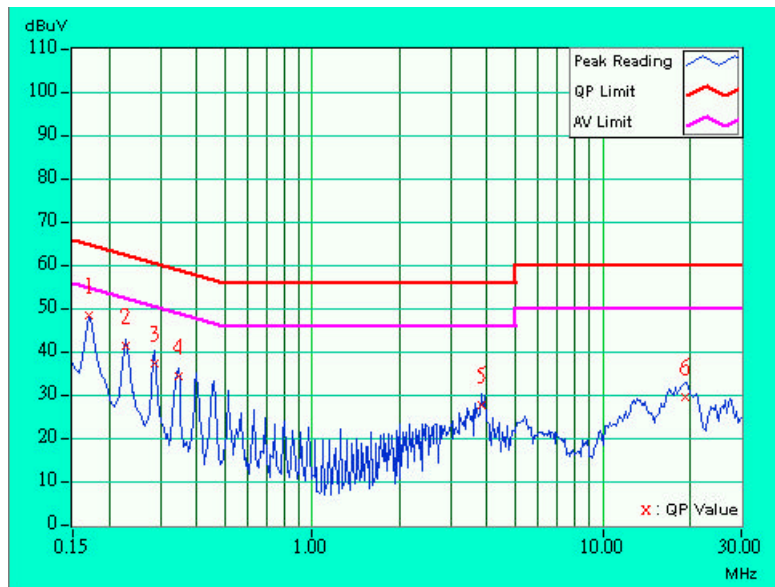




EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	46.10	-	46.20	-	64.79	54.79	-18.59	-
2	0.228	0.10	39.79	-	39.89	-	62.52	52.52	-22.63	-
3	0.287	0.10	34.03	-	34.13	-	60.62	50.62	-26.49	-
4	3.773	0.29	32.98	-	33.27	-	56.00	46.00	-22.73	-
5	13.207	0.46	24.01	-	24.47	-	60.00	50.00	-35.53	-
6	18.727	0.72	25.36	-	26.08	-	60.00	50.00	-33.92	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

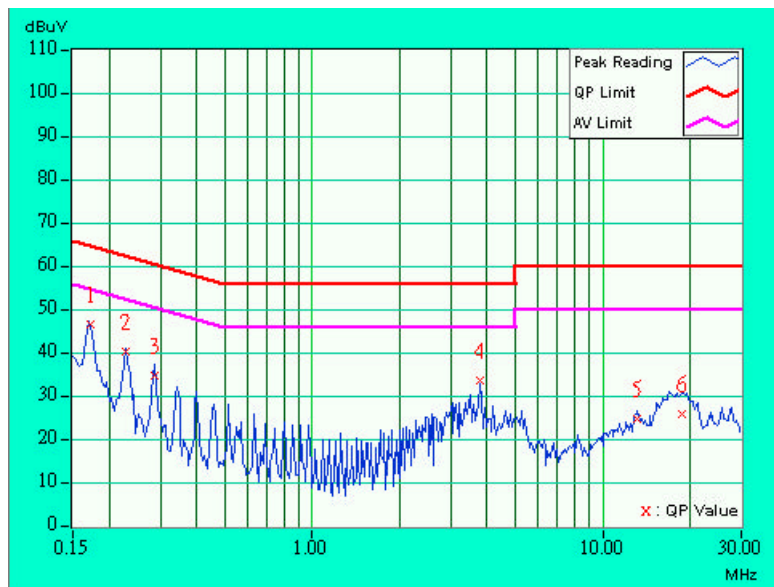



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	May 13, 2003
* HP Preamplifier	8447D	2944A08485	Apr. 29, 2003
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 27, 2003
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 2, 2003
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 3, 2003
* EMCO Horn Antenna	3115	9312-4192	April 9, 2003
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	ADT_Radiated_V5.09	NA	NA
* ANRITSU RF Switches	MP59B	M35046	July 11. 2003
* TIMES RF cable	LMR-600	CABLE-ST5-01	July. 11. 2003

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.
5. The VCCI Site Registration No. is R-1039.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

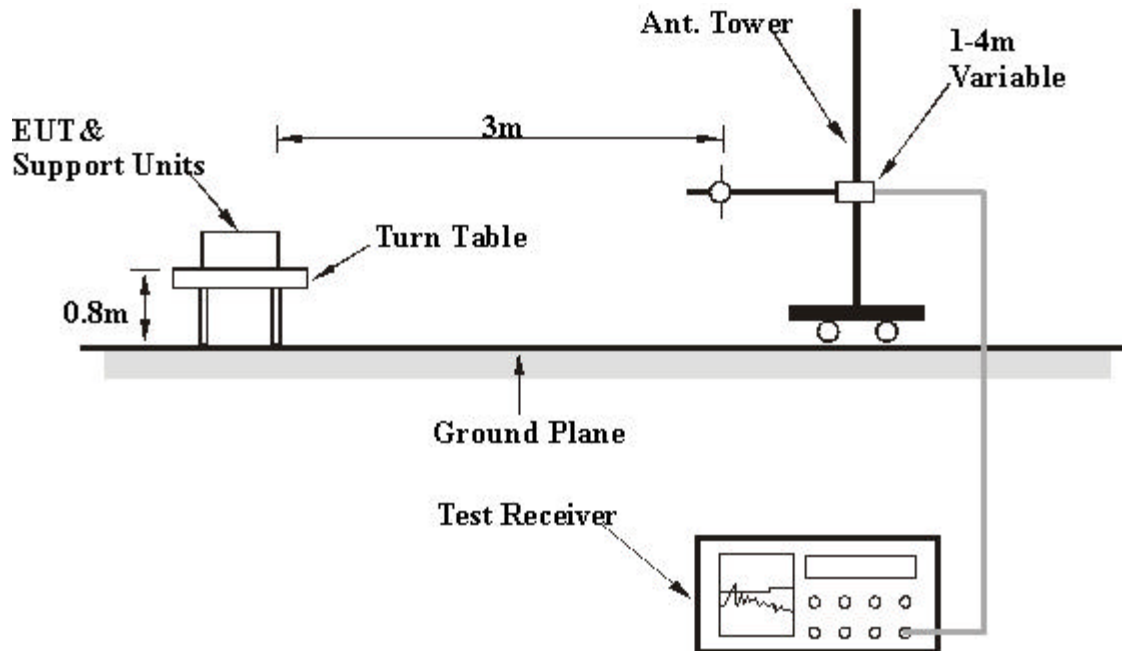

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS (A)

EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	144.00	31.0 QP	43.50	-12.50	1.22 H	35	16.90	14.10
2	176.00	31.0 QP	43.50	-12.50	1.11 H	15	18.30	12.70
3	216.03	37.0 QP	46.00	-9.00	1.43 H	58	22.10	14.90
4	288.00	42.0 QP	46.00	-4.00	1.30 H	155	22.30	19.70
5	308.00	36.0 QP	46.00	-10.00	1.21 H	25	15.80	20.20
6	324.00	38.5 QP	46.00	-7.50	1.39 H	51	17.90	20.60
7	336.00	35.0 QP	46.00	-11.00	1.15 H	182	14.00	21.00
8	352.00	42.0 QP	46.00	-4.00	1.29 H	192	20.60	21.40
9	396.00	36.8 QP	46.00	-9.20	1.54 H	132	13.90	22.90
10	432.00	37.0 QP	46.00	-9.00	1.04 H	51	13.50	23.50
11	440.00	34.2 QP	46.00	-11.80	1.08 H	35	10.60	23.60
12	572.00	29.5 QP	46.00	-16.50	1.12 H	151	3.00	26.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.00	35.4 QP	43.50	-8.10	1.27 V	130	20.10	15.30
2	132.00	32.0 QP	43.50	-11.50	1.15 V	161	17.30	14.70
3	144.00	31.0 QP	43.50	-12.50	1.28 V	146	16.90	14.10
4	192.00	34.0 QP	43.50	-9.50	1.12 V	88	21.00	13.00
5	216.00	36.0 QP	43.50	-7.50	1.05 V	113	21.10	14.90
6	288.00	39.0 QP	46.00	-7.00	1.20 V	215	19.30	19.70
7	336.00	37.5 QP	46.00	-8.50	1.03 V	258	16.50	21.00
8	352.00	35.0 QP	46.00	-11.00	1.25 V	66	13.60	21.40
9	432.00	32.8 QP	46.00	-13.20	1.72 V	245	9.30	23.50
10	528.00	32.0 QP	46.00	-14.00	1.17 V	131	6.50	25.50
11	748.00	35.0 QP	46.00	-11.00	1.17 V	251	5.70	29.30

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

4.2.8 TEST RESULTS (A)

EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	44.5 PK	74.00	-29.50	1.15 H	142	15.30	29.20
2	*2412.00	98.5 PK			1.11 H	265	66.60	31.80
2	*2412.00	95.0 AV			1.11 H	265	63.20	29.20
3	4076.00	47.5 PK	74.00	-26.50	1.18 H	71	10.30	37.20
4	4824.00	46.3 PK	74.00	-27.70	1.51 H	170	7.80	38.50
5	6113.00	50.5 PK	74.00	-23.50	1.10 H	106	10.00	40.50
5	6113.00	40.7 AV	54.00	-13.30	1.10 H	106	0.20	31.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	44.3 PK	74.00	-29.70	1.27 V	151	15.10	29.20
2	*2412.00	94.3 PK			1.20 V	256	62.50	31.80
2	*2412.00	91.6 AV			1.20 V	256	59.80	29.20
3	4076.00	46.7 PK	74.00	-27.30	1.18 V	59	9.50	37.20
4	4824.00	48.2 PK	74.00	-25.80	1.22 V	184	9.70	38.50
5	6113.00	50.9 PK	74.00	-23.10	1.08 V	64	10.40	40.50
5	6113.00	42.2 AV	54.00	-11.80	1.08 V	64	1.70	31.80

REMARKS:

- 1.Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
- 2.Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3.The other emission levels were very low against the limit.
- 4.Margin value = Emission level – Limit value.
- 5.“ * “ : Fundamental frequency.
- 6.The other emission levels were very low against the limit.



EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	50.5 PK	74.00	-23.50	1.08 H	149	21.30	29.20
2	*2437.00	96.5 PK			1.24 H	17	64.50	32.00
2	*2437.00	93.0 AV			1.24 H	17	61.00	32.00
3	4126.00	45.7 PK	74.00	-28.30	1.43 H	24	8.30	37.40
4	4874.00	44.2 PK	74.00	-29.80	1.18 H	45	5.60	38.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	42.3 PK	74.00	-31.70	1.22 V	17	13.10	29.20
2	*2437.00	91.2 PK			1.14 V	18	59.20	32.00
2	*2437.00	88.4 AV			1.14 V	18	56.40	29.20
3	4126.00	47.5 PK	74.00	-26.50	1.43 V	257	10.10	37.40
4	4874.00	48.0 PK	74.00	-26.00	1.31 V	41	9.40	38.60
5	6188.00	50.1 PK	74.00	-23.90	1.45 V	152	9.20	41.00
5	6188.00	40.3 AV	54.00	-13.70	1.45 V	152	-0.60	32.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.
 6. The other emission levels were very low against the limit.



EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	46.1 PK	74.00	-27.90	1.29 H	227	16.90	29.20
2	*2463.00	95.4 PK			1.13 H	262	63.40	32.10
2	*2463.00	92.6 AV			1.13 H	262	60.50	29.20
3	4176.00	45.6 PK	74.00	-28.40	1.21 H	281	8.50	37.10
4	4924.00	47.6 PK	74.00	-26.40	1.35 H	108	8.90	38.60
5	6263.00	51.1 PK	74.00	-22.90	1.26 H	314	9.80	41.30
5	6263.00	41.8 AV	54.00	-12.20	1.26 H	314	0.50	32.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	43.1 PK	74.00	-30.90	1.00 V	42	13.90	29.20
2	*2463.00	90.8 PK			1.54 V	204	58.70	32.10
2	*2463.00	87.8 AV			1.54 V	204	55.70	29.20
3	4176.00	46.1 PK	74.00	-27.90	1.24 V	15	9.00	37.10
4	4924.00	48.9 PK	74.00	-25.10	1.38 V	141	10.20	38.60
5	6263.00	52.2 PK	74.00	-21.80	1.22 V	174	10.90	41.30
5	6263.00	42.8 AV	54.00	-11.20	1.22 V	174	1.50	32.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.

4.2.9 TEST RESULTS (B)

EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.00	30.0 QP	43.50	-13.50	1.14 H	12	15.30	14.70
2	216.00	32.0 QP	43.50	-11.50	1.52 H	140	17.10	14.90
3	288.00	44.0 QP	46.00	-2.00	1.24 H	25	24.30	19.70
4	326.00	38.0 QP	46.00	-8.00	1.31 H	150	17.30	20.70
5	336.00	37.0 QP	46.00	-9.00	1.81 H	104	16.00	21.00
6	348.00	34.0 QP	46.00	-12.00	1.52 H	130	12.70	21.30
7	396.00	31.0 QP	46.00	-15.00	1.05 H	141	8.10	22.90
8	528.00	29.0 QP	46.00	-17.00	1.13 H	127	3.50	25.50
9	748.00	32.5 QP	46.00	-13.50	1.08 H	12	3.20	29.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.00	29.4 QP	43.50	-14.10	1.22 V	148	14.10	15.30
2	144.00	31.5 QP	43.50	-12.00	1.18 V	145	17.40	14.10
3	176.00	31.2 QP	43.50	-12.30	1.12 V	137	18.50	12.70
4	216.00	32.0 QP	43.50	-11.50	1.37 V	104	17.10	14.90
5	240.00	32.3 QP	46.00	-13.70	1.27 V	12	14.90	17.40
6	264.00	34.0 QP	46.00	-12.00	1.82 V	137	14.40	19.60
7	324.50	33.0 QP	46.00	-13.00	1.21 V	157	12.40	20.60
8	336.00	35.0 QP	46.00	-11.00	1.04 V	138	14.00	21.00
9	396.00	34.4 QP	46.00	-11.60	1.18 V	154	11.50	22.90
10	484.00	31.2 QP	46.00	-14.80	1.22 V	151	6.50	24.70
11	748.00	33.6 QP	46.00	-12.40	1.31 V	52	4.30	29.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The other emission levels were very low against the limit.

4.2.10 TEST RESULTS (B)

EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	43.3 PK	74.00	-30.70	1.71 H	45	14.10	29.20
2	*2412.00	98.6 PK			1.09 H	268	66.80	31.80
2	*2412.00	95.6 AV			1.09 H	268	63.80	29.20
3	4076.00	47.5 PK	74.00	-26.50	1.13 H	323	10.30	37.20
4	4824.00	49.7 PK	74.00	-24.30	1.30 H	44	11.20	38.50
5	6113.00	49.1 PK	74.00	-24.90	1.40 H	54	8.60	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	42.0 PK	74.00	-32.00	1.17 V	38	12.80	29.20
2	*2412.00	94.8 PK			1.26 V	245	63.00	31.80
2	*2412.00	91.7 AV			1.26 V	245	59.90	29.20
3	4076.00	46.5 PK	74.00	-27.50	1.13 V	32	9.30	37.20
4	4824.00	46.7 PK	74.00	-27.30	1.20 V	17	8.20	38.50
5	6113.00	49.7 PK	74.00	-24.30	1.48 V	121	9.20	40.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.



EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	45.0 PK	74.00	-29.00	1.15 H	24	15.80	29.20
2	*2437.00	96.8 PK			1.34 H	108	64.80	32.00
2	*2437.00	94.1 AV			1.34 H	108	62.10	29.20
3	4874.00	48.0 PK	74.00	-26.00	1.17 H	120	9.40	38.60
4	6188.00	49.5 PK	74.00	-24.50	1.20 H	41	8.50	41.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	41.6 PK	74.00	-32.40	1.42 V	248	12.40	29.20
2	*2437.00	92.5 PK			1.23 V	71	60.60	32.00
2	*2437.00	89.9 AV			1.23 V	71	58.00	29.20
3	4126.00	47.8 PK	74.00	-26.20	1.35 V	147	10.40	37.40
4	4874.00	49.8 PK	74.00	-24.20	1.14 V	130	11.20	38.60
5	6188.00	50.4 PK	74.00	-23.60	1.37 V	31	9.40	41.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.



EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	43.0 PK	74.00	-31.00	1.61 H	325	13.70	29.20
2	*2463.00	100.1 PK			1.26 H	200	68.00	32.10
2	*2463.00	94.2 AV			1.26 H	200	62.10	29.20
3	4176.00	47.4 PK	74.00	-26.60	1.51 H	247	10.30	37.10
4	4924.00	47.1 PK	74.00	-26.90	1.36 H	27	8.40	38.60
5	6264.00	50.4 PK	74.00	-23.60	1.33 H	271	9.10	41.30
5	6264.00	44.4 AV	54.00	-9.60	1.33 H	271	3.10	32.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	42.6 PK	74.00	-31.40	1.22 V	241	13.40	29.20
2	*2463.00	93.1 PK			1.11 V	24	61.00	32.10
2	*2463.00	90.3 AV			1.11 V	24	58.20	29.20
3	4176.00	46.6 PK	74.00	-27.40	1.28 V	237	9.50	37.10
4	4924.00	49.9 PK	74.00	-24.10	1.14 V	172	11.20	38.60
5	6263.00	51.2 PK	74.00	-22.80	1.13 V	41	9.90	41.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.

4.2.11 TEST RESULTS (C)

EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	288.00	41.8 QP	46.00	-4.20	1.13 H	274	25.20	16.60
2	308.00	32.5 QP	46.00	-13.50	1.16 H	21	15.60	16.90
3	312.00	35.0 QP	46.00	-11.00	1.48 H	21	18.00	17.00
4	336.00	41.2 QP	46.00	-4.80	1.37 H	208	23.80	17.40
5	352.00	38.4 QP	46.00	-7.60	1.44 H	214	20.70	17.70
6	360.00	38.2 QP	46.00	-7.80	1.39 H	32	20.20	18.00
7	384.00	36.2 QP	46.00	-9.80	1.26 H	102	17.50	18.70
8	396.00	31.5 QP	46.00	-14.50	1.41 H	62	12.50	19.00
9	480.00	32.0 QP	46.00	-14.00	1.01 H	24	11.40	20.60
10	528.00	31.7 QP	46.00	-14.30	1.05 H	152	10.60	21.10
11	748.00	31.2 QP	46.00	-14.80	1.48 H	271	7.10	24.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.00	37.7 QP	43.50	-5.80	1.42 V	35	24.20	13.50
2	168.00	34.2 QP	43.50	-9.30	1.15 V	95	23.50	10.70
3	192.00	31.5 QP	43.50	-12.00	1.15 V	35	20.70	10.80
4	216.00	32.0 QP	43.50	-11.50	1.18 V	35	19.60	12.40
5	240.00	35.6 QP	46.00	-10.40	1.09 V	181	20.90	14.70
6	288.00	36.3 QP	46.00	-9.70	1.15 V	27	19.70	16.60
7	308.00	27.8 QP	46.00	-18.20	1.10 V	325	10.80	16.90
8	336.00	38.0 QP	46.00	-8.00	1.24 V	181	20.60	17.40
9	352.00	37.5 QP	46.00	-8.50	1.55 V	327	19.80	17.70
10	528.00	35.7 QP	46.00	-10.30	1.20 V	322	14.60	21.10
11	748.00	30.5 QP	46.00	-15.50	1.35 V	24	6.40	24.10
12	792.00	29.5 QP	46.00	-16.50	1.28 V	42	4.70	24.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The other emission levels were very low against the limit.



4.2.12 TEST RESULTS (C)

EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	44.6 PK	74.00	-29.40	1.58 H	5	15.40	29.20
2	*2412.00	91.5 PK			1.29 H	228	59.70	31.80
2	*2412.00	83.5 AV			1.29 H	228	51.70	29.20
3	4076.00	47.7 PK	74.00	-26.30	1.15 H	248	10.50	37.20
4	4824.00	49.1 PK	74.00	-24.90	1.27 H	181	10.60	38.50
5	6113.00	49.7 PK	74.00	-24.30	1.10 H	328	9.20	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	42.3 PK	74.00	-31.70	1.48 V	34	13.10	29.20
2	*2412.00	101.2 PK			1.02 V	329	69.30	31.80
2	*2412.00	94.8 AV			1.02 V	329	63.00	29.20
3	4076.00	47.3 PK	74.00	-26.70	1.35 V	110	10.10	37.20
4	4824.00	48.1 PK	74.00	-25.90	1.34 V	35	9.60	38.50
5	6113.00	51.5 PK	74.00	-22.50	1.13 V	108	11.00	40.50
5	6113.00	42.2 AV	54.00	-11.80	1.13 V	108	1.70	31.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.



EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	44.1 PK	74.00	-29.90	1.14 H	25	14.90	29.20
2	*2437.00	90.2 PK			1.24 H	142	58.20	32.00
2	*2437.00	82.4 AV			1.24 H	142	50.40	29.20
3	4126.00	46.7 PK	74.00	-27.30	1.28 H	138	9.30	37.40
4	4874.00	48.0 PK	74.00	-26.00	1.27 H	141	9.40	38.60
5	6188.00	50.4 PK	74.00	-23.60	1.38 H	161	9.40	41.00
5	6188.00	42.5 AV	54.00	-11.50	1.38 H	161	1.50	32.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	42.1 PK	74.00	-31.90	1.27 V	15	12.90	29.20
2	*2437.00	97.5 PK			1.18 V	26	65.50	32.00
2	*2437.00	90.8 AV			1.18 V	26	58.80	29.20
3	4126.00	47.7 PK	74.00	-26.30	1.08 V	91	10.30	37.40
4	4874.00	47.0 PK	74.00	-27.00	1.83 V	156	8.40	38.60
5	6188.00	51.3 PK	74.00	-22.70	1.67 V	194	10.40	41.00
5	6188.00	43.1 AV	54.00	-10.90	1.67 V	194	2.20	32.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.



EUT	WLAN USB Module	MODEL	WL-1201M
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	41.8 PK	74.00	-32.20	1.42 H	128	12.60	29.20
2	*2463.00	91.0 PK			1.13 H	93	58.90	32.10
2	*2463.00	83.6 AV			1.13 H	93	51.50	29.20
3	4176.00	46.4 PK	74.00	-27.60	1.46 H	3	9.30	37.10
4	4924.00	48.4 PK	74.00	-25.60	1.14 H	24	9.70	38.60
5	6263.00	48.9 PK	74.00	-25.10	1.21 H	43	7.60	41.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	42.3 PK	74.00	-31.70	1.57 V	127	13.10	29.20
2	*2463.00	97.8 PK			1.25 V	19	65.70	32.10
2	*2463.00	91.1 AV			1.25 V	19	59.00	29.20
3	4176.00	46.4 PK	74.00	-27.60	1.36 V	181	9.30	37.10
4	4924.00	46.0 PK	74.00	-28.00	1.04 V	15	7.40	38.60
5	6263.00	51.4 PK	74.00	-22.60	1.37 V	14	10.10	41.30
5	6263.00	42.4 AV	54.00	-11.60	1.37 V	14	1.10	32.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS

EUT	WLAN USB Module	MODEL	WL-1201M
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	18 deg. C, 65%RH, 1005 hPa
TESTED BY: Steven Lu			

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.142	0.5	PASS
6	2437	10.020	0.5	PASS
11	2462	11.142	0.5	PASS




CH1

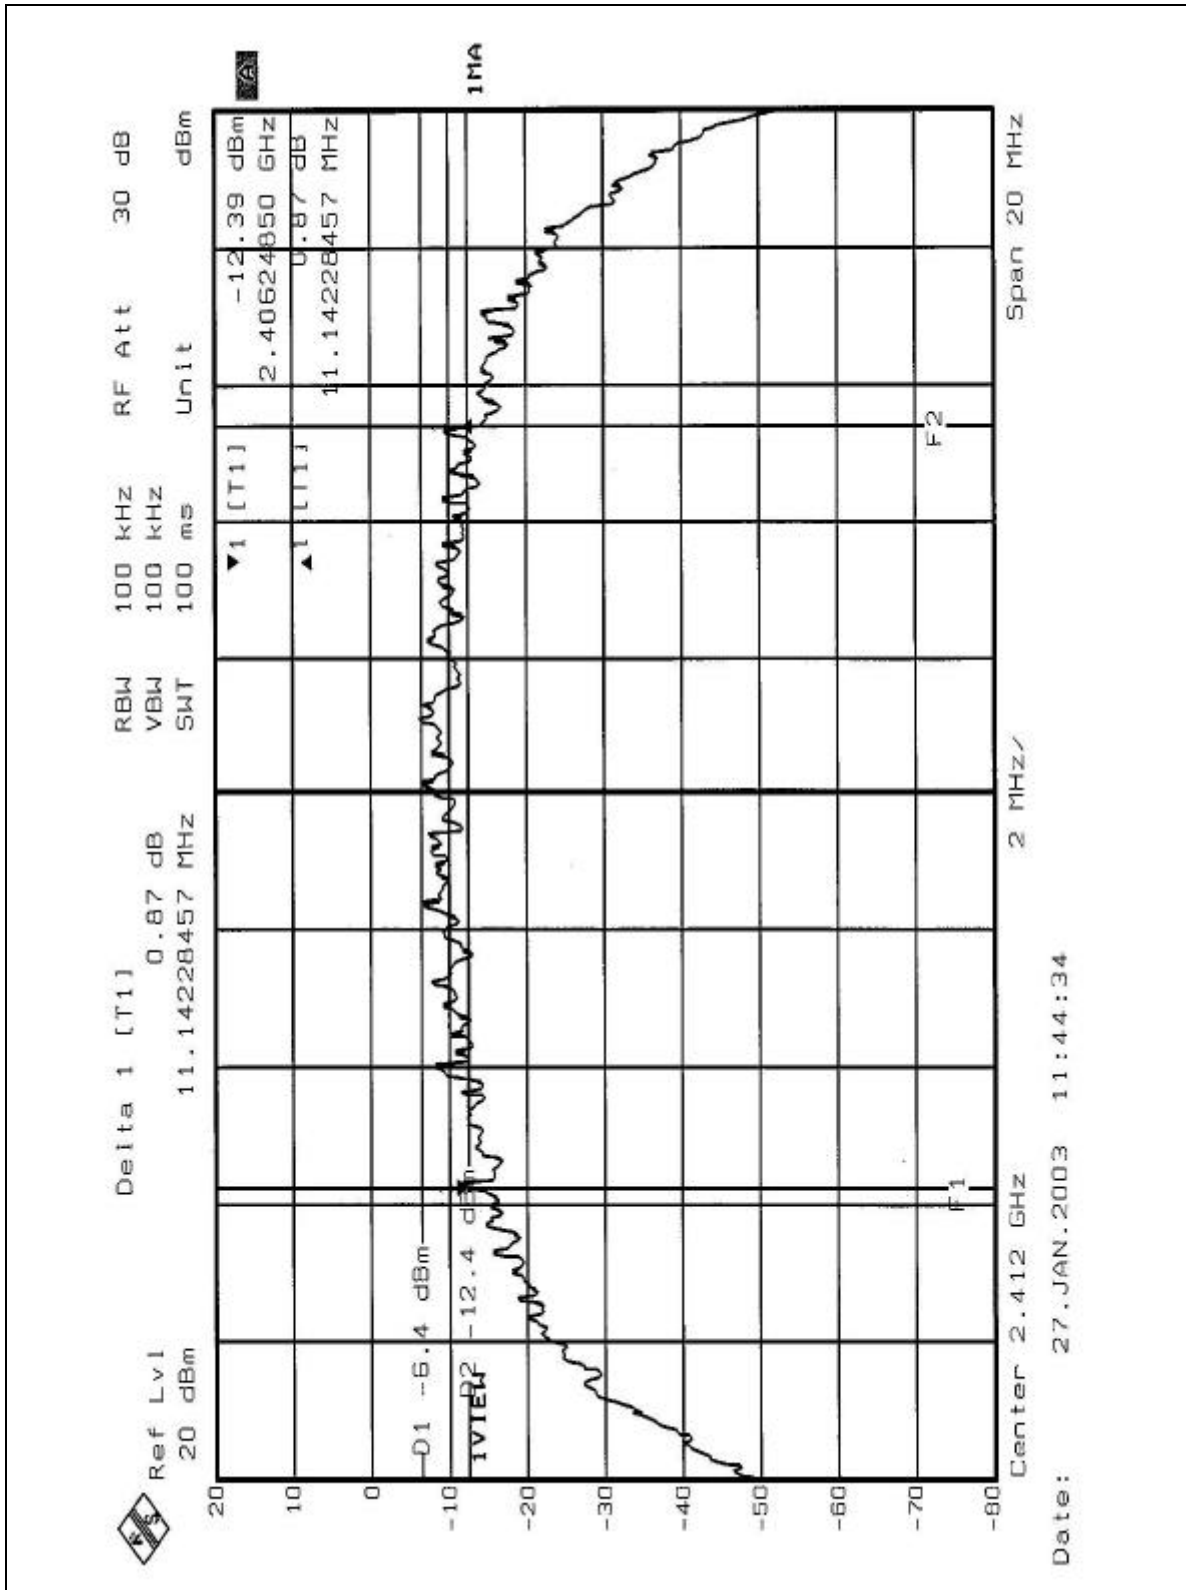




CH6

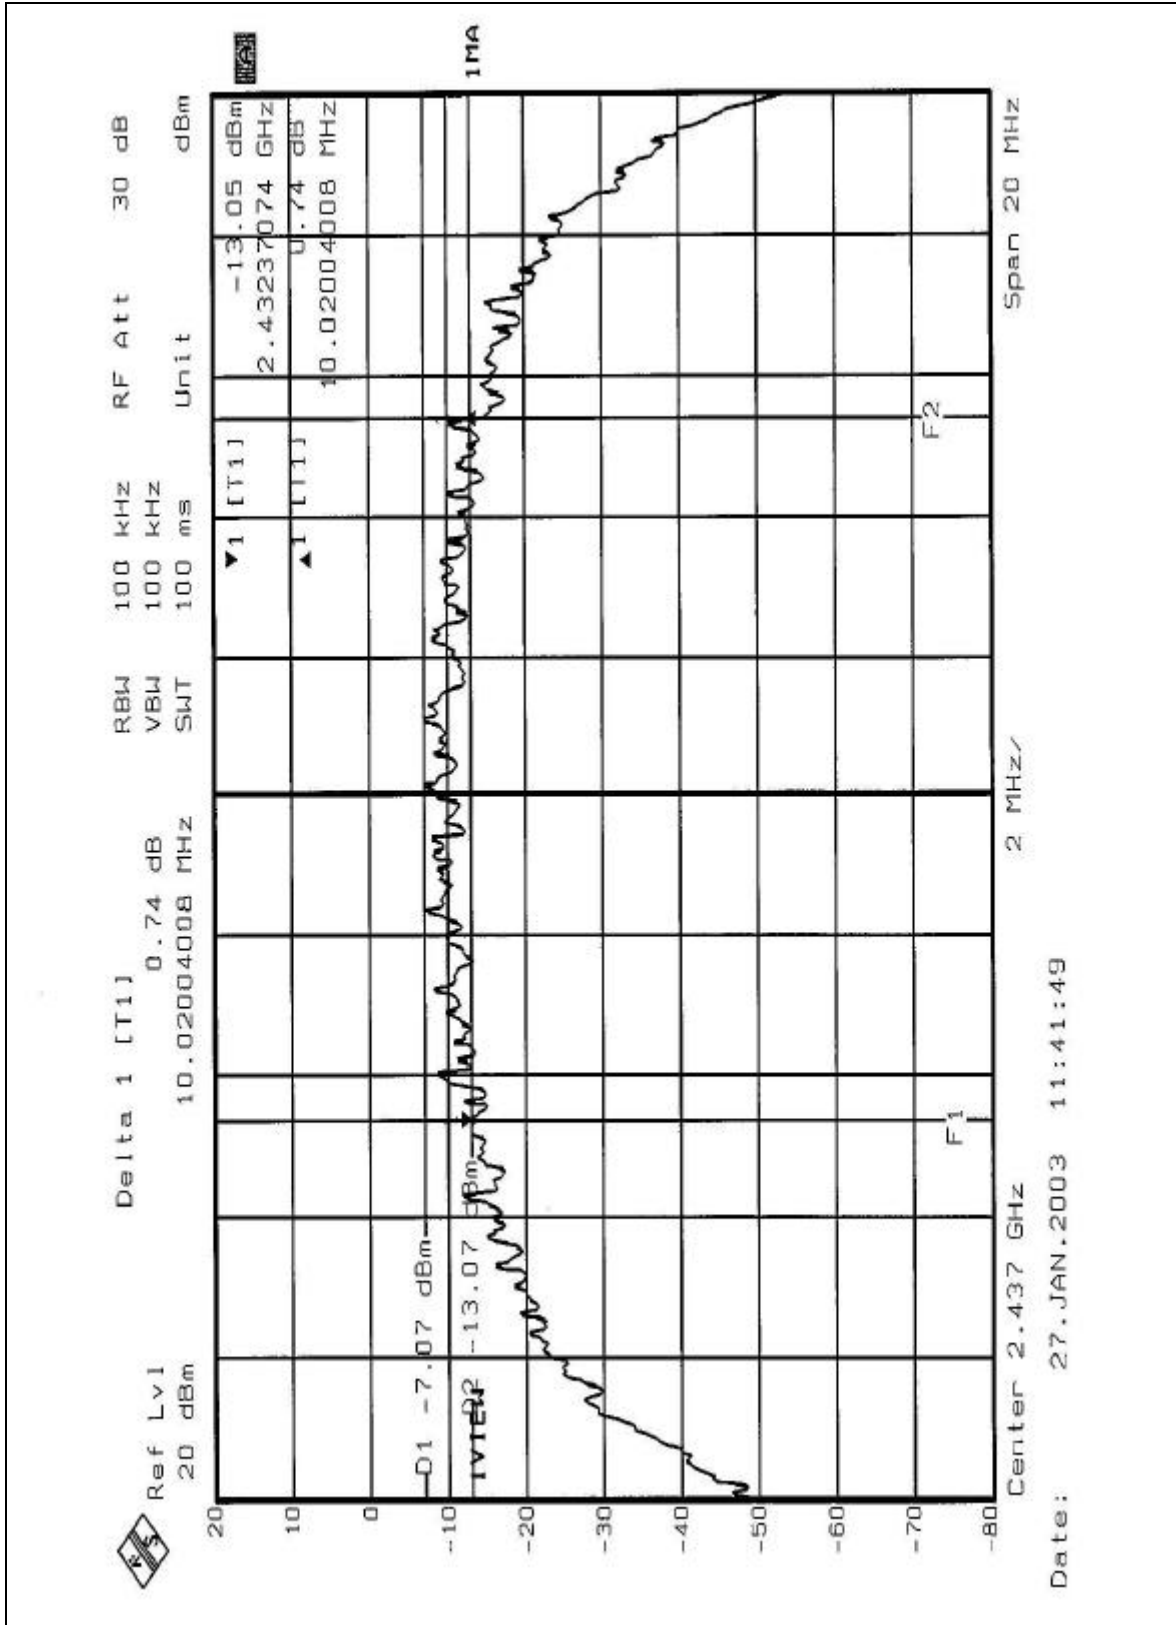



CH11

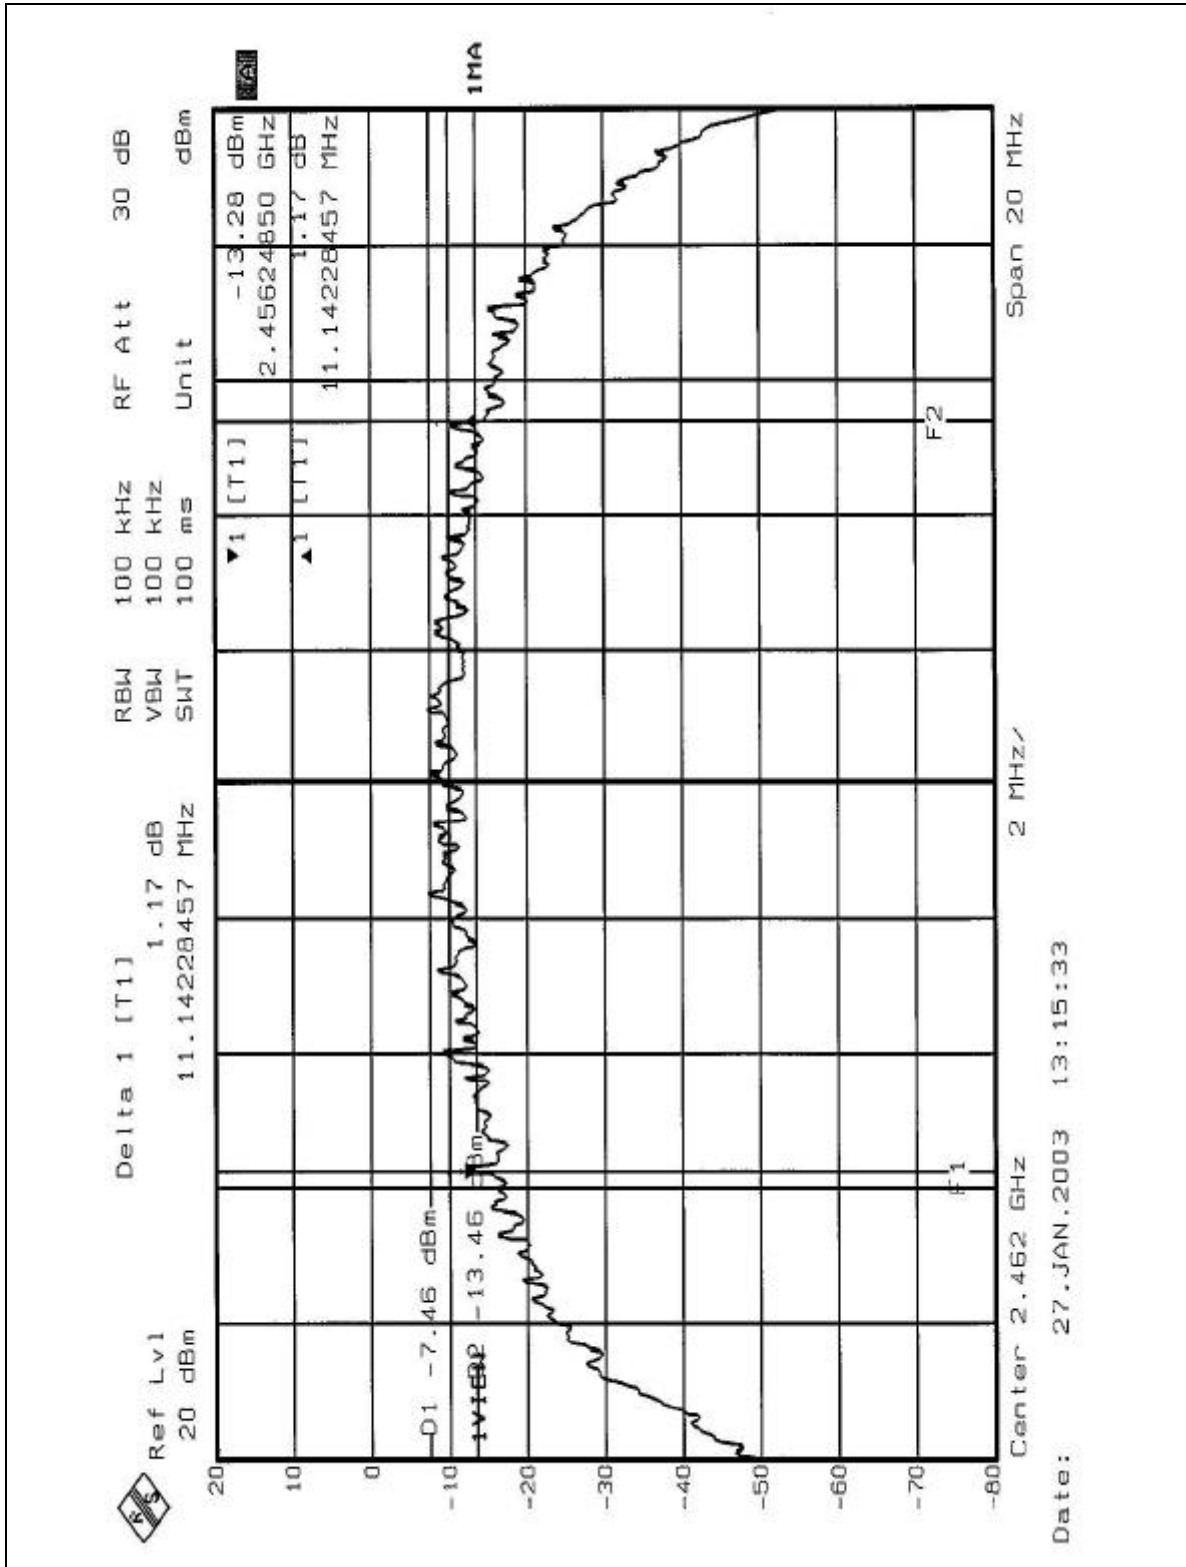



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
POWER METER	E4416A	GB41291118	Jul. 30, 2003
PEAK POWER SENSOR	E9327A	US40440722	Jul. 30, 2003

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

The transmitter output was connected to the peak power meter.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

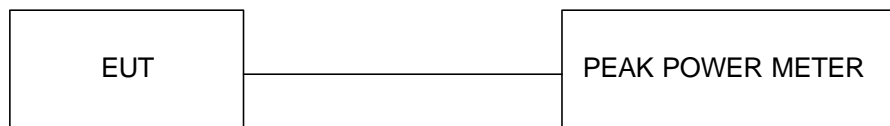

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS

EUT	WLAN USB Module	MODEL	WL-1201M
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	18 deg. C, 65%RH, 1005 hPa
TESTED BY: Hardaway Lee			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	6.36	30	PASS
6	2437	5.86	30	PASS
11	2462	4.79	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6




4.5.7 TEST RESULTS

EUT	WLAN USB Module	MODEL	WL-1201M
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	18 deg. C, 65%RH, 1005 hPa
TESTED BY: Hardaway Lee			

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-20.08	8	PASS
6	2437	-20.93	8	PASS
11	2462	-21.97	8	PASS




CH1

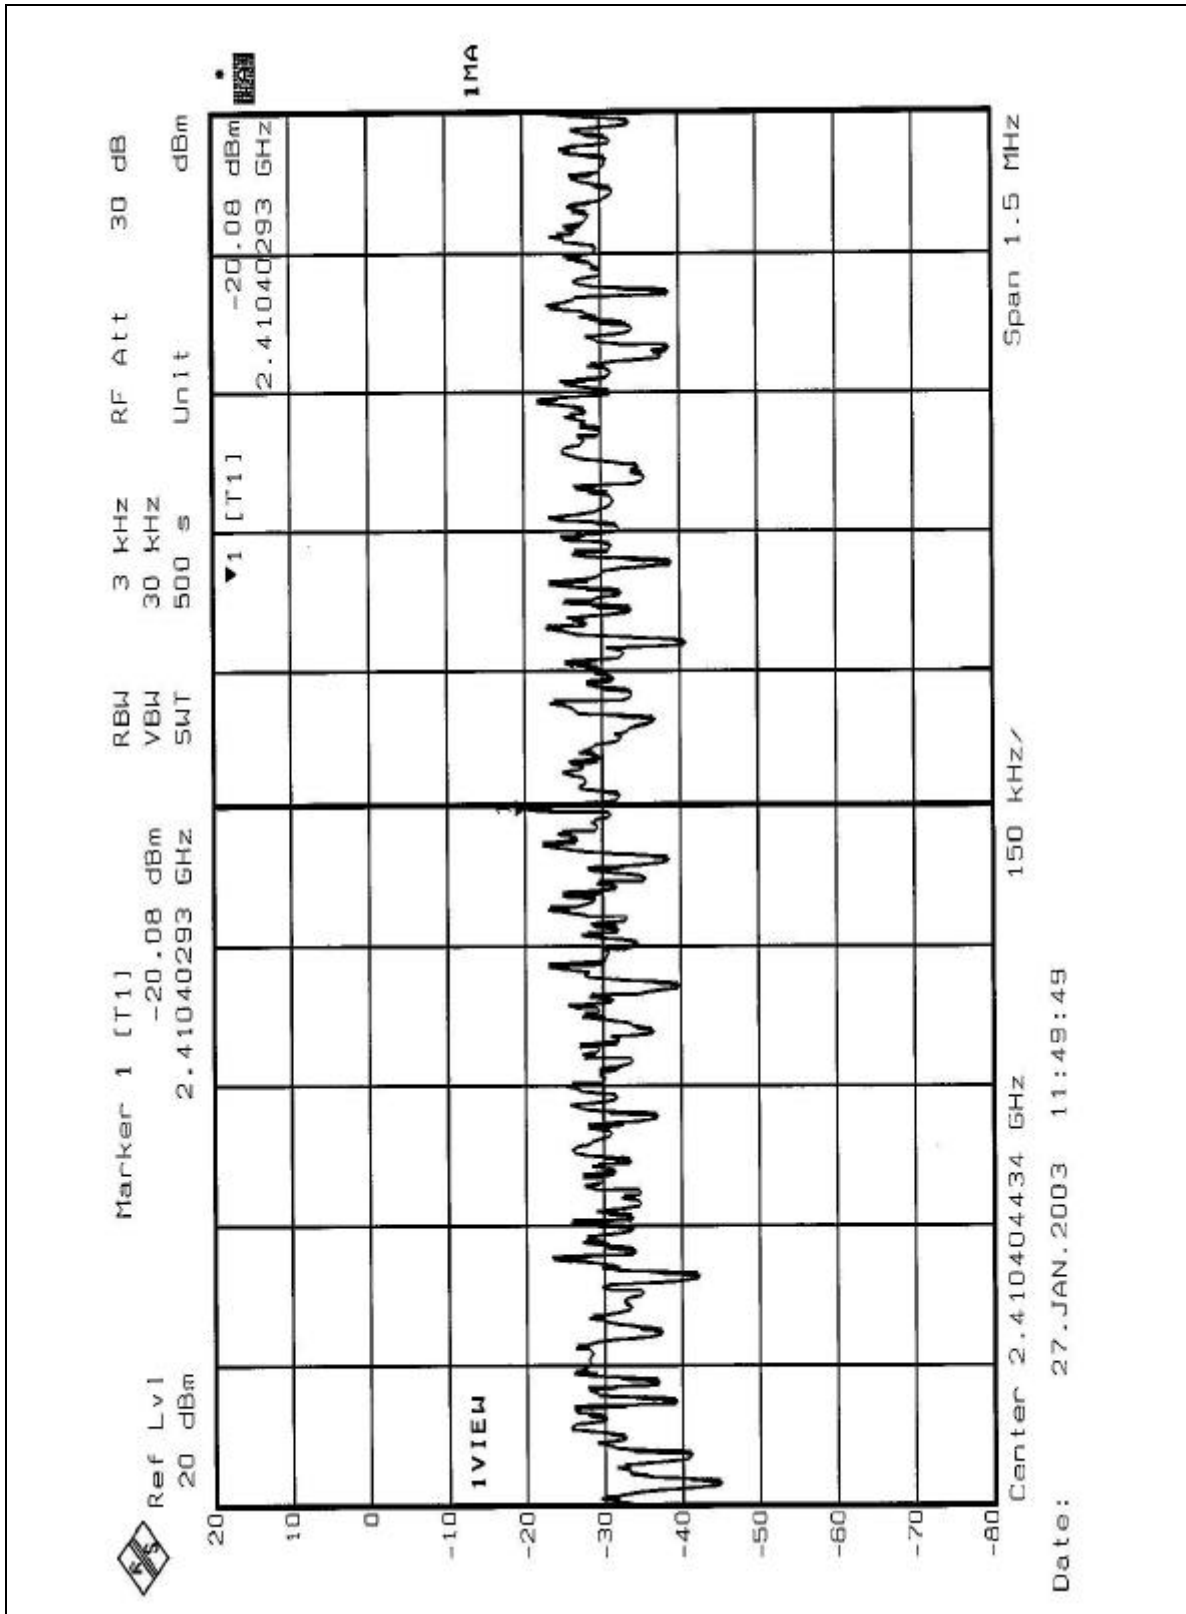




CH6

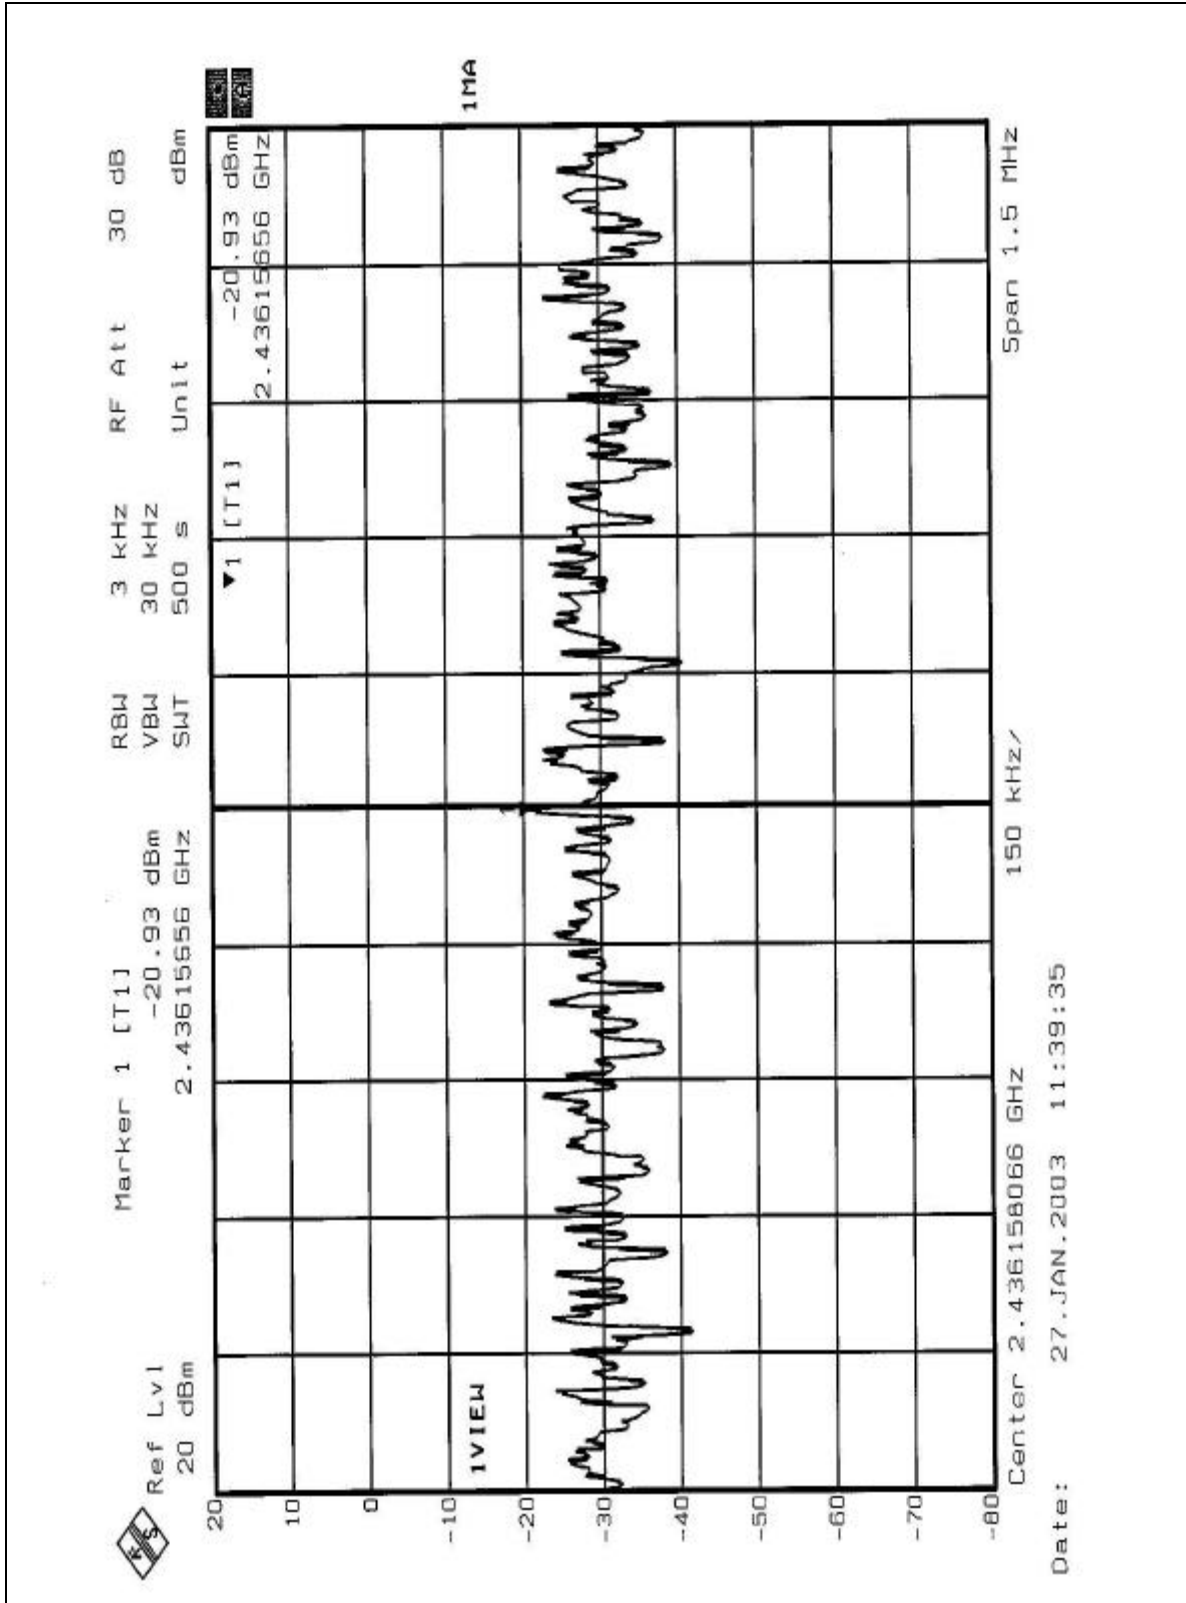



CH11

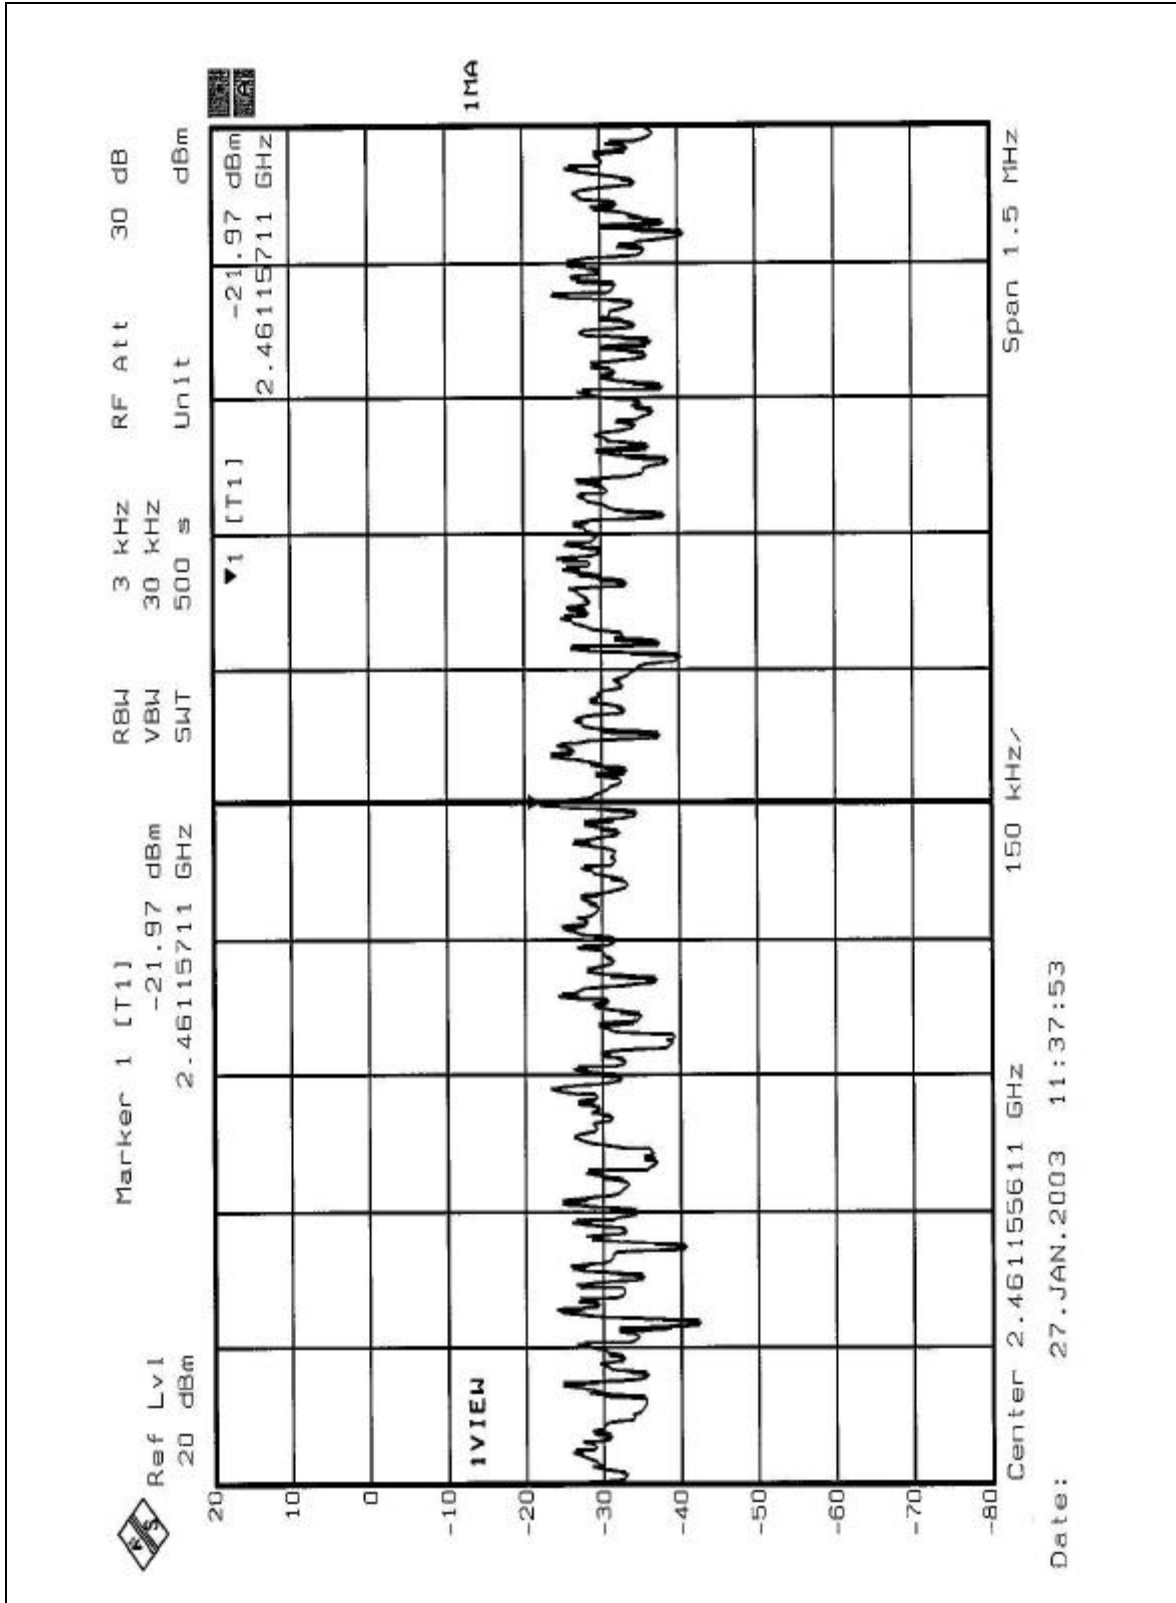



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation



4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6


4.6.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE1: The band edge emission plot on the following first page shows 41.68dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.10 is 95.6dBuV/m, so the maximum field strength in restrict band is $95.6 - 41.68 = 53.92$ dBuV/m which is under 54 dBuV/m limit.

NOTE2: The band edge emission plot on the following second page shows 51.14dB delta between carrier maximum power and local maximum emission in restrict band (2.4840GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.10 is 94.2dBuV/m, so the maximum field strength in restrict band is $94.2 - 51.14 = 43.06$ dBuV/m which is under 54 dBuV/m limit.

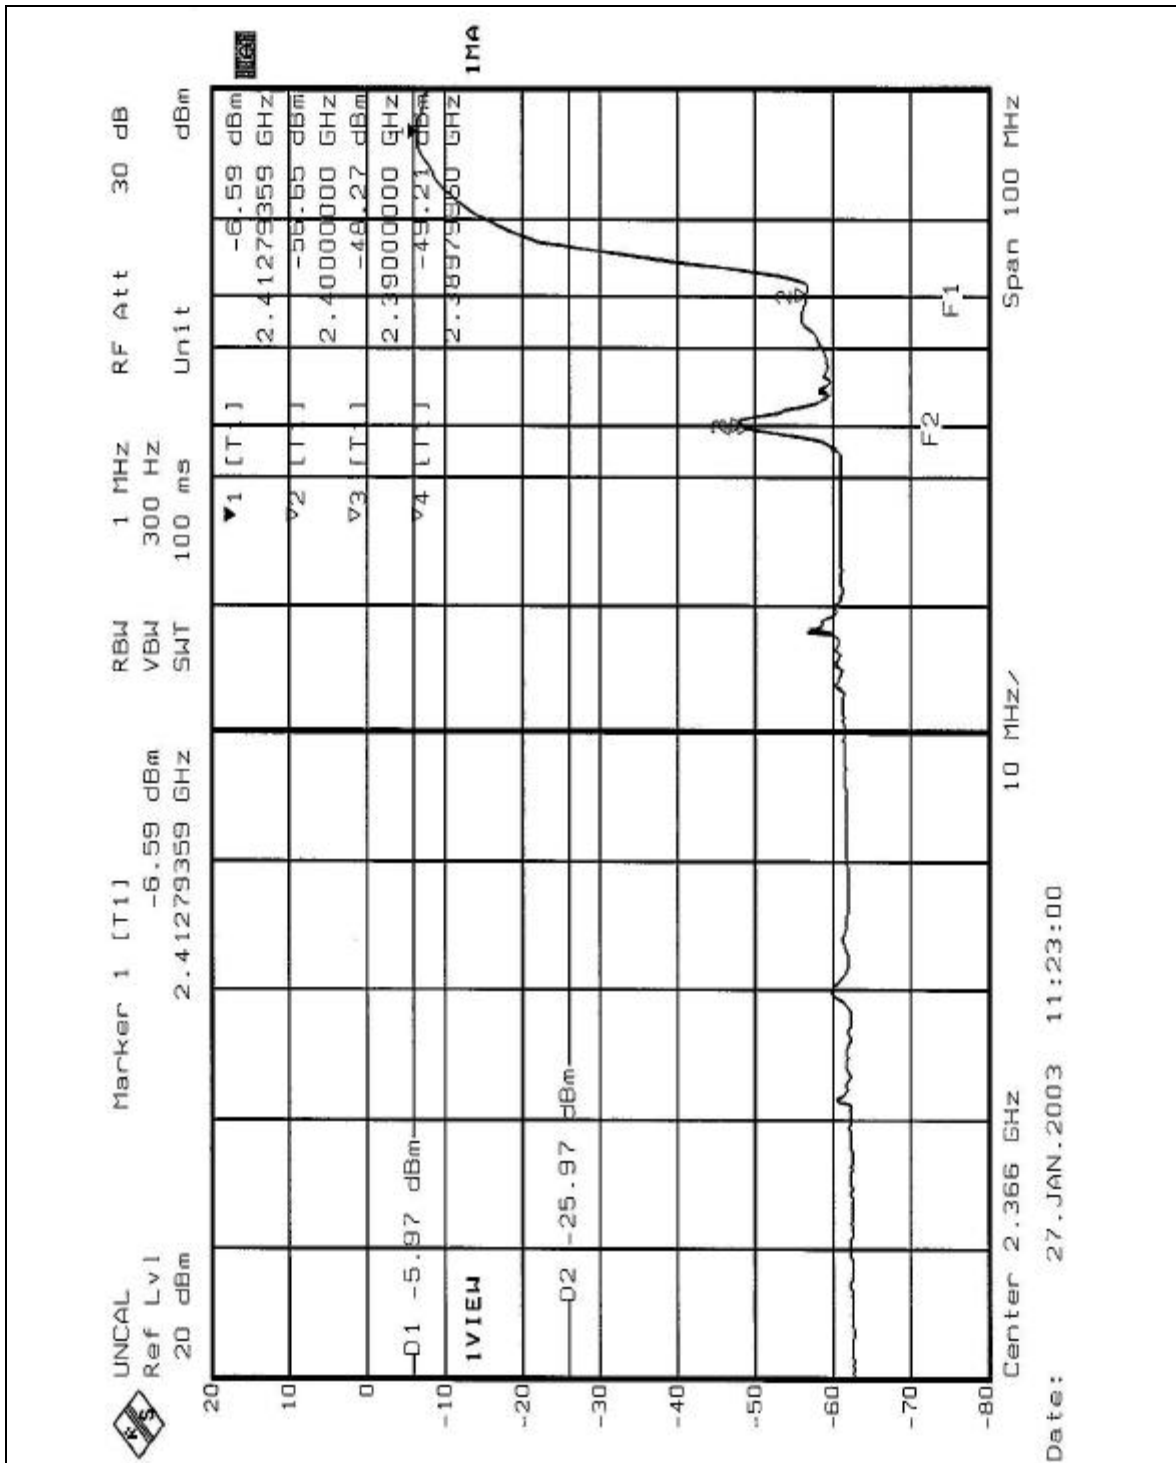

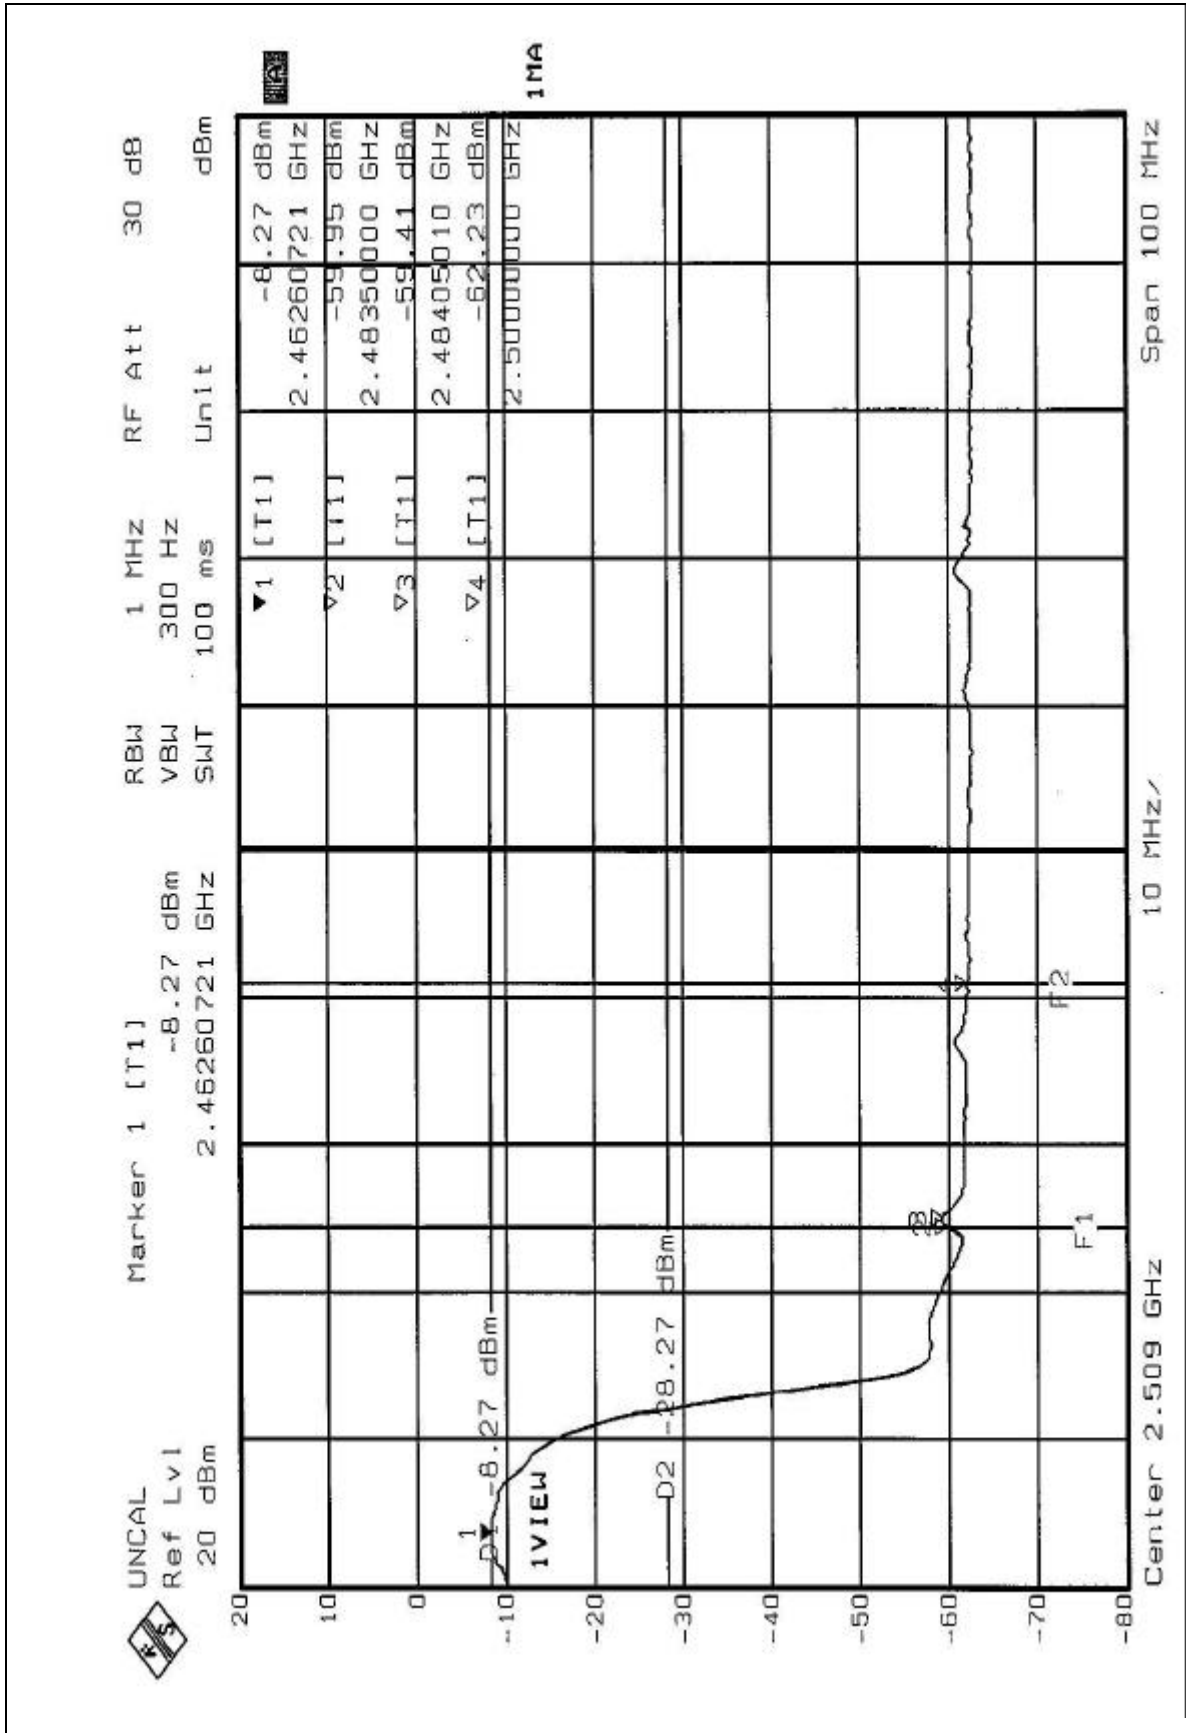


5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST





RADIATED EMISSION TEST

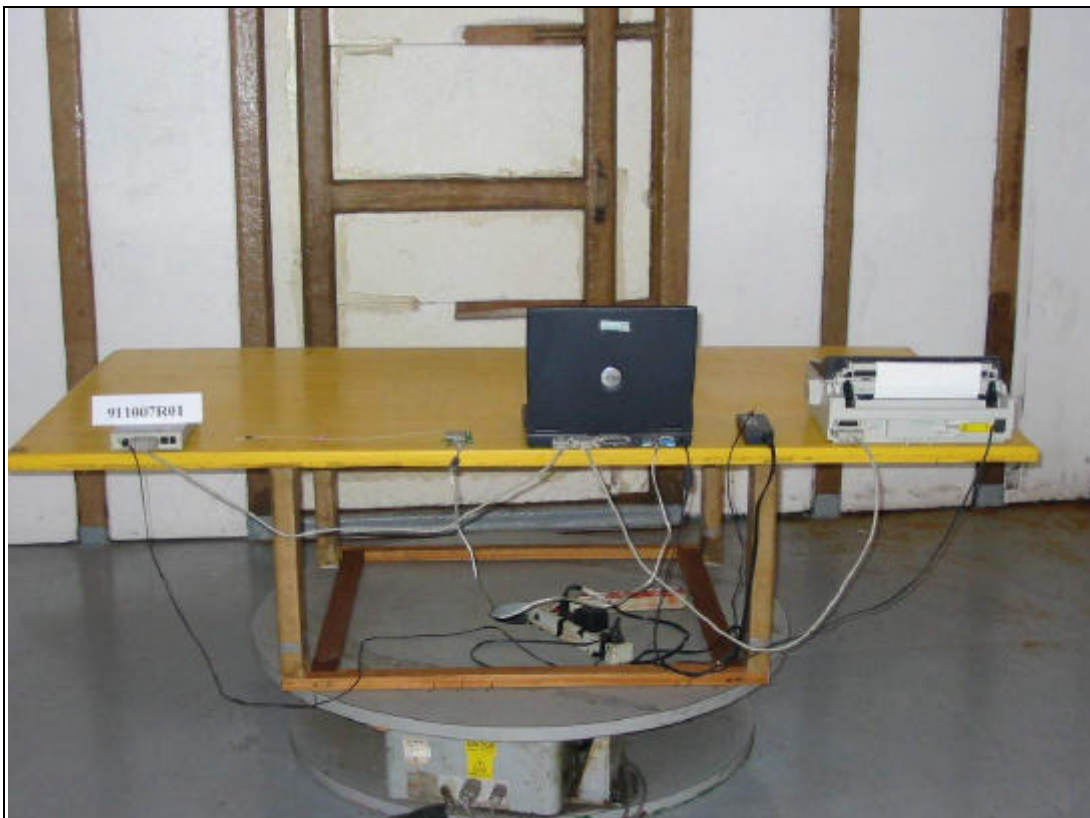





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.